




Shenzhen Asia Test Technology Co., Ltd.

7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District, Shenzhen, China
Tel: +86)-0755-23284990 Email: att@att-lab.com Http: // www.att-lab.cn

FCC RADIO TEST REPORT

FCC ID: 2AKLL-INVENTOR2

Product : Inventor II (3D printer)

Trade Name :  FLASHFORGE
3D PRINTER

Model Name : INVENTOR II

Serial Model : N/A

Prepared for

Zhejiang Flashforge 3D Technology CO., Ltd.

No.518, Xianyuan Road, Jinhua, Zhejiang, China

Prepared by

Shenzhen Asia Test Technology Co.,Ltd.

7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District,
Shenzhen, China

Tel: +86)-0755-23284990 Fax: +86)-0755-23284990
Http: www.att-lab.cn



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 2 of 76 -

TEST RESULT CERTIFICATION

Manufacture's Name... Zhejiang Flashforge 3D Technology CO., Ltd.

Address No.518, Xianyuan Road, Jinhua, Zhejiang, China

Product description

Product name Inventor II (3D printer)

Model and/or type INVENTOR II
reference

Additional Model N/A

Standards FCC Part15.247

Test procedure ANSI C63.10-2013

This device described above has been tested by ATT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.




This report shall not be reproduced except in full, without the written approval of ATT, this document may be altered or revised by ATT, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests Dec. 23 2016 ~Jan. 23 2017

Date of Issue..... Jan. 23 2017

Test Result..... Pass

| | | |
|----------------------|---|--|
| Testing Engineer | : |  _____ (Jack Yu) |
| Technical Manager | : |  _____ (Jerry You) |
| Authorized Signatory | : |  _____ (Can Liu) |

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 3 of 76 -

| Table of Contents | Page |
|---|-----------|
| 1 . SUMMARY OF TEST RESULTS | 5 |
| 1.1 TEST FACILITY | 7 |
| 1.2 MEASUREMENT UNCERTAINTY | 7 |
| 2 . GENERAL INFORMATION | 8 |
| 2.1 GENERAL DESCRIPTION OF EUT | 8 |
| 2.2 DESCRIPTION OF TEST MODES | 9 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11 |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 11 |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | 13 |
| 3 . EMC EMISSION TEST | 15 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 15 |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS | 15 |
| 3.1.2 TEST PROCEDURE | 16 |
| 3.1.3 DEVIATION FROM TEST STANDARD | 16 |
| 3.1.4 TEST SETUP | 16 |
| 3.1.5 EUT OPERATING CONDITIONS | 16 |
| 3.1.6 TEST RESULTS | 17 |
| 3.2 RADIATED EMISSION MEASUREMENT | 19 |
| 3.2.1 RADIATED EMISSION LIMITS | 19 |
| 3.2.2 TEST PROCEDURE | 19 |
| 3.2.3 DEVIATION FROM TEST STANDARD | 23 |
| 3.2.4 TEST SETUP | 24 |
| 3.2.5 EUT OPERATING CONDITIONS | 25 |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) | 26 |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) | 27 |
| 3.2.8 TEST RESULTS (ABOVE 1000 MHZ) | 29 |
| 4 . POWER SPECTRAL DENSITY TEST | 53 |
| 4.1 APPLIED PROCEDURES / LIMIT | 53 |
| 4.1.1 TEST PROCEDURE | 53 |
| 4.1.2 DEVIATION FROM STANDARD | 53 |
| 4.1.3 TEST SETUP | 53 |



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 4 of 76 -

| Table of Contents | Page |
|--|------|
| 4.1.4 EUT OPERATION CONDITIONS | 53 |
| 4.1.5 TEST RESULTS | 54 |
| 5 . BANDWIDTH TEST | 60 |
| 5.1 APPLIED PROCEDURES / LIMIT | 60 |
| 5.1.1 TEST PROCEDURE | 60 |
| 5.1.2 EUT OPERATION CONDITIONS | 60 |
| 5.1.3 TEST RESULTS | 61 |
| 6 . PEAK OUTPUT POWER TEST | 67 |
| 6.1 APPLIED PROCEDURES / LIMIT | 67 |
| 6.1.1 TEST PROCEDURE | 67 |
| 6.1.2 DEVIATION FROM STANDARD | 67 |
| 6.1.3 TEST SETUP | 67 |
| 6.1.4 EUT OPERATION CONDITIONS | 67 |
| 6.1.5 TEST RESULTS | 68 |
| 7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE | 69 |
| 7.1 DEVIATION FROM STANDARD | 69 |
| 7.2 TEST SETUP | 69 |
| 7.3 EUT OPERATION CONDITIONS | 69 |
| 7.4 TEST RESULTS | 70 |
| 8 . ANTENNA REQUIREMENT | 74 |
| 8.1 STANDARD REQUIREMENT | 74 |
| 8.2 EUT ANTENNA | 74 |
| 9 . EUT TEST PHOTO | 75 |
| APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | |



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 5 of 76 -

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| Test Item | FCC Part No. | Requirements | Verdict |
|--|---------------------|--|---------|
| DTS (6 dB) Bandwidth | 15.247(a)(2) | ≥ 500 kHz. | PASS |
| Maximum Peak Conducted Output Power | 15.247(b)(3) | For directional gain: $< 30\text{dBm} - (G[\text{dBi}] - 6[\text{dB}])$, peak; Otherwise: $< 30\text{dBm}$, peak. | PASS |
| Maximum Power Spectral Density Level | 15.247(e) | For directional gain: $< 8\text{dBm}/3\text{ kHz} - (G[\text{dBi}] - 6[\text{dB}])$, peak. Otherwise: $< 8\text{dBm}/3\text{ kHz}$, peak. | PASS |
| Band Edges Compliance | 15.247(d) | $< -20\text{dBm}/100\text{ kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Non-Restricted Frequency Bands | 15.247(d) | $< -20\text{dBm}/100\text{ kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Restricted Frequency Bands (Conducted) | 15.247(d) 15.209 | $< -20\text{dBm}/100\text{ kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Restricted Frequency Bands (Radiated) | 15.247(d) 15.209 | FCC Part 15.209 field strength limit; | PASS |
| AC Power Line Conducted Emissions | 15.207 | FCC Part 15.207 conducted limit; | PASS |

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Summary of measurement results

| Test Specification clause | Test case | Test Mode | Test Channel | Recorded In Report | | Pass | Fail | NA | NP | Remark |
|---------------------------|-------------------------------------|------------------------------------|---|------------------------------------|---|-------------------------------------|--------------------------|--------------------------|--------------------------|----------|
| §15.247(b)(4) | Antenna gain | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(e) | Power spectral density | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(a)(1) | Spectrum bandwidth – 6 dB bandwidth | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247 | Maximum output | 802.11b 802.11g | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle | 802.11b 802.11g | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 6 of 76 -

| | | | | | | | | | | |
|-----------------------|---|------------------------------------|---|------------------------------------|---|--|--------------------------|--------------------------|--------------------------|----------|
| b)(1) | power | 802.11n HT20 | <input checked="" type="checkbox"/> Highest | 802.11n HT20 | <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | | | | |
| §15.247(d) | Band edge compliance conducted | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.205 | Band edge compliance radiated | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions conducted | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions radiated | 802.11b 802.11g 802.11n HT20 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.109 | RX spurious emissions radiated | -/- | -/- | -/- | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.209(a) | TX spurious Emissions radiated < 30 MHz | 802.11b | -/- | 802.11b | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.107(a) §15.207 | Conducted Emissions < 30 MHz | 802.11b | -/- | 802.11b | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 7 of 76 -

1.1 TEST FACILITY

Shenzhen Asia Test Technology Co.,Ltd.

7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District, Shenzhen, China

FCC Registration No.: 348715

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|------------------------------|---------------------------|
| 1 | Conducted Emission Test | $\pm 1.38\text{dB}$ |
| 2 | RF power,conducted | $\pm 0.16\text{dB}$ |
| 3 | Spurious emissions,conducted | $\pm 0.21\text{dB}$ |
| 4 | All emissions,radiated(<1G) | $\pm 4.68\text{dB}$ |
| 5 | All emissions,radiated(>1G) | $\pm 4.89\text{dB}$ |
| 6 | Temperature | $\pm 0.5^{\circ}\text{C}$ |
| 7 | Humidity | $\pm 2\%$ |



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 8 of 76 -

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------------|--|
| Equipment | Inventor II (3D printer) |
| Model Name | INVENTOR II |
| Serial number | S10001 |
| Serial Model | N/A |
| Model Difference | N/A |
| WLAN FCC Operation frequency | IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz |
| WLAN FCC Modulation Type | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| Antenna | 0dbi, PCB antenna |
| Ratings | DC 24V, 2.71A |
| Adapter | M/N:KPL-060M-VI Input:100-240V~, 50/60Hz, 1.7A Output:24Vdc, 2.71A, 65W |
| Battery | N/A |
| HW: | MM_201604 |
| SW: | V1.1 |



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 9 of 76 -

2.2 DESCRIPTION OF TEST MODES

IEEE 802.11b/g/n: The product support thirteen channels but only use Eleventh channels in USA.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1 | 2412 | 8 | 2447 |
| 2 | 2417 | 9 | 2452 |
| 3 | 2422 | 10 | 2457 |
| 4 | 2427 | 11 | 2462 |
| 5 | 2432 | | |
| 6 | 2437 | | |
| 7 | 2442 | | |

2.2.1 TEST MODES

| Test Case | Test Conditions | |
|--|--------------------|--|
| | Configuration | Description |
| DTS (6 dB) Bandwidth | Measurement Method | FCC KDB 558074 §8.2 Option 2 |
| | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | | |
| Maximum Peak Conducted Output Power | Measurement Method | FCC KDB 558074§9.1.2 |
| | Test Environment | NTNV |
| | Test Setup | Test Setup 1 |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| Maximum Power Spectral Density Level | Measurement Method | FCC KDB 558074 §10.2 (peak PSD). |
| | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | | |
| Unwanted Emissions into Non-Restricted Frequency Bands | Measurement Method | FCC KDB 558074§11.0. |
| | Test Environment | NTNV |
| | Test Setup | Test Setup 1 |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| Unwanted Emissions into Restricted Frequency Bands (Conducted) | Measurement Method | FCC KDB 558074§12.2, Conducted (antenna-port). |
| | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H |

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 10 of 76 -

| | | |
|------------------------------------|--------------------|--|
| | | 11n HT20_L, 11n HT20_M, 11n HT20_H |
| Unwanted Emissions into Restricted | Measurement Method | FCC KDB 558074§12.1,Radiated(cabinet/case emissions with Impedance matching for antenna-port). |
| | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |

| Test Case | Test Conditions | |
|-----------------------------------|--------------------|----------------------|
| | Configuration | Description |
| AC Power Line Conducted Emissions | Measurement Method | AC mains conducted. |
| | Test Environment | NTNV |
| | EUT Configuration | 11g_M (Worst Conf.). |

Remark:

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. Typical working modes for each IEEE 802.11mode are selected to perform tests. The manufacturer provide special test software(WLAN facility) to control TX duty cycle >98% for TX test. Set the output power to max(PK) as Prescribed by the manufacturer.

| Test Mode | Test Modes Description |
|-------------------|---|
| IEEE 802.11b | IEEE 802.11b with data rate of 1 Mbps using SISO mode. |
| IEEE 802.11g | IEEE 802.11g with data rate of 6 Mbps using SISO mode. |
| IEEE 802.11n HT20 | IEEE 802.11n with data date of MCS0 and bandwidth of 20MHz using SISO mode. |



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 11 of 76 -

2.2.2 EUT operation mode

| Test Mode | RF Ch. | TX Freq. [MHz] | RX Freq. [MHz] | Ch. BW [MHz] |
|----------------------|--------|---------------------|----------------|--------------|
| IEEE 802.11b | L | Ch No. 1 / 2412MHz | --- | 20 |
| | M | Ch No. 6 / 2437 MHz | --- | 20 |
| | H | Ch No. 11/ 2462MHz | --- | 20 |
| IEEE 802.11g | L | Ch No. 1 / 2412MHz | --- | 20 |
| | M | Ch No. 6 / 2437 MHz | --- | 20 |
| | H | Ch No. 11/ 2462MHz | --- | 20 |
| IEEE 802.11n HT20 | L | Ch No. 1 / 2412MHz | --- | 20 |
| | M | Ch No. 6 / 2437 MHz | --- | 20 |
| | H | Ch No. 11/ 2462MHz | --- | 20 |

2.2.3 EUT configuratio


The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

| | | |
|---------------|----------------|---|
| ○ Power Cable | Length (m) : | / |
| | Shield : | / |
| | Detachable : | / |
| ○ Multimeter | Manufacturer : | / |
| | Model No. : | / |

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

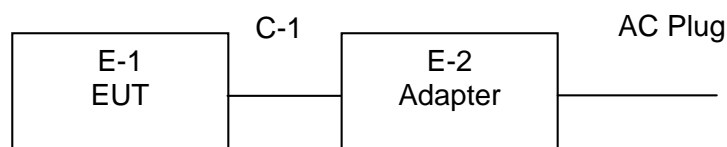

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)


This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 12 of 76 -

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Brand | Model/Type No. | Series No. | Note |
|------|--------------------------|---|----------------|------------|------|
| E-1 | Inventor II (3D printer) |  FLASHFORGE 3D PRINTER | INVENTOR II | N/A | EUT |
| E-2 | Adapter | N/A | KPL-060M-VI | N/A | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C-1 | NO | NO | 0.8m | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 13 of 76 -

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

| Equipment No. | Instrument | Manufacturer | Model Name | Serial Number | Specification | Cal. Data | due date |
|---------------|-------------------------|-------------------|------------|---------------|----------------|------------|------------|
| 1 | Semi-anechoic chamber | Changzhou Chengyu | EC3088 | N/A | 9*6*6m | 10/25/2016 | 10/24/2017 |
| 2 | Broadband antenna | R&S | VULB 9160 | VULB91 60-516 | 30MHz-1500 MHz | 10/25/2016 | 10/24/2017 |
| 3 | Horn antenna | R&S | BBHA 9120D | 10087 | 1GHz-18GH z | 06/05/2016 | 10/24/2017 |
| 4 | Test receiver | R&S | ESCI | 101686 | 9KHz-3GHz | 10/25/2016 | 10/24/2017 |
| 5 | EMI Measuring Receiver | R&S | ESR | 101660 | 9KHz-40GHz | 10/25/2016 | 10/24/2017 |
| 6 | Multi-device controller | MF | MF-7868 | MF78680 8762 | N/A | 10/25/2016 | 10/24/2017 |
| 7 | Amplifier | EM | EM-30180 | 060538 | 1GHz-18GH z | 10/25/2016 | 10/24/2017 |
| 8 | Amplifier | Schwarzbeck | BBV 9475 | BBV 9475-663 | 1GHz-18GH z | 06/05/2016 | 06/04/2017 |
| 9 | Spectrum Analyzer | agilent | E4440B | US44300368 | 1GHz-26.5GH z | 06/05/2016 | 06/04/2017 |
| 10 | Test receiver | R&S | ESCI | 101689 | 9KHz-3GHz | 10/25/2016 | 10/24/2017 |
| 11 | LISN | R&S | NSLK81 26 | 8126466 | 9k-30MHz | 10/25/2016 | 10/24/2017 |
| 12 | LISN | Narda | L2-16B | 5589756 | 9k-30MHz | 10/25/2016 | 10/24/2017 |
| 13 | Power Meter | Anritsu | ML2495A | N/A | 40MHz | 10/25/2016 | 10/24/2017 |
| 14 | Power sensor | Anritsu | MA2411B | N/A | 40MHz | 10/25/2016 | 10/24/2017 |
| 15 | Radiated Cable 1# | FUJIKURA | 5D-2W | 01 | 30MHz-1GHz | 10/25/2016 | 10/24/2017 |

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 14 of 76 -

| | | | | | | | |
|---|--------------------------|----------|-----------|-----|-------------|------------|------------|
| 16 | Radiated Cable 2# | FUJIKURA | 10D2W | 02 | 1GHz -25GHz | 10/25/2016 | 10/24/2017 |
| 17 | Conducted Cable 1# | FUJIKURA | 1D-2W | 01 | 9KHz-30MHz | 10/25/2016 | 10/24/2017 |
| 18 | SMA Antenna connector | Dosin | Dosin-SMA | N/A | N/A | 10/25/2016 | 10/24/2017 |
| Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list. The Cal.Interval was one year | | | | | | | |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | | | Standard |
|-----------------|------------|-----------|----------|
| | Quasi-peak | Average | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | CISPR |
| 0.50 -5.0 | 56.00 | 46.00 | CISPR |
| 5.0 -30.0 | 60.00 | 50.00 | CISPR |

| | | | |
|-----------|-----------|-----------|-----|
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |




3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

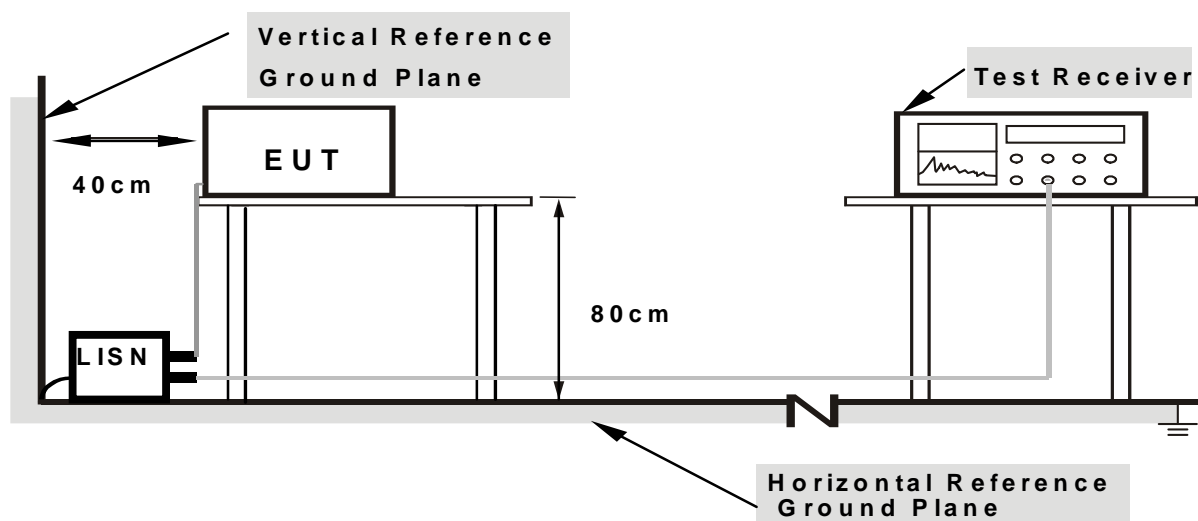

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 17 of 76 -


3.1.6 TEST RESULTS

Phase : L Test Voltage : DC 24V from adapter AC 120V/60Hz

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over | | |
|-----|-----|--------|---------|---------|----------|-------|--------|----------|---------|
| | | MHz | Level | Factor | ment | | | Detector | Comment |
| | | | dBuV | dB | dBuV | dBuV | dB | | |
| 1 | | 0.1555 | 43.96 | 10.84 | 54.80 | 65.70 | -10.90 | peak | |
| 2 | | 0.1632 | 32.14 | 10.33 | 42.47 | 55.29 | -12.82 | AVG | |
| 3 | | 0.3339 | 23.16 | 10.42 | 33.58 | 49.35 | -15.77 | AVG | |
| 4 | | 0.3356 | 35.75 | 10.42 | 46.17 | 59.31 | -13.14 | peak | |
| 5 | | 0.3860 | 35.10 | 10.42 | 45.52 | 58.15 | -12.63 | peak | |
| 6 | | 0.4060 | 22.53 | 10.42 | 32.95 | 47.73 | -14.78 | AVG | |
| 7 | | 0.7459 | 32.02 | 10.41 | 42.43 | 56.00 | -13.57 | peak | |
| 8 | | 0.7740 | 21.07 | 10.41 | 31.48 | 46.00 | -14.52 | AVG | |
| 9 | | 1.4699 | 24.84 | 10.45 | 35.29 | 46.00 | -10.71 | AVG | |
| 10 | | 1.4979 | 35.36 | 10.45 | 45.81 | 56.00 | -10.19 | peak | |
| 11 | | 1.7900 | 36.58 | 10.44 | 47.02 | 56.00 | -8.98 | peak | |
| 12 | * | 1.7980 | 28.97 | 10.44 | 39.41 | 46.00 | -6.59 | AVG | |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

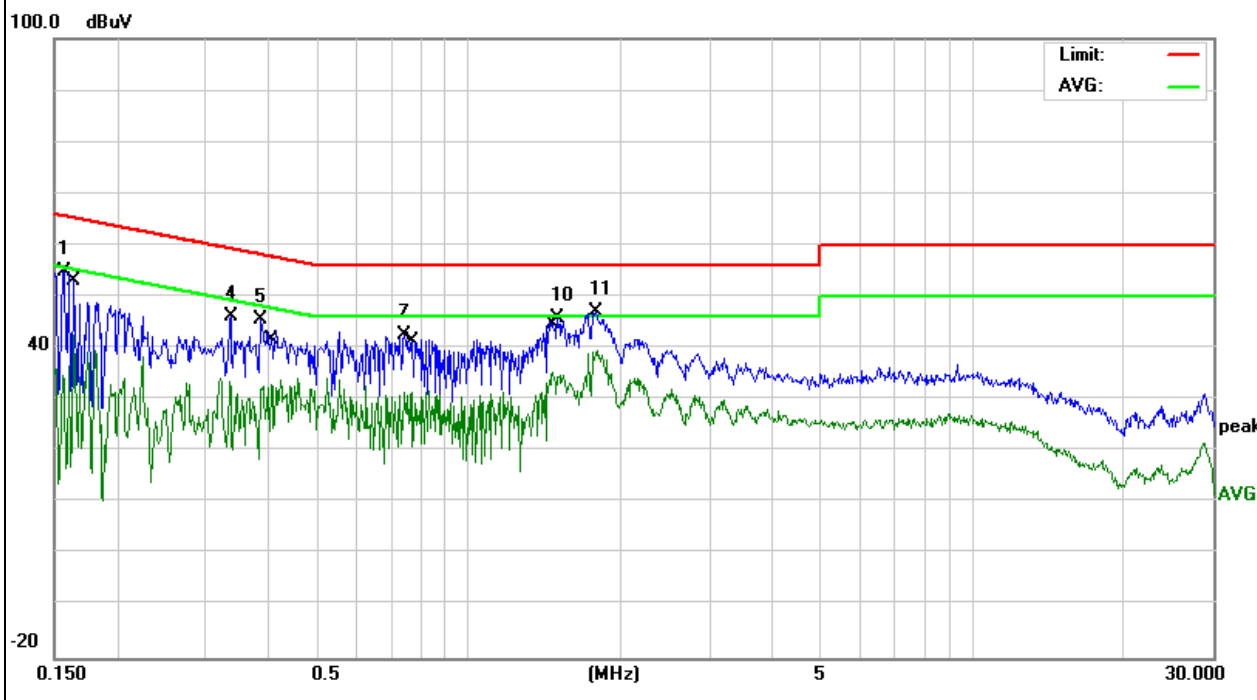

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.


Report No. ATT-2016SZ1219182F
- Page 18 of 76 -

| | | | |
|---------|---|----------------|----------------------------------|
| Phase : | N | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
|---------|---|----------------|----------------------------------|

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | 0.1507 | 43.10 | 11.40 | 54.50 | 65.96 | -11.46 | peak | |
| 2 | 0.1524 | 25.52 | 11.21 | 36.73 | 55.86 | -19.13 | AVG | |
| 3 | 0.1598 | 44.15 | 10.35 | 54.50 | 65.47 | -10.97 | peak | |
| 4 | 0.1632 | 32.14 | 10.33 | 42.47 | 55.29 | -12.82 | AVG | |
| 5 | 0.3082 | 34.58 | 10.42 | 45.00 | 60.02 | -15.02 | peak | |
| 6 | 0.3199 | 23.62 | 10.42 | 34.04 | 49.71 | -15.67 | AVG | |
| 7 | 0.5540 | 32.68 | 10.41 | 43.09 | 56.00 | -12.91 | peak | |
| 8 | 0.5540 | 23.49 | 10.41 | 33.90 | 46.00 | -12.10 | AVG | |
| 9 | 1.4220 | 32.95 | 10.45 | 43.40 | 56.00 | -12.60 | peak | |
| 10 | 1.4700 | 22.57 | 10.45 | 33.02 | 46.00 | -12.98 | AVG | |
| 11 | 1.9060 | 33.24 | 10.44 | 43.68 | 56.00 | -12.32 | peak | |
| 12 * | 1.9140 | 24.61 | 10.44 | 35.05 | 46.00 | -10.95 | AVG | |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. N/A means All Data have pass Limit

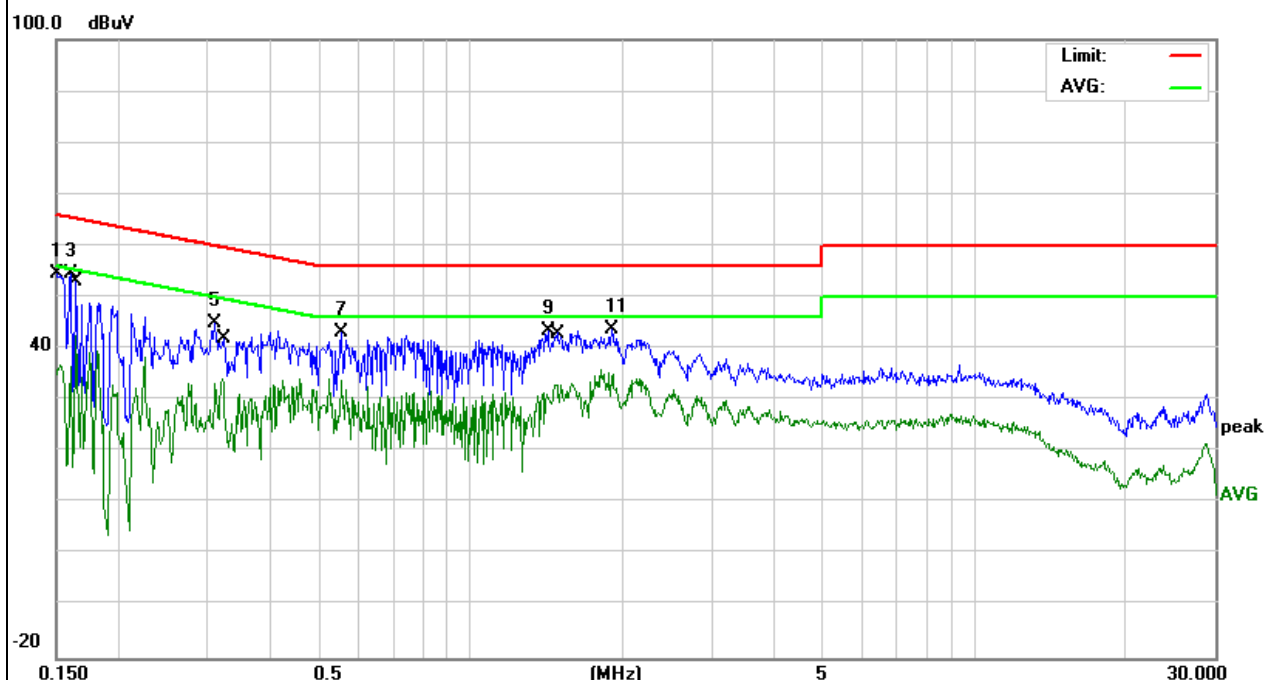

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |
| Receiver Parameter | Setting |
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

3.2.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz and 1.50m above ground plane for above 1GHz.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 20 of 76 -

- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- The EUT minimum operation frequency was 24MHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9 KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Bilog Antenna | 3 |
| 1GHz-18GHz | Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 3 |

- Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|---|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Peak |
| | Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |

More procedure as follows;

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F

- Page 21 of 76 -

- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 22 of 76 -

described by manufacturer.

- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Field Strength Calculation

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 23 of 76 -

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

For example

| Frequency (MHz) | FS (dBμV/m) | RA (dBμV/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|--------------------|----------------|----------------|------------|------------|------------|----------------|
| 300.00 | 40 | 58.1 | 12.2 | 1.6 | 31.90 | -18.1 |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$


3.2.3 DEVIATION FROM TEST STANDARD

No deviation




3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

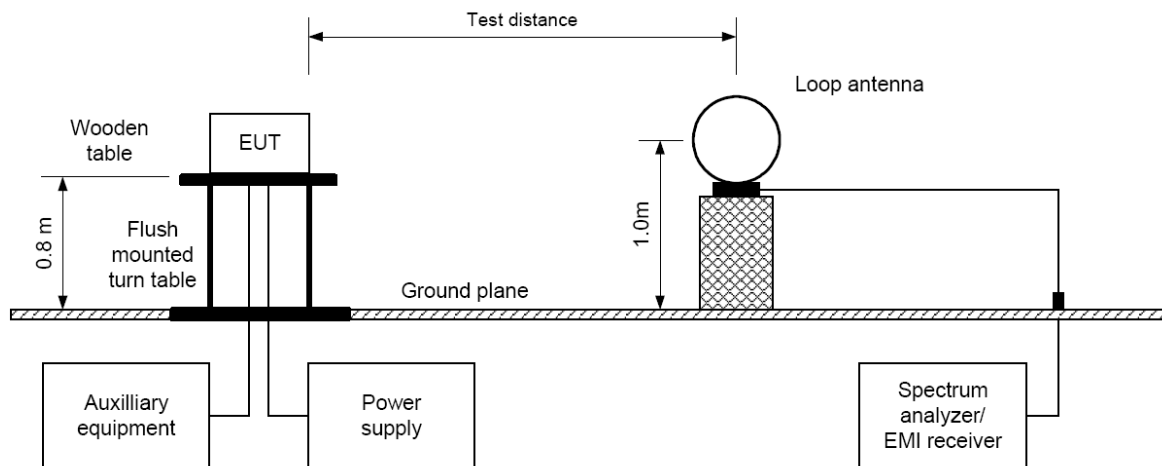


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

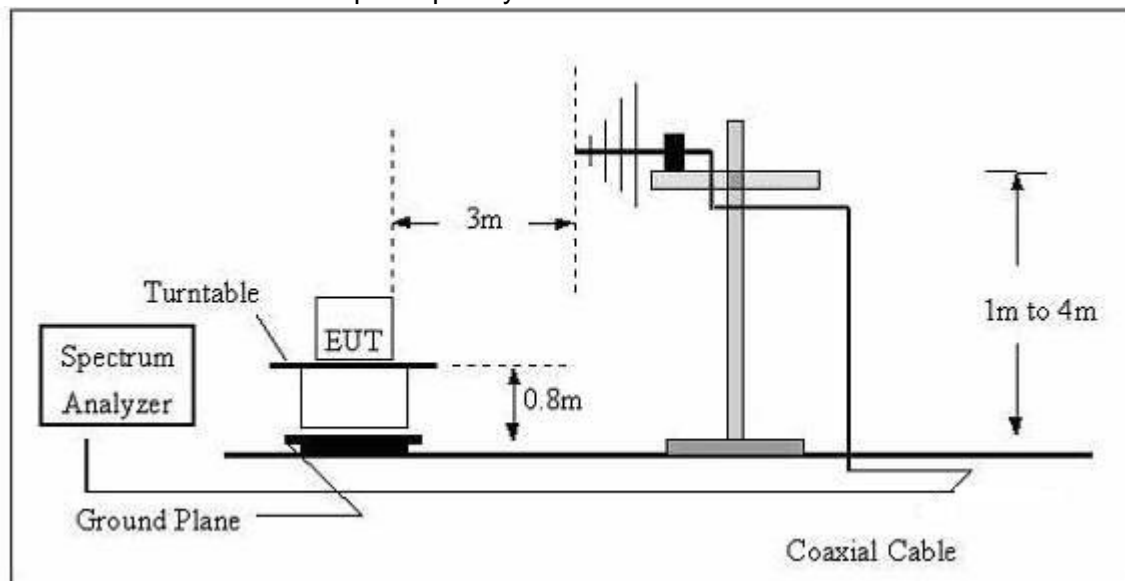



(C) Radiated Emission Test-Up Frequency Above 1GHz

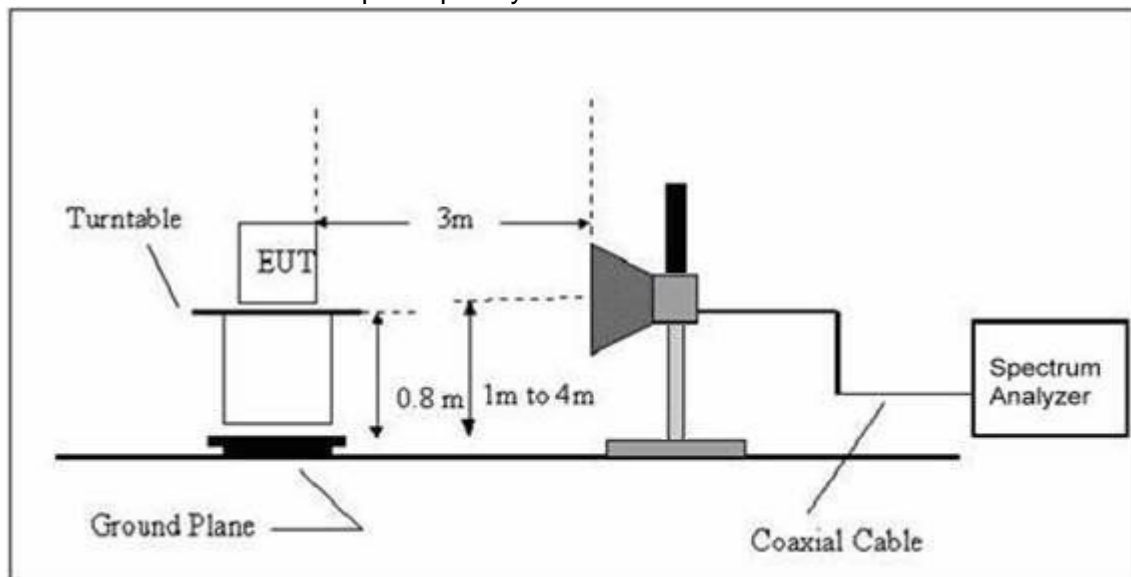

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 26 of 76 -

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

| | | | |
|--------------|--------------------------|--------------------|-------------------------------------|
| EUT: | Inventor II (3D printer) | Model Name. : | INVENTOR II |
| Temperature: | 20 °C | Relative Humidity: | 48% |
| Pressure: | 1010 hPa | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | TX | Polarization : | -- |

| Freq. | Reading | Limit | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB) | P/F |
| -- | -- | -- | -- | P |
| -- | -- | -- | -- | P |

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 27 of 76 -

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Horizontal | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2412 | | |

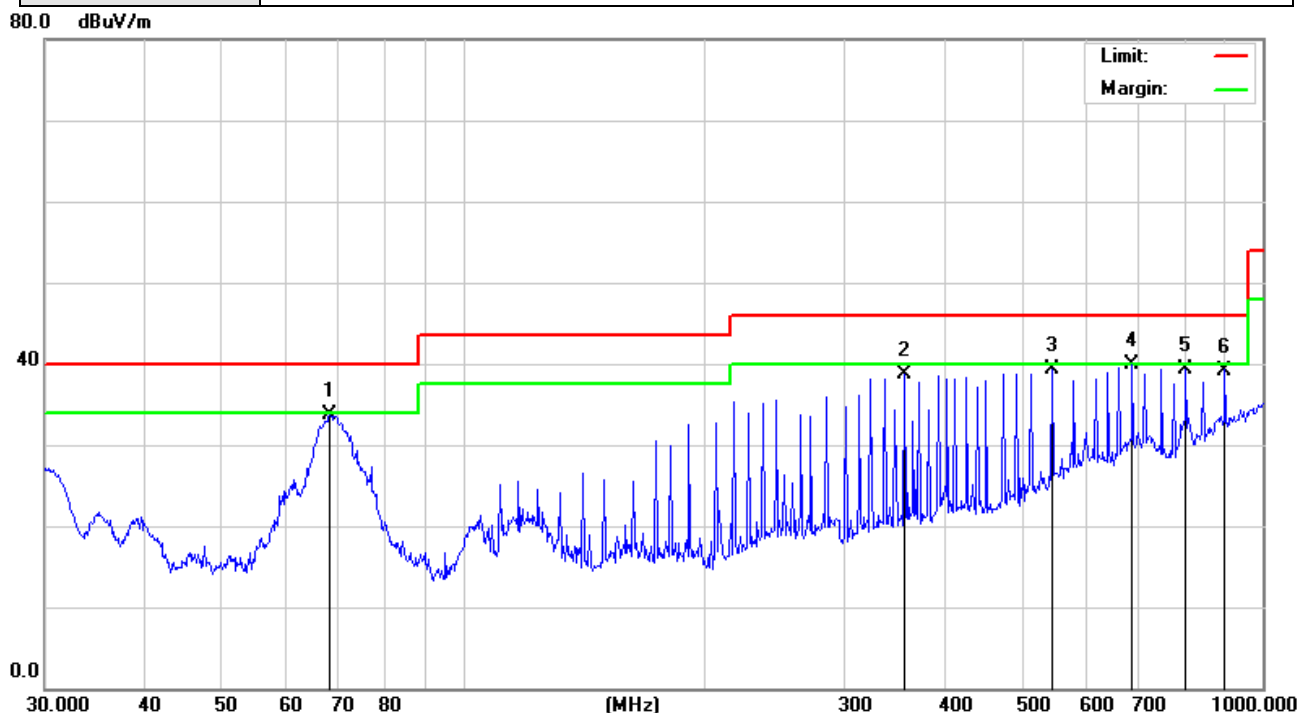

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 68.1512 | 52.87 | -19.08 | 33.79 | 40.00 | -6.21 | QP |
| 2 | | 356.6757 | 46.43 | -7.73 | 38.70 | 46.00 | -7.30 | QP |
| 3 | | 545.1825 | 43.16 | -3.86 | 39.30 | 46.00 | -6.70 | QP |
| 4 | * | 687.1507 | 40.46 | -0.56 | 39.90 | 46.00 | -6.10 | QP |
| 5 | | 801.7862 | 36.00 | 3.30 | 39.30 | 46.00 | -6.70 | QP |
| 6 | | 896.9963 | 36.42 | 2.78 | 39.20 | 46.00 | -6.80 | QP |


This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 28 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Vertical | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2412 | | |

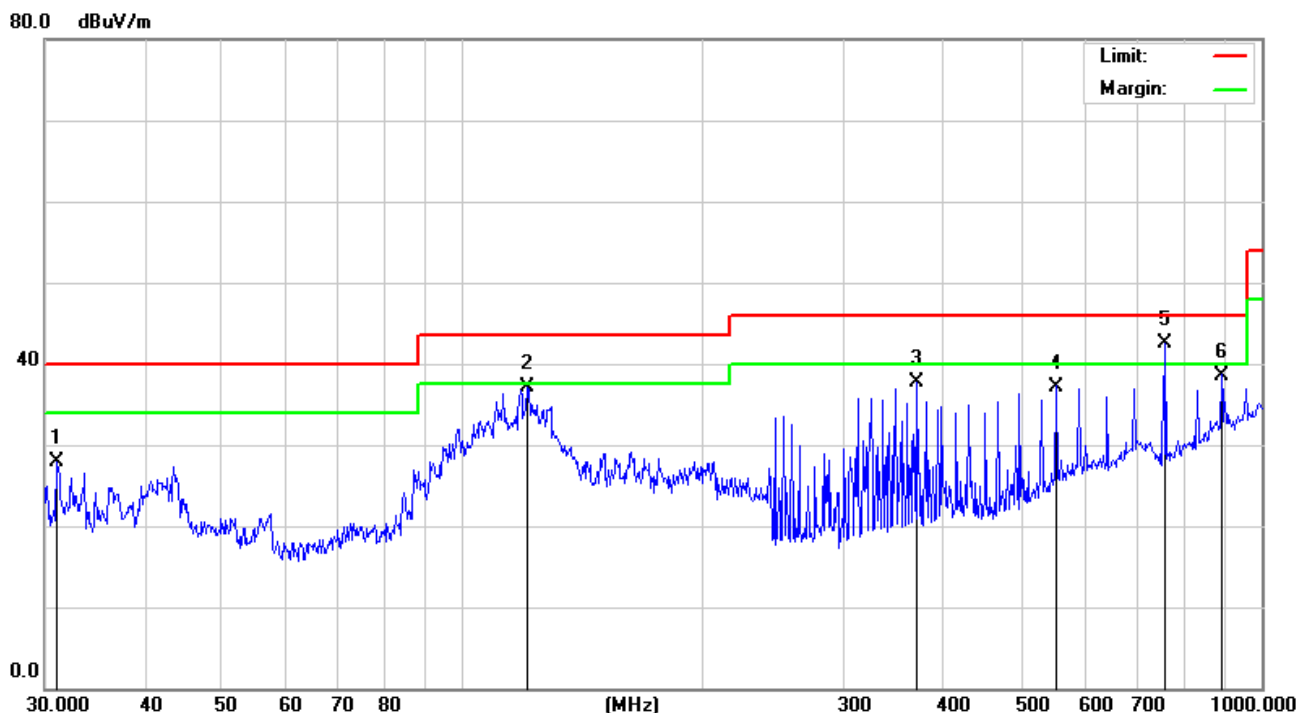

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 31.0703 | 43.28 | -15.38 | 27.90 | 40.00 | -12.10 | QP |
| 2 | | 120.2766 | 52.01 | -14.91 | 37.10 | 43.50 | -6.40 | QP |
| 3 | | 369.4045 | 45.24 | -7.56 | 37.68 | 46.00 | -8.32 | QP |
| 4 | | 552.8831 | 40.69 | -3.49 | 37.20 | 46.00 | -8.80 | QP |
| 5 | * | 758.0407 | 43.43 | -0.93 | 42.50 | 46.00 | -3.50 | QP |
| 6 | | 890.7278 | 35.87 | 2.73 | 38.60 | 46.00 | -7.40 | QP |

Note: test performed on 802.11b/g/n mode, "802.11b TX2412" mode is the worst mode and has been reported.

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 29 of 76 -

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Horizontal | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2412 | | |

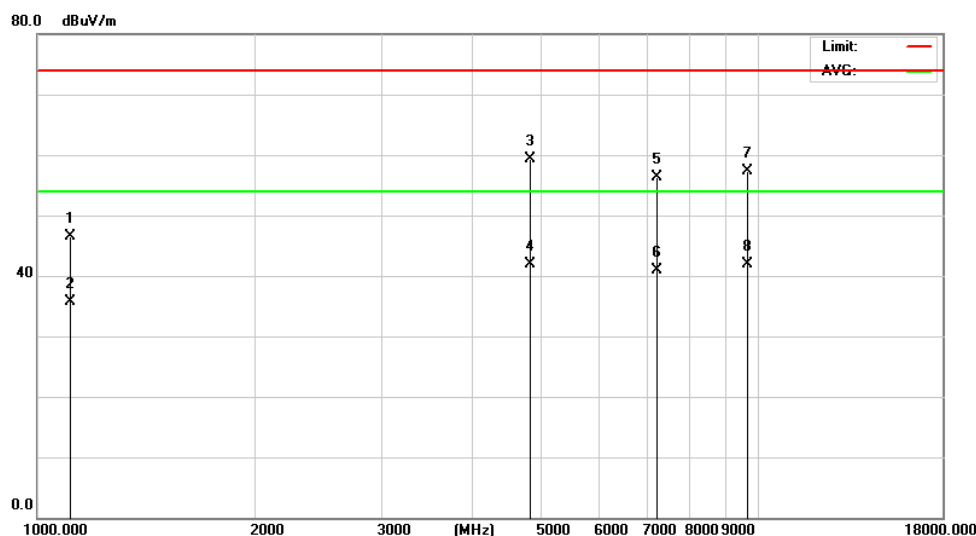

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | 1112.170 | 55.42 | -8.90 | 46.52 | 74.00 | -27.48 | peak |
| 2 | 1112.170 | 44.52 | -8.90 | 35.62 | 54.00 | -18.38 | AVG |
| 3 | 4824.120 | 51.26 | 8.14 | 59.40 | 74.00 | -14.60 | peak |
| 4 | 4824.120 | 33.68 | 8.14 | 41.82 | 54.00 | -12.18 | AVG |
| 5 | 7236.110 | 44.67 | 11.73 | 56.40 | 74.00 | -17.60 | peak |
| 6 | 7236.110 | 29.22 | 11.73 | 40.95 | 54.00 | -13.05 | AVG |
| 7 | 9648.000 | 39.72 | 17.68 | 57.40 | 74.00 | -16.60 | peak |
| 8 * | 9648.000 | 24.15 | 17.68 | 41.83 | 54.00 | -12.17 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value have no need to be reported above 10G.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 30 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Vertical | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2412 | | |

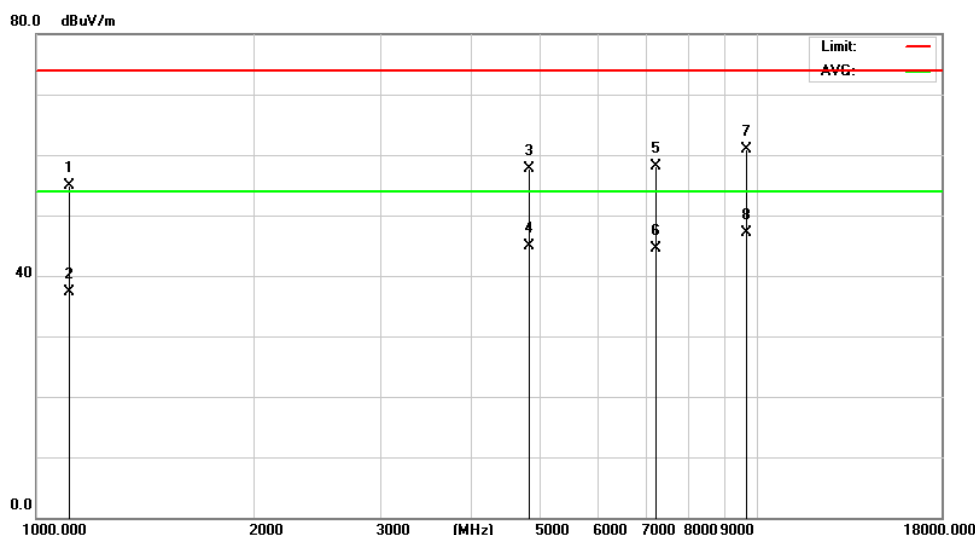

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 1112.170 | 63.77 | -8.90 | 54.87 | 74.00 | -19.13 | peak |
| 2 | | 1112.170 | 46.25 | -8.90 | 37.35 | 54.00 | -16.65 | AVG |
| 3 | | 4824.120 | 49.47 | 8.14 | 57.61 | 74.00 | -16.39 | peak |
| 4 | | 4824.120 | 36.77 | 8.14 | 44.91 | 54.00 | -9.09 | AVG |
| 5 | | 7236.110 | 46.35 | 11.73 | 58.08 | 74.00 | -15.92 | peak |
| 6 | | 7236.110 | 32.81 | 11.73 | 44.54 | 54.00 | -9.46 | AVG |
| 7 | | 9648.000 | 43.22 | 17.68 | 60.90 | 74.00 | -13.10 | peak |
| 8 | * | 9648.000 | 29.37 | 17.68 | 47.05 | 54.00 | -6.95 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value have no need to be reported above 10G.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 31 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Horizontal | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2437 | | |

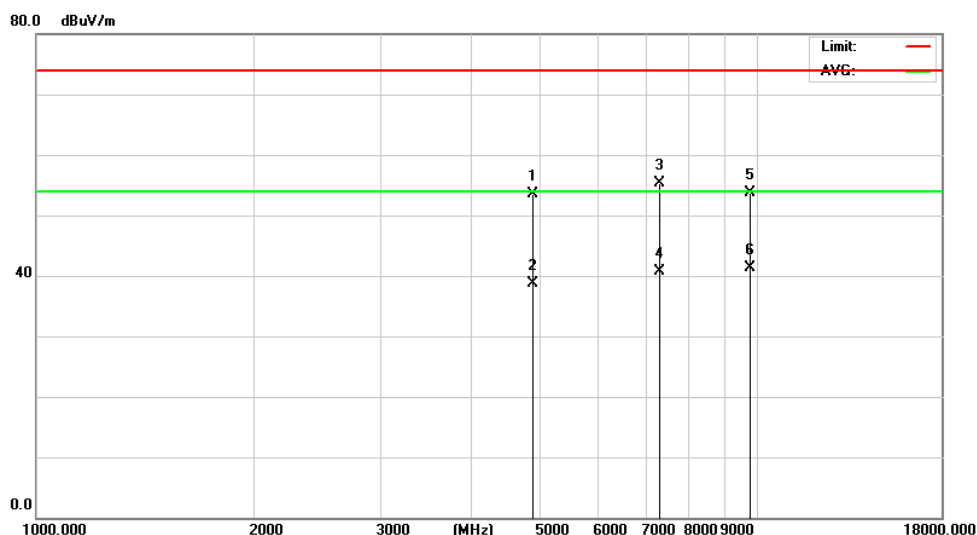

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | | 4874.000 | 45.27 | 8.17 | 53.44 | 74.00 | -20.56 | peak |
| 2 | | 4874.000 | 30.56 | 8.17 | 38.73 | 54.00 | -15.27 | AVG |
| 3 | | 7311.000 | 43.33 | 12.07 | 55.40 | 74.00 | -18.60 | peak |
| 4 | | 7311.110 | 28.64 | 12.07 | 40.71 | 54.00 | -13.29 | AVG |
| 5 | | 9748.000 | 35.45 | 18.20 | 53.65 | 74.00 | -20.35 | peak |
| 6 | * | 9748.000 | 23.18 | 18.20 | 41.38 | 54.00 | -12.62 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported above 10G.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 32 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Vertical | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2437 | | |

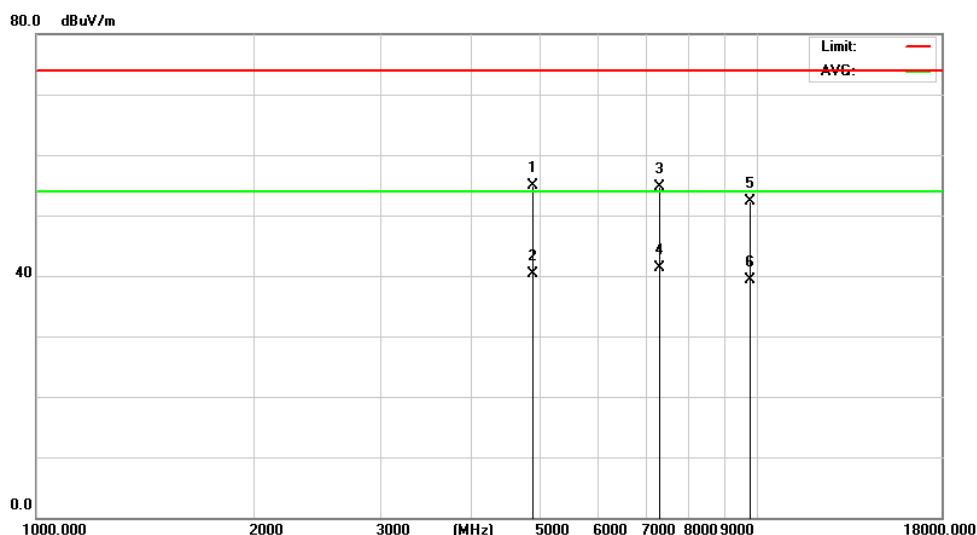

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | | 4874.000 | 46.71 | 8.17 | 54.88 | 74.00 | -19.12 | peak |
| 2 | | 4874.000 | 32.11 | 8.17 | 40.28 | 54.00 | -13.72 | AVG |
| 3 | | 7311.000 | 42.69 | 12.07 | 54.76 | 74.00 | -19.24 | peak |
| 4 | * | 7311.110 | 29.24 | 12.07 | 41.31 | 54.00 | -12.69 | AVG |
| 5 | | 9748.000 | 34.02 | 18.20 | 52.22 | 74.00 | -21.78 | peak |
| 6 | | 9748.000 | 21.19 | 18.20 | 39.39 | 54.00 | -14.61 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value have no need to be reported above 10G.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 33 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Horizontal | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2462 | | |

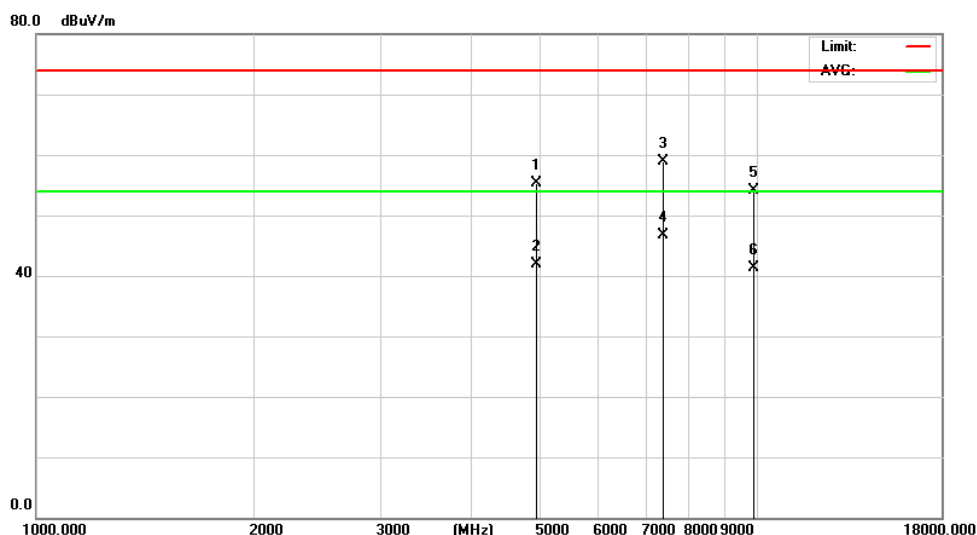

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | | 4924.000 | 47.18 | 8.20 | 55.38 | 74.00 | -18.62 | peak |
| 2 | | 4924.000 | 33.69 | 8.20 | 41.89 | 54.00 | -12.11 | AVG |
| 3 | | 7386.000 | 46.55 | 12.41 | 58.96 | 74.00 | -15.04 | peak |
| 4 | * | 7386.000 | 34.28 | 12.41 | 46.69 | 54.00 | -7.31 | AVG |
| 5 | | 9848.000 | 35.36 | 18.71 | 54.07 | 74.00 | -19.93 | peak |
| 6 | | 9848.000 | 22.61 | 18.71 | 41.32 | 54.00 | -12.68 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported above 10G.



Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 34 of 76 -

| | | | |
|---------------|-----------------|----------------|----------------------------------|
| Polarization: | Vertical | Test Voltage : | DC 24V from adapter AC 120V/60Hz |
| Test Mode : | 802.11B TX 2462 | | |

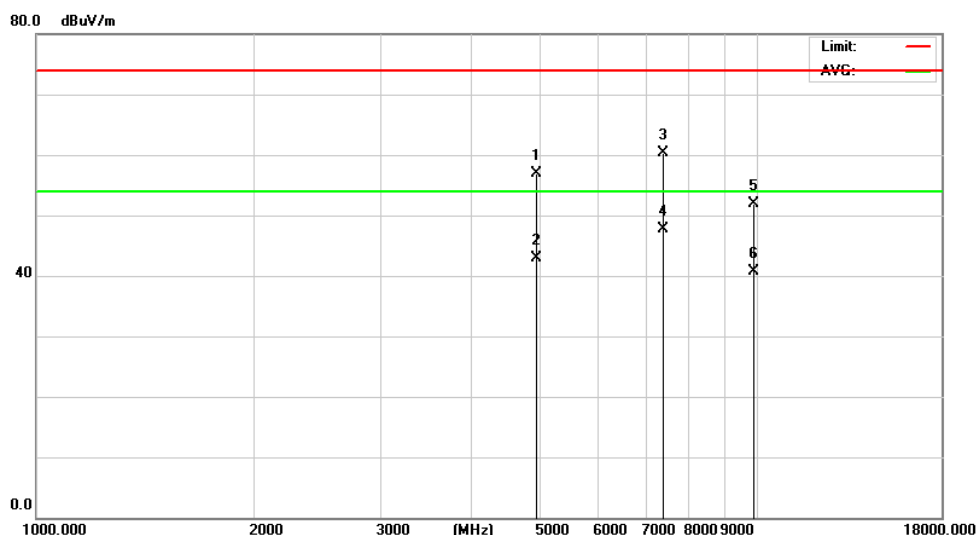

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | | 4924.000 | 48.65 | 8.20 | 56.85 | 74.00 | -17.15 | peak |
| 2 | | 4924.000 | 34.66 | 8.20 | 42.86 | 54.00 | -11.14 | AVG |
| 3 | | 7386.000 | 47.95 | 12.41 | 60.36 | 74.00 | -13.64 | peak |
| 4 | * | 7386.000 | 35.36 | 12.41 | 47.77 | 54.00 | -6.23 | AVG |
| 5 | | 9848.000 | 33.11 | 18.71 | 51.82 | 74.00 | -22.18 | peak |
| 6 | | 9848.000 | 21.96 | 18.71 | 40.67 | 54.00 | -13.33 | AVG |


Note: test performed on 802.11b/g/n mode, "802.11b" mode is the worst mode and has been reported. spurious emissions which are attenuated by more than 20dB below the permissible value have no need to be reported above 10G.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 35 of 76 -

Conducted Spurious Emissions at Antenna Port: 802.11b Low Channel

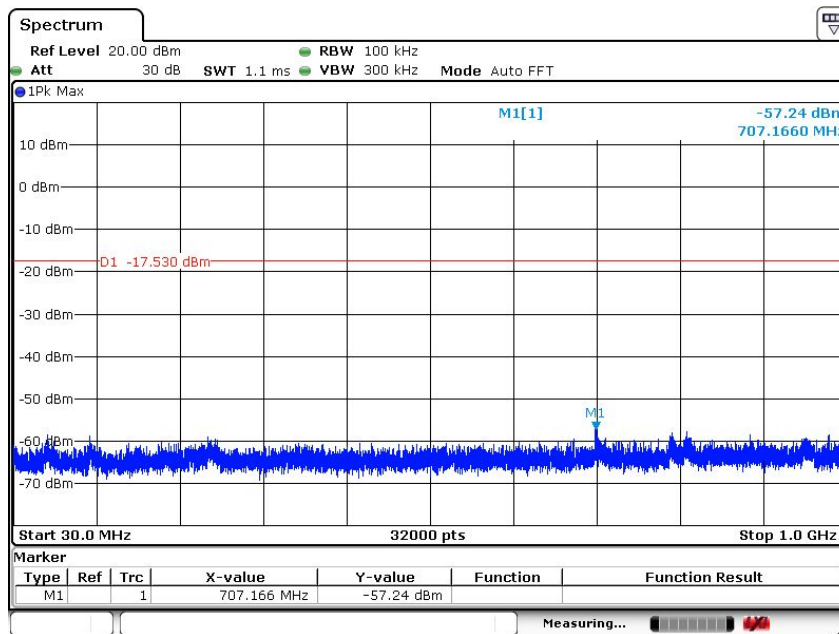

Date: 8 JAN 2017 16:17:44

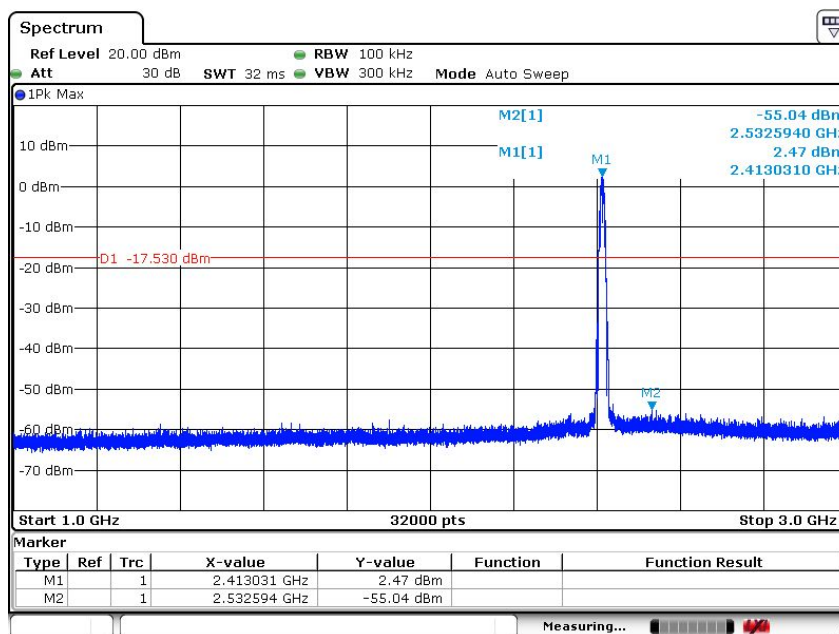


Date: 8 JAN 2017 16:17:31

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 36 of 76 -

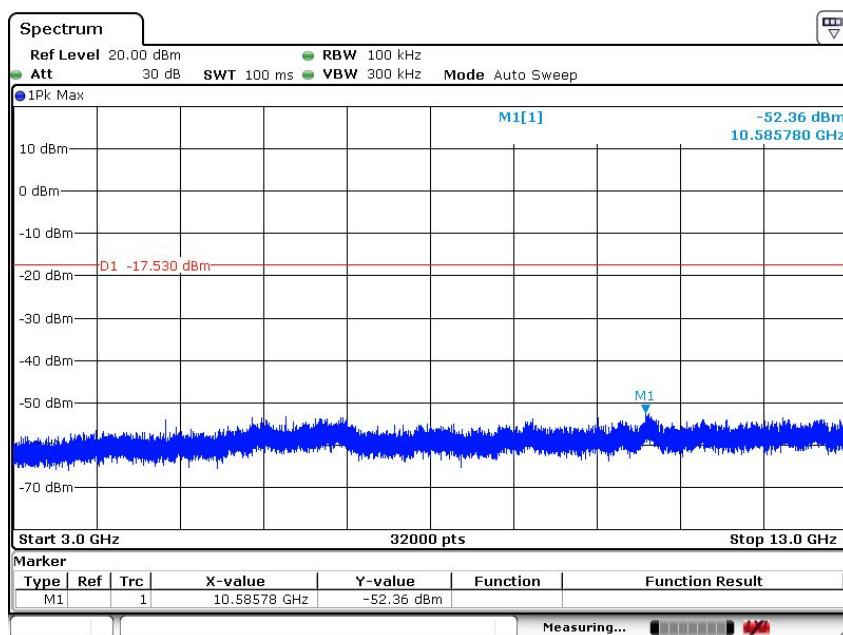

Date: 8 JAN 2017 16:17:55

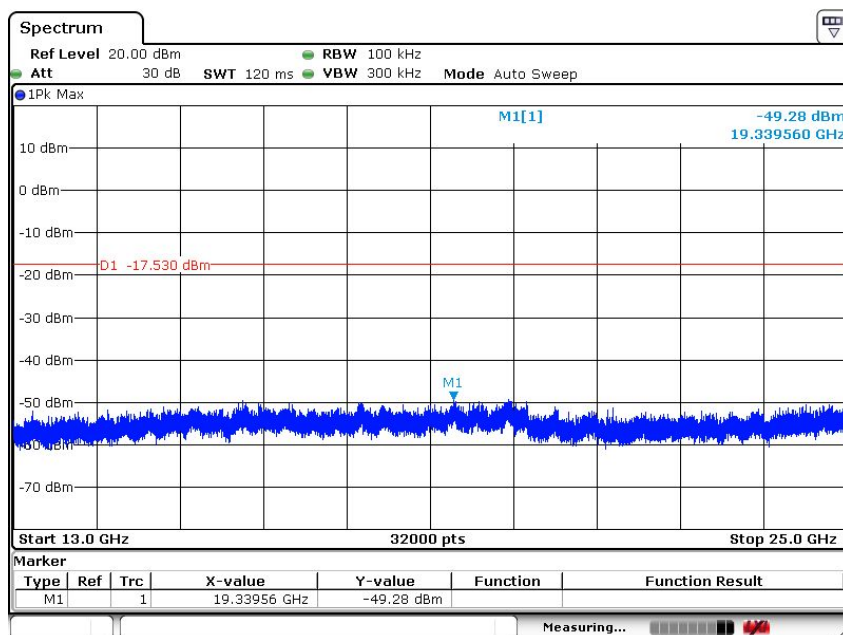

Date: 8 JAN 2017 16:18:08


This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 37 of 76 -

802.11b Middle Channel

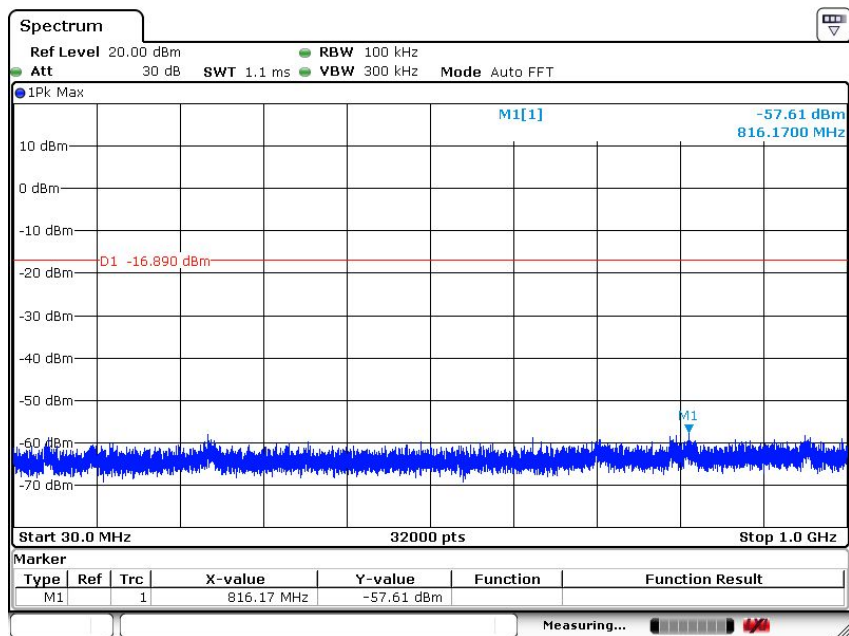

Date: 8 JAN 2017 16:19:00

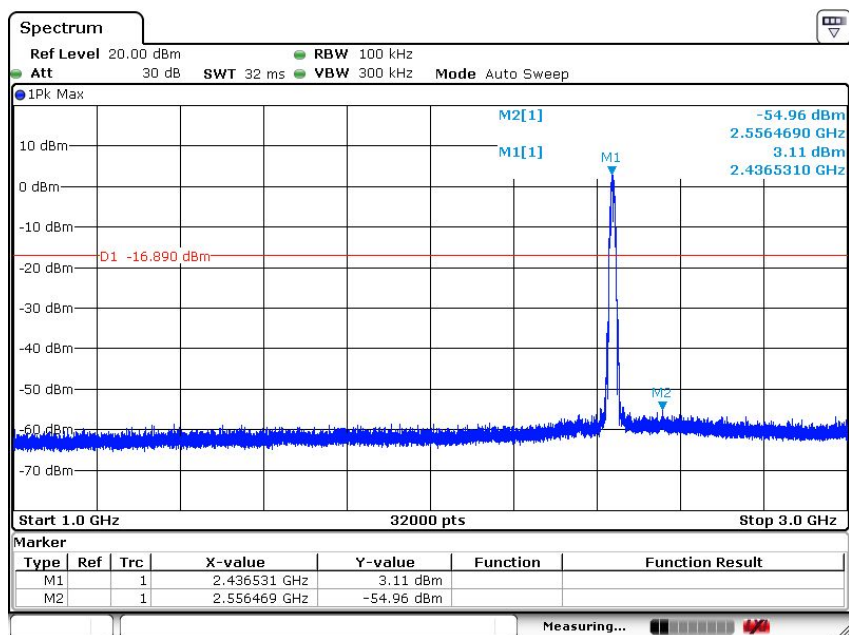


Date: 8 JAN 2017 16:18:47

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT-2016SZ1219182F
- Page 38 of 76 -

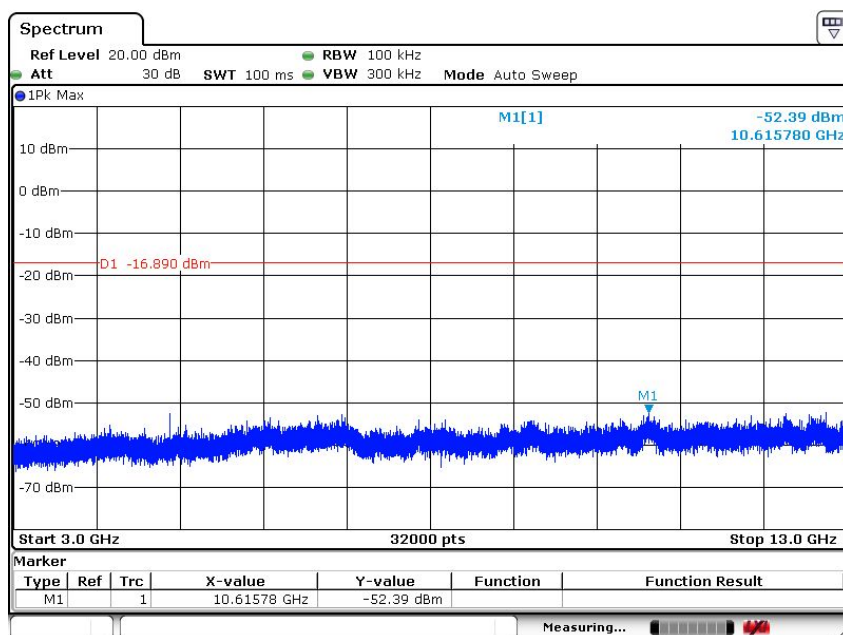

Date: 8 JAN 2017 16:19:11

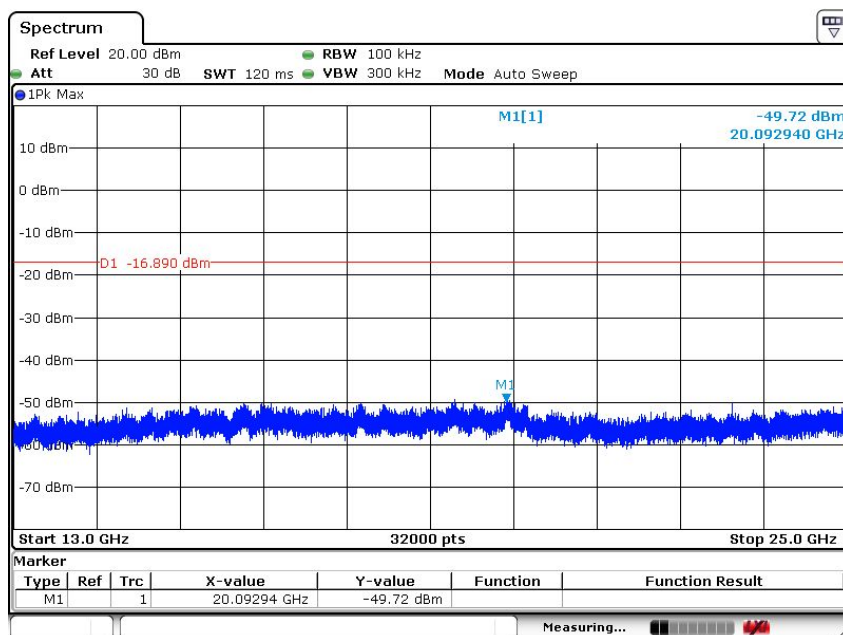

Date: 8 JAN 2017 16:19:22

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.