



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date: August 23, 2000

Federal Communications Commission  
VIA ELECTRONIC FILING

Attention: Authorization & Evaluation Division

Applicant: Comtek Communications Technology, Inc.  
Equipment: BST-25  
FCC ID: C6ZBST25-216  
FCC Rules: 95.629(b), Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, appearing to read 'M. Flom P. Eng.', with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

enclosure(s)  
cc: Applicant  
MF/cvr

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Comtek Communications Technology, Inc.

FCC ID: C6ZBST25-216

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
  - \_\_\_\_ LABEL
  - \_\_\_\_ LOCATION OF LABEL
  - \_\_\_\_ COMPLIANCE STATEMENT
  - \_\_\_\_ LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)
  - (3) USER MANUAL
  - (9) TUNE UP INFO
  - (10) SCHEMATIC DIAGRAM
  - (10) CIRCUIT DESCRIPTION
  - BLOCK DIAGRAM
  - PARTS LIST
  - ACTIVE DEVICES
5. PART 90.203(e) & (g) ATTESTATION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

C E R T I F I C A T I O N

of

MODEL: BST-25

FCC ID: C6ZBST25-216

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part 95.629(b)

DATE OF REPORT: August 23, 2000

ON THE BEHALF OF THE APPLICANT:

Comtek Communications Technology, Inc.

AT THE REQUEST OF:

P.O. F0520

Comtek Communications Technology, Inc.  
357 W. 2700 South  
Salt Lake City, UTAH 84115

Attention of:

Ralph Belgique, President  
(801) 446-3463, FAX: 484-6906

SUPERVISED BY:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is stylized with a large 'M' and a long horizontal stroke.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)	General Information Required	3
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Radiated)	7
2.1053(a)	Field Strength of Spurious Radiation	9
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	12
2.1047(a)	Audio Low Pass Filter (Voice Input)	16
2.1047(a)	Audio Frequency Response	19
2.1047(b)	Modulation Limiting	21
2.1055(a)(1)	Frequency Stability (Temperature Variation)	23
2.1055(b)(1)	Frequency Stability (Voltage Variation)	26
2.202(g)	Necessary Bandwidth and Emission Bandwidth	27

PAGE NO. 1 of 28.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0080076

d) Client: Comtek Communications Technology, Inc.  
357 W. 2700 South  
Salt Lake City, UTAH 84115

e) Identification: BST-25  
FCC ID: C6ZBST25-216  
Description: VHF Low Power Communications Transmitter

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: August 23, 2000  
EUT Received: July 5, 2000

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 28.

GENERAL INFORMATION REQUIRED FOR CERTIFICATION

Sub-part 2.948:

(a)(b) DESCRIPTION OF MEASUREMENT FACILITIES:  
FILE: 31040/511

A description of the measurement facilities was filed with the Commission and was found to be in compliance with the requirements of Section 2.948, by letter dated March 3, 1997. All pertinent changes will be reported to the Commission by up-date prior to March 2000.

(b)(4): SUPPORTING STRUCTURES:

SKETCH - ATTACHED EXHIBITS

(b)(5)(6): TEST INSTRUMENTATION:

LIST - SEE EXHIBITS

2.925: IDENTIFICATION OF AN AUTHORIZED DEVICE:

DRAWING - SEE EXHIBITS

LOCATION OF LABEL - SEE PHOTOS

(c)(1): NAME AND ADDRESS OF APPLICANT:

Comtek Communications Technology, Inc.  
357 W. 2700 South  
Salt Lake City, UTAH 84115

VENDOR:

Applicant

(c)(2): FCC ID: C6ZBST25-216

MODEL NO: BST-25

PHOTOGRAPHS:

SEE LIST OF EXHIBITS



PAGE NO. 3 of 28.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

95.629(b), Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Comtek Communications Technology, Inc.  
357 W. 2700 South  
Salt Lake City, UTAH 84115

MANUFACTURER:

Applicant

(c)(2): FCC ID: C6ZBST25-216

MODEL NO: BST-25

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 16K0F3E

(c)(5): FREQUENCY RANGE, MHz: 216 to 217

(c)(6): POWER RATING, Watts: 0.100  
       \_\_\_ Switchable \_\_\_ Variable   x   N/A

(c)(7): MAXIMUM POWER RATING, Watts: 0.1

95.647: ANTENNA REQUIREMENT:

  x   The antenna is permanently attached to the EUT  
 \_\_\_ The antenna uses a unique coupling  
 \_\_\_ The EUT must be professionally installed  
 \_\_\_ The antenna requirement does not apply

PAGE NO.

4 of 28.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.



**THE AMERICAN  
ASSOCIATION  
FOR LABORATORY  
ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited

**M. FLOM ASSOCIATES, INC.**  
**Chandler, AZ**

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24<sup>th</sup> day of November, 1998.



*Peter Nijzen*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Place, Suite 107  
Chandler, AZ 85225  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97

Revised 2/2/2000

*Peter Nijzen*

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 28.

Sub-part

2.1033(c)(14):

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_\_\_ 22 - Public Mobile Services
- \_\_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_\_ 23 - International Fixed Public Radiocommunication services
- \_\_\_\_\_ 24 - Personal Communications Services
- \_\_\_\_\_ 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_\_ 80 - Stations in the Maritime Services
- \_\_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- \_\_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- \_\_\_\_\_ 87 - Aviation Services
- \_\_\_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_\_\_ 94 - Private Operational-Fixed Microwave Service
- x   95.629(b) Low Power Radio Service
- \_\_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_\_ 101 - Fixed Microwave Services

PAGE NO.

6 of 28.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 28.

NAME OF TEST: Carrier Output Power (Radiated)

SPECIFICATION: 47 CFR 2.1046(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading of a dipole was calculated from the equation  $P_t = ((E \times R)^2 / 49.2)$  watts, where  $R = 3m$ .
2. Measurement accuracy is  $\pm 1.5$  dB.

MEASUREMENT RESULTS

FREQUENCY OF CARRIER, MHz = 216.512, 216.725


POWER SETTING	R. F. POWER, WATTS
High	0.100

SUPERVISED BY:



Morton Flom, P. Eng.

TRANSMITTER RADIATED MEASUREMENTS

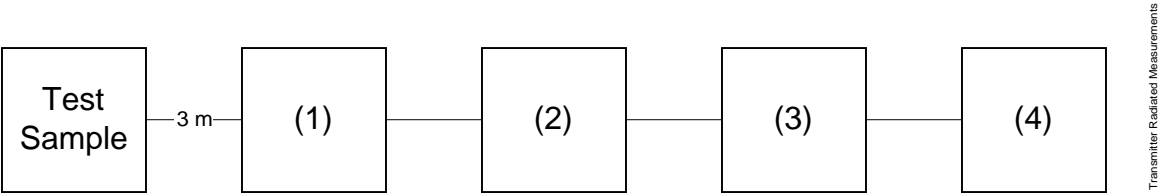

Asset	Description (as applicable)	s/n
(1)	<u>TRANSDUCER</u>	
i00091	Emco 3115	001469
i00089	Aprcl Log Periodic	001500
(2)	<u>HIGH PASS FILTER</u>	
i00	Narda $\mu$ PAD (In-Band Only)	
i00	Trilithic (Out-Of-Band Only)	
(3)	<u>PREAMP</u>	
i00028	HP 8449 (+30 dB)	2749A00121
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00057	HP 8557A	1531A00191
i00029	HP 8563E	3213A00104

PAGE NO. 9 of 28.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.  
  
The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE





PAGE NO. 11 of 28.

NAME OF TEST: Field Strength of Spurious Radiation  
 g0070550: 2000-Jul-13 Thu 11:30:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
216.512000	433.024000	42.52	23.32	-31.5	-18.6
216.512000	649.544000	27.42	27.62	-42.3	-29.4
216.512000	866.061000	30.78	29.69	-36.9	-23.9
216.512000	1082.548000	28.47	33.57	-35.3	-22.4
216.512000	1299.065000	34.62	35.68	-27.1	-14.1
216.512000	1515.589000	24.32	37.55	-35.5	-22.5
216.512000	1732.091000	28.64	39.41	-29.3	-16.4
216.512000	1948.581000	26.78	41.12	-29.5	-16.5
216.512000	2165.148000	19.87	42.73	-34.8	-21.8
216.512000	2381.577000	17.72	44.99	-34.7	-21.7

PAGE NO. 12 of 28.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

13 of 28.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
TEST B. OUT-OF-BAND SPURIOUS

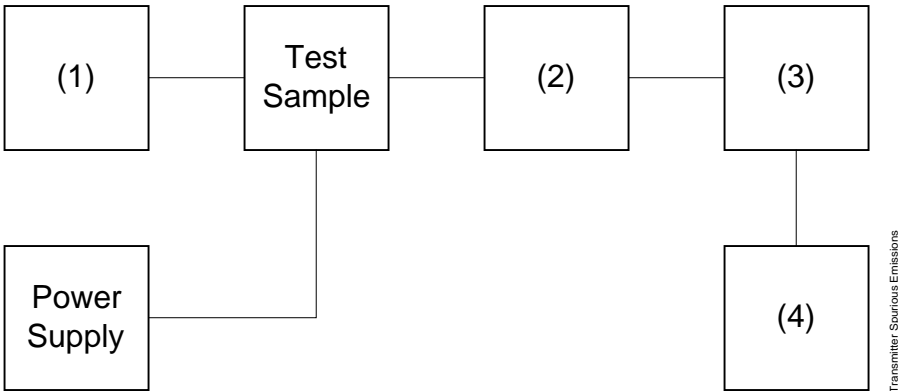


Asset	Description (as applicable)	s/n
(1)	<u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00012	HP 3312A	1432A11250
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(3)	<u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126	Eagle TNF-1	100-250
i00125	Eagle TNF-1	50-60
i00124	Eagle TNF-1	250-850
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00029	HP 8563E	3213A00104

PAGE NO.

14 of 28.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0080571: 2000-Aug-14 Mon 14:23:00  
STATE: 2:High Power

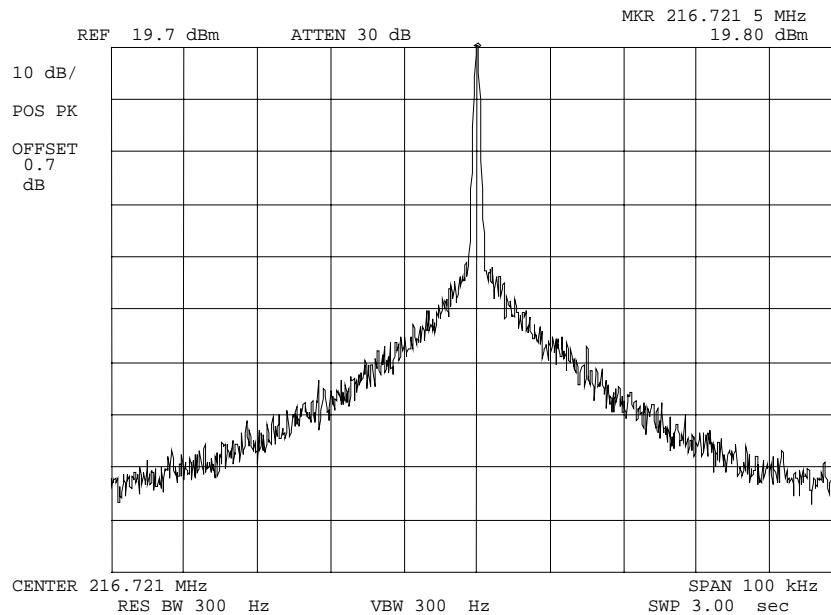

POWER: HIGH  
MODULATION: NONE


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

15 of 28.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g0070558: 2000-Jul-17 Mon 14:58:00  
 STATE: 2:High Power

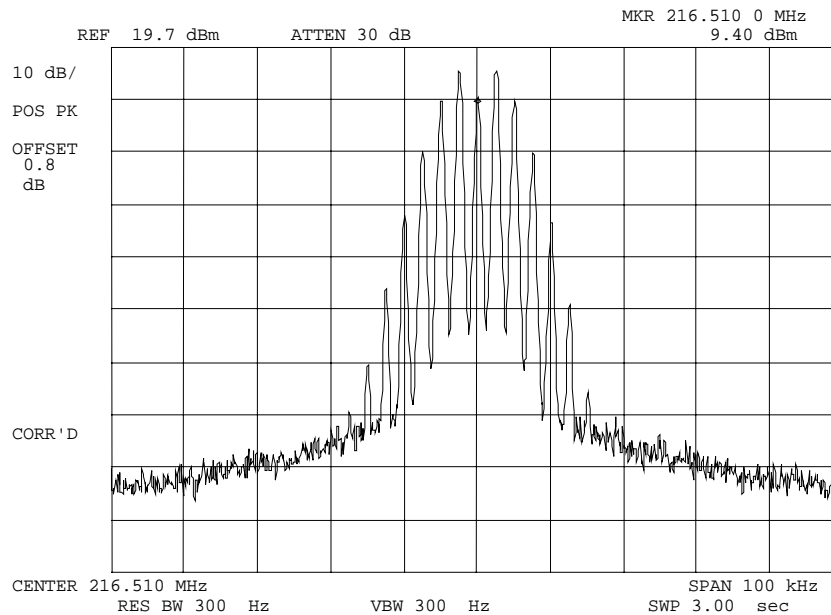

POWER:  
 MODULATION:

HIGH  
 VOICE: 2500 Hz SINE WAVE  
 25KHZ BW 95.635(1)(I)(II)

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 16 of 28.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15


TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION  
TEST B. AUDIO FREQUENCY RESPONSE  
TEST C. HUM AND NOISE LEVEL  
TEST D. RESPONSE OF LOW PASS FILTER  
TEST E. MODULATION LIMITING

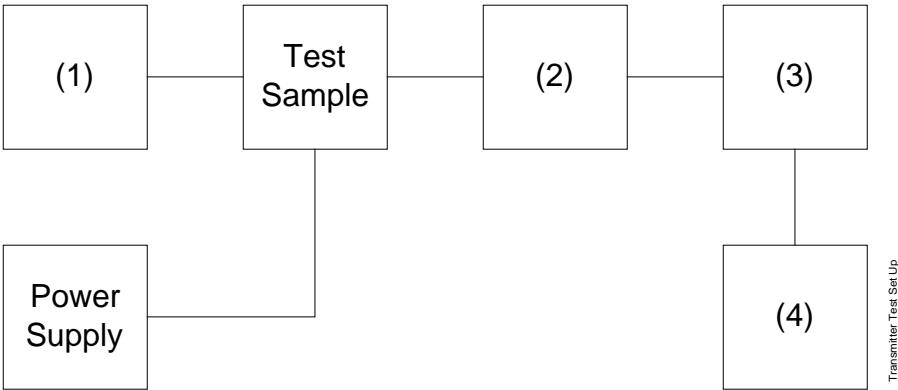


Asset	Description	s/n
(as applicable)		

(1)	<u>LINE IMPEDANCE STABILIZATION NETWORK</u>	
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
i00020	HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
i00017	HP 8903A	2216A01753

PAGE NO.

18 of 28.

NAME OF TEST: Audio Low Pass Filter (Voice Input)  
g0070218: 2000-Jul-14 Fri 11:03:00  
STATE: 0:General

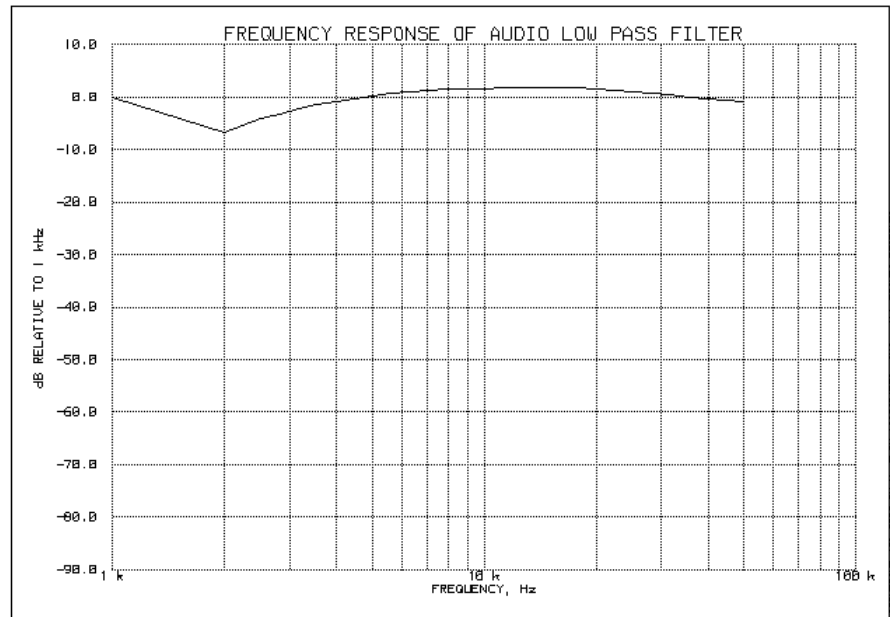

SUPERVISED BY:

Morton Flom, P. Eng.



PAGE NO. 19 of 28.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 20 of 28.

NAME OF TEST: Audio Frequency Response  
g0070215: 2000-Jul-14 Fri 09:47:00  
STATE: 0:General

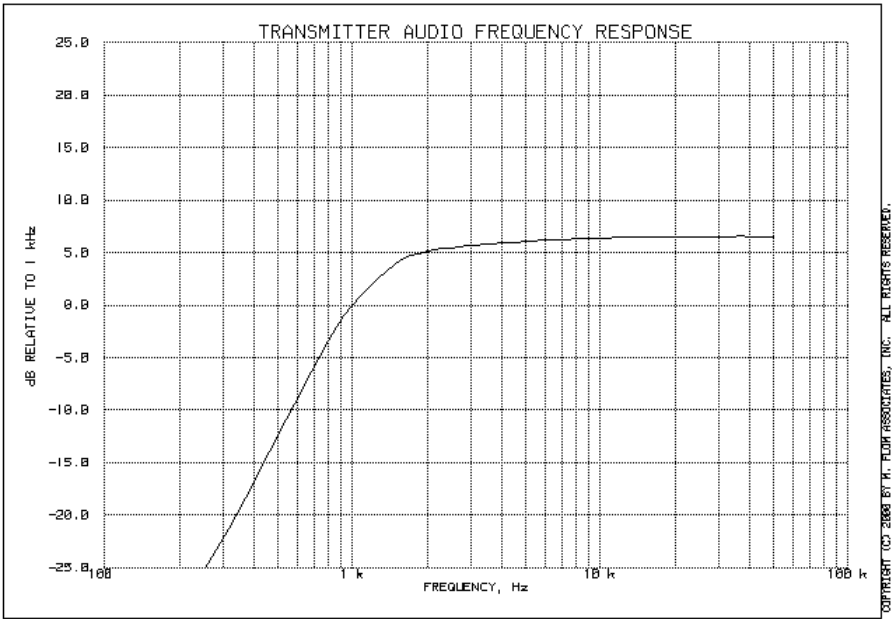

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-22.19
20000	6.49
30000	6.53
50000	6.51

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 21 of 28.  
NAME OF TEST: Modulation Limiting  
SPECIFICATION: 47 CFR 2.1047(b)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


22 of 28.

NAME OF TEST: Modulation Limiting  
 g0080472: 2000-Aug-14 Mon 14:19:00  
 STATE: 0:General

Positive  
 Peaks:

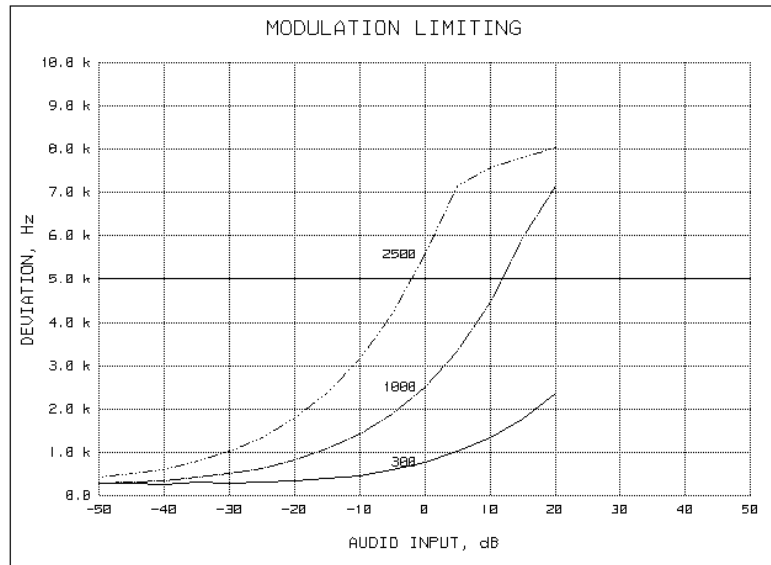

Negative  
 Peaks:

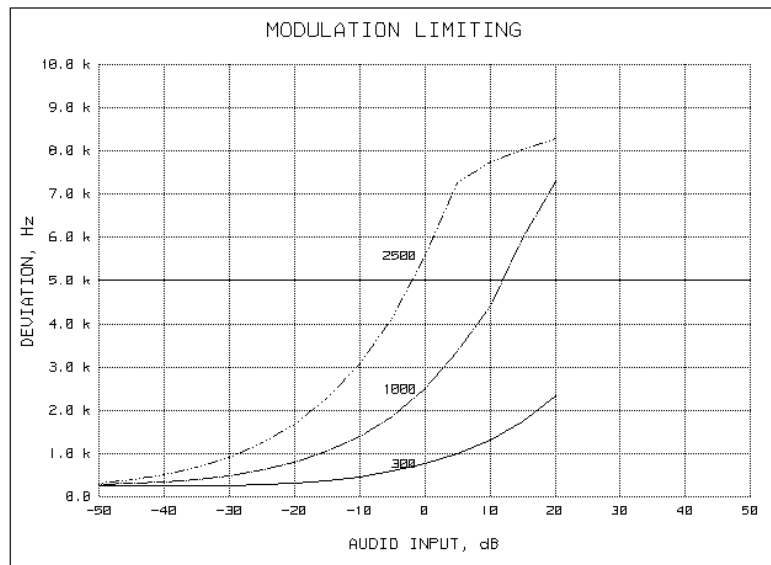

*M. Flom P. Eng.*

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 23 of 28.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY  
TEST B. CARRIER FREQUENCY STABILITY  
TEST C. OPERATIONAL PERFORMANCE STABILITY  
TEST D. HUMIDITY  
TEST E. VIBRATION  
TEST F. ENVIRONMENTAL TEMPERATURE  
TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION  
TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

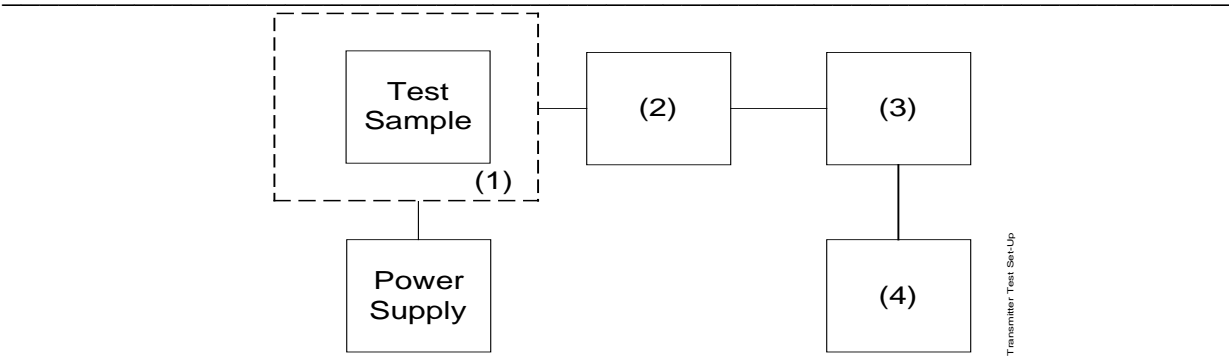


Asset	Description	s/n
-------	-------------	-----

- |        |   |              |
|--------|---|--------------|
| (1)    | <u>TEMPERATURE, HUMIDITY, VIBRATION</u> |              |
| i00027 | Tenny Temp. Chamber                     | 9083-765-234 |
| i00    | Weber Humidity Chamber                  |              |
| i00    | L.A.B. RVH 18-100                       |              |
| (2)    | <u>COAXIAL ATTENUATOR</u>               |              |
| i00122 | NARDA 766-10                            | 7802         |
| i00123 | NARDA 766-10                            | 7802A        |
| i00113 | SIERRA 661A-3D                          | 1059         |
| i00069 | BIRD 8329 (30 dB)                       | 10066        |
| (3)    | <u>R.F. POWER</u>                       |              |
| i00014 | HP 435A POWER METER                     | 1733A05839   |
| i00039 | HP 436A POWER METER                     | 2709A26776   |
| i00020 | HP 8901A POWER MODE                     | 2105A01087   |
| (4)    | <u>FREQUENCY COUNTER</u>                |              |
| i00042 | HP 5383A                                | 1628A00959   |
| i00019 | HP 5334B                                | 2704A00347   |
| i00020 | HP 8901A                                | 2105A01087   |

PAGE NO.

25 of 28.

NAME OF TEST: Frequency Stability (Temperature Variation)  
g0070798: 2000-Jul-31 Mon 12:23:00  
STATE: 0:General

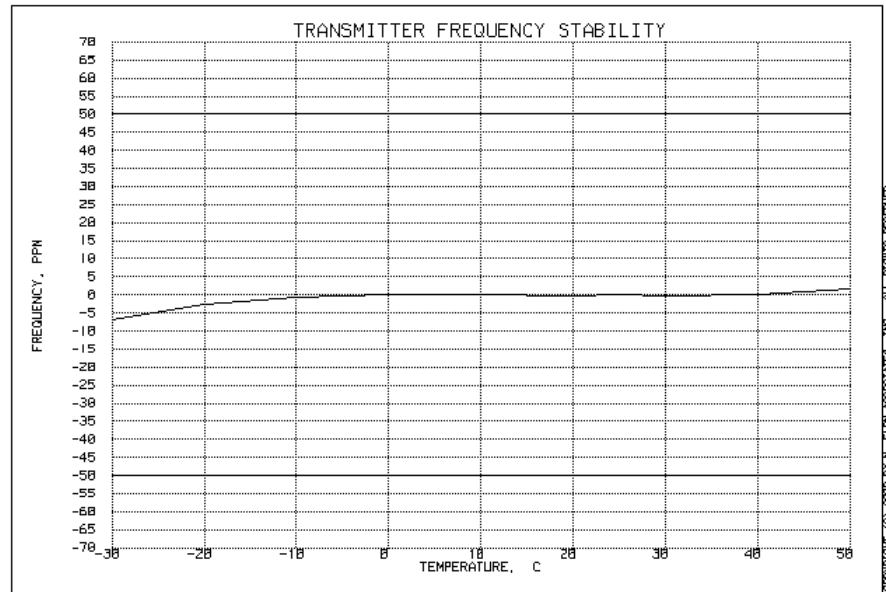

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 26 of 28.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)  
 g0070551: 2000-Jul-14 Fri 09:17:54  
 STATE: 0:General

LIMIT, ppm = 50  
 LIMIT, Hz = 10826  
 BATTERY END POINT (Voltage) = 9

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	10.2	216.509990	-10	-0.05
100	12	216.510000	0	0.00
115	13.8	216.510000	0	0.00
75	9	216.509990	-10	-0.05



SUPERVISED BY:

Morton Flom, P. Eng.



PAGE NO. 27 of 28.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH ( $B_N$ ), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 16.0

SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO. 28 of 28.

NAME OF TEST: Summary of Applicant Supplied Attestations

SPECIFICATION: 47 CFR 95

GUIDE: ANSI/TIA/EIA-603-1992,

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

95.647

Antenna has no gain (as compared to a half-wave dipole) and is vertically polarized.

95.649

There are no provisions for increasing transmitter power.

95.653

Users manual includes instructions and warnings.

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, reading "M. Flom P. Eng." with a stylized, cursive script.

Morton Flom, P. Eng.