

Prüfbericht-Nr.: <i>Test report no.:</i>	CN23GHUI 001	Auftrags-Nr.: <i>Order no.:</i>	180266135	Seite 1 von 26 Page 1 of 26
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2023.06.28	
Auftraggeber: <i>Client:</i>	Turnils North America 1750 Satellite Blvd, Suite 100, Buford GA 30518			
Prüfgegenstand: <i>Test item:</i>	DC Tubular Motor with rechargeable battery			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	AMP25B-1.1/28, AMP25B-0.7/34			
Auftrags-Inhalt: <i>Order content:</i>	TÜV Rheinland – FCC & ISED Service			
Prüfgrundlage: <i>Test specification:</i>	FCC 47 CFR Part 15.203 FCC 47 CFR Part 15.231 FCC Part 15, Subpart B:2021		RSS-210 Issue 10 RSS-Gen Issue 5 ICES-003 Issue 7:2020	
Wareneingangsdatum: <i>Date of sample receipt:</i>	2023.09.13	Refer to Photo Documentation		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003566755-001-004			
Prüfzeitraum: <i>Testing period:</i>	2023.09.21 - 2023.10.26			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 1.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	2023.11.20	Ausstelldatum: <i>Issue date:</i>	2023.11.20	
Stellung / Position:	Keda Zhou/PE	Stellung / Position:	Season Yang/Authorizer	
Sonstiges / Other:	In electrical characteristics, two models are the same, the differences between them are in the mechanical aspects. So, all tests were performed on model AMP25B-1.1/28, only test of Radiated disturbance was performed on model AMP25B-0.7/34 under Mode B. FCC ID: 2AU29AMP25BV4 ISED: 25624-AMP25BV4			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 2 von 26

Page 2 of 26

Anmerkungen Remarks

Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.

Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.

The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.

Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.

Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.

As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.

Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.

*Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.*

Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.

The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.

Test Summary

4.1.1 ANTENNA REQUIREMENT

Result:

Pass

4.1.2 DEACTIVATION OF THE TRANSMISSION

Result:

Pass

4.1.3 20DB EMISSION BANDWIDTH

Result:

Pass

4.1.4 99% BANDWIDTH MEASUREMENT

Result:

Pass

4.1.5 FIELD STRENGTH OF FUNDAMENTAL AND UNWANTED EMISSIONS

Result:

Pass

4.2.1 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE

Result:

Pass

4.2.2 RADIATED DISTURBANCE

Result:

Pass

Contents

1. TEST SITES	5
1.1 TEST FACILITIES.....	5
1.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
1.3 UNCERTAINTY OF MEASUREMENT	5
2. GENERAL PRODUCT INFORMATION.....	6
2.1 PRODUCT FUNCTION AND INTENDED USE	6
2.2 RATINGS AND SYSTEM DETAILS	6
2.3 INDEPENDENT OPERATION MODES	6
2.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.5 SUBMITTED DOCUMENTS	6
3. TEST SET-UP AND OPERATION MODES	7
3.1 PRINCIPLE OF CONFIGURATION SELECTION	7
3.2 TEST OPERATION AND TEST SOFTWARE	7
3.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.4 COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE.....	7
3.5 TEST SET-UP.....	8
4. TEST RESULTS	9
4.1 TRANSMITTER REQUIREMENT & TEST SUITES	9
4.1.1 Antenna Requirement.....	9
4.1.2 Deactivation of the Transmission	10
4.1.3 20dB Emission Bandwidth	12
4.1.4 99% Bandwidth Measurement	13
4.1.5 Field strength of fundamental and Unwanted Emissions.....	15
4.2 OTHER REQUIREMENT & TEST SUITES	19
4.2.1 Mains Terminal Continuous Disturbance Voltage.....	19
4.2.2 Radiated disturbance	22
5. LIST OF TABLES	26
6. LIST OF FIGURES	26

Prüfbericht - Nr.: CN23GHUI 001
Test Report No.:

Seite 5 von 26
Page 5 of 26

1. Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland /CCIC (Ningbo) Co., Ltd.

1st Floor, Building 11, Scholar Innovation Park, No.1188 Zhongguan Road, Zhenhai District, Ningbo 315200 P.R. China

FCC Designation Number: CN1237

FCC Test Firm Registration Number: 647754

IC Company Number: 24297

CAB identifier: CN0047

The tests were conducted by TÜV Rheinland/CCIC's engineer directly in the above laboratory.

1.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment, Laboratory

Kind of Equipment	Type	Serial No.	Last cal. date	Cal. due date
EMI test receiver	ESR7	101929	2023.10.30	2024.10.29
Spectrum analyzer	FSV40	101412	2023.10.30	2024.10.29
Bilog Antenna	CBL6112D	49033	2021.03.15	2024.03.14
Horn antenna	HF907	102653	2023.07.20	2026.07.19
Pre-amplifier	SCU-18F	180051	2023.10.30	2024.10.29
EMI test receiver	ESR3	102331	2023.10.30	2024.10.29
LISN	ENV216	102250	2023.10.30	2024.10.29

1.3 Uncertainty of Measurement

Table 2: Measurement Uncertainty

Test Item	Expanded Measurement Uncertainty (k=2)
Conducted Emission (9-150kHz)	3.70dB
Conducted Emission (150k-30MHz)	3.30dB
Radiated Emission (30-1000MHz)	4.39dB
Radiated Emission (1-18GHz)	4.67dB

2. General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is a DC Tubular Motor with rechargeable battery operating at 433.05 - 434.79MHz.

For more detail information, refer to the user's manual.

2.2 Ratings and System Details

Table 3: General Description of EUT

General Description of EUT	
FCC ID:	2AU29AMP25BV4
ISED:	25624-AMP25BV4
Charging Voltage:	DC 5V
Protection Class:	Class III
Operating Temperature Range:	-10°C~65°C
Technical Specification of SRD (433MHz)	
Operating Frequency band:	433.05 - 434.79MHz
Modulation:	GFSK
Antenna Type:	Wire Antenna
Antenna Gain:	0dBi

2.3 Independent Operation Modes

There are some modes:

Mode A: Transmitting on Operating Frequency Band: 433.05 - 434.79MHz

Mode B: Normal working

Mode C: Charging

Refer to the user's manual for further information.

2.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram for further information.

2.5 Submitted Documents

Circuit diagram, Schematics, PCB Layout, Label, User Manual etc.

3. Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

3.2 Test Operation and Test Software

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

All testing were performed according to the procedures in ANSI C63.10: 2013.

Test Software EMC32 V10.30 was used in the radiated emission test.

More details refer to the related paragraph of this report.

3.3 Special Accessories and Auxiliary Equipment

Table 4: List of Auxiliary Equipment

Description	Manufacturer	Model No.
Adapter	Apple	A1443

3.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Circuit Diagram. No additional measures were employed to achieve compliance.

3.5 Test set-up

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

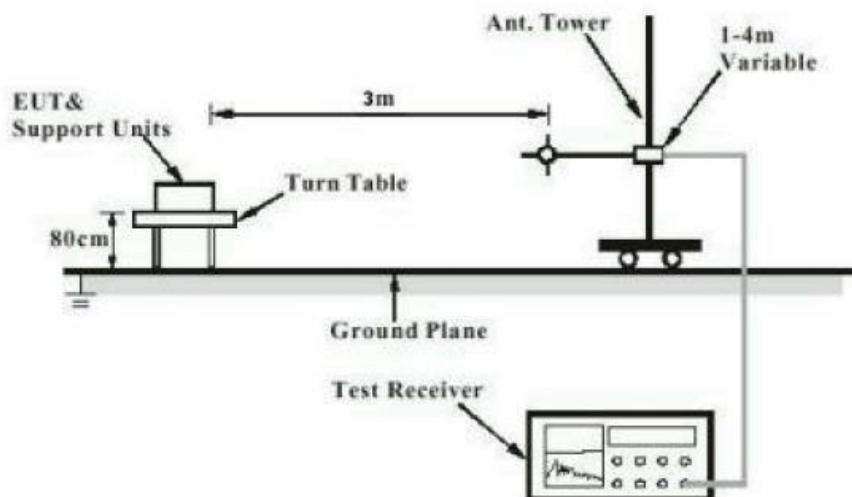


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


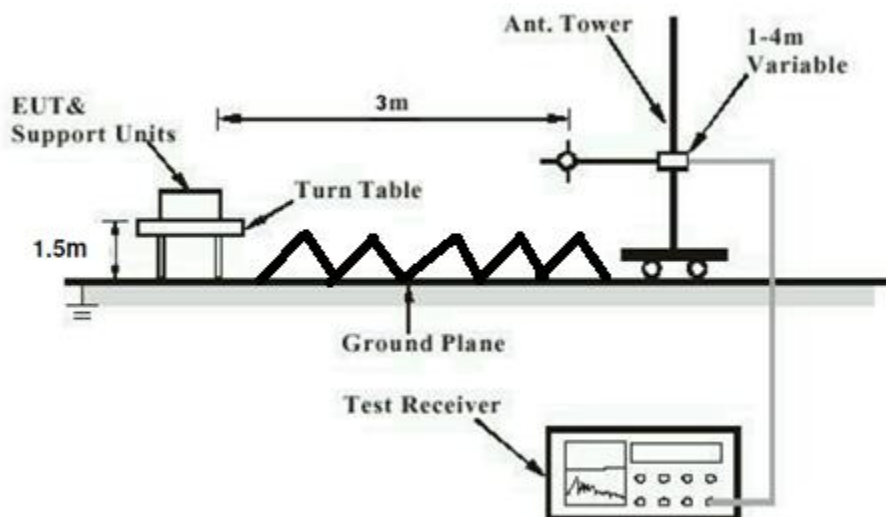


Diagram of Measurement Configuration for Conducted Transmitter Measurement

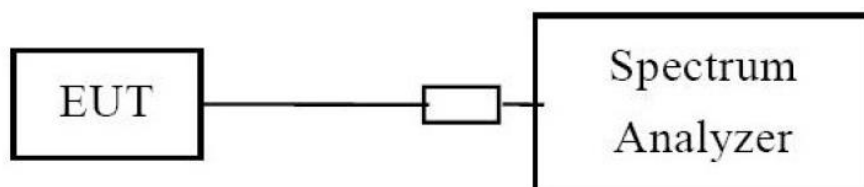

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 9 von 26

Page 9 of 26

4. Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

Result:

Pass

Test Specification

Test standard

: FCC 47 CFR Part 15.203
RSS-Gen Issue 5

Limit

: FCC: the use of antennas with directional gains that do not exceed 6 dBi
RSS: Use of approved antennas only

According to the manufacturer declared, the EUT has a fixed external antenna (Wire antenna, Antenna Gain: 0dBi), and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 10 von 26

Page 10 of 26

4.1.2 Deactivation of the Transmission

Result:

Pass

Test Specification

Test standard : FCC 47 CFR Part 15.231
RSS-210 Issue 10

Basic standard : ANSI C63.10: 2013

Test requirement : CFR47 FCC Part 15.231 (a)(1)
RSS-210 Issue 10, Annex A.1.1

Limits : A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test suite : Shielded Room

Test Setup

Date of testing : 2023.10.23

Test environment: : Normal test conditions

Operational mode : Mode A

Temperature : 23°C

Relative humidity : 56%

Atmospheric pressure : 101.2 kPa

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 11 von 26

Page 11 of 26


Figure 1: Test Results of Deactivation of the Transmission

Activated mode	Duration Time (S)	Limit (S)
Manually	0.2899	≤5

Ref Level 0.00 dBm RBW 100 kHz

Att 20 dB SWT 10 s VBW 100 kHz

TRG:IFP

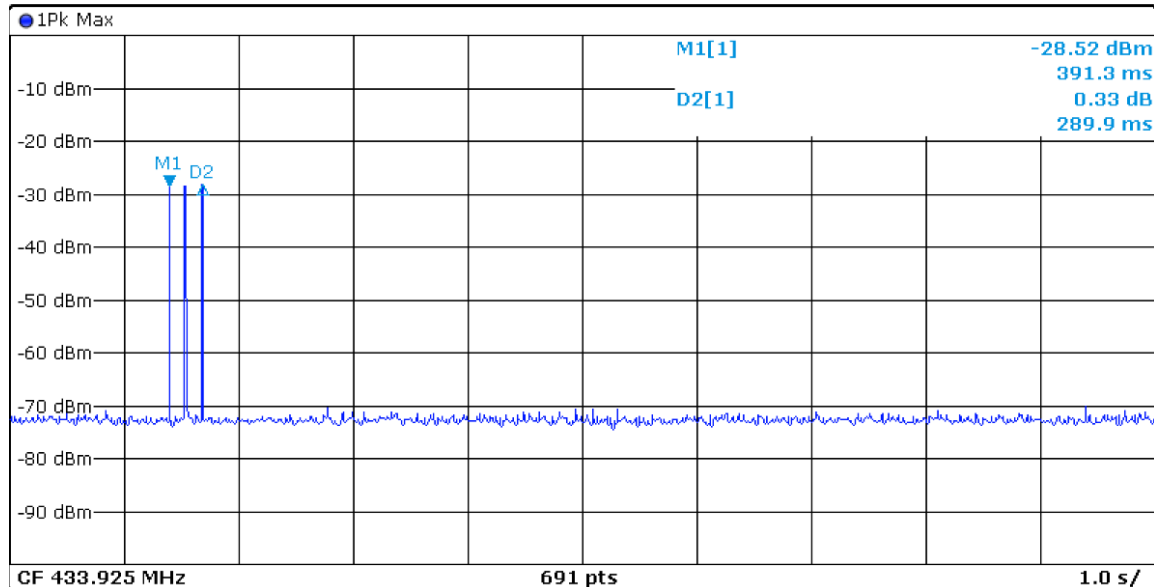

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	391.3 ms	-28.52 dBm		
D2	M1	1	289.9 ms	0.33 dB		

Prüfbericht - Nr.: CN23GHUI 001
Test Report No.:

Seite 12 von 26
Page 12 of 26

4.1.3 20dB Emission Bandwidth

Result:

Pass

Test Specification

Test standard : FCC 47 CFR Part 15.231
Basic standard : ANSI C63.10: 2013
Test requirement : CFR47 FCC Part 15.231 (c)
Limit : CFR47 FCC Part 15.231 (c)
Test suite : Shielded Room


Test Setup

Date of testing : 2023.10.23
Test environment : Normal test conditions
Operational mode : Mode A
Temperature : 23°C
Relative humidity : 56%
Atmospheric pressure : 101.2 kPa

Figure 2: Test Results of 20dB Emission Bandwidth

Bandwidth (kHz)
88.3

Limit (kHz)
≤1085

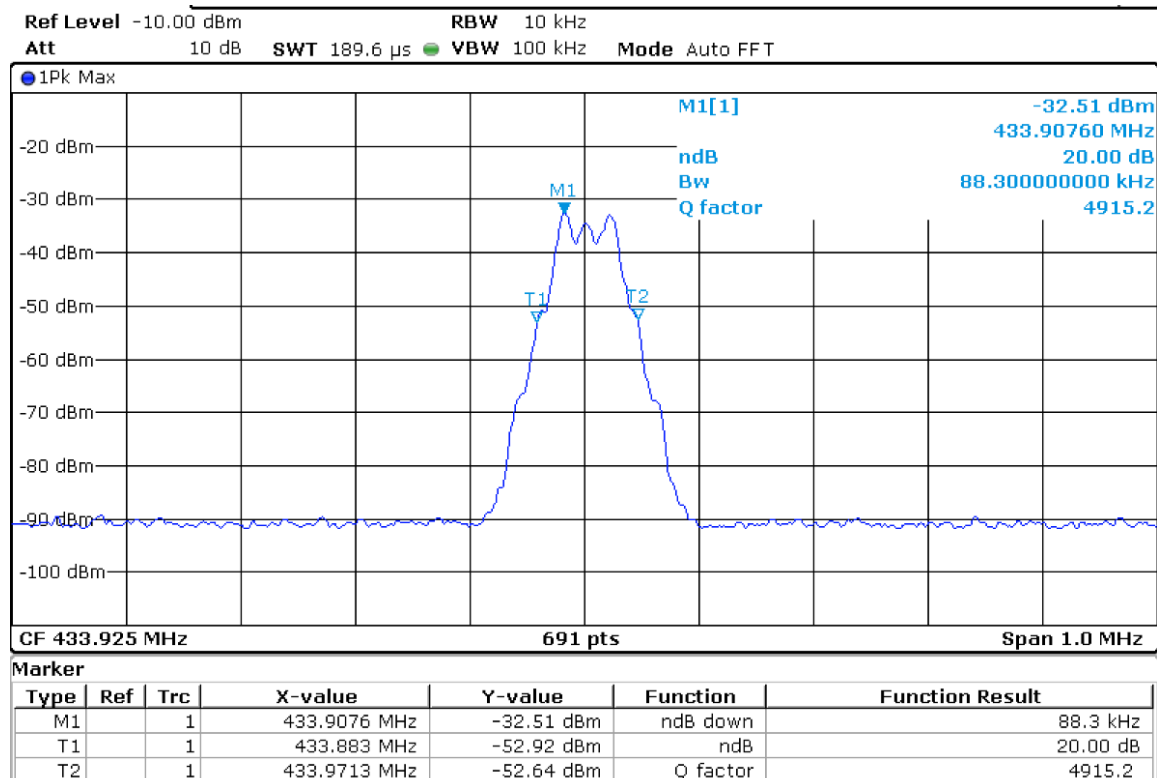

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 13 von 26

Page 13 of 26

4.1.4 99% Bandwidth Measurement

Result:

Pass

Test Specification

Test standard : RSS-210 Issue 10

Basic standard : ANSI C63.10: 2013

Test requirement : RSS-210 Issue 10, Annex A.1.3

Limit : The occupied bandwidth of momentarily operated devices shall be less than or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the occupied bandwidth shall be less than or equal to 0.5% of the centre frequency.

Test suite : Shielded Room

Test Setup

Date of testing : 2023.10.23

Test environment : Normal test conditions

Operational mode : Mode A

Temperature : 23°C


Relative humidity : 56%

Atmospheric pressure : 101.2 kPa

Figure 3: Test Results of 99% Bandwidth

Bandwidth (kHz)
75.54

Limit (kHz)
≤1085

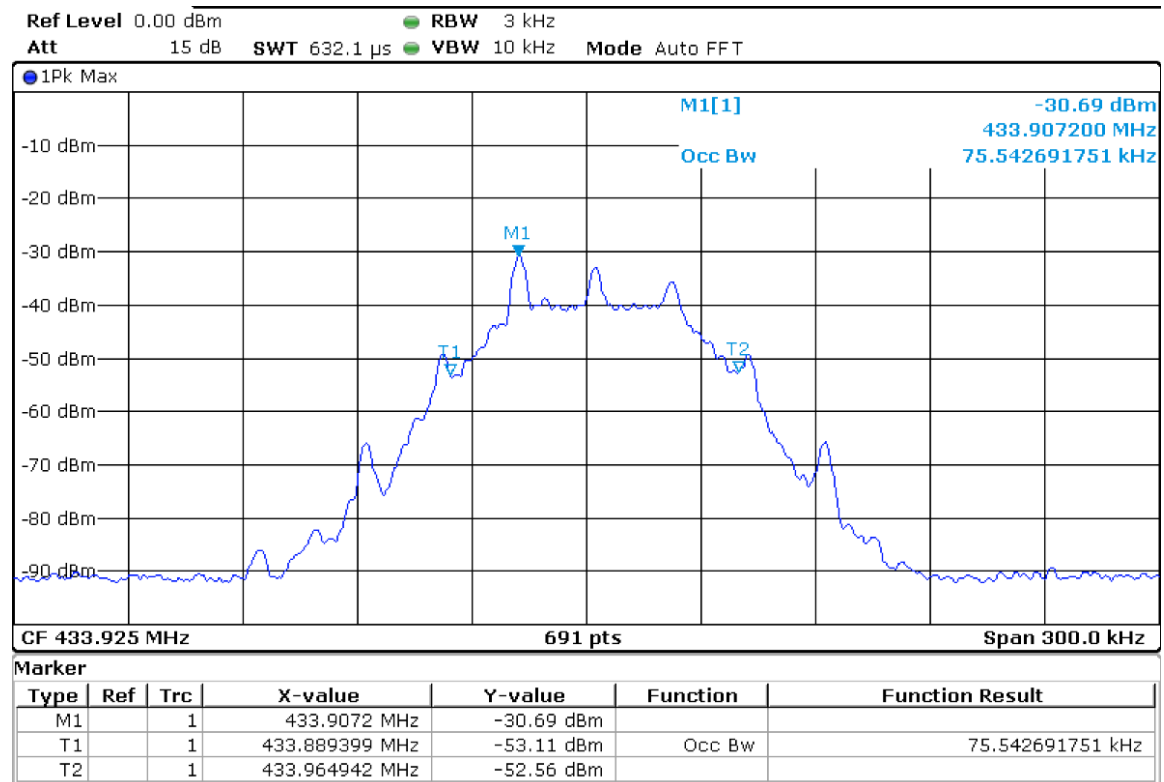

Prüfbericht - Nr.: CN23GHUI 001

Test Report No.:

Seite 15 von 26

Page 15 of 26

4.1.5 Field strength of fundamental and Unwanted Emissions

Result:

Pass

Test Specification

Test standard

: FCC 47 CFR Part 15.231

CFR47 FCC Part 15.205

CFR47 FCC Part 15.209

RSS-210 Issue 10

RSS-Gen Issue 5

Basic standard

: ANSI C63.10: 2013

Test requirement

: CFR47 FCC Part 15.231 (b)(1)(2)(3)

RSS-210 Issue 10, Annex A.1.2

RSS-Gen Issue 5, Clause 8.10

Limits

: CFR47 FCC Part 15.231 (b)

RSS-210 Issue 10, Annex A.1.2

RSS-Gen Issue 5, Clause 8.9 & Clause 8.10

Test suite

: 3m Semi Anechoic Room

Test Setup

Date of testing

: 2023.09.21-2023.10.09

Test environment

: Normal test conditions

Operational mode

: Mode A

Temperature

: 21°C

Relative humidity


: 63%

Atmospheric pressure

: 101.2 kPa

Figure 4: Spectral Diagrams, Field strength of fundamental, Radiated Spurious Emission

30MHz-1000MHz, Horizontal

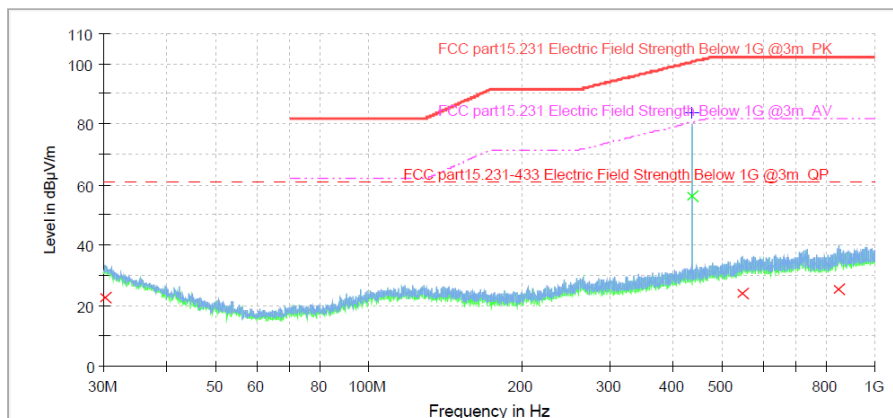

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
433.950000	83.7	1000.0	120.000	100.0	H	11.0	24.6	16.9	100.6


Limit and Margin-AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
433.950000	56.1	1000.0	120.000	100.0	H	11.0	24.6	24.5	80.6

Limit and Margin-QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
30.320000	22.8	1000.0	120.000	100.0	H	11.0	25.8	37.8	60.6
545.660000	23.8	1000.0	120.000	100.0	H	11.0	27.0	36.8	60.6
848.520000	25.5	1000.0	120.000	100.0	H	11.0	29.3	35.1	60.6

30MHz-1000MHz, Vertical

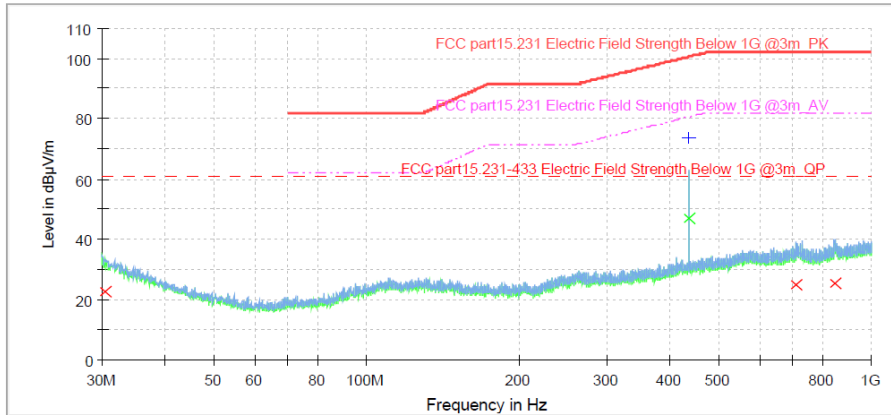

Limit and Margin-PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
433.900000	73.7	1000.0	120.000	100.0	V	11.0	24.6	26.9	100.6

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
433.900000	47.1	1000.0	120.000	100.0	V	11.0	24.6	33.5	80.6

Limit and Margin-QP


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.540000	22.6	1000.0	120.000	100.0	V	11.0	25.6	38.0	60.6
710.020000	25.0	1000.0	120.000	100.0	V	11.0	27.8	35.6	60.6
845.340000	25.3	1000.0	120.000	100.0	V	11.0	29.3	35.3	60.6

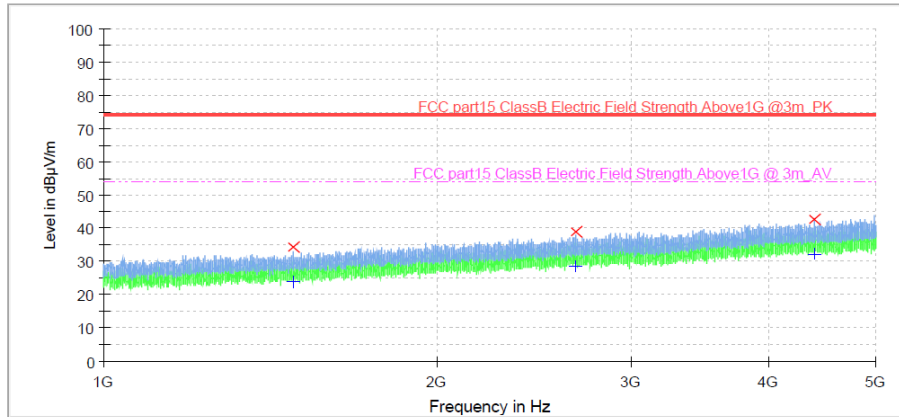1GHz-5GHz, Horizontal

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1483.250000	34.2	1000.0	1000.000	150.0	H	0.0	-10.9	39.8	74.0
2678.625000	38.9	1000.0	1000.000	150.0	H	0.0	-3.7	35.1	74.0
4397.250000	42.7	1000.0	1000.000	150.0	H	0.0	2.2	31.3	74.0

Limit and Margin-AV

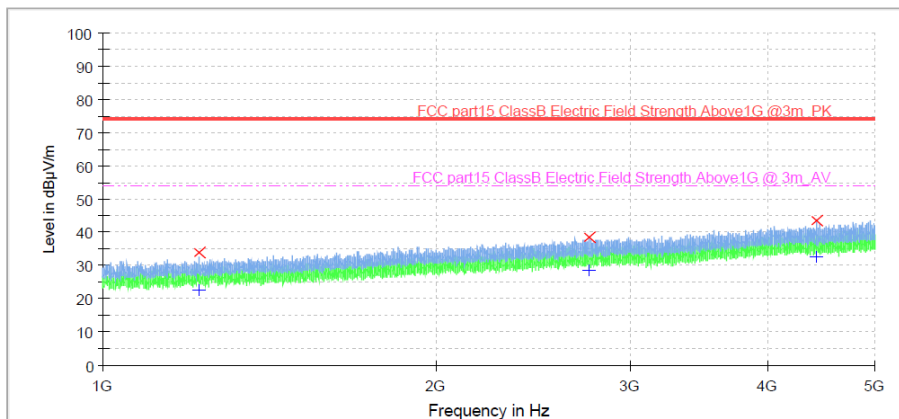Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1483.250000	23.7	1000.0	1000.000	150.0	H	0.0	-10.9	30.3	54.0
2678.625000	28.3	1000.0	1000.000	150.0	H	0.0	-3.7	25.7	54.0
4397.250000	32.1	1000.0	1000.000	150.0	H	0.0	2.2	21.9	54.0

1GHz-5GHz, Vertical

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1222.125000	33.7	1000.0	1000.000	150.0	V	0.0	-12.3	40.3	74.0
2755.250000	38.6	1000.0	1000.000	150.0	V	0.0	-3.2	35.4	74.0
4426.875000	43.3	1000.0	1000.000	150.0	V	0.0	2.3	30.7	74.0

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1222.125000	22.8	1000.0	1000.000	150.0	V	0.0	-12.3	31.3	54.0
2755.250000	28.4	1000.0	1000.000	150.0	V	0.0	-3.2	25.7	54.0
4426.875000	32.6	1000.0	1000.000	150.0	V	0.0	2.3	21.4	54.0

4.2 Other Requirement & Test Suites

4.2.1 Mains Terminal Continuous Disturbance Voltage

Result:	Pass
----------------	-------------

Date of testing	: 2023.10.09
Test procedure	: ANSI C63.4:2014 and CISPR 16-1 series standards
Frequency range	: 0.15 – 30MHz
Limits	: CFR47 FCC Part 15.207 RSS-Gen Issue 5
Kind of test site	: Shielding Room
Operation modes	: Mode C
Port	: Mains
Temp.& Humidity	: 21°C, 63%

The measurement setup was made according to ANSI C63.4:2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with ANSI C63.4:2014 and CISPR 16-1 series standards.


The tested object was set-up on a wooden table. The EUT was set 0.8m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3m and 0.4m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

Before measurement, a survey was made to determine in which state the maximum disturbance was obtained. And the measurement was made in the state the maximum disturbance was obtained.


The following figures and tables were those measured by an automatic measuring system. Both Quasi Peak and Average Value were measured. Quasi-Peak and Average Value were measured and listed respectively where they had a maximum in previous scanning survey. In the Figures, “◆” means Quasi-Peak Value and Average Value which were measured in final measurement.

The measurement result is calculated based on the following formula by the test software:
Emission Level = Reading level + Correction (LISN factor + cable loss)

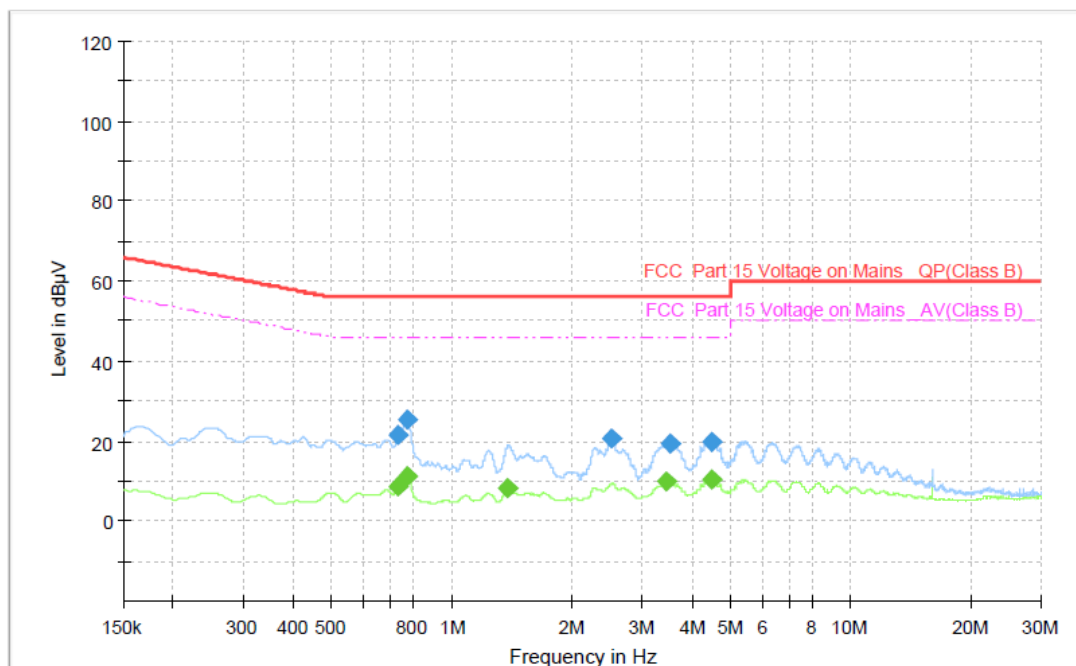Figure 5: Spectral Diagrams, Conducted Emission, 150KHz - 30MHz, L

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.735000	---	8.70	46.00	37.30	1000.0	9.000	L1	ON	9.6
0.735000	21.34	---	56.00	34.66	1000.0	9.000	L1	ON	9.6
0.773250	---	11.36	46.00	34.64	1000.0	9.000	L1	ON	9.6
0.773250	25.49	---	56.00	30.51	1000.0	9.000	L1	ON	9.6
1.385250	---	8.38	46.00	37.62	1000.0	9.000	L1	ON	9.7
2.521500	20.54	---	56.00	35.46	1000.0	9.000	L1	ON	9.7
3.453000	---	9.77	46.00	36.23	1000.0	9.000	L1	ON	9.8
3.513750	19.45	---	56.00	36.55	1000.0	9.000	L1	ON	9.8
4.463250	---	10.37	46.00	35.63	1000.0	9.000	L1	ON	9.8
4.474500	20.03	---	56.00	35.97	1000.0	9.000	L1	ON	9.8

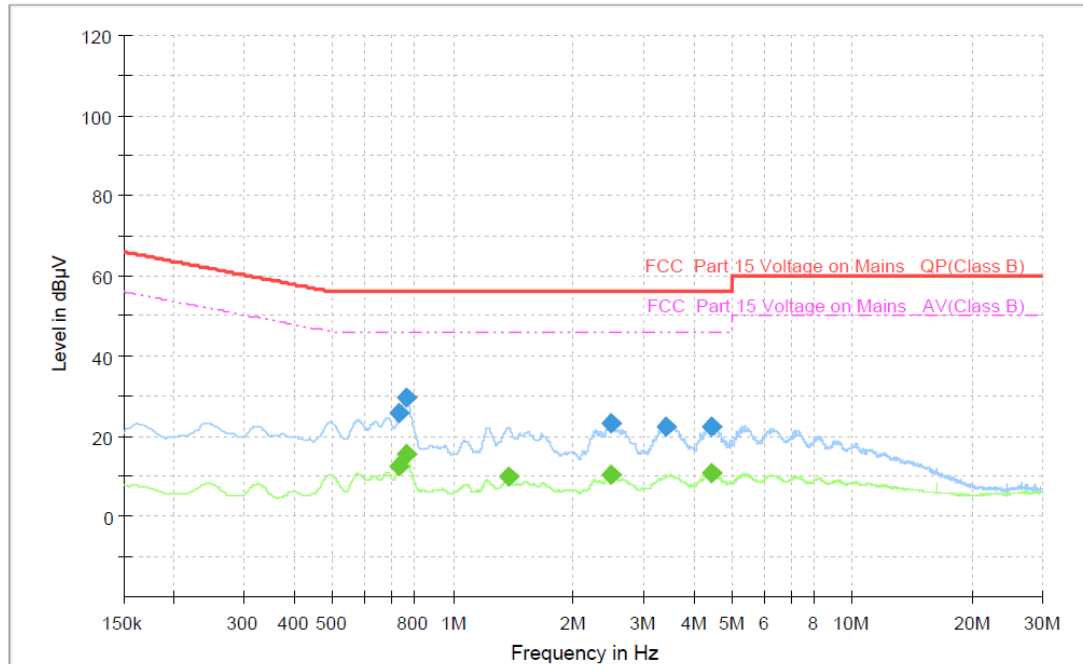Figure 6: Spectral Diagrams, Conducted Emission, 150KHz - 30MHz, N



Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.735000	25.70	---	56.00	30.30	1000.0	9.000	N	ON	9.6
0.735000	---	12.39	46.00	33.61	1000.0	9.000	N	ON	9.6
0.764250	29.67	---	56.00	26.33	1000.0	9.000	N	ON	9.6
0.766500	---	15.60	46.00	30.40	1000.0	9.000	N	ON	9.6
1.374000	---	9.95	46.00	36.05	1000.0	9.000	N	ON	9.7
2.494500	---	10.45	46.00	35.55	1000.0	9.000	N	ON	9.7
2.499000	23.40	---	56.00	32.60	1000.0	9.000	N	ON	9.7
3.426000	22.21	---	56.00	33.79	1000.0	9.000	N	ON	9.8
4.411500	22.25	---	56.00	33.75	1000.0	9.000	N	ON	9.8
4.436250	---	11.02	46.00	34.98	1000.0	9.000	N	ON	9.8

4.2.2 Radiated disturbance

Result:

Pass

Date of testing : 2023.10.07-2023.10.08
 Test procedure : ANSI C63.4:2014 and CISPR 16-1 series standards
 Frequency range : 30MHz-1000MHz
 Limits : Quasi-peak limits (3m test distance):
 FCC Part15, Subpart B:2021
 30-88MHz, 40dB μ V/m; 88-216MHz, 43.5dB μ V/m;
 216-960MHz, 46dB μ V/m; Above 960MHz, 54dB μ V/m.
 ICES-003 Issue 7:2020
 30-88MHz, 40dB μ V/m; 88-216MHz, 43.5dB μ V/m;
 216-230MHz, 46dB μ V/m; 230-960MHz, 47dB μ V/m; Above
 960MHz, 54dB μ V/m.
 Kind of test site : Semi-anechoic chamber
 Operation modes : Mode B, Mode C
 Temp.& Humidity : 23°C, 56%

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a wooden table, which is 0.8m high. The wooden table was rotated 360° around and the antenna was varied from 1m to 4m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

According to the clause 15.33 “Frequency range of radiated measurements” of FCC Part 15, Subpart B:2021, the highest frequency in the EUT is below 108 MHz, therefore the EUT’s upper frequency of measurement range is 1000MHz.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following figures, “◆” mean final measurement results with quasi-peak detector.

Before measurement, a survey was made to determine in which state the maximum disturbance was obtained. And the measurement was made in the state the maximum disturbance was obtained.

The following figures were those measured and recorded by a test receiver. Peak Value were measured and listed respectively where they had a maximum in previous scanning survey. In the Figures, “◆” means Quasi-Peak Value which were measured in final measurement.


The measurement result is calculated based on the following formula by the test software:
 Emission Level = Reading level + Correction (Antenna factor + Cable loss - preamplifier factor (if used))

Prüfbericht - Nr.: CN23GHUI 001
Test Report No.:

Seite 23 von 26
Page 23 of 26

Figure 7: Spectral Diagrams, Radiated disturbance, Mode B, AMP25B-1.1/28


30MHz-1000MHz, Horizontal

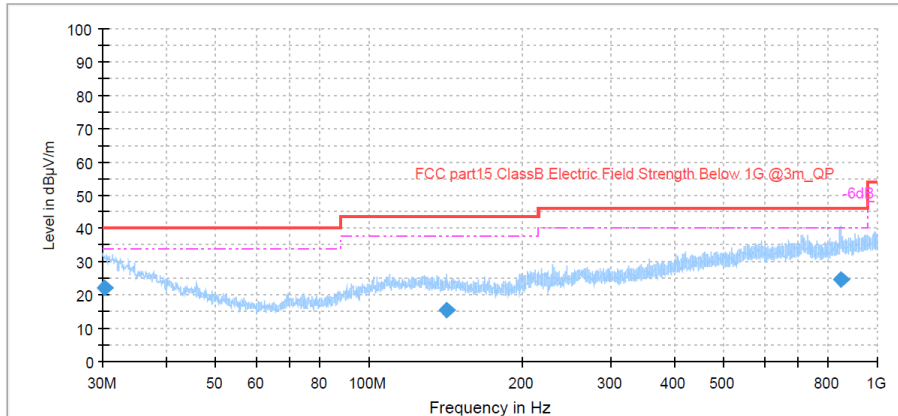

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.185000	22.21	40.00	17.79	1000.0	120.000	167.0	H	114.0	25.9
141.827222	15.28	43.50	28.22	1000.0	120.000	161.0	H	86.0	18.4
845.061667	24.75	46.00	21.25	1000.0	120.000	127.0	H	286.0	29.4

30MHz-1000MHz, Vertical

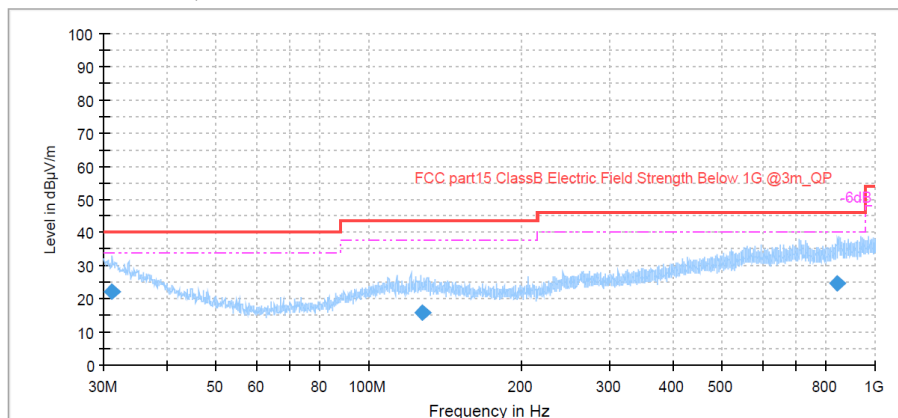

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.005556	22.19	40.00	17.81	1000.0	120.000	174.0	V	104.0	25.3
127.367778	15.74	43.50	27.76	1000.0	120.000	164.0	V	233.0	19.0
844.835556	24.76	46.00	21.24	1000.0	120.000	229.0	V	205.0	29.4

Prüfbericht - Nr.: CN23GHUI 001
Test Report No.:

Seite 24 von 26
Page 24 of 26

Figure 8: Spectral Diagrams, Radiated disturbance, Mode B, AMP25B-0.7/34


30MHz-1000MHz, Horizontal

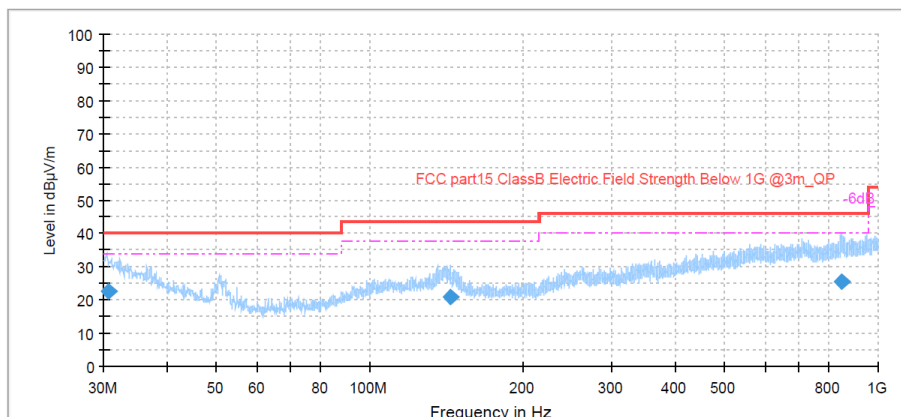

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.637222	22.79	40.00	17.21	1000.0	120.000	235.0	H	35.0	25.6
144.386111	20.98	43.50	22.52	1000.0	120.000	250.0	H	144.0	18.3
845.491111	25.68	46.00	20.32	1000.0	120.000	104.0	H	251.0	29.3

30MHz-1000MHz, Vertical

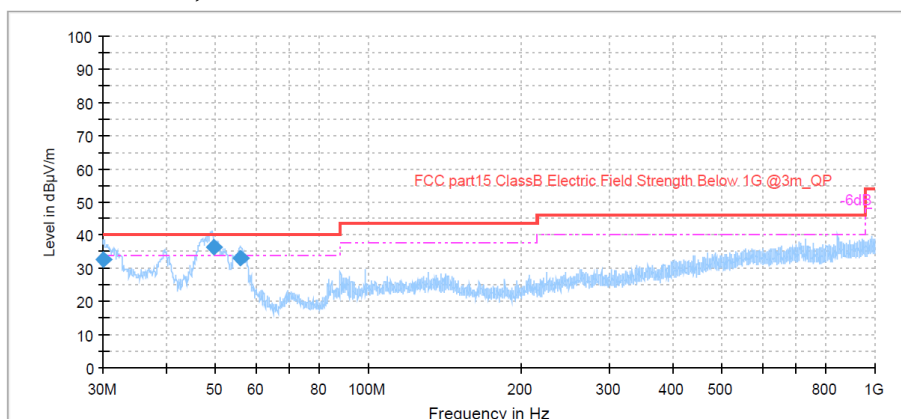

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.040000	32.55	40.00	7.45	1000.0	120.000	146.0	V	357.0	25.9
49.432222	36.42	40.00	3.58	1000.0	120.000	114.0	V	21.0	15.5
55.966667	32.90	40.00	7.10	1000.0	120.000	154.0	V	207.0	13.6

Prüfbericht - Nr.: CN23GHUI 001


Test Report No.:

Seite 25 von 26

Page 25 of 26

Figure 9: Spectral Diagrams, Radiated disturbance, Mode C


30MHz-1000MHz, Horizontal

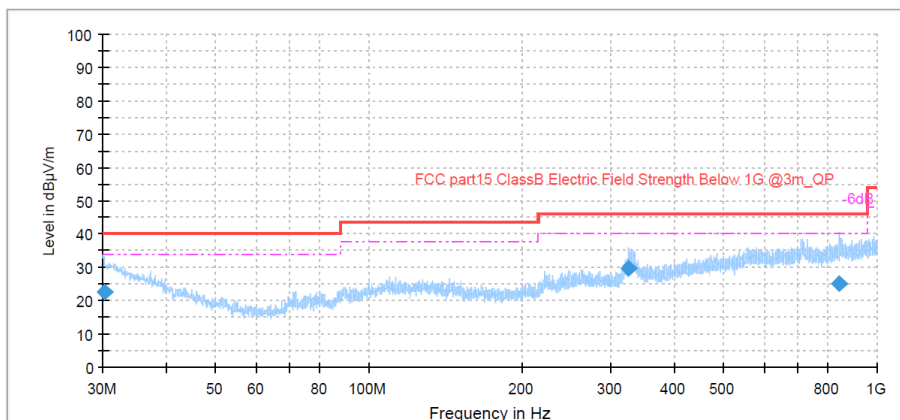

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.120000	22.74	40.00	17.26	1000.0	120.000	219.0	H	133.0	25.9
324.875556	29.91	46.00	16.09	1000.0	120.000	100.0	H	322.0	21.5
844.913889	25.30	46.00	20.70	1000.0	120.000	201.0	H	101.0	29.4

30MHz-1000MHz, Vertical

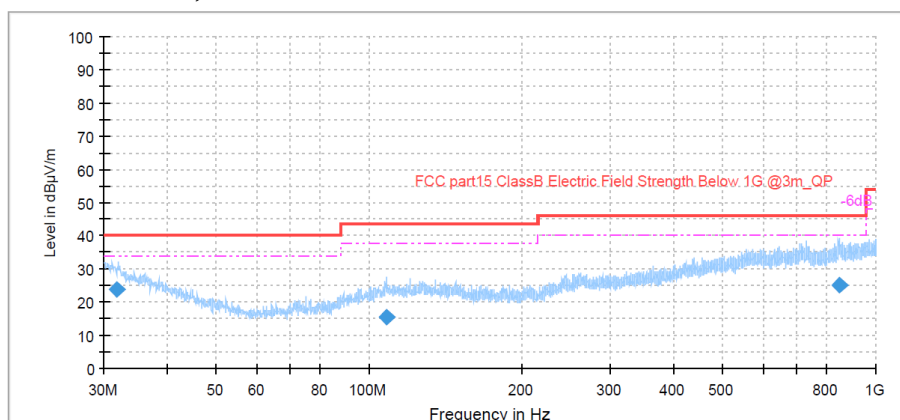

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.733889	23.71	40.00	16.29	1000.0	120.000	233.0	V	194.0	24.7
108.656111	15.69	43.50	27.81	1000.0	120.000	150.0	V	139.0	18.8
845.477222	25.19	46.00	20.81	1000.0	120.000	121.0	V	183.0	29.3

5. List of Tables

Table 1: List of Test and Measurement Equipment, Laboratory	5
Table 2: Measurement Uncertainty	5
Table 3: General Description of EUT	6
Table 4: List of Auxiliary Equipment	7

6. List of Figures

Figure 1: Test Results of Deactivation of the Transmission	11
Figure 2: Test Results of 20dB Emission Bandwidth	12
Figure 3: Test Results of 99% Bandwidth	14
Figure 4: Spectral Diagrams, Field strength of fundamental, Radiated Spurious Emission	16
Figure 5: Spectral Diagrams, Conducted Emission, 150KHz - 30MHz, L	20
Figure 6: Spectral Diagrams, Conducted Emission, 150KHz - 30MHz, N	21
Figure 7: Spectral Diagrams, Radiated disturbance, Mode B, AMP25B-1.1/28	23
Figure 8: Spectral Diagrams, Radiated disturbance, Mode B, AMP25B-0.7/34	24
Figure 9: Spectral Diagrams, Radiated disturbance, Mode C	25

-- The END --