


7.6.8 SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5190MHz Channel: 38



Plot 7-197. Radiated Lower Band Edge Plot SISO ANT2 (Average - UNII Band 1)

RBW: 1 MHz VBW: 3 MHz SWT: 20.0m **PASS** 66.96 dBµV/m 120 100 80 5102.1 5116.2 5130.3 5144.4 5158.6 5172.7 5186.8 5200.9 5215.0 Frequency (MHz)


5147.63 MHz

Plot 7-198. Radiated Lower Band Edge Plot SISO ANT2 (Peak - UNII Band 1)

Worst Case Mode: 802.11n Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5310MHz Channel: 62



Plot 7-199. Radiated Upper Band Edge Plot SISO ANT2 (Average - UNII Band 2A)



Plot 7-200. Radiated Upper Band Edge Plot SISO ANT2 (Peak - UNII Band 2A)

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 147 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 147 01 170



Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11n

MCS0

3 Meters

5510MHz

102



Plot 7-201. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

PASS Trace: Maxifold Offset: 14.8dB SW: 1 MHz 5469.88 MHz 64.28 dBµV/m 64.28 dBµV/m 64.28 dBµV/m 65350.0 5370.2 5390.4 5410.7 5430.9 54511 5471.3 5491.6 5511.8 5532.0

Plot 7-202. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11n

MCS0

3 Meters

5795MHz

159



Plot 7-203. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 149 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 148 of 170



7.6.9 SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ac

MCS0


3 Meters

5210MHz

42




Plot 7-204. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)




Plot 7-205. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5290MHz
58



Plot 7-206. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)



Plot 7-207. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.		
Test Report S/N:	Test Dates:	EUT Type:	Dogo 140 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 149 of 170



Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11ac

MCS0

3 Meters

5530MHz

106



Plot 7-208. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11ac

MCS0


3 Meters

5775MHz

155



Plot 7-209. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)



Plot 7-210. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 150 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 150 of 170



7.6.10 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:

Operating Frequency:

Channel:

802.11n

MCS8


3 Meters

5180MHz

36



Plot 7-211. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)



Plot 7-212. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11n

MCS8


3 Meters

5320MHz

64



Plot 7-213. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)



Plot 7-214. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFQ850QM	PETEST: INGINERING LABORATORY, INC.		
Test Report S/N:	Test Dates:	EUT Type:	Page 151 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 151 01 170



Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11n

MCS8


3 Meters

5500MHz

100



Plot 7-215. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)



Plot 7-216. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11n

MCS8

3 Meters

5825MHz

165



Plot 7-217. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 152 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 152 of 170



7.6.11 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11n

MCS8


3 Meters

5190MHz

38



Plot 7-218. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)



Plot 7-219. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:


802.11n

MCS8


3 Meters

5310MHz

62



Plot 7-220. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)



Plot 7-221. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)


FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 153 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 153 01 170



Worst Case Mode: 802.11n Worst Case Transfer Rate: MCS8 Distance of Measurements: 3 Meters Operating Frequency: 5510MHz Channel: 102




Plot 7-222. Radiated Lower Band Edge Plot MIMO (Average - UNII Band 2C)



Plot 7-223. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 2C)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5795MHz
Channel:	159

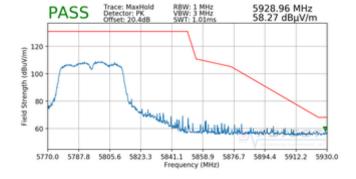


FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 154 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 154 of 170




7.6.12 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5210MHz
42




Plot 7-224. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)




Plot 7-225. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58



Plot 7-226. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)




Plot 7-227. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 155 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 155 of 170





Worst Case Mode: 802.11ac Worst Case Transfer Rate: MCS₀ Distance of Measurements: 3 Meters Operating Frequency: 5530MHz Channel: 106



Plot 7-228. Radiated Lower Band Edge Plot MIMO (Average - UNII Band 2C)

Worst Case Mode: Worst Case Transfer Rate: MCS0 Distance of Measurements: 3 Meters Operating Frequency: 5775MHz Channel: 155





Plot 7-230. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 3)

Р	PASS		Trace: MaxHold Detector: PK Offset: 17.9dB		RBW: 1 MHz VBW: 3 MHz SWT: 20.0ms		5462.42 MHz 63.10 dBμV/m		
140									
Field Strength (dBuV/m) 08 00 00 00 00 00 00 00 00 00 00 00 00									
100								~~~	many
80 - Si									\
60 -	and and a	-www.daw.			war and the same of the same o	Mark		CTE	ST.
5350.0	537	4.7 53	99.3 54		48.7 54 requency		8.0 552	2.7 554	47.3 5572.

Plot 7-229. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 2C)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 156 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 156 of 170



7.6.13 CDD Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11a

6Mbps

3 Meters

5180MHz

36




Plot 7-231. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

Plot 7-232. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64



Plot 7-233. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)



Plot 7-234. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 157 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 157 of 170




Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11a
6Mbps
3 Meters
5500MHz
100




Plot 7-235. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)



Plot 7-236. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165



Plot 7-237. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 159 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 158 of 170



Radiated Spurious Emissions Measurements - Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-65 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-61. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- Trace was allowed to stabilize

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 150 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 159 of 170



Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

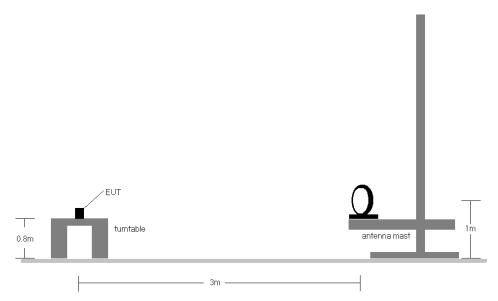


Figure 7-6. Radiated Test Setup < 30MHz

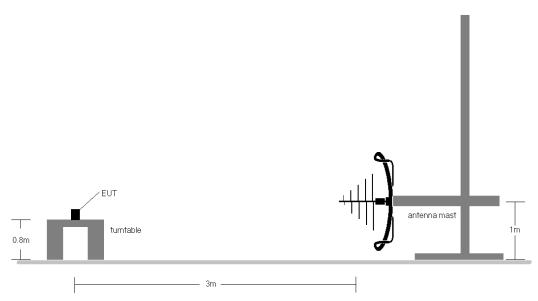


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: ZNFQ850QM	POTEST:	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 160 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 160 of 170

© 2019 PCTEST Engineering Laboratory, Inc.




Test Notes

- 1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-65.
- 2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
- 9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz - 1GHz frequency range, as shown in the subsequent plots.

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 161 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 161 of 170



SISO Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

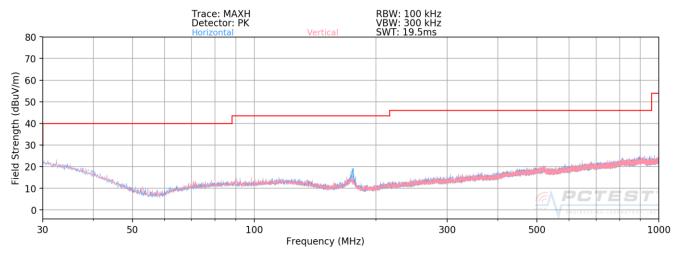


Plot 7-238. Radiated Spurious Plot below 1GHz SISO ANT1 (802.11a - U3 Ch. 157)

FCC ID: ZNFQ850QM	PETEST: INGINERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 160 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 162 of 170



SISO Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

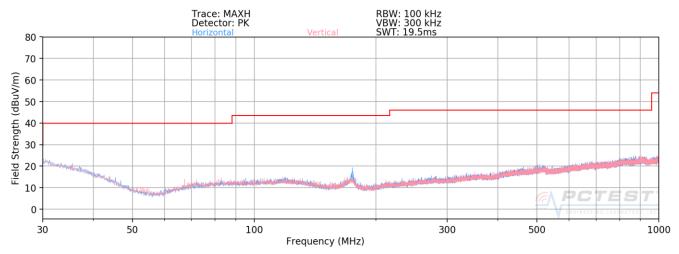

Plot 7-239. Radiated Spurious Plot below 1GHz SISO ANT2 (802.11a - U3 Ch. 157)

FCC ID: ZNFQ850QM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 162 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 163 of 170



Line-Conducted Test Data 7.8

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission	Conducted	Limit (dBμV)
(MHz)	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-62. Conducted Limits

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- Detector = RMS
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: ZNFQ850QM	POTEST: LINGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 164 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 164 of 170

^{*}Decreases with the logarithm of the frequency.



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

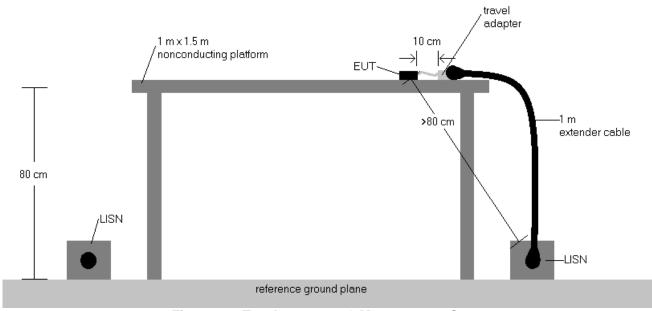



Figure 7-8. Test Instrument & Measurement Setup

Test Notes


- All modes of operation were investigated and the worst-case emissions are reported using mid channel. 1. The emissions found were not affected by the choice of channel used during testing.
- 2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- 3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- 4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dB μ V) QP/AV Level (dB μ V) 5.
- Traces shown in plot are made using a peak detector. 6.
- 7. Deviations to the Specifications: None.

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 165 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 165 of 170



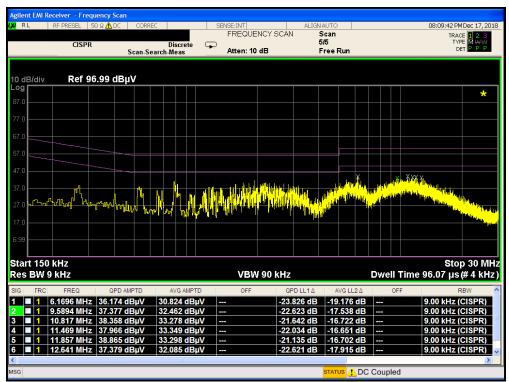


Plot 7-240. Line Conducted Plot with 802.11a UNII Band 1 (L1)

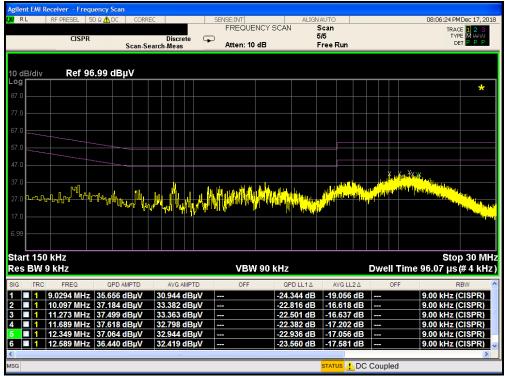


Plot 7-241. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 166 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 166 of 170



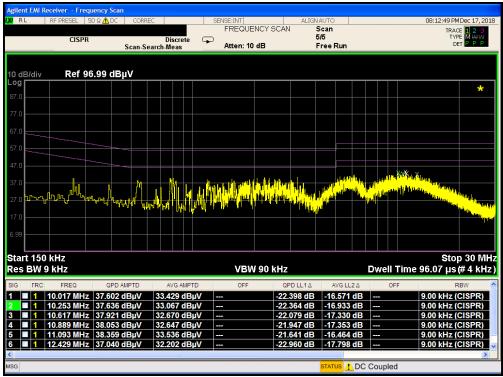


Plot 7-242. Line Conducted Plot with 802.11a UNII Band 2A (L1)

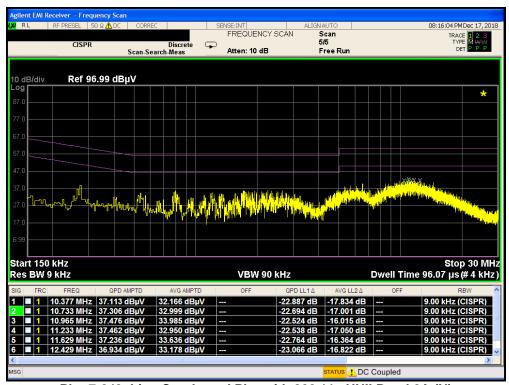


Plot 7-243. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 167 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 167 of 170



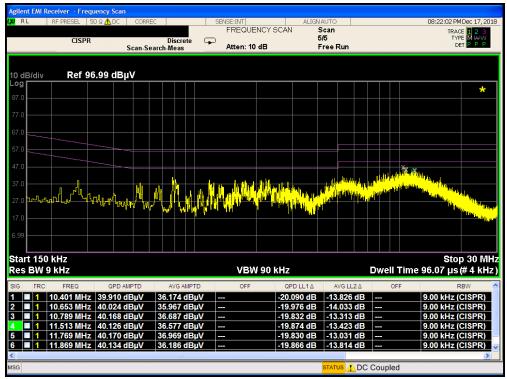


Plot 7-244. Line Conducted Plot with 802.11a UNII Band 2C (L1)

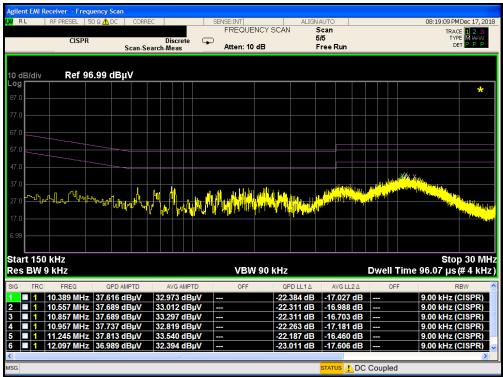


Plot 7-245. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 168 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 100 01 170



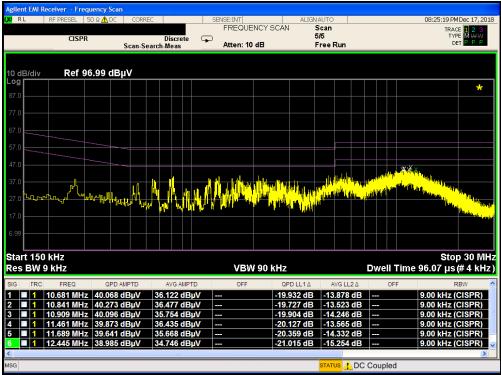

Plot 7-246. Line Conducted Plot with 802.11a UNII Band 3 (L1)

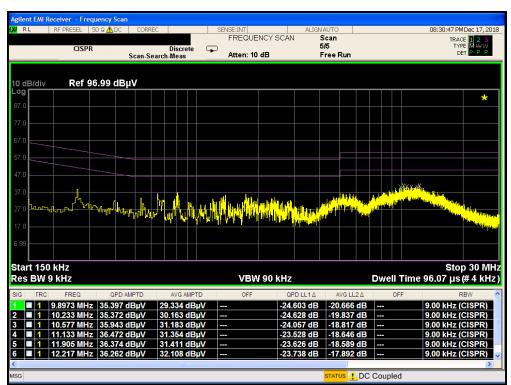

Plot 7-247. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 160 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Page 169 of 170



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFQ850QM** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: ZNFQ850QM	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 170 of 170
1M1812060222-06.ZNF	12/11/2018 - 1/18/2019	Portable Handset	Fage 170 01 170