



RF TEST REPORT

Applicant Xiaomi Communications Co., Ltd.
FCC ID 2AFZZRN54G
Product Mobile Phone
Brand Redmi
Model 23026RN54G
Report No. R2211A1048-R8
Issue Date January 6, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2022)/ FCC CFR 47 Part 90S (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test Facility	4
1.3. Testing Location	4
2. General Description of Equipment Under Test	5
2.3. Applicant and Manufacturer Information	5
2.4. General Information	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case	8
5.1. RF Power Output and Effective Radiated Power	8
5.2. Occupied Bandwidth	9
5.3. Emission Mask	10
5.4. Peak-to-Average Power Ratio (PAPR)	11
5.5. Frequency Stability	12
5.6. Spurious Emissions at Antenna Terminals	14
5.7. Radiated Spurious Emission	15
6. Test Results	18
6.1. RF Power Output and Effective Radiated Power	18
6.2. Occupied Bandwidth	25
6.3. Emission Mask	30
6.4. Peak-to-Average Power Ratio (PAPR)	36
6.5. Frequency Stability	37
6.6. Spurious Emissions at Antenna Terminals	39
6.7. Radiated Spurious Emission	41
7. Main Test Instruments	45
ANNEX A: The EUT Appearance	46
ANNEX B: Test Setup Photos	47
ANNEX C: Product Change Description (Variant 2)	48

Summary of Measurement Results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.691	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 90.213	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 90.691	PASS
7	Radiated Spurious Emission	2.1053 /90.691	PASS
Date of Testing: November 25, 2022 ~ December 4, 2022			
Date of Sample Received: November 12, 2022			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

23026RN54G (Variant) is a variant model of 23026RN54G (Original) Variant 2 Add 2nd supplier RF PA.

Tested band refer to the following table.

Test Case	Original (R2211A1048-R8)	Variant (R2211A1048-R8)
RF Power Output	Pass	Tested RF Power Output, and did not worsen, so they were not recorded in the report.

The detailed product change description please refers to the *Difference Declaration Letter (Variant 2)*.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment Under Test

2.3. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.4. General Information

EUT Description			
Model	23026RN54G		
IMEI	IMEI1: 863698060058689 IMEI2: 863698060058697		
Hardware Version	P1.1		
Software Version	Android 13		
Antenna Type	PIFA Antenna		
Antenna Gain	Low Antenna	Upper Antenna	
	-4.4 dBi	-3.2 dBi	
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK, 16QAM		
LTE Category	4		
Maximum E.R.P.	18.73 dBm		
Rated Power Supply Voltage	3.85 V		
Operating Voltage	Minimum: 3.6V Maximum: 4.4V		
Operating Temperature	Lowest: 0°C Highest: +40°C		
Testing Temperature	Lowest: -30°C Highest: +50°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	814 ~ 824	859 ~ 869
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

Item	Configure 1	Configure 2
WIFI test socket	support	remove
PL sensor	support	remove
Note: Configuration 2 only verifies Radiated Emission.		



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 90S (2022)

FCC CFR47 Part 2 (2022)

Reference standard:

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Y axis, horizontal polarization for Low Antenna; Z axis, horizontal polarization for Upper Antenna,) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF Power Output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Emission Mask	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiated Spurious Emission	O	-	O	-	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case

5.1. RF Power Output and Effective Radiated Power

Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$EIRP \text{ (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$

where:dBd refers to gain relative to an ideal dipole.

$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

Test Setup

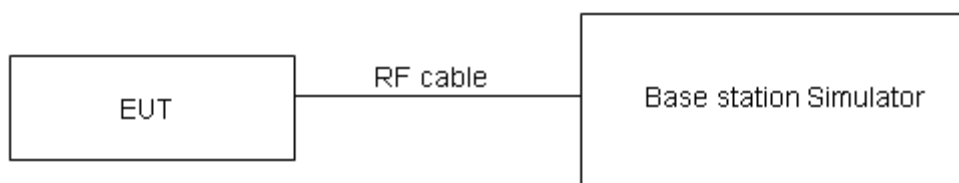

Limits

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Rule Part 90.635(b) specifies that “The maximum output power of the transmitter for mobile stations is 100 watts”.

Limit	$\leq 100 \text{ W}$ (50 dBm)
-------	-------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP.

Test Results

Refer to the section 6.1 of this report for test data.

5.2. Occupied Bandwidth

Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%$ EBW, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

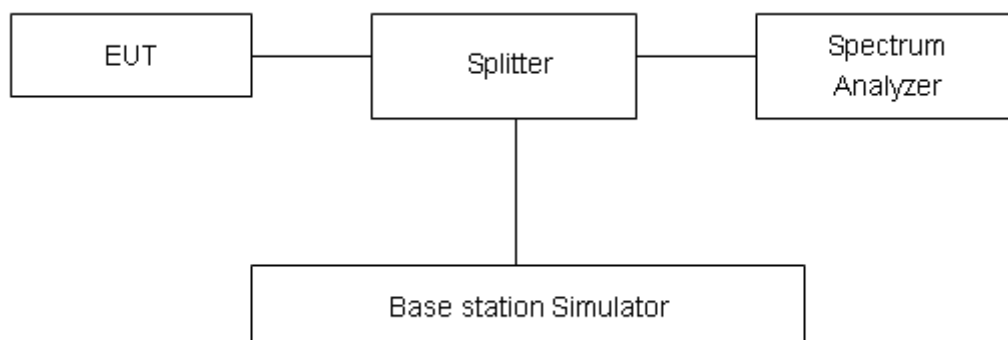

Limits

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Results

Refer to the section 6.2 of this report for test data.

5.3. Emission Mask

Ambient Condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. For Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.

Spectrum analyzer plots are included on the following pages.

Test Setup

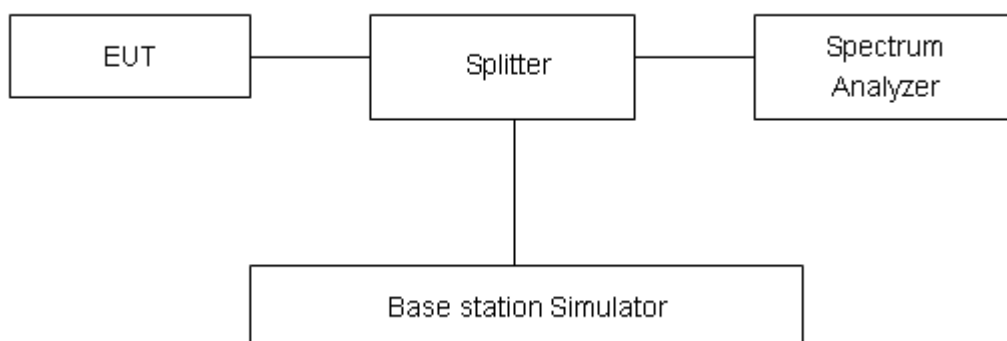

Limits

Rule Part 90.691(a) specifies that “ For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Results

Refer to the section 6.3 of this report for test data.

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient Condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$PAPR (dB) = PPk (dBm) - PAvg (dBm)$.

Test Setup

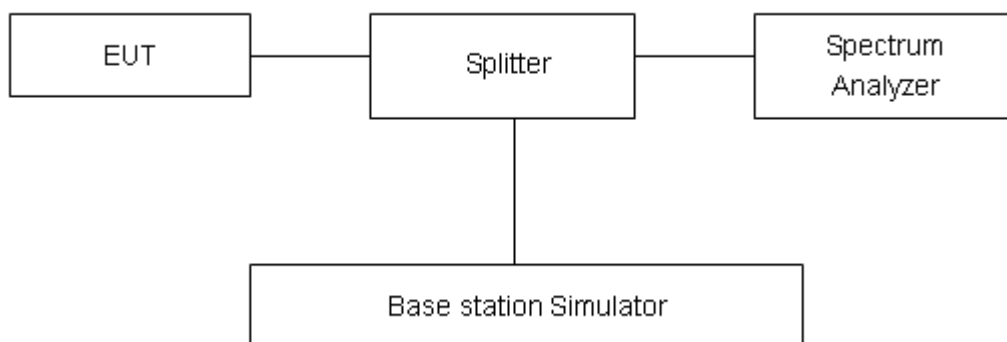

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Refer to the section 6.4 of this report for test data.

5.5. Frequency Stability

Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


2. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.85V.

Test Setup

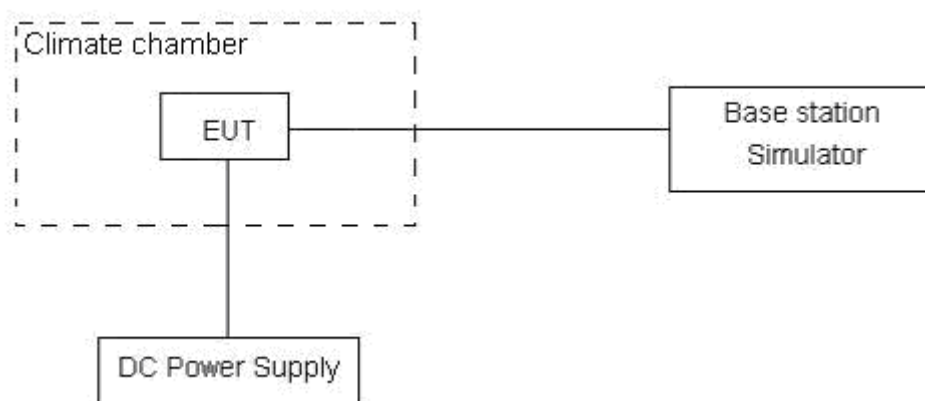

Limits

According to the Sec. 90.213.(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
814 ~ 824	1.5	2.5	2.5

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Results

Refer to the section 6.5 of this report for test data.

5.6. Spurious Emissions at Antenna Terminals

Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

Sweep is set to ATUO.

Test Setup

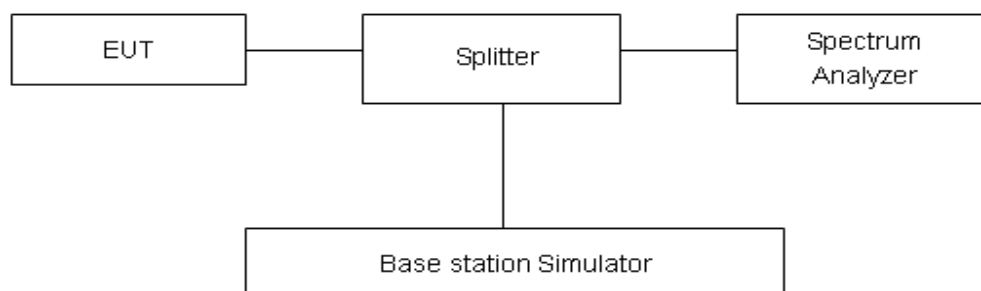

Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-10GHz	1.407 dB

Test Results

Refer to the section 6.6 of this report for test data.

5.7. Radiated Spurious Emission

Ambient Condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test Setup


9KHz~ 30MHz

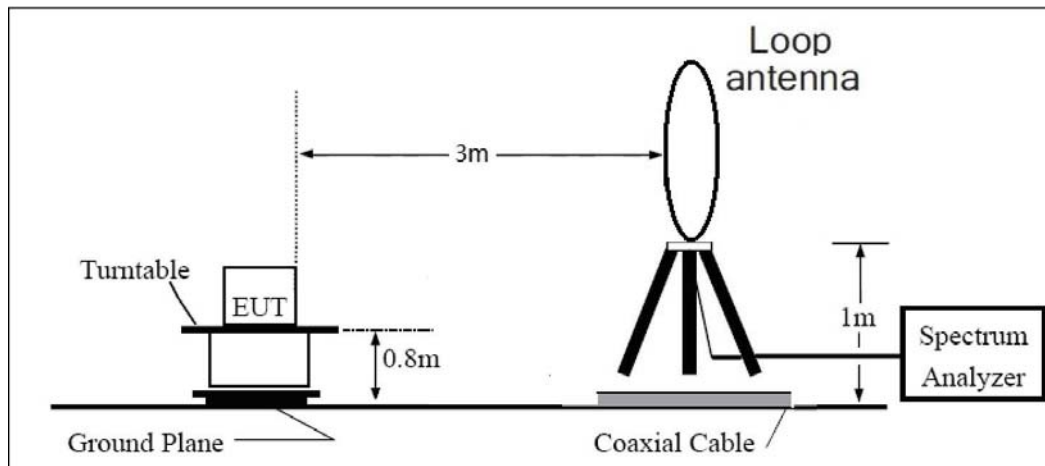

30MHz~ 1GHz

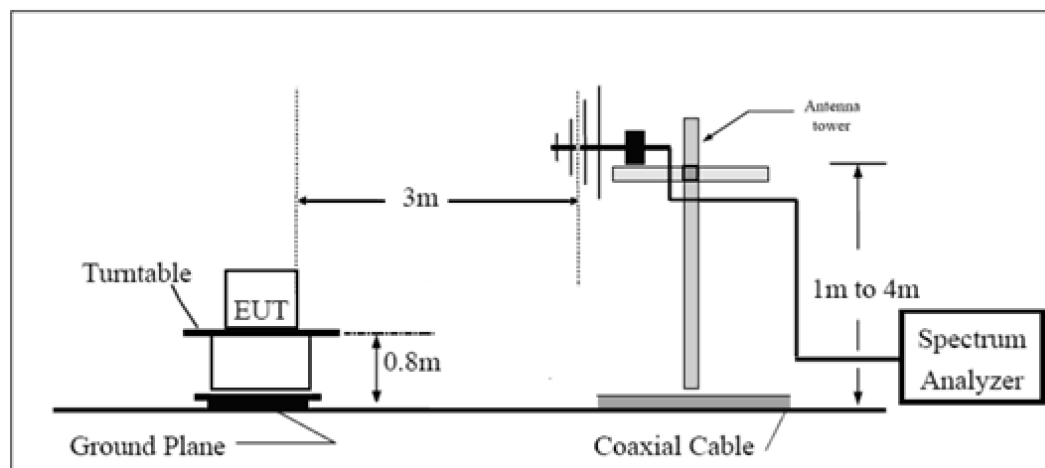

Above 1GHz

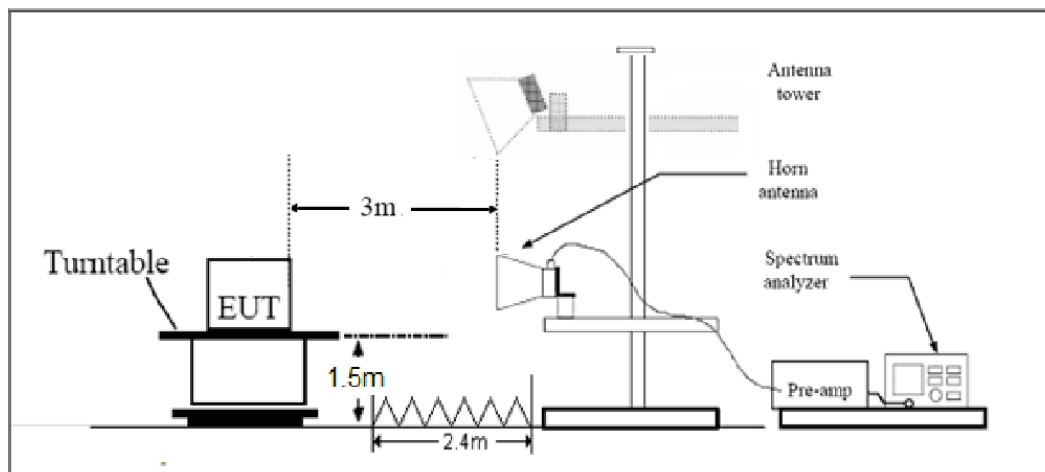

Note: Area side: 2.4mX3.6m

Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Results

Refer to the section 6.7 of this report for test data.

6. Test Results

6.1. RF Power Output and Effective Radiated Power

LTE Band26 (Low Antenna)						
Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	ERP (dBm)
1.4	26697	1	#0	QPSK	23.96	17.41
1.4	26697	1	#Mid	QPSK	24.18	17.63
1.4	26697	1	#Max	QPSK	23.93	17.38
1.4	26697	3	#0	QPSK	24.06	17.51
1.4	26697	3	#Mid	QPSK	24.06	17.51
1.4	26697	3	#Max	QPSK	24.08	17.53
1.4	26697	6	#0	QPSK	23.07	16.52
1.4	26697	1	#0	16QAM	23.17	16.62
1.4	26697	1	#Mid	16QAM	23.34	16.79
1.4	26697	1	#Max	16QAM	23.16	16.61
1.4	26697	3	#0	16QAM	23.07	16.52
1.4	26697	3	#Mid	16QAM	23.06	16.51
1.4	26697	3	#Max	16QAM	23.11	16.56
1.4	26697	6	#0	16QAM	22.01	15.46
1.4	26740	1	#0	QPSK	24.06	17.51
1.4	26740	1	#Mid	QPSK	24.26	17.71
1.4	26740	1	#Max	QPSK	24.07	17.52
1.4	26740	3	#0	QPSK	24.13	17.58
1.4	26740	3	#Mid	QPSK	24.11	17.56
1.4	26740	3	#Max	QPSK	24.07	17.52
1.4	26740	6	#0	QPSK	23.04	16.49
1.4	26740	1	#0	16QAM	22.94	16.39
1.4	26740	1	#Mid	16QAM	23.06	16.51
1.4	26740	1	#Max	16QAM	22.88	16.33
1.4	26740	3	#0	16QAM	23.05	16.50
1.4	26740	3	#Mid	16QAM	23.05	16.50
1.4	26740	3	#Max	16QAM	23.05	16.50
1.4	26740	6	#0	16QAM	22.02	15.47
1.4	26783	1	#0	QPSK	24.09	17.54
1.4	26783	1	#Mid	QPSK	24.26	17.71
1.4	26783	1	#Max	QPSK	24.08	17.53
1.4	26783	3	#0	QPSK	24.09	17.54
1.4	26783	3	#Mid	QPSK	24.10	17.55
1.4	26783	3	#Max	QPSK	24.10	17.55
1.4	26783	6	#0	QPSK	23.02	16.47



1.4	26783	1	#0	16QAM	23.02	16.47
1.4	26783	1	#Mid	16QAM	23.23	16.68
1.4	26783	1	#Max	16QAM	23.00	16.45
1.4	26783	3	#0	16QAM	23.20	16.65
1.4	26783	3	#Mid	16QAM	23.21	16.66
1.4	26783	3	#Max	16QAM	23.24	16.69
1.4	26783	6	#0	16QAM	22.06	15.51
3	26705	1	#0	QPSK	24.01	17.46
3	26705	1	#Mid	QPSK	23.98	17.43
3	26705	1	#Max	QPSK	24.04	17.49
3	26705	8	#0	QPSK	23.01	16.46
3	26705	8	#Mid	QPSK	23.03	16.48
3	26705	8	#Max	QPSK	23.07	16.52
3	26705	15	#0	QPSK	23.02	16.47
3	26705	1	#0	16QAM	23.20	16.65
3	26705	1	#Mid	16QAM	23.19	16.64
3	26705	1	#Max	16QAM	23.16	16.61
3	26705	8	#0	16QAM	22.00	15.45
3	26705	8	#Mid	16QAM	22.02	15.47
3	26705	8	#Max	16QAM	22.06	15.51
3	26705	15	#0	16QAM	21.90	15.35
3	26740	1	#0	QPSK	24.11	17.56
3	26740	1	#Mid	QPSK	24.11	17.56
3	26740	1	#Max	QPSK	24.09	17.54
3	26740	8	#0	QPSK	23.05	16.50
3	26740	8	#Mid	QPSK	23.06	16.51
3	26740	8	#Max	QPSK	23.06	16.51
3	26740	15	#0	QPSK	23.04	16.49
3	26740	1	#0	16QAM	22.92	16.37
3	26740	1	#Mid	16QAM	22.97	16.42
3	26740	1	#Max	16QAM	22.89	16.34
3	26740	8	#0	16QAM	22.08	15.53
3	26740	8	#Mid	16QAM	22.07	15.52
3	26740	8	#Max	16QAM	22.04	15.49
3	26740	15	#0	16QAM	22.04	15.49
3	26775	1	#0	QPSK	24.04	17.49
3	26775	1	#Mid	QPSK	24.02	17.47
3	26775	1	#Max	QPSK	23.95	17.40
3	26775	8	#0	QPSK	23.04	16.49
3	26775	8	#Mid	QPSK	23.06	16.51
3	26775	8	#Max	QPSK	23.05	16.50
3	26775	15	#0	QPSK	23.01	16.46
3	26775	1	#0	16QAM	23.35	16.80



3	26775	1	#Mid	16QAM	23.31	16.76
3	26775	1	#Max	16QAM	23.21	16.66
3	26775	8	#0	16QAM	22.09	15.54
3	26775	8	#Mid	16QAM	22.07	15.52
3	26775	8	#Max	16QAM	22.06	15.51
3	26775	15	#0	16QAM	22.00	15.45
5	26715	1	#0	QPSK	23.93	17.38
5	26715	1	#Mid	QPSK	24.06	17.51
5	26715	1	#Max	QPSK	23.93	17.38
5	26715	12	#0	QPSK	23.00	16.45
5	26715	12	#Mid	QPSK	23.03	16.48
5	26715	12	#Max	QPSK	22.98	16.43
5	26715	25	#0	QPSK	23.02	16.47
5	26715	1	#0	16QAM	23.15	16.60
5	26715	1	#Mid	16QAM	23.24	16.69
5	26715	1	#Max	16QAM	23.20	16.65
5	26715	12	#0	16QAM	21.92	15.37
5	26715	12	#Mid	16QAM	21.93	15.38
5	26715	12	#Max	16QAM	21.96	15.41
5	26715	25	#0	16QAM	22.01	15.46
5	26740	1	#0	QPSK	23.88	17.33
5	26740	1	#Mid	QPSK	24.00	17.45
5	26740	1	#Max	QPSK	23.93	17.38
5	26740	12	#0	QPSK	23.02	16.47
5	26740	12	#Mid	QPSK	22.97	16.42
5	26740	12	#Max	QPSK	23.07	16.52
5	26740	25	#0	QPSK	23.06	16.51
5	26740	1	#0	16QAM	23.19	16.64
5	26740	1	#Mid	16QAM	23.29	16.74
5	26740	1	#Max	16QAM	23.18	16.63
5	26740	12	#0	16QAM	22.03	15.48
5	26740	12	#Mid	16QAM	22.05	15.50
5	26740	12	#Max	16QAM	22.05	15.50
5	26740	25	#0	16QAM	22.11	15.56
5	26765	1	#0	QPSK	23.94	17.39
5	26765	1	#Mid	QPSK	24.11	17.56
5	26765	1	#Max	QPSK	23.91	17.36
5	26765	12	#0	QPSK	23.05	16.50
5	26765	12	#Mid	QPSK	23.07	16.52
5	26765	12	#Max	QPSK	23.03	16.48
5	26765	25	#0	QPSK	23.07	16.52
5	26765	1	#0	16QAM	23.25	16.70
5	26765	1	#Mid	16QAM	23.42	16.87



5	26765	1	#Max	16QAM	23.23	16.68
5	26765	12	#0	16QAM	21.99	15.44
5	26765	12	#Mid	16QAM	22.00	15.45
5	26765	12	#Max	16QAM	21.99	15.44
5	26765	25	#0	16QAM	22.10	15.55
10	26740	1	#0	QPSK	24.00	17.45
10	26740	1	#Mid	QPSK	24.12	17.57
10	26740	1	#Max	QPSK	24.01	17.46
10	26740	25	#0	QPSK	23.02	16.47
10	26740	25	#Mid	QPSK	23.06	16.51
10	26740	25	#Max	QPSK	23.09	16.54
10	26740	50	#0	QPSK	23.05	16.50
10	26740	1	#0	16QAM	23.22	16.67
10	26740	1	#Mid	16QAM	23.33	16.78
10	26740	1	#Max	16QAM	23.13	16.58
10	26740	25	#0	16QAM	22.07	15.52
10	26740	25	#Mid	16QAM	22.08	15.53
10	26740	25	#Max	16QAM	22.15	15.60
10	26740	50	#0	16QAM	22.09	15.54

LTE Band26 (Upper Antenna)						
Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	ERP (dBm)
1.4	26697	1	#0	QPSK	23.76	18.41
1.4	26697	1	#Mid	QPSK	24.01	18.66
1.4	26697	1	#Max	QPSK	23.79	18.44
1.4	26697	3	#0	QPSK	23.87	18.52
1.4	26697	3	#Mid	QPSK	23.87	18.52
1.4	26697	3	#Max	QPSK	23.82	18.47
1.4	26697	6	#0	QPSK	22.78	17.43
1.4	26697	1	#0	16QAM	23.56	18.21
1.4	26697	1	#Mid	16QAM	23.67	18.32
1.4	26697	1	#Max	16QAM	23.27	17.92
1.4	26697	3	#0	16QAM	23.16	17.81
1.4	26697	3	#Mid	16QAM	22.8	17.45
1.4	26697	3	#Max	16QAM	22.78	17.43
1.4	26697	6	#0	16QAM	21.75	16.4
1.4	26740	1	#0	QPSK	23.83	18.48
1.4	26740	1	#Mid	QPSK	24.08	18.73
1.4	26740	1	#Max	QPSK	23.85	18.5
1.4	26740	3	#0	QPSK	23.88	18.53
1.4	26740	3	#Mid	QPSK	23.88	18.53
1.4	26740	3	#Max	QPSK	23.87	18.52



1.4	26740	6	#0	QPSK	22.83	17.48
1.4	26740	1	#0	16QAM	22.75	17.4
1.4	26740	1	#Mid	16QAM	23.04	17.69
1.4	26740	1	#Max	16QAM	22.8	17.45
1.4	26740	3	#0	16QAM	23.01	17.66
1.4	26740	3	#Mid	16QAM	23	17.65
1.4	26740	3	#Max	16QAM	23.03	17.68
1.4	26740	6	#0	16QAM	21.85	16.5
1.4	26783	1	#0	QPSK	23.77	18.42
1.4	26783	1	#Mid	QPSK	23.89	18.54
1.4	26783	1	#Max	QPSK	23.75	18.4
1.4	26783	3	#0	QPSK	23.86	18.51
1.4	26783	3	#Mid	QPSK	23.85	18.5
1.4	26783	3	#Max	QPSK	23.85	18.5
1.4	26783	6	#0	QPSK	22.77	17.42
1.4	26783	1	#0	16QAM	22.95	17.6
1.4	26783	1	#Mid	16QAM	23.23	17.88
1.4	26783	1	#Max	16QAM	22.97	17.62
1.4	26783	3	#0	16QAM	22.88	17.53
1.4	26783	3	#Mid	16QAM	22.89	17.54
1.4	26783	3	#Max	16QAM	22.92	17.57
1.4	26783	6	#0	16QAM	21.79	16.44
3	26705	1	#0	QPSK	23.71	18.36
3	26705	1	#Mid	QPSK	23.76	18.41
3	26705	1	#Max	QPSK	23.79	18.44
3	26705	8	#0	QPSK	22.72	17.37
3	26705	8	#Mid	QPSK	22.76	17.41
3	26705	8	#Max	QPSK	22.79	17.44
3	26705	15	#0	QPSK	22.75	17.4
3	26705	1	#0	16QAM	22.92	17.57
3	26705	1	#Mid	16QAM	22.94	17.59
3	26705	1	#Max	16QAM	22.92	17.57
3	26705	8	#0	16QAM	21.73	16.38
3	26705	8	#Mid	16QAM	21.74	16.39
3	26705	8	#Max	16QAM	21.76	16.41
3	26705	15	#0	16QAM	21.64	16.29
3	26740	1	#0	QPSK	23.83	18.48
3	26740	1	#Mid	QPSK	23.84	18.49
3	26740	1	#Max	QPSK	23.87	18.52
3	26740	8	#0	QPSK	22.83	17.48
3	26740	8	#Mid	QPSK	22.79	17.44
3	26740	8	#Max	QPSK	22.8	17.45
3	26740	15	#0	QPSK	22.79	17.44



3	26740	1	#0	16QAM	22.71	17.36
3	26740	1	#Mid	16QAM	22.69	17.34
3	26740	1	#Max	16QAM	22.72	17.37
3	26740	8	#0	16QAM	21.85	16.5
3	26740	8	#Mid	16QAM	21.8	16.45
3	26740	8	#Max	16QAM	21.82	16.47
3	26740	15	#0	16QAM	21.79	16.44
3	26775	1	#0	QPSK	23.82	18.47
3	26775	1	#Mid	QPSK	23.76	18.41
3	26775	1	#Max	QPSK	23.7	18.35
3	26775	8	#0	QPSK	22.82	17.47
3	26775	8	#Mid	QPSK	22.8	17.45
3	26775	8	#Max	QPSK	22.8	17.45
3	26775	15	#0	QPSK	22.8	17.45
3	26775	1	#0	16QAM	23.13	17.78
3	26775	1	#Mid	16QAM	23.09	17.74
3	26775	1	#Max	16QAM	23.04	17.69
3	26775	8	#0	16QAM	21.85	16.5
3	26775	8	#Mid	16QAM	21.84	16.49
3	26775	8	#Max	16QAM	21.85	16.5
3	26775	15	#0	16QAM	21.82	16.47
5	26715	1	#0	QPSK	23.64	18.29
5	26715	1	#Mid	QPSK	23.79	18.44
5	26715	1	#Max	QPSK	23.66	18.31
5	26715	12	#0	QPSK	22.69	17.34
5	26715	12	#Mid	QPSK	22.7	17.35
5	26715	12	#Max	QPSK	22.77	17.42
5	26715	25	#0	QPSK	22.75	17.4
5	26715	1	#0	16QAM	22.91	17.56
5	26715	1	#Mid	16QAM	23.06	17.71
5	26715	1	#Max	16QAM	22.95	17.6
5	26715	12	#0	16QAM	21.73	16.38
5	26715	12	#Mid	16QAM	21.7	16.35
5	26715	12	#Max	16QAM	21.78	16.43
5	26715	25	#0	16QAM	21.8	16.45
5	26740	1	#0	QPSK	23.69	18.34
5	26740	1	#Mid	QPSK	23.85	18.5
5	26740	1	#Max	QPSK	23.76	18.41
5	26740	12	#0	QPSK	22.8	17.45
5	26740	12	#Mid	QPSK	22.73	17.38
5	26740	12	#Max	QPSK	22.82	17.47
5	26740	25	#0	QPSK	22.83	17.48
5	26740	1	#0	16QAM	22.99	17.64




5	26740	1	#Mid	16QAM	23.14	17.79
5	26740	1	#Max	16QAM	23.07	17.72
5	26740	12	#0	16QAM	21.78	16.43
5	26740	12	#Mid	16QAM	21.76	16.41
5	26740	12	#Max	16QAM	21.79	16.44
5	26740	25	#0	16QAM	21.85	16.50
5	26765	1	#0	QPSK	23.78	18.43
5	26765	1	#Mid	QPSK	23.91	18.56
5	26765	1	#Max	QPSK	23.76	18.41
5	26765	12	#0	QPSK	22.85	17.50
5	26765	12	#Mid	QPSK	22.77	17.42
5	26765	12	#Max	QPSK	22.84	17.49
5	26765	25	#0	QPSK	22.86	17.51
5	26765	1	#0	16QAM	22.94	17.59
5	26765	1	#Mid	16QAM	23.13	17.78
5	26765	1	#Max	16QAM	22.96	17.61
5	26765	12	#0	16QAM	21.79	16.44
5	26765	12	#Mid	16QAM	21.84	16.49
5	26765	12	#Max	16QAM	21.78	16.43
5	26765	25	#0	16QAM	21.85	16.50
10	26740	1	#0	QPSK	23.85	18.50
10	26740	1	#Mid	QPSK	24.01	18.66
10	26740	1	#Max	QPSK	23.87	18.52
10	26740	25	#0	QPSK	22.77	17.42
10	26740	25	#Mid	QPSK	22.79	17.44
10	26740	25	#Max	QPSK	22.87	17.52
10	26740	50	#0	QPSK	22.83	17.48
10	26740	1	#0	16QAM	22.67	17.32
10	26740	1	#Mid	16QAM	22.72	17.37
10	26740	1	#Max	16QAM	22.7	17.35
10	26740	25	#0	16QAM	21.8	16.45
10	26740	25	#Mid	16QAM	21.81	16.46
10	26740	25	#Max	16QAM	21.92	16.57
10	26740	50	#0	16QAM	21.85	16.50


6.2. Occupied Bandwidth

LTE Band 26						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	26697	814.7	1.098	1.272
			26740	819	1.089	1.269
			26783	823.3	1.095	1.292
		3	26705	815.5	2.685	2.910
			26740	819	2.689	2.928
			26775	822.5	2.683	2.927
		5	26715	816.5	4.515	4.948
			26740	819	4.505	4.897
			26765	821.5	4.512	4.905
		10	26740	819	8.975	9.652
	16QAM	1.4	26697	814.7	1.093	1.290
			26740	819	1.096	1.300
			26783	823.3	1.096	1.272
		3	26705	815.5	2.680	2.912
			26740	819	2.691	2.936
			26775	822.5	2.681	2.898
		5	26715	816.5	4.517	4.938
			26740	819	4.503	5.553
			26765	821.5	4.499	4.949
		10	26740	819	8.973	9.679

LTE Band 26 QPSK 1.4MHz CH Low

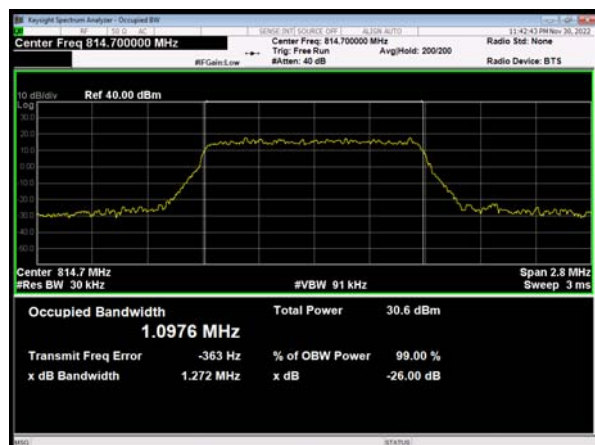


LTE Band 26 QPSK 3MHz CH Low

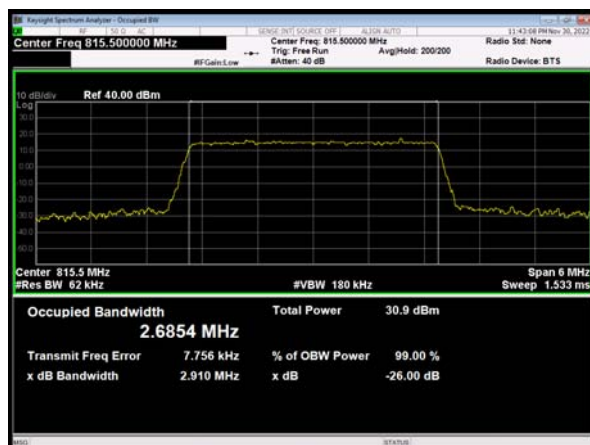


LTE Band 26 QPSK 1.4MHz CH Middle




LTE Band 26 QPSK 3MHz CH Middle

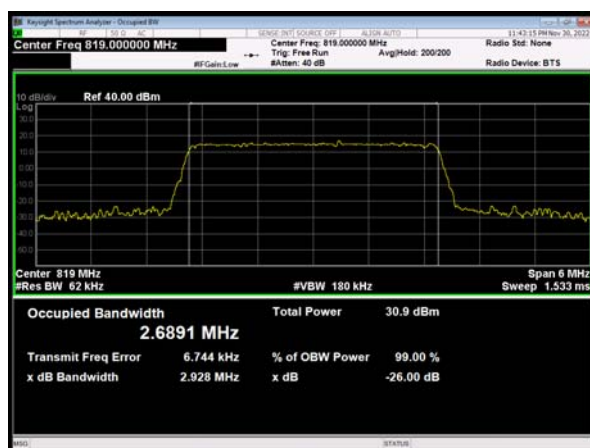

LTE Band 26 QPSK 1.4MHz CH High

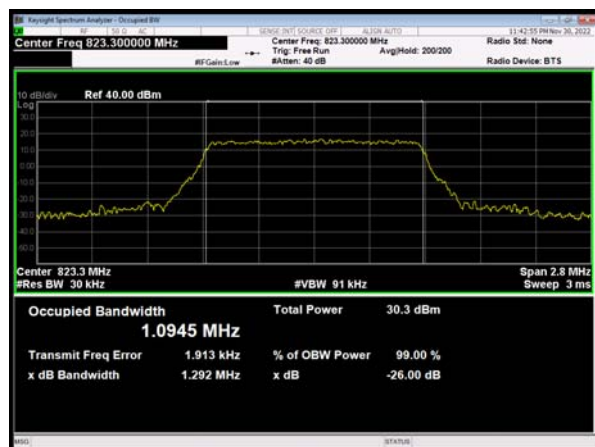


LTE Band 26 QPSK 3MHz CH High

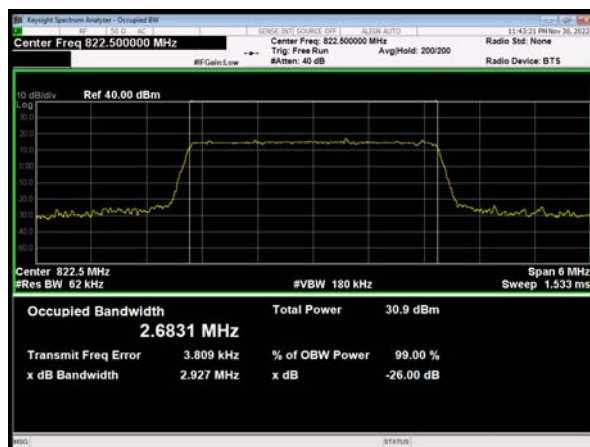





LTE Band 26 QPSK 5MHz CH Low

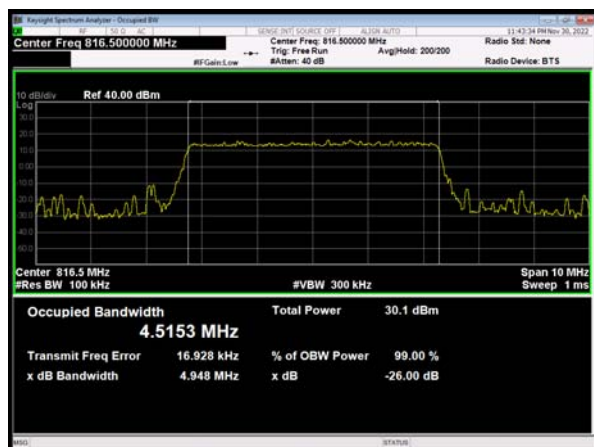


LTE Band 26 QPSK 5MHz CH Middle

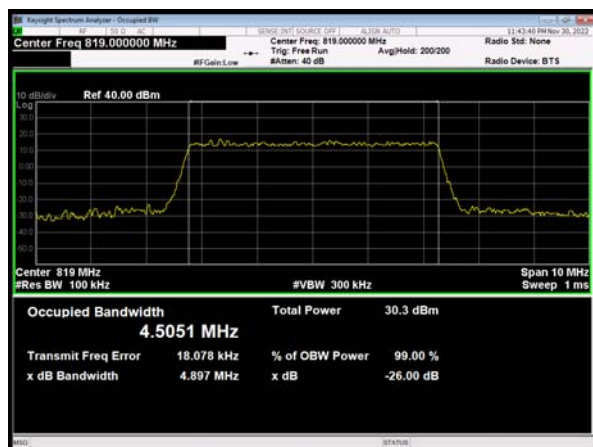


LTE Band 26 QPSK 5MHz CH High

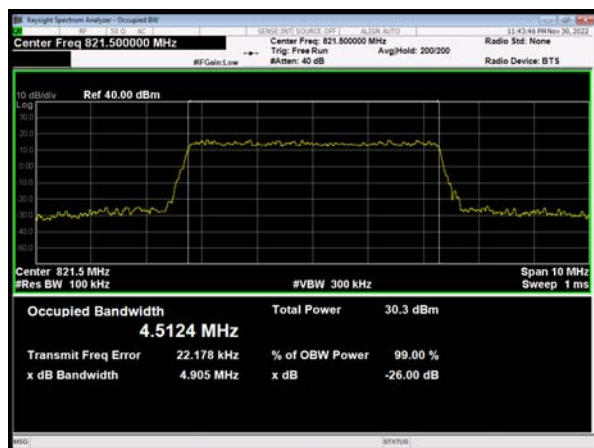


LTE Band 26 QPSK 10MHz CH Middle

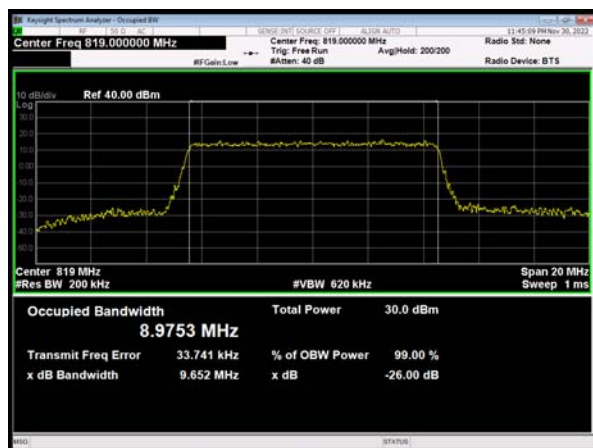


LTE Band 26 16QAM 1.4MHz CH Low

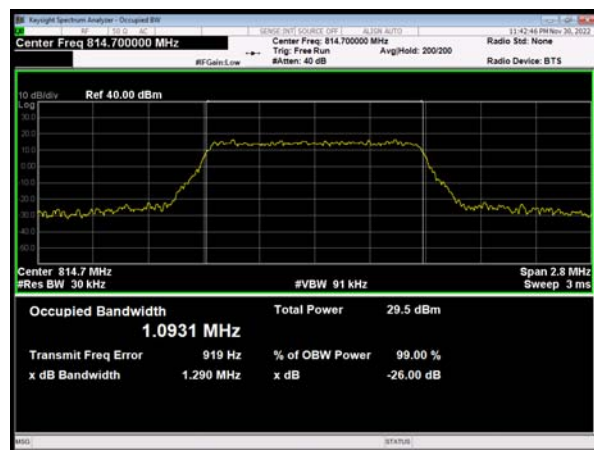


LTE Band 26 16QAM 3MHz CH Low

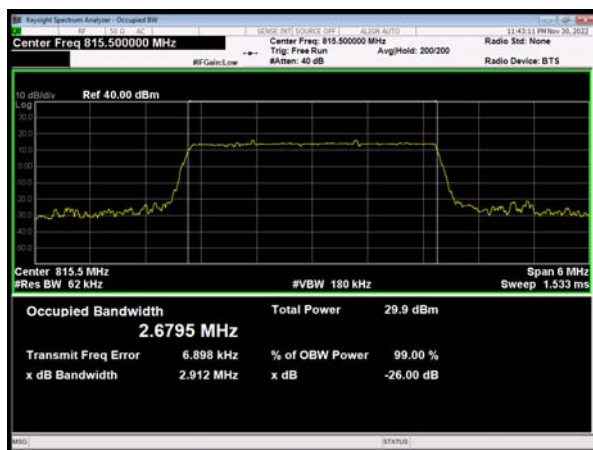


LTE Band 26 16QAM 1.4MHz CH Middle

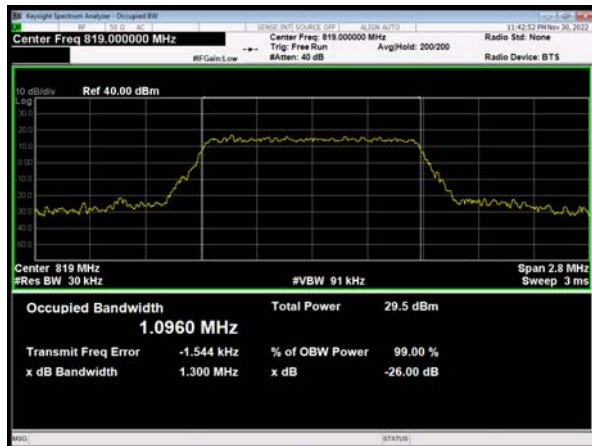


LTE Band 26 16QAM 3MHz CH Middle

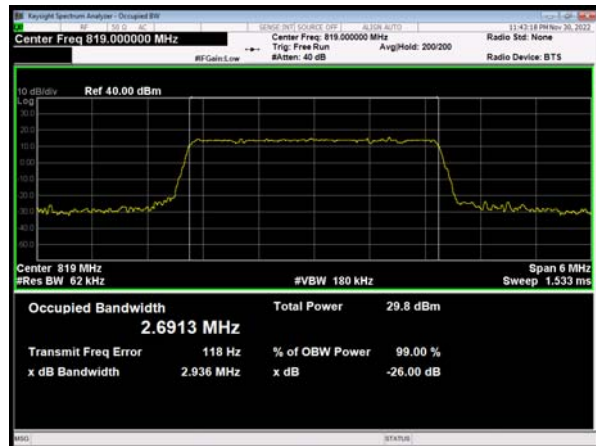


LTE Band 26 16QAM 1.4MHz CH High

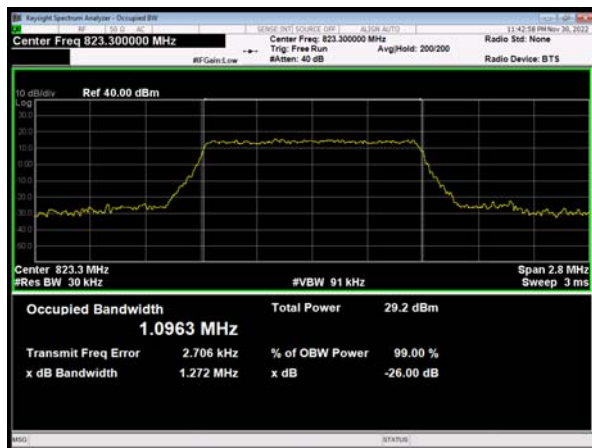


LTE Band 26 16QAM 3MHz CH High

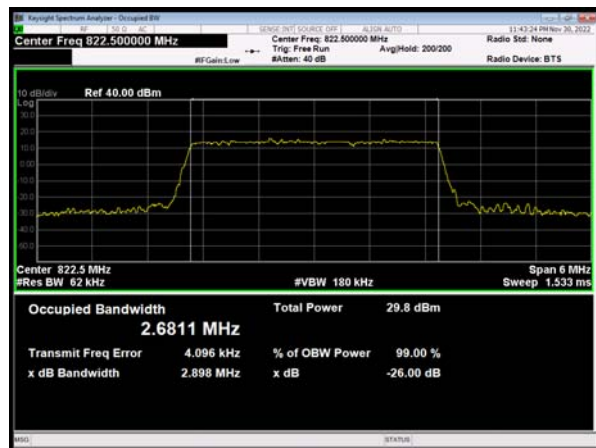


LTE Band 26 16QAM 5MHz CH Low

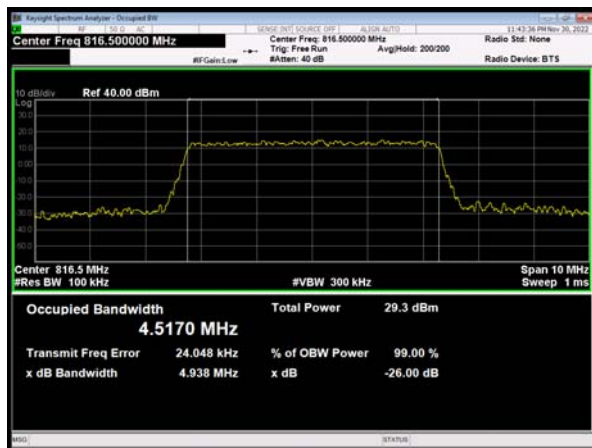


LTE Band 26 16QAM 5MHz CH Middle

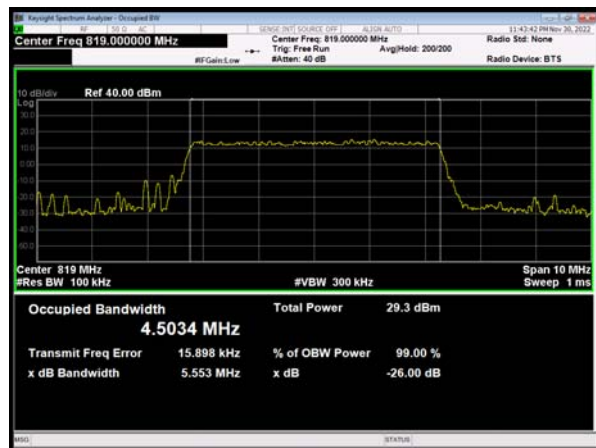

LTE Band 26 16QAM 5MHz CH High

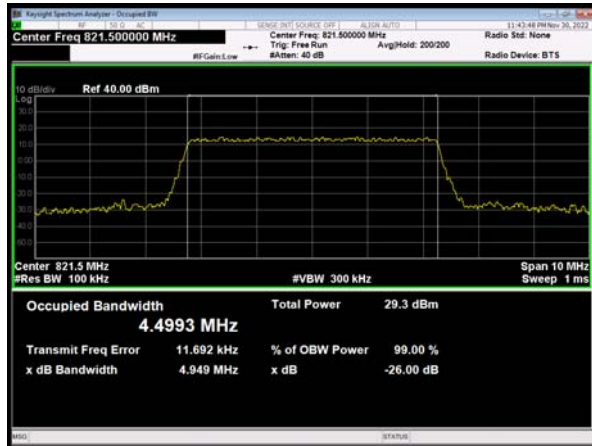


LTE Band 26 16QAM 10MHz CH Middle

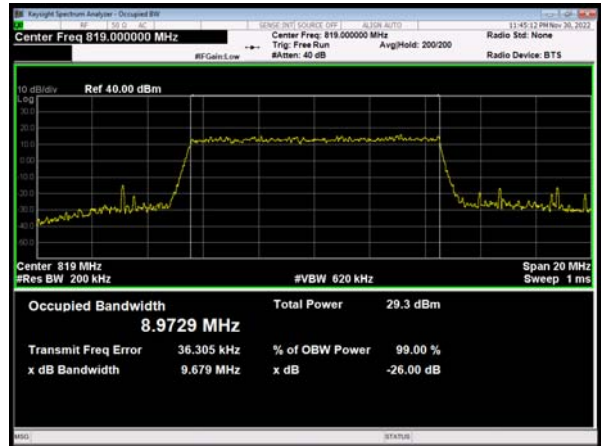


6.3. Emission Mask


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

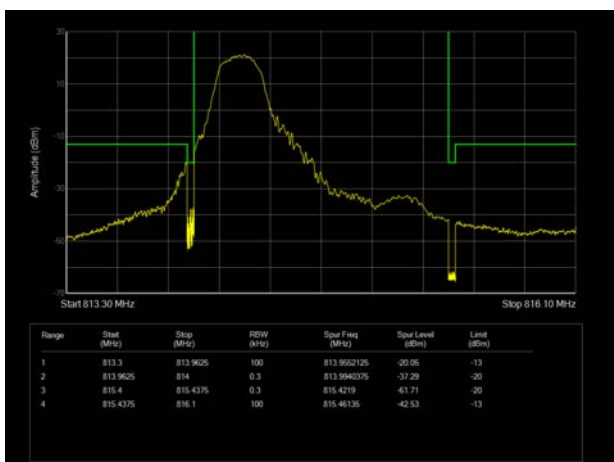


LTE Band 26 QPSK 1.4MHz CH-High 1RB

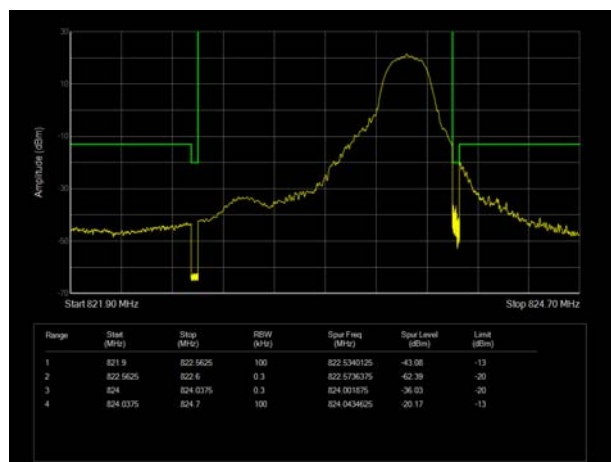


LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

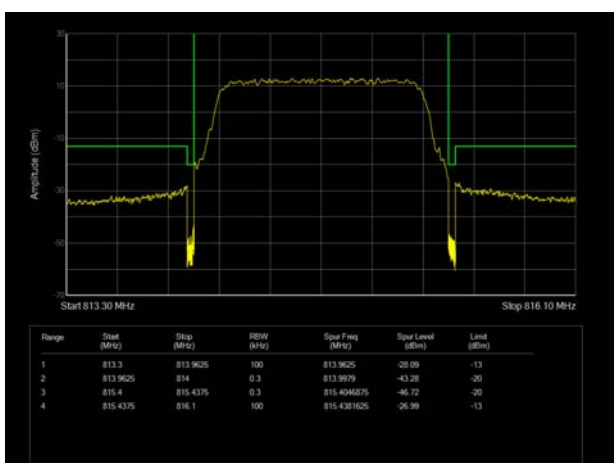


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

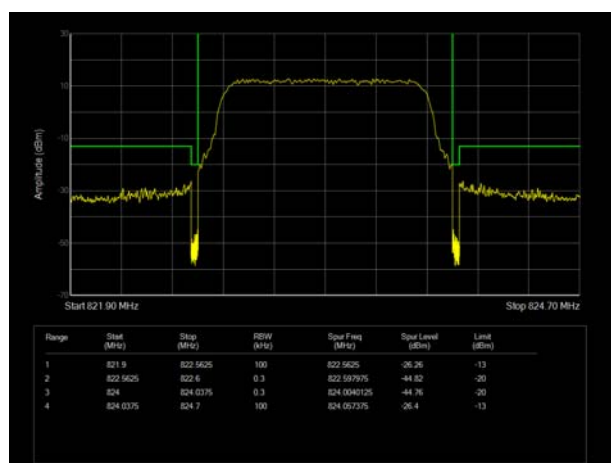


LTE Band 26 QPSK 3MHz CH-Low 1RB

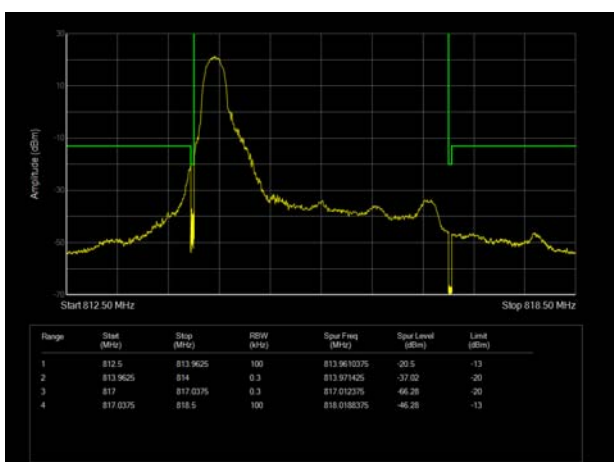


LTE Band 26 QPSK 3MHz CH-High 1RB

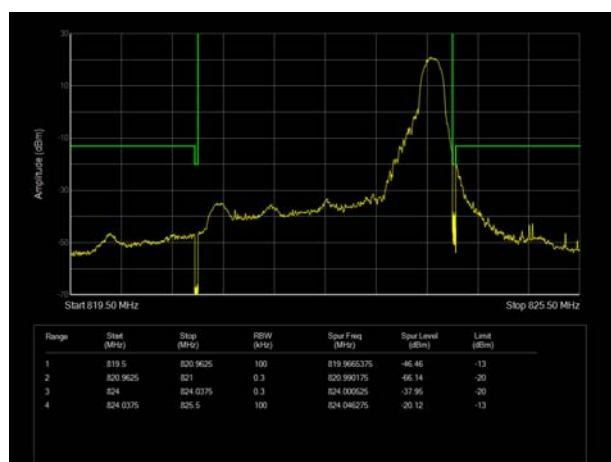


LTE Band 26 QPSK 3MHz CH-Low 100%RB

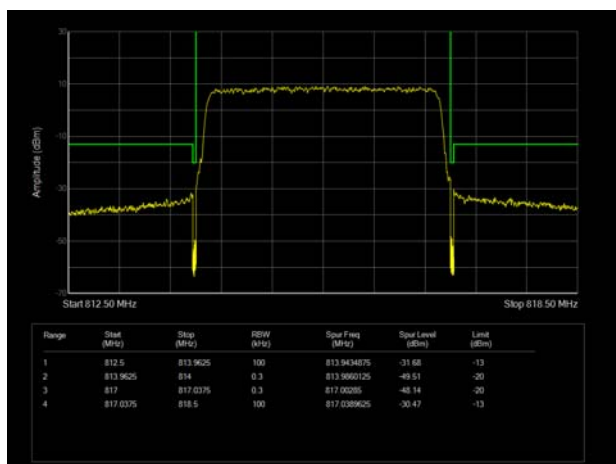


LTE Band 26 QPSK 3MHz CH-High 100%RB

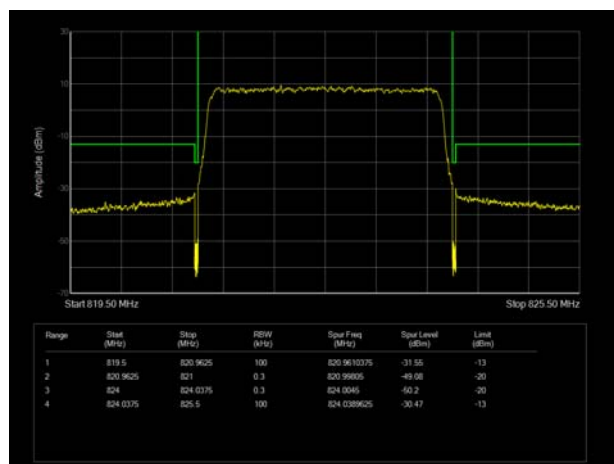


LTE Band 26 QPSK 5MHz CH-Low 1RB

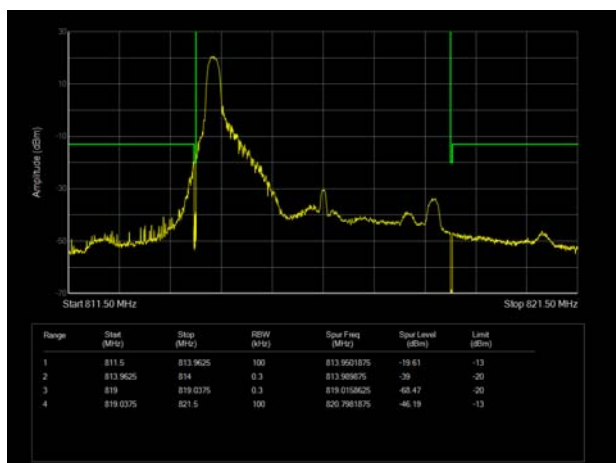


LTE Band 26 QPSK 5MHz CH-High 1RB

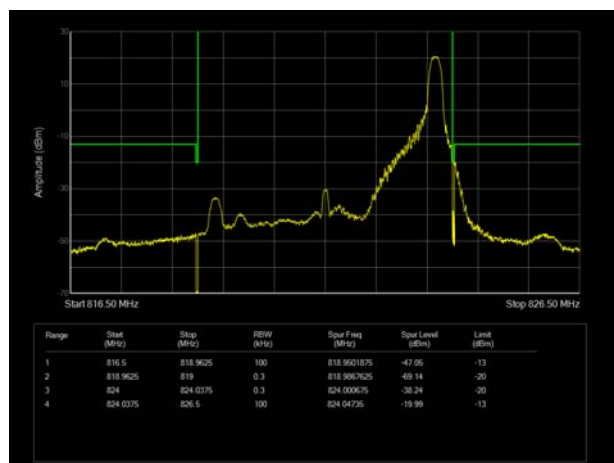


LTE Band 26 QPSK 5MHz CH-Low 100%RB

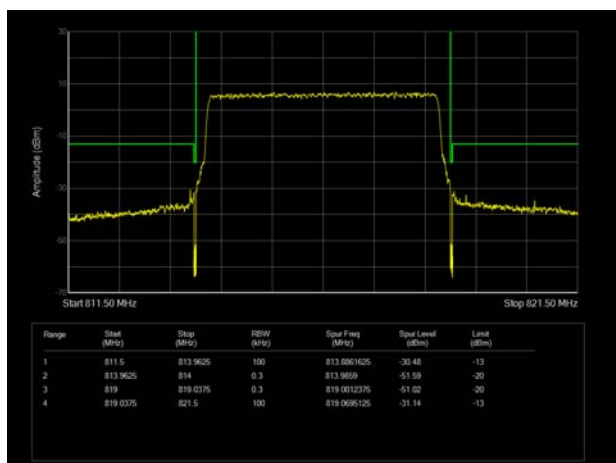


LTE Band 26 QPSK 5MHz CH-High 100%RB

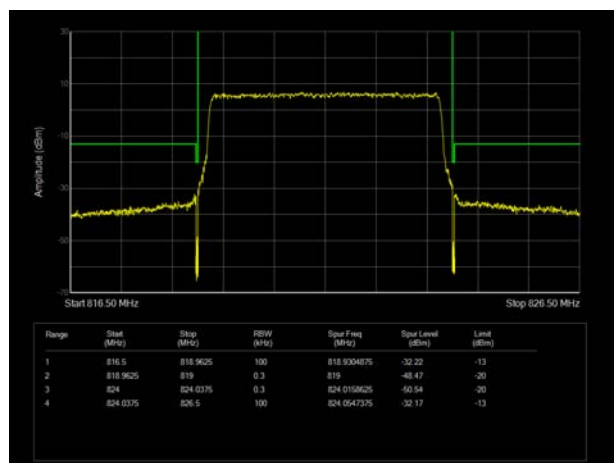


LTE Band 26 QPSK 10MHz CH-Low 1RB

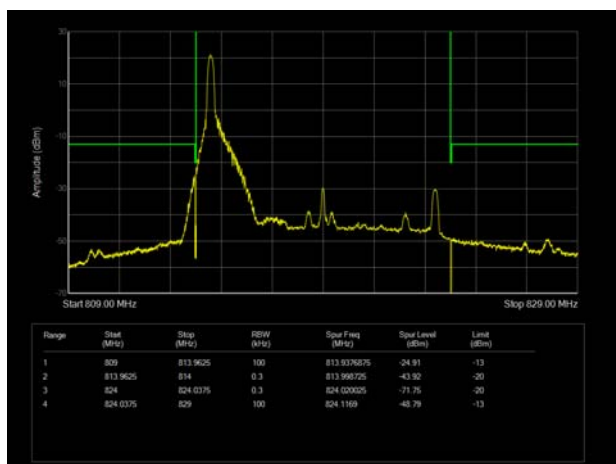


LTE Band 26 QPSK 10MHz CH-High 1RB

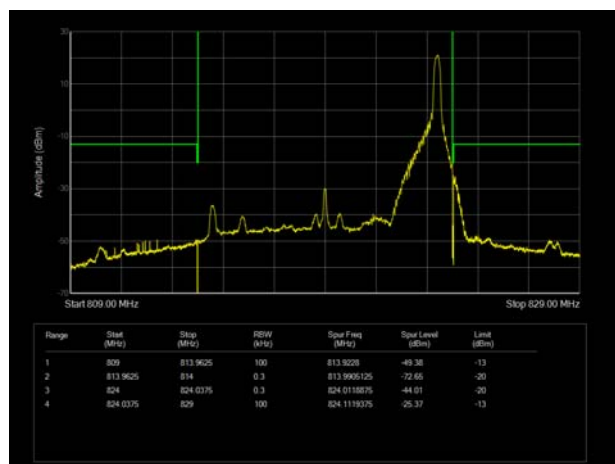


LTE Band 26 QPSK 10MHz CH-Low 100%RB

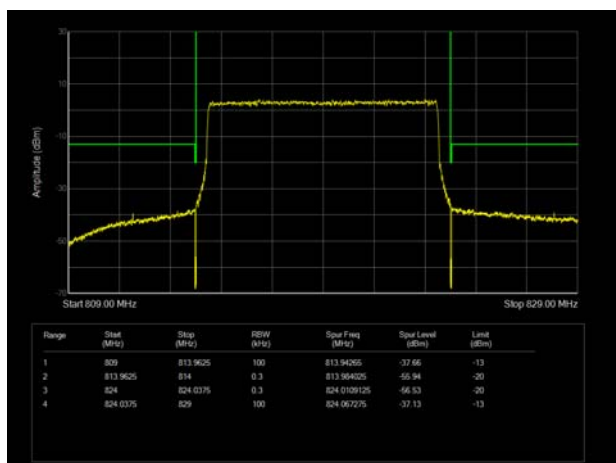


LTE Band 26 QPSK 10MHz CH-High 100%RB

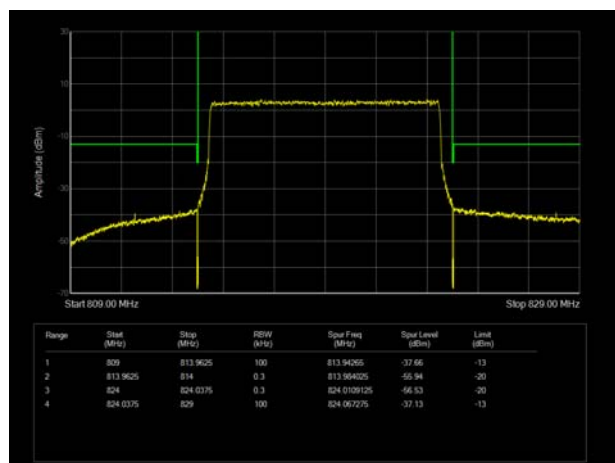


LTE Band 26 16QAM 1.4MHz CH-Low 1RB

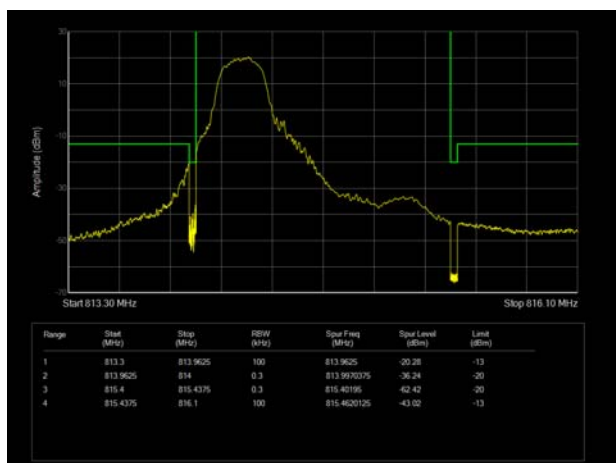


LTE Band 26 16QAM 1.4MHz CH-High 1RB

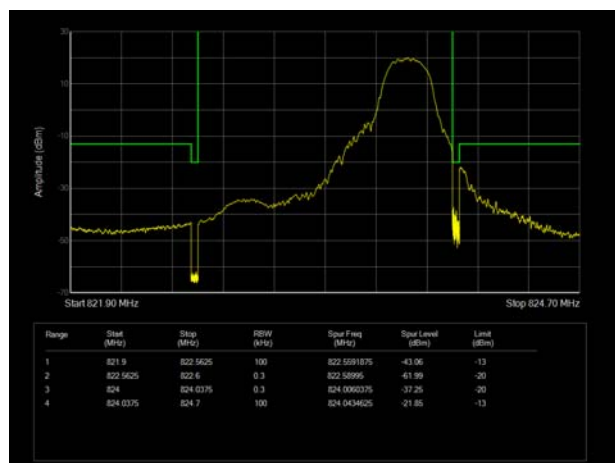


LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

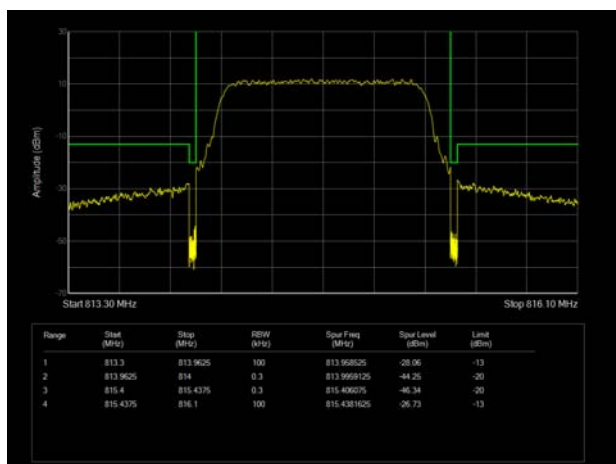


LTE Band 26 16QAM 1.4MHz CH-High 100%RB

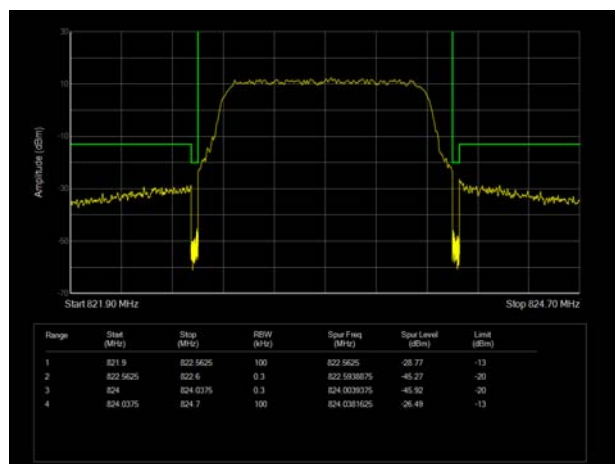


LTE Band 26 16QAM 3MHz CH-Low 1RB

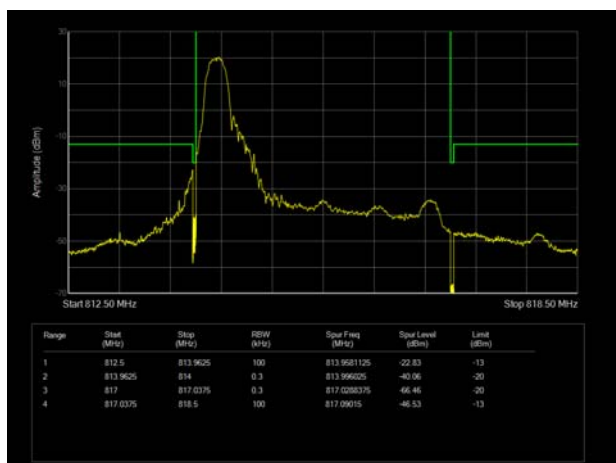


LTE Band 26 16QAM 3MHz CH-High 1RB

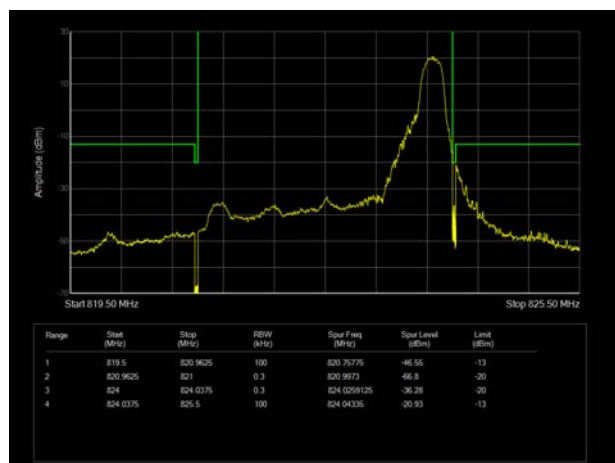


LTE Band 26 16QAM 3MHz CH-Low 100%RB

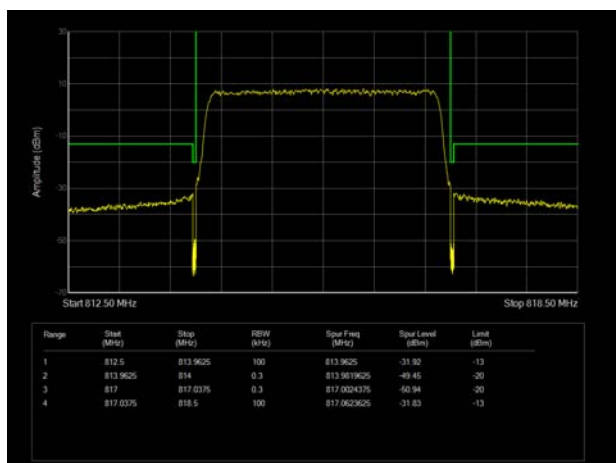


LTE Band 26 16QAM 3MHz CH-High 100%RB

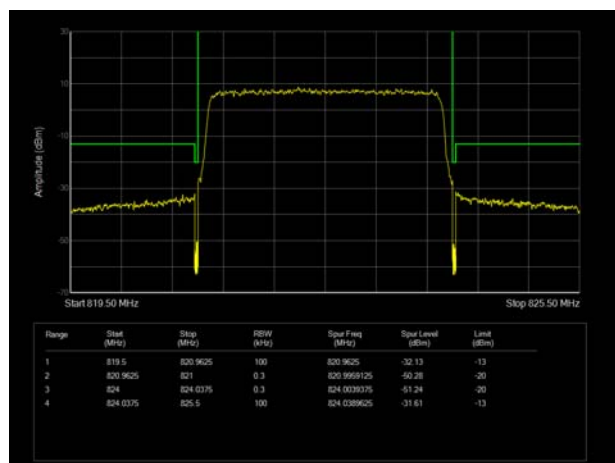


LTE Band 26 16QAM 5MHz CH-Low 1RB

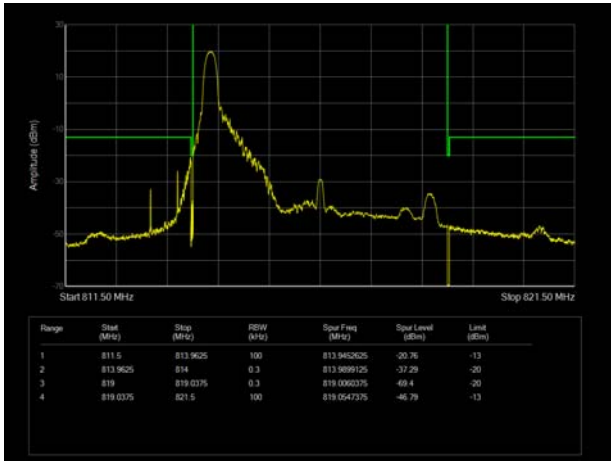


LTE Band 26 16QAM 5MHz CH-High 1RB

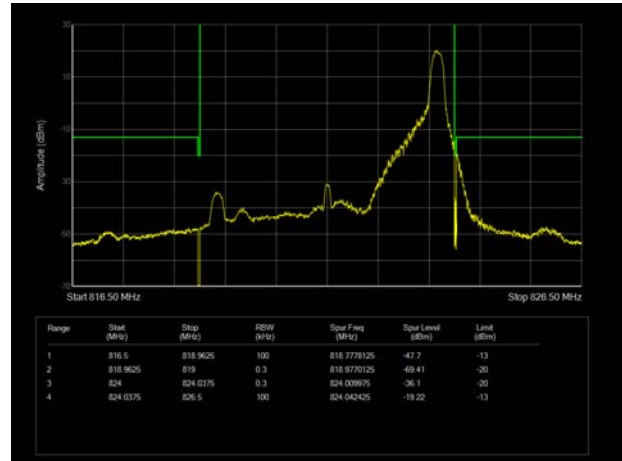


LTE Band 26 16QAM 5MHz CH-Low 100%RB

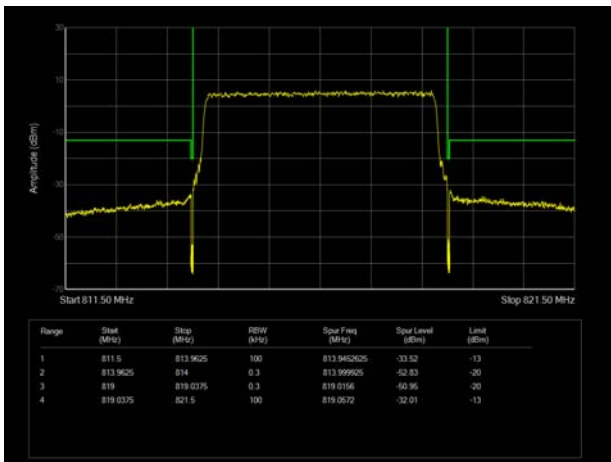


LTE Band 26 16QAM 5MHz CH-High 100%RB

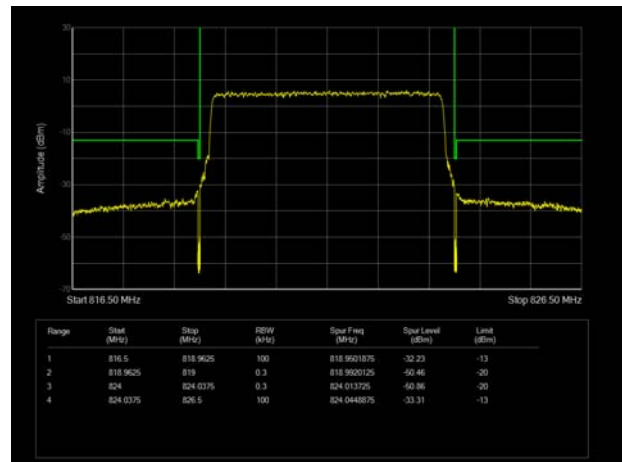


LTE Band 26 16QAM 10MHz CH-Low 1RB

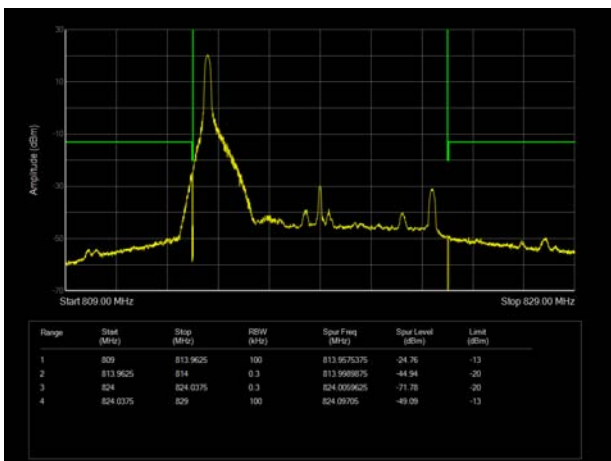


LTE Band 26 16QAM 10MHz CH-High 1RB

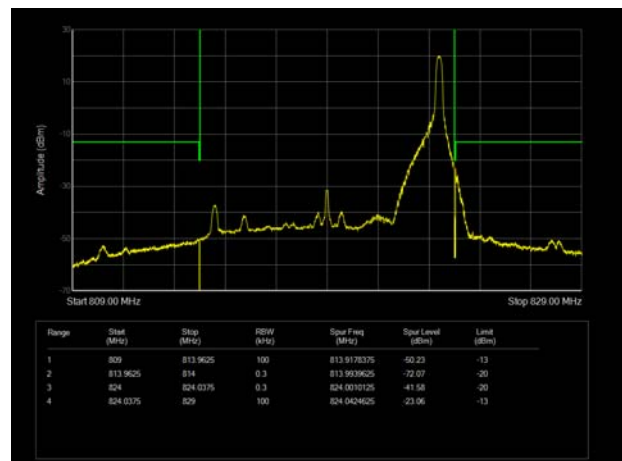

LTE Band 26 16QAM 10MHz CH-Low 100%RB

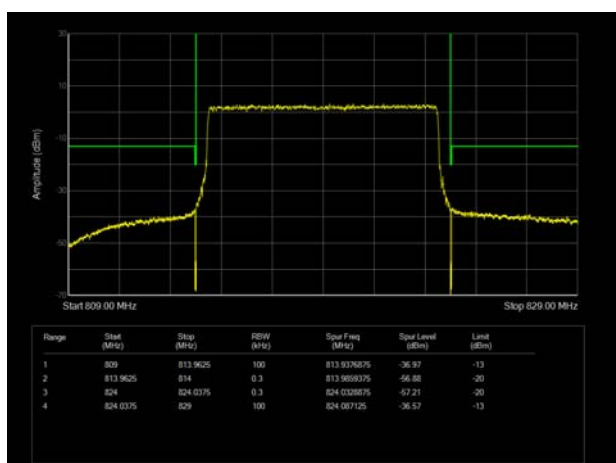

LTE Band 26 16QAM 10MHz CH-High 100%RB

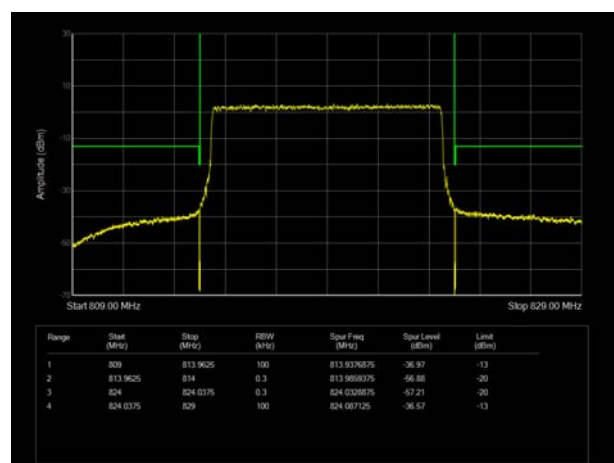

6.4. Peak-to-Average Power Ratio (PAPR)

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
1.4 MHz (QPSK)	26697	814.7	27.57	22.38	5.19	13	PASS
	26740	819	27.56	22.37	5.19	13	PASS
	26783	823.3	27.58	22.35	5.23	13	PASS
3 MHz (QPSK)	26697	814.7	27.55	22.30	5.25	13	PASS
	26740	819	27.65	22.29	5.36	13	PASS
	26783	823.3	27.62	22.29	5.33	13	PASS
5 MHz (QPSK)	26697	814.7	27.63	22.29	5.34	13	PASS
	26740	819	27.76	22.35	5.41	13	PASS
	26783	823.3	27.74	22.31	5.43	13	PASS
10 MHz (QPSK)	26740	819	27.82	22.34	5.48	13	PASS
1.4 MHz (16QAM)	26697	814.7	27.32	21.34	5.98	13	PASS
	26740	819	27.31	21.40	5.91	13	PASS
	26783	823.3	27.48	21.40	6.08	13	PASS
3 MHz (16QAM)	26697	814.7	27.43	21.33	6.10	13	PASS
	26740	819	27.48	21.30	6.18	13	PASS
	26783	823.3	27.50	21.28	6.22	13	PASS
5 MHz (16QAM)	26697	814.7	27.45	21.33	6.12	13	PASS
	26740	819	27.51	21.37	6.14	13	PASS
	26783	823.3	27.51	21.33	6.18	13	PASS
10 MHz (16QAM)	26740	819	27.56	21.34	6.22	13	PASS



6.5. Frequency Stability

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	3.05	5.25	0.00373	0.00641	PASS
Extreme (50℃)		16.61	9.63	0.02028	0.01176	PASS
Extreme (40℃)		6.15	6.84	0.00751	0.00836	PASS
Extreme (30℃)		12.14	8.90	0.01482	0.01086	PASS
Extreme (20℃)		17.99	3.15	0.02196	0.00385	PASS
Extreme (10℃)		9.76	5.03	0.01192	0.00614	PASS
Extreme (0℃)		13.10	9.51	0.01599	0.01161	PASS
Extreme (-10℃)		7.23	10.13	0.00883	0.01237	PASS
Extreme (-20℃)		3.30	12.61	0.00403	0.01539	PASS
Extreme (-30℃)		4.16	3.53	0.00508	0.00432	PASS
25℃	LV	10.96	8.77	0.01338	0.01070	PASS
	HV	8.97	6.34	0.01095	0.00774	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.96	10.54	0.01216	0.01287	PASS
Extreme (50℃)		6.62	4.44	0.00808	0.00542	PASS
Extreme (40℃)		12.99	13.79	0.01586	0.01684	PASS
Extreme (30℃)		12.83	3.84	0.01567	0.00469	PASS
Extreme (20℃)		2.90	17.63	0.00354	0.02152	PASS
Extreme (10℃)		12.32	11.16	0.01504	0.01363	PASS
Extreme (0℃)		14.99	3.69	0.01831	0.00451	PASS
Extreme (-10℃)		1.62	3.89	0.00198	0.00475	PASS
Extreme (-20℃)		4.52	16.02	0.00552	0.01956	PASS
Extreme (-30℃)		13.46	7.63	0.01643	0.00931	PASS
25℃	LV	12.90	13.92	0.01574	0.01700	PASS
	HV	13.54	4.43	0.01654	0.00541	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	11.14	16.74	0.01361	0.02044	PASS
Extreme (50℃)		2.33	3.43	0.00284	0.00419	PASS
Extreme (40℃)		1.59	1.33	0.00194	0.00162	PASS




Extreme (30℃)		10.15	17.21	0.01239	0.02101	PASS
Extreme (20℃)		4.68	2.61	0.00571	0.00319	PASS
Extreme (10℃)		2.32	9.83	0.00284	0.01200	PASS
Extreme (0℃)		2.32	5.44	0.00284	0.00665	PASS
Extreme (-10℃)		8.24	4.62	0.01006	0.00565	PASS
Extreme (-20℃)		17.53	10.47	0.02141	0.01278	PASS
Extreme (-30℃)		10.54	7.54	0.01287	0.00921	PASS
25℃	LV	1.88	13.89	0.00229	0.01696	PASS
	HV	17.69	8.07	0.02160	0.00986	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	15.16	14.57	0.01852	0.01779	PASS
Extreme (50℃)		11.85	9.70	0.01447	0.01184	PASS
Extreme (40℃)		1.12	7.11	0.00137	0.00868	PASS
Extreme (30℃)		3.92	9.73	0.00479	0.01188	PASS
Extreme (20℃)		11.61	3.00	0.01418	0.00366	PASS
Extreme (10℃)		5.95	2.44	0.00727	0.00298	PASS
Extreme (0℃)		2.54	2.97	0.00310	0.00363	PASS
Extreme (-10℃)		8.48	9.73	0.01035	0.01188	PASS
Extreme (-20℃)		8.99	7.41	0.01097	0.00904	PASS
Extreme (-30℃)		6.05	13.90	0.00738	0.01697	PASS
25℃	LV	16.30	6.17	0.01990	0.00754	PASS
	HV	6.62	12.66	0.00808	0.01546	PASS


6.6. Spurious Emissions at Antenna Terminals

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier.


LTE Band 26 1.4MHz CH Low 9KHz~10GHz

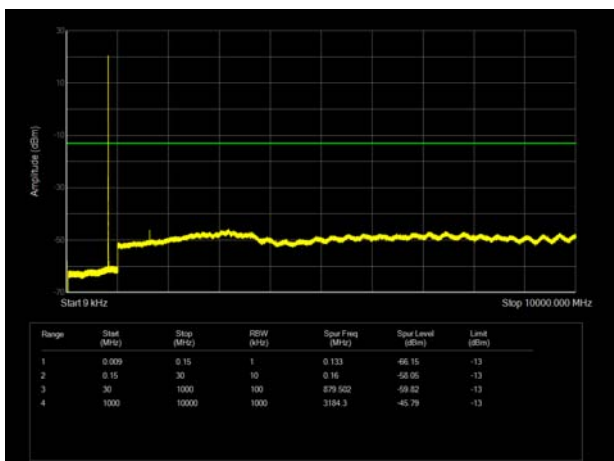


LTE Band 26 3MHz CH Low 9KHz~10GHz

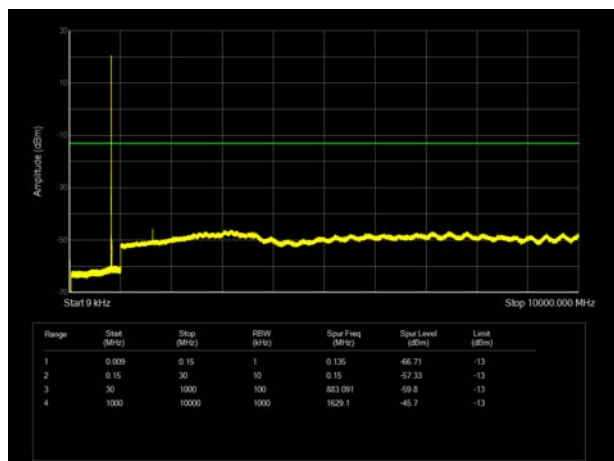


LTE Band 26 1.4MHz CH Middle 9KHz~10GHz

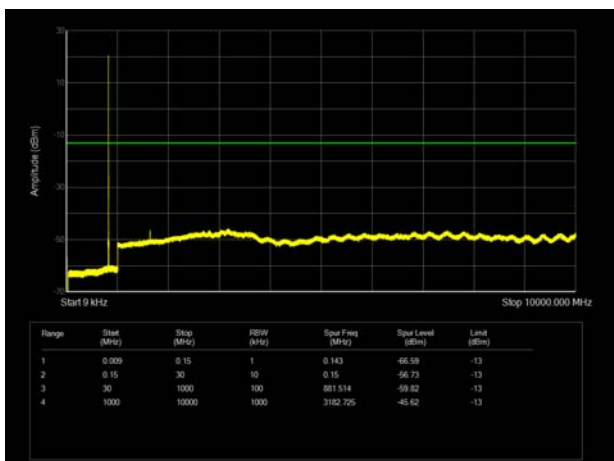


LTE Band 26 3MHz CH Middle 9KHz~10GHz

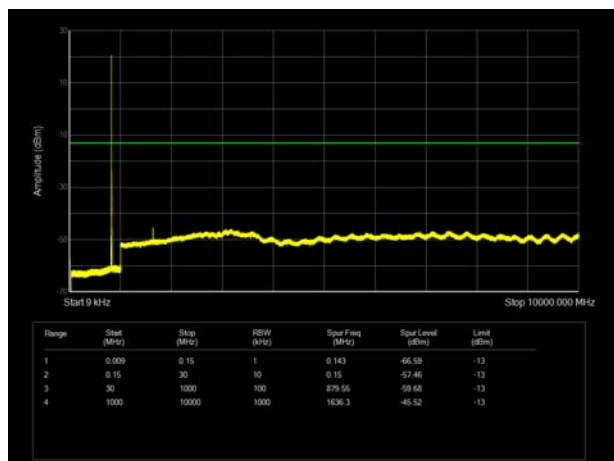


LTE Band 26 1.4MHz CH High 9KHz~10GHz

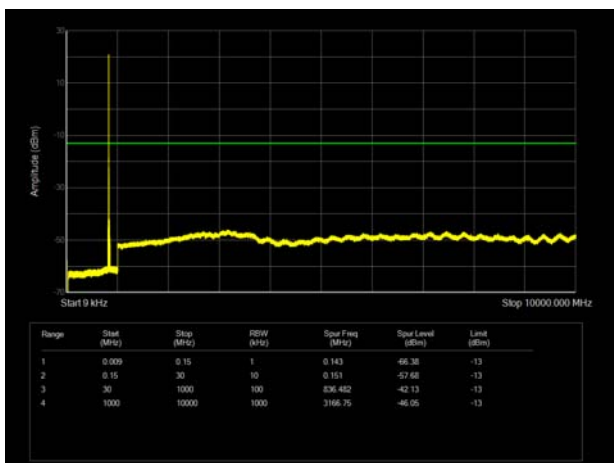


LTE Band 26 3MHz CH High 9KHz~10GHz

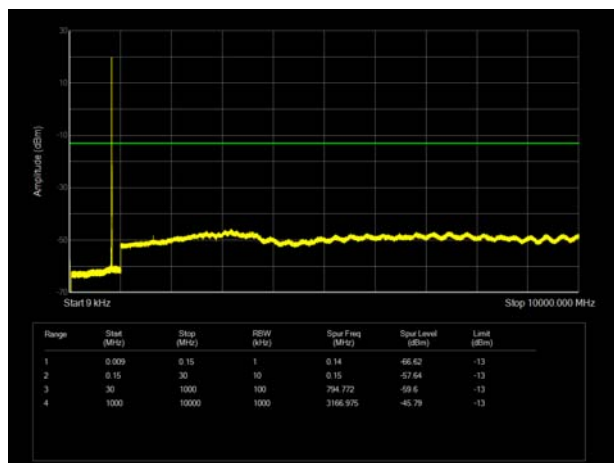


LTE Band 26 5MHz CH Low 9KHz~10GHz

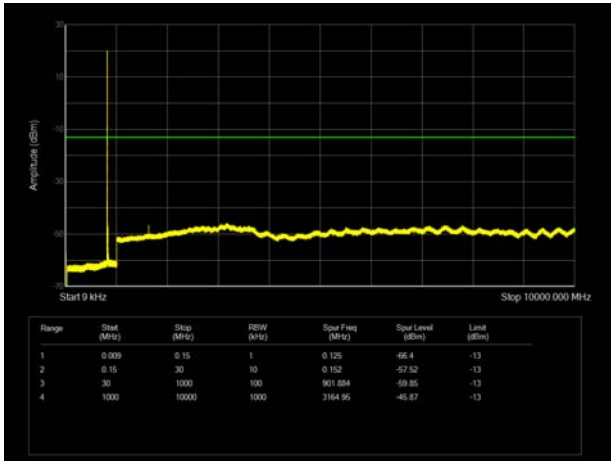


LTE Band 26 5MHz CH Middle 9KHz~10GHz

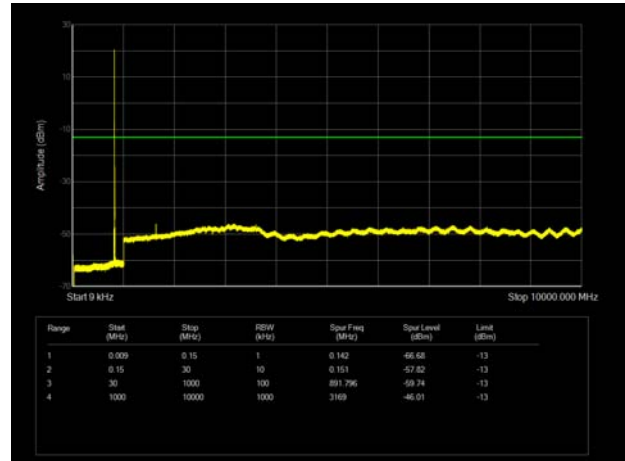

LTE Band 26 5MHz CH High 9KHz~10GHz

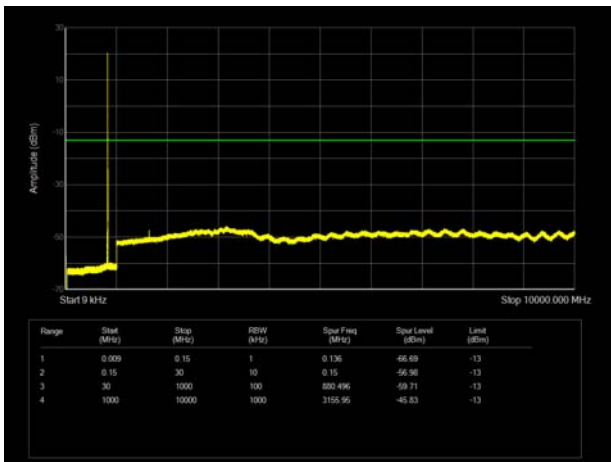

LTE Band 26 10MHz CH Middle 9KHz~10GHz

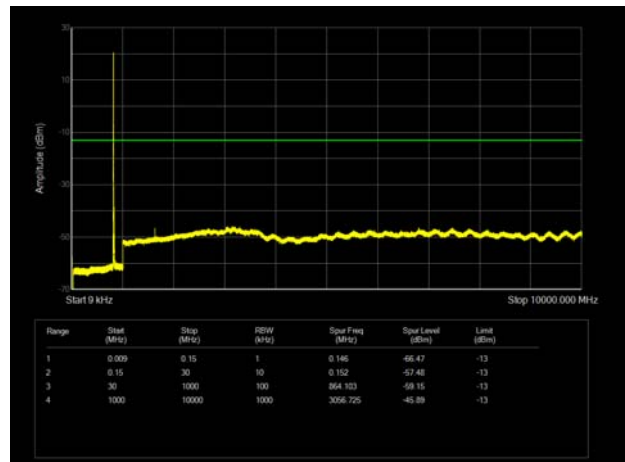



6.7. Radiated Spurious Emission

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Low Antenna

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1636.60	-51.92	1.70	8.70	Horizontal	-47.07	-13.00	34.07	0
3	2454.90	-59.00	2.30	12.00	Horizontal	-51.45	-13.00	38.45	219
4	3273.20	-66.45	2.20	13.10	Horizontal	-57.70	-13.00	44.70	0
5	4091.50	-63.10	3.00	12.50	Horizontal	-55.75	-13.00	42.75	259
6	4909.80	-61.88	3.10	12.50	Horizontal	-54.63	-13.00	41.63	250
7	5728.10	-61.37	3.40	12.50	Horizontal	-54.42	-13.00	41.42	232
8	6546.40	-59.87	3.80	11.50	Horizontal	-54.32	-13.00	41.32	165
9	7364.70	-55.99	4.20	12.20	Horizontal	-50.14	-13.00	37.14	119
10	8183.00	-55.03	4.30	12.30	Horizontal	-49.18	-13.00	36.18	200

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1633.00	-52.54	1.70	8.70	Horizontal	-47.69	-13.00	34.69	186
3	2449.50	-59.61	2.30	12.00	Horizontal	-52.06	-13.00	39.06	49
4	3266.00	-66.92	2.20	13.10	Horizontal	-58.17	-13.00	45.17	109
5	4082.50	-63.01	3.00	12.50	Horizontal	-55.66	-13.00	42.66	315
6	4899.00	-62.77	3.10	12.50	Horizontal	-55.52	-13.00	42.52	297
7	5715.50	-61.28	3.40	12.50	Horizontal	-54.33	-13.00	41.33	235
8	6532.00	-60.48	3.80	11.50	Horizontal	-54.93	-13.00	41.93	101
9	7348.50	-56.87	4.20	12.20	Horizontal	-51.02	-13.00	38.02	109
10	8165.00	-54.27	4.30	12.30	Horizontal	-48.42	-13.00	35.42	78

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1628.00	-54.12	1.70	8.70	Horizontal	-49.27	-13.00	36.27	0
3	2442.00	-58.41	2.30	12.00	Horizontal	-50.86	-13.00	37.86	217
4	3256.00	-66.82	2.20	13.10	Horizontal	-58.07	-13.00	45.07	77
5	4070.00	-62.91	3.00	12.50	Horizontal	-55.56	-13.00	42.56	168
6	4884.00	-62.61	3.10	12.50	Horizontal	-55.36	-13.00	42.36	195
7	5698.00	-61.80	3.40	12.50	Horizontal	-54.85	-13.00	41.85	159
8	6512.00	-60.78	3.80	11.50	Horizontal	-55.23	-13.00	42.23	313
9	7326.00	-56.98	4.20	12.20	Horizontal	-51.13	-13.00	38.13	122
10	8140.00	-53.80	4.30	12.30	Horizontal	-47.95	-13.00	34.95	49

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

**Upper Antenna**

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1636.60	-55.64	1.70	8.70	Horizontal	-50.79	-13.00	37.79	34
3	2454.90	-58.76	2.30	12.00	Horizontal	-51.21	-13.00	38.21	167
4	3273.20	-67.40	2.20	13.10	Horizontal	-58.65	-13.00	45.65	294
5	4091.50	-63.00	3.00	12.50	Horizontal	-55.65	-13.00	42.65	90
6	4909.80	-62.62	3.10	12.50	Horizontal	-55.37	-13.00	42.37	225
7	5728.10	-60.78	3.40	12.50	Horizontal	-53.83	-13.00	40.83	308
8	6546.40	-60.19	3.80	11.50	Horizontal	-54.64	-13.00	41.64	294
9	7364.70	-54.94	4.20	12.20	Horizontal	-49.09	-13.00	36.09	58
10	8183.00	-55.78	4.30	12.30	Horizontal	-49.93	-13.00	36.93	149

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1633.00	-54.54	1.70	8.70	Horizontal	-49.69	-13.00	36.69	61
3	2449.50	-57.74	2.30	12.00	Horizontal	-50.19	-13.00	37.19	208
4	3266.00	-66.84	2.20	13.10	Horizontal	-58.09	-13.00	45.09	18
5	4082.50	-62.72	3.00	12.50	Horizontal	-55.37	-13.00	42.37	79
6	4899.00	-62.41	3.10	12.50	Horizontal	-55.16	-13.00	42.16	270
7	5715.50	-61.72	3.40	12.50	Horizontal	-54.77	-13.00	41.77	147
8	6532.00	-60.39	3.80	11.50	Horizontal	-54.84	-13.00	41.84	203
9	7348.50	-57.02	4.20	12.20	Horizontal	-51.17	-13.00	38.17	98
10	8165.00	-55.07	4.30	12.30	Horizontal	-49.22	-13.00	36.22	47

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1628.00	-55.61	1.70	8.70	Horizontal	-50.76	-13.00	37.76	161
3	2442.00	-55.49	2.30	12.00	Horizontal	-47.94	-13.00	34.94	228
4	3256.00	-66.94	2.20	13.10	Horizontal	-58.19	-13.00	45.19	123
5	4070.00	-62.79	3.00	12.50	Horizontal	-55.44	-13.00	42.44	84
6	4884.00	-62.79	3.10	12.50	Horizontal	-55.54	-13.00	42.54	65
7	5698.00	-61.87	3.40	12.50	Horizontal	-54.92	-13.00	41.92	252
8	6512.00	-59.65	3.80	11.50	Horizontal	-54.10	-13.00	41.10	313
9	7326.00	-57.37	4.20	12.20	Horizontal	-51.52	-13.00	38.52	8
10	8140.00	-54.14	4.30	12.30	Horizontal	-48.29	-13.00	35.29	43

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Climatic Chamber	ESPEC	SU-242	93000506	2021-12-12	2022-12-11
Wireless Communication Tester	R&S	CMW500	150415	2022-05-14	2023-05-13
Spectrum Analyzer	Keysight	N9020A	MY50510203	2021-12-12	2022-12-11
Wireless communication tester	Agilent	E5515C	GB44400275	2021-12-12	2022-12-11
Spectrum Analyzer	R&S	FSV30	104028	2021-12-12	2022-12-11
Loop antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	1023	2020-05-05	2023-05-04
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2023-12-16
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.



ANNEX C: Product Change Description (Variant 2)

The Product Change Description are submitted separately.