



# EMC TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-ZTE7540NMX  
**Product** 5G NR Multi model smart phone  
**Model** ZTE 7540N  
**Report No.** R2206A0499-E1  
**Issue Date** July 18, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2021)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Liu Wei*

Prepared by: Liu Wei

*Fan Guangchang*

Approved by: Fan Guangchang

**TA Technology (Shanghai) Co., Ltd.**

Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment under Test.....	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
2.3	Applied Standards.....	8
2.4	Test Mode.....	9
3	Test Case Results .....	10
3.1	Radiated Emission .....	10
3.2	Conducted Emission .....	15
4	Main Test Instruments .....	18
	ANNEX A: The EUT Appearance.....	19
	ANNEX B: Test Setup Photos.....	20



### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: June 16, 2022 ~ July 1, 2022			
Date of Sample Received: June 10, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2 Test facility

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

## 1.3 Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Fan Guangchang
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	<a href="http://www.ta-shanghai.com">http://www.ta-shanghai.com</a>
E-mail:	<a href="mailto:fanguangchang@ta-shanghai.com">fanguangchang@ta-shanghai.com</a>

## 2 General Description of Equipment under Test

### 2.1 Applicant and Manufacturer Information

<b>Applicant</b>	ZTE Corporation
<b>Applicant address</b>	ZTE Plaza, #55 Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China
<b>Manufacturer</b>	ZTE Corporation
<b>Manufacturer address</b>	ZTE Plaza, #55 Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, China

### 2.2 General information

EUT Description			
Device Type	Portable Device		
Model	ZTE 7540N		
IMEI	860703060002951		
HW Version	zs9A		
SW Version	MyOS11.0.0_7540N_TEL		
Power Rating	DC 3.87V from battery or DC 5V from Adapter.		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
	LTE Band 17	704 ~ 716	734 ~ 746
	LTE Band 26	814 ~ 849	859 ~ 894
	LTE Band 28 Subset 1	703 ~ 716	758 ~ 771



	LTE Band 28 Subset 2	728 ~ 746	783 ~ 801
	LTE Band 38	2570 ~ 2620	2570 ~ 2620
	LTE Band 40 Subset 1	2305 ~ 2315	2305 ~ 2315
	LTE Band 40 Subset 2	2350 ~ 2360	2350 ~ 2360
	LTE Band 66	1710 ~ 1780	2110 ~ 2180
	NR n2	1850 ~ 1910	1930 ~ 1990
	NR n7	2500 ~ 2570	2620 ~ 2690
	NR n28 Subset 1	703 ~ 716	758 ~ 771
	NR n28 Subset 2	728 ~ 746	783 ~ 801
	NR n40 Subset 1	2305 ~ 2315	2305 ~ 2315
	NR n40 Subset 2	2350 ~ 2360	2350 ~ 2360
	NR n66	1710~1780	2110 ~ 2180
	NR n78 Subset 1	3450 ~ 3550	3450 ~ 3550
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4G	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 5G(U-NII-1)	5150 ~ 5250	5150 ~ 5250
	Wi-Fi 5G(U-NII-3)	5725 ~ 5850	5725 ~ 5850
CA Band	CA_7C		
EN-DC Band	DC_2A-n7A; DC_28A-n7A; DC_7A-n28A; DC_66A-n28A; DC_2A-n66A; DC_7A-n66A; DC_66A-n66A; DC_28A-n66A; DC_2A-n78A; DC_5A-n78A; DC_7A-n78A; DC_28A-n78A; DC_66A-n78A		
EUT Accessory			
Adapter 1	Manufacturer: Jiangsu Chenyang Electron Co.,Ltd. Model: STC-A520A-Z		
Adapter 2	Manufacturer: Shenzhen Ruijing Industrial Co.,Ltd Model: STC-A520A-Z		
Battery	Manufacturer: ZHONGSHAN TIANMAO BATTERY CO.LTD. Model: Li3839T44P8h866445		
USB Cable1	Manufacturer: Shenzhen Luxshare Precision Industry Co.,Ltd. Model: USB-TC20-W-70-M-L		
USB Cable 2	Manufacturer: Dongguan Guojun Plastic Electronic Co.,Ltd Model: USB-TC20-W-70-M-L		
Auxiliary test equipment			
PC	PC Manufacturer: Microsoft Corporation Model: L20170076		
Earphone	Manufacturer: MEND1532B528A11 Model: Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD.		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. There are more than one Adapter and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 1 and USB Cable 2) will be recorded in this report.			



3) According to FCC Part 27: Active antenna system= AAS

NR Band n78 does not cover the complete 3700-3980MHz frequency band. Part 27 requires that device be capable of operating across the entire band so n78 must be disabled for the 27.50j band.

P: Partially covered by FCC/ISED rules



## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2021)**

**ANSI C63.4-2014**



## 2.4 Test Mode

Test Mode	
Mode 1:	Adapter + USB cable + Earphone + Front camera On
Mode 2:	Adapter + USB cable + Earphone + Rear camera On
Mode 3:	Adapter + USB cable + Earphone + Mp4
Mode 4:	USB Copy(EUT with PC) + USB cable +Earphone
Mode 5:	Front Camera On + earphone
Mode 6:	Rear camera On + earphone
Mode 7:	Earphone + MP4

During the test, the preliminary test was performed in all modes with all adapters and USB Cables, mode 4 with Adapter 1 and USB cable 2 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC;

## Test Setup

### Below 1GHz

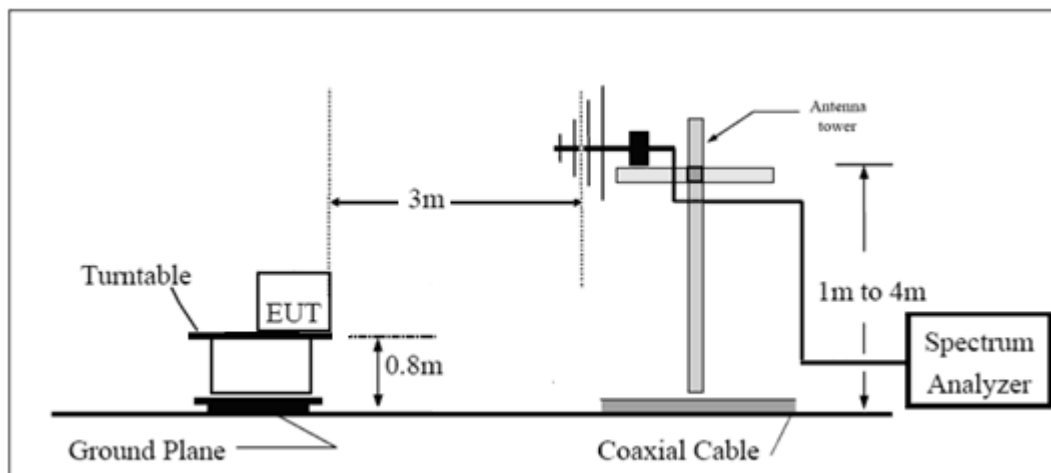

### Above 1GHz

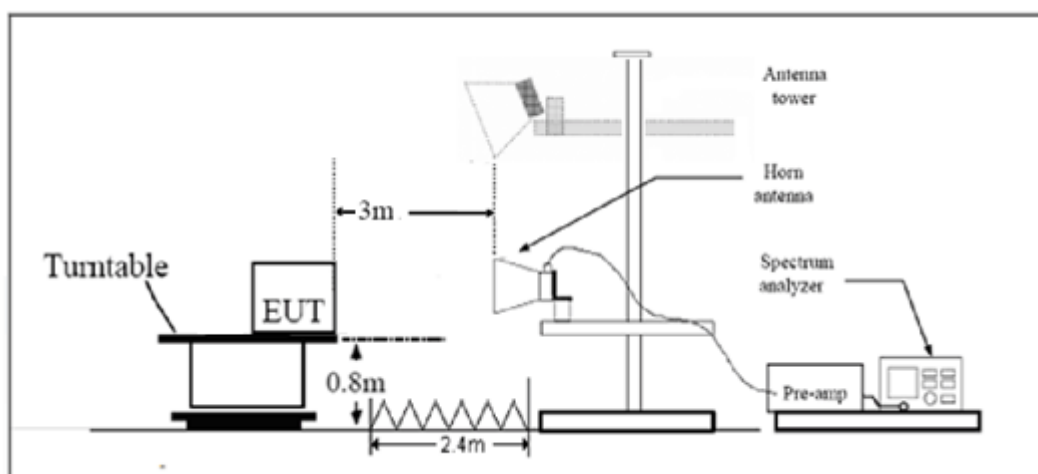

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

## Limits

### Class B

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

## Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
30MHz~200MHz	4.17 dB
200MHz~1000MHz	4.84 dB
1GHz~18GHz	4.35 dB

## Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.  
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

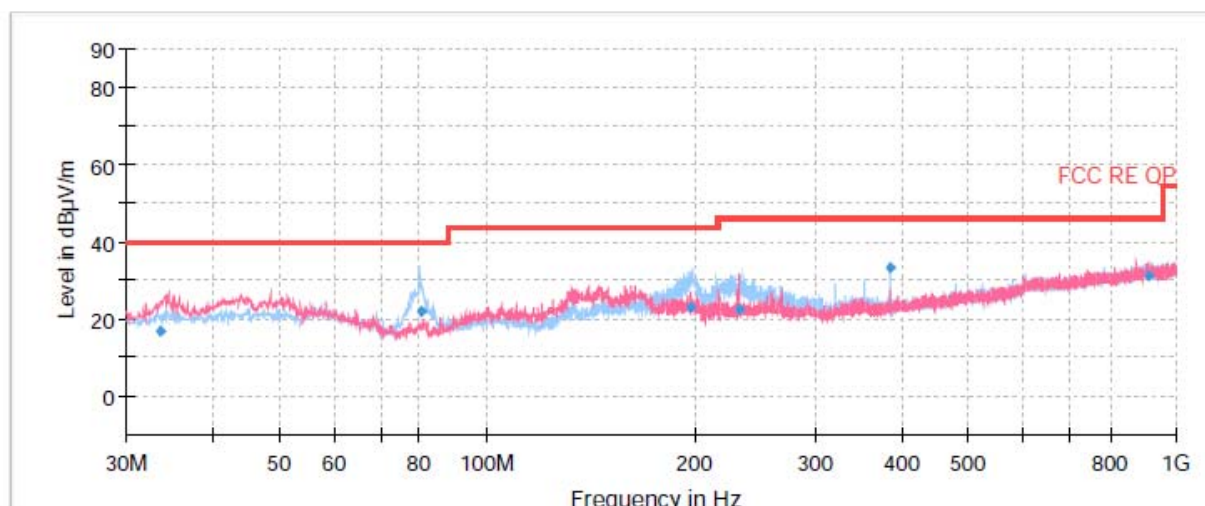


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
33.67	16.82	40.00	23.18	1000.00	125.0	V	24.00	13
80.54	21.93	40.00	18.07	1000.00	125.0	H	202.00	8
198.12	22.85	43.50	20.65	1000.00	100.0	H	248.00	12
232.64	22.41	46.00	22.60	1000.00	199.0	V	85.00	13
384.02	32.88	46.00	13.12	1000.00	100.0	H	7.00	17
910.71	30.93	46.00	15.07	1000.00	125.0	V	193.00	25

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

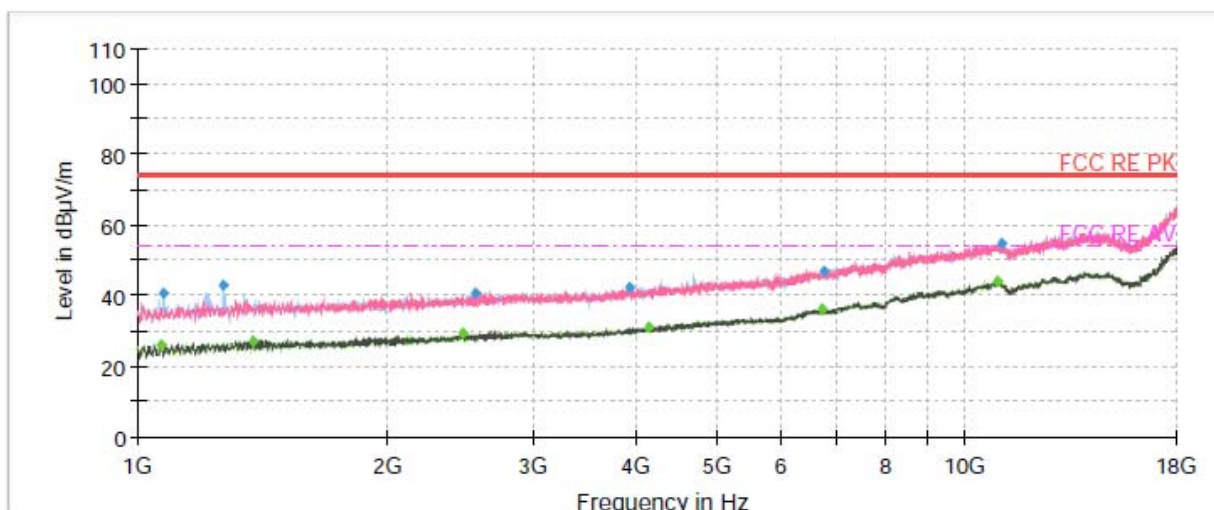

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1068.00	---	25.79	54.00	28.21	500.00	210.0	V	183.00	-19
1076.50	40.86	---	74.00	33.14	500.00	110.0	H	117.00	-19
1267.75	42.74	---	74.00	31.26	500.00	115.0	H	65.00	-18
1382.50	---	27.15	54.00	26.85	500.00	106.0	H	287.00	-17
2466.25	---	29.19	54.00	24.81	500.00	190.0	H	0.00	-14
2559.75	40.86	---	74.00	33.14	500.00	196.0	H	356.00	-14
3930.38	42.39	---	74.00	31.61	500.00	195.0	V	8.00	-11
4138.63	---	31.09	54.00	22.91	500.00	105.0	H	87.00	-10
6709.88	---	35.89	54.00	18.11	500.00	206.0	V	153.00	-2
6726.88	46.88	---	74.00	27.12	500.00	204.0	V	87.00	-2
10945.00	---	44.17	54.00	9.83	500.00	100.0	H	72.00	4
11027.88	54.76	---	74.00	19.24	500.00	212.0	H	312.00	4

## 3.2 Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC;

### Test Setup

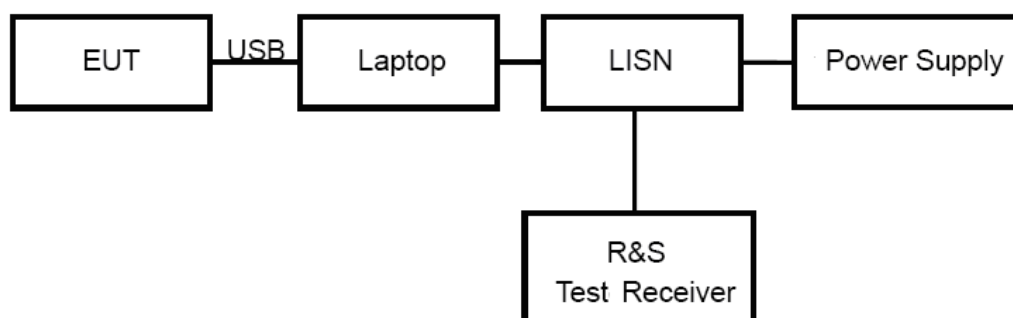

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 2.57$  dB.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

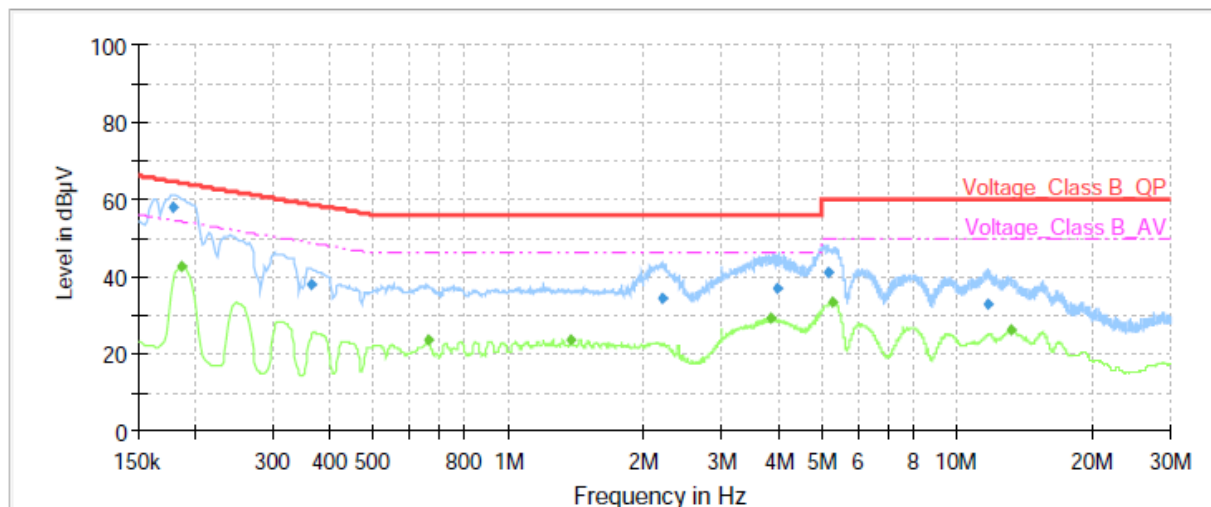


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	58.18	---	64.52	6.34	1000.00	9.000	L1	ON	21
0.19	---	42.48	54.21	11.73	1000.00	9.000	L1	ON	21
0.36	37.71	---	58.64	20.93	1000.00	9.000	L1	ON	21
0.66	---	23.78	46.00	22.22	1000.00	9.000	L1	ON	20
1.38	---	23.75	46.00	22.25	1000.00	9.000	L1	ON	20
2.19	34.33	---	56.00	21.67	1000.00	9.000	L1	ON	20
3.83	---	29.23	46.00	16.77	1000.00	9.000	L1	ON	19
3.96	36.83	---	56.00	19.17	1000.00	9.000	L1	ON	19
5.17	40.90	---	60.00	19.10	1000.00	9.000	L1	ON	19
5.28	---	33.39	50.00	16.61	1000.00	9.000	L1	ON	19
11.70	32.91	---	60.00	27.09	1000.00	9.000	L1	ON	20
13.16	---	26.16	50.00	23.84	1000.00	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz



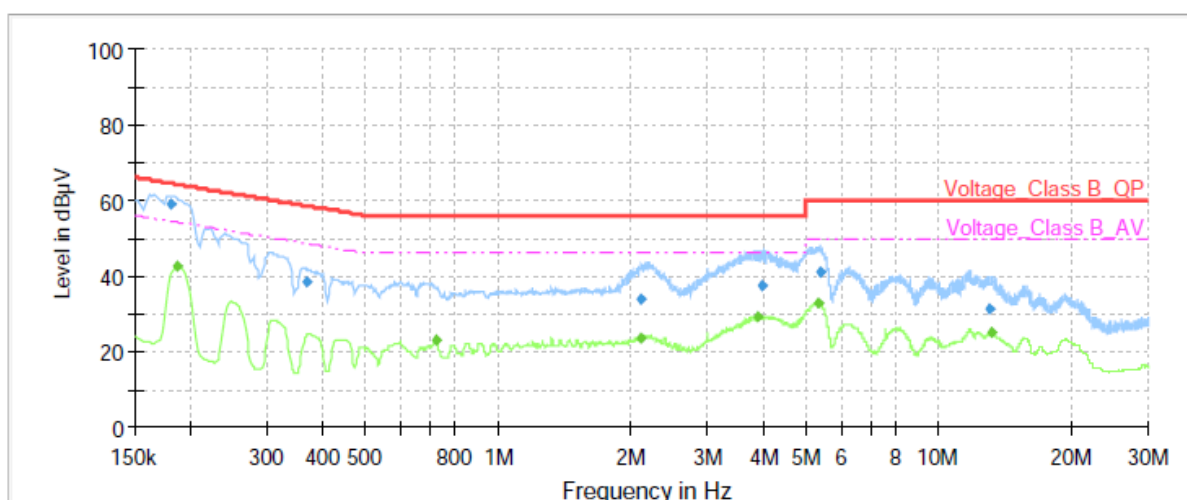

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	59.02	---	64.42	5.40	1000.00	9.000	N	ON	21
0.19	---	42.80	54.21	11.41	1000.00	9.000	N	ON	21
0.37	38.27	---	58.54	20.27	1000.00	9.000	N	ON	21
0.72	---	22.96	46.00	23.04	1000.00	9.000	N	ON	20
2.11	---	23.64	46.00	22.36	1000.00	9.000	N	ON	20
2.12	33.76	---	56.00	22.24	1000.00	9.000	N	ON	20
3.90	---	29.09	46.00	16.91	1000.00	9.000	N	ON	19
3.97	37.26	---	56.00	18.74	1000.00	9.000	N	ON	19
5.33	---	33.02	50.00	16.98	1000.00	9.000	N	ON	19
5.39	41.01	---	60.00	18.99	1000.00	9.000	N	ON	19
13.02	31.34	---	60.00	28.66	1000.00	9.000	N	ON	20
13.16	---	25.03	50.00	24.97	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz



## 4 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV40	101297	2021-12-12	2022-12-11
TRILOG Broadband Antenna	SCHWARZBECK	9163	1023	2021-06-07	2024-06-06
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2019-12-16	2022-12-15
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2022-05-25	2023-05-24
Software	R&S	EMC32	10.35.10	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.



## **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.