




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 255 of 818

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

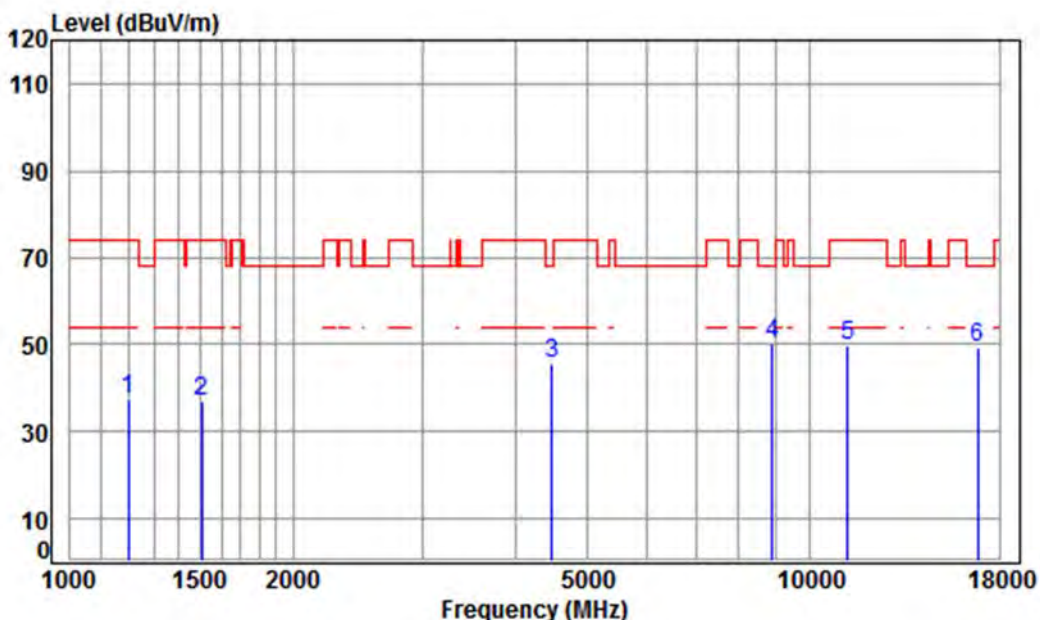

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5610 TX RSE

: Ant 2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	49.73	37.45	74.00	-36.55	peak
2	1507.470	5.47	25.83	41.41	47.29	37.18	74.00	-36.82	peak
3	4482.150	7.54	33.60	42.41	47.12	45.85	68.20	-22.35	peak
4 pp	8891.725	10.37	36.47	38.78	42.06	50.12	68.20	-18.08	peak
5	11220.000	11.86	37.88	38.02	38.12	49.84	74.00	-24.16	peak
6	16830.000	15.97	42.77	40.14	30.58	49.18	68.20	-19.02	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 256 of 818

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

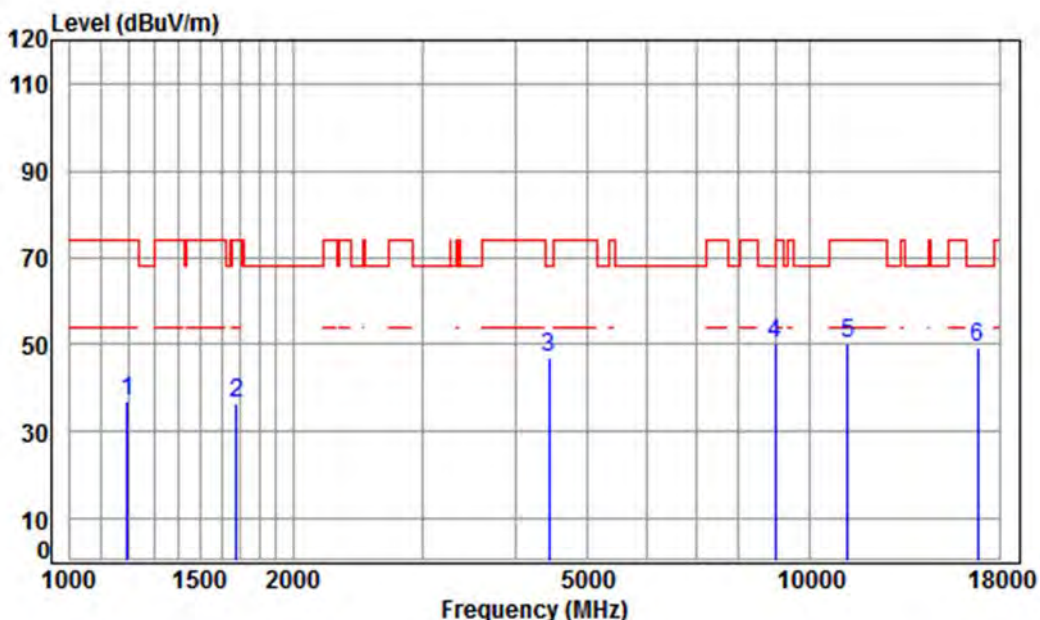

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5610 TX RSE

: Ant 2 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	49.15	36.83	74.00	-37.17	peak
2	1677.621	5.25	26.58	41.52	46.34	36.65	74.00	-37.35	peak
3	4430.628	7.48	33.60	42.41	48.50	47.17	68.20	-21.03	peak
4 pp	8969.161	10.39	36.56	38.66	41.77	50.06	68.20	-18.14	peak
5	11220.000	11.86	37.88	38.02	38.69	50.41	74.00	-23.59	peak
6	16830.000	15.97	42.77	40.14	30.60	49.20	68.20	-19.00	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 257 of 818

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

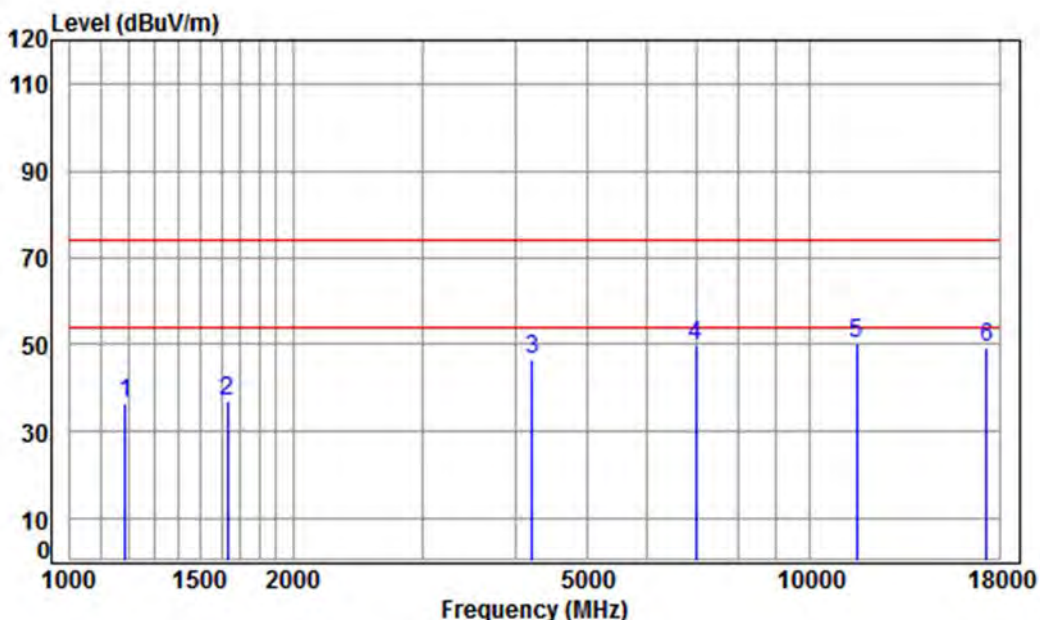

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5775 TX RSE

: Ant 2 5G WIFI 11AC(80) CH155

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1189.368	4.38	24.43	41.17	48.85	36.49	74.00	-37.51	peak
2	1634.543	5.31	26.40	41.49	46.73	36.95	74.00	-37.05	peak
3	4206.011	7.23	33.60	42.36	47.99	46.46	74.00	-27.54	peak
4	7015.420	10.13	36.49	40.84	44.18	49.96	74.00	-24.04	peak
5	pp11550.000	12.16	38.15	38.23	38.25	50.33	74.00	-23.67	peak
6	17325.000	15.98	43.19	40.55	30.63	49.25	74.00	-24.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 258 of 818

Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

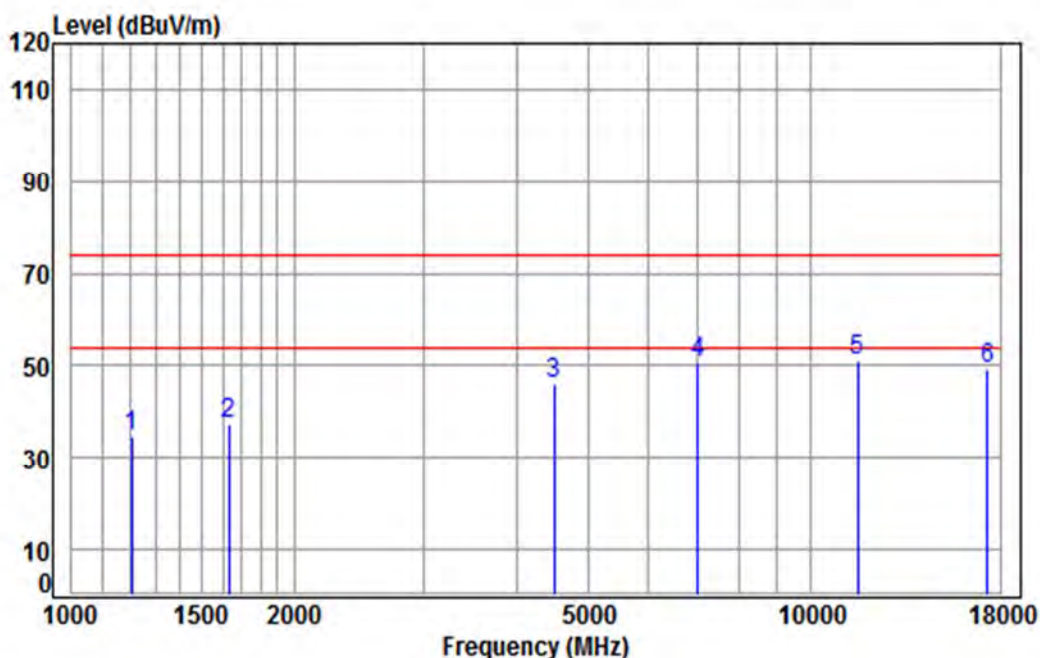

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5775 TX RSE

: Ant 2 5G WIFI 11AC(80) CH155

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	47.10	34.86	74.00	-39.14	peak
2	1629.825	5.31	26.38	41.49	47.14	37.34	74.00	-36.66	peak
3	4495.125	7.55	33.60	42.42	47.53	46.26	74.00	-27.74	peak
4	7035.727	10.12	36.49	40.83	44.80	50.58	74.00	-23.42	peak
5	pp11550.000	12.16	38.15	38.23	38.81	50.89	74.00	-23.11	peak
6	17325.000	15.98	43.19	40.55	30.81	49.43	74.00	-24.57	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM180200138702

Page: 259 of 818

MIMO

Test plot as follows:

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

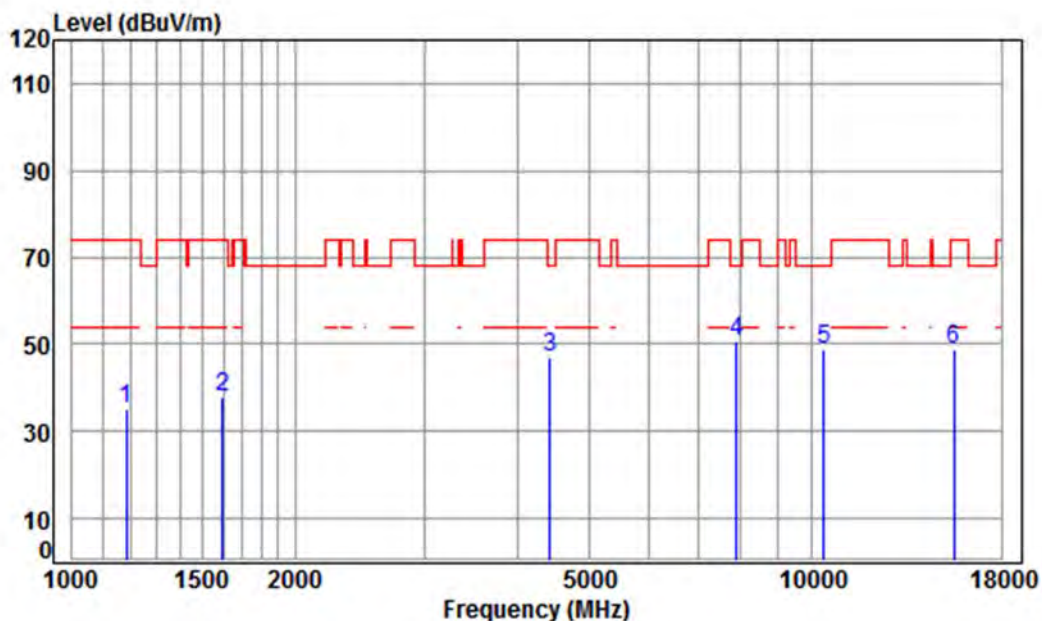

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11N CH36

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1185.936	4.36	24.41	41.17	47.65	35.25	74.00	-38.75 peak
2	1597.181	5.35	26.24	41.47	47.68	37.80	74.00	-36.20 peak
3	4417.841	7.47	33.60	42.40	48.12	46.79	68.20	-21.41 peak
4 pp	7898.049	9.96	36.54	40.26	44.46	50.70	68.20	-17.50 peak
5	10360.000	11.19	37.24	37.45	37.82	48.80	68.20	-19.40 peak
6	15540.000	14.30	41.38	39.00	31.96	48.64	74.00	-25.36 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 260 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

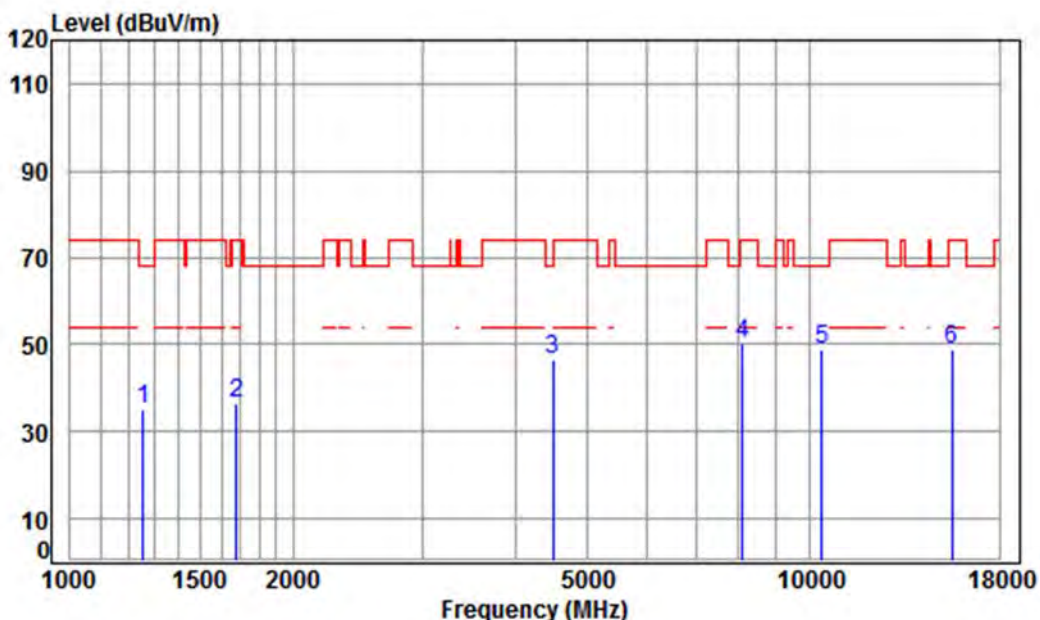

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.75	41.23	46.87	35.03	68.20	-33.17	peak
2	1677.621	5.25	26.58	41.52	46.33	36.64	74.00	-37.36	peak
3	4495.125	7.55	33.60	42.42	47.62	46.35	68.20	-21.85	peak
4	8106.200	10.02	36.47	40.02	43.58	50.05	74.00	-23.95	peak
5	pp10360.000	11.19	37.24	37.45	37.67	48.65	68.20	-19.55	peak
6	15540.000	14.30	41.38	39.00	32.21	48.89	74.00	-25.11	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 261 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	---------------	-----------------	------	------	----------

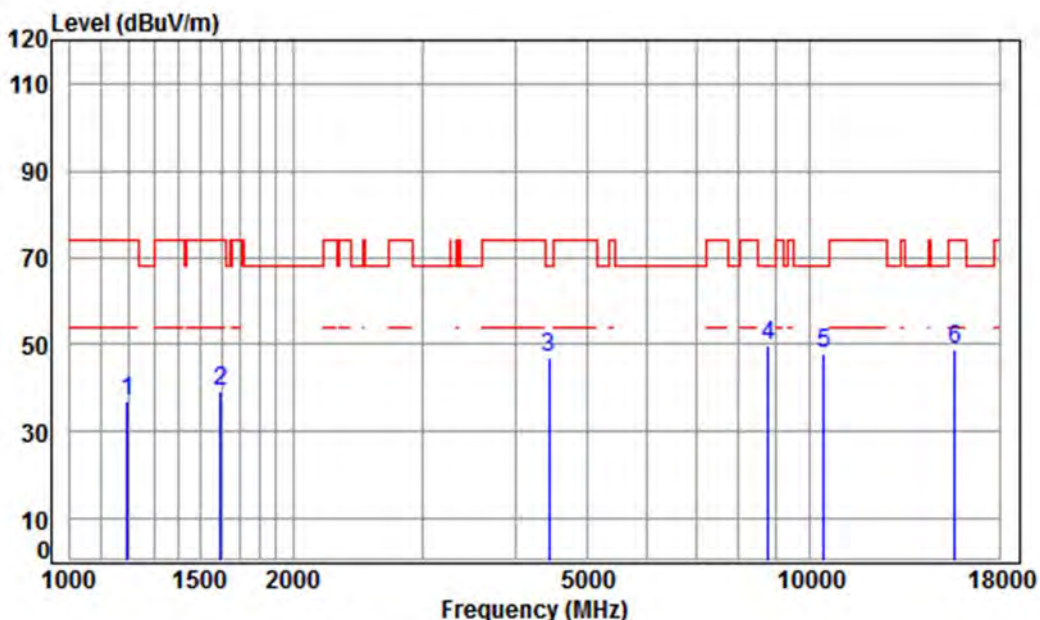

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5220 TX RSE

: Ant 1+2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	49.43	37.11	74.00	-36.89	peak
2	1597.181	5.35	26.24	41.47	48.99	39.11	74.00	-34.89	peak
3	4430.628	7.48	33.60	42.41	48.18	46.85	68.20	-21.35	peak
4 pp	8764.146	10.34	36.32	38.97	42.19	49.88	68.20	-18.32	peak
5	10440.000	11.25	37.16	37.51	37.22	48.12	68.20	-20.08	peak
6	15660.000	14.48	41.34	39.11	32.16	48.87	74.00	-25.13	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 262 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

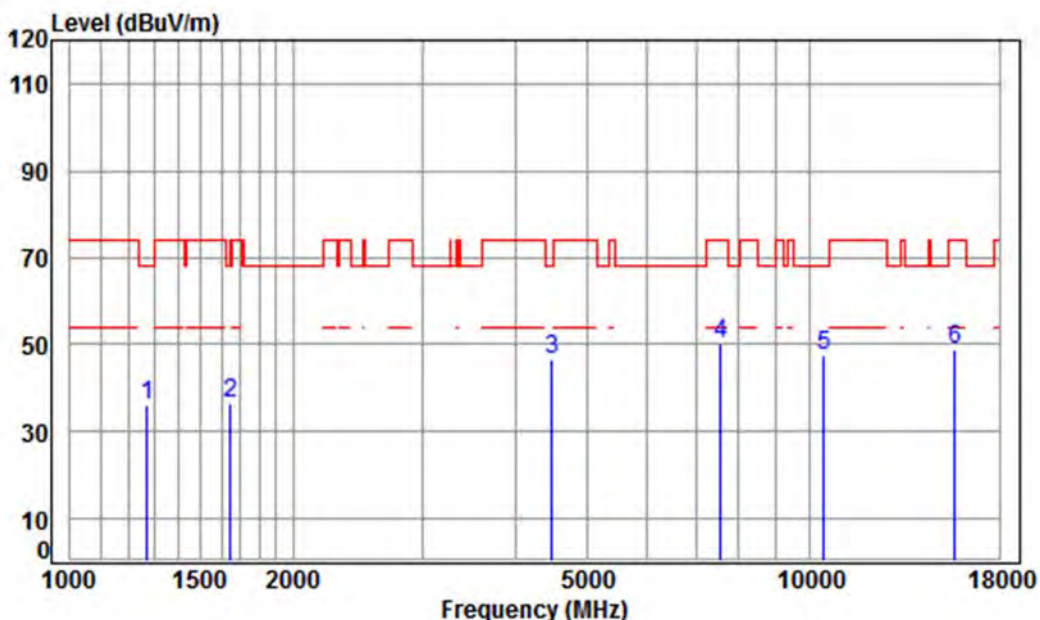

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5220 TX RSE

: Ant 1+2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	47.77	36.04	68.20	-32.16	peak
2	1648.778	5.29	26.46	41.50	46.34	36.59	68.20	-31.61	peak
3	4482.150	7.54	33.60	42.41	47.86	46.59	68.20	-21.61	peak
4	7562.942	9.99	36.34	40.47	44.35	50.21	74.00	-23.79	peak
5	pp10440.000	11.25	37.16	37.51	36.70	47.60	68.20	-20.60	peak
6	15660.000	14.48	41.34	39.11	32.27	48.98	74.00	-25.02	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 263 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

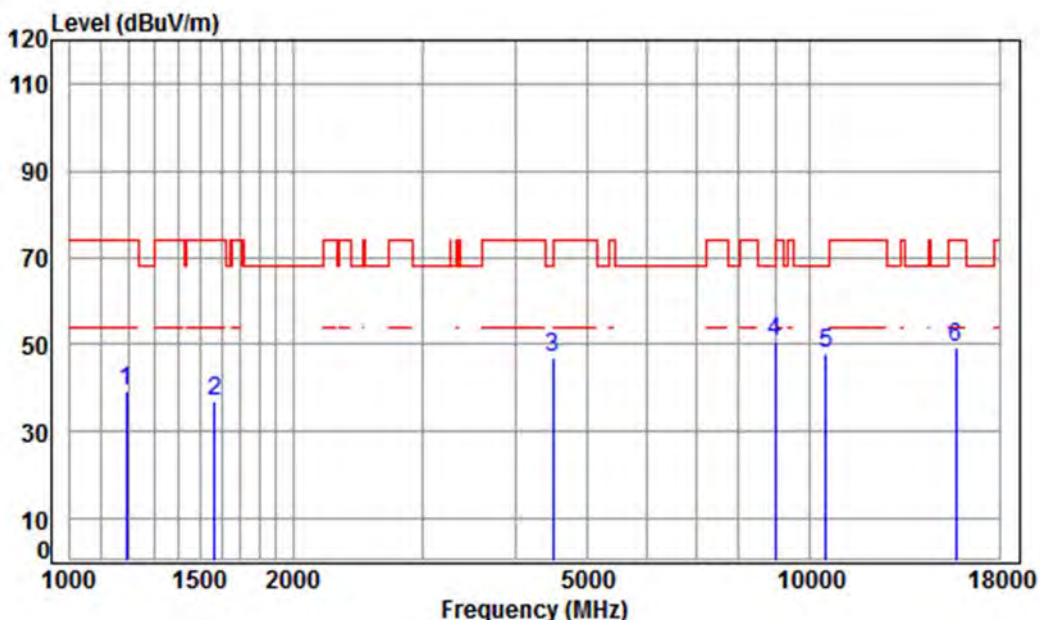

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5240 TX RSE

: Ant 1+2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	51.62	39.27	74.00	-34.73	peak
2	1569.721	5.39	26.12	41.45	46.85	36.91	74.00	-37.09	peak
3	4495.125	7.55	33.60	42.42	48.07	46.80	68.20	-21.40	peak
4 pp	8969.161	10.39	36.56	38.66	42.56	50.85	68.20	-17.35	peak
5	10480.000	11.28	37.12	37.53	37.26	48.13	68.20	-20.07	peak
6	15720.000	14.57	41.31	39.17	32.61	49.32	74.00	-24.68	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 264 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

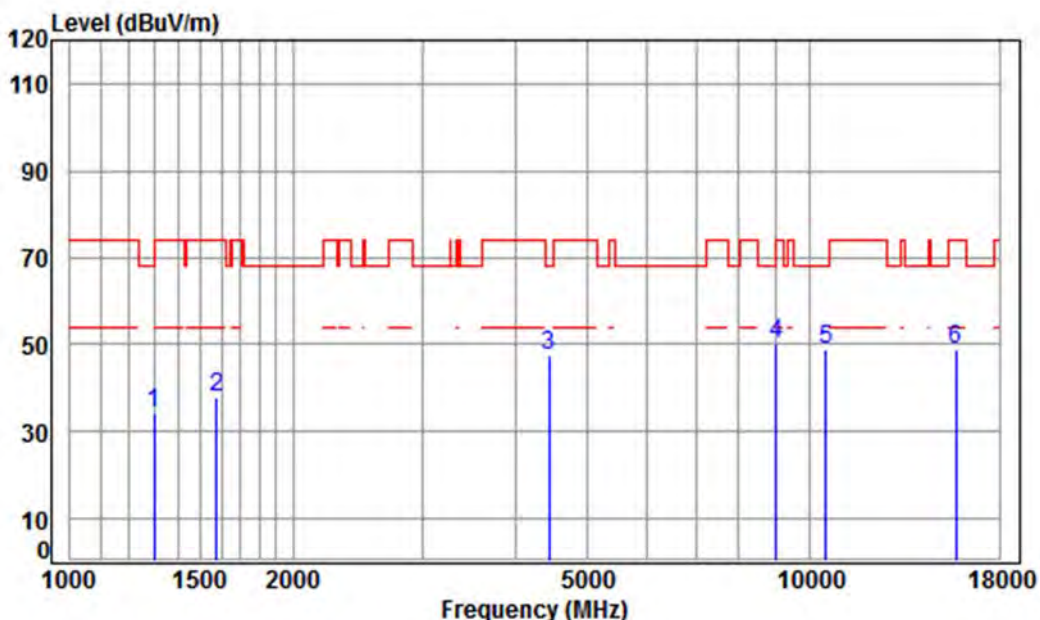

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5240 TX RSE

: Ant 1+2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	45.71	34.18	68.20	-34.02	peak
2	1578.822	5.38	26.16	41.46	47.69	37.77	74.00	-36.23	peak
3	4430.628	7.48	33.60	42.41	48.72	47.39	68.20	-20.81	peak
4 pp	8995.123	10.40	36.59	38.62	41.78	50.15	68.20	-18.05	peak
5	10480.000	11.28	37.12	37.53	38.13	49.00	68.20	-19.20	peak
6	15720.000	14.57	41.31	39.17	32.17	48.88	74.00	-25.12	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 265 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

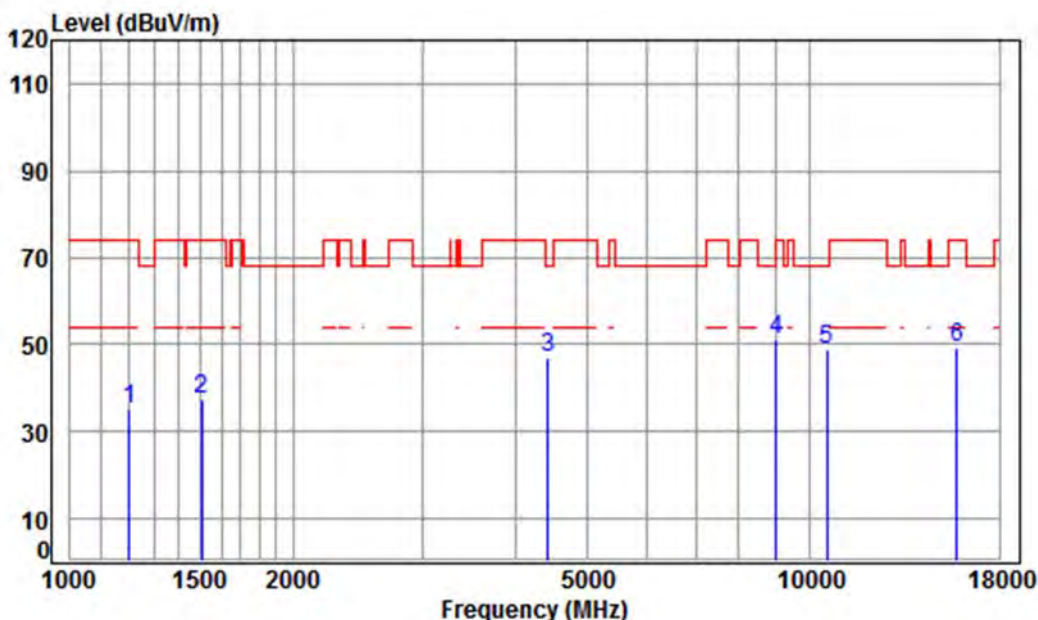

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5260 TX RSE

: Ant 1+2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	47.19	34.92	74.00	-39.08	peak
2	1507.470	5.47	25.83	41.41	47.36	37.25	74.00	-36.75	peak
3	4417.841	7.47	33.60	42.40	48.25	46.92	68.20	-21.28	peak
4 pp	8995.123	10.40	36.59	38.62	42.77	51.14	68.20	-17.06	peak
5	10520.000	11.30	37.12	37.56	37.80	48.66	68.20	-19.54	peak
6	15780.000	14.66	41.29	39.22	32.57	49.30	74.00	-24.70	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 266 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

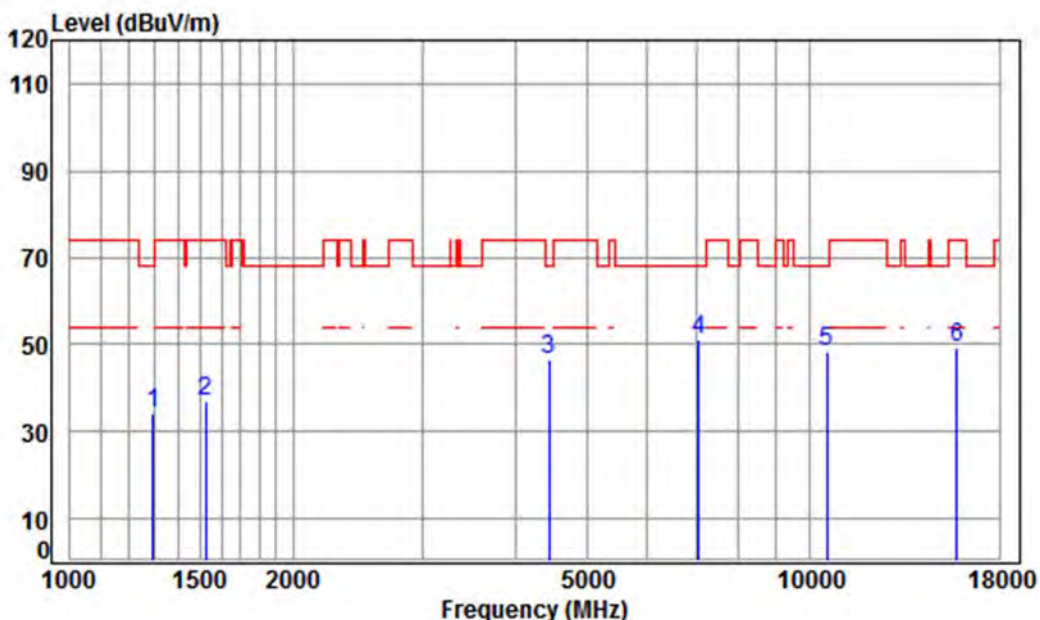

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5260 TX RSE

: Ant 1+2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	24.92	41.26	45.80	34.23	68.20	-33.97	peak
2	1525.000	5.45	25.91	41.42	47.20	37.14	74.00	-36.86	peak
3	4430.628	7.48	33.60	42.41	47.94	46.61	68.20	-21.59	peak
4 pp	7076.516	10.11	36.47	40.80	45.55	51.33	68.20	-16.87	peak
5	10520.000	11.30	37.12	37.56	37.47	48.33	68.20	-19.87	peak
6	15780.000	14.66	41.29	39.22	32.44	49.17	74.00	-24.83	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 267 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	---------------	-----------------	------	------	----------

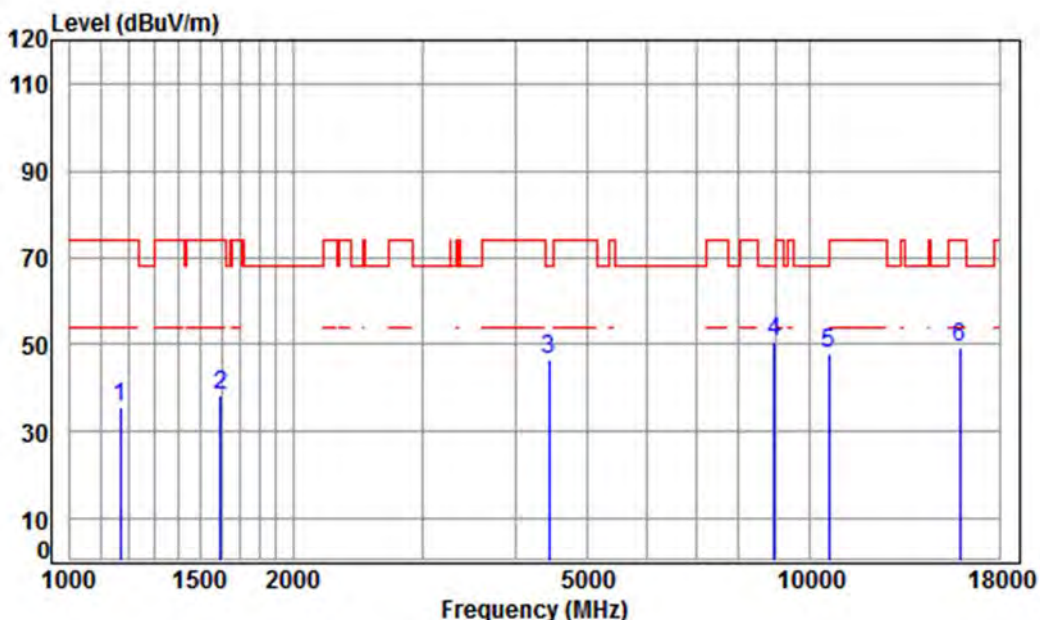

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5300 TX RSE

: Ant 1+2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1168.920	4.29	24.32	41.16	47.98	35.43	74.00	-38.57	peak
2	1597.181	5.35	26.24	41.47	47.99	38.11	74.00	-35.89	peak
3	4430.628	7.48	33.60	42.41	47.82	46.49	68.20	-21.71	peak
4 pp	8943.274	10.39	36.53	38.70	42.22	50.44	68.20	-17.76	peak
5	10600.000	11.36	37.22	37.62	37.01	47.97	68.20	-20.23	peak
6	15900.000	14.84	41.24	39.33	32.67	49.42	74.00	-24.58	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 268 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

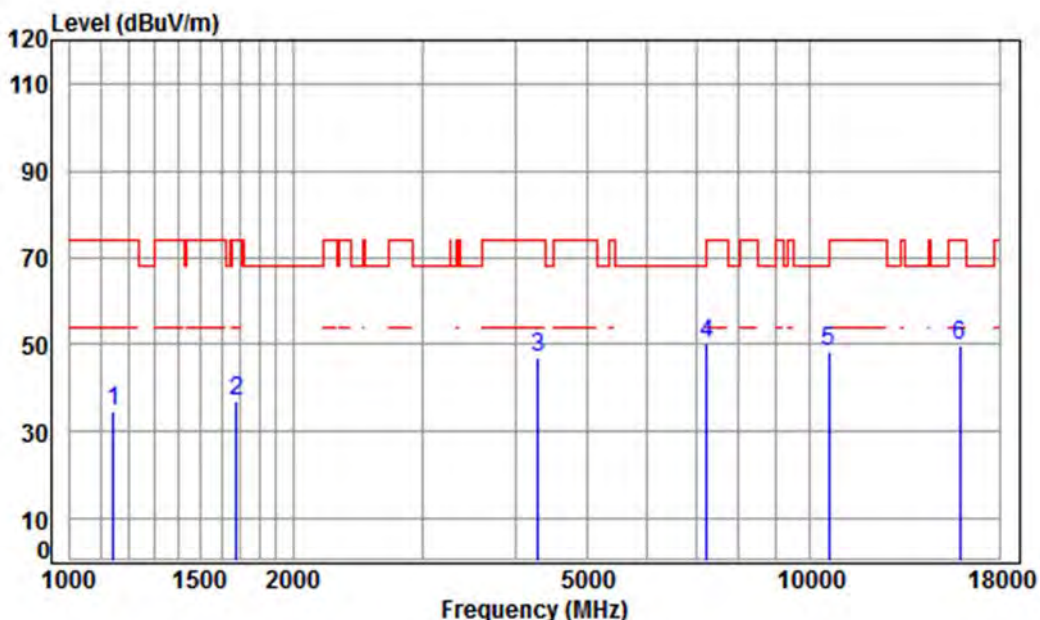

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5300 TX RSE

: Ant 1+2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	47.61	34.87	74.00	-39.13	peak
2	1677.621	5.25	26.58	41.52	46.68	36.99	74.00	-37.01	peak
3	4291.977	7.33	33.60	42.38	48.28	46.83	74.00	-27.17	peak
4 pp	7242.052	10.07	36.40	40.69	44.57	50.35	68.20	-17.85	peak
5	10600.000	11.36	37.22	37.62	37.48	48.44	68.20	-19.76	peak
6	15900.000	14.84	41.24	39.33	33.10	49.85	74.00	-24.15	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 269 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

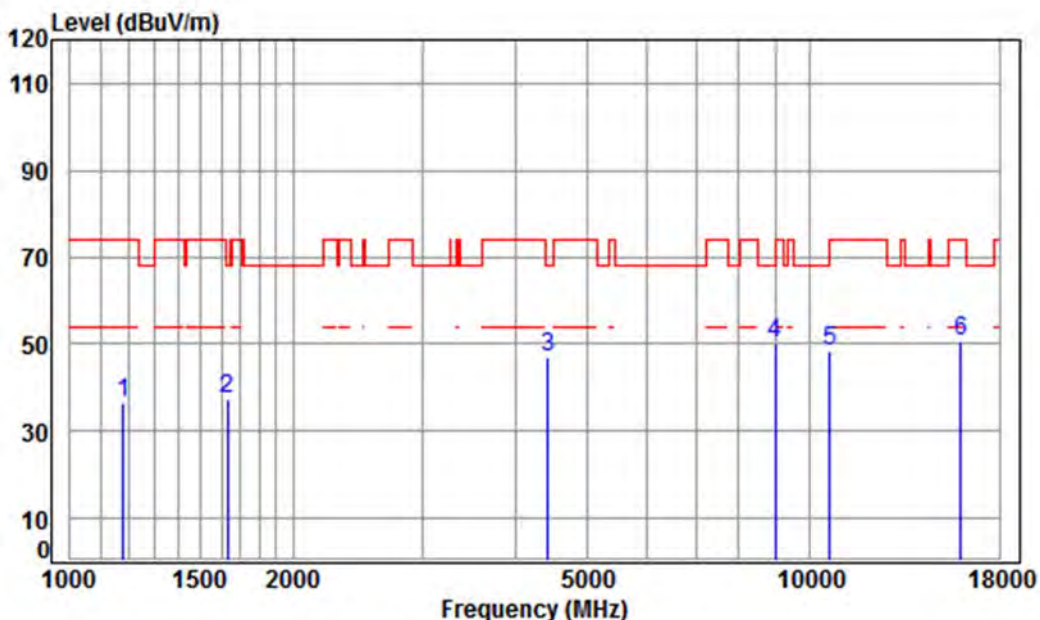

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11N CH64

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1179.100	4.33	24.38	41.16	48.82	36.37	74.00	-37.63 peak
2	1634.543	5.31	26.40	41.49	47.08	37.30	68.20	-30.90 peak
3	4417.841	7.47	33.60	42.40	48.29	46.96	68.20	-21.24 peak
4 pp	8969.161	10.39	36.56	38.66	41.68	49.97	68.20	-18.23 peak
5	10640.000	11.39	37.27	37.64	37.24	48.26	74.00	-25.74 peak
6	15960.000	14.93	41.22	39.38	33.98	50.75	74.00	-23.25 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 270 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

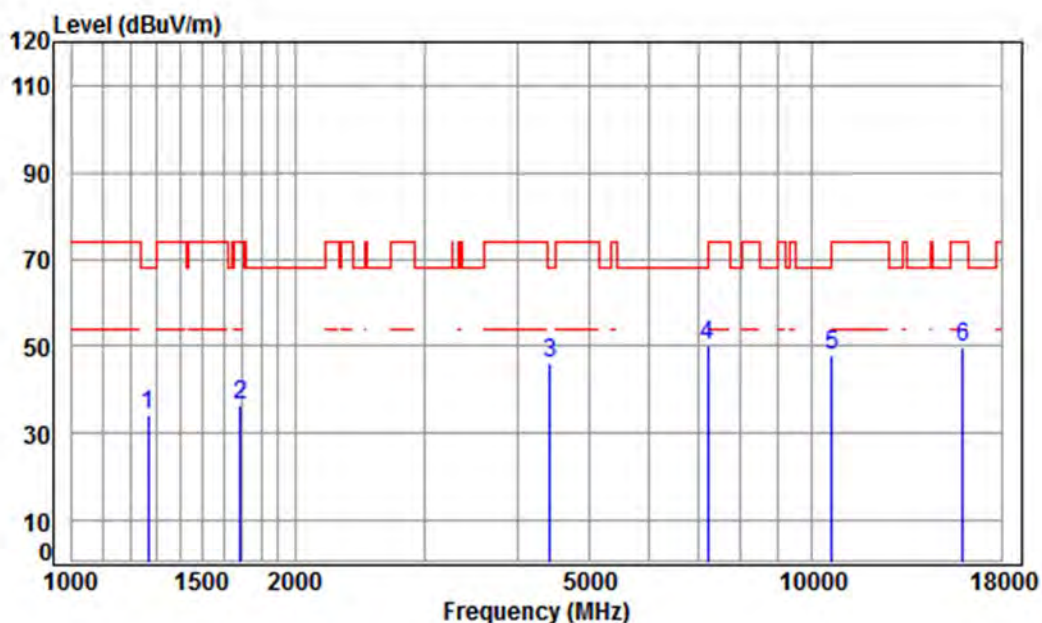

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	45.85	34.09	68.20	-34.11	peak
2	1687.347	5.24	26.62	41.52	45.99	36.33	74.00	-37.67	peak
3	4417.841	7.47	33.60	42.40	47.63	46.30	68.20	-21.90	peak
4 pp	7221.150	10.07	36.41	40.70	44.31	50.09	68.20	-18.11	peak
5	10640.000	11.39	37.27	37.64	36.86	47.88	74.00	-26.12	peak
6	15960.000	14.93	41.22	39.38	32.96	49.73	74.00	-24.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 271 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

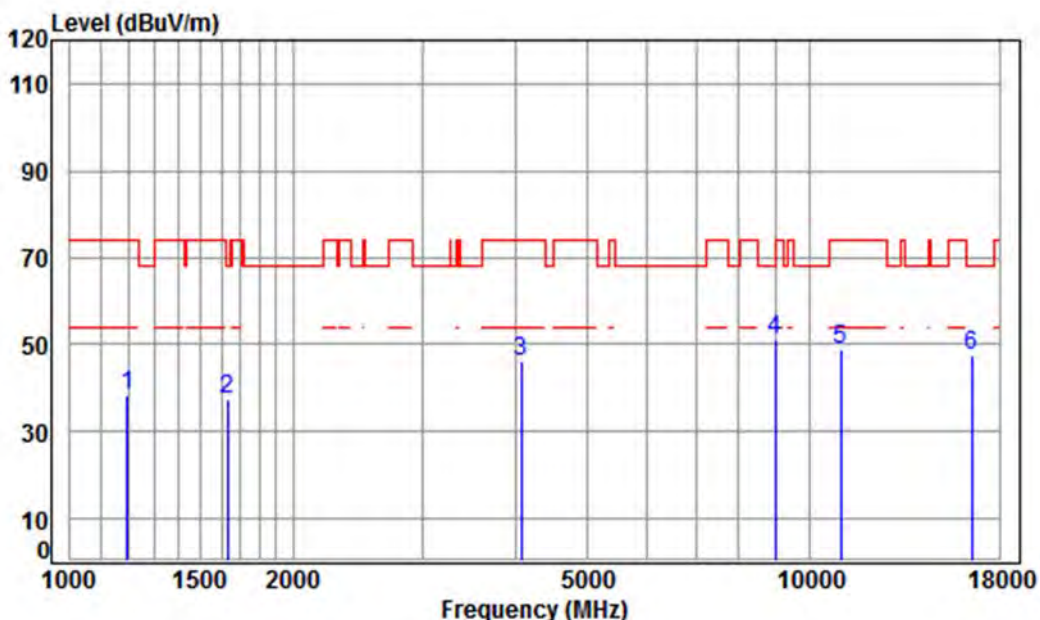

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	50.63	38.31	74.00	-35.69	peak
2	1634.543	5.31	26.40	41.49	47.19	37.41	68.20	-30.79	peak
3	4074.388	7.07	33.60	42.34	47.96	46.29	74.00	-27.71	peak
4 pp	8969.161	10.39	36.56	38.66	42.89	51.18	68.20	-17.02	peak
5	11000.000	11.63	37.70	37.88	37.22	48.67	74.00	-25.33	peak
6	16500.000	14.50	42.70	39.86	30.31	47.65	68.20	-20.55	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 272 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

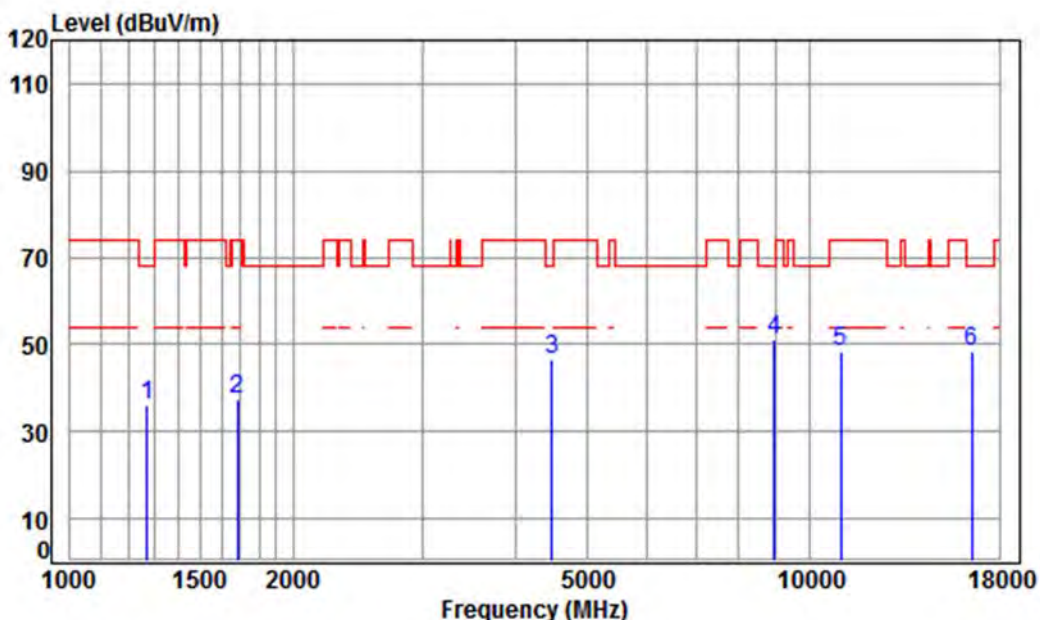

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	47.61	35.88	68.20	-32.32	peak
2	1682.477	5.25	26.60	41.52	47.11	37.44	74.00	-36.56	peak
3	4482.150	7.54	33.60	42.41	47.81	46.54	68.20	-21.66	peak
4 pp	8943.274	10.39	36.53	38.70	42.95	51.17	68.20	-17.03	peak
5	11000.000	11.63	37.70	37.88	36.89	48.34	74.00	-25.66	peak
6	16500.000	14.50	42.70	39.86	31.00	48.34	68.20	-19.86	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 273 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	---------------	-----------------	------	------	----------

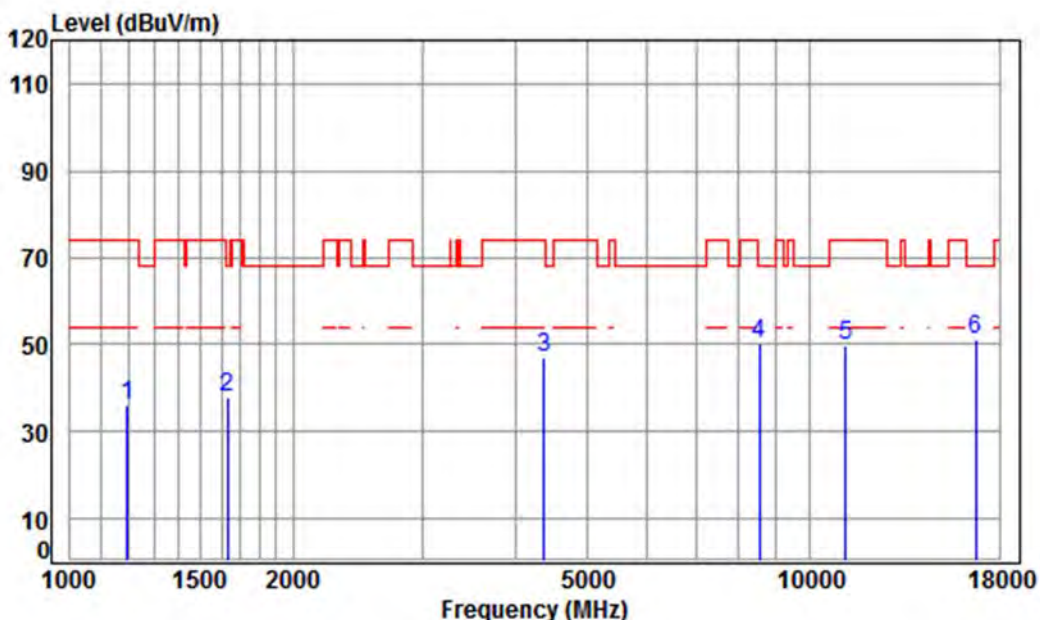

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5580 TX RSE

: Ant 1+2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	48.30	35.98	74.00	-38.02	peak
2	1629.825	5.31	26.38	41.49	47.58	37.78	68.20	-30.42	peak
3	4367.058	7.41	33.60	42.39	48.46	47.08	74.00	-26.92	peak
4	8539.102	10.28	36.05	39.32	43.03	50.04	68.20	-18.16	peak
5	11160.000	11.80	37.83	37.98	38.07	49.72	74.00	-24.28	peak
6	pp16740.000	15.57	42.75	40.07	32.65	50.90	68.20	-17.30	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 274 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

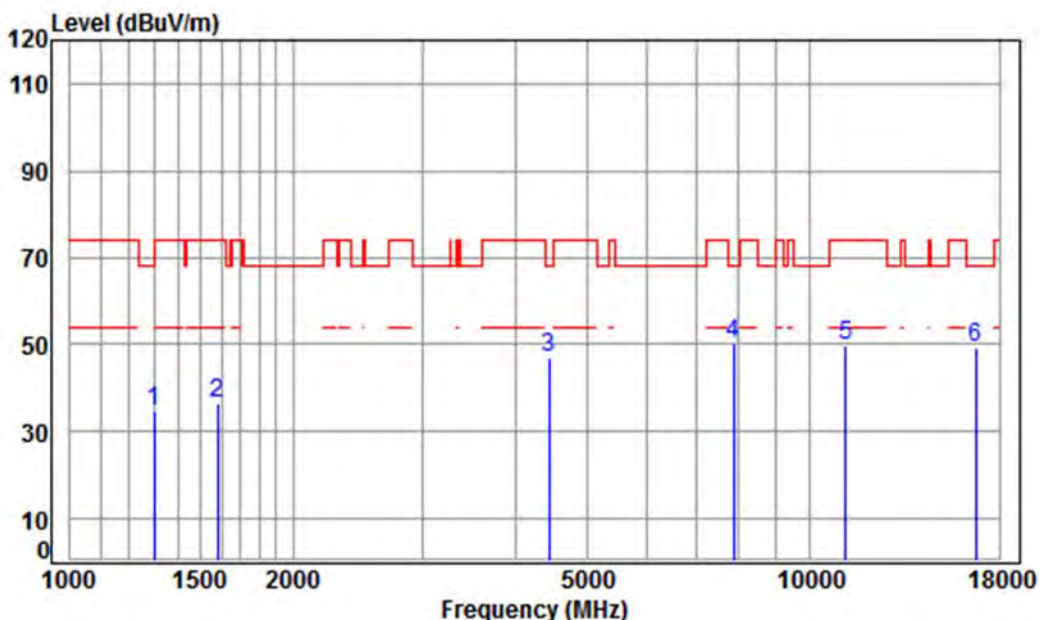

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5580 TX RSE

: Ant 1+2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	46.03	34.50	68.20	-33.70	peak
2	1583.392	5.37	26.18	41.46	46.53	36.62	74.00	-37.38	peak
3	4430.628	7.48	33.60	42.41	48.46	47.13	68.20	-21.07	peak
4 pp	7875.254	9.96	36.53	40.28	44.20	50.41	68.20	-17.79	peak
5	11160.000	11.80	37.83	37.98	38.18	49.83	74.00	-24.17	peak
6	16740.000	15.57	42.75	40.07	31.12	49.37	68.20	-18.83	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 275 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

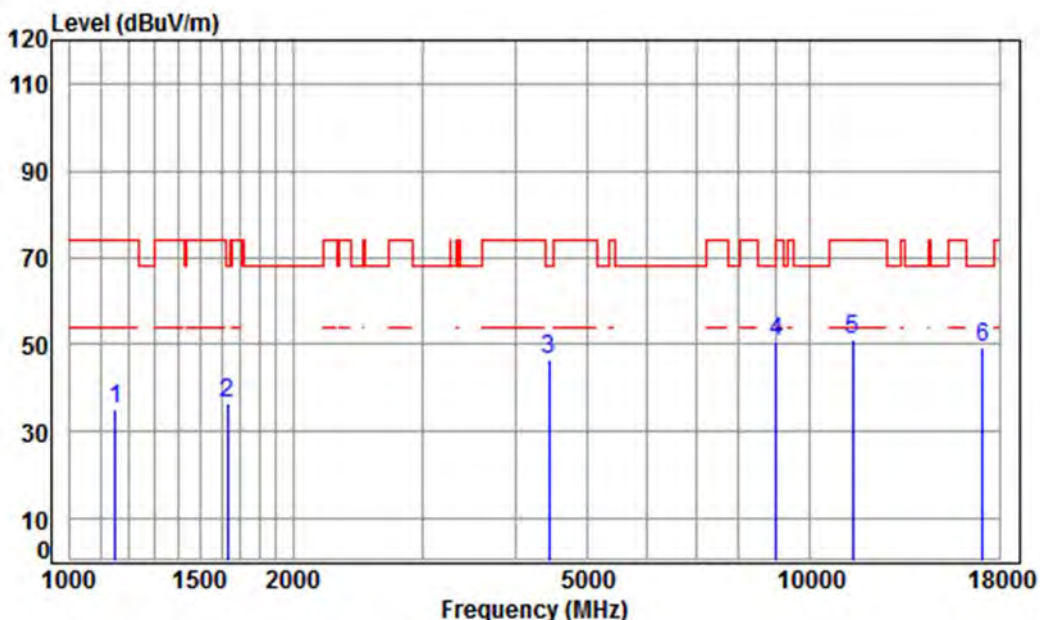

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11N CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.24	41.14	47.89	35.21	74.00	-38.79	peak
2	1629.825	5.31	26.38	41.49	46.49	36.69	68.20	-31.51	peak
3	4430.628	7.48	33.60	42.41	48.08	46.75	68.20	-21.45	peak
4 pp	8995.123	10.40	36.59	38.62	42.43	50.80	68.20	-17.40	peak
5	11400.000	12.04	38.02	38.13	39.08	51.01	74.00	-22.99	peak
6	17100.000	16.49	42.92	40.37	30.45	49.49	68.20	-18.71	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 276 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

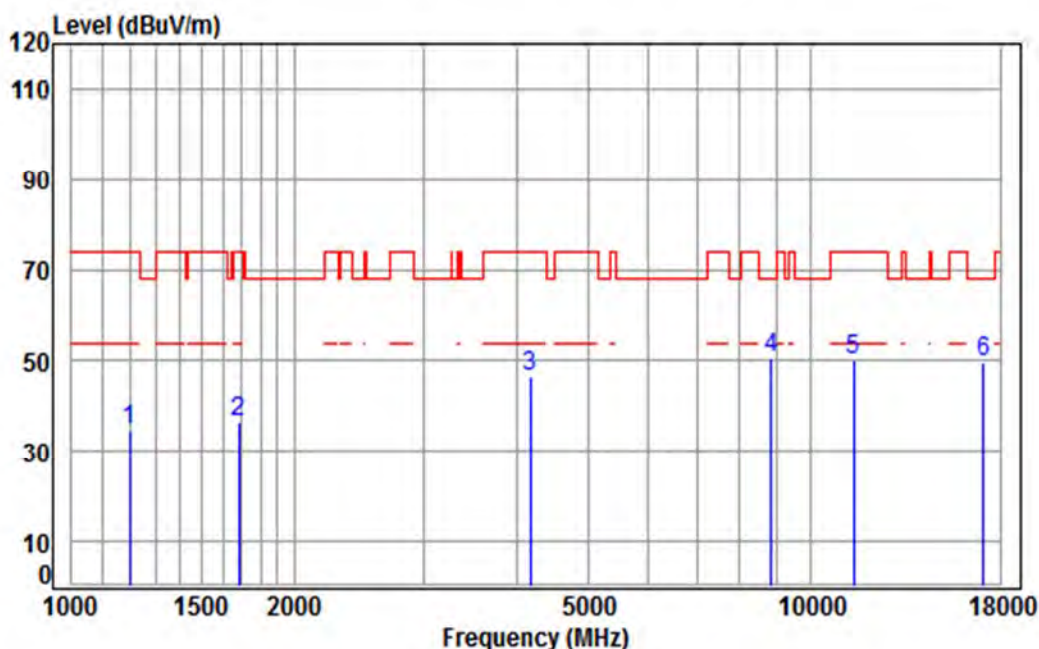

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11N CH140

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	47.16	34.88	74.00	-39.12	peak
2	1682.477	5.25	26.60	41.52	46.12	36.45	74.00	-37.55	peak
3	4169.698	7.18	33.60	42.36	48.15	46.57	74.00	-27.43	peak
4 pp	8840.473	10.36	36.41	38.86	42.94	50.85	68.20	-17.35	peak
5	11400.000	12.04	38.02	38.13	38.09	50.02	74.00	-23.98	peak
6	17100.000	16.49	42.92	40.37	30.61	49.65	68.20	-18.55	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 277 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

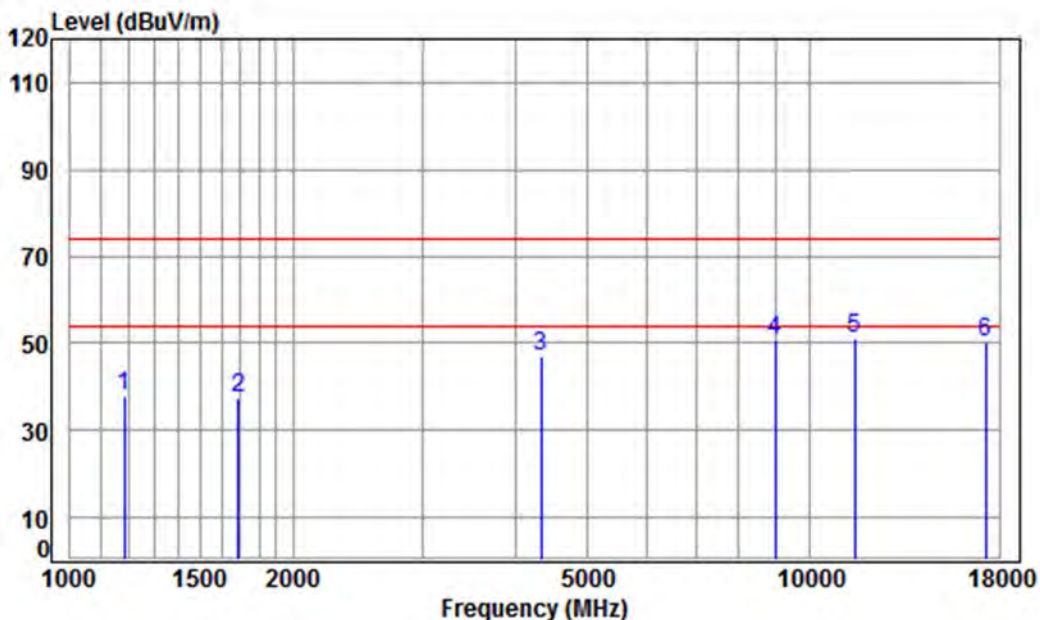

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1185.936	4.36	24.41	41.17	50.48	38.08	74.00	-35.92	peak
2	1687.347	5.24	26.62	41.52	47.20	37.54	74.00	-36.46	peak
3	4329.354	7.37	33.60	42.39	48.26	46.84	74.00	-27.16	peak
4	8969.161	10.39	36.56	38.66	42.29	50.58	74.00	-23.42	peak
5	pp11490.000	12.13	38.09	38.19	39.20	51.23	74.00	-22.77	peak
6	17235.000	16.18	43.08	40.48	31.24	50.02	74.00	-23.98	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 278 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

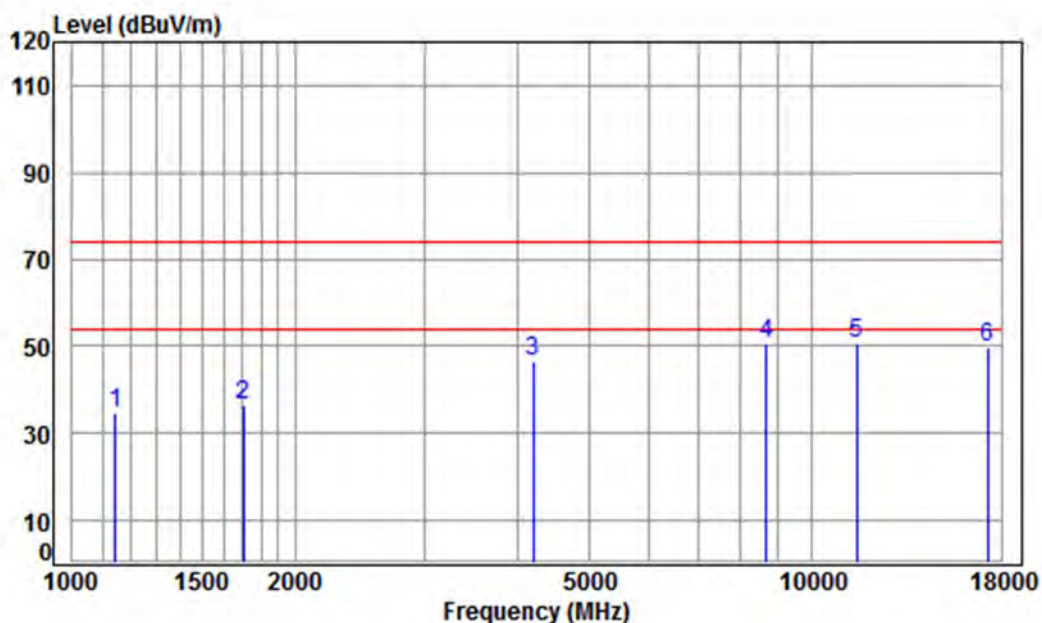

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	47.58	34.84	74.00	-39.16	peak
2	1702.042	5.23	26.68	41.53	46.26	36.64	74.00	-37.36	peak
3	4193.872	7.21	33.60	42.36	48.19	46.64	74.00	-27.36	peak
4 pp	8663.404	10.31	36.20	39.13	43.39	50.77	74.00	-23.23	peak
5	11490.000	12.13	38.09	38.19	38.40	50.43	74.00	-23.57	peak
6	17235.000	16.18	43.08	40.48	30.74	49.52	74.00	-24.48	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 279 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	---------------	-----------------	------	------	----------

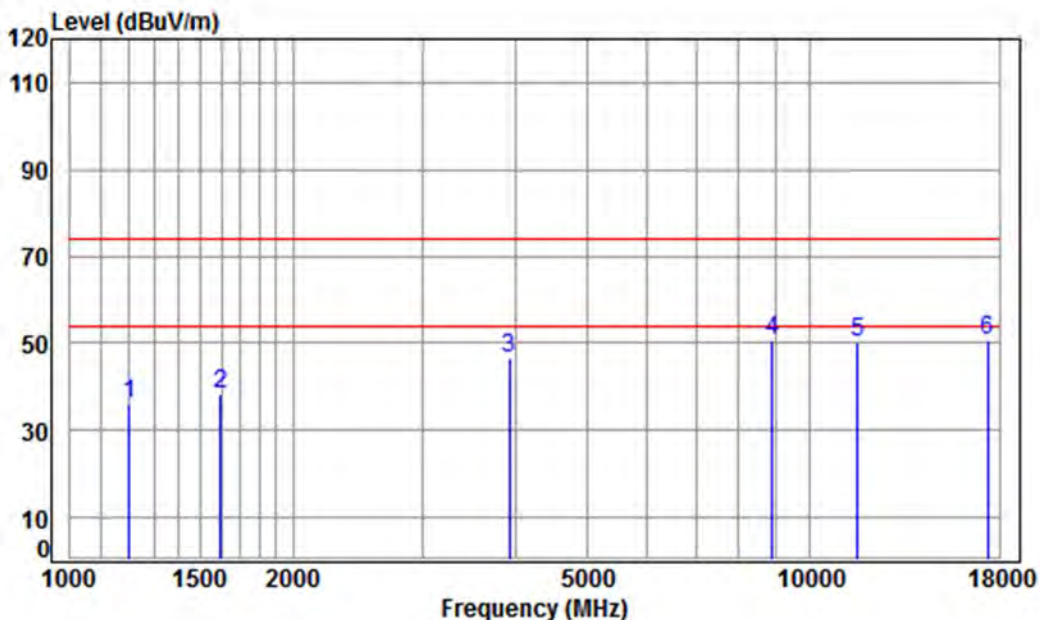

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	48.13	35.86	74.00	-38.14	peak
2	1597.181	5.35	26.24	41.47	48.32	38.44	74.00	-35.56	peak
3	3924.135	6.91	33.40	42.31	48.57	46.57	74.00	-27.43	peak
4 pp	8891.725	10.37	36.47	38.78	42.68	50.74	74.00	-23.26	peak
5	11570.000	12.17	38.17	38.24	38.14	50.24	74.00	-23.76	peak
6	17355.000	15.92	43.23	40.58	32.02	50.59	74.00	-23.41	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 280 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

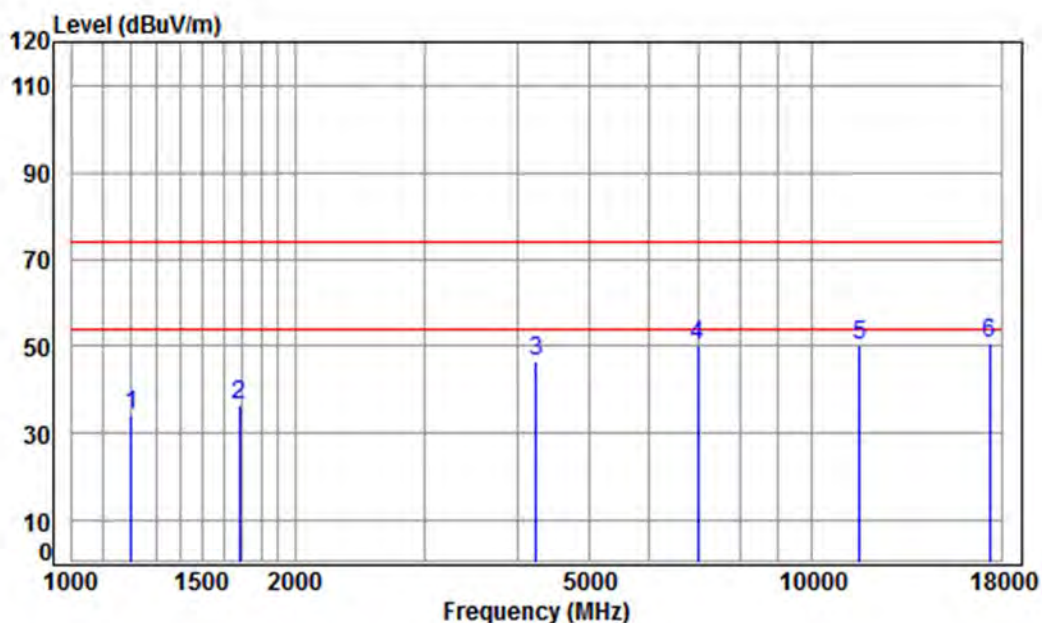

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.55	34.28	74.00	-39.72	peak
2	1682.477	5.25	26.60	41.52	46.36	36.69	74.00	-37.31	peak
3	4230.396	7.26	33.60	42.37	48.12	46.61	74.00	-27.39	peak
4	7015.420	10.13	36.49	40.84	44.61	50.39	74.00	-23.61	peak
5	11570.000	12.17	38.17	38.24	38.15	50.25	74.00	-23.75	peak
6	pp17355.000	15.92	43.23	40.58	32.30	50.87	74.00	-23.13	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 281 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

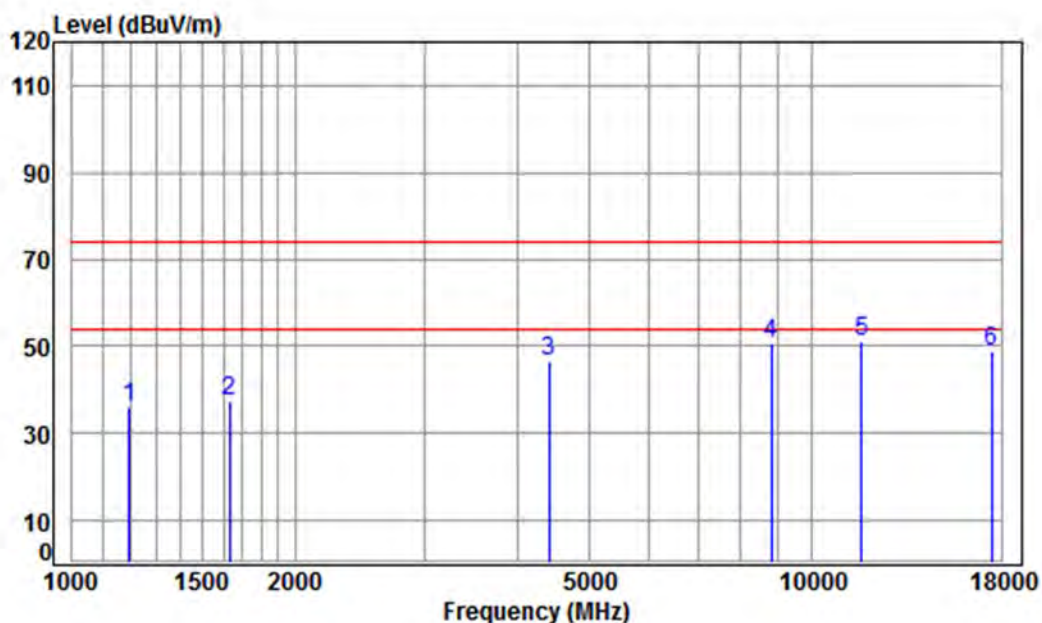

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	48.47	36.15	74.00	-37.85	peak
2	1634.543	5.31	26.40	41.49	47.11	37.33	74.00	-36.67	peak
3	4405.090	7.46	33.60	42.40	47.89	46.55	74.00	-27.45	peak
4	8814.957	10.35	36.38	38.90	42.62	50.45	74.00	-23.55	peak
5	pp11650.000	12.20	38.25	38.29	38.86	51.02	74.00	-22.98	peak
6	17475.000	15.65	43.37	40.68	30.56	48.90	74.00	-25.10	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 282 of 818

Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

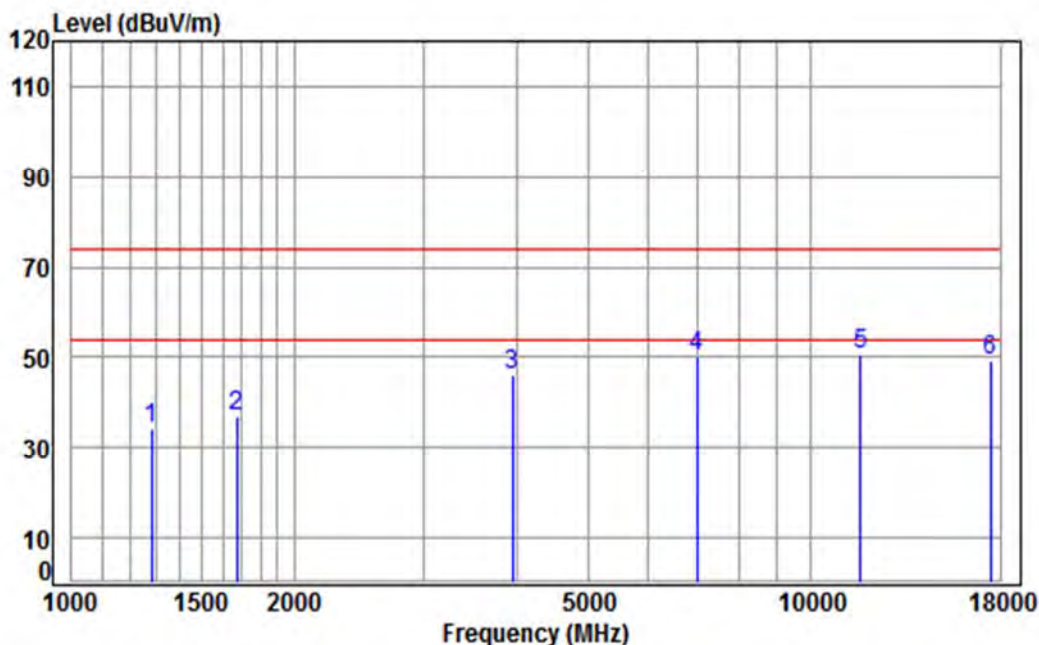

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	45.87	34.22	74.00	-39.78	peak
2	1672.779	5.26	26.56	41.52	46.64	36.94	74.00	-37.06	peak
3	3946.885	6.93	33.46	42.31	48.13	46.21	74.00	-27.79	peak
4	7015.420	10.13	36.49	40.84	44.53	50.31	74.00	-23.69	peak
5	pp11650.000	12.20	38.25	38.29	38.66	50.82	74.00	-23.18	peak
6	17475.000	15.65	43.37	40.68	31.13	49.47	74.00	-24.53	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 283 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

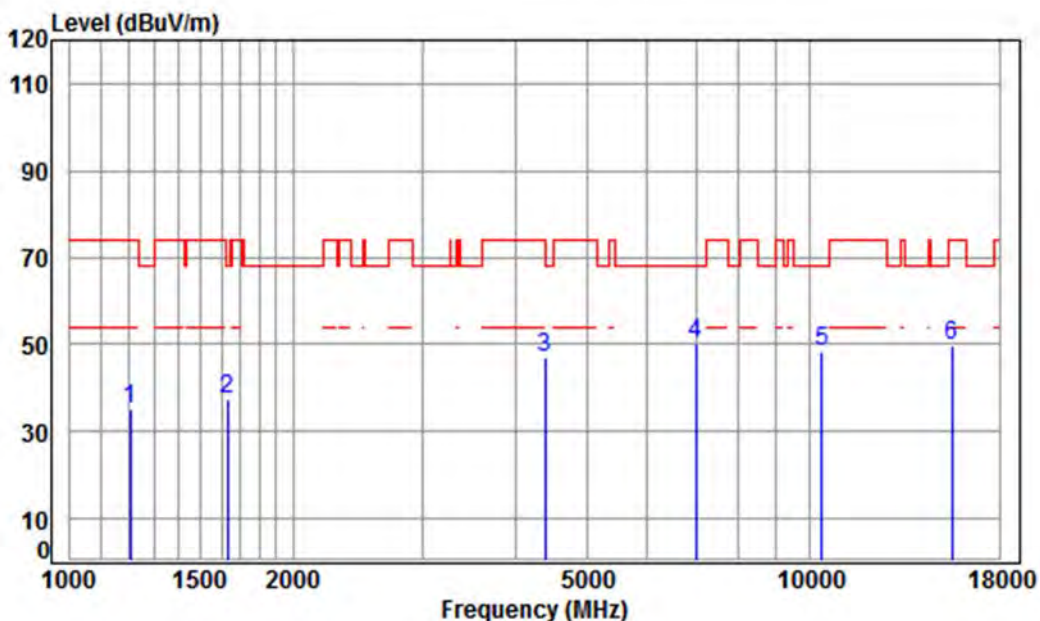

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	47.24	35.00	74.00	-39.00	peak
2	1634.543	5.31	26.40	41.49	47.05	37.27	68.20	-30.93	peak
3	4379.699	7.43	33.60	42.40	48.27	46.90	74.00	-27.10	peak
4 pp	7015.420	10.13	36.49	40.84	44.33	50.11	68.20	-18.09	peak
5	10360.000	11.19	37.24	37.45	37.53	48.51	68.20	-19.69	peak
6	15540.000	14.30	41.38	39.00	32.84	49.52	74.00	-24.48	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 284 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

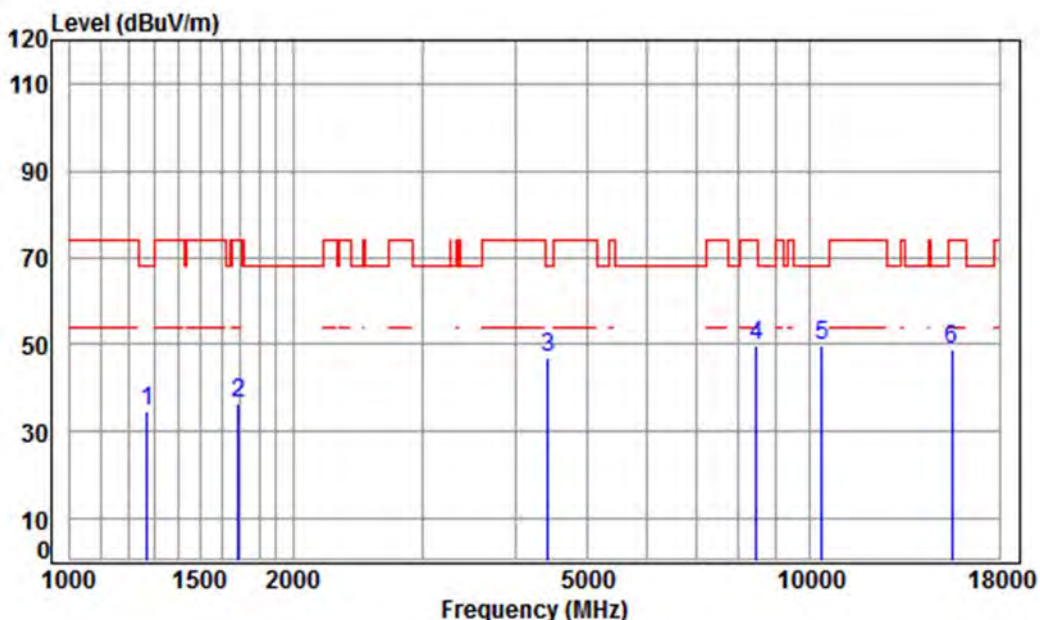

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5180 TX RSE

: Ant 1+2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.41	34.68	68.20	-33.52	peak
2	1687.347	5.24	26.62	41.52	46.04	36.38	74.00	-37.62	peak
3	4417.841	7.47	33.60	42.40	48.55	47.22	68.20	-20.98	peak
4	8465.379	10.25	36.04	39.44	43.03	49.88	74.00	-24.12	peak
5	pp10360.000	11.19	37.24	37.45	38.56	49.54	68.20	-18.66	peak
6	15540.000	14.30	41.38	39.00	32.36	49.04	74.00	-24.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 285 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	----------------	-----------------	------	------	----------

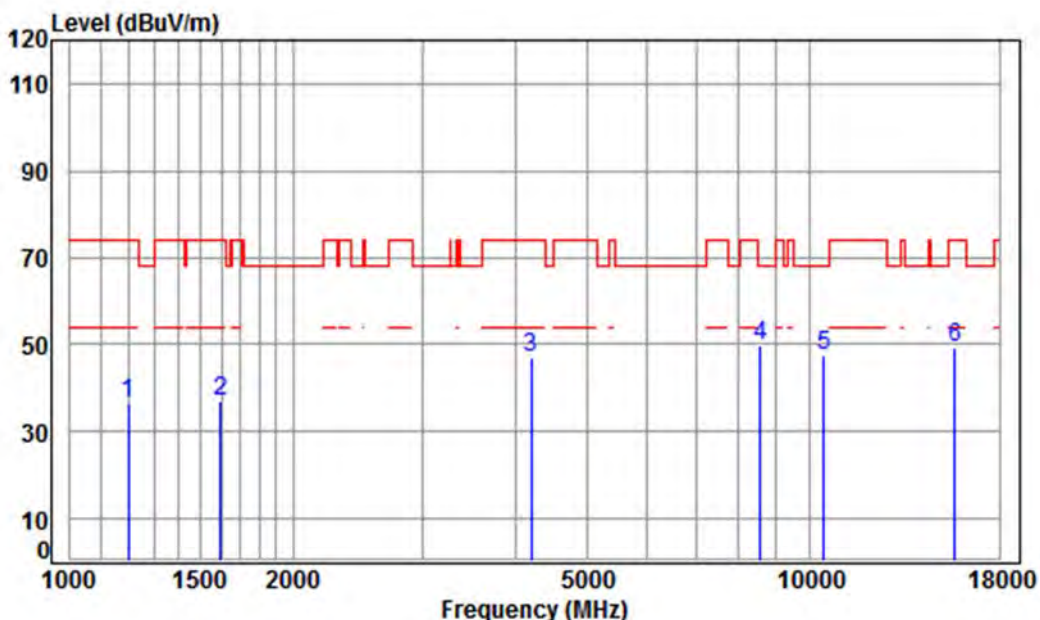

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5220 TX RSE

: Ant 1+2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	48.78	36.50	74.00	-37.50	peak
2	1597.181	5.35	26.24	41.47	46.83	36.95	74.00	-37.05	peak
3	4193.872	7.21	33.60	42.36	48.36	46.81	74.00	-27.19	peak
4 pp	8563.818	10.29	36.08	39.28	42.79	49.88	68.20	-18.32	peak
5	10440.000	11.25	37.16	37.51	36.74	47.64	68.20	-20.56	peak
6	15660.000	14.48	41.34	39.11	32.54	49.25	74.00	-24.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 286 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

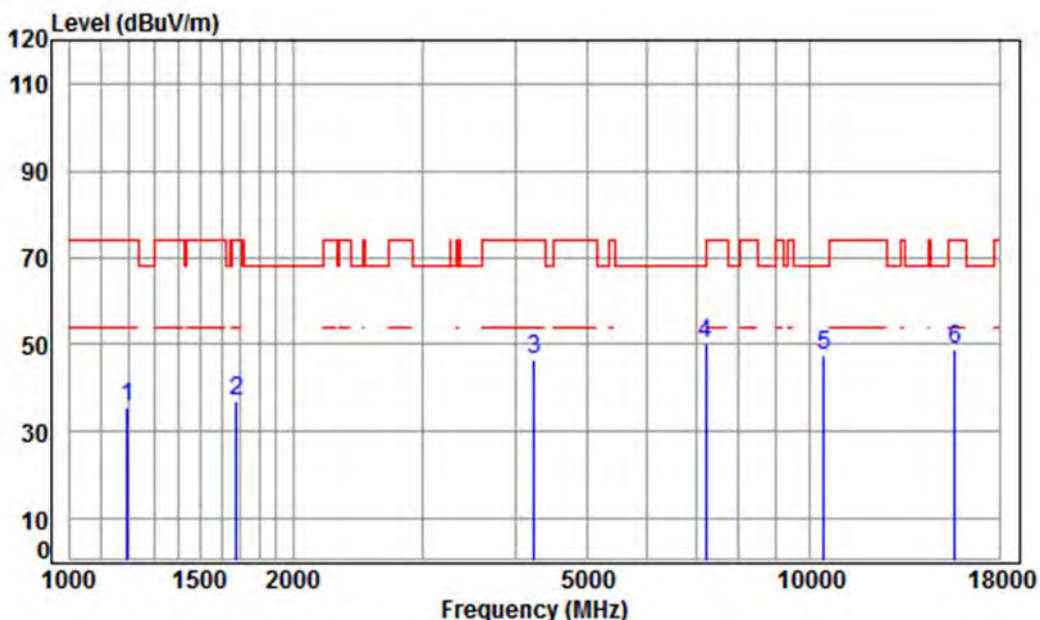

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5220 TX RSE

: Ant 1+2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	47.75	35.43	74.00	-38.57	peak
2	1677.621	5.25	26.58	41.52	46.47	36.78	74.00	-37.22	peak
3	4230.396	7.26	33.60	42.37	48.20	46.69	74.00	-27.31	peak
4 pp	7221.150	10.07	36.41	40.70	44.23	50.01	68.20	-18.19	peak
5	10440.000	11.25	37.16	37.51	36.71	47.61	68.20	-20.59	peak
6	15660.000	14.48	41.34	39.11	32.22	48.93	74.00	-25.07	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 287 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

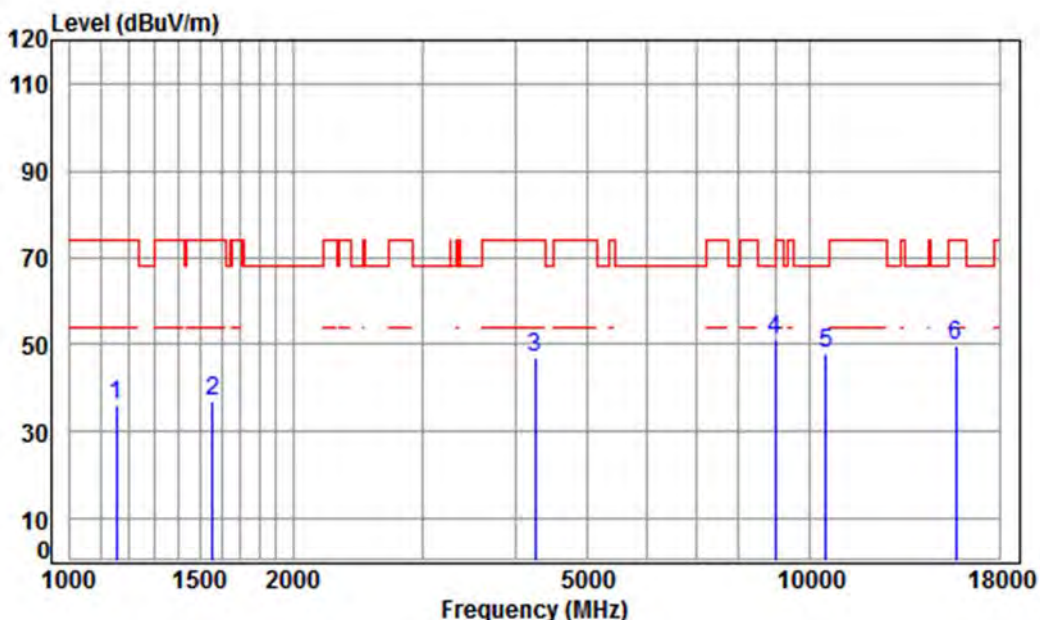

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5240 TX RSE

: Ant 1+2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1155.483	4.24	24.26	41.14	48.59	35.95	74.00	-38.05	peak
2	1556.169	5.41	26.06	41.44	47.03	37.06	74.00	-36.94	peak
3	4254.921	7.28	33.60	42.37	48.46	46.97	74.00	-27.03	peak
4 pp	8969.161	10.39	36.56	38.66	42.99	51.28	68.20	-16.92	peak
5	10480.000	11.28	37.12	37.53	36.98	47.85	68.20	-20.35	peak
6	15720.000	14.57	41.31	39.17	32.82	49.53	74.00	-24.47	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 288 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

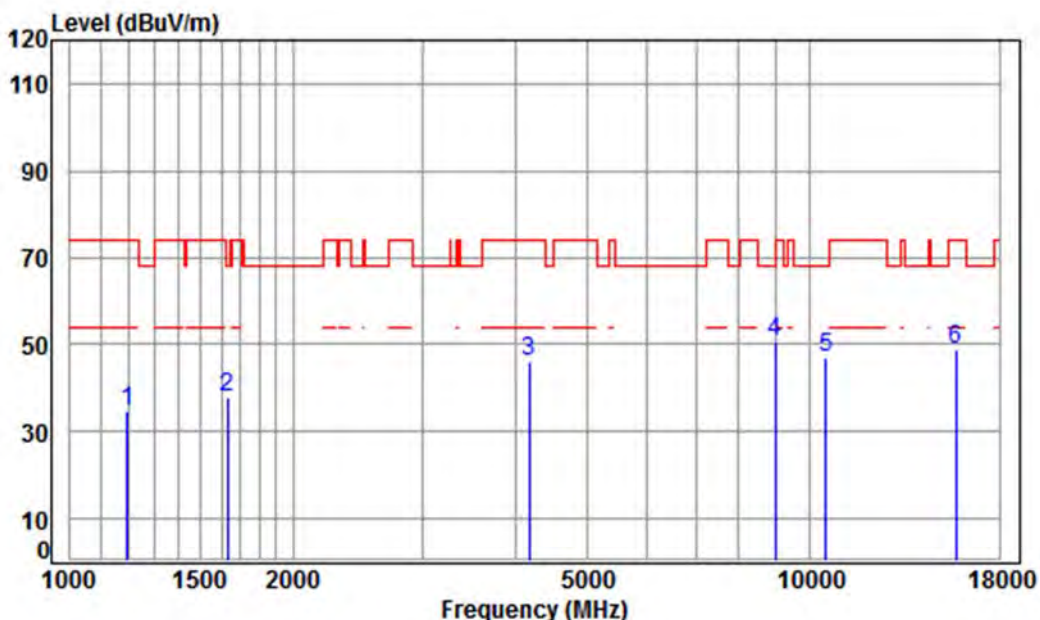

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5240 TX RSE

: Ant 1+2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	46.82	34.50	74.00	-39.50	peak
2	1634.543	5.31	26.40	41.49	47.50	37.72	68.20	-30.48	peak
3	4169.698	7.18	33.60	42.36	47.85	46.27	74.00	-27.73	peak
4 pp	8969.161	10.39	36.56	38.66	42.17	50.46	68.20	-17.74	peak
5	10480.000	11.28	37.12	37.53	36.23	47.10	68.20	-21.10	peak
6	15720.000	14.57	41.31	39.17	31.98	48.69	74.00	-25.31	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 289 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

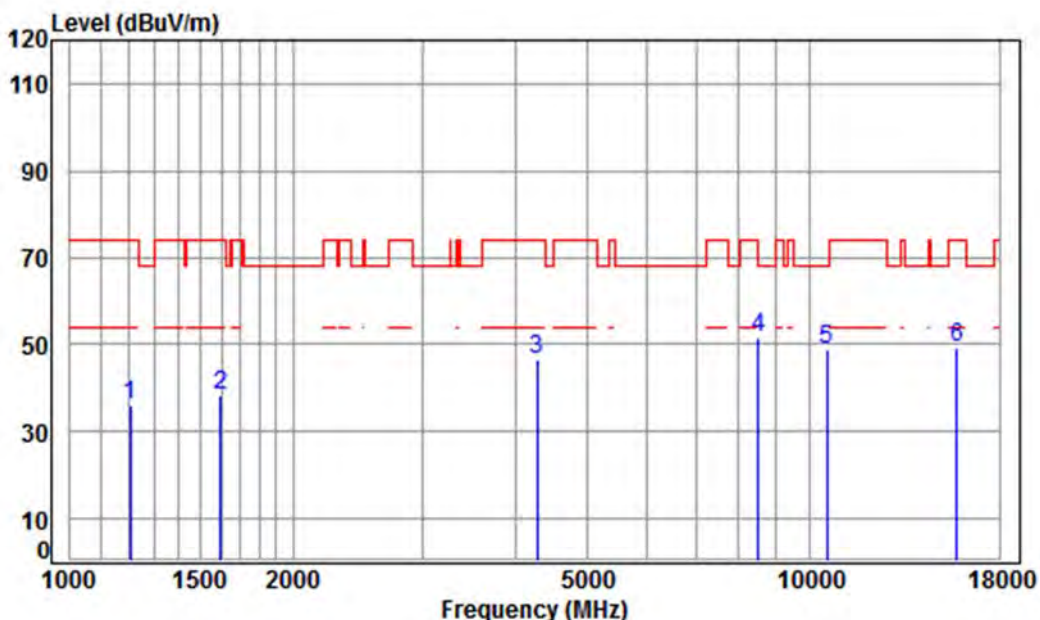

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5260 TX RSE

: Ant 1+2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	48.27	36.03	74.00	-37.97	peak
2	1597.181	5.35	26.24	41.47	47.99	38.11	74.00	-35.89	peak
3	4279.589	7.31	33.60	42.38	47.99	46.52	74.00	-27.48	peak
4 pp	8514.456	10.27	36.02	39.36	44.53	51.46	68.20	-16.74	peak
5	10520.000	11.30	37.12	37.56	37.84	48.70	68.20	-19.50	peak
6	15780.000	14.66	41.29	39.22	32.61	49.34	74.00	-24.66	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 290 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

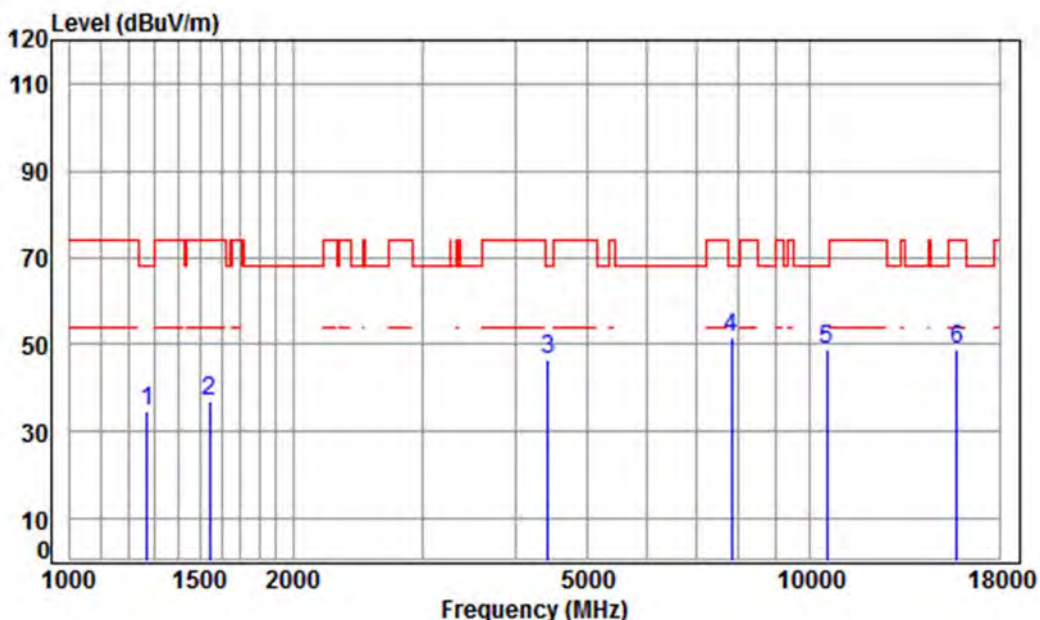

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5260 TX RSE

: Ant 1+2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.37	34.64	68.20	-33.56	peak
2	1542.733	5.42	26.00	41.43	47.01	37.00	74.00	-37.00	peak
3	4417.841	7.47	33.60	42.40	47.71	46.38	68.20	-21.82	peak
4 pp	7829.860	9.97	36.50	40.31	45.54	51.70	68.20	-16.50	peak
5	10520.000	11.30	37.12	37.56	38.19	49.05	68.20	-19.15	peak
6	15780.000	14.66	41.29	39.22	32.13	48.86	74.00	-25.14	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 291 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	----------------	-----------------	------	------	----------

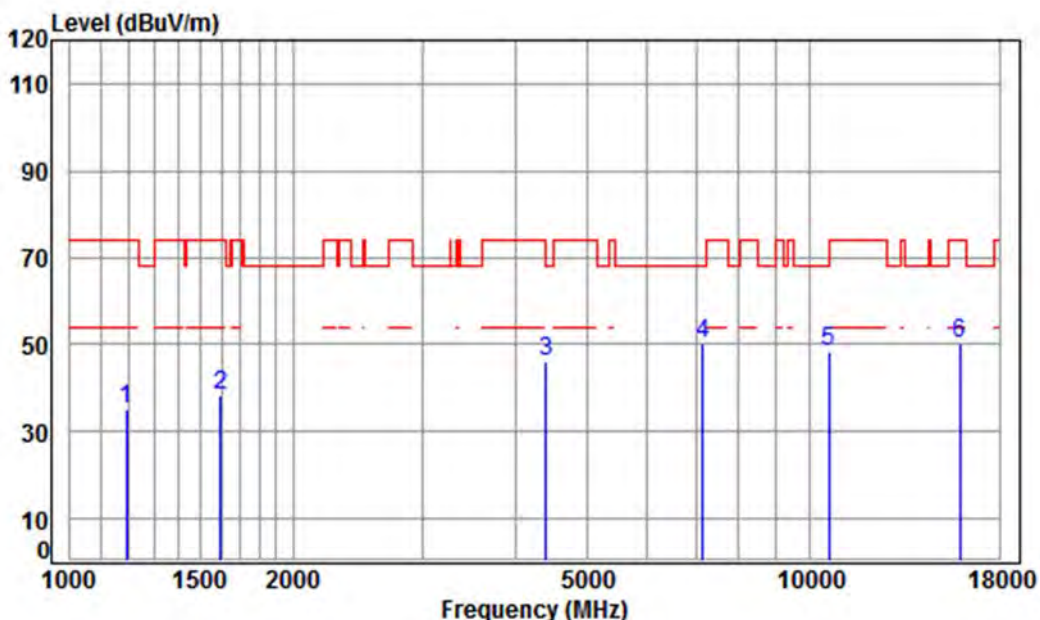

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5300 TX RSE

: Ant 1+2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	47.26	34.91	74.00	-39.09	peak
2	1597.181	5.35	26.24	41.47	48.30	38.42	74.00	-35.58	peak
3	4392.376	7.44	33.60	42.40	47.60	46.24	74.00	-27.76	peak
4 pp	7158.806	10.09	36.43	40.74	44.62	50.40	68.20	-17.80	peak
5	10600.000	11.36	37.22	37.62	37.51	48.47	68.20	-19.73	peak
6	15900.000	14.84	41.24	39.33	33.22	49.97	74.00	-24.03	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 292 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

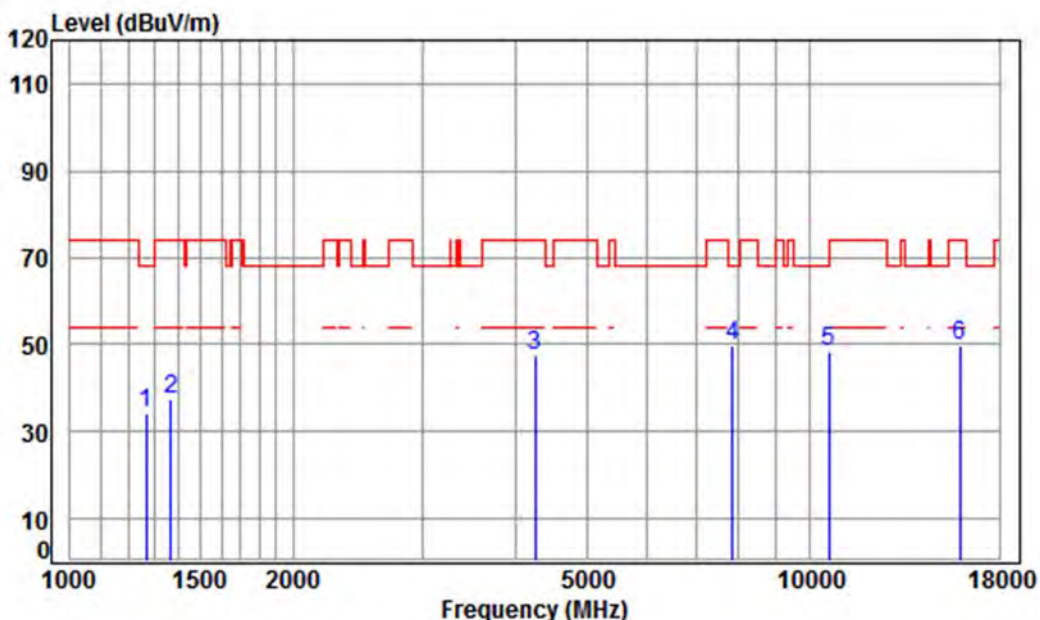

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5300 TX RSE

: Ant 1+2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	46.07	34.31	68.20	-33.89	peak
2	1370.328	5.05	25.26	41.32	48.34	37.33	74.00	-36.67	peak
3	4242.641	7.27	33.60	42.37	48.92	47.42	74.00	-26.58	peak
4 pp	7852.524	9.96	36.51	40.29	43.63	49.81	68.20	-18.39	peak
5	10600.000	11.36	37.22	37.62	37.23	48.19	68.20	-20.01	peak
6	15900.000	14.84	41.24	39.33	33.18	49.93	74.00	-24.07	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 293 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

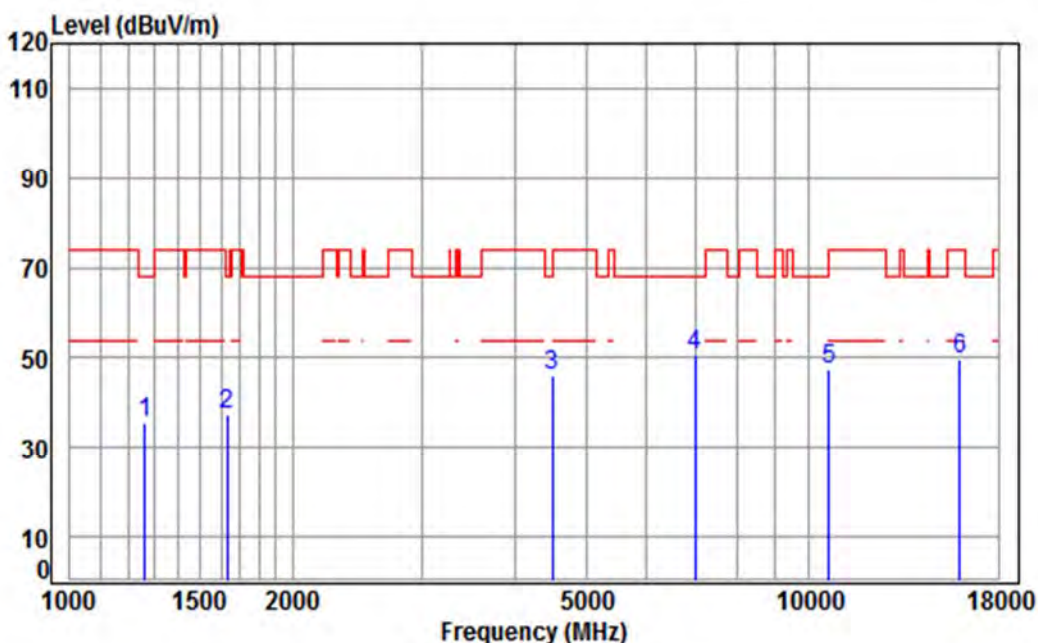

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11AC CH64

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.79	41.23	47.18	35.40	68.20	-32.80	peak
2	1634.543	5.31	26.40	41.49	47.03	37.25	68.20	-30.95	peak
3	4495.125	7.55	33.60	42.42	47.39	46.12	68.20	-22.08	peak
4 pp	7015.420	10.13	36.49	40.84	44.80	50.58	68.20	-17.62	peak
5	10640.000	11.39	37.27	37.64	36.64	47.66	74.00	-26.34	peak
6	15960.000	14.93	41.22	39.38	32.99	49.76	74.00	-24.24	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 294 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

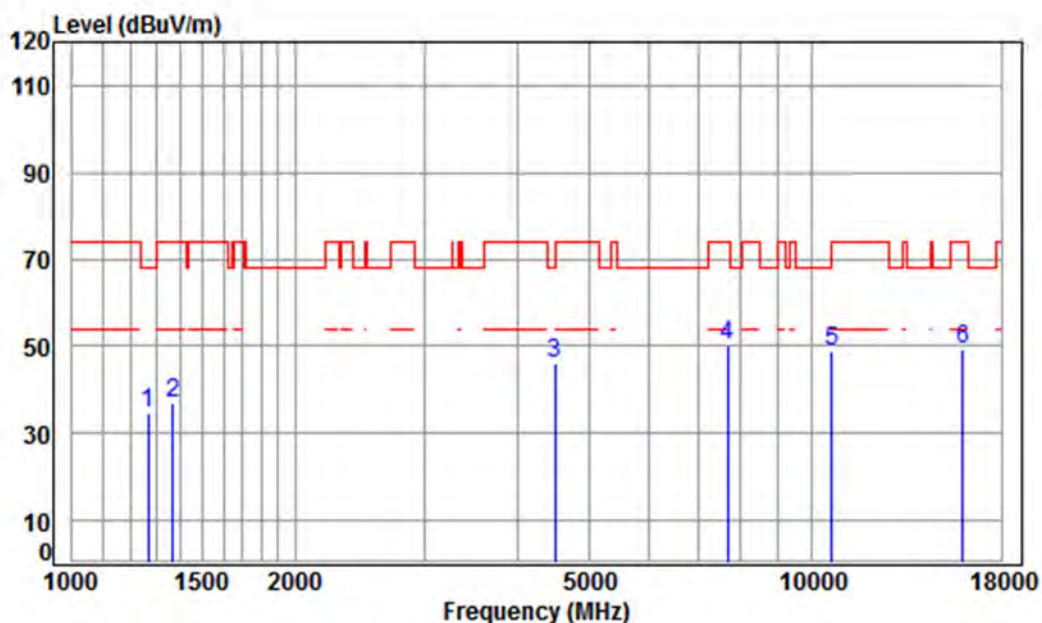

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5320 TX RSE

: Ant 1+2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	46.32	34.56	68.20	-33.64	peak
2	1370.328	5.05	25.26	41.32	47.95	36.94	74.00	-37.06	peak
3 pp	4495.125	7.55	33.60	42.42	47.46	46.19	68.20	-22.01	peak
4	7695.244	9.98	36.42	40.39	43.97	49.98	74.00	-24.02	peak
5	10640.000	11.39	37.27	37.64	38.02	49.04	74.00	-24.96	peak
6	15960.000	14.93	41.22	39.38	32.67	49.44	74.00	-24.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 295 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

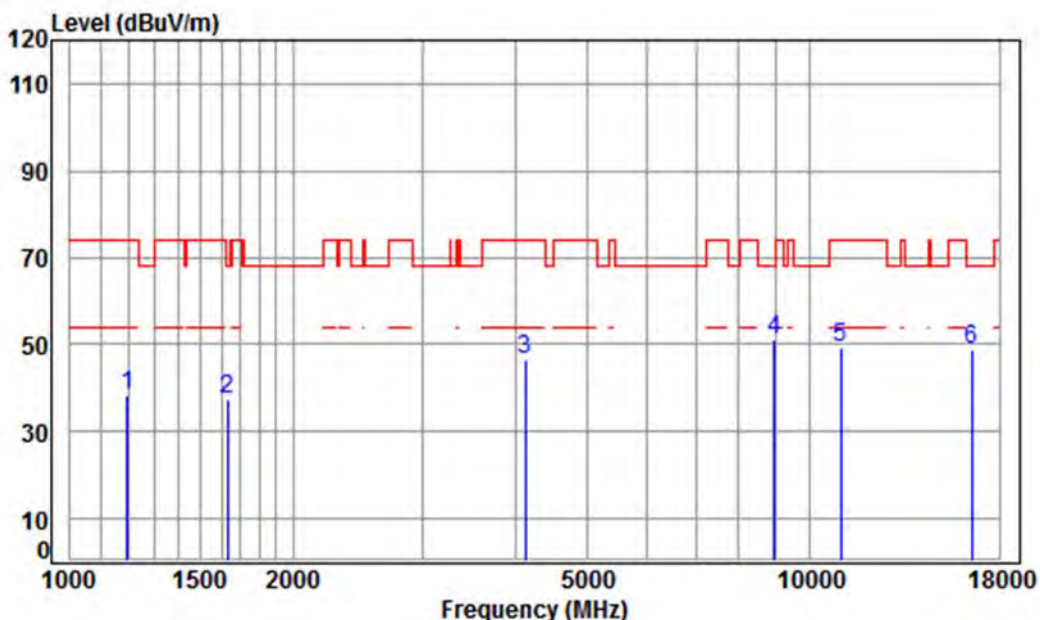

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	50.81	38.49	74.00	-35.51	peak
2	1629.825	5.31	26.38	41.49	47.26	37.46	68.20	-30.74	peak
3	4121.768	7.13	33.60	42.35	47.97	46.35	74.00	-27.65	peak
4 pp	8943.274	10.39	36.53	38.70	42.70	50.92	68.20	-17.28	peak
5	11000.000	11.63	37.70	37.88	37.96	49.41	74.00	-24.59	peak
6	16500.000	14.50	42.70	39.86	31.29	48.63	68.20	-19.57	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 296 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

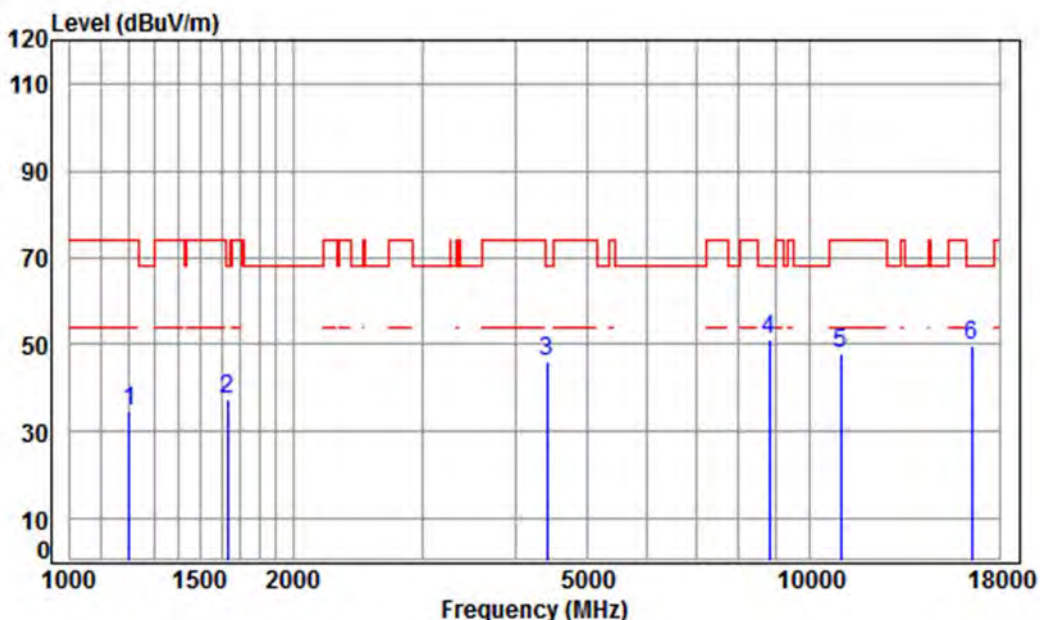

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5500 TX RSE

: Ant 1+2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.97	34.70	74.00	-39.30	peak
2	1634.543	5.31	26.40	41.49	47.24	37.46	68.20	-30.74	peak
3	4405.090	7.46	33.60	42.40	47.62	46.28	68.20	-21.92	peak
4 pp	8789.516	10.35	36.35	38.93	43.55	51.32	68.20	-16.88	peak
5	11000.000	11.63	37.70	37.88	36.53	47.98	74.00	-26.02	peak
6	16500.000	14.50	42.70	39.86	32.23	49.57	68.20	-18.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 297 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	----------------	-----------------	------	------	----------

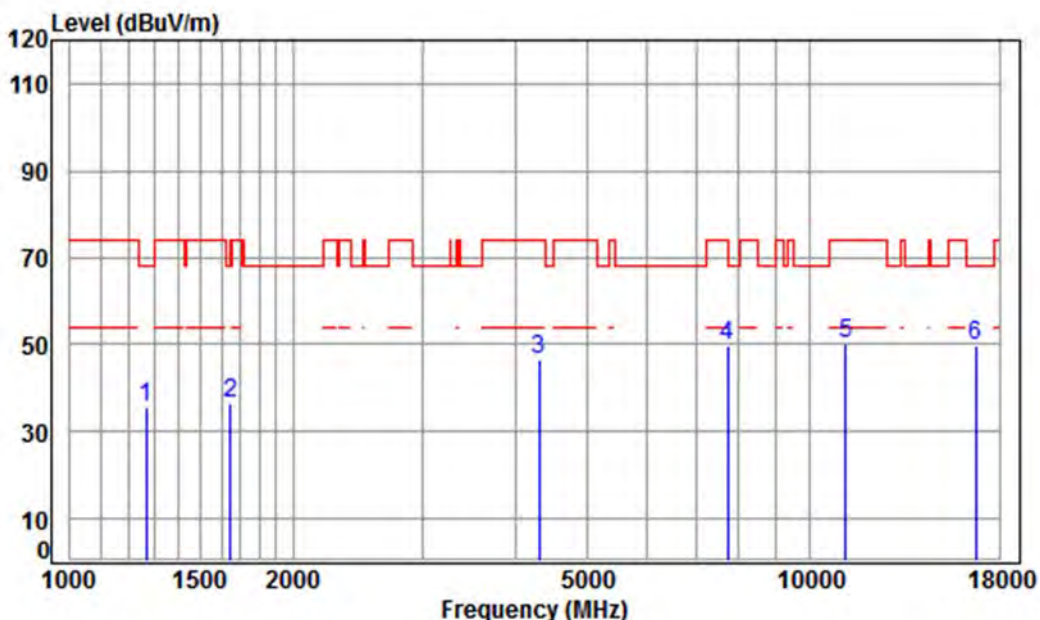

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5580 TX RSE

: Ant 1+2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	47.48	35.72	68.20	-32.48	peak
2	1648.778	5.29	26.46	41.50	46.18	36.43	68.20	-31.77	peak
3	4304.400	7.34	33.60	42.38	47.90	46.46	74.00	-27.54	peak
4	7739.857	9.98	36.45	40.36	43.78	49.85	74.00	-24.15	peak
5	11160.000	11.80	37.83	37.98	38.34	49.99	74.00	-24.01	peak
6	pp16740.000	15.57	42.75	40.07	31.55	49.80	68.20	-18.40	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 298 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

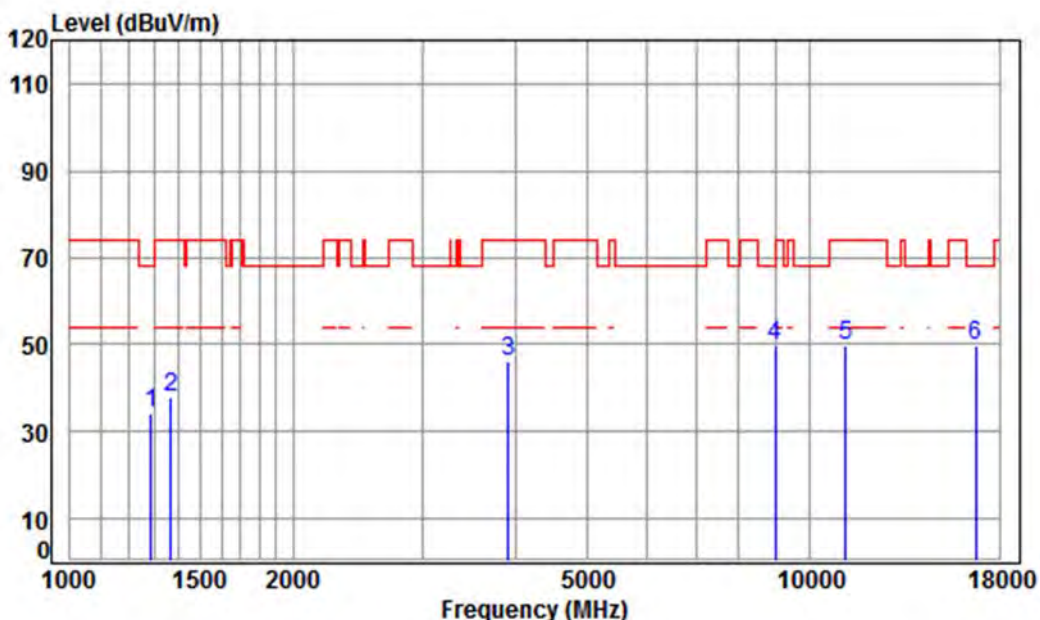

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5580 TX RSE

: Ant 1+2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.89	41.25	45.80	34.19	68.20	-34.01	peak
2	1370.328	5.05	25.26	41.32	48.90	37.89	74.00	-36.11	peak
3	3912.809	6.89	33.37	42.31	48.23	46.18	74.00	-27.82	peak
4	8969.161	10.39	36.56	38.66	41.55	49.84	68.20	-18.36	peak
5	11160.000	11.80	37.83	37.98	37.96	49.61	74.00	-24.39	peak
6	pp16740.000	15.57	42.75	40.07	31.62	49.87	68.20	-18.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 299 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

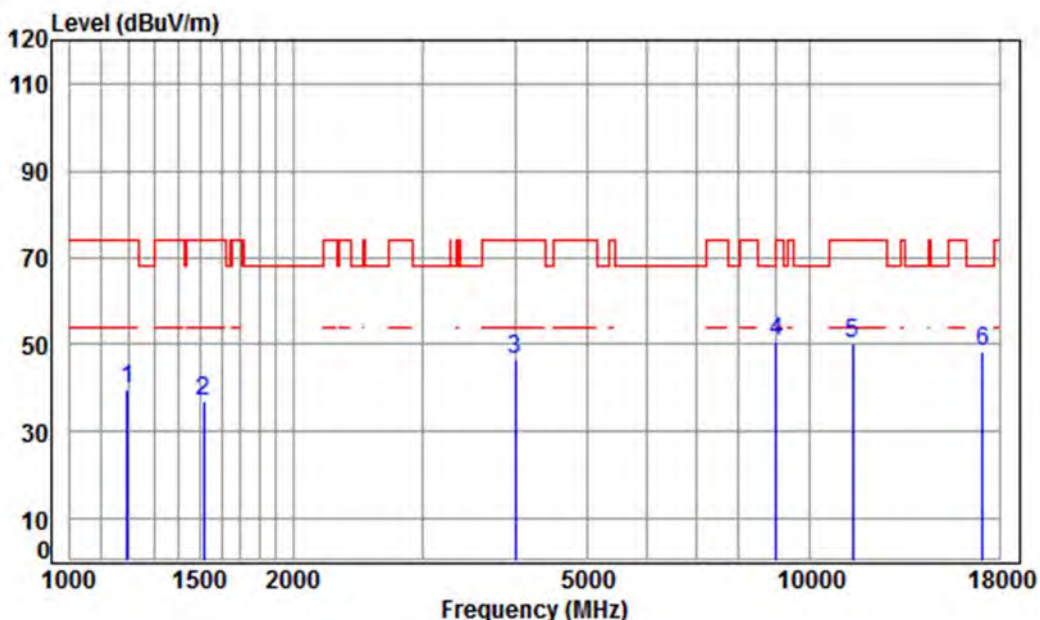

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	52.05	39.73	74.00	-34.27	peak
2	1516.210	5.46	25.87	41.42	46.90	36.81	74.00	-37.19	peak
3	3992.781	6.97	33.58	42.32	48.46	46.69	74.00	-27.31	peak
4 pp	8995.123	10.40	36.59	38.62	42.29	50.66	68.20	-17.54	peak
5	11400.000	12.04	38.02	38.13	38.46	50.39	74.00	-23.61	peak
6	17100.000	16.49	42.92	40.37	29.51	48.55	68.20	-19.65	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 300 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

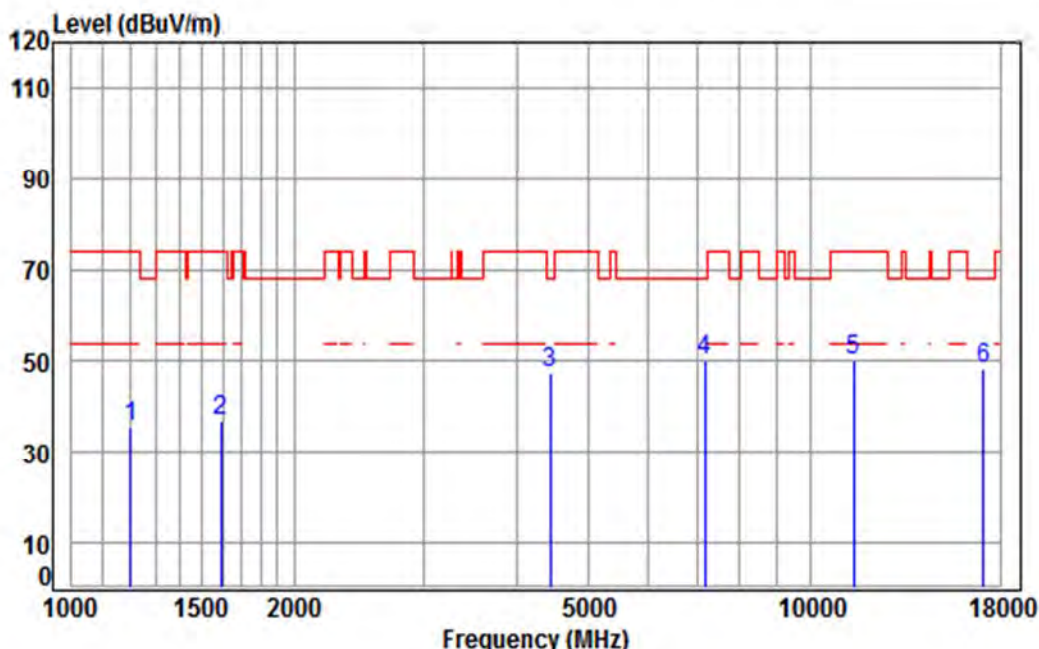

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5700 TX RSE

: Ant 1+2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.49	41.19	47.71	35.44	74.00	-38.56 peak
2	1592.571	5.36	26.22	41.47	46.76	36.87	74.00	-37.13 peak
3	4430.628	7.48	33.60	42.41	48.73	47.40	68.20	-20.80 peak
4 pp	7179.527	10.08	36.43	40.73	44.39	50.17	68.20	-18.03 peak
5	11400.000	12.04	38.02	38.13	38.20	50.13	74.00	-23.87 peak
6	17100.000	16.49	42.92	40.37	29.50	48.54	68.20	-19.66 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 301 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

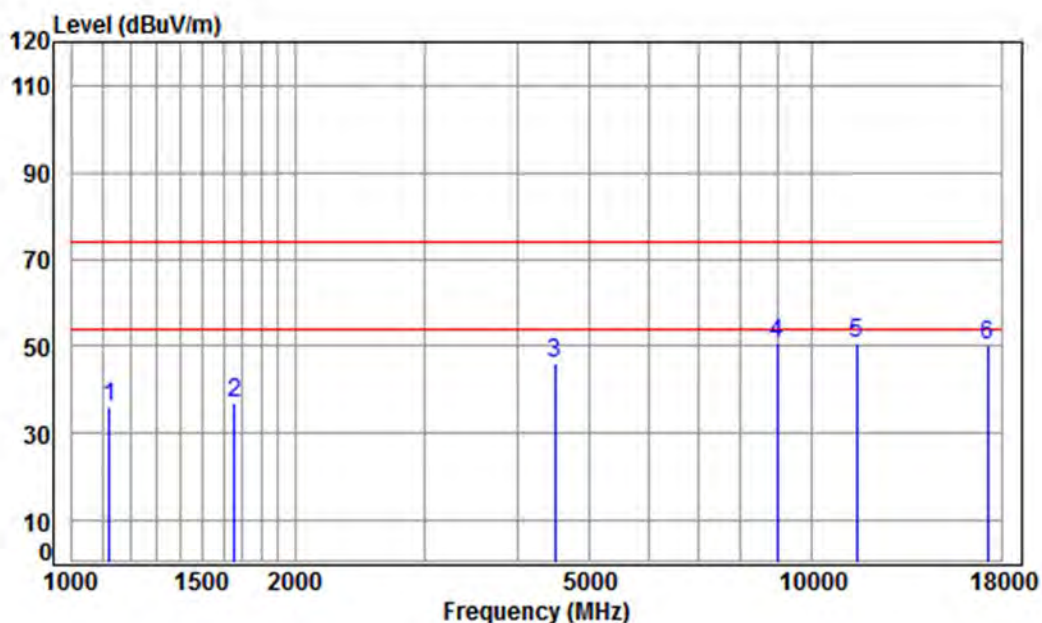

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1122.563	4.10	24.08	41.12	49.16	36.22	74.00	-37.78	peak
2	1658.337	5.28	26.50	41.51	46.80	37.07	74.00	-36.93	peak
3	4495.125	7.55	33.60	42.42	47.53	46.26	74.00	-27.74	peak
4	8969.161	10.39	36.56	38.66	42.14	50.43	74.00	-23.57	peak
5	pp11490.000	12.13	38.09	38.19	38.60	50.63	74.00	-23.37	peak
6	17235.000	16.18	43.08	40.48	31.49	50.27	74.00	-23.73	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 302 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

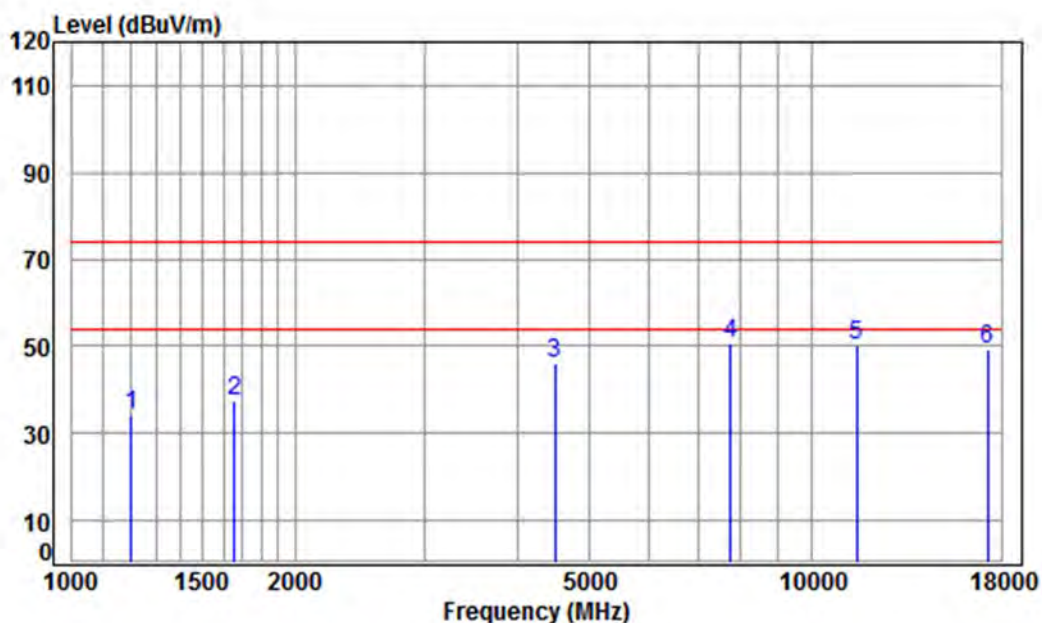

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5745 TX RSE

: Ant 1+2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	46.38	34.11	74.00	-39.89	peak
2	1658.337	5.28	26.50	41.51	46.93	37.20	74.00	-36.80	peak
3	4495.125	7.55	33.60	42.42	47.39	46.12	74.00	-27.88	peak
4 pp	7762.260	9.97	36.46	40.35	44.35	50.43	74.00	-23.57	peak
5	11490.000	12.13	38.09	38.19	38.10	50.13	74.00	-23.87	peak
6	17235.000	16.18	43.08	40.48	30.59	49.37	74.00	-24.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 303 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	----------------	-----------------	------	------	----------

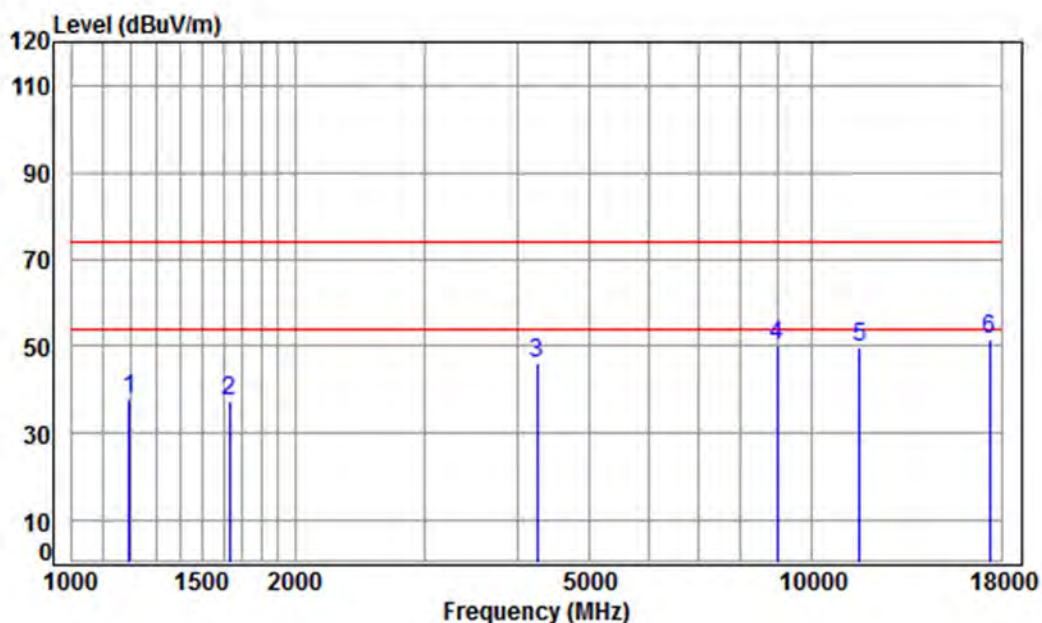

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	41.18	50.01	37.69	74.00	-36.31	peak
2	1629.825	5.31	26.38	41.49	47.37	37.57	74.00	-36.43	peak
3	4242.641	7.27	33.60	42.37	47.77	46.27	74.00	-27.73	peak
4	8969.161	10.39	36.56	38.66	41.80	50.09	74.00	-23.91	peak
5	11570.000	12.17	38.17	38.24	37.69	49.79	74.00	-24.21	peak
6	pp17355.000	15.92	43.23	40.58	32.81	51.38	74.00	-22.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 304 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

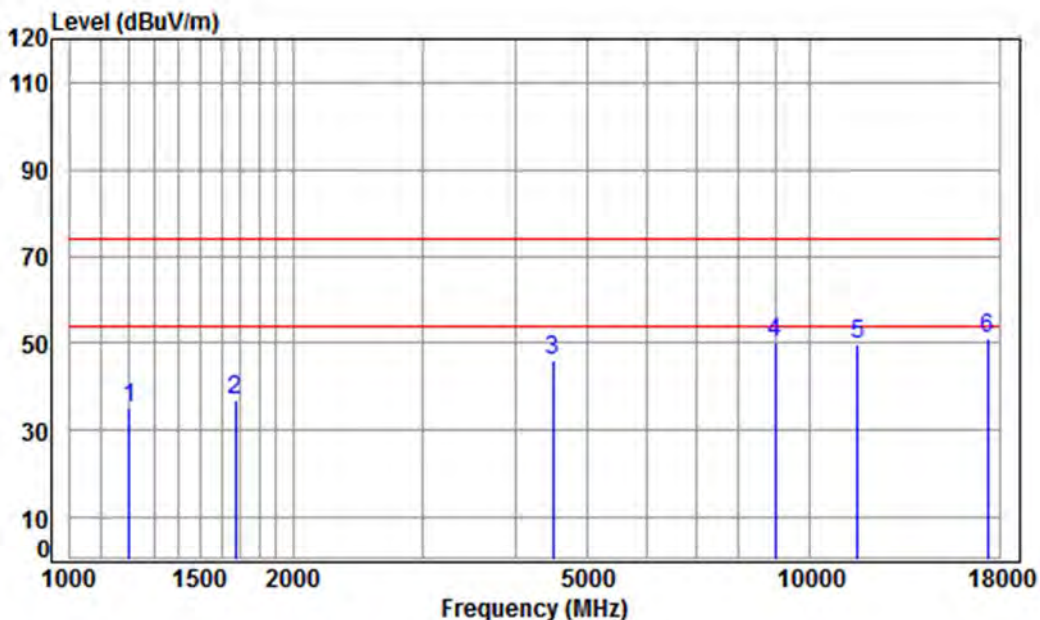

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5785 TX RSE

: Ant 1+2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	47.58	35.31	74.00	-38.69	peak
2	1672.779	5.26	26.56	41.52	46.86	37.16	74.00	-36.84	peak
3	4495.125	7.55	33.60	42.42	47.38	46.11	74.00	-27.89	peak
4	8969.161	10.39	36.56	38.66	41.90	50.19	74.00	-23.81	peak
5	11570.000	12.17	38.17	38.24	37.61	49.71	74.00	-24.29	peak
6	pp17355.000	15.92	43.23	40.58	32.38	50.95	74.00	-23.05	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 305 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

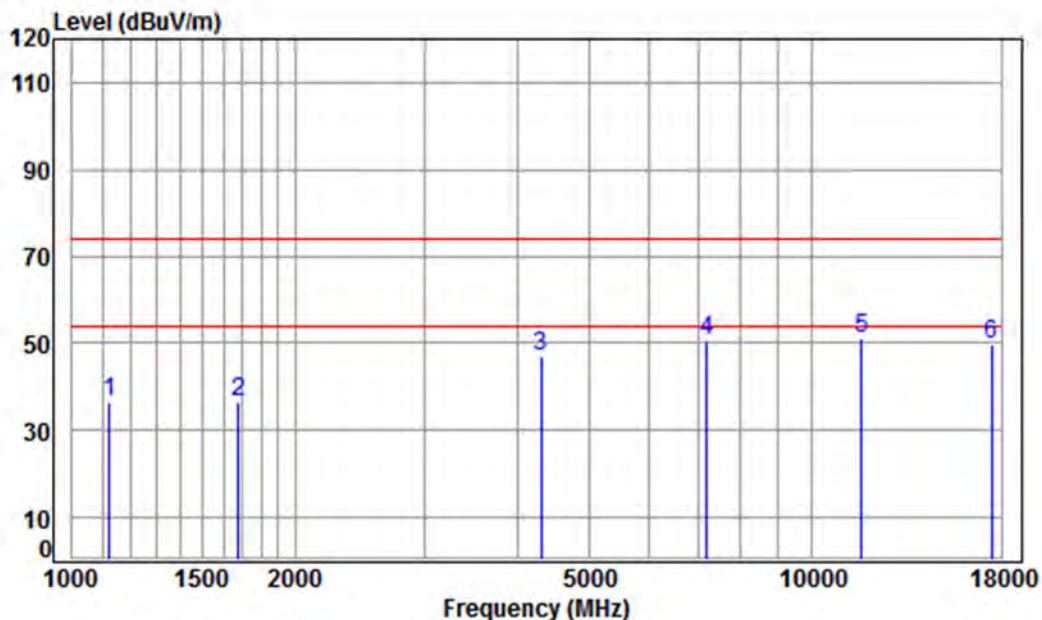

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1122.563	4.10	24.08	41.12	49.23	36.29	74.00	-37.71	peak
2	1677.621	5.25	26.58	41.52	46.22	36.53	74.00	-37.47	peak
3	4304.400	7.34	33.60	42.38	48.33	46.89	74.00	-27.11	peak
4	7200.309	10.08	36.42	40.72	44.96	50.74	74.00	-23.26	peak
5	pp11650.000	12.20	38.25	38.29	38.95	51.11	74.00	-22.89	peak
6	17475.000	15.65	43.37	40.68	31.47	49.81	74.00	-24.19	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 306 of 818

Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

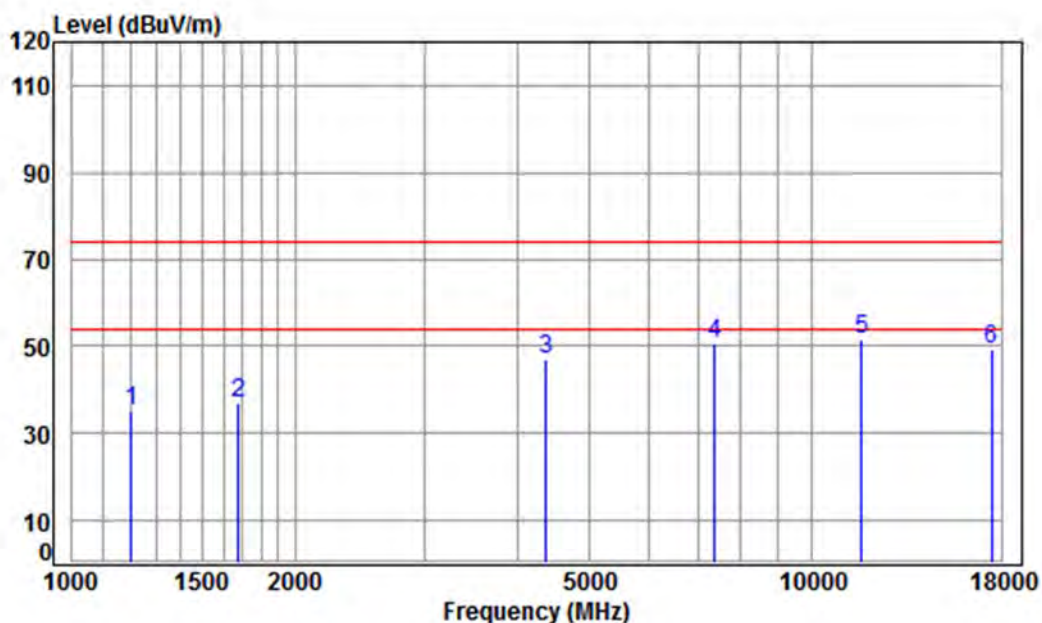

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5825 TX RSE

: Ant 1+2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	47.28	35.01	74.00	-38.99	peak
2	1677.621	5.25	26.58	41.52	46.81	37.12	74.00	-36.88	peak
3	4367.058	7.41	33.60	42.39	48.17	46.79	74.00	-27.21	peak
4	7390.070	10.03	36.34	40.59	44.91	50.69	74.00	-23.31	peak
5	pp11650.000	12.20	38.25	38.29	39.31	51.47	74.00	-22.53	peak
6	17475.000	15.65	43.37	40.68	31.05	49.39	74.00	-24.61	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 307 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

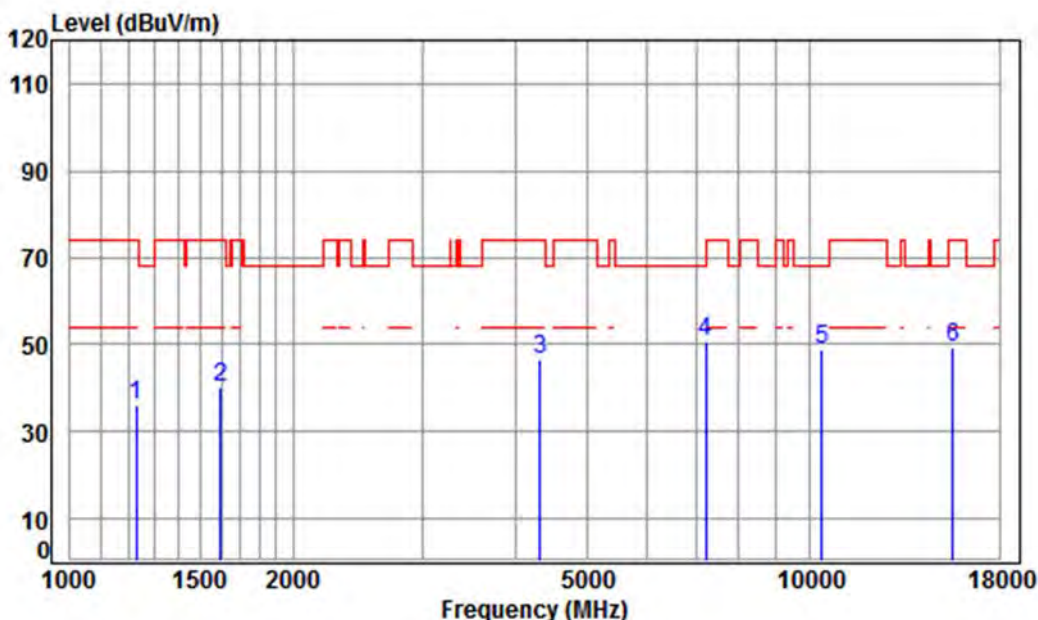

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	4.53	24.61	41.21	48.20	36.13	74.00	-37.87	peak
2	1597.181	5.35	26.24	41.47	49.84	39.96	74.00	-34.04	peak
3	4316.859	7.36	33.60	42.38	48.00	46.58	74.00	-27.42	peak
4 pp	7221.150	10.07	36.41	40.70	45.08	50.86	68.20	-17.34	peak
5	10380.000	11.21	37.22	37.47	37.75	48.71	68.20	-19.49	peak
6	15570.000	14.35	41.37	39.03	32.69	49.38	74.00	-24.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 308 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

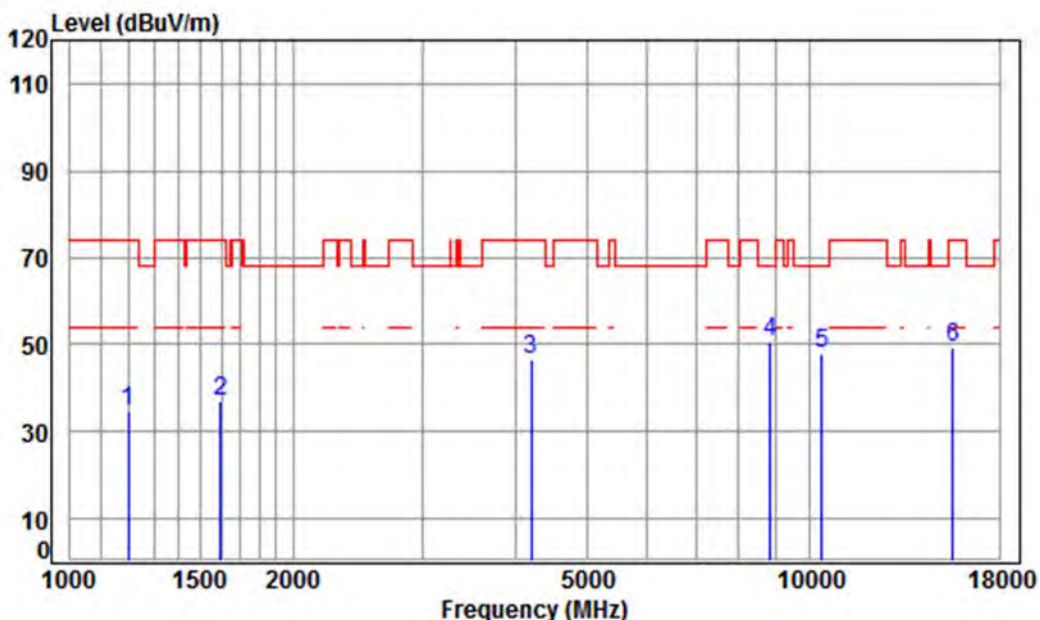

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	46.90	34.62	74.00	-39.38	peak
2	1597.181	5.35	26.24	41.47	46.78	36.90	74.00	-37.10	peak
3	4193.872	7.21	33.60	42.36	48.14	46.59	74.00	-27.41	peak
4 pp	8840.473	10.36	36.41	38.86	42.61	50.52	68.20	-17.68	peak
5	10380.000	11.21	37.22	37.47	37.09	48.05	68.20	-20.15	peak
6	15570.000	14.35	41.37	39.03	32.55	49.24	74.00	-24.76	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 309 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

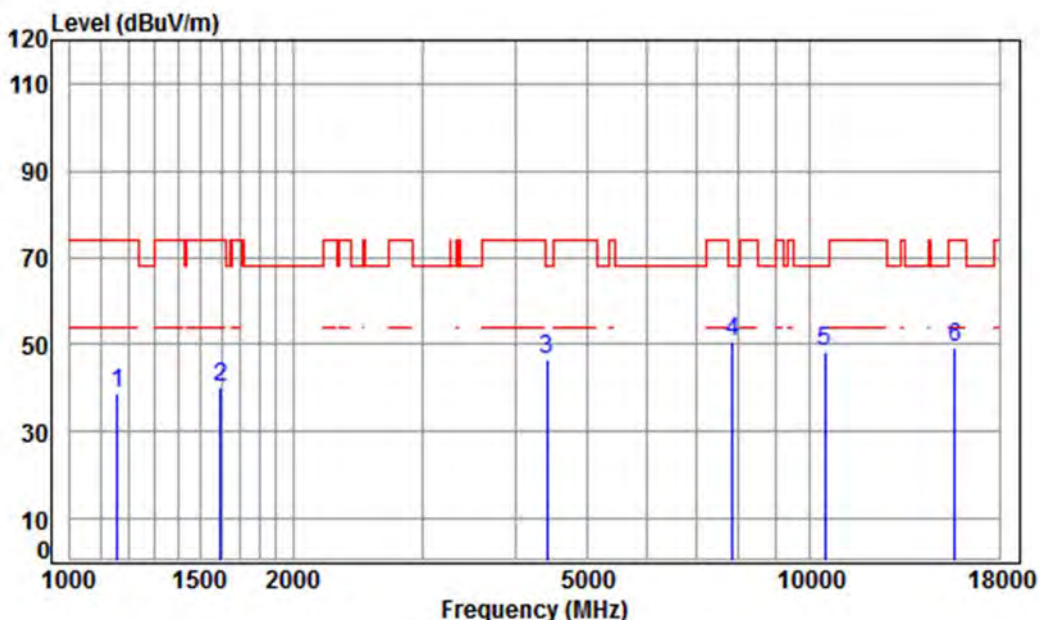

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1158.828	4.25	24.27	41.15	51.47	38.84	74.00	-35.16	peak
2	1597.181	5.35	26.24	41.47	50.17	40.29	74.00	-33.71	peak
3	4405.090	7.46	33.60	42.40	47.67	46.33	68.20	-21.87	peak
4 pp	7852.524	9.96	36.51	40.29	44.59	50.77	68.20	-17.43	peak
5	10460.000	11.26	37.14	37.52	37.48	48.36	68.20	-19.84	peak
6	15690.000	14.53	41.32	39.14	32.68	49.39	74.00	-24.61	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 310 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

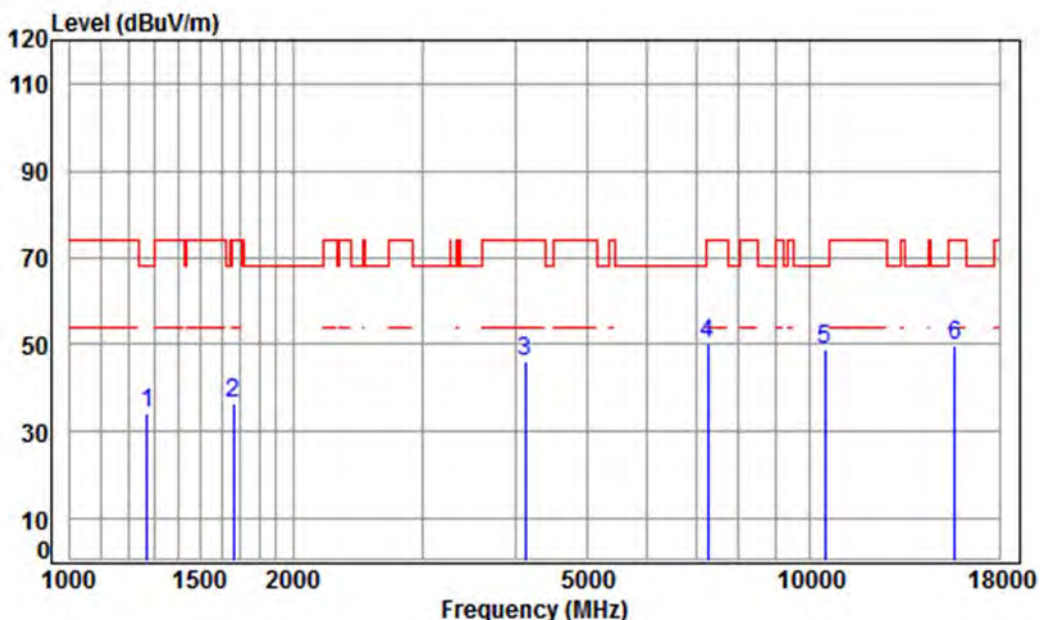

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	45.98	34.25	68.20	-33.95	peak
2	1663.137	5.27	26.52	41.51	46.41	36.69	74.00	-37.31	peak
3	4121.768	7.13	33.60	42.35	47.83	46.21	74.00	-27.79	peak
4	7263.015	10.06	36.39	40.67	44.40	50.18	74.00	-23.82	peak
5	pp10460.000	11.26	37.14	37.52	37.86	48.74	68.20	-19.46	peak
6	15690.000	14.53	41.32	39.14	33.07	49.78	74.00	-24.22	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 311 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

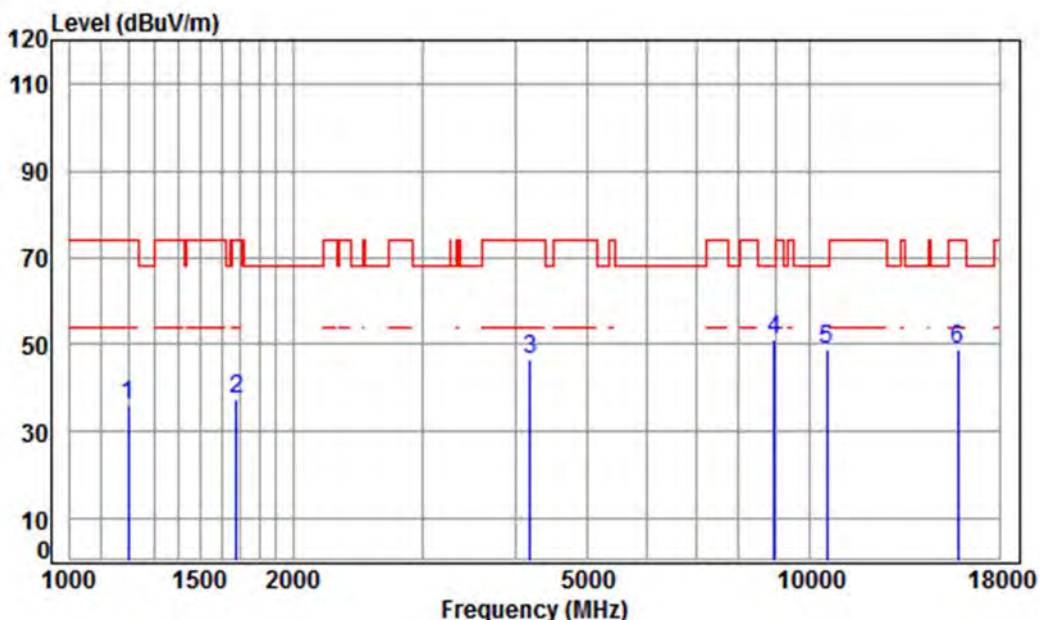

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	48.25	35.97	74.00	-38.03	peak
2	1677.621	5.25	26.58	41.52	47.02	37.33	74.00	-36.67	peak
3	4181.768	7.20	33.60	42.36	48.31	46.75	74.00	-27.25	peak
4 pp	8943.274	10.39	36.53	38.70	42.90	51.12	68.20	-17.08	peak
5	10540.000	11.32	37.15	37.57	37.86	48.76	68.20	-19.44	peak
6	15810.000	14.71	41.28	39.25	31.96	48.70	74.00	-25.30	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 312 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

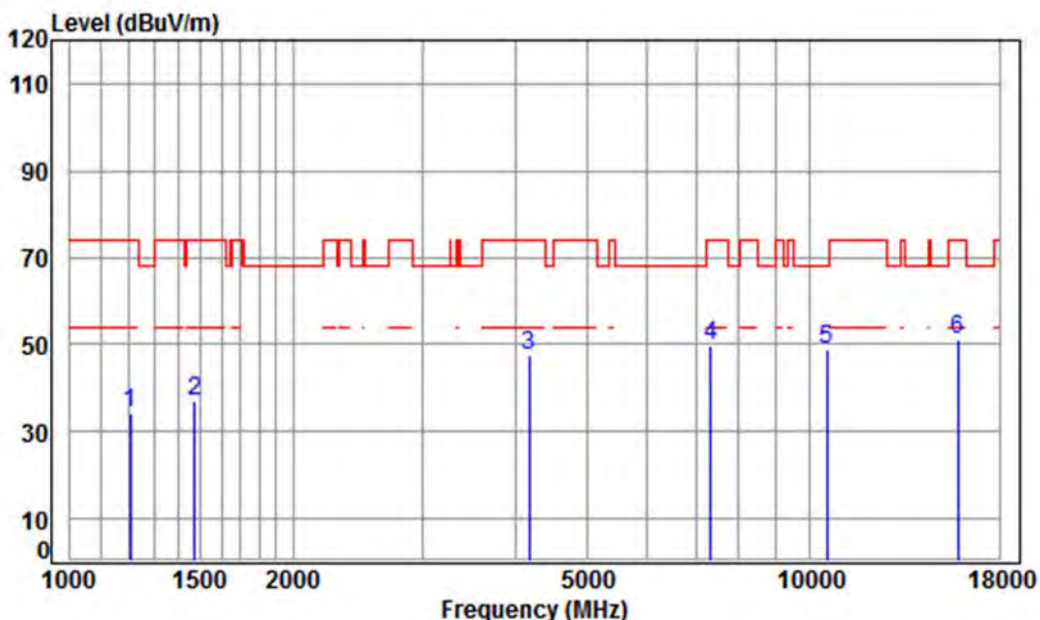

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	41.19	46.28	34.04	74.00	-39.96	peak
2	1473.013	5.39	25.69	41.39	47.37	37.06	74.00	-36.94	peak
3	4169.698	7.18	33.60	42.36	48.98	47.40	74.00	-26.60	peak
4	7326.267	10.04	36.37	40.63	44.15	49.93	74.00	-24.07	peak
5	pp10540.000	11.32	37.15	37.57	38.15	49.05	68.20	-19.15	peak
6	15810.000	14.71	41.28	39.25	34.29	51.03	74.00	-22.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 313 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

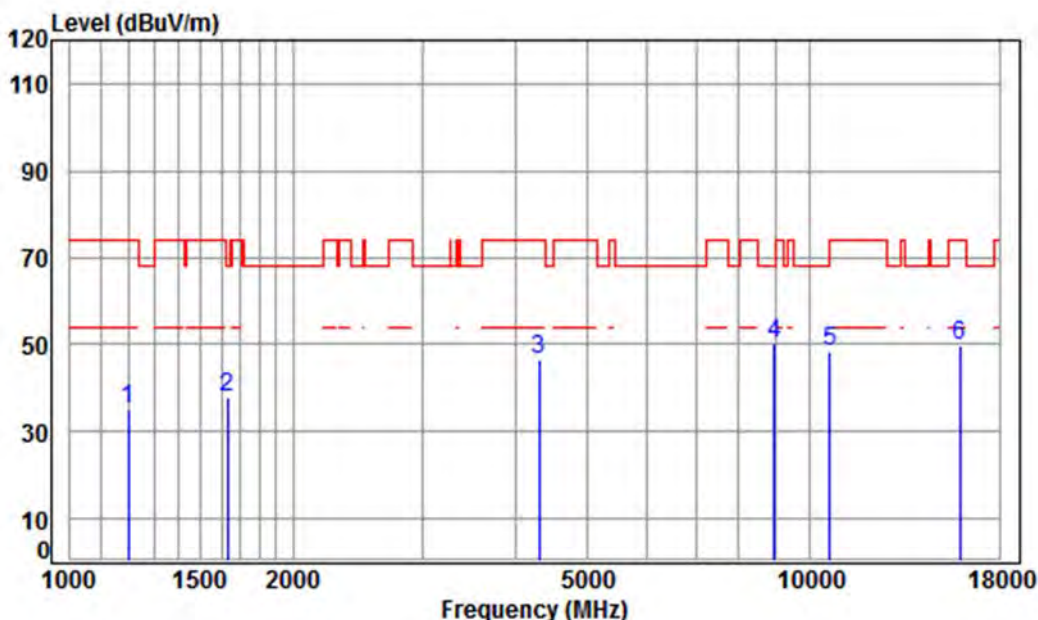

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	47.39	35.11	74.00	-38.89	peak
2	1629.825	5.31	26.38	41.49	47.50	37.70	68.20	-30.50	peak
3	4304.400	7.34	33.60	42.38	47.86	46.42	74.00	-27.58	peak
4 pp	8943.274	10.39	36.53	38.70	41.75	49.97	68.20	-18.23	peak
5	10620.000	11.37	37.25	37.63	37.24	48.23	74.00	-25.77	peak
6	15930.000	14.89	41.23	39.36	33.13	49.89	74.00	-24.11	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 314 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

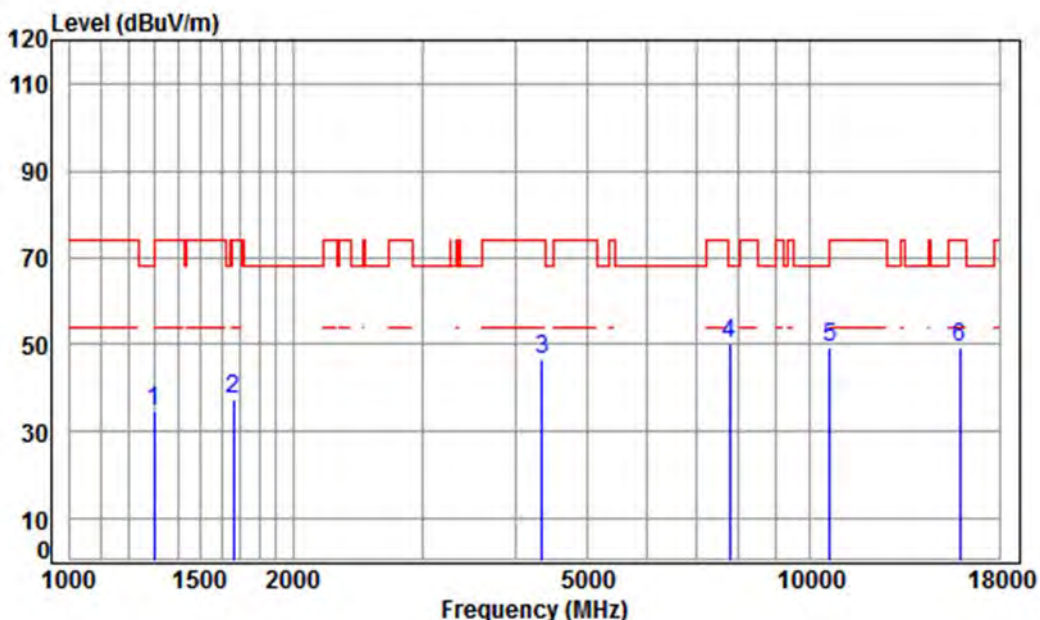

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	41.26	46.38	34.85	68.20	-33.35	peak
2	1663.137	5.27	26.52	41.51	47.00	37.28	74.00	-36.72	peak
3	4341.886	7.38	33.60	42.39	47.88	46.47	74.00	-27.53	peak
4 pp	7784.729	9.97	36.47	40.33	44.07	50.18	68.20	-18.02	peak
5	10620.000	11.37	37.25	37.63	38.11	49.10	74.00	-24.90	peak
6	15930.000	14.89	41.23	39.36	32.59	49.35	74.00	-24.65	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 315 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

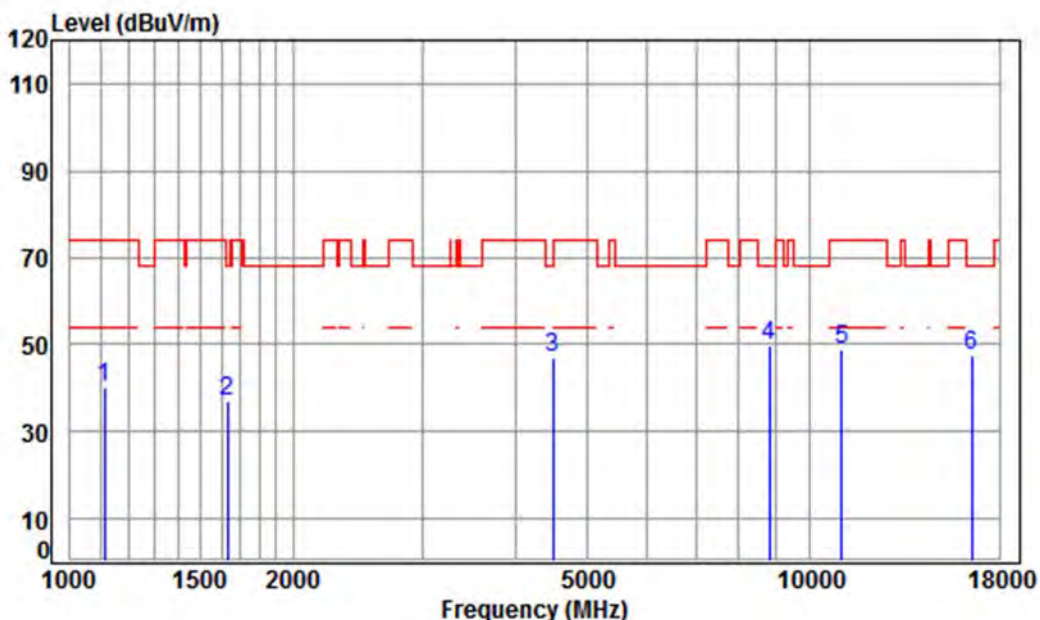

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1112.872	4.06	24.03	41.11	53.17	40.15	74.00	-33.85	peak
2	1634.543	5.31	26.40	41.49	46.86	37.08	68.20	-31.12	peak
3	4495.125	7.55	33.60	42.42	48.36	47.09	68.20	-21.11	peak
4 pp	8789.516	10.35	36.35	38.93	42.11	49.88	68.20	-18.32	peak
5	11020.000	11.65	37.72	37.89	37.44	48.92	74.00	-25.08	peak
6	16530.000	14.63	42.71	39.89	29.87	47.32	68.20	-20.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 316 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

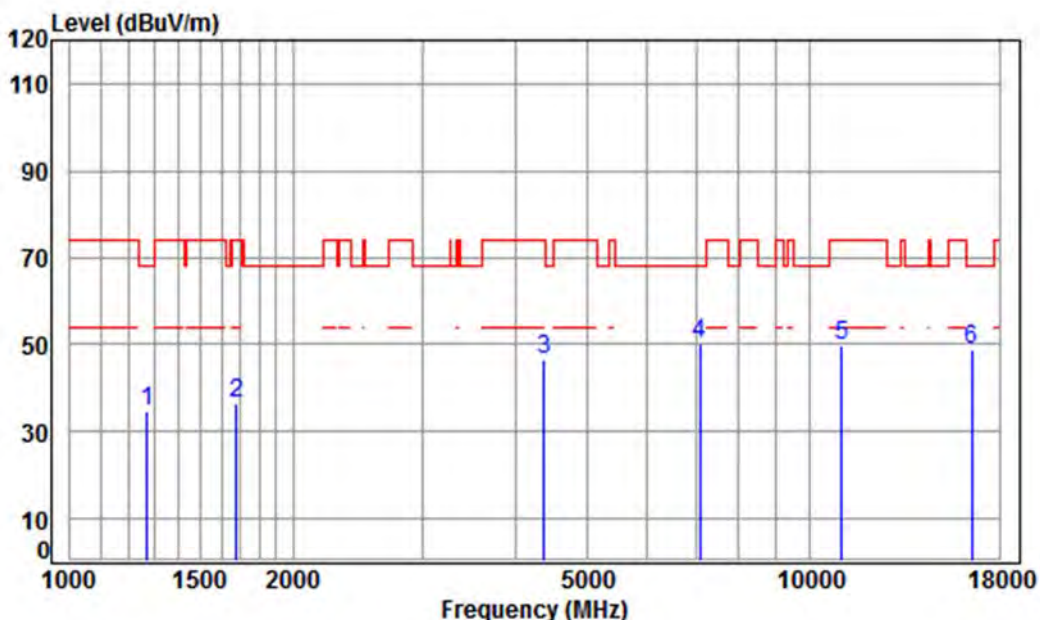

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.26	34.53	68.20	-33.67	peak
2	1677.621	5.25	26.58	41.52	46.33	36.64	74.00	-37.36	peak
3	4367.058	7.41	33.60	42.39	47.99	46.61	74.00	-27.39	peak
4 pp	7096.999	10.10	36.46	40.79	44.49	50.26	68.20	-17.94	peak
5	11020.000	11.65	37.72	37.89	38.17	49.65	74.00	-24.35	peak
6	16530.000	14.63	42.71	39.89	31.37	48.82	68.20	-19.38	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 317 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	---------------	-----------------	------	------	----------

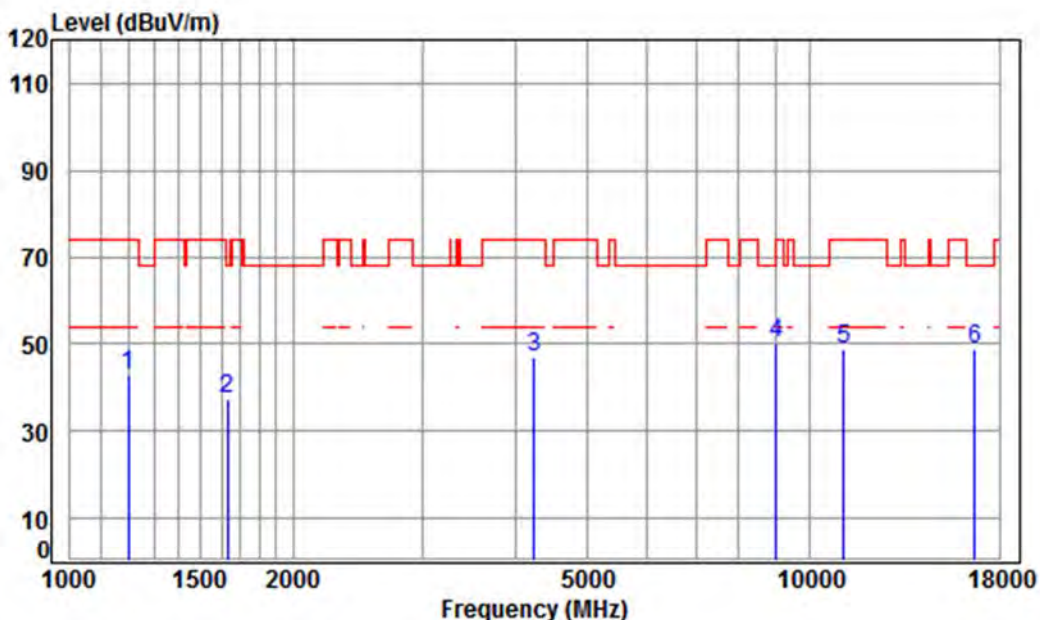

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH110

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1199.726	4.42	24.48	41.18	54.96	42.68	74.00	-31.32 peak
2	1629.825	5.31	26.38	41.49	47.24	37.44	68.20	-30.76 peak
3	4230.396	7.26	33.60	42.37	48.28	46.77	74.00	-27.23 peak
4 pp	8995.123	10.40	36.59	38.62	42.04	50.41	68.20	-17.79 peak
5	11100.000	11.73	37.78	37.94	37.09	48.66	74.00	-25.34 peak
6	16650.000	15.17	42.73	39.99	30.93	48.84	68.20	-19.36 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 318 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

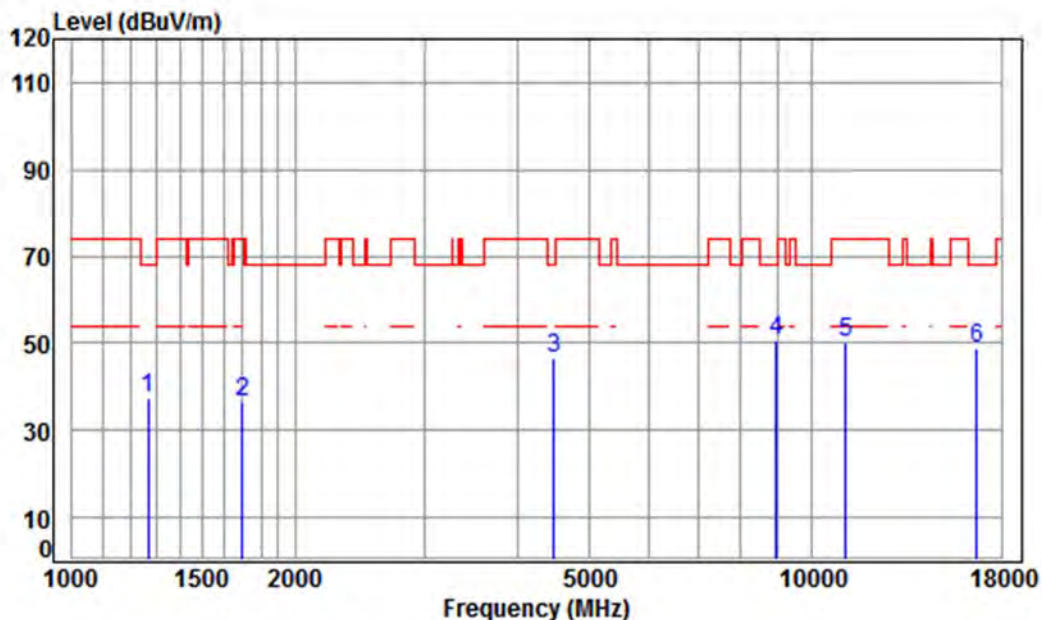

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5550 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	49.40	37.64	68.20	-30.56	peak
2	1697.129	5.23	26.66	41.53	46.29	36.65	74.00	-37.35	peak
3	4482.150	7.54	33.60	42.41	47.84	46.57	68.20	-21.63	peak
4 pp	8943.274	10.39	36.53	38.70	42.32	50.54	68.20	-17.66	peak
5	11100.000	11.73	37.78	37.94	38.50	50.07	74.00	-23.93	peak
6	16650.000	15.17	42.73	39.99	30.83	48.74	68.20	-19.46	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 319 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

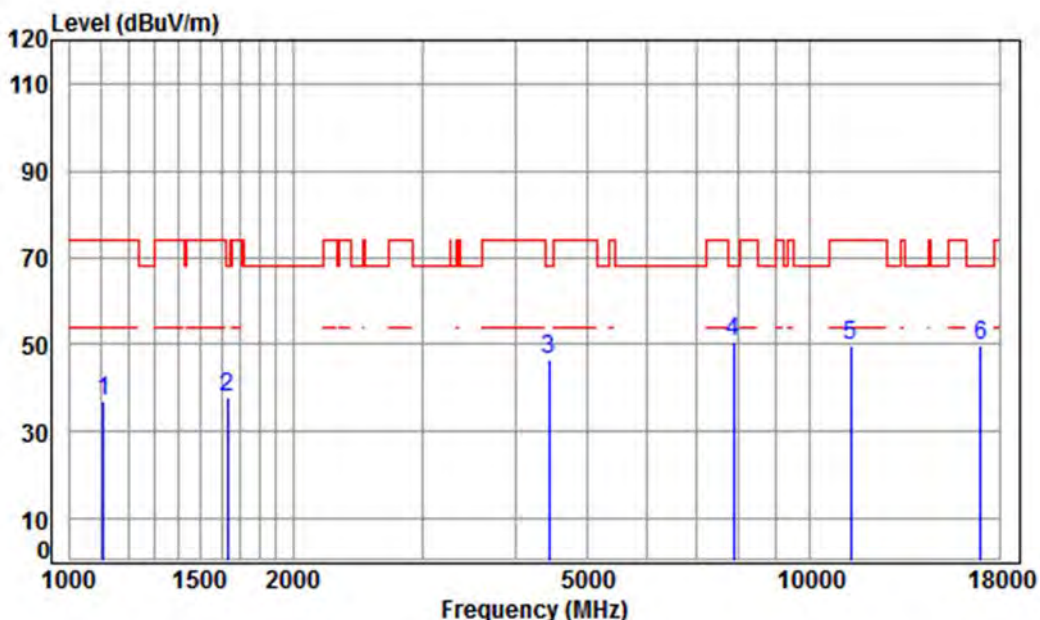

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1109.660	4.05	24.02	41.10	49.82	36.79	74.00	-37.21	peak
2	1629.825	5.31	26.38	41.49	47.56	37.76	68.20	-30.44	peak
3	4430.628	7.48	33.60	42.41	47.99	46.66	68.20	-21.54	peak
4 pp	7875.254	9.96	36.53	40.28	44.30	50.51	68.20	-17.69	peak
5	11340.000	11.98	37.97	38.10	37.85	49.70	74.00	-24.30	peak
6	17010.000	16.69	42.81	40.29	30.52	49.73	68.20	-18.47	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 320 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

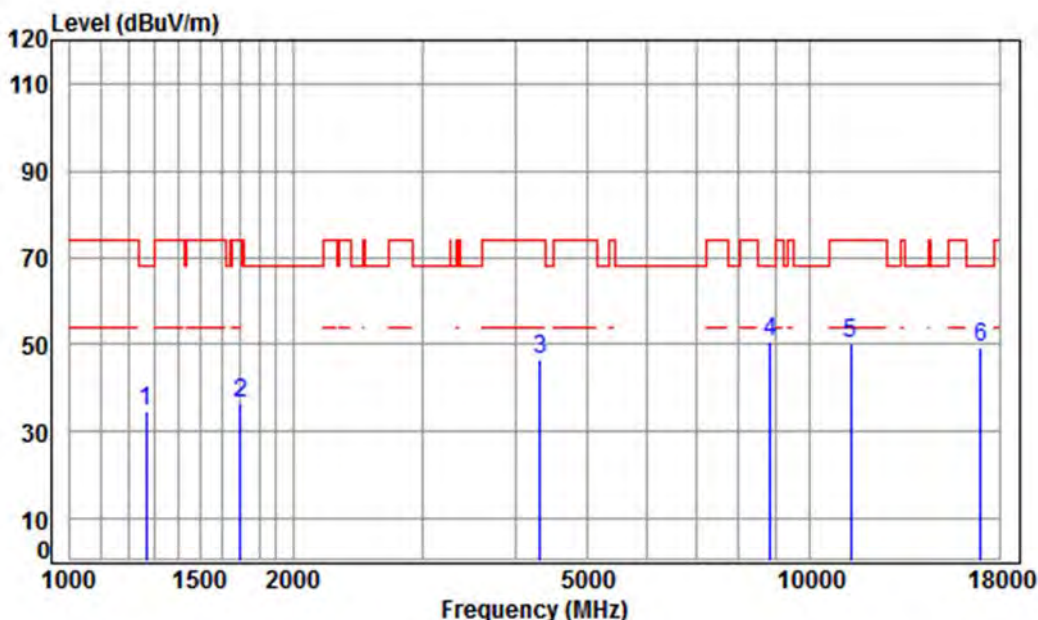

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5670 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	41.24	46.27	34.51	68.20	-33.69	peak
2	1697.129	5.23	26.66	41.53	45.95	36.31	74.00	-37.69	peak
3	4316.859	7.36	33.60	42.38	48.04	46.62	74.00	-27.38	peak
4 pp	8840.473	10.36	36.41	38.86	42.52	50.43	68.20	-17.77	peak
5	11340.000	11.98	37.97	38.10	38.47	50.32	74.00	-23.68	peak
6	17010.000	16.69	42.81	40.29	30.02	49.23	68.20	-18.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 321 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

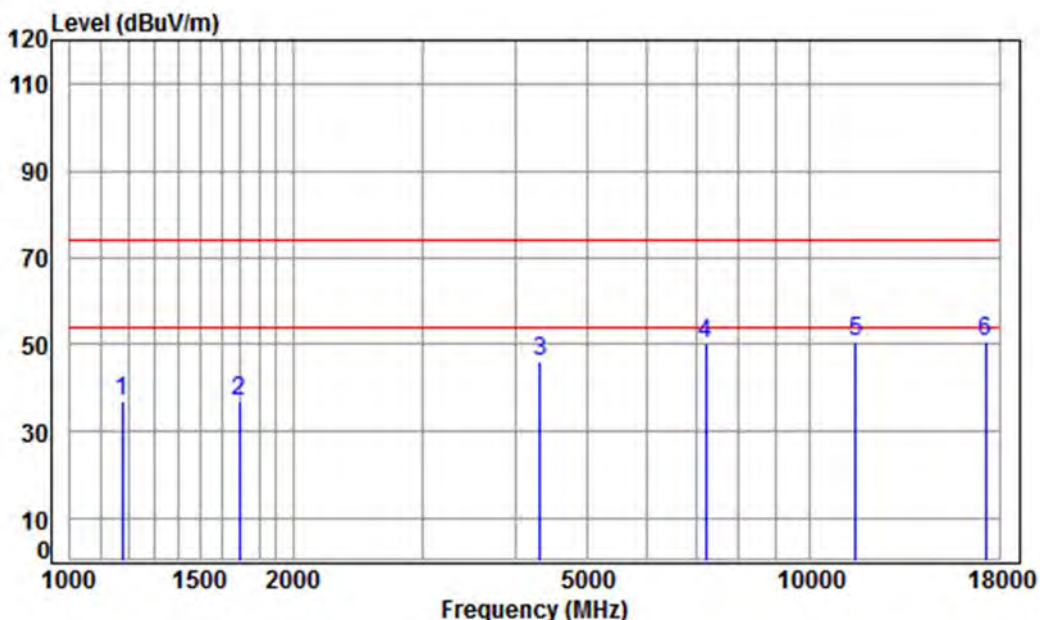

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1175.697	4.32	24.36	41.16	49.29	36.81	74.00	-37.19	peak
2	1692.231	5.24	26.64	41.53	46.81	37.16	74.00	-36.84	peak
3	4316.859	7.36	33.60	42.38	47.60	46.18	74.00	-27.82	peak
4	7221.150	10.07	36.41	40.70	44.30	50.08	74.00	-23.92	peak
5	11510.000	12.14	38.11	38.20	38.55	50.60	74.00	-23.40	peak
6	pp17265.000	16.12	43.12	40.51	31.99	50.72	74.00	-23.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 322 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

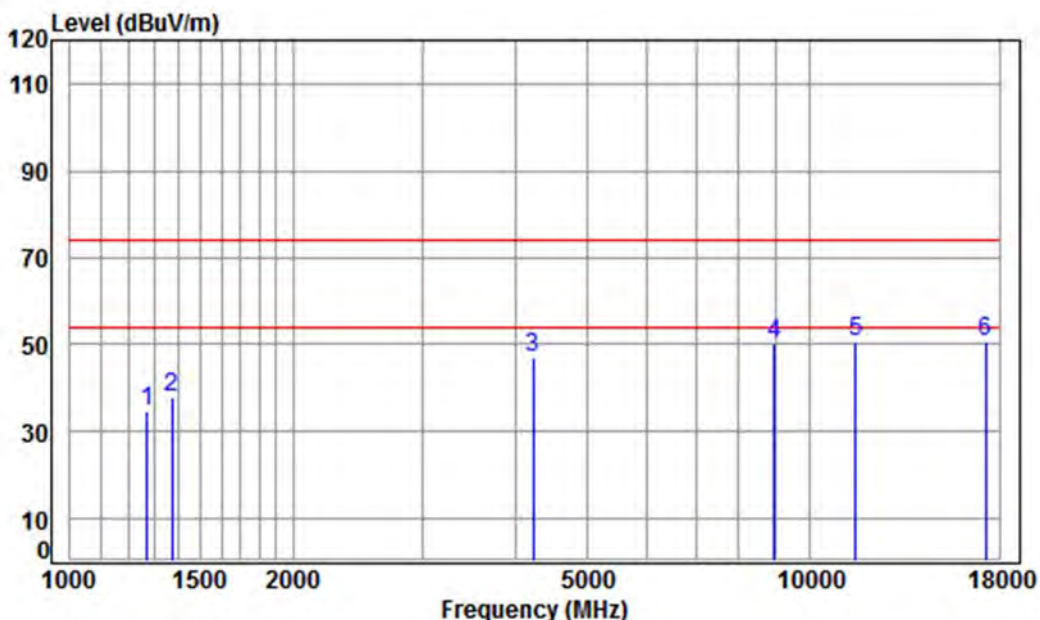

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5755 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.63	34.90	74.00	-39.10	peak
2	1374.295	5.06	25.28	41.32	48.84	37.86	74.00	-36.14	peak
3	4218.186	7.24	33.60	42.37	48.37	46.84	74.00	-27.16	peak
4	8943.274	10.39	36.53	38.70	41.89	50.11	74.00	-23.89	peak
5	11510.000	12.14	38.11	38.20	38.55	50.60	74.00	-23.40	peak
6	pp17265.000	16.12	43.12	40.51	32.07	50.80	74.00	-23.20	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 323 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

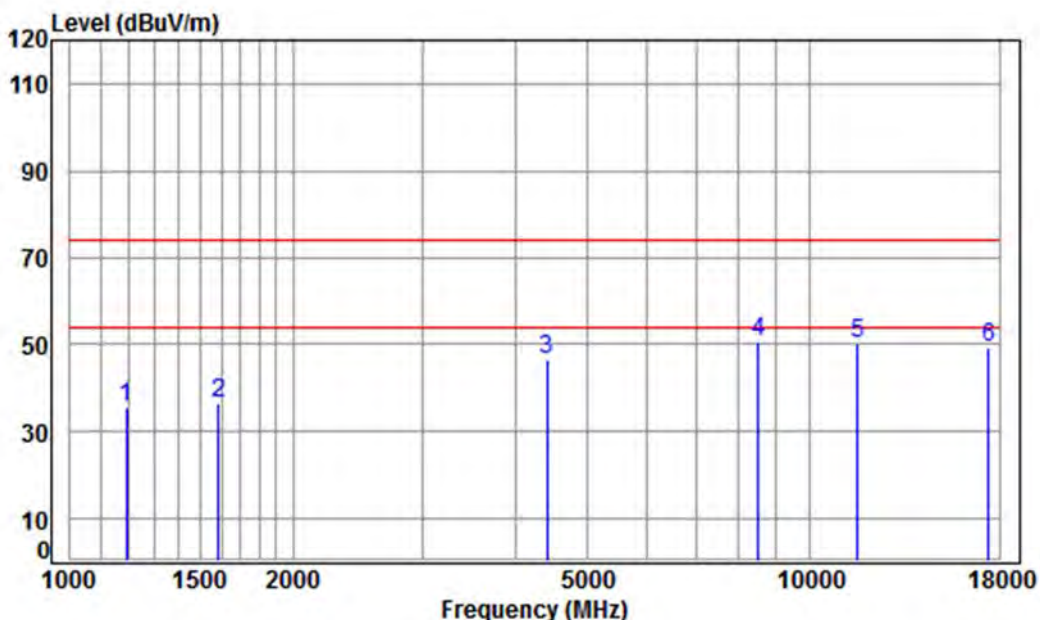

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	48.10	35.75	74.00	-38.25	peak
2	1587.975	5.37	26.20	41.46	46.44	36.55	74.00	-37.45	peak
3	4405.090	7.46	33.60	42.40	48.09	46.75	74.00	-27.25	peak
4 pp	8514.456	10.27	36.02	39.36	43.81	50.74	74.00	-23.26	peak
5	11590.000	12.17	38.19	38.25	38.23	50.34	74.00	-23.66	peak
6	17385.000	15.85	43.26	40.60	30.63	49.14	74.00	-24.86	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 324 of 818

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

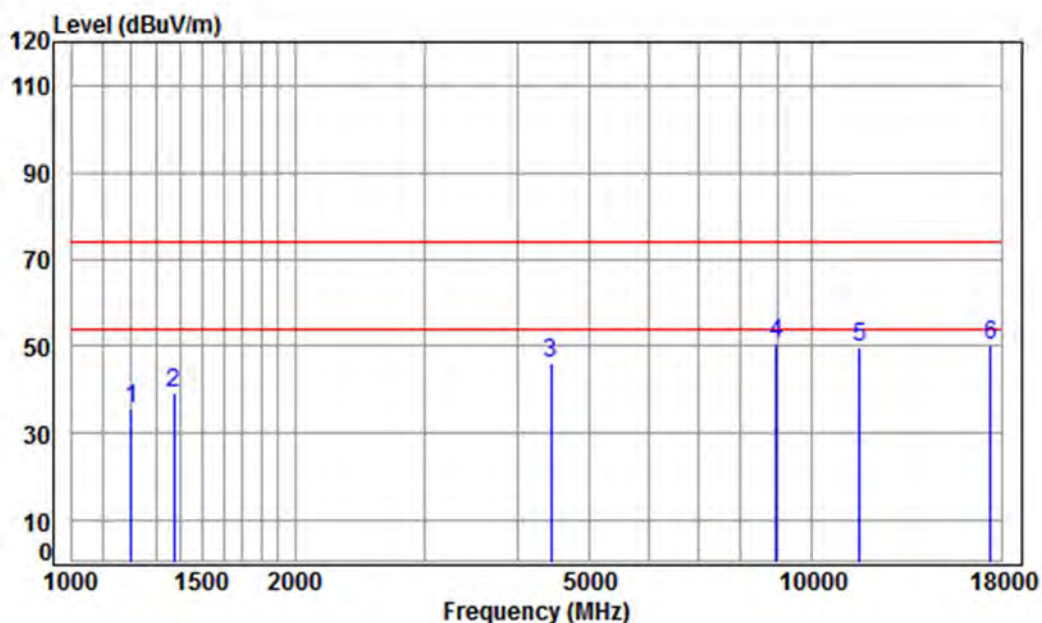

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5795 TX RSE

: Ant 1+2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	47.86	35.59	74.00	-38.41	peak
2	1374.295	5.06	25.28	41.32	50.04	39.06	74.00	-34.94	peak
3	4430.628	7.48	33.60	42.41	47.41	46.08	74.00	-27.92	peak
4 pp	8943.274	10.39	36.53	38.70	42.32	50.54	74.00	-23.46	peak
5	11590.000	12.17	38.19	38.25	37.52	49.63	74.00	-24.37	peak
6	17385.000	15.85	43.26	40.60	31.70	50.21	74.00	-23.79	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 325 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

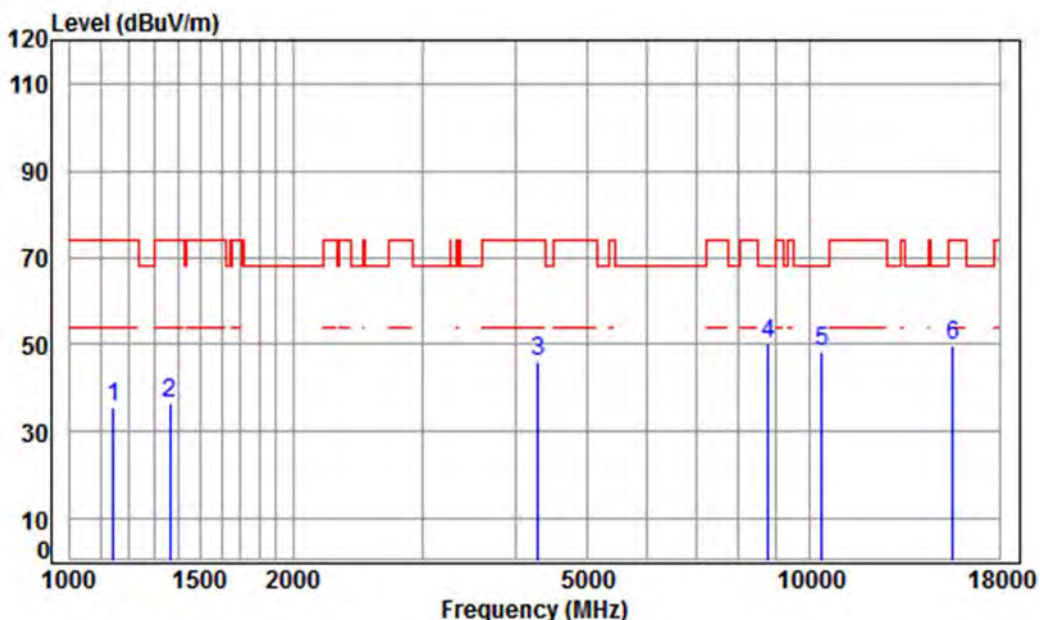

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	41.14	48.22	35.48	74.00	-38.52	peak
2	1366.374	5.04	25.25	41.31	47.66	36.64	74.00	-37.36	peak
3	4291.977	7.33	33.60	42.38	47.66	46.21	74.00	-27.79	peak
4 pp	8764.146	10.34	36.32	38.97	42.71	50.40	68.20	-17.80	peak
5	10380.000	11.21	37.22	37.47	37.48	48.44	68.20	-19.76	peak
6	15570.000	14.35	41.37	39.03	32.90	49.59	74.00	-24.41	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 326 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

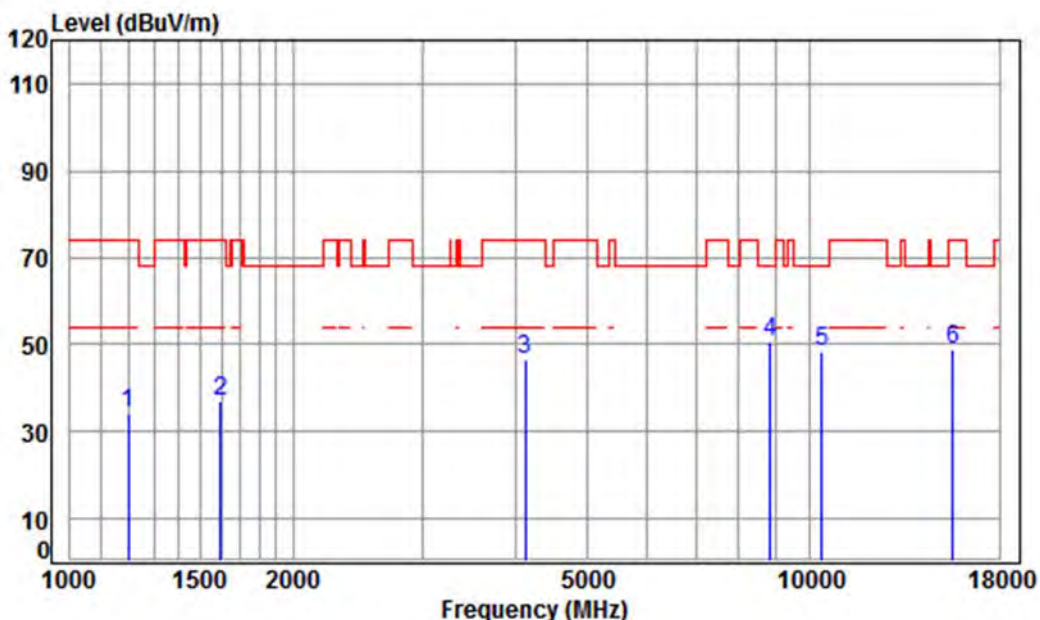

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5190 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	41.18	46.35	34.07	74.00	-39.93	peak
2	1597.181	5.35	26.24	41.47	46.67	36.79	74.00	-37.21	peak
3	4121.768	7.13	33.60	42.35	48.35	46.73	74.00	-27.27	peak
4 pp	8840.473	10.36	36.41	38.86	42.87	50.78	68.20	-17.42	peak
5	10380.000	11.21	37.22	37.47	37.28	48.24	68.20	-19.96	peak
6	15570.000	14.35	41.37	39.03	32.17	48.86	74.00	-25.14	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 327 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

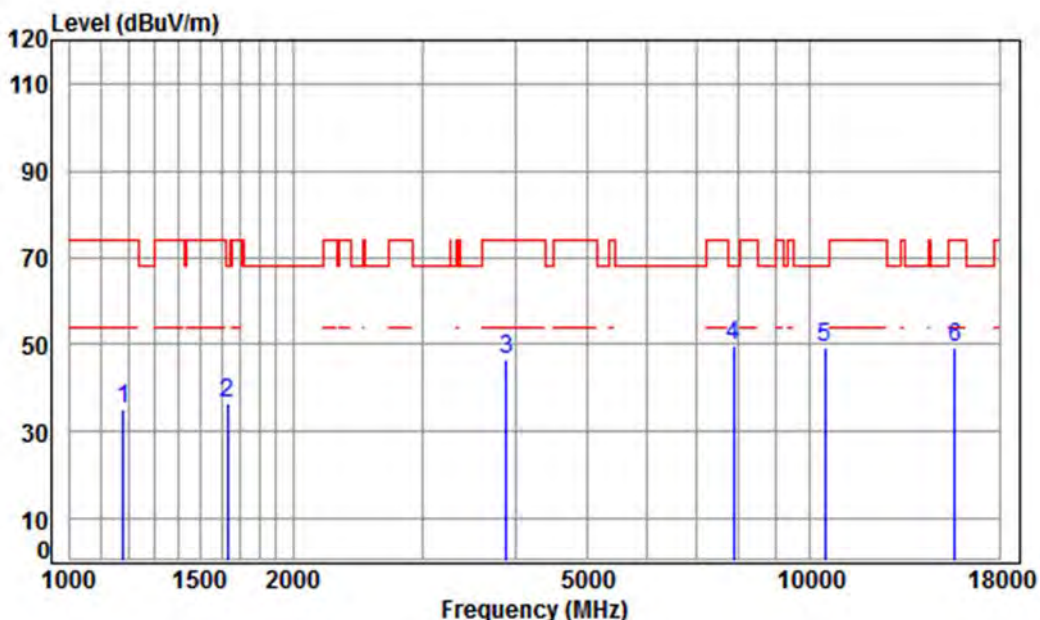

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	4.33	24.38	41.16	47.60	35.15	74.00	-38.85	peak
2	1629.825	5.31	26.38	41.49	46.44	36.64	68.20	-31.56	peak
3	3890.255	6.87	33.31	42.30	48.80	46.68	74.00	-27.32	peak
4 pp	7875.254	9.96	36.53	40.28	43.65	49.86	68.20	-18.34	peak
5	10460.000	11.26	37.14	37.52	38.25	49.13	68.20	-19.07	peak
6	15690.000	14.53	41.32	39.14	32.49	49.20	74.00	-24.80	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 328 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

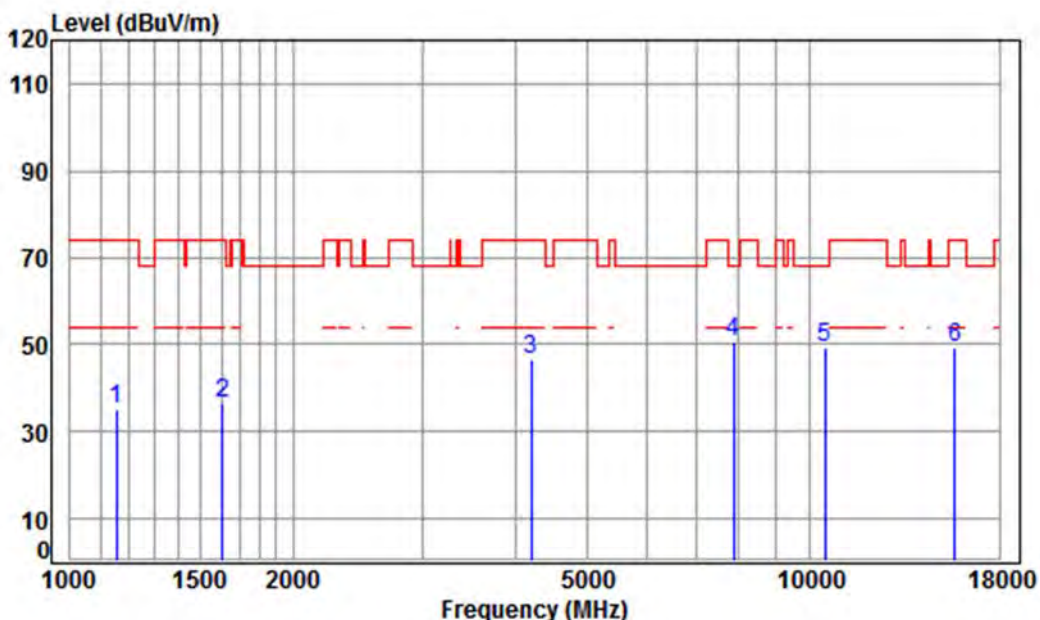

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5230 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1155.483	4.24	24.26	41.14	47.62	34.98	74.00	-39.02	peak
2	1606.441	5.34	26.28	41.47	46.23	36.38	74.00	-37.62	peak
3	4193.872	7.21	33.60	42.36	48.09	46.54	74.00	-27.46	peak
4 pp	7875.254	9.96	36.53	40.28	44.47	50.68	68.20	-17.52	peak
5	10460.000	11.26	37.14	37.52	38.32	49.20	68.20	-19.00	peak
6	15690.000	14.53	41.32	39.14	32.51	49.22	74.00	-24.78	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180200138702

Page: 329 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

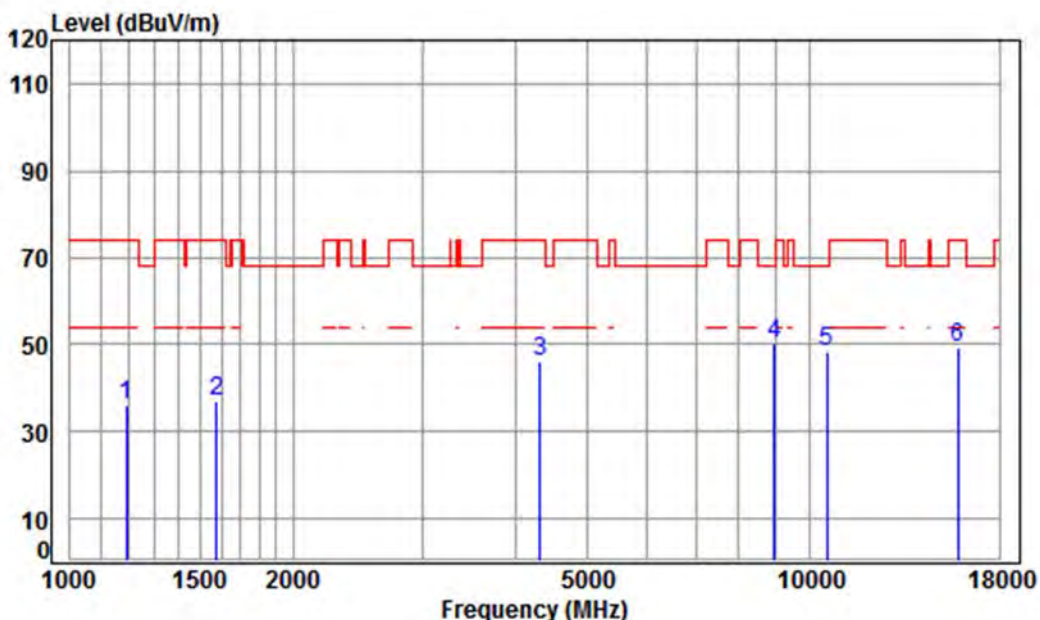

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1192.811	4.39	24.44	41.18	48.36	36.01	74.00	-37.99	peak
2	1578.822	5.38	26.16	41.46	46.85	36.93	74.00	-37.07	peak
3	4316.859	7.36	33.60	42.38	47.69	46.27	74.00	-27.73	peak
4 pp	8943.274	10.39	36.53	38.70	41.86	50.08	68.20	-18.12	peak
5	10540.000	11.32	37.15	37.57	37.42	48.32	68.20	-19.88	peak
6	15810.000	14.71	41.28	39.25	32.57	49.31	74.00	-24.69	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 330 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

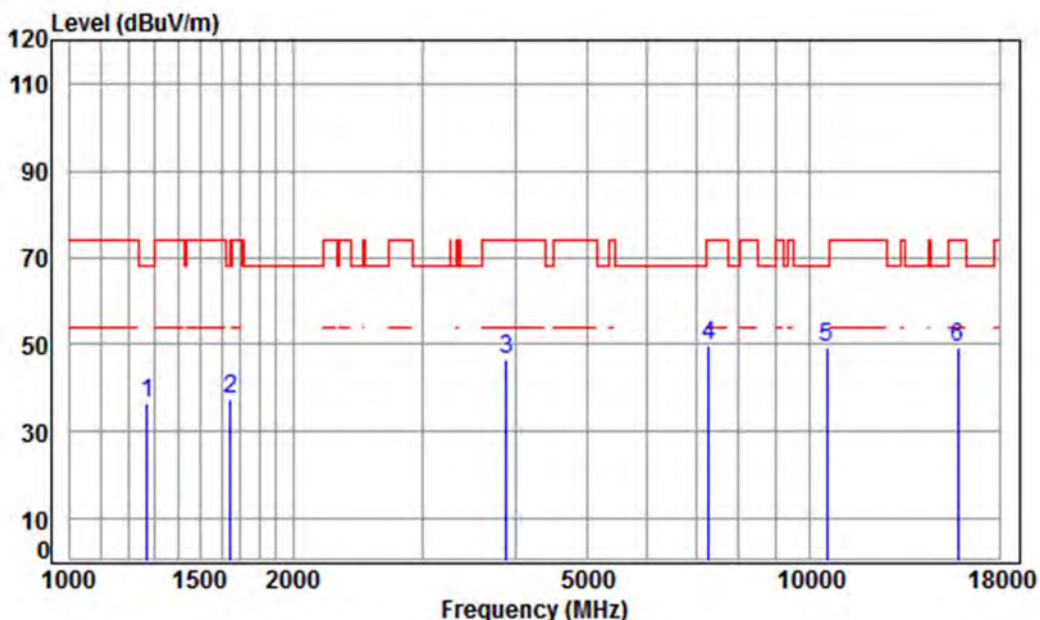

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5270 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	48.17	36.44	68.20	-31.76	peak
2	1648.778	5.29	26.46	41.50	46.94	37.19	68.20	-31.01	peak
3	3890.255	6.87	33.31	42.30	48.61	46.49	74.00	-27.51	peak
4	7284.038	10.06	36.38	40.66	44.12	49.90	74.00	-24.10	peak
5	pp10540.000	11.32	37.15	37.57	38.20	49.10	68.20	-19.10	peak
6	15810.000	14.71	41.28	39.25	32.74	49.48	74.00	-24.52	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 331 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

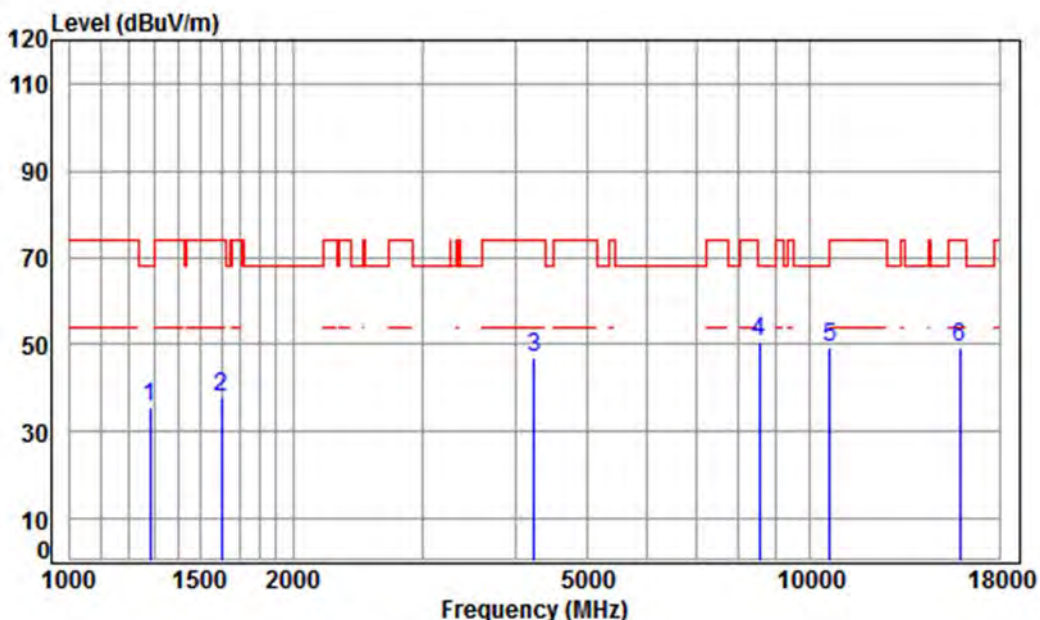

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	47.28	35.63	68.20	-32.57	peak
2	1601.804	5.35	26.26	41.47	47.84	37.98	74.00	-36.02	peak
3	4230.396	7.26	33.60	42.37	48.46	46.95	74.00	-27.05	peak
4 pp	8539.102	10.28	36.05	39.32	43.61	50.62	68.20	-17.58	peak
5	10620.000	11.37	37.25	37.63	38.08	49.07	74.00	-24.93	peak
6	15930.000	14.89	41.23	39.36	32.46	49.22	74.00	-24.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 332 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

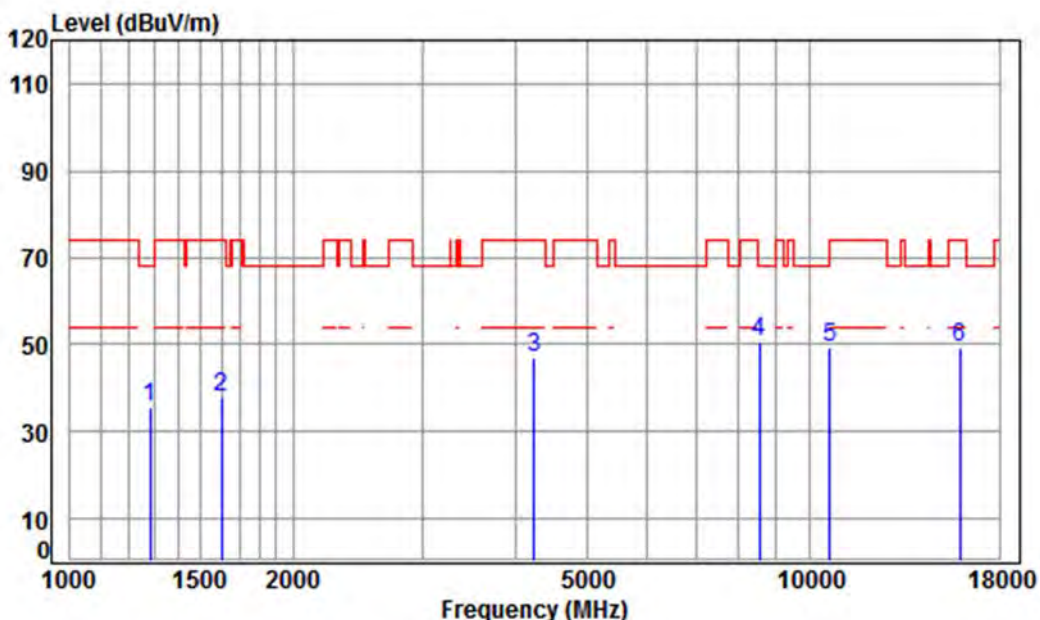

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5310 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	41.25	47.28	35.63	68.20	-32.57	peak
2	1601.804	5.35	26.26	41.47	47.84	37.98	74.00	-36.02	peak
3	4230.396	7.26	33.60	42.37	48.46	46.95	74.00	-27.05	peak
4 pp	8539.102	10.28	36.05	39.32	43.61	50.62	68.20	-17.58	peak
5	10620.000	11.37	37.25	37.63	38.08	49.07	74.00	-24.93	peak
6	15930.000	14.89	41.23	39.36	32.46	49.22	74.00	-24.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 333 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

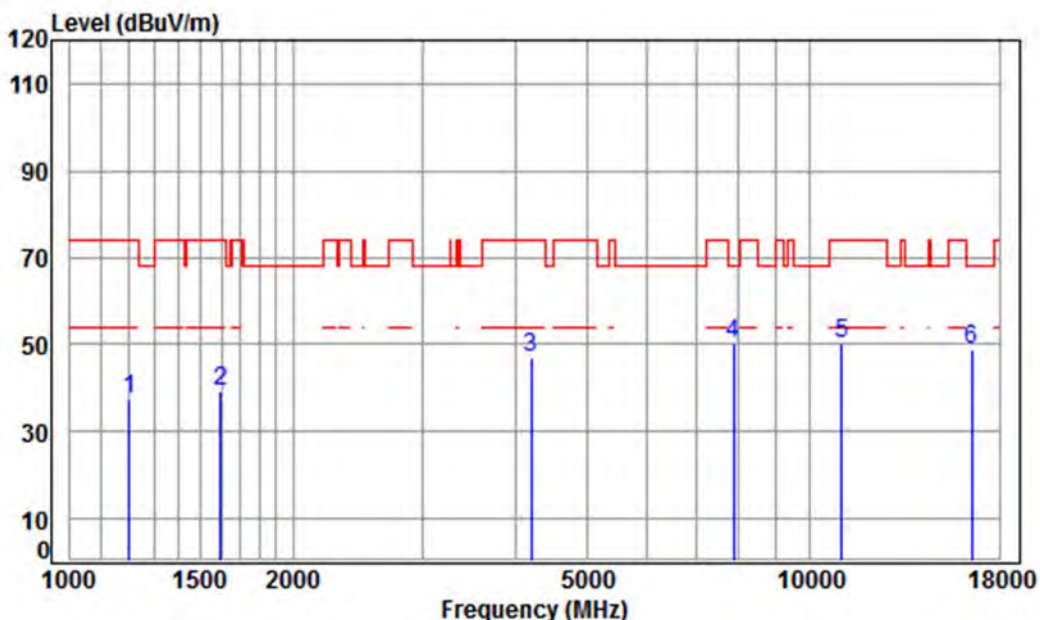

Condition: 3m VERTICAL

Job No : 2939RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	41.19	49.62	37.35	74.00	-36.65	peak
2	1597.181	5.35	26.24	41.47	49.18	39.30	74.00	-34.70	peak
3	4193.872	7.21	33.60	42.36	48.57	47.02	74.00	-26.98	peak
4 pp	7875.254	9.96	36.53	40.28	43.96	50.17	68.20	-18.03	peak
5	11020.000	11.65	37.72	37.89	38.61	50.09	74.00	-23.91	peak
6	16530.000	14.63	42.71	39.89	31.40	48.85	68.20	-19.35	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180200138702

Page: 334 of 818

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

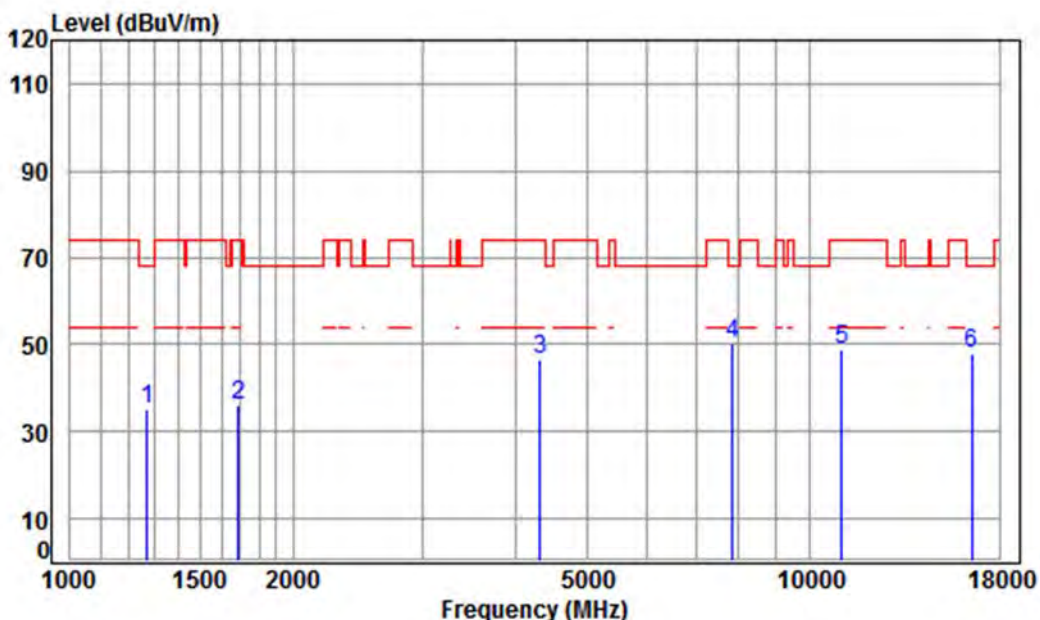

Condition: 3m HORIZONTAL

Job No : 2939RG

Mode : 5510 TX RSE

: Ant 1+2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	41.24	46.79	35.06	68.20	-33.14	peak
2	1687.347	5.24	26.62	41.52	45.83	36.17	74.00	-37.83	peak
3	4316.859	7.36	33.60	42.38	48.02	46.60	74.00	-27.40	peak
4 pp	7852.524	9.96	36.51	40.29	44.14	50.32	68.20	-17.88	peak
5	11020.000	11.65	37.72	37.89	37.31	48.79	74.00	-25.21	peak
6	16530.000	14.63	42.71	39.89	30.68	48.13	68.20	-20.07	peak