

## System Check\_H2450

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  S/m;  $\epsilon_r = 37.988$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(7.6, 7.66, 7.12) @ 2450 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=250mW/Area Scan (9x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 20.6 W/kg

### Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.5 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 27.0 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.78 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 21.8 W/kg

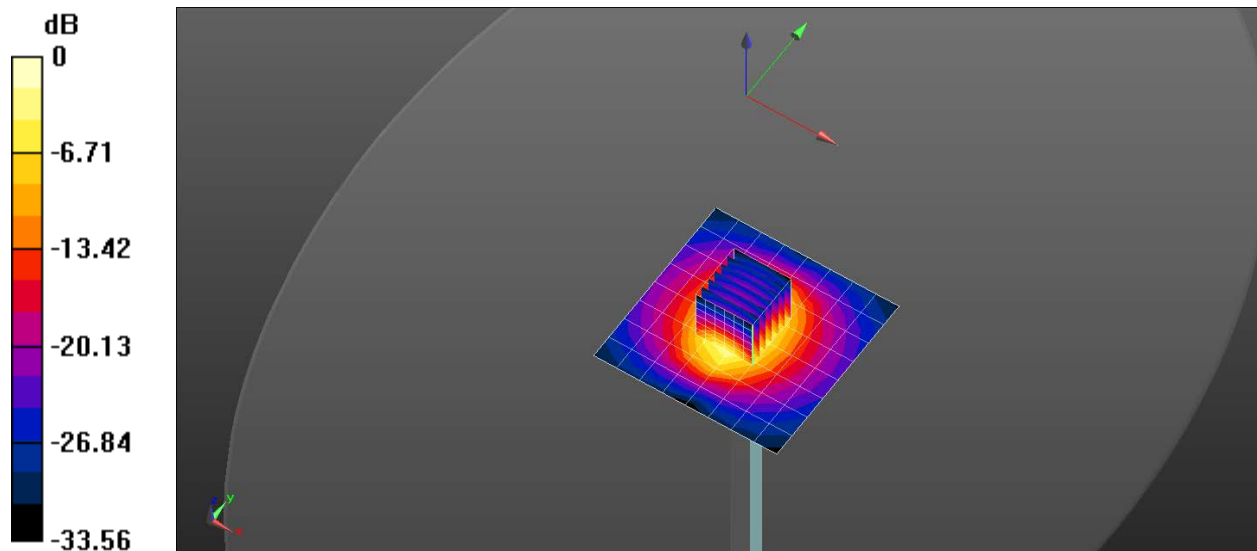

0 dB = 20.6 W/kg = 13.13 dBW/kg

## System Check\_H5G

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.72$  S/m;  $\epsilon_r = 35.889$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16

- Probe: EX3DV4 - SN7369; ConvF(5.36, 5.44, 4.91) @ 5200 MHz; Calibrated: 2024/6/3

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=100mW/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.2 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x11)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 53.33 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 36.6 W/kg

**SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.44 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 22.5 W/kg

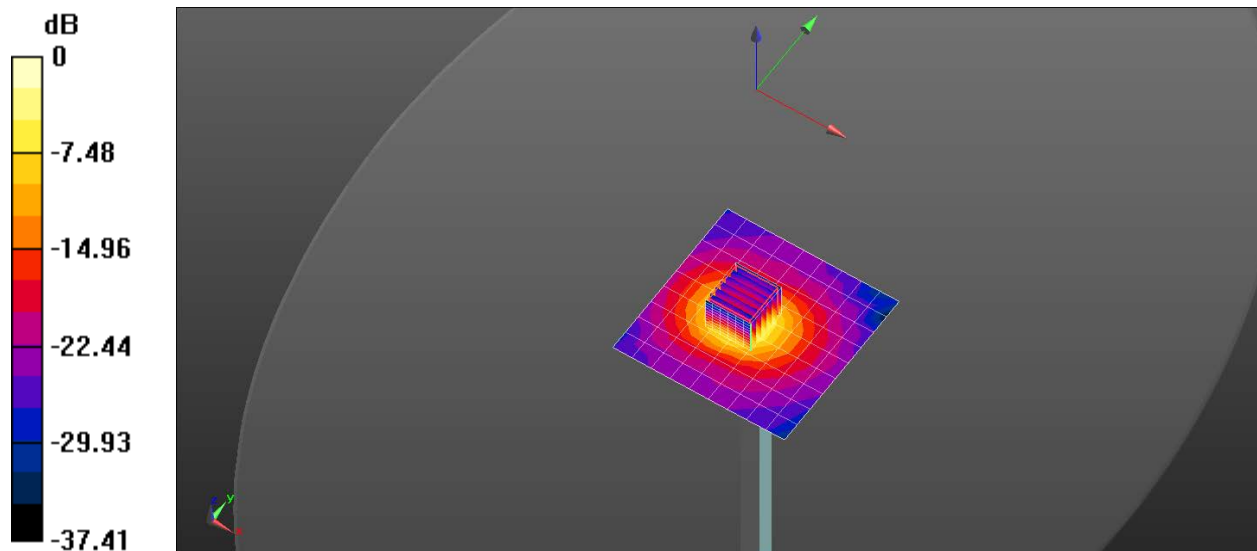

0 dB = 18.2 W/kg = 12.61 dBW/kg

## System Check\_H5G

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.838$  S/m;  $\epsilon_r = 35.636$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(5.17, 5.24, 4.78) @ 5300 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=100mW/Area Scan (10x10x1):

Measurement grid:  $dx=10$ mm,  $dy=10$ mm

Maximum value of SAR (measured) = 19.3 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x11)/Cube 0:

Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 54.31 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 37.7 W/kg

**SAR(1 g) = 8.76 W/kg; SAR(10 g) = 2.48 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 22.6 W/kg

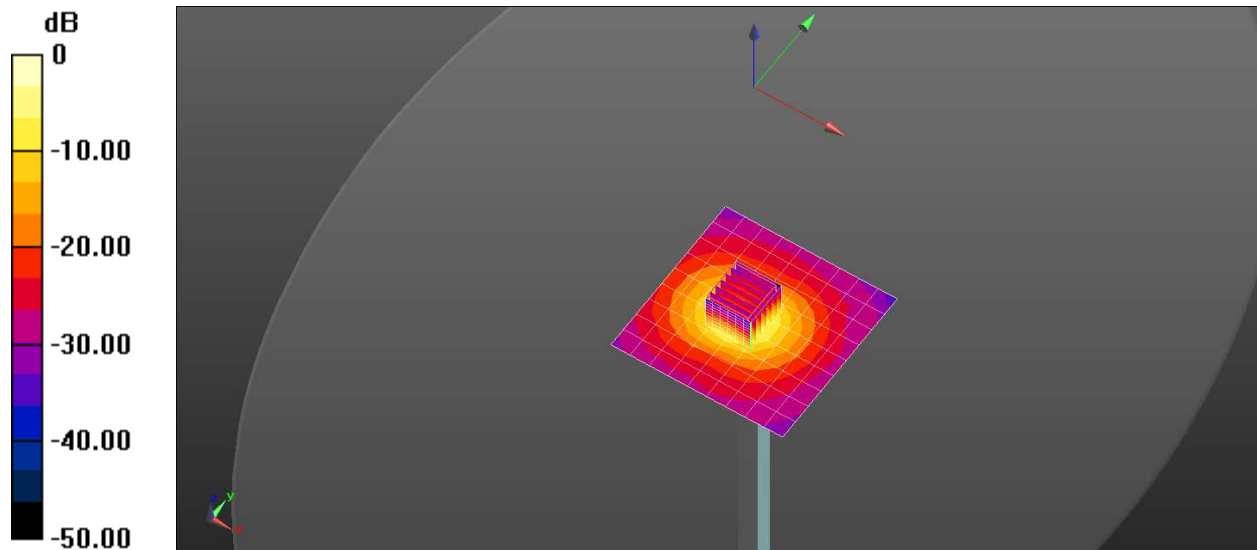

0 dB = 22.6 W/kg = 13.54 dBW/kg

## System Check\_H5G

Frequency: 5600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.19$  S/m;  $\epsilon_r = 34.898$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16
- Probe: EX3DV4 - SN7369; ConvF(4.57, 4.65, 4.21) @ 5600 MHz; Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=100mW/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.0 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x11)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 51.89 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 40.1 W/kg

**SAR(1 g) = 8.74 W/kg; SAR(10 g) = 2.46 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 22.9 W/kg

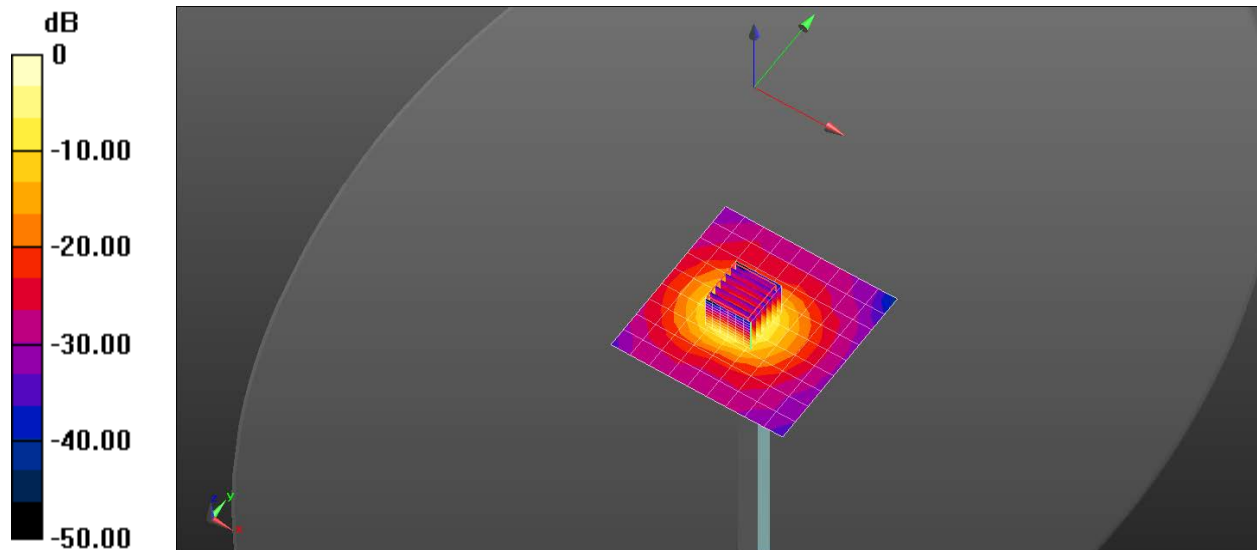

0 dB = 22.9 W/kg = 13.60 dBW/kg

## System Check\_H5G

Frequency: 5800 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.434$  S/m;  $\epsilon_r = 34.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2024/5/16

- Probe: EX3DV4 - SN7369; ConvF(4.67, 4.76, 4.28) @ 5800 MHz; Calibrated: 2024/6/3

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### Configuration/Pin=100mW/Area Scan (10x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.5 W/kg

### Configuration/Pin=100mW/Zoom Scan (7x7x11)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.79 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 38.4 W/kg

**SAR(1 g) = 7.6 W/kg; SAR(10 g) = 2.11 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 20.6 W/kg

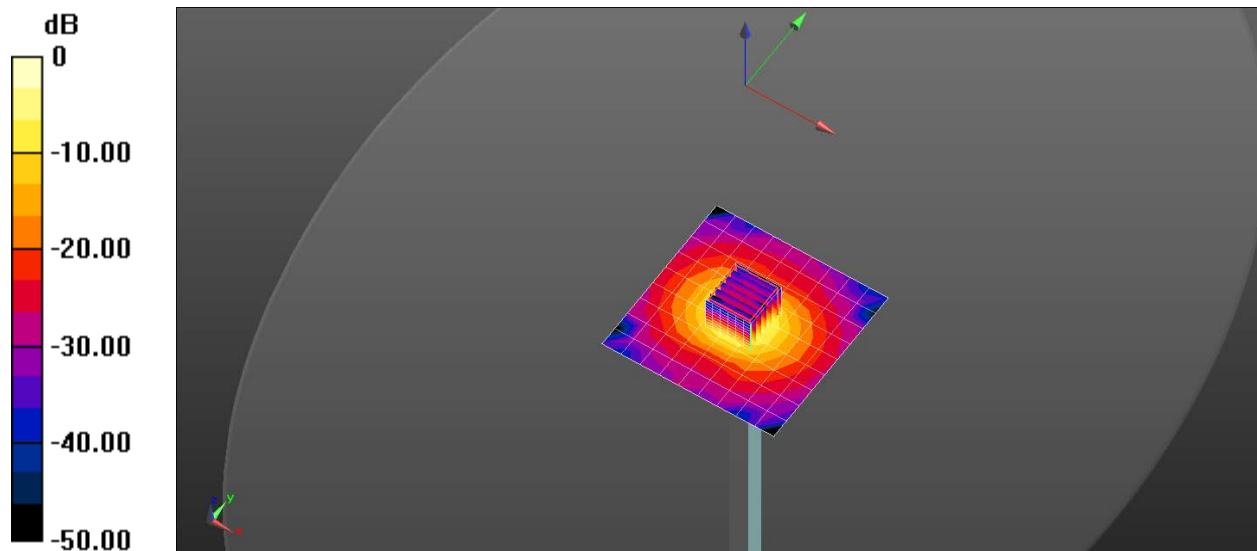

0 dB = 20.6 W/kg = 13.14 dBW/kg