


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

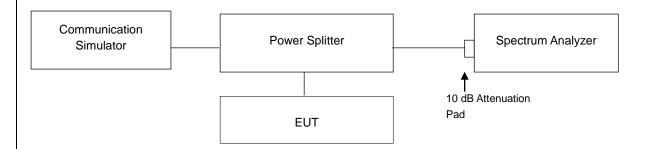

4.6.3 Test Procedures


- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Record the maximum PAPR level associated with a probability of 0.1 %.



4.6.4 Test Results

Channel	Frequency		erage Ratio B)	Channel	Frequency	Peak to Average Ratio (dB)
	(MHz)	GSM	EDGE		(MHz)	WCDMA
512	1850.2	0.29	3.17	9262	1852.4	2.87
661	1880.0	0.33	3.22	9400	1880.0	3.00
810	1909.8	0.37	3.23	9538	1907.6	2.93
		Peak to Ave	erage Ratio			

Channel	Frequency	Peak to Average Ratio (dB)				
	(MHz)	CDMA				
25	1851.25	3.10				
600	1880.00	3.98				
1175	1908.75	3.38				

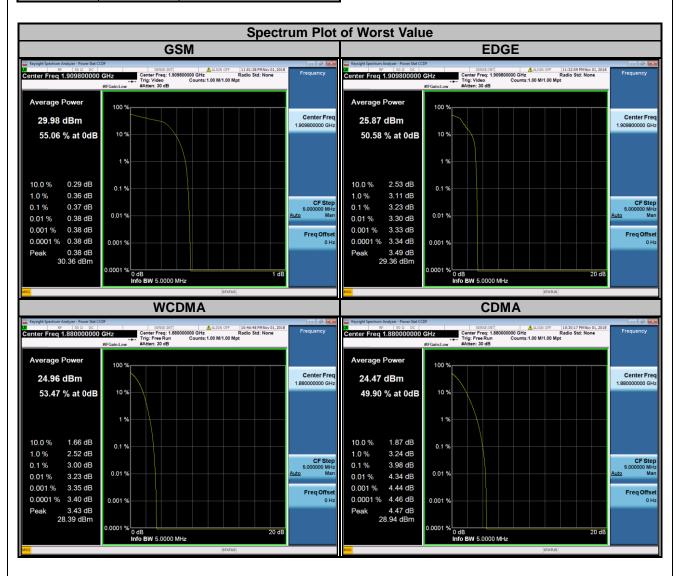




LTE Band 2											
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz						
Channel ·	Frequency	Peak to Average Ratio (dB)		Channel	Frequency	Peak to Average Ratio (dB)					
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM		
18607	1850.7	3.80	5.13	6.24	18615	1851.5	3.57	5.13	6.20		
18900	1880.0	3.78	4.60	5.64	18900	1880.0	3.57	4.49	5.50		
19193	1909.3	3.36	4.11	5.14	19185	1908.5	3.56	3.97	5.01		






LTE Band 2												
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz							
Channel	Frequency	Peak to Average Ratio (dB)		Channel	Frequency	Peak to Average Ratio (dB)						
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM			
18625	1852.5	3.57	5.15	6.20	18650	1855.0	3.53	5.05	6.16			
18900	1880.0	3.58	4.44	5.48	18900	1880.0	3.32	4.13	5.14			
19175	1907.5	3.56	5.20	6.52	19150	1905.0	3.54	5.10	6.18			

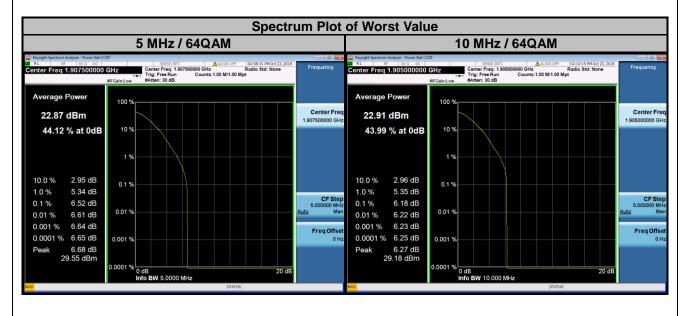




LTE Band 2											
Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz						
Channel	Frequency	Peak to Average Ratio (dB)			Channel	Frequency	Peak to Average Ratio (dB)				
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM		
18675	1857.5	3.51	5.11	6.34	18700	1860.0	3.49	5.12	6.32		
18900	1880.0	3.42	4.19	5.32	18900	1880.0	3.43	4.29	5.38		
19125	1902.5	3.43	5.16	6.48	19100	1900.0	3.44	4.43	5.51		

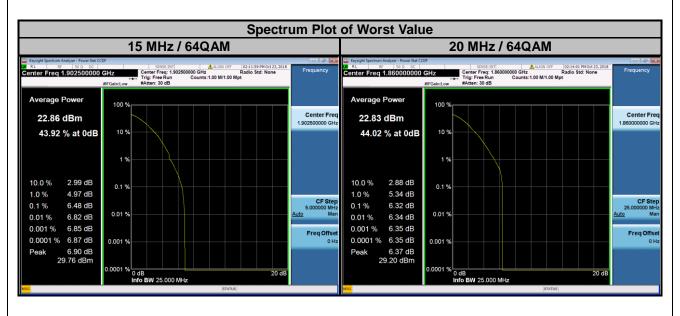




LTE Band 25												
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz							
I Channel ·	Frequency	Peak to Average Ratio (dB)			Channel	Frequency	Peak to Average Ratio (dB)					
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM			
26047	1850.7	3.82	5.18	6.23	26055	1851.5	3.56	5.14	6.22			
26365	1882.5	3.83	5.22	6.28	26365	1882.5	3.60	4.97	6.00			
26683	1914.3	3.80	4.99	6.18	26675	1913.5	3.57	3.94	5.05			

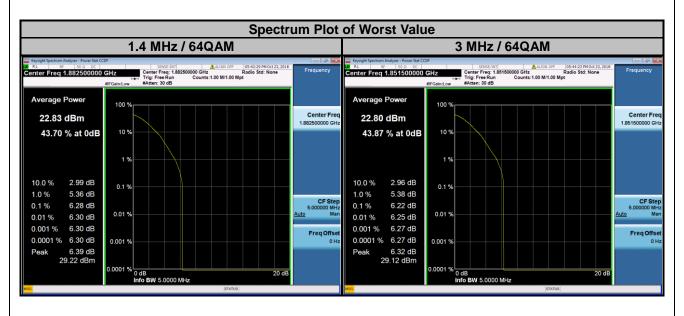



LTE Band 25												
Channel Bandwidth: 5 MHz					C	hannel Band	width: 1	0 MHz				
Channel	Frequency	Peak to Average Ratio (dB)		Channel	Frequency	Peak to Average Ratio (dB)						
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM			
26065	1852.5	3.57	5.11	6.16	26090	1855.0	3.53	5.12	6.15			
26365	1882.5	3.61	4.76	5.79	26365	1882.5	3.48	4.31	5.32			
26665	1912.5	3.50	4.36	5.43	26640	1910.0	3.49	5.23	6.51			

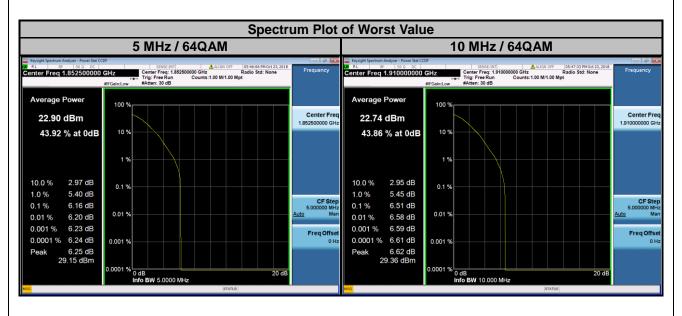



LTE Band 25											
Channel Bandwidth: 15 MHz					C	hannel Band	width: 2	0 MHz			
I Channel ·	Frequency	Peak to Average Ratio (dB)			Channel	Frequency	Peak to Average Ratio (dB)				
	(MHz)	QPSK	16QAM	64QAM		(MHz)	QPSK	16QAM	64QAM		
26115	1857.5	3.46	5.13	6.29	26140	1860.0	3.47	5.07	6.27		
26365	1882.5	3.41	4.28	5.33	26365	1882.5	3.39	4.17	5.26		
26615	1907.5	3.51	5.05	6.25	26590	1905.0	3.46	4.01	5.02		






4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to -13 dBm.

4.7.2 Test Setup

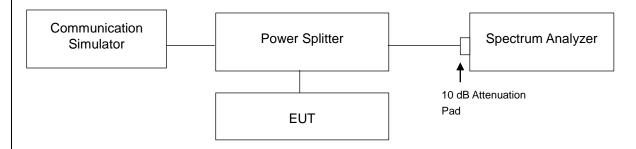

4.7.3 Test Procedure

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- c. Measuring frequency range is from 1 GHz to 26.5 GHz / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.



4.7.4 Test Results

