


EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

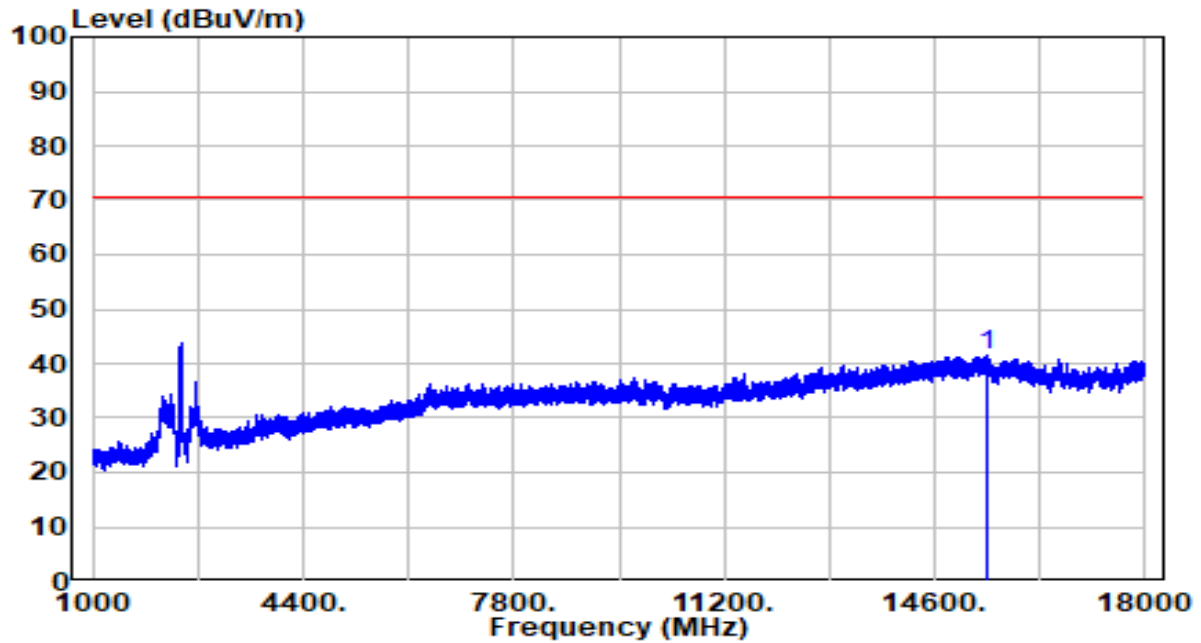


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15425.000	34.99	6.52	41.51	-28.98	70.49	100	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

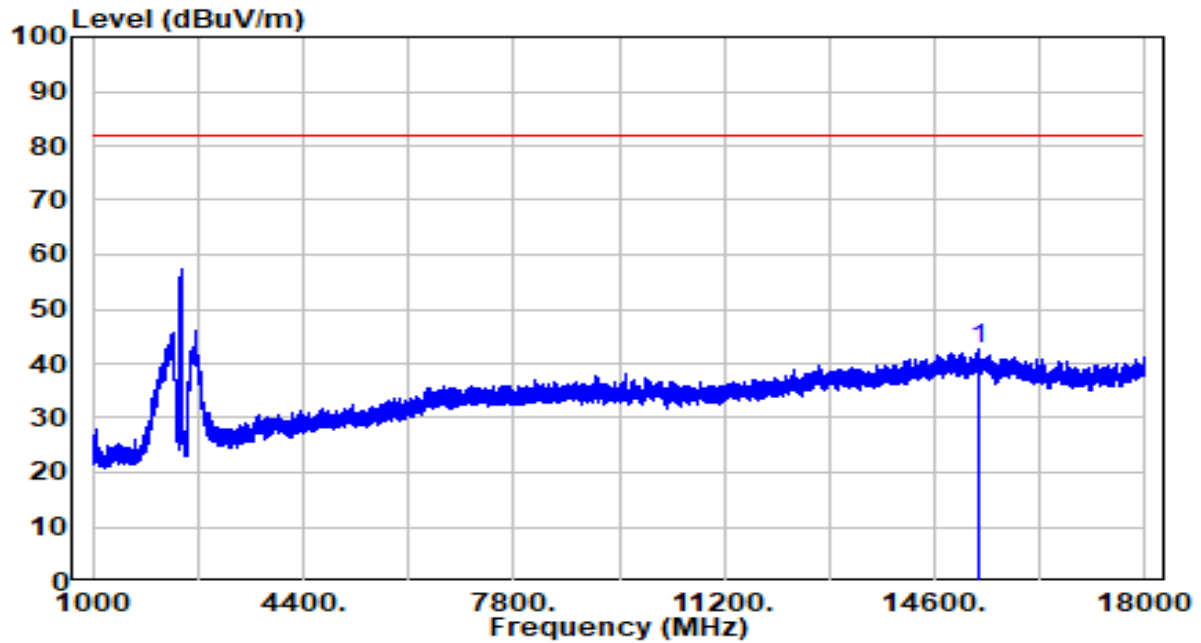


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15308.000	35.90	6.62	42.52	-39.25	81.77	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

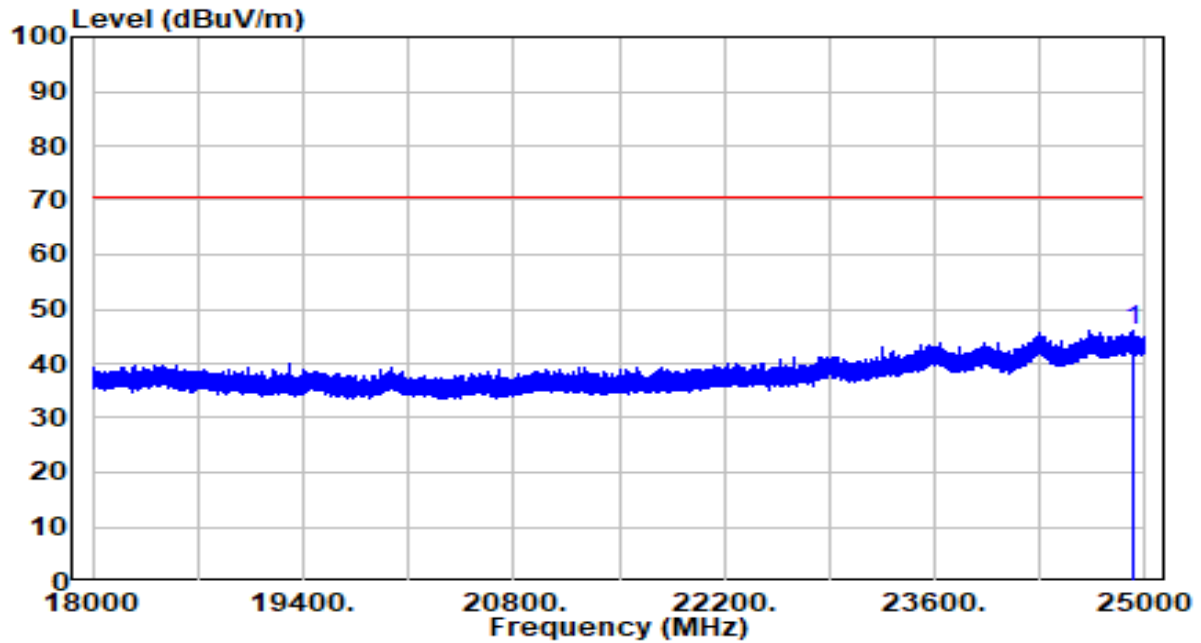


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24913.590	32.96	12.98	45.94	-24.55	70.49	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

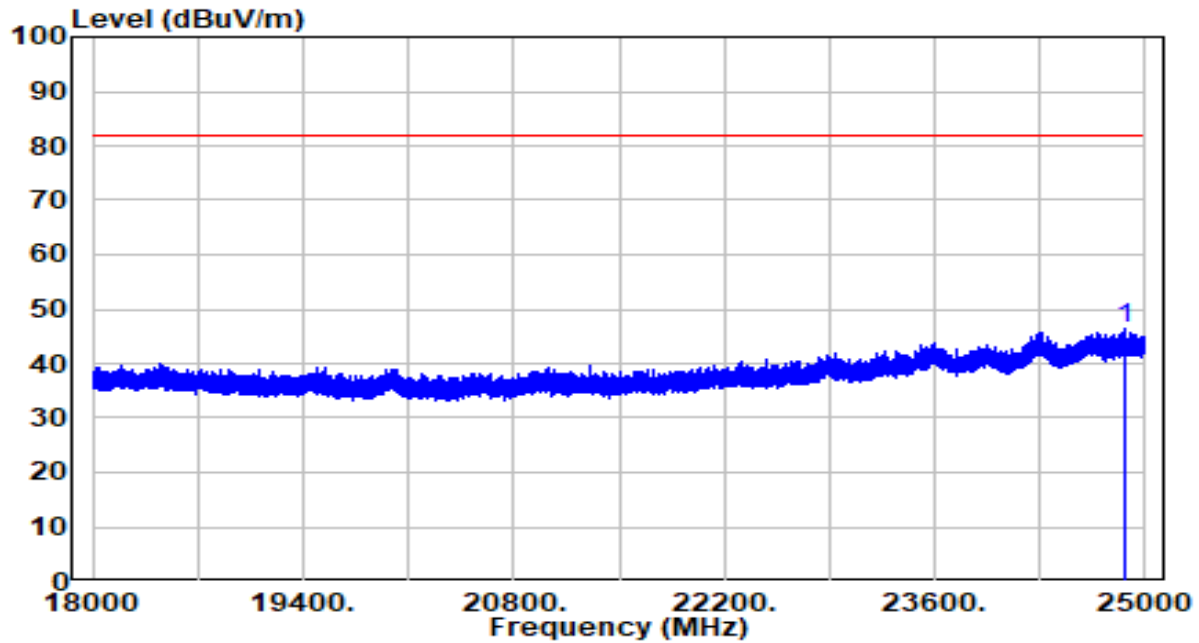


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24873.560	33.42	12.94	46.36	-35.41	81.77	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

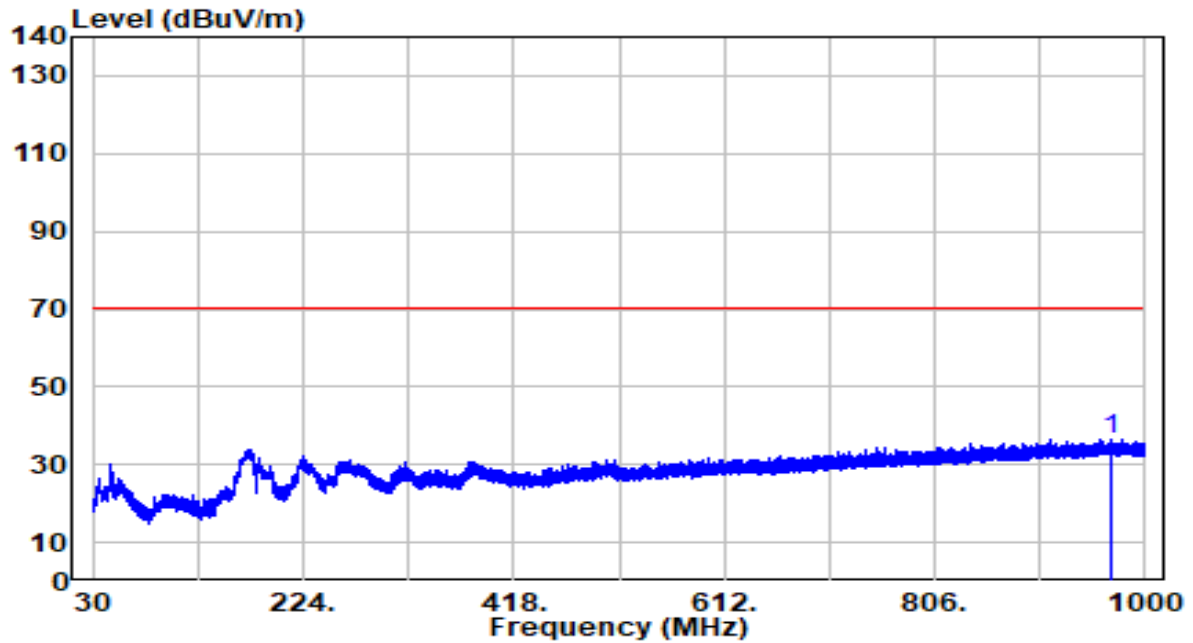


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	967.960	5.30	31.16	36.45	-34.04	70.49	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

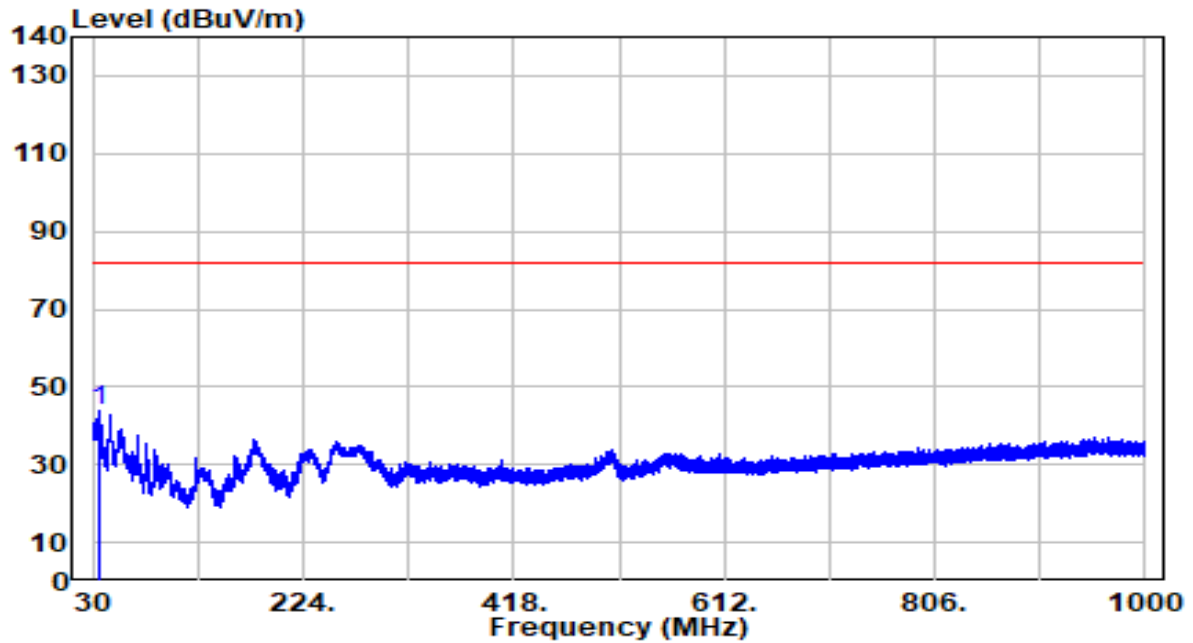


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.911	25.63	18.16	43.79	-37.98	81.77	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

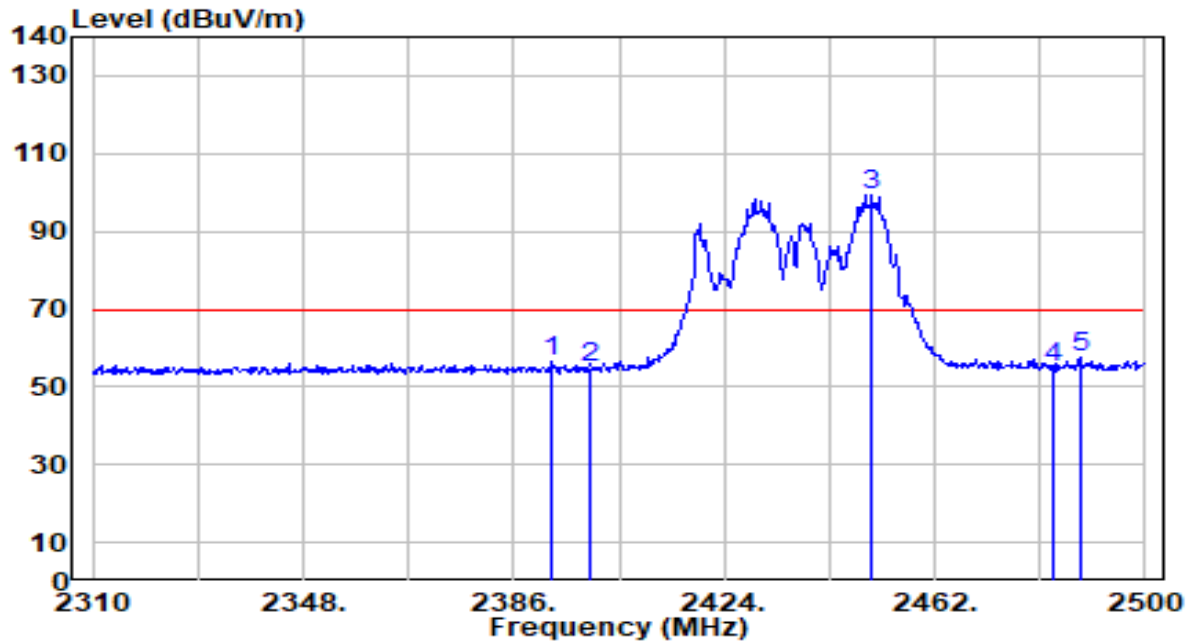


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2393.030	25.83	30.56	56.39	-13.15	69.54	178	220	Peak
2	2400.000	24.27	30.58	54.84	-14.70	69.54	178	220	Peak
3	2450.790	68.82	30.72	99.54	N/A	N/A	178	220	Peak
4	2483.500	23.94	30.81	54.75	-14.79	69.54	178	220	Peak
5	* 2488.220	26.67	30.83	57.49	-12.05	69.54	178	220	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

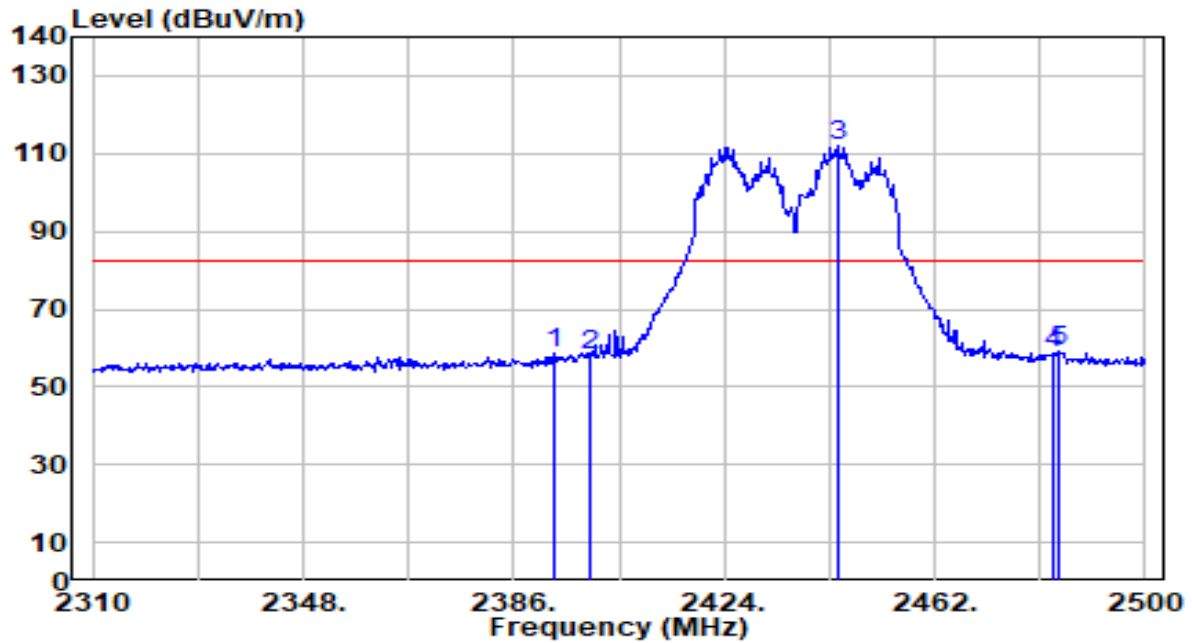


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2393.220	28.27	30.56	58.83	-23.35	82.18	200	326	Peak
2	2400.000	27.53	30.58	58.10	-24.08	82.18	200	326	Peak
3	2444.520	81.48	30.70	112.18	N/A	N/A	200	326	Peak
4	2483.500	27.79	30.81	58.60	-23.58	82.18	200	326	Peak
5	* 2484.420	28.20	30.82	59.01	-23.17	82.18	200	326	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

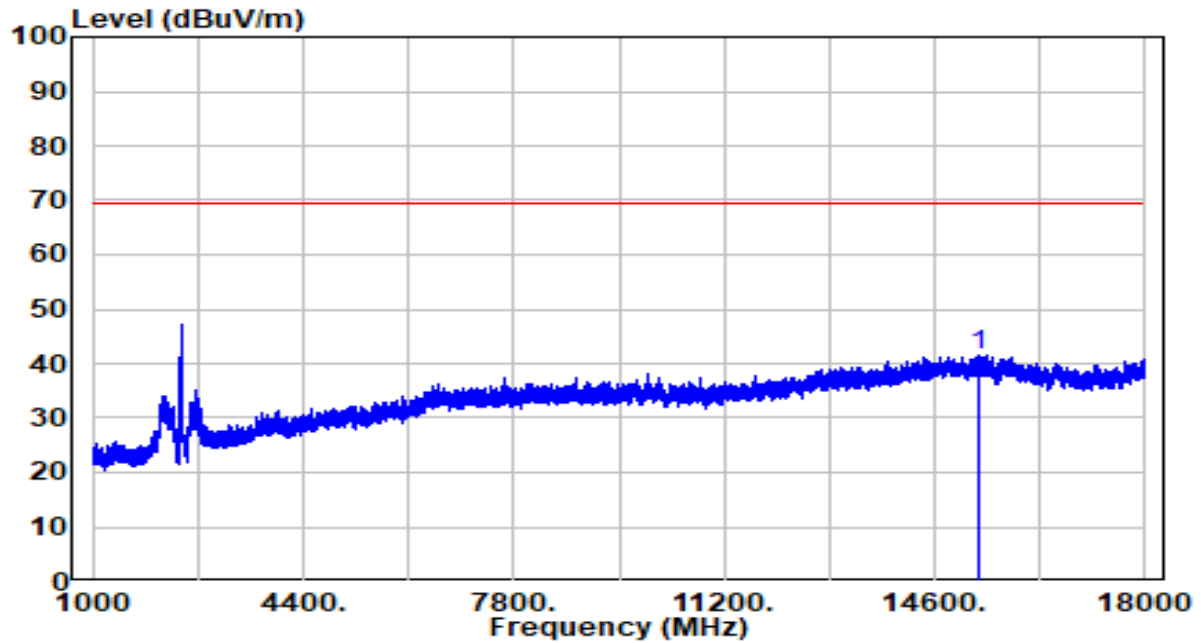


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15307.000	34.88	6.62	41.50	-28.04	69.54	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

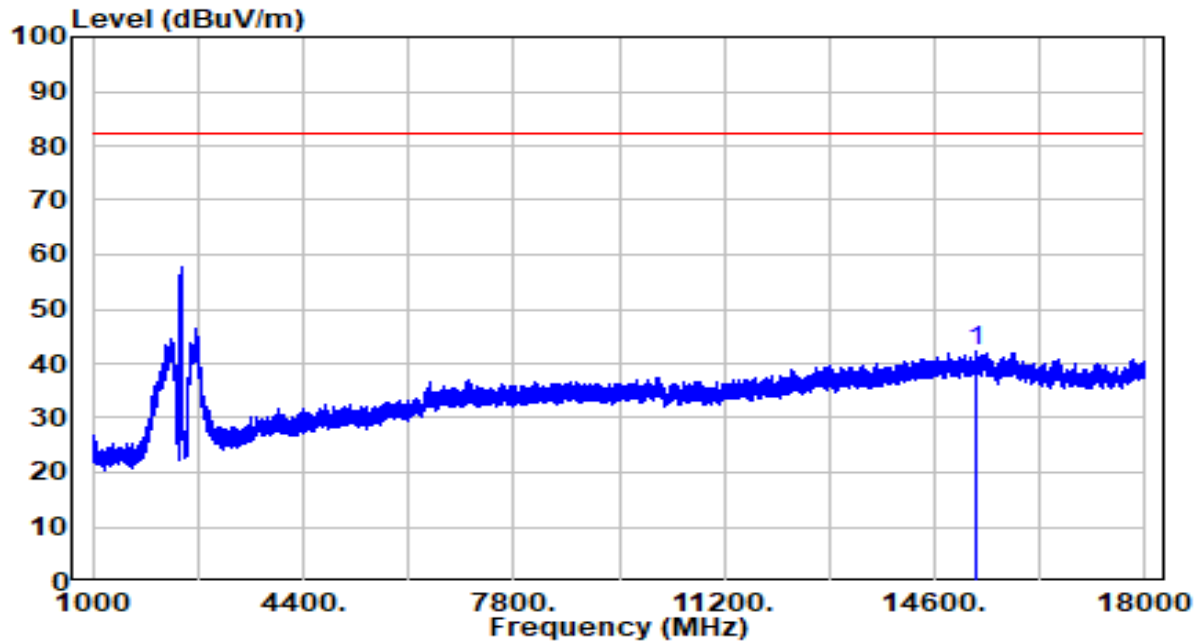


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15278.000	35.82	6.63	42.45	-39.73	82.18	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

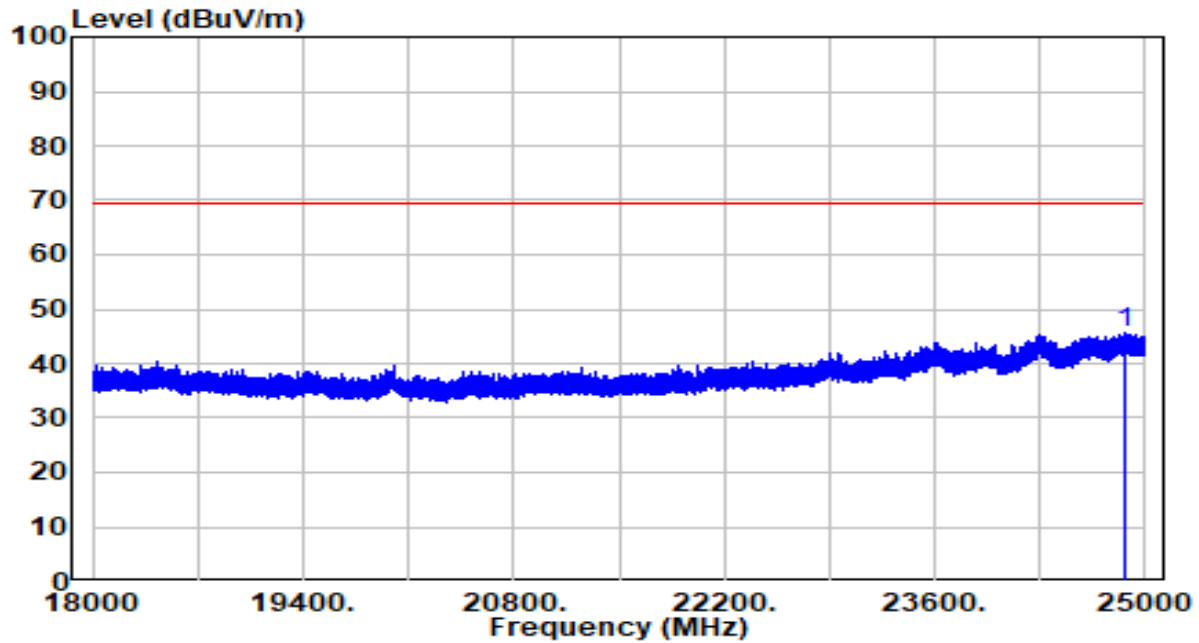


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24859.130	32.57	12.93	45.50	-24.04	69.54	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

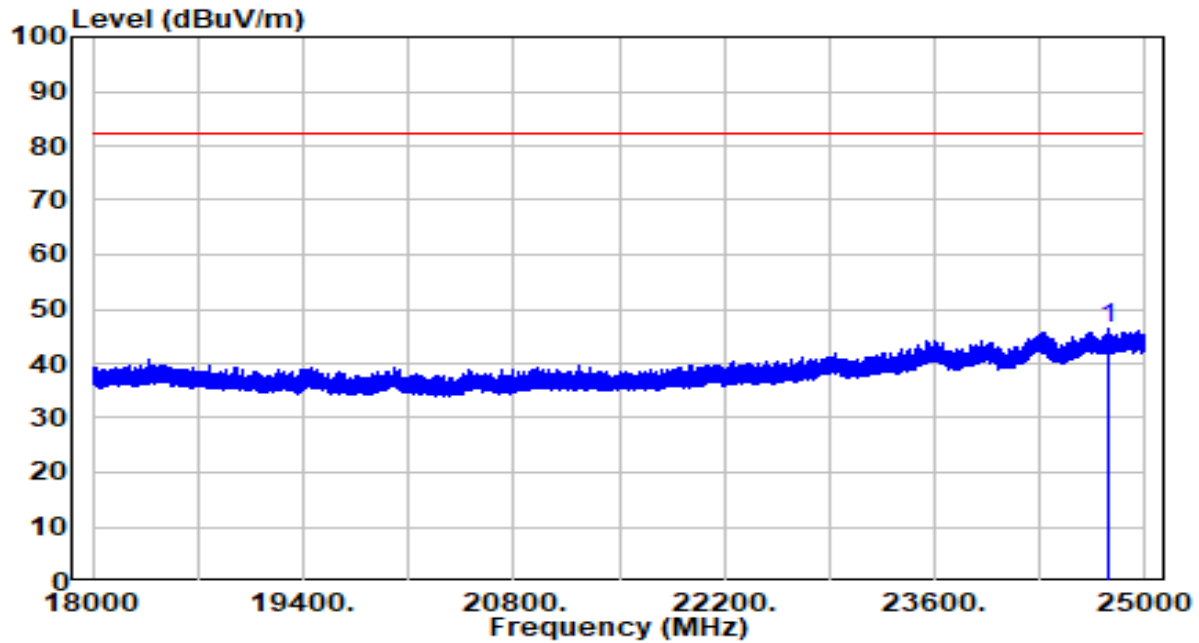


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24753.250	33.40	12.83	46.23	-35.95	82.18	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

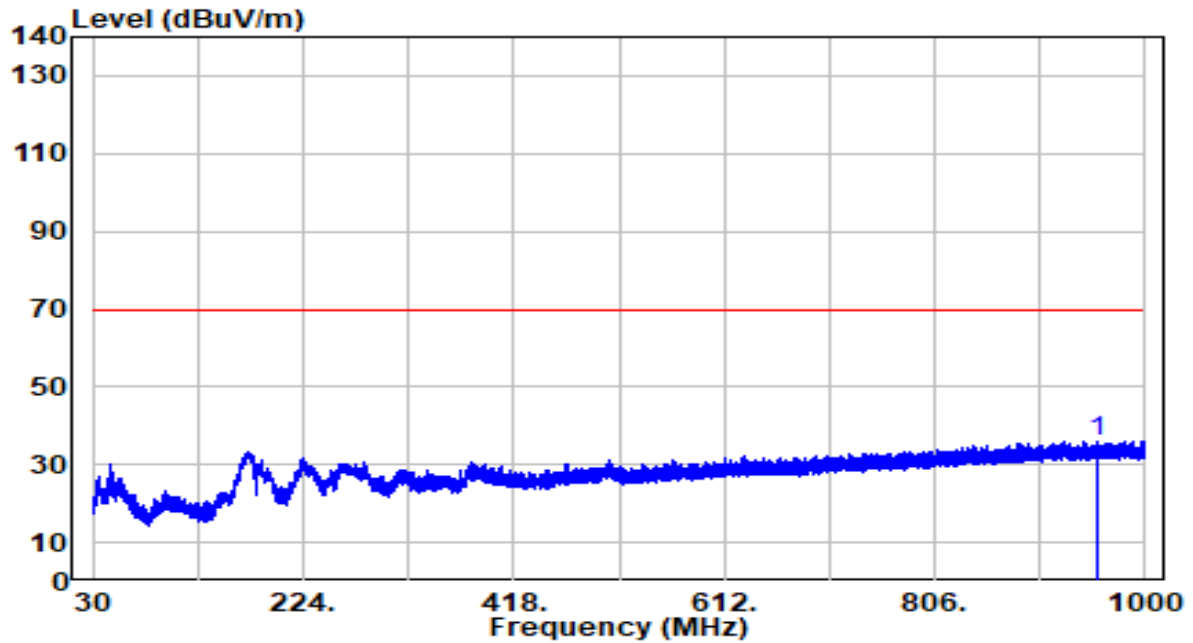


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	955.926	5.12	31.00	36.12	-33.42	69.54	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

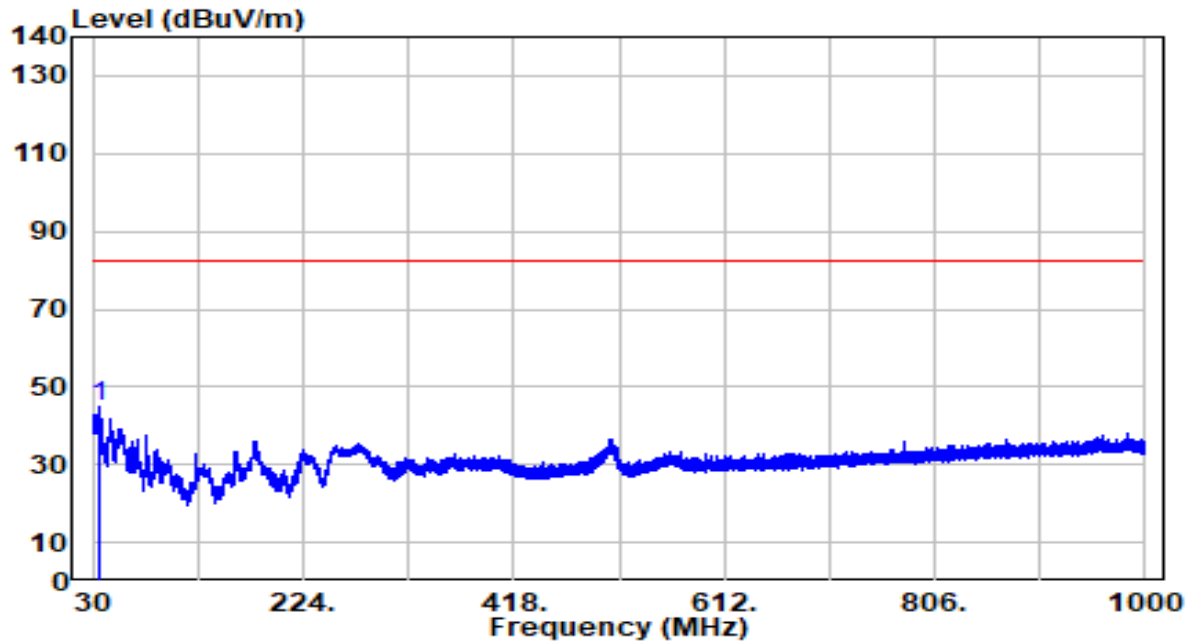


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.063	26.87	18.22	45.09	-37.09	82.18	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

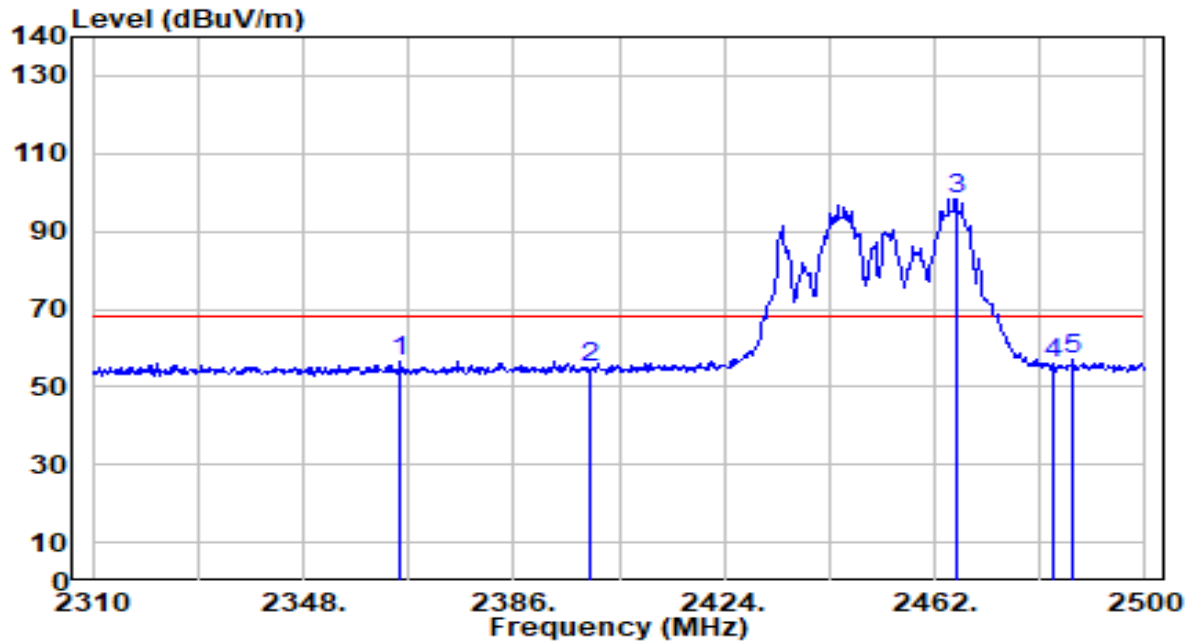


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.480	26.00	30.48	56.48	-11.85	68.33	200	226	Peak
2	2400.000	24.30	30.58	54.88	-13.45	68.33	200	226	Peak
3	2465.800	67.56	30.76	98.33	N/A	N/A	200	226	Peak
4	2483.500	24.93	30.81	55.74	-12.59	68.33	200	226	Peak
5	* 2486.890	26.02	30.82	56.84	-11.49	68.33	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

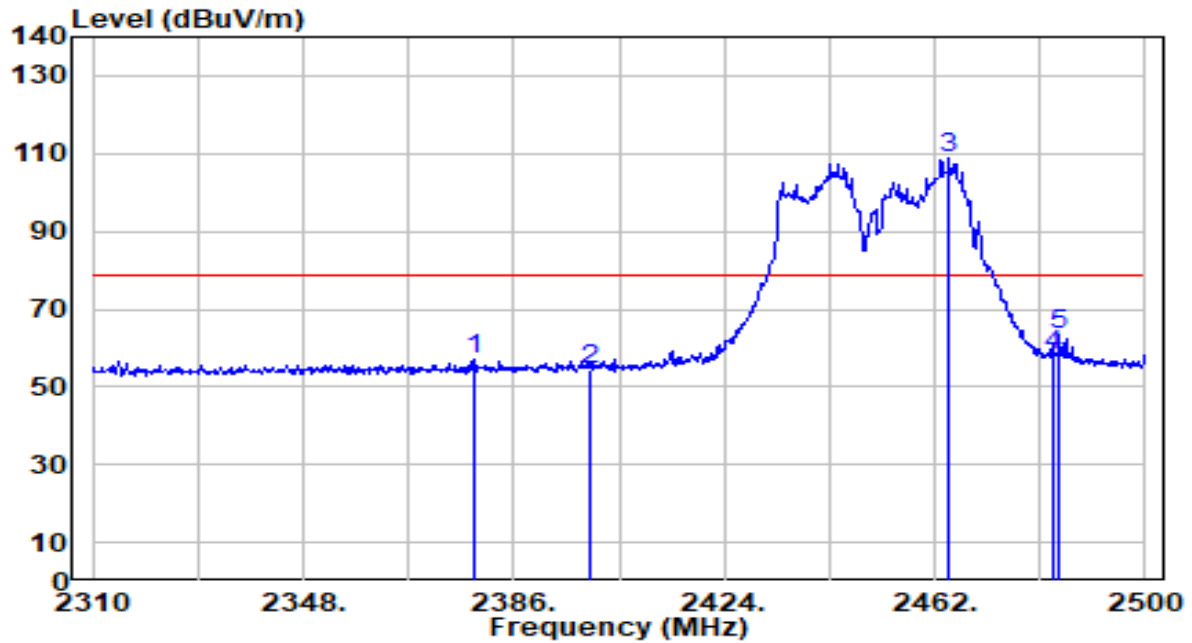


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2378.970	26.56	30.52	57.07	-21.60	78.67	200	154	Peak
2	2400.000	23.80	30.58	54.37	-24.30	78.67	200	154	Peak
3	2464.470	77.91	30.76	108.67	N/A	N/A	200	154	Peak
4	2483.500	27.51	30.81	58.32	-20.35	78.67	200	154	Peak
5	* 2484.420	32.82	30.82	63.64	-15.03	78.67	200	154	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

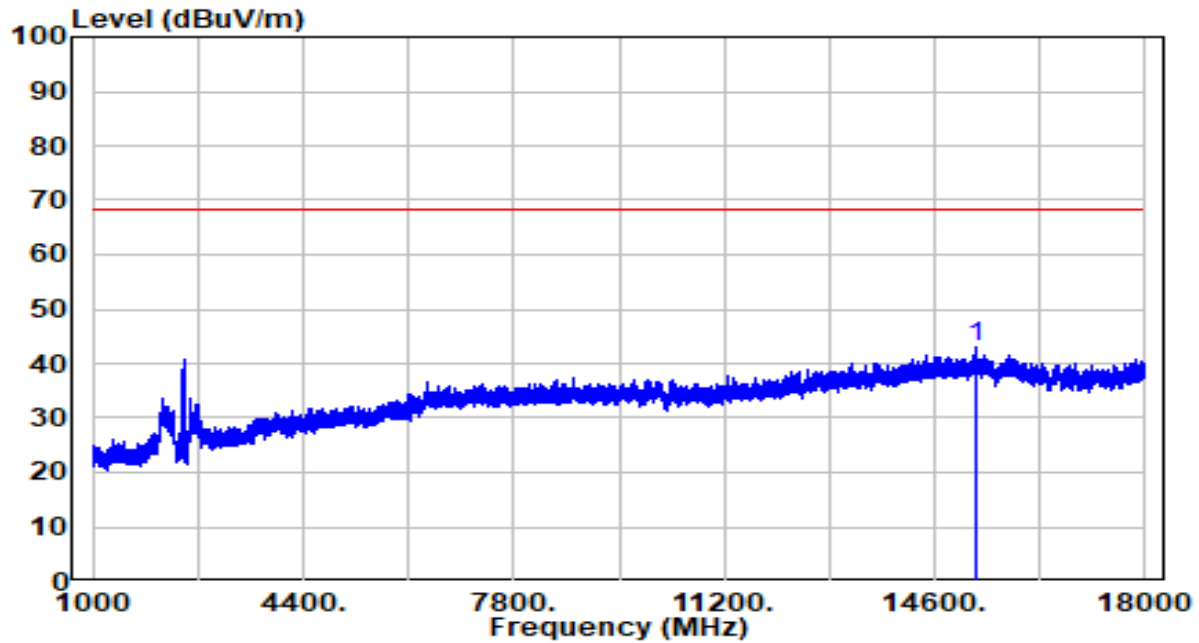


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15267.000	36.33	6.64	42.97	-25.36	68.33	100	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

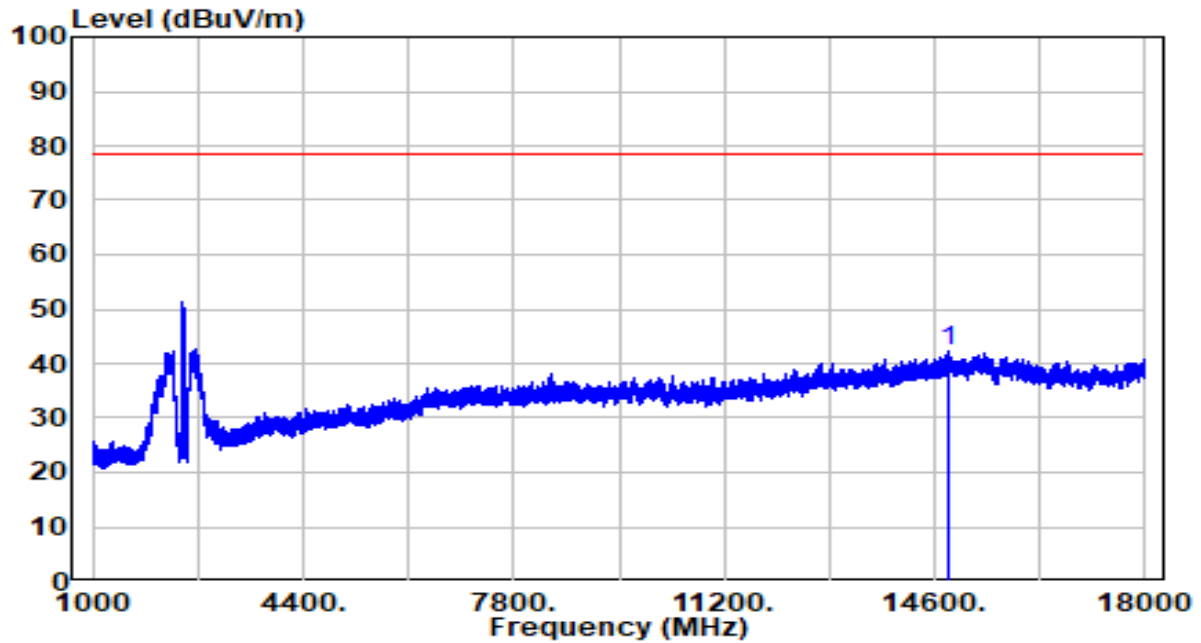


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14833.000	35.32	6.79	42.10	-36.57	78.67	100	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

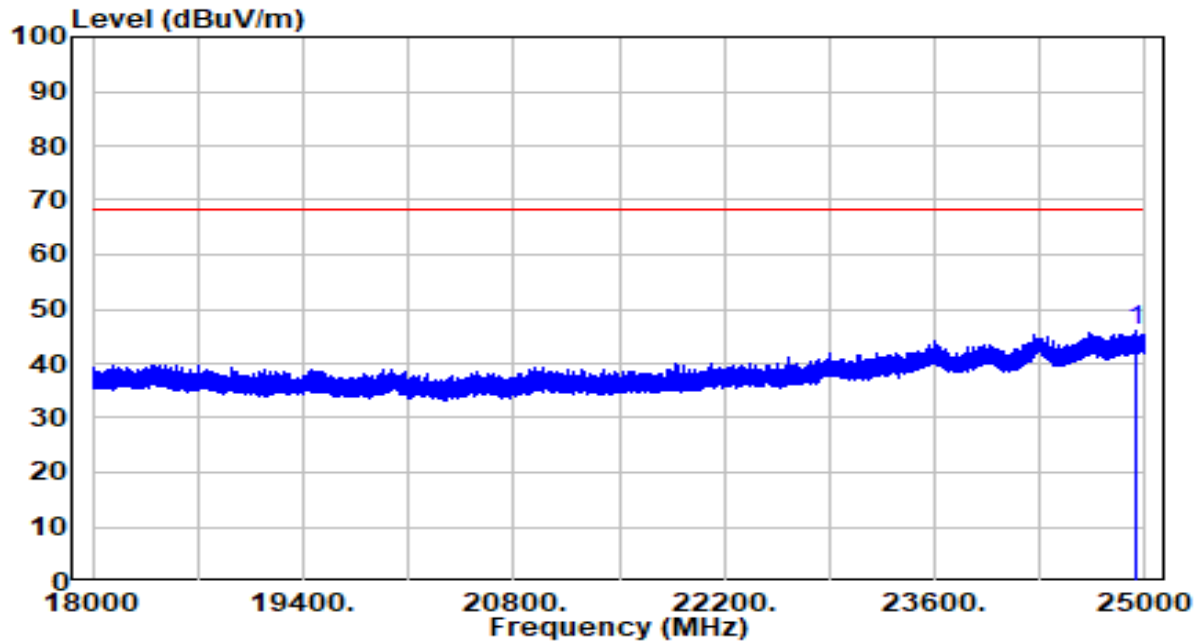


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24938.310	33.04	13.00	46.04	-22.29	68.33	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

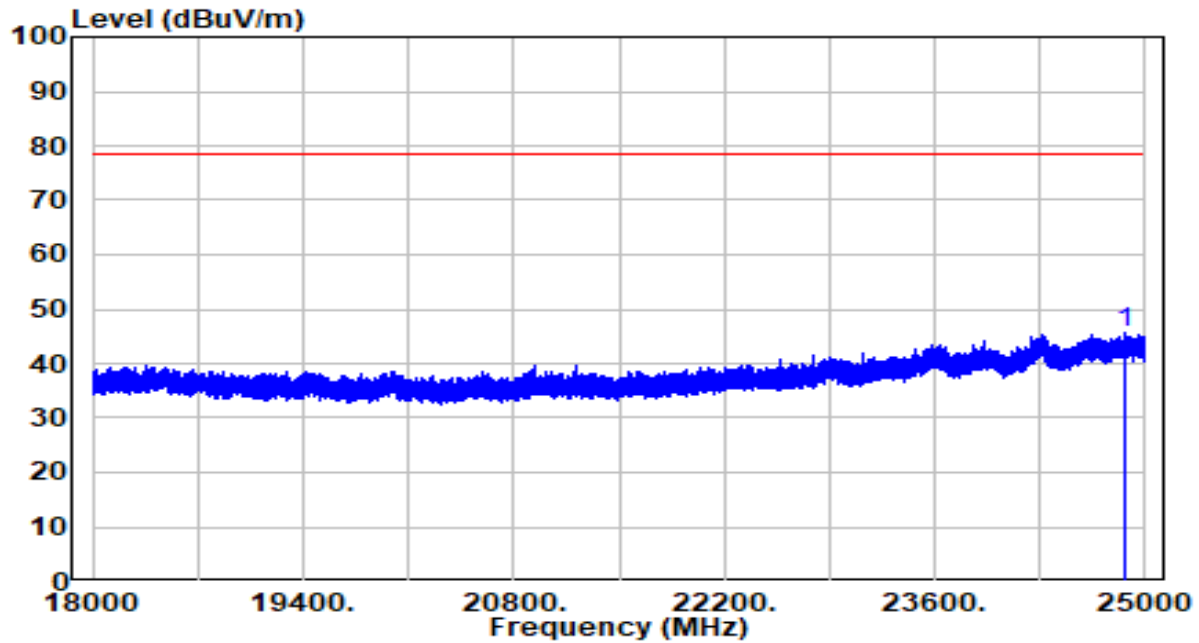


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24870.720	32.84	12.94	45.77	-32.90	78.67	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

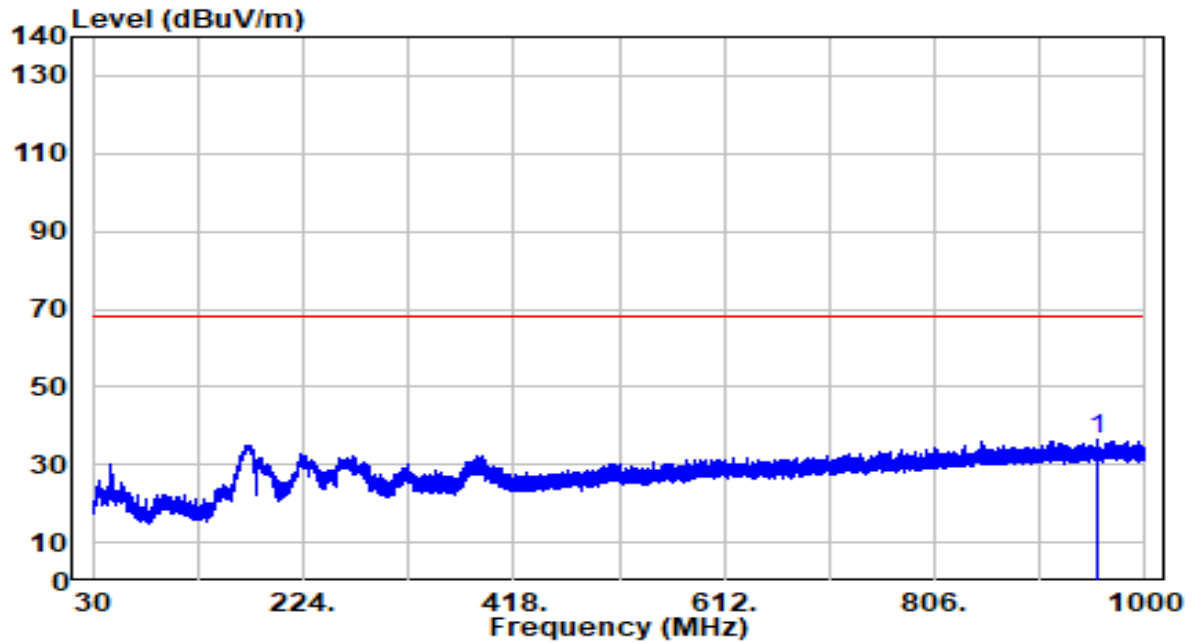


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	956.320	5.36	31.01	36.37	-31.96	68.33	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

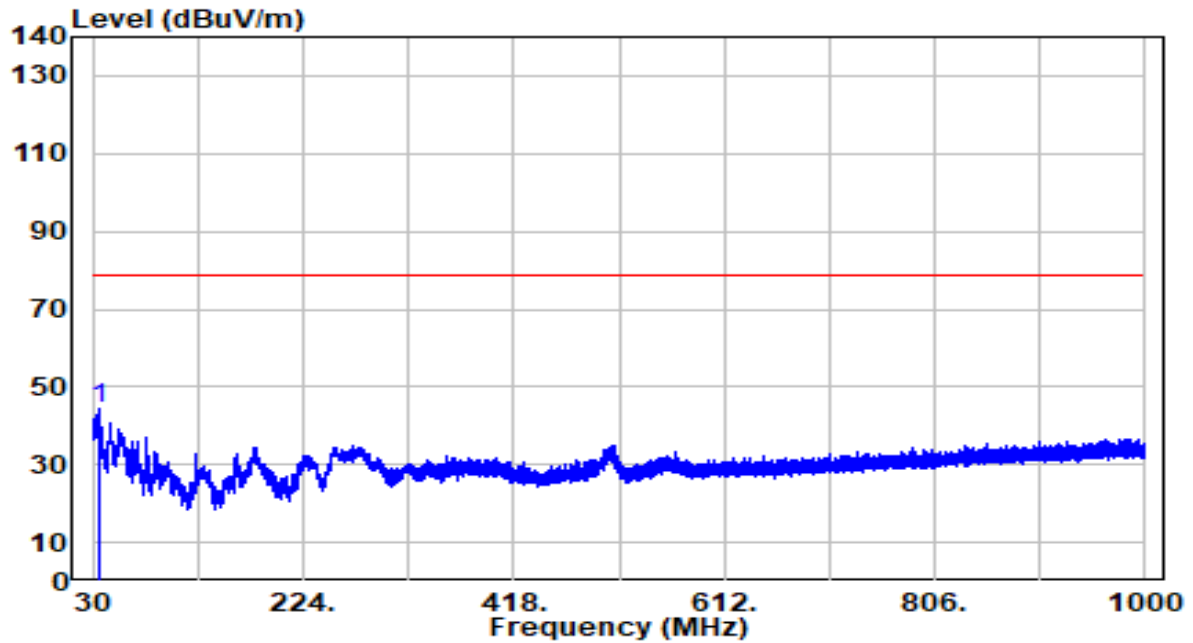


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.972	26.03	18.19	44.22	-34.45	78.67	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

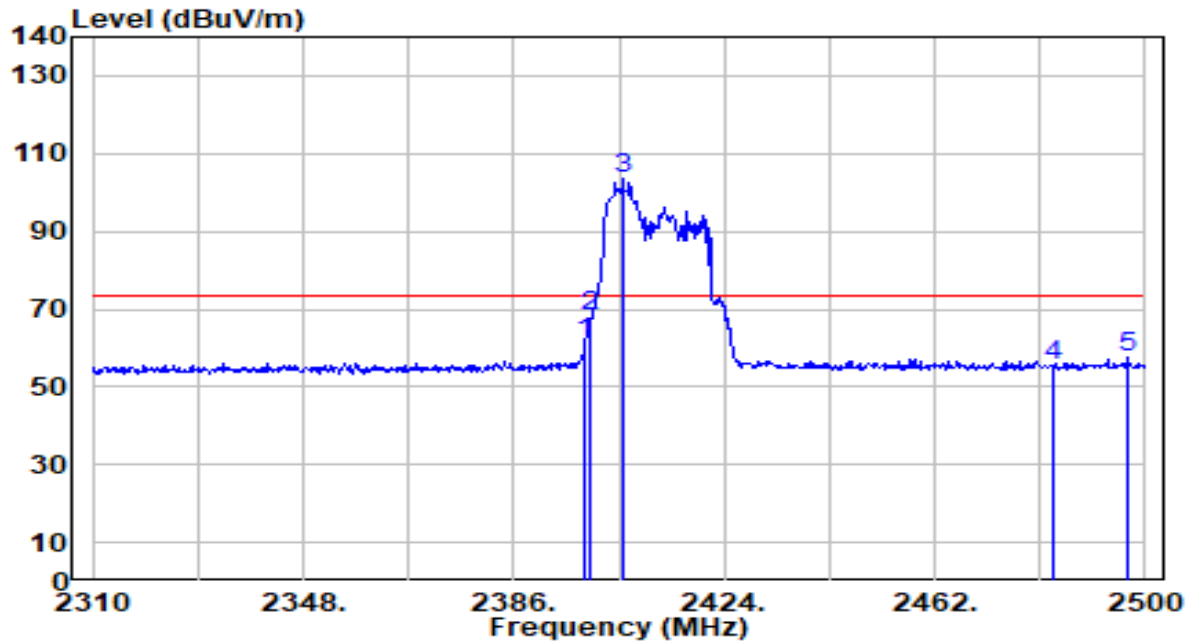


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.920	30.65	30.57	61.22	-12.26	73.48	100	212	Peak
2	*	2400.000	37.74	30.58	68.32	-5.16	73.48	100	212	Peak
3		2405.760	72.89	30.59	103.48	N/A	N/A	100	212	Peak
4		2483.500	24.79	30.81	55.61	-17.87	73.48	100	212	Peak
5		2496.770	26.54	30.85	57.39	-16.09	73.48	100	212	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

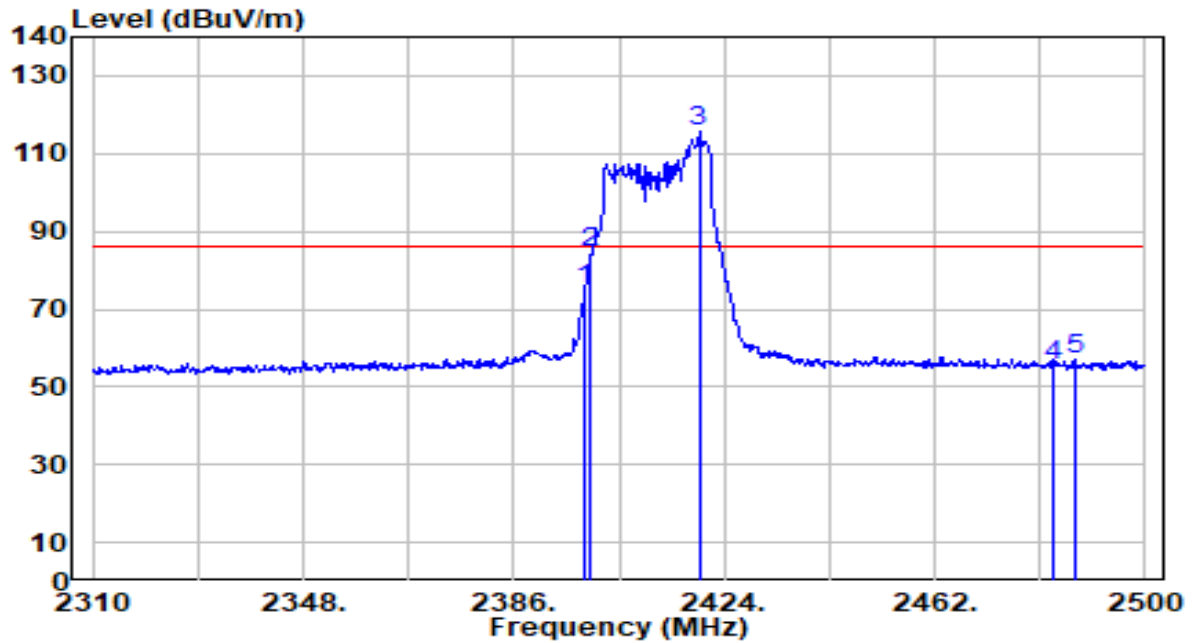


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.730	44.54	30.57	75.11	-10.78	85.89	200	320	Peak
2	*	2400.000	53.85	30.58	84.43	-1.46	85.89	200	320	Peak
3		2419.440	85.26	30.63	115.89	N/A	N/A	200	320	Peak
4		2483.500	24.78	30.81	55.59	-30.30	85.89	200	320	Peak
5		2487.270	26.20	30.82	57.03	-28.86	85.89	200	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

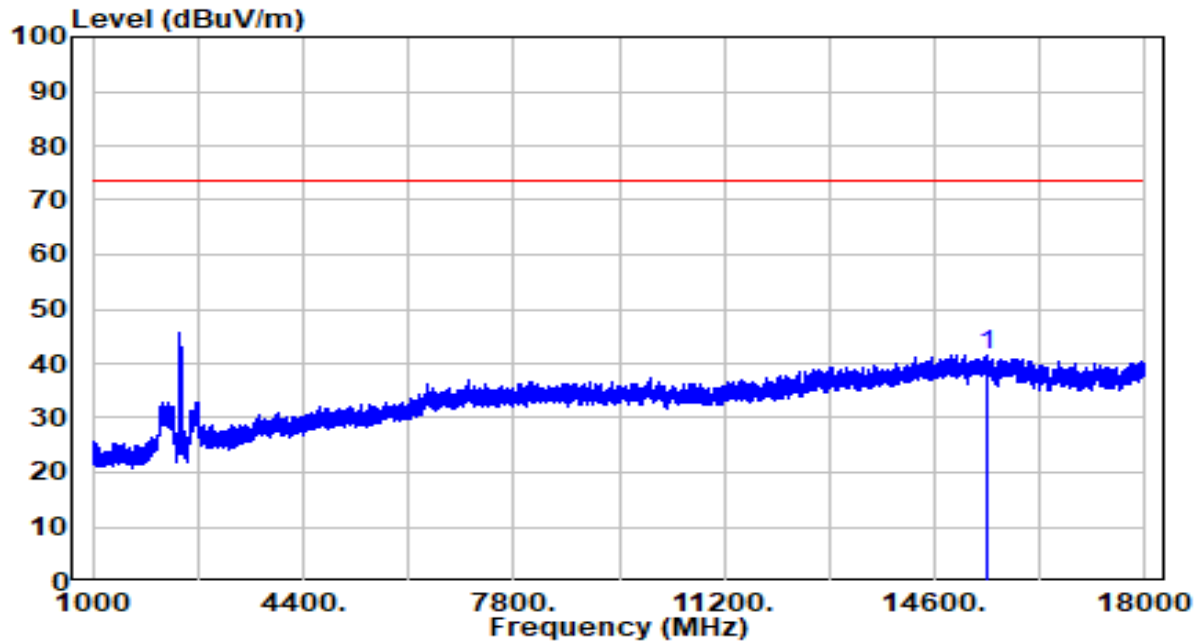


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15430.000	35.05	6.51	41.57	-31.91	73.48	100	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

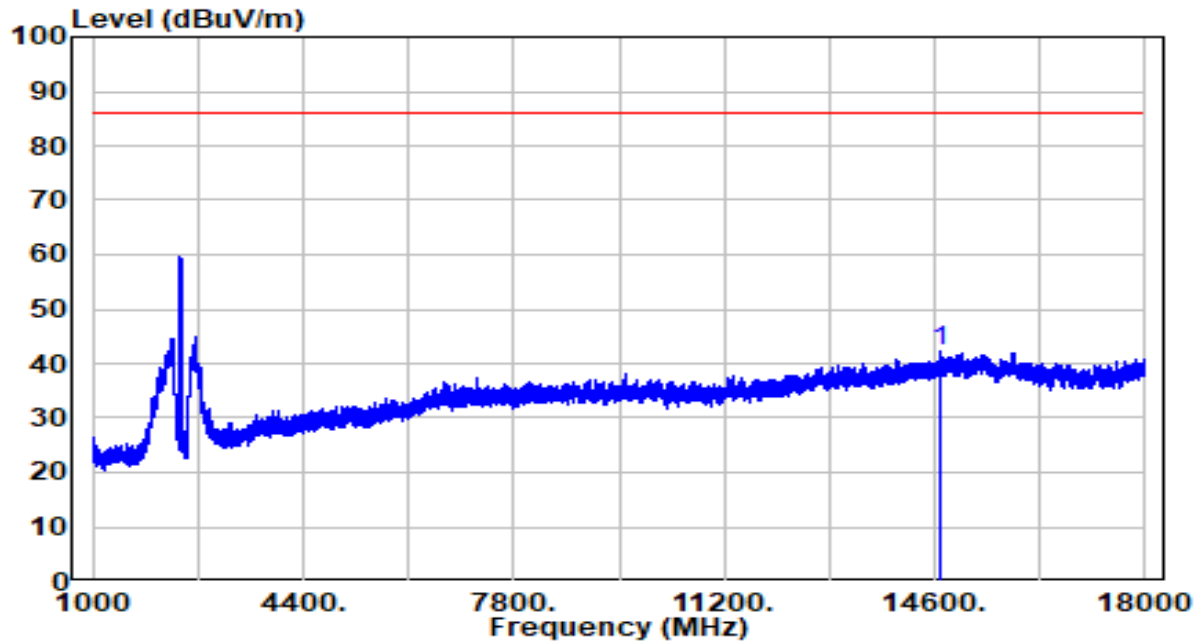


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14676.000	35.46	6.80	42.26	-43.63	85.89	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

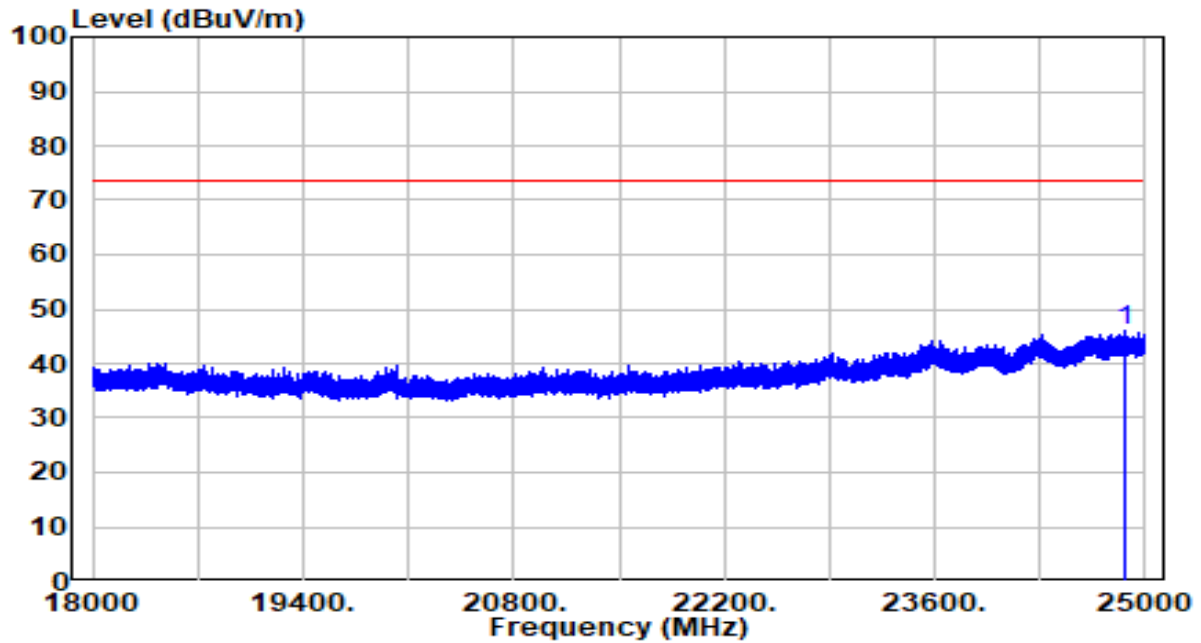


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24861.970	32.98	12.93	45.91	-27.57	73.48	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

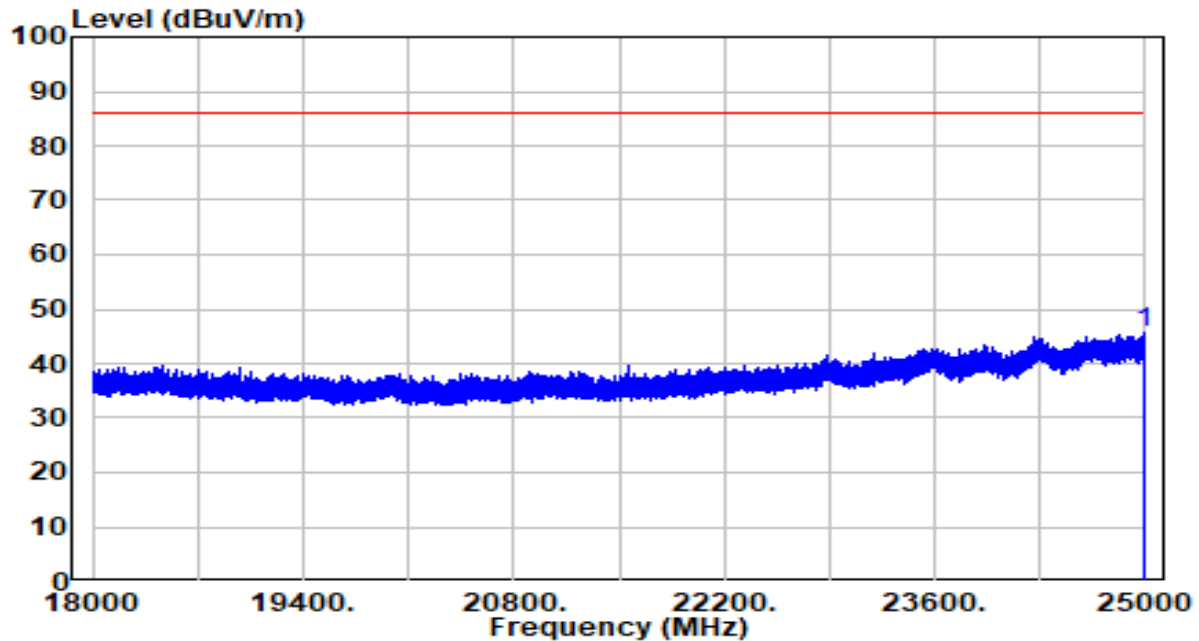


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24985.780	32.58	13.04	45.63	-40.26	85.89	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

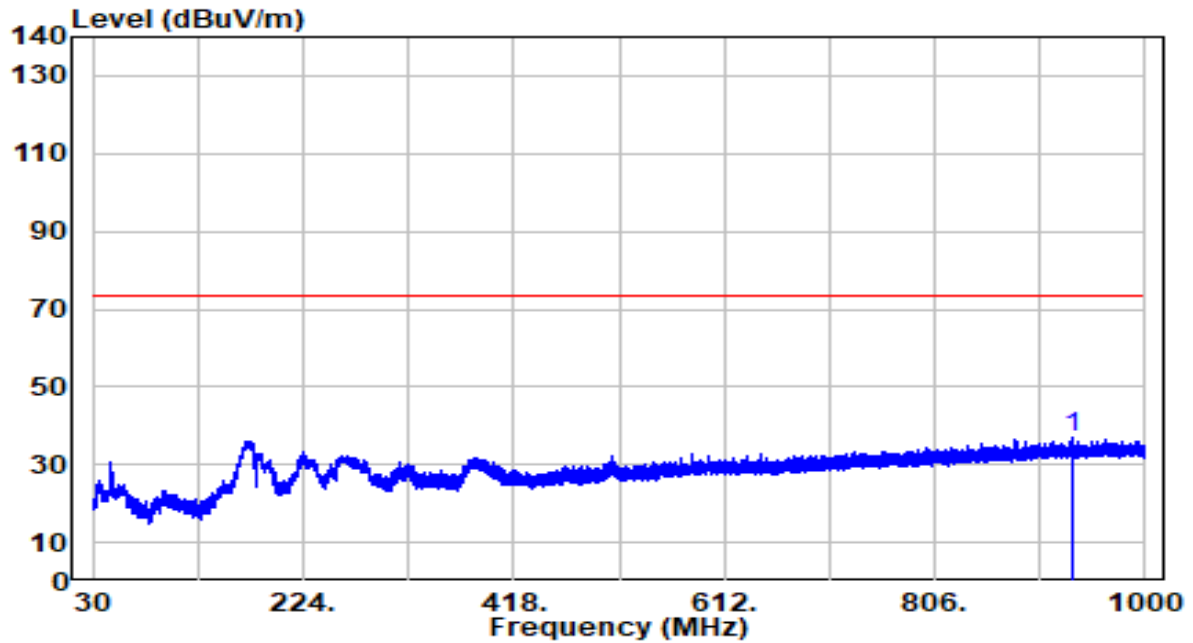


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	932.706	5.93	30.85	36.78	-36.70	73.48	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

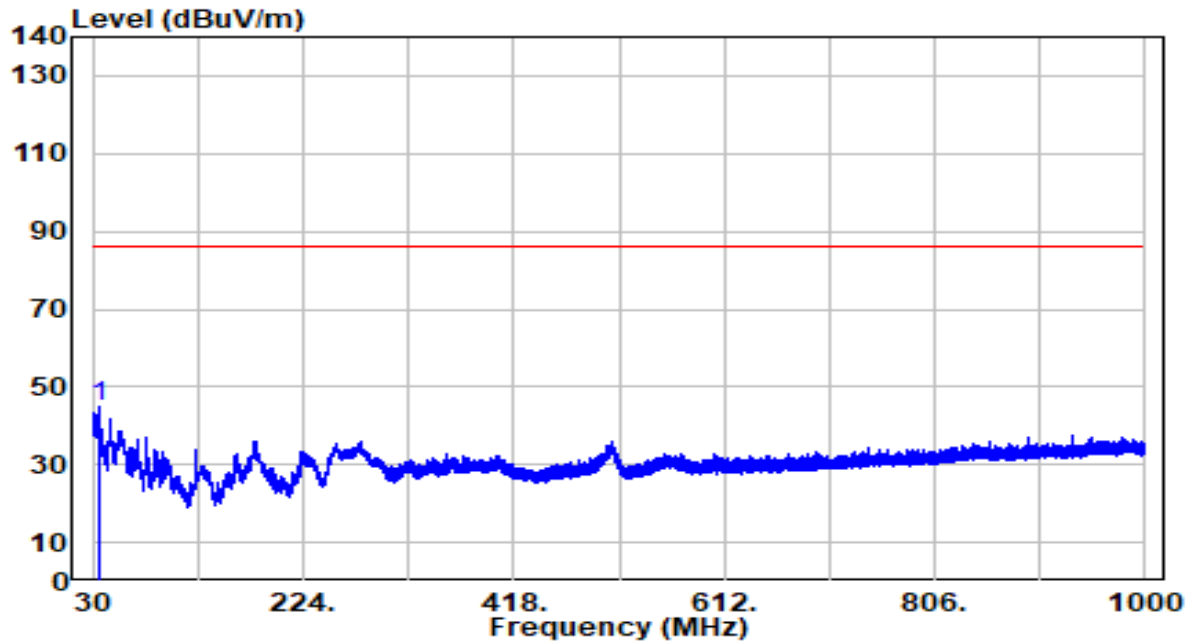


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.032	26.43	18.21	44.64	-41.25	85.89	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

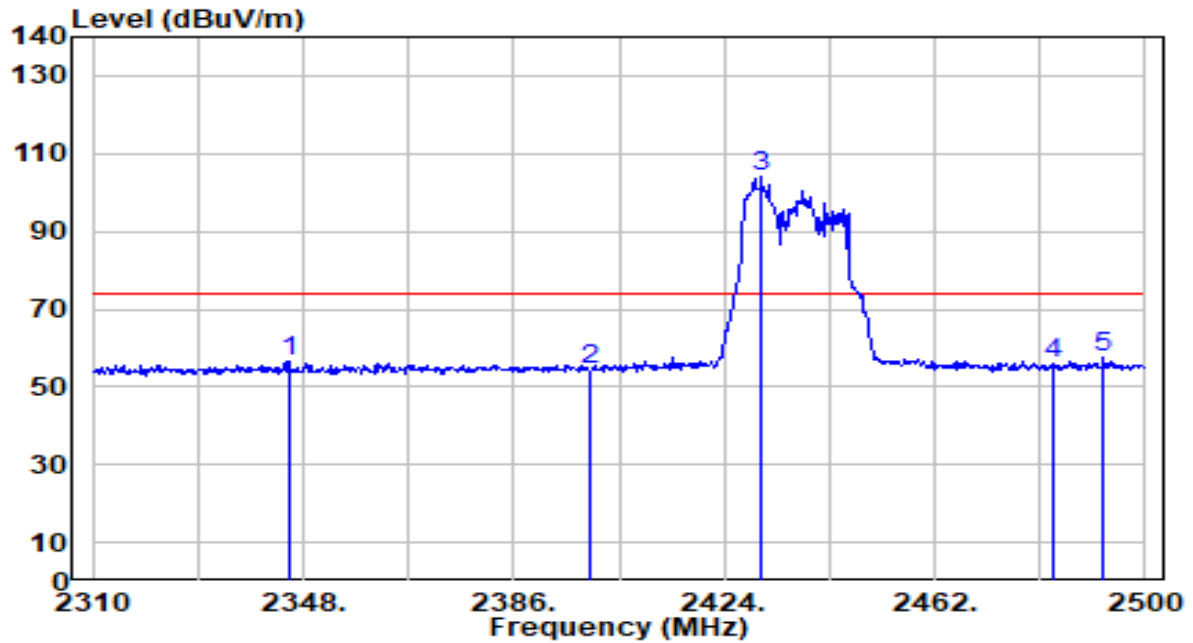


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2345.340	25.93	30.42	56.35	-17.53	73.88	183	225	Peak
2	2400.000	23.65	30.58	54.22	-19.66	73.88	183	225	Peak
3	2430.650	73.22	30.66	103.88	N/A	N/A	183	225	Peak
4	2483.500	24.97	30.81	55.79	-18.09	73.88	183	225	Peak
5	* 2492.400	26.62	30.84	57.46	-16.42	73.88	183	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

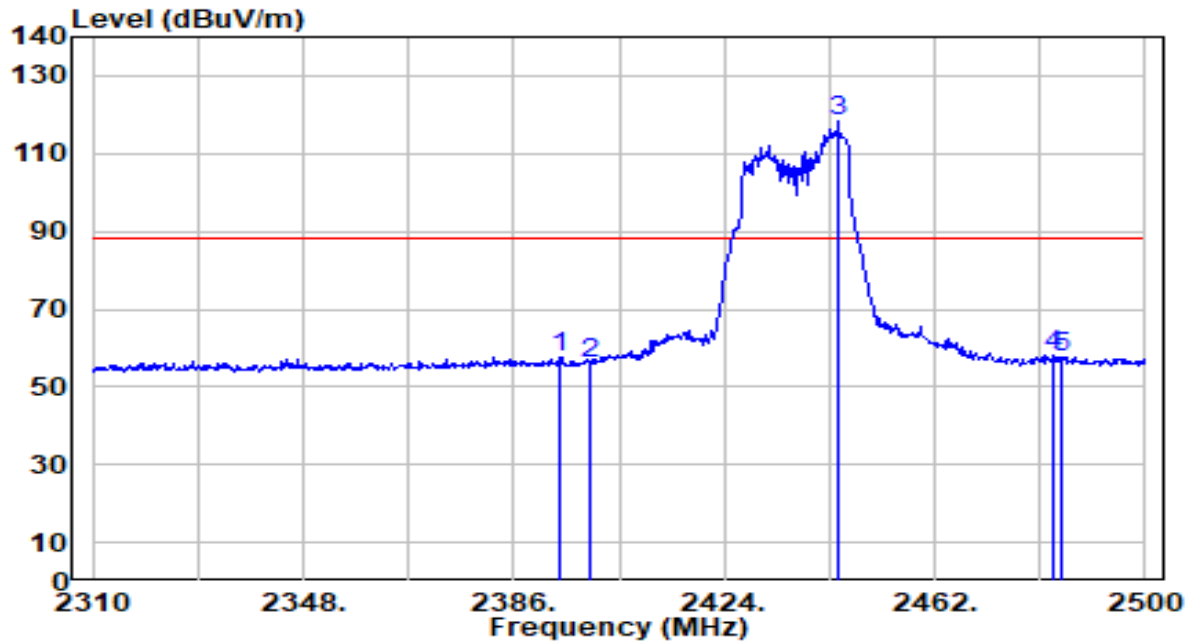


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2394.360	27.00	30.56	57.56	-30.52	88.08	200	324	Peak
2	2400.000	25.65	30.58	56.23	-31.85	88.08	200	324	Peak
3	2444.520	87.38	30.70	118.08	N/A	N/A	200	324	Peak
4	* 2483.500	27.24	30.81	58.06	-30.02	88.08	200	324	Peak
5	2484.990	26.75	30.82	57.57	-30.51	88.08	200	324	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

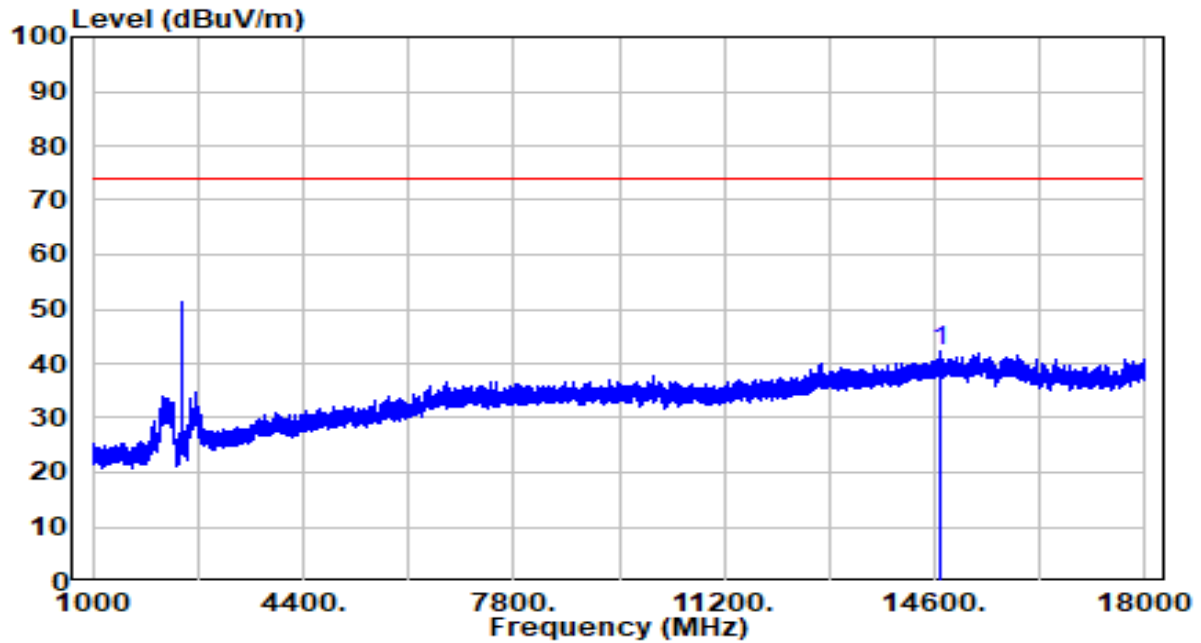


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14675.000	35.34	6.80	42.14	-31.74	73.88	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

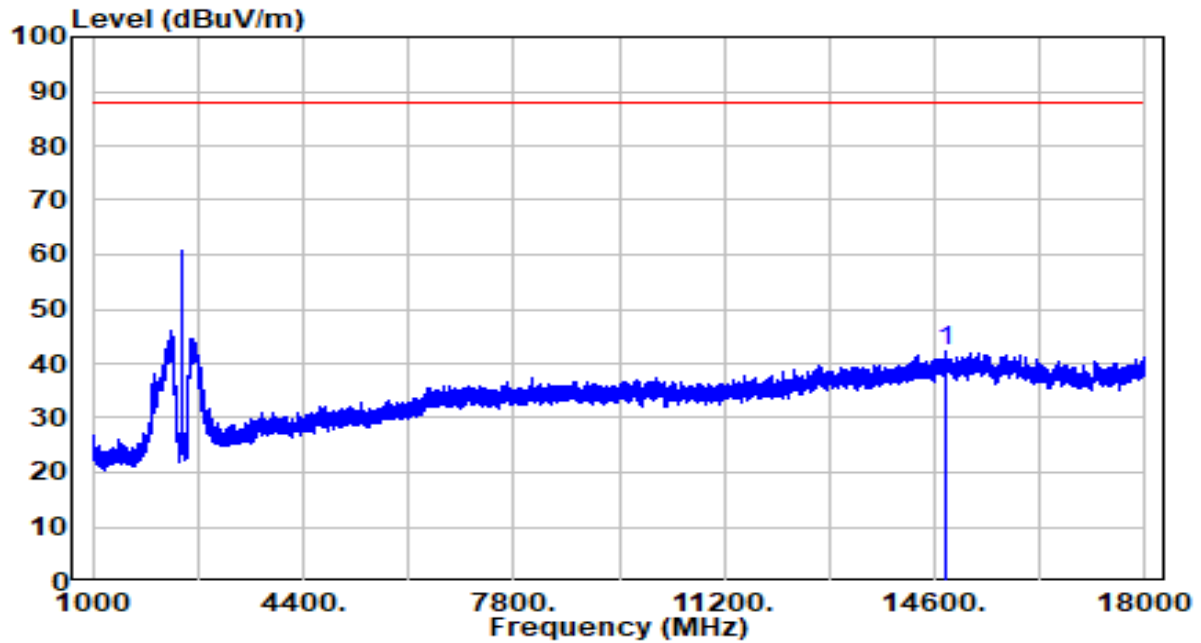


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14796.000	35.41	6.81	42.22	-45.86	88.08	100	271	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

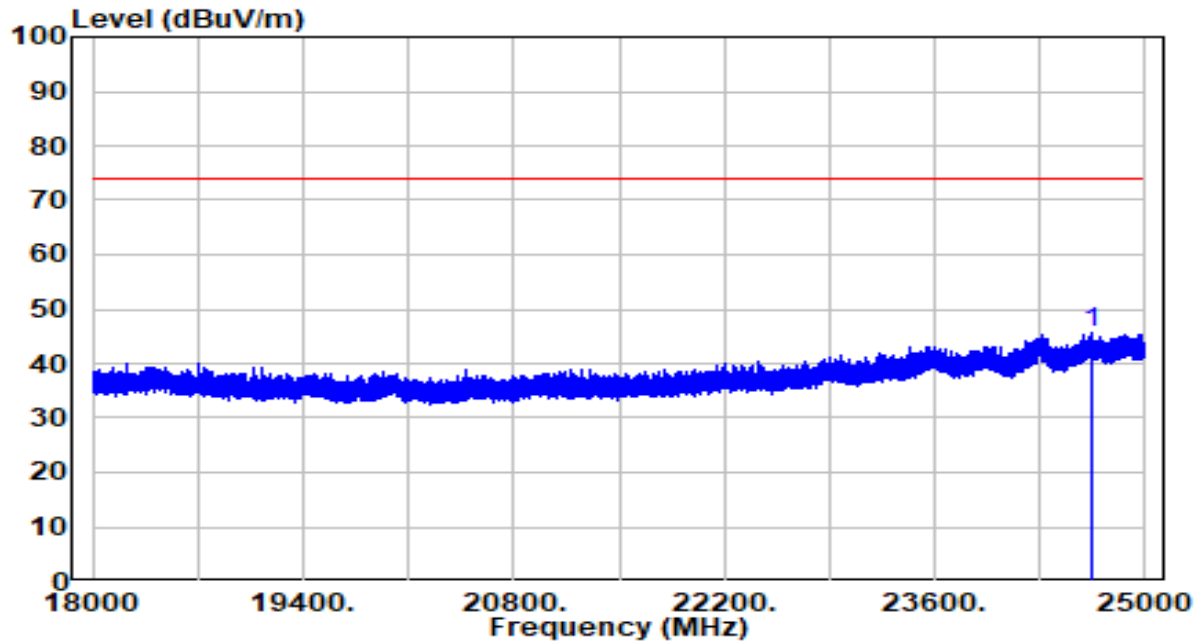


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24652.840	32.77	12.74	45.51	-28.37	73.88	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

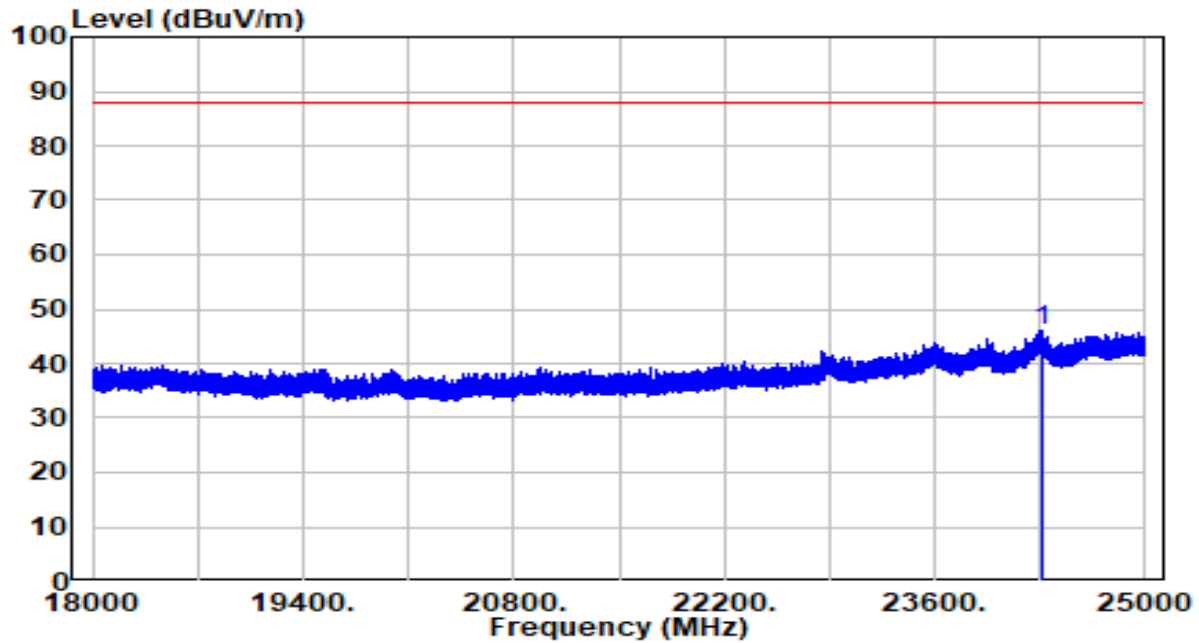


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24315.310	33.46	12.55	46.01	-42.07	88.08	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

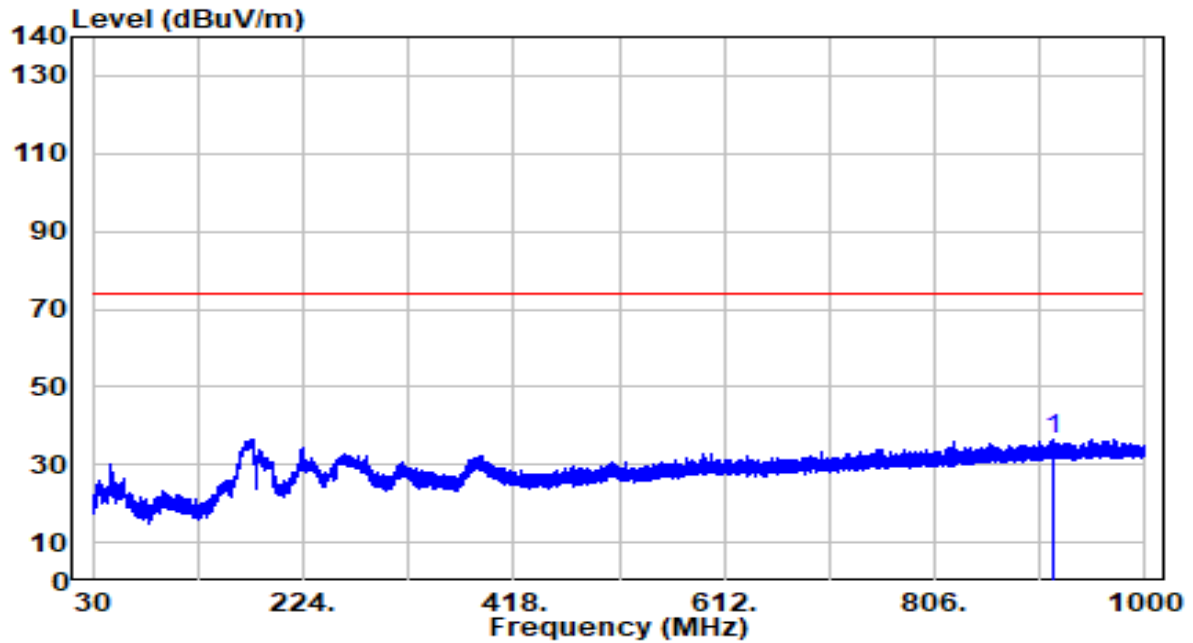


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	915.307	5.69	30.77	36.46	-37.42	73.88	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

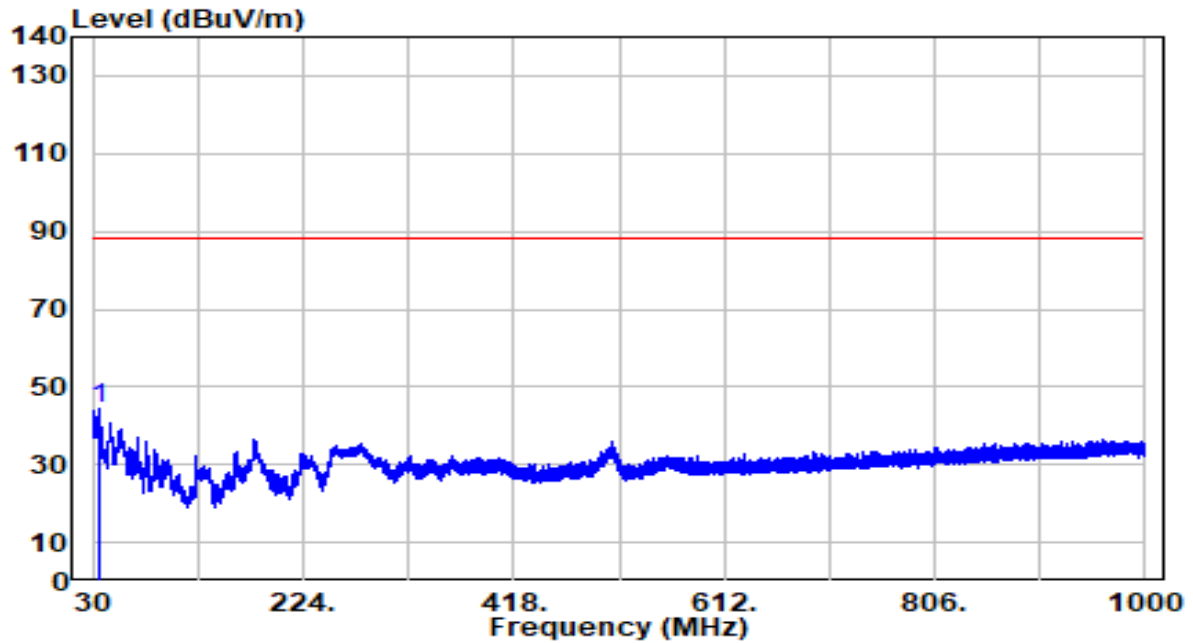


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.547	26.36	18.02	44.39	-43.69	88.08	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

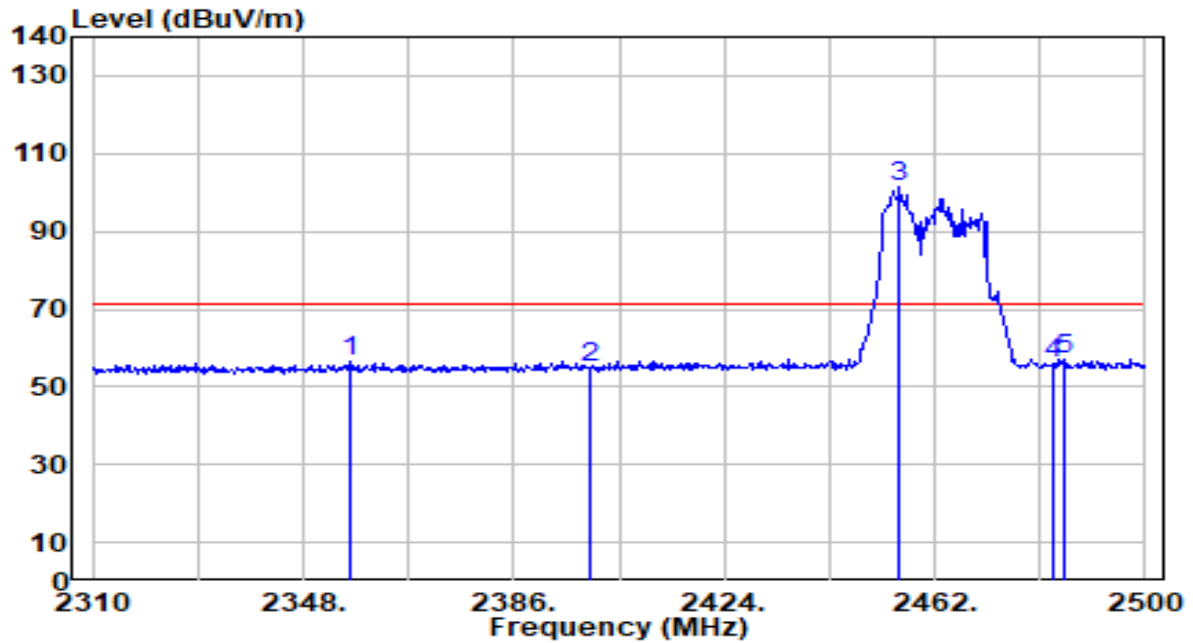


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2356.550	25.93	30.45	56.38	-14.91	71.29	200	226	Peak
2	2400.000	24.12	30.58	54.69	-16.60	71.29	200	226	Peak
3	2455.730	70.55	30.73	101.29	N/A	N/A	200	226	Peak
4	2483.500	25.41	30.81	56.22	-15.07	71.29	200	226	Peak
5	* 2485.180	26.34	30.82	57.16	-14.13	71.29	200	226	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

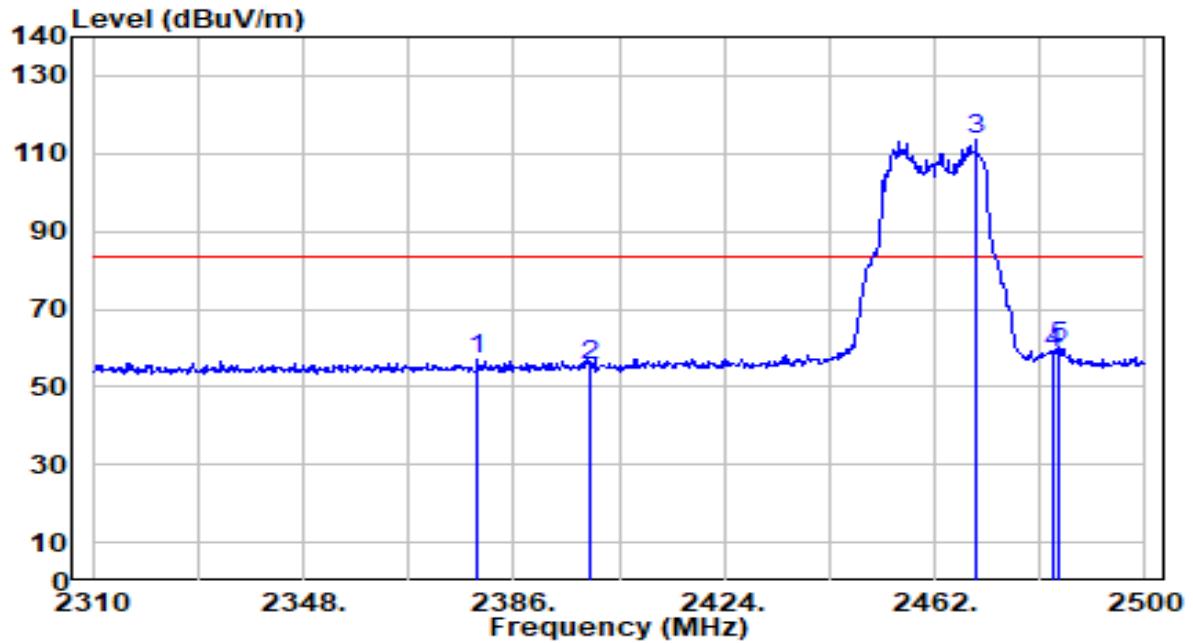


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.350	26.38	30.52	56.90	-26.44	83.34	200	334	Peak
2	2400.000	25.04	30.58	55.62	-27.72	83.34	200	334	Peak
3	2469.410	82.56	30.77	113.34	N/A	N/A	200	334	Peak
4	2483.500	27.59	30.81	58.41	-24.93	83.34	200	334	Peak
5	* 2484.420	29.28	30.82	60.10	-23.24	83.34	200	334	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

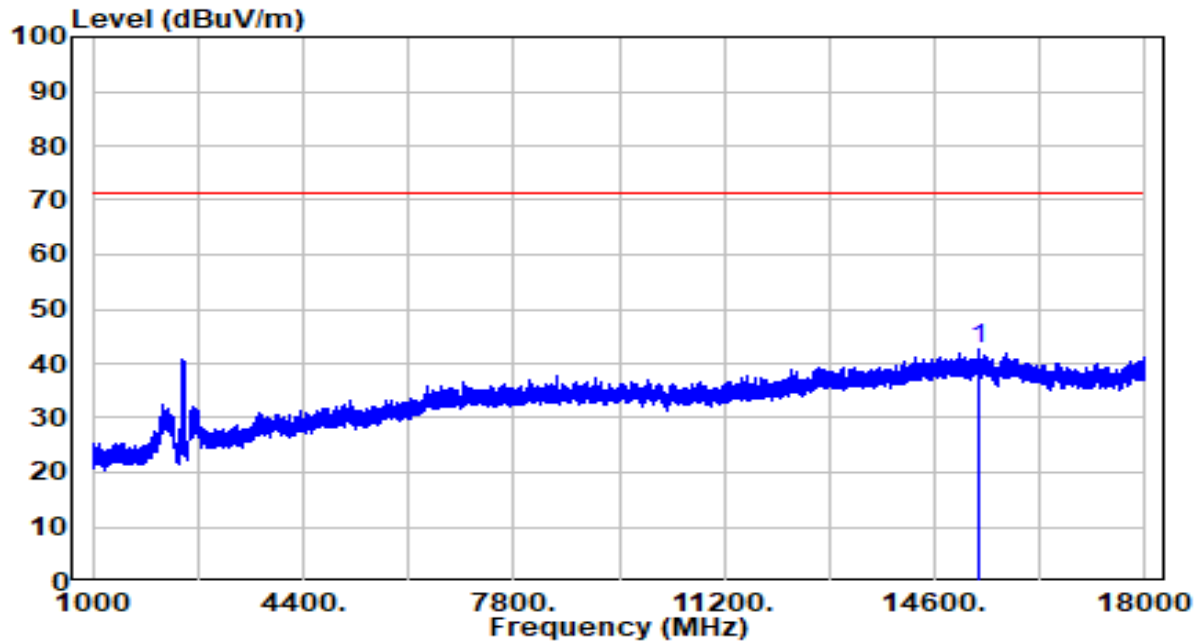


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15333.000	35.93	6.61	42.54	-28.75	71.29	100	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

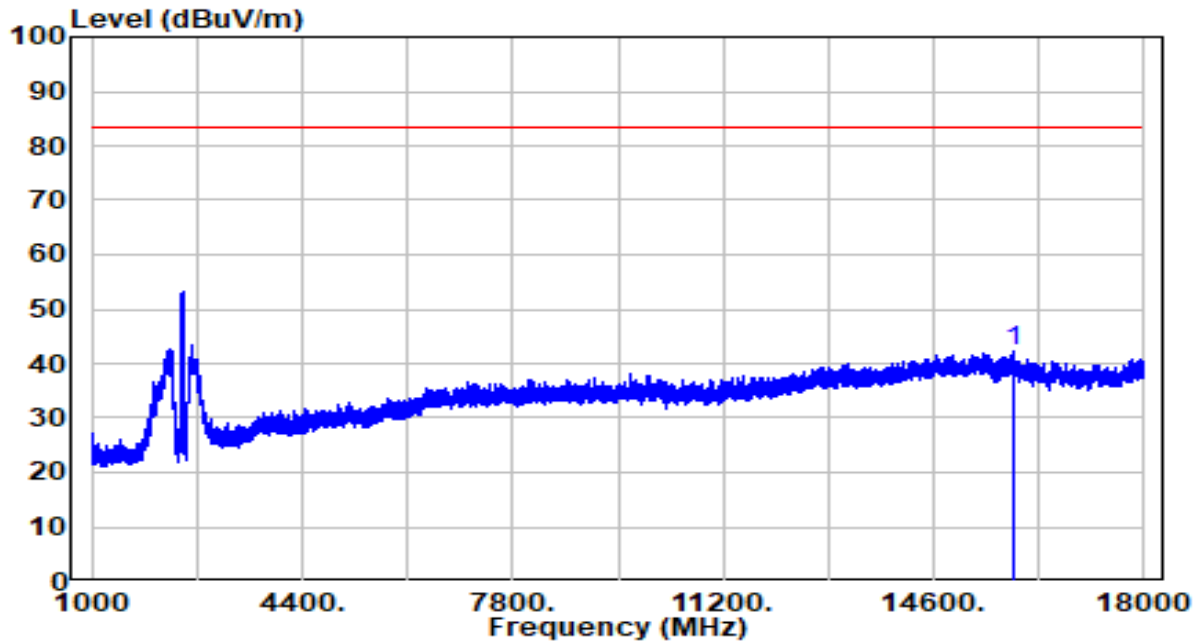


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15899.000	35.77	6.64	42.41	-40.93	83.34	100	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

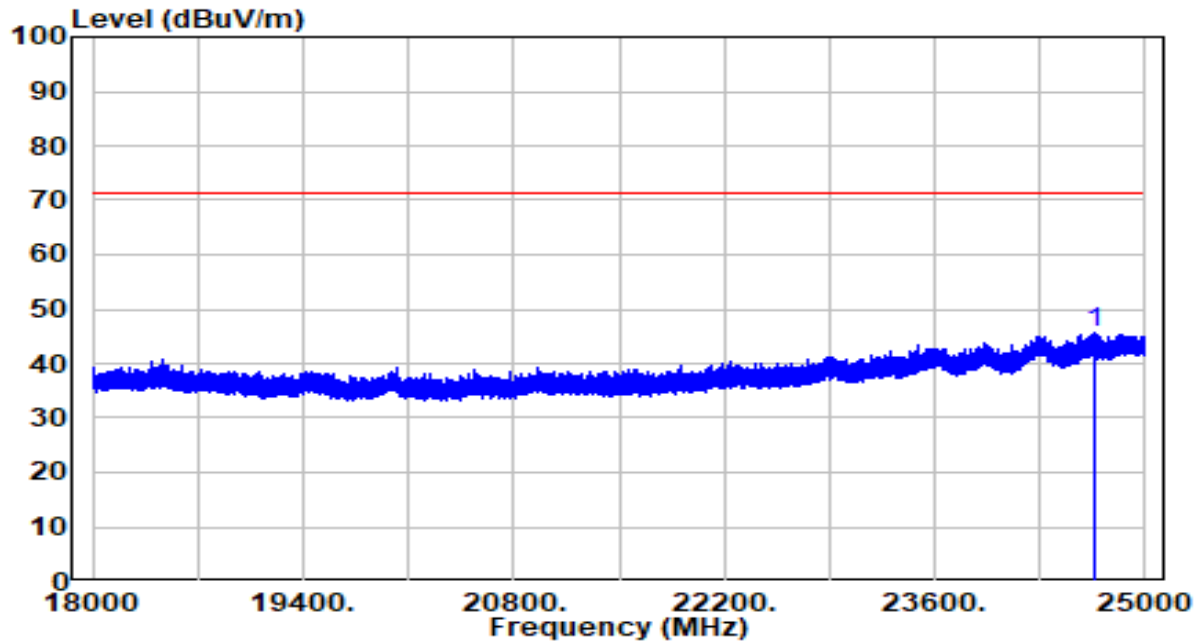


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24668.810	32.94	12.76	45.69	-25.60	71.29	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

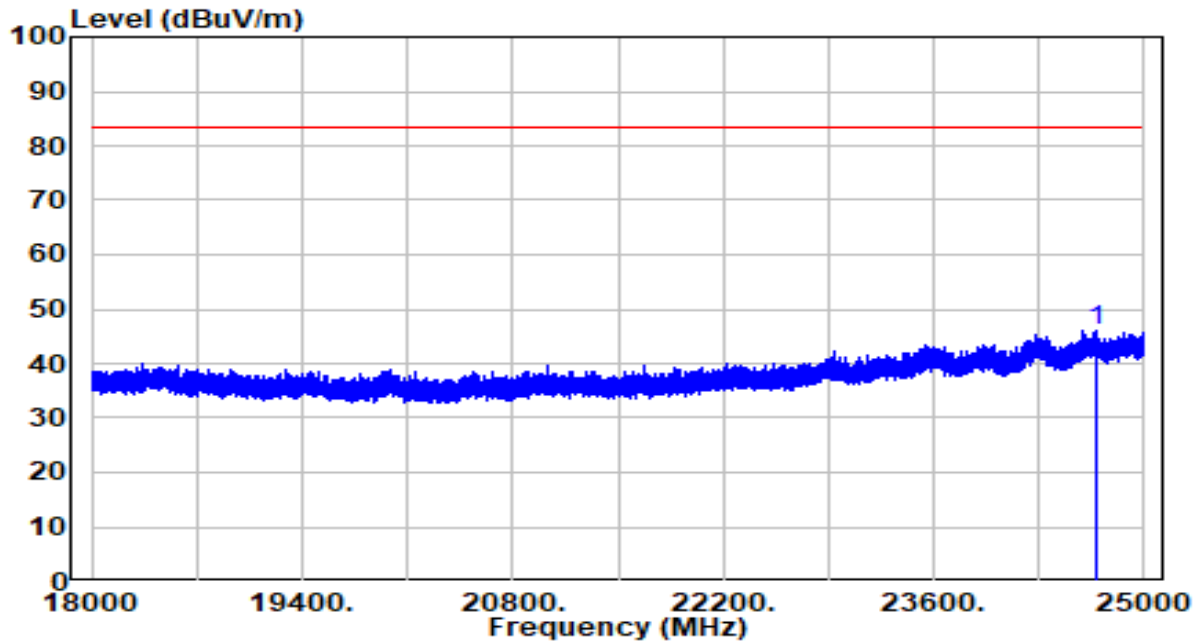


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24678.000	33.32	12.76	46.08	-37.26	83.34	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

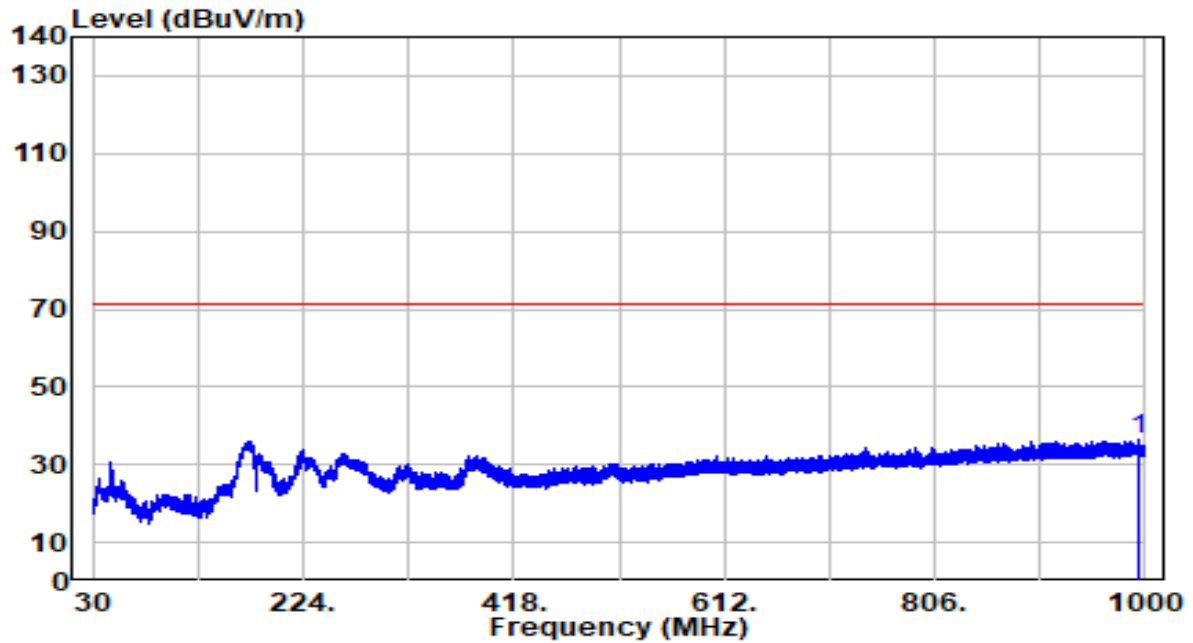


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	994.483	4.75	31.49	36.24	-35.05	71.29	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

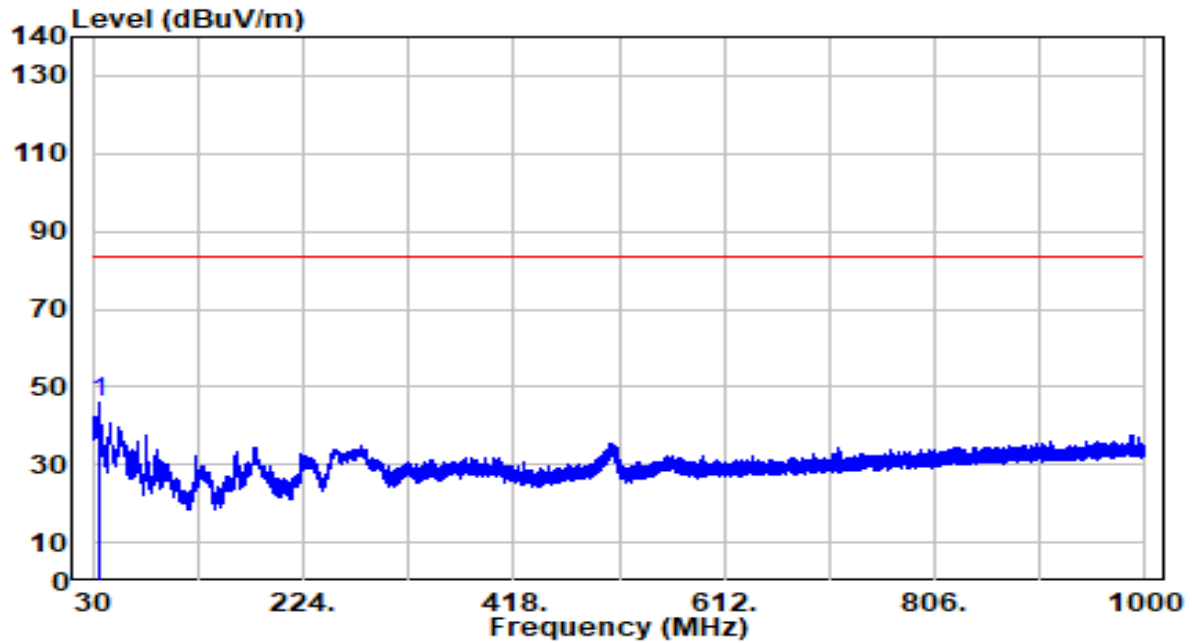


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.699	27.79	18.08	45.87	-37.47	83.34	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

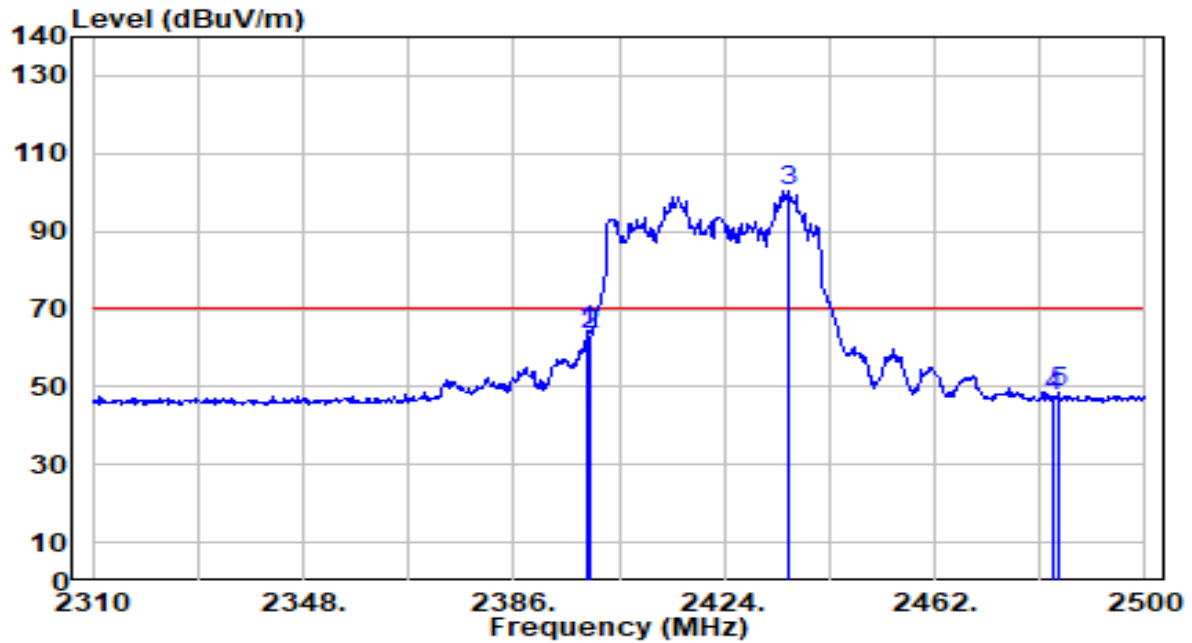


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2399.490	33.88	30.57	64.46	-5.97	70.43	178	219	Peak
2		2400.000	33.05	30.58	63.63	-6.80	70.43	178	219	Peak
3		2435.780	69.75	30.68	100.43	N/A	N/A	178	219	Peak
4		2483.500	16.82	30.81	47.64	-22.79	70.43	178	219	Peak
5		2484.230	17.83	30.82	48.65	-21.78	70.43	178	219	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

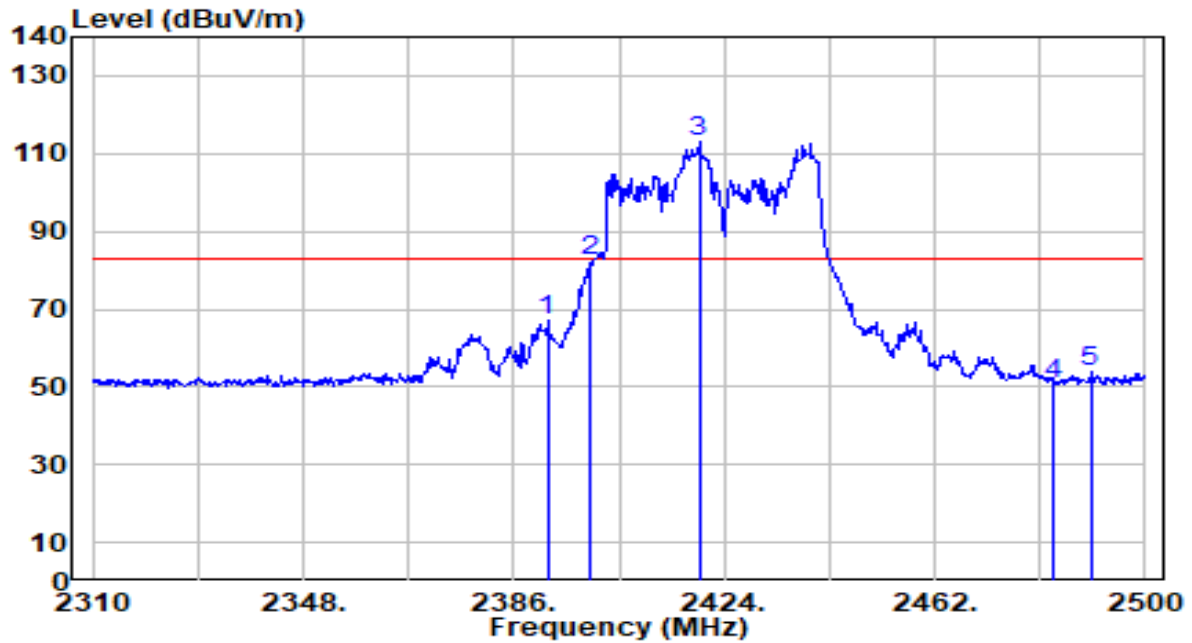


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2392.080	36.51	30.55	67.06	-16.01	83.07	187	93	Peak
2	*	2400.000	51.73	30.58	82.30	-0.77	83.07	187	93	Peak
3		2419.440	82.44	30.63	113.07	N/A	N/A	187	93	Peak
4		2483.500	19.97	30.81	50.79	-32.28	83.07	187	93	Peak
5		2490.120	23.26	30.83	54.09	-28.98	83.07	187	93	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

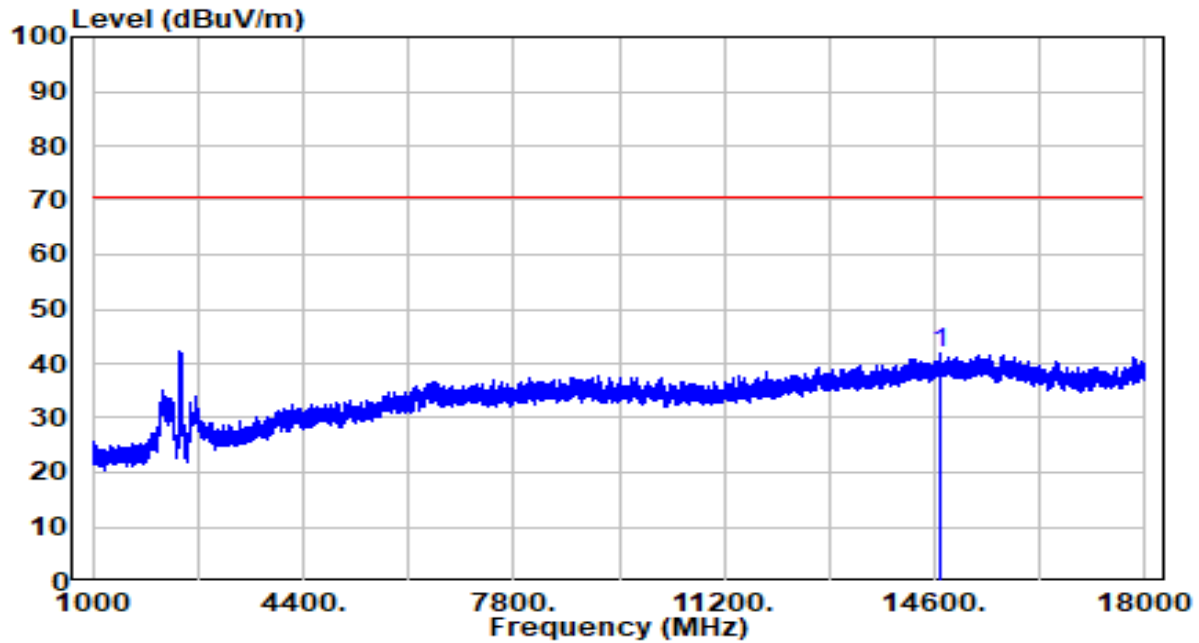


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14692.000	34.93	6.80	41.73	-28.70	70.43	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

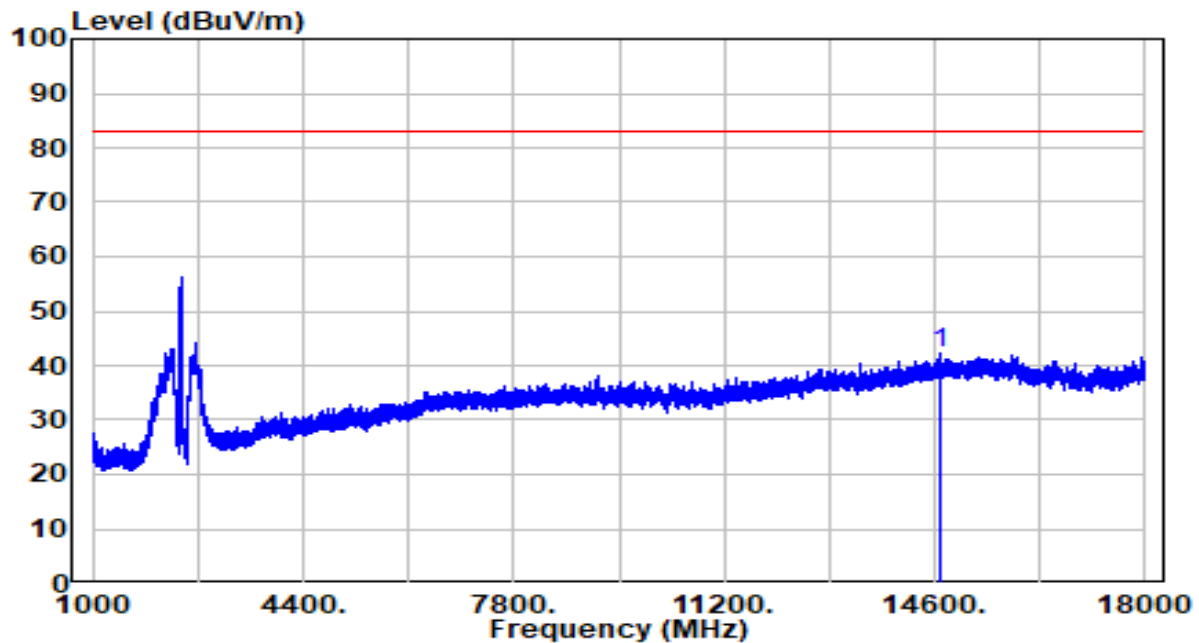


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14693.000	35.30	6.80	42.10	-40.97	83.07	100	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

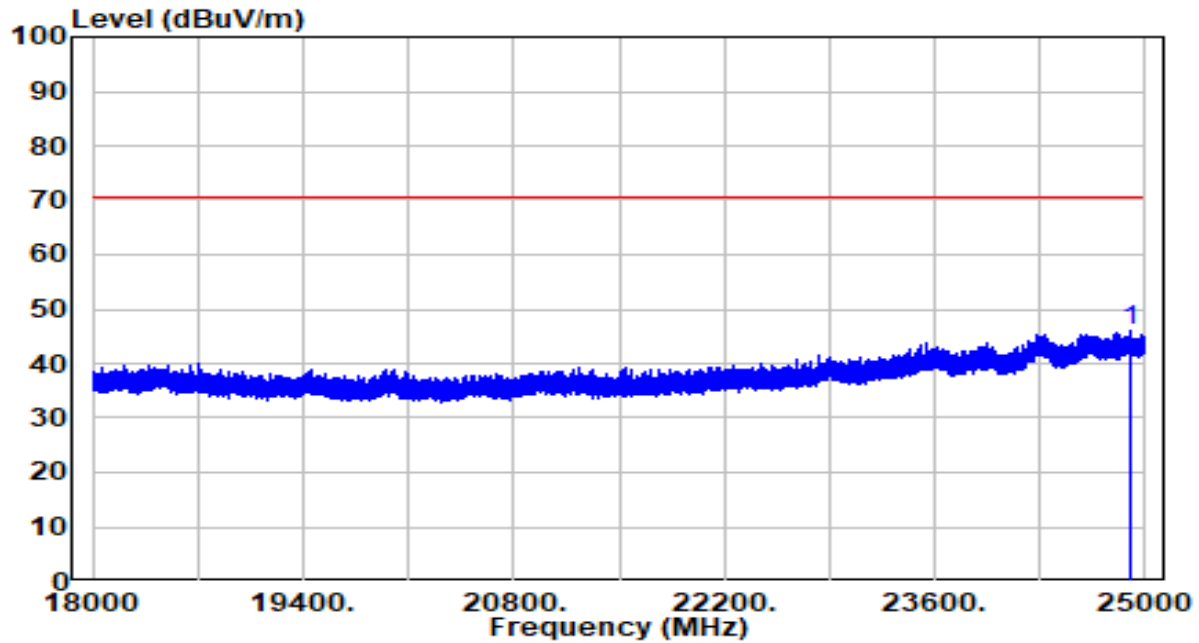


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24907.910	32.92	13.07	45.99	-24.44	70.43	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

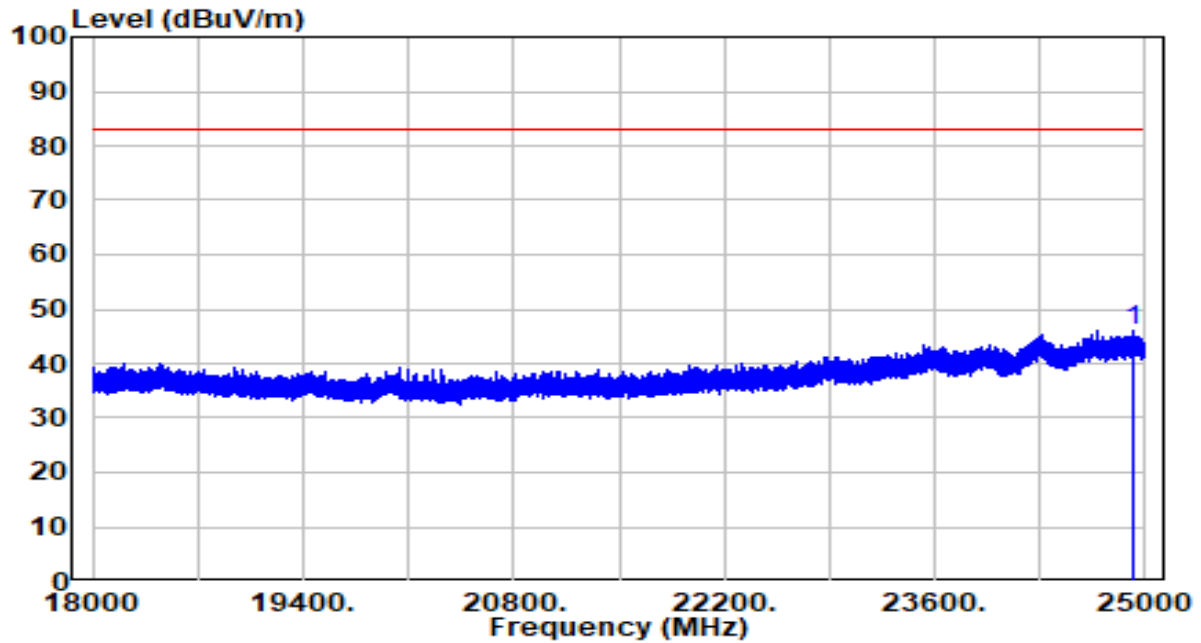


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24920.160	33.00	12.98	45.99	-37.08	83.07	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

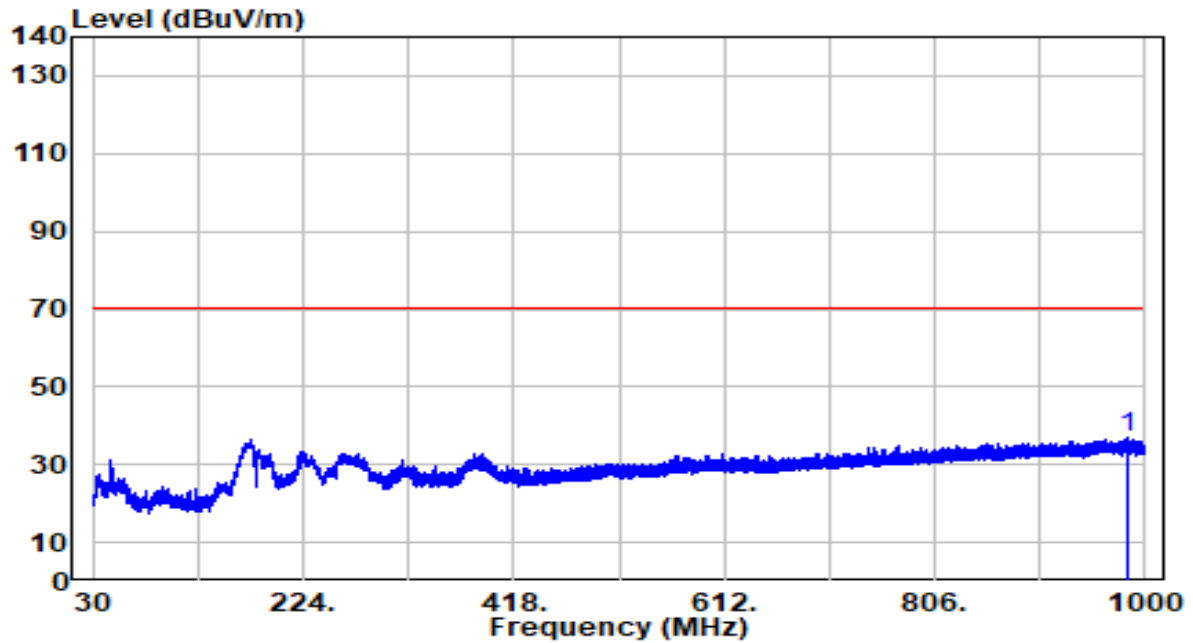


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	982.873	5.42	31.34	36.76	-33.67	70.43	100	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-11-11
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

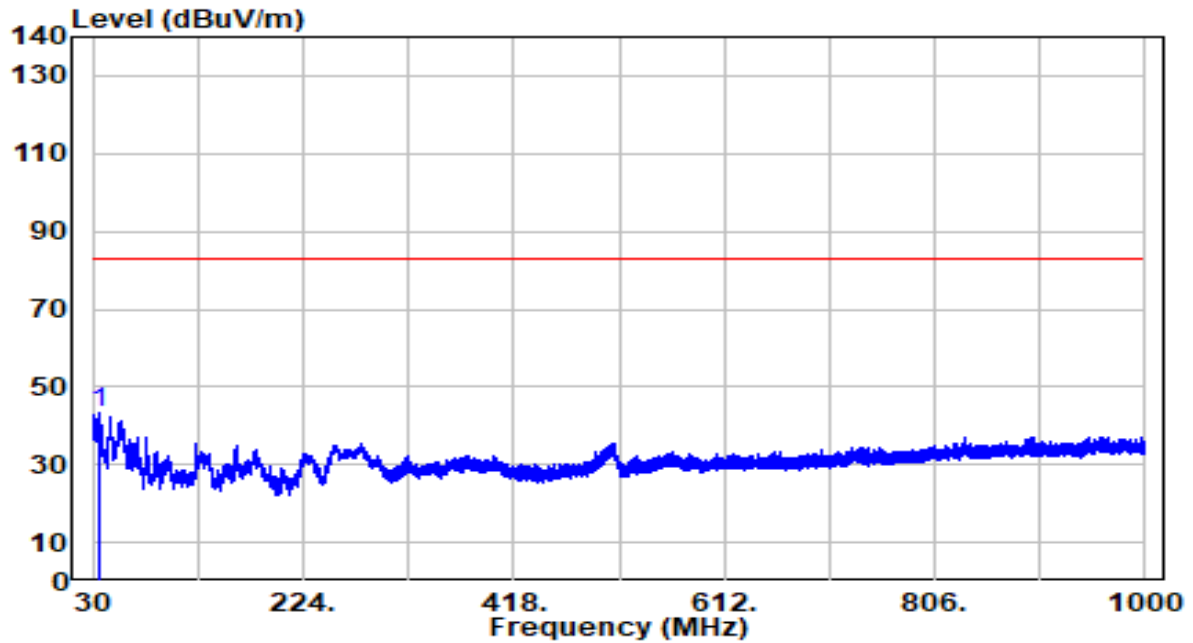


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.335	25.01	18.33	43.33	-39.74	83.07	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

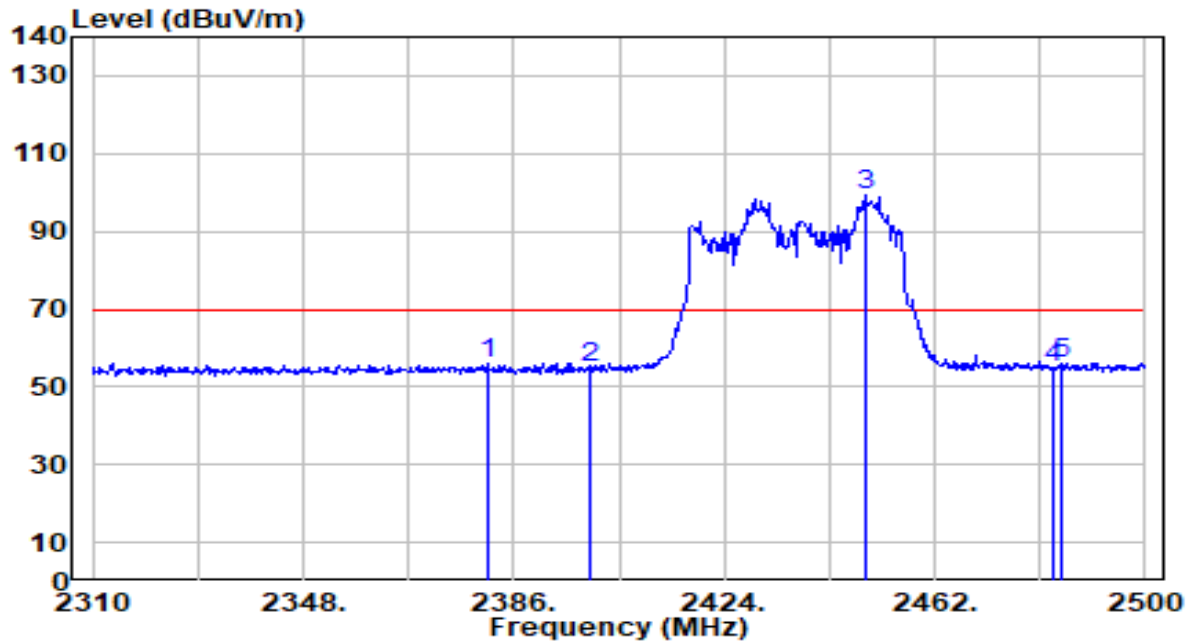


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.250	25.65	30.52	56.17	-13.32	69.49	178	220	Peak
2		2400.000	24.29	30.58	54.87	-14.62	69.49	178	220	Peak
3		2449.460	68.77	30.72	99.49	N/A	N/A	178	220	Peak
4		2483.500	24.33	30.81	55.14	-14.35	69.49	178	220	Peak
5		2484.800	25.29	30.82	56.11	-13.38	69.49	178	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

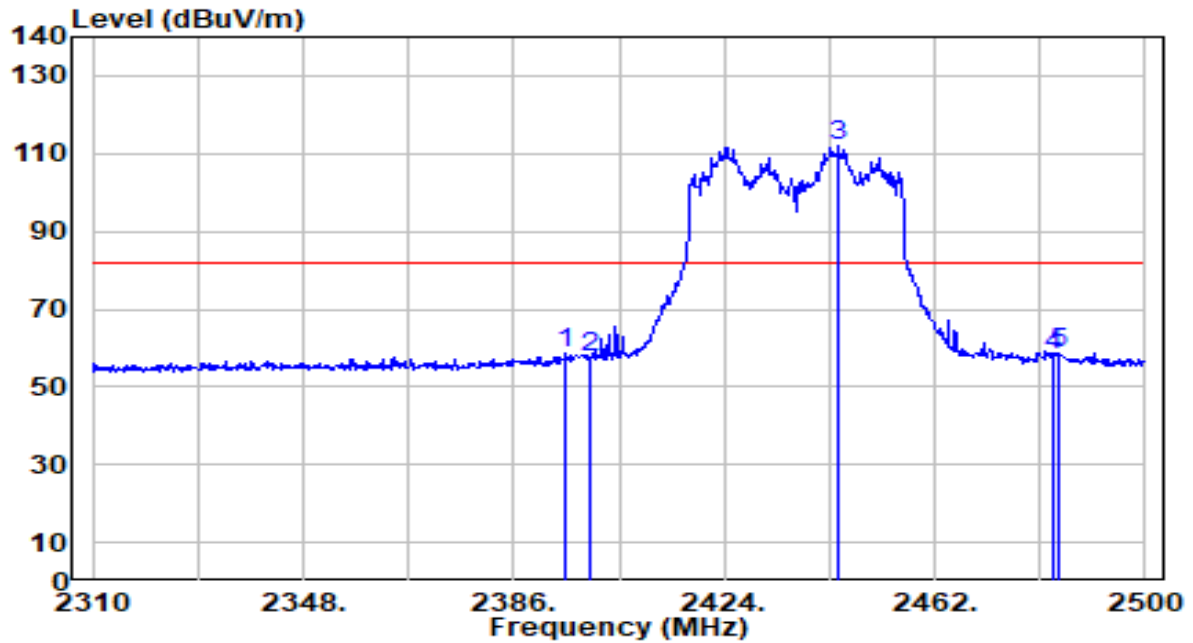


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2395.500	28.11	30.56	58.67	-23.20	81.87	200	326	Peak
2	2400.000	27.10	30.58	57.68	-24.19	81.87	200	326	Peak
3	2444.520	81.17	30.70	111.87	N/A	N/A	200	326	Peak
4	2483.500	27.15	30.81	57.96	-23.91	81.87	200	326	Peak
5	* 2484.610	28.02	30.82	58.84	-23.03	81.87	200	326	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

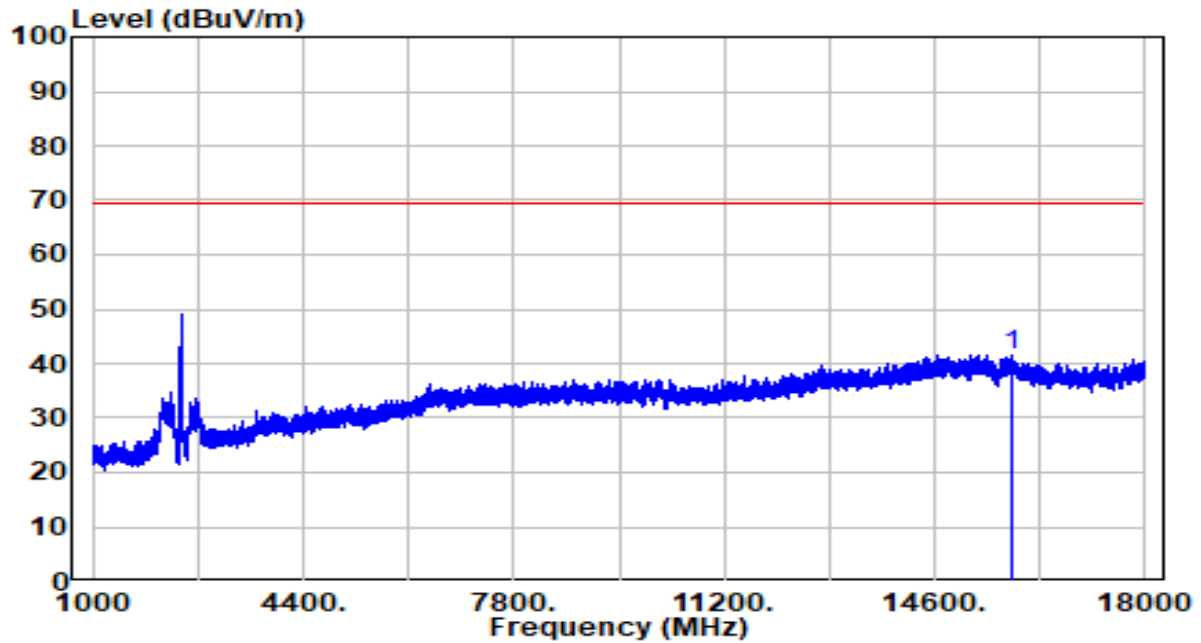


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15829.000	35.04	6.61	41.65	-27.84	69.49	100	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

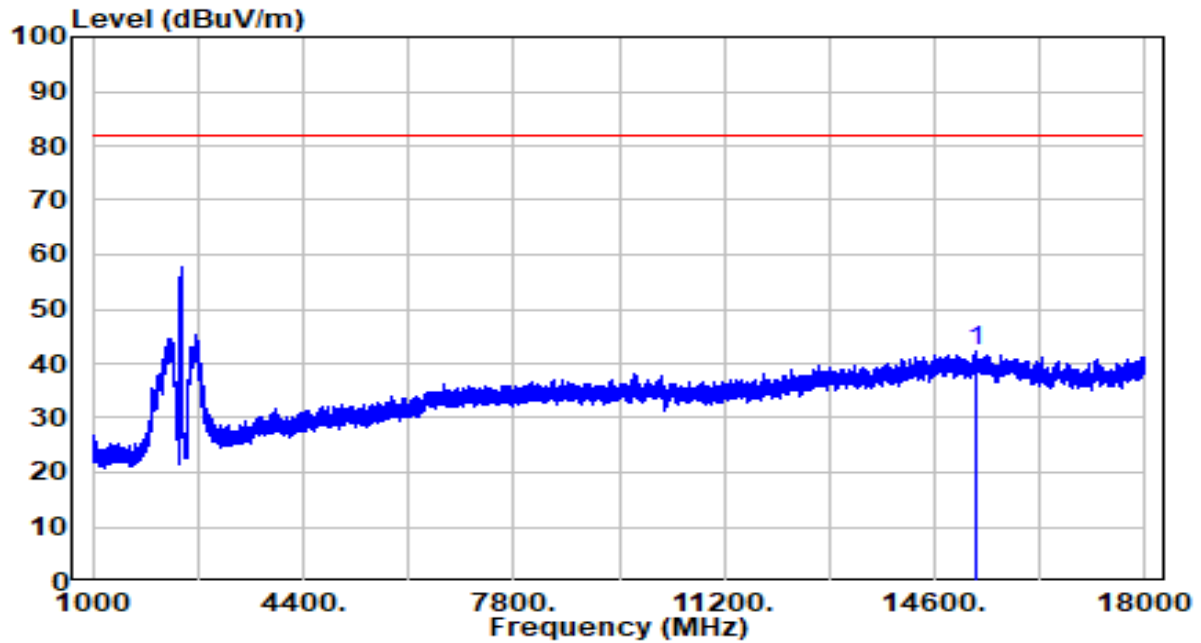


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15281.000	35.54	6.63	42.17	-39.70	81.87	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

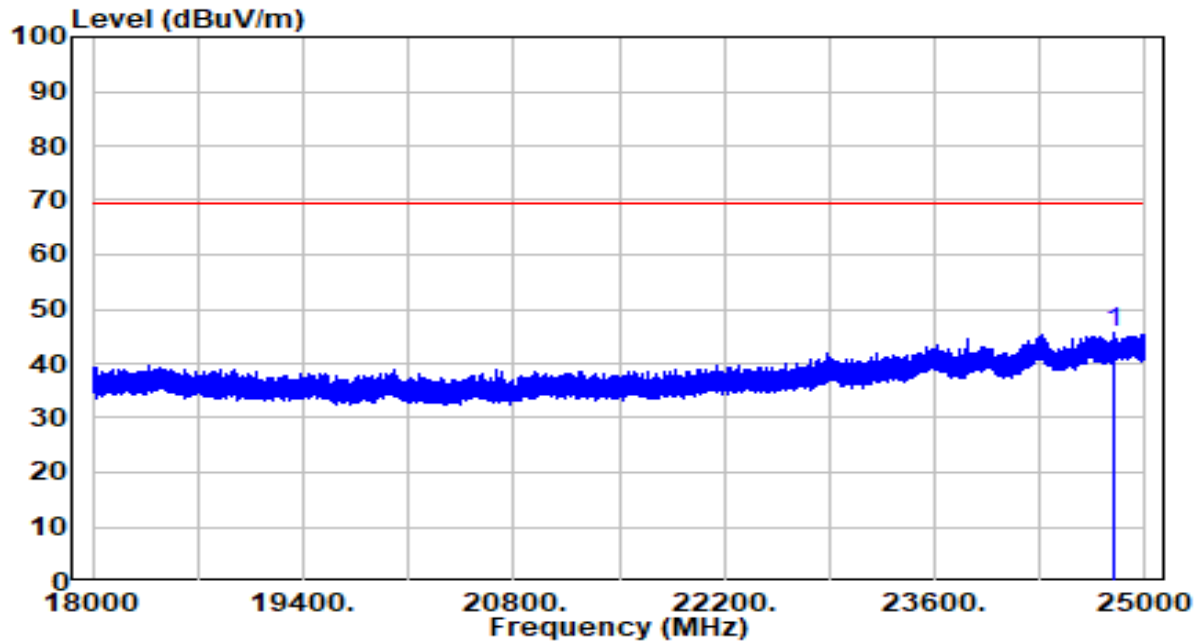


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24785.410	32.75	12.86	45.61	-23.88	69.49	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

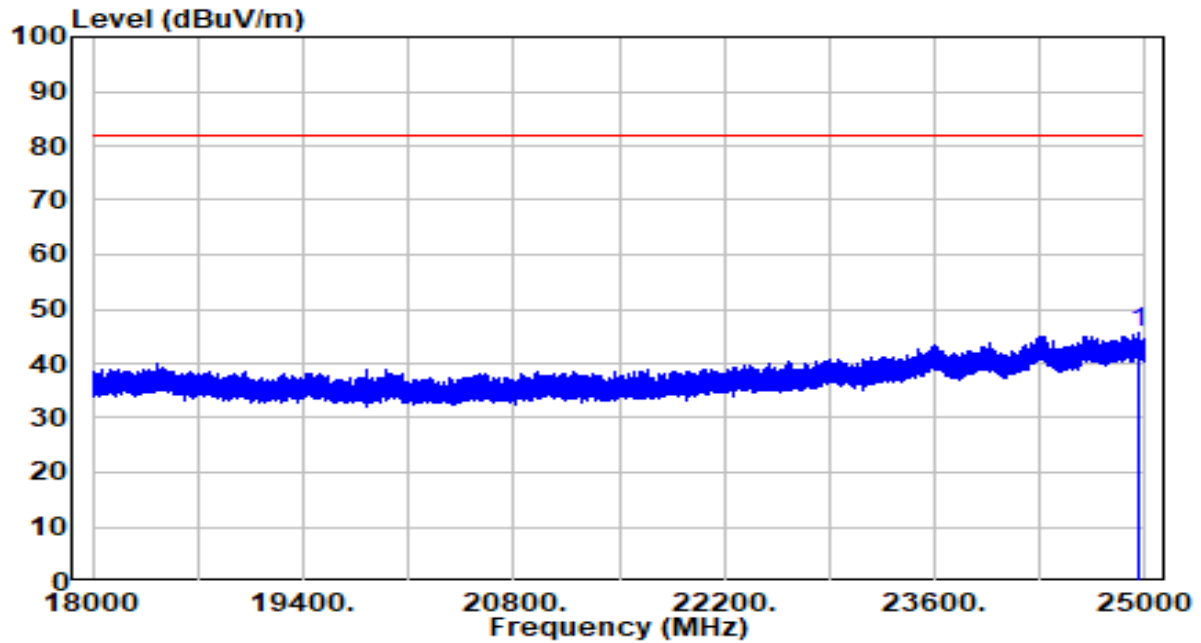


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24955.810	32.64	13.02	45.65	-36.22	81.87	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

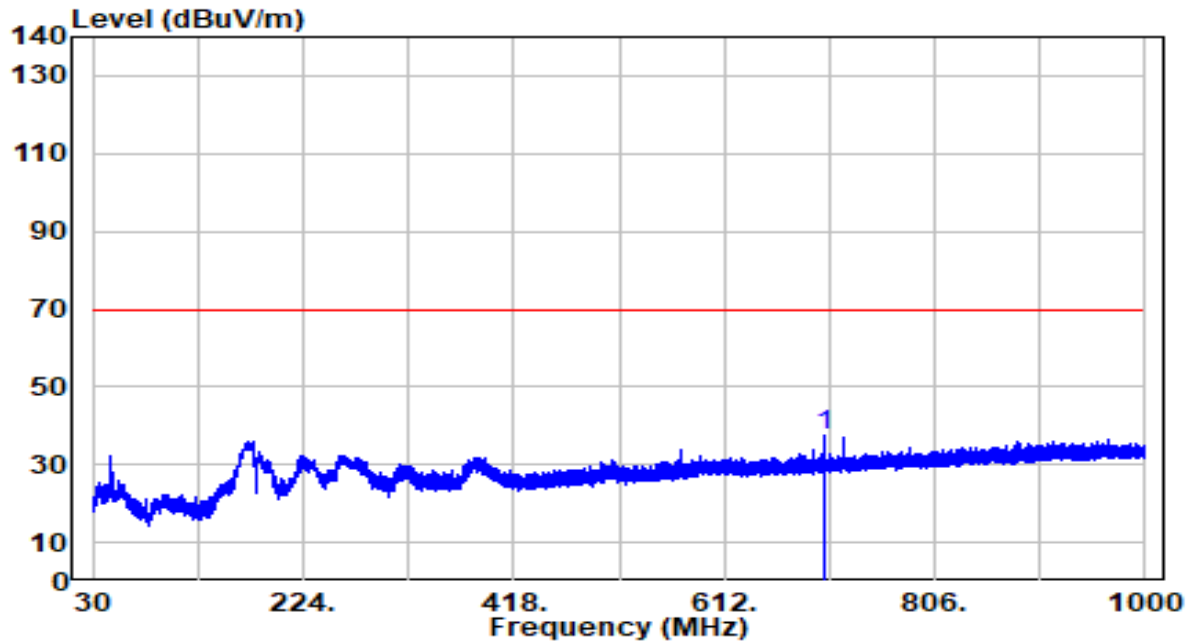


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	704.302	9.20	28.16	37.36	-32.13	69.49	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

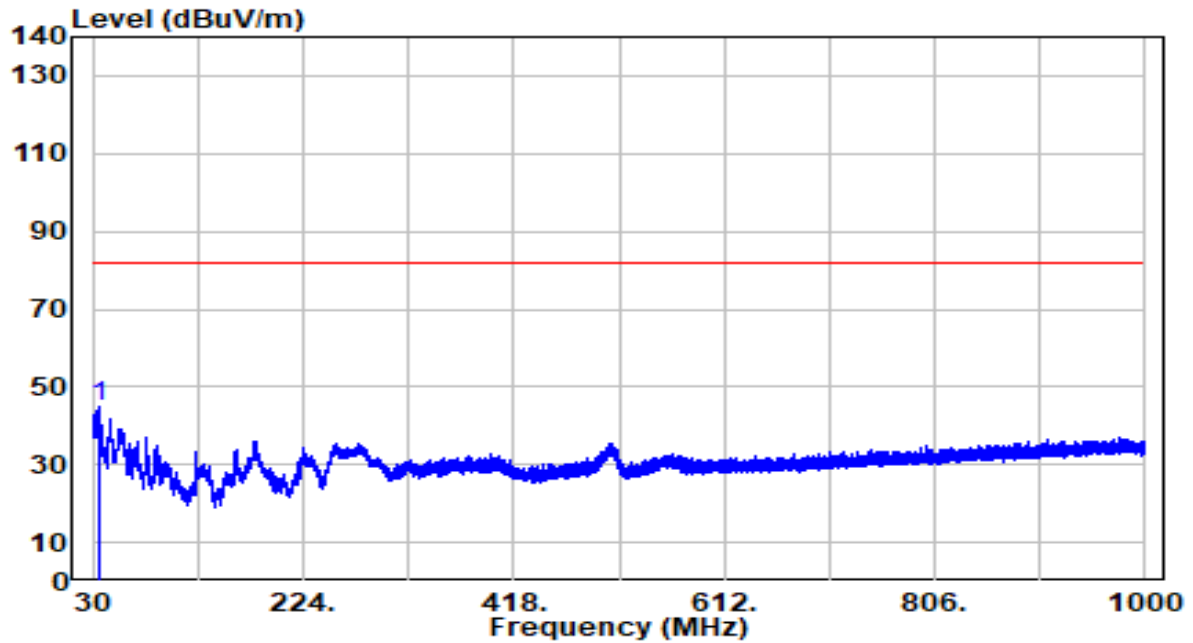


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.911	26.76	18.16	44.93	-36.94	81.87	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

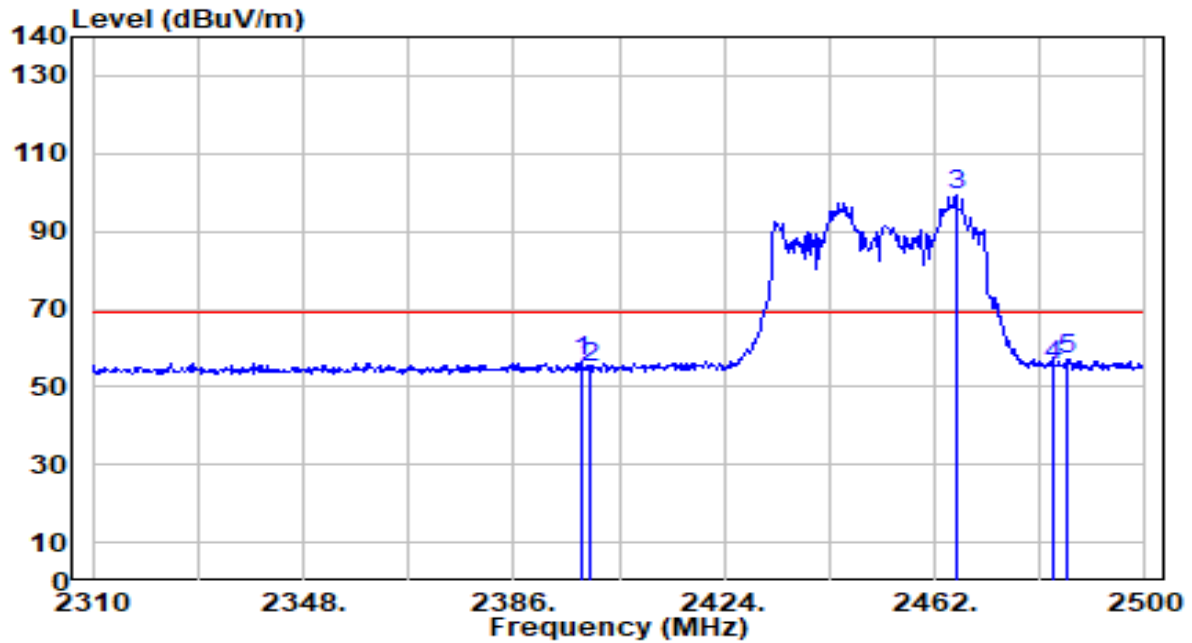


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2398.160	26.12	30.57	56.69	-12.40	69.09	200	226	Peak
2	2400.000	24.12	30.58	54.70	-14.39	69.09	200	226	Peak
3	2465.800	68.33	30.76	99.09	N/A	N/A	200	226	Peak
4	2483.500	24.67	30.81	55.48	-13.61	69.09	200	226	Peak
5	* 2485.750	26.13	30.82	56.95	-12.14	69.09	200	226	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

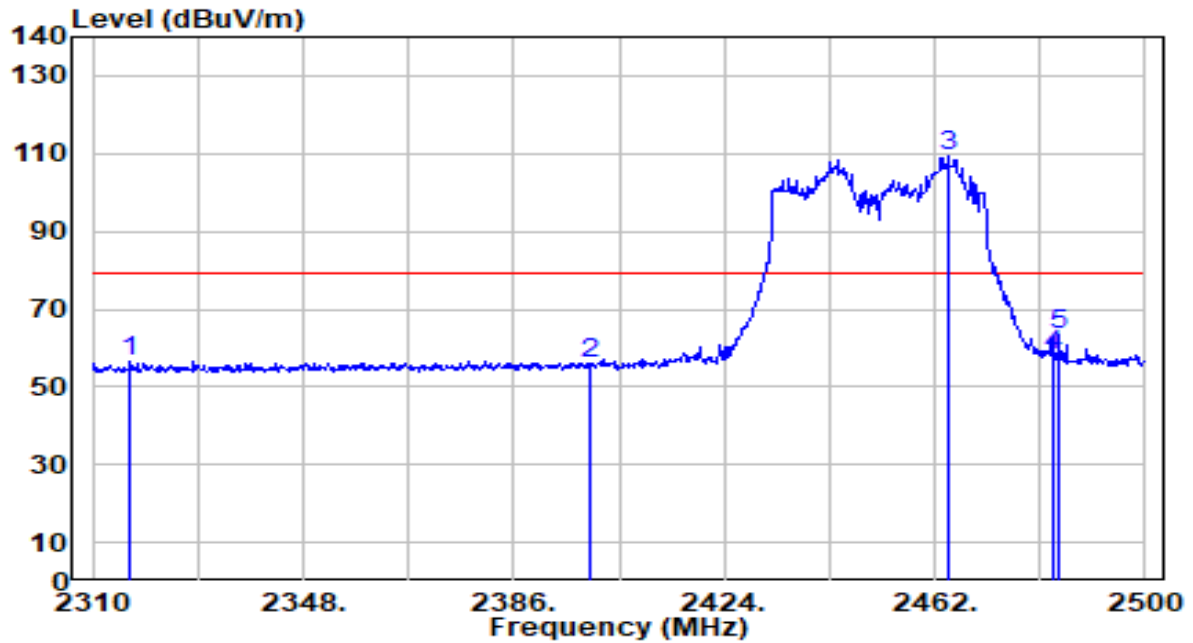


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2316.840	26.17	30.34	56.51	-22.85	79.36	200	154	Peak
2	2400.000	25.24	30.58	55.81	-23.55	79.36	200	154	Peak
3	2464.470	78.60	30.76	109.36	N/A	N/A	200	154	Peak
4	2483.500	27.21	30.81	58.02	-21.34	79.36	200	154	Peak
5	* 2484.420	32.55	30.82	63.37	-15.99	79.36	200	154	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

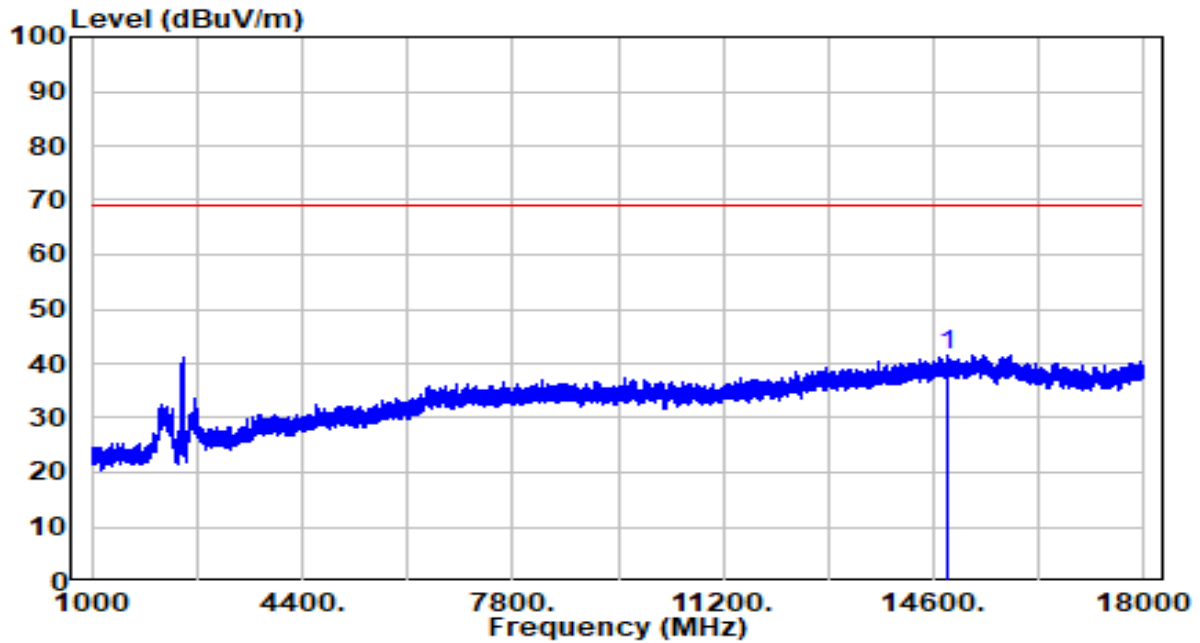


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14808.000	34.74	6.81	41.54	-27.55	69.09	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

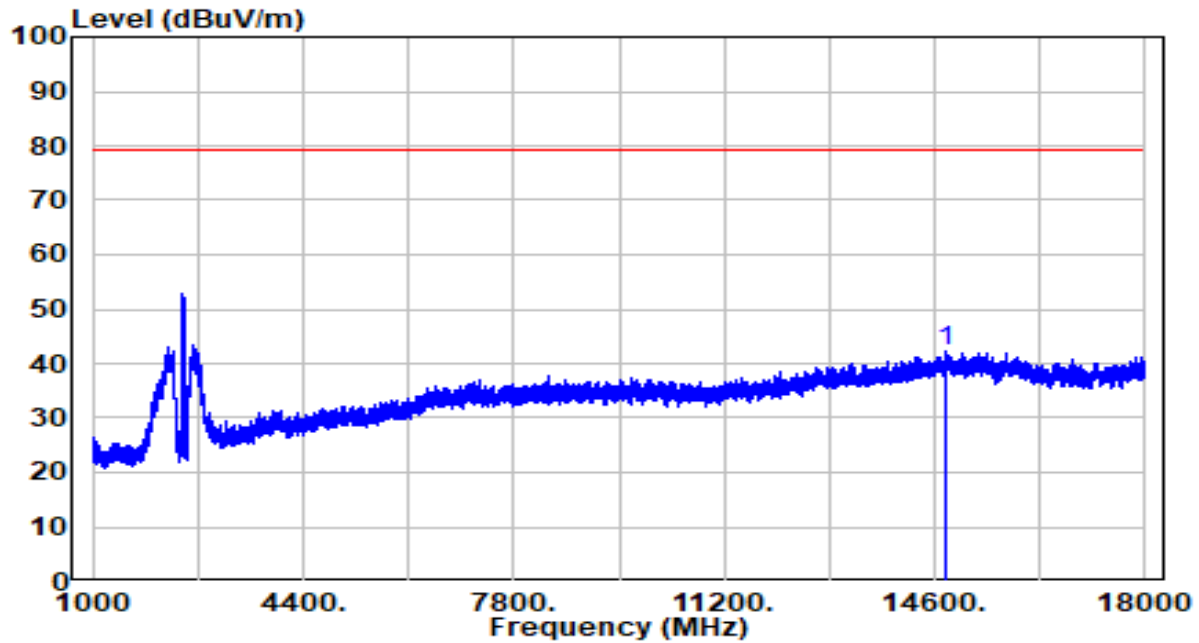


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14784.000	35.59	6.81	42.40	-36.96	79.36	100	39	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

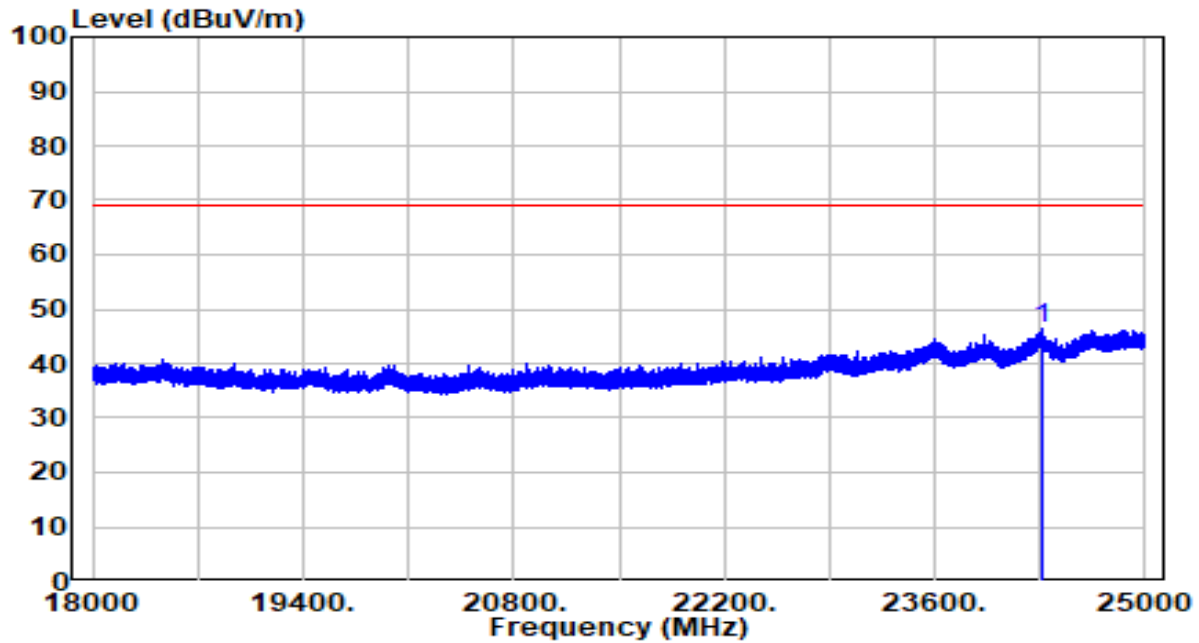


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24310.720	33.84	12.54	46.38	-22.71	69.09	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

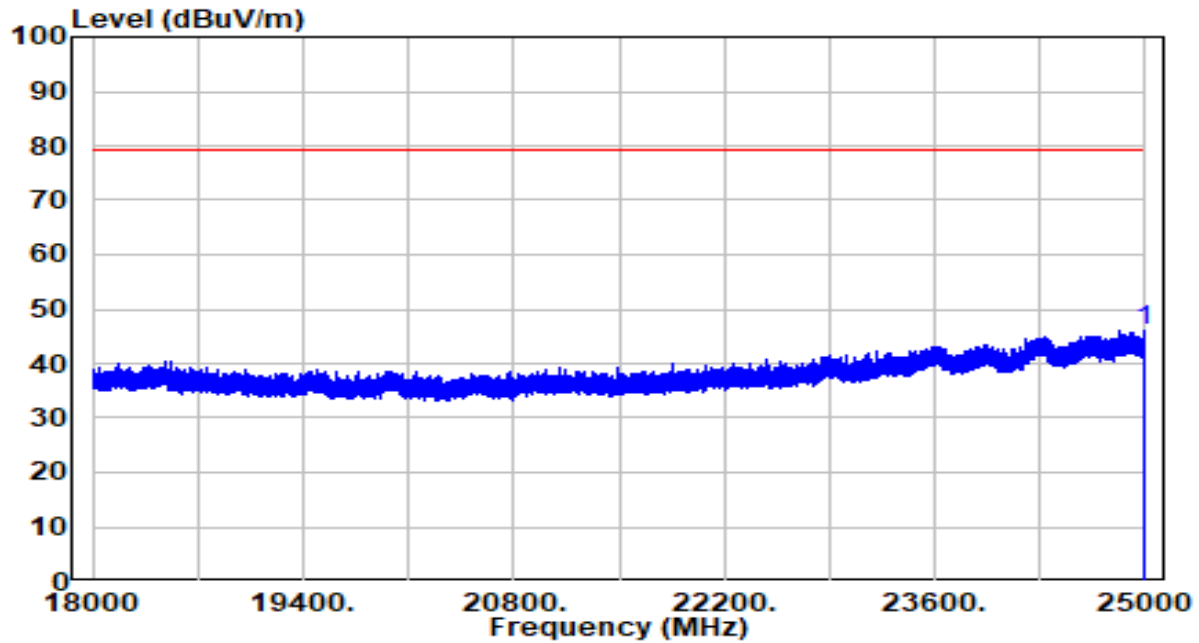


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24994.090	32.98	13.05	46.03	-33.33	79.36	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

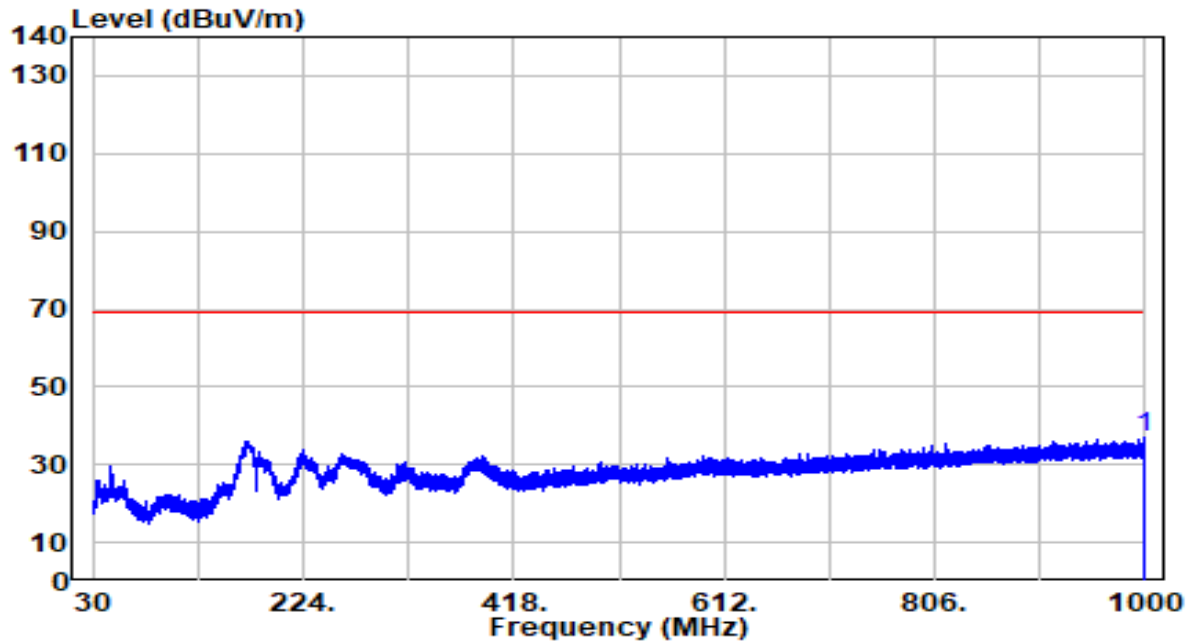


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	998.303	5.59	31.54	37.13	-31.96	69.09	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

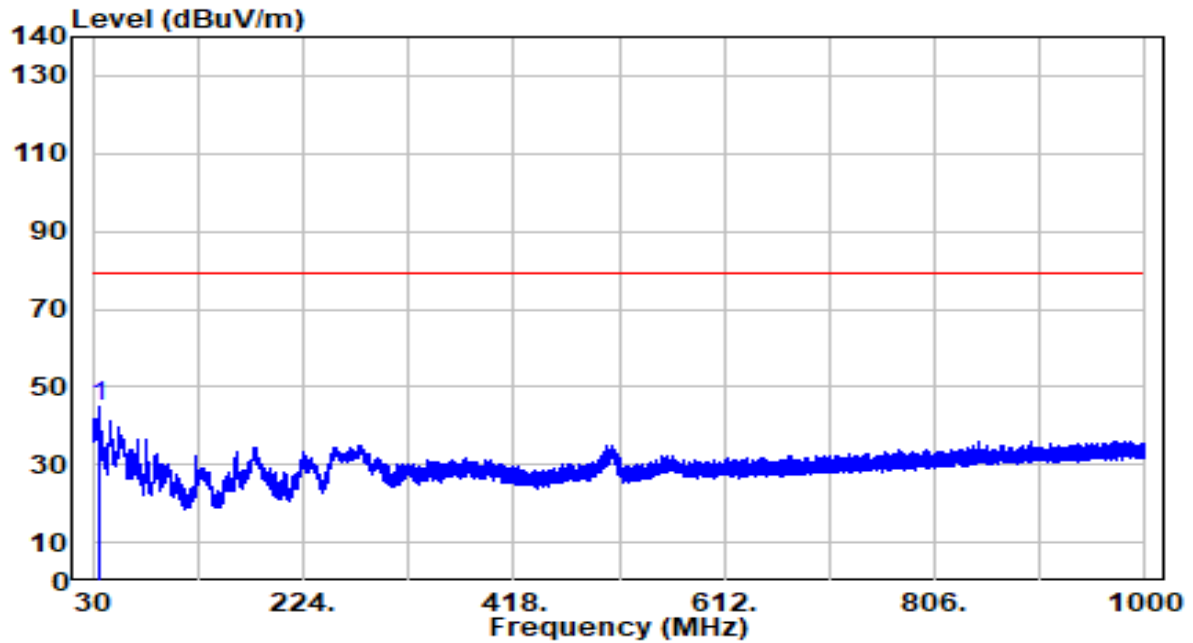


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.759	26.58	18.10	44.69	-34.67	79.36	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

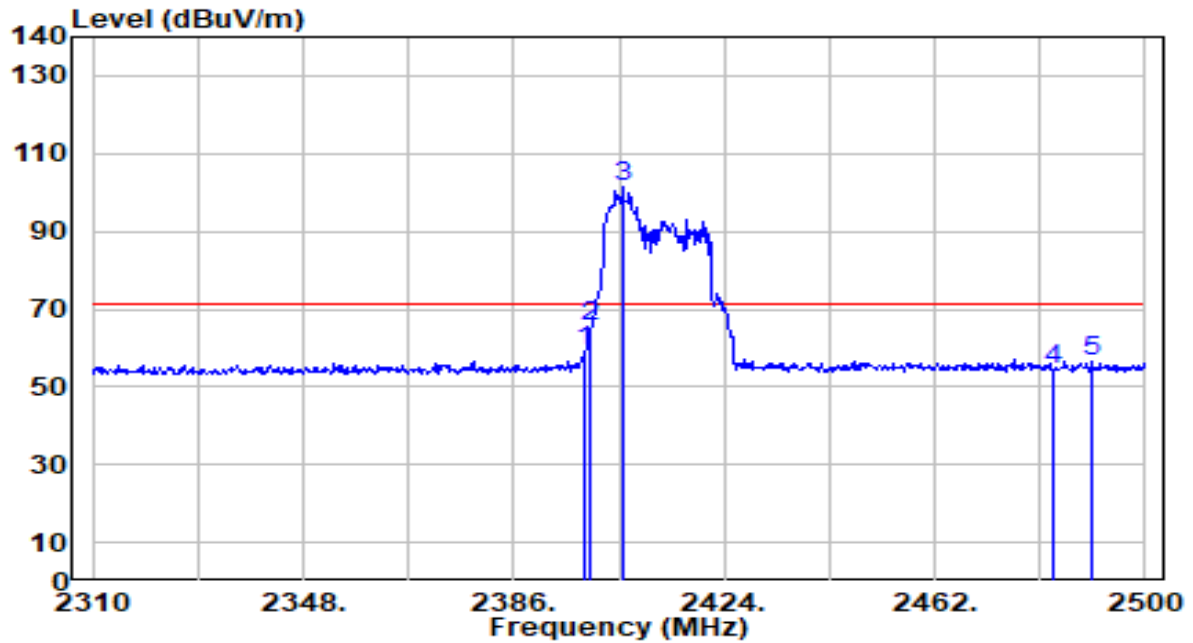


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.920	28.70	30.57	59.27	-12.21	71.48	100	206	Peak
2	*	2400.000	34.83	30.58	65.41	-6.07	71.48	100	206	Peak
3		2405.760	70.89	30.59	101.48	N/A	N/A	100	206	Peak
4		2483.500	23.67	30.81	54.49	-16.99	71.48	100	206	Peak
5		2490.310	25.70	30.83	56.53	-14.95	71.48	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

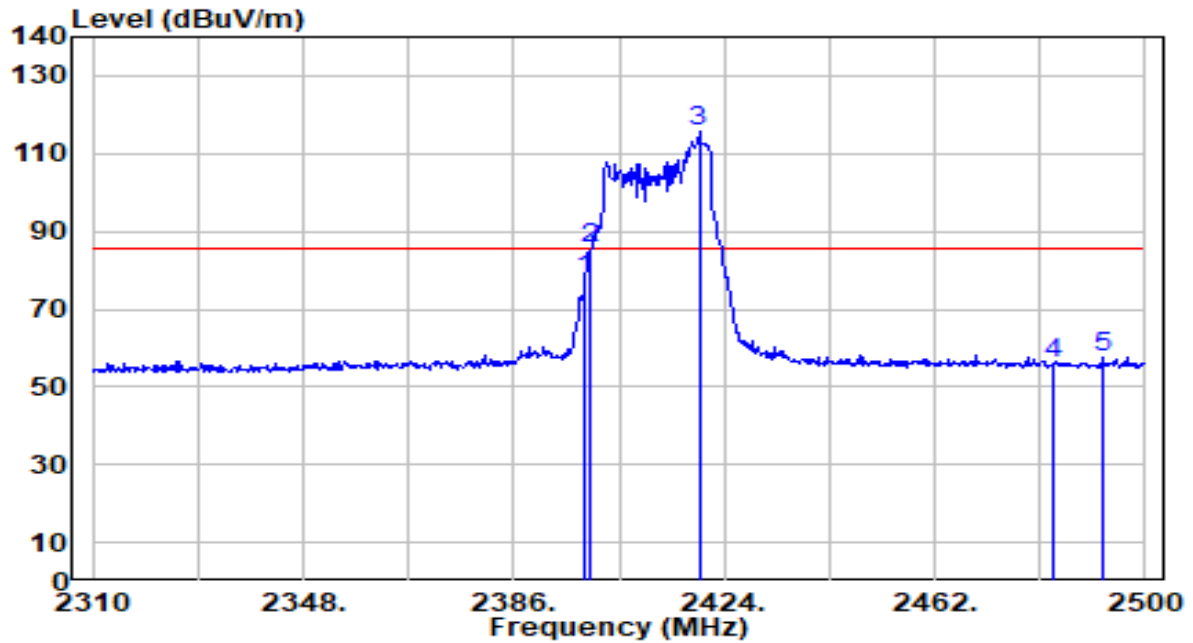


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.730	47.24	30.57	77.81	-7.84	85.65	200	318	Peak
2	*	2400.000	54.93	30.58	85.51	-0.14	85.65	200	318	Peak
3		2419.440	85.02	30.63	115.65	N/A	N/A	200	318	Peak
4		2483.500	25.34	30.81	56.15	-29.50	85.65	200	318	Peak
5		2492.590	26.61	30.84	57.45	-28.20	85.65	200	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

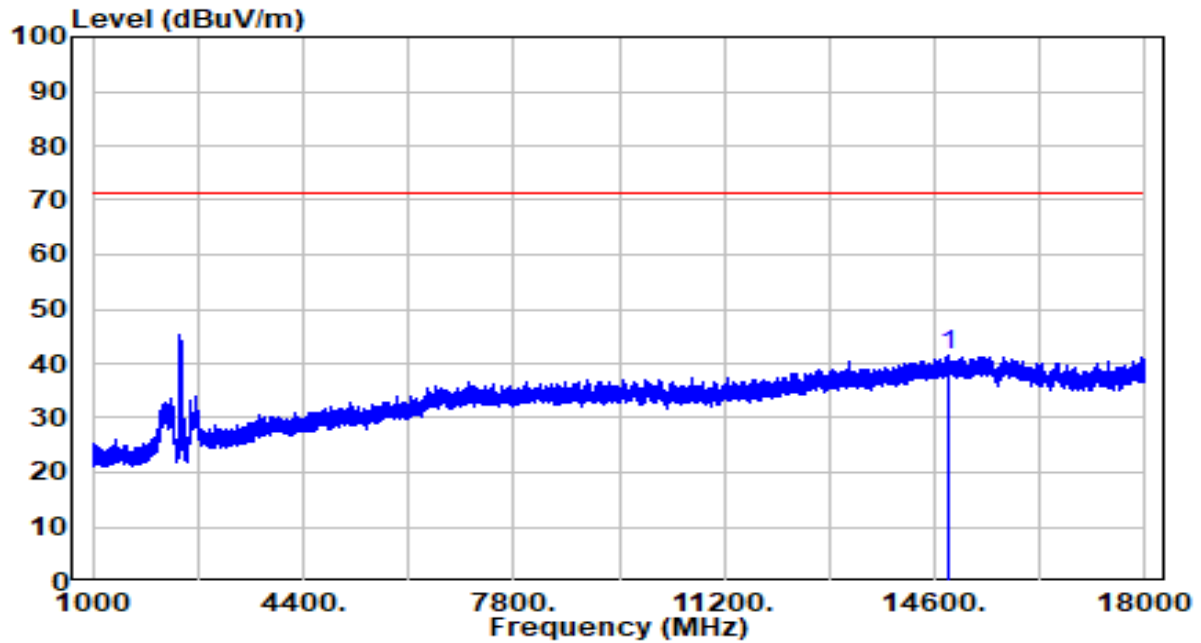


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14819.000	34.59	6.80	41.38	-30.10	71.48	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

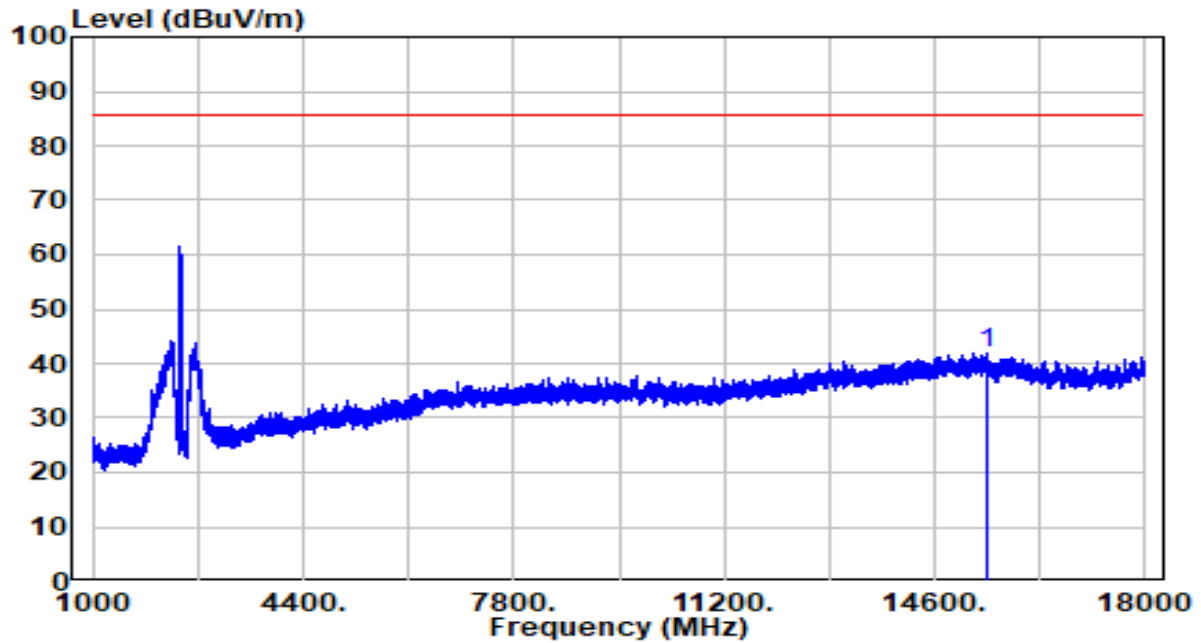


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15428.000	35.47	6.52	41.99	-43.66	85.65	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

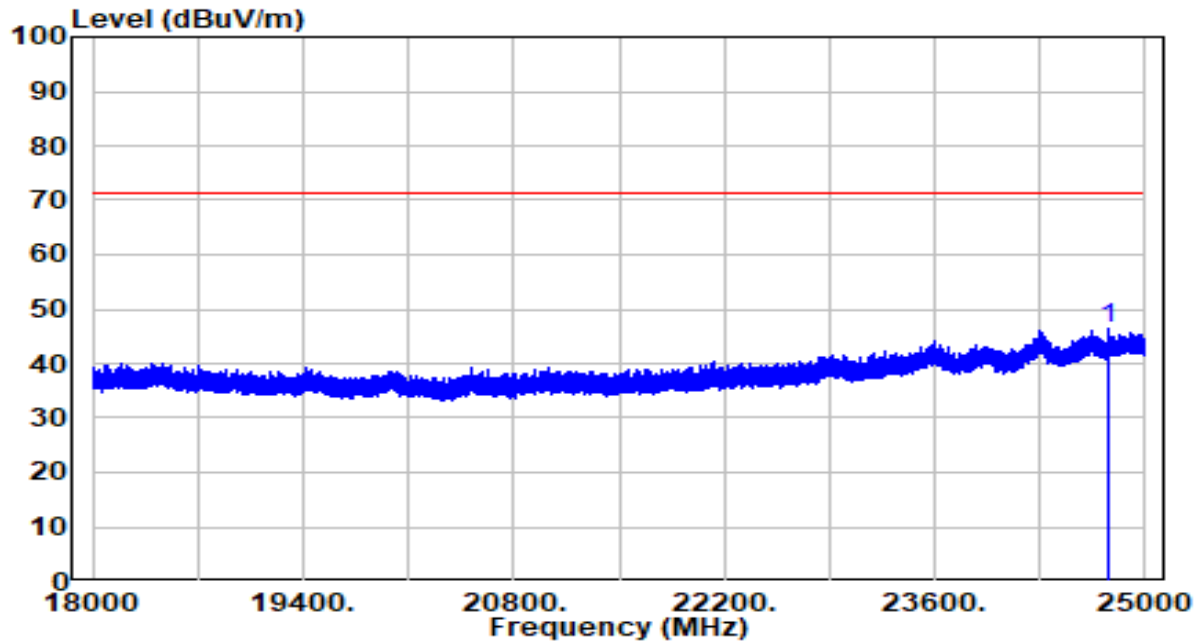


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24755.660	33.60	12.83	46.44	-25.04	71.48	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

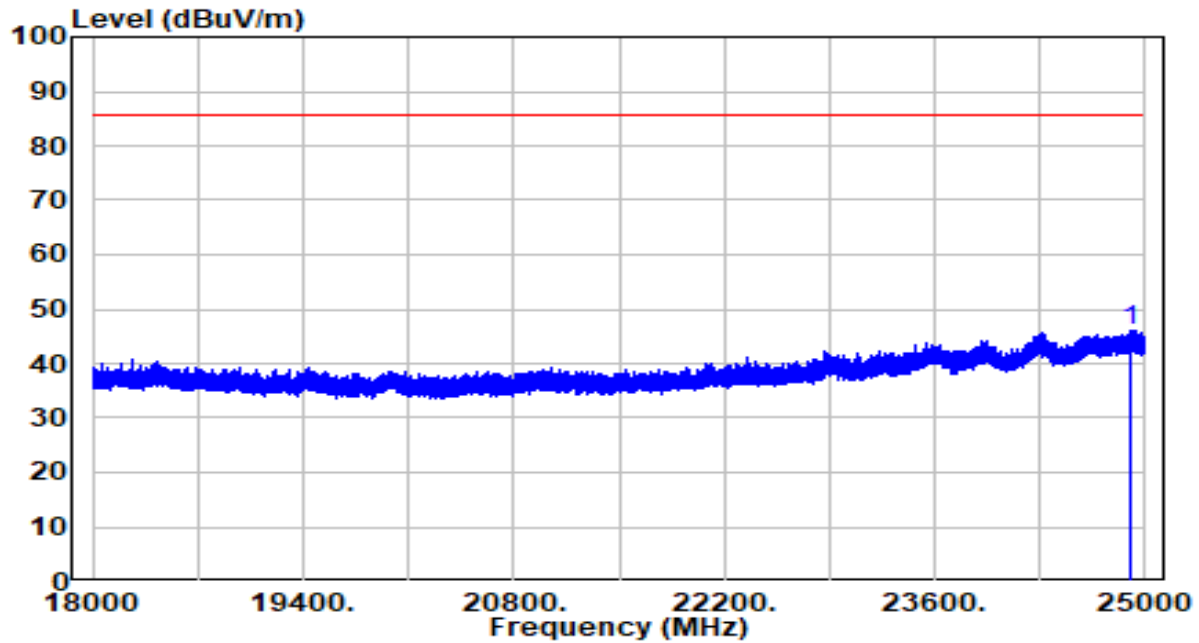


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24900.470	33.04	12.96	46.00	-39.65	85.65	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

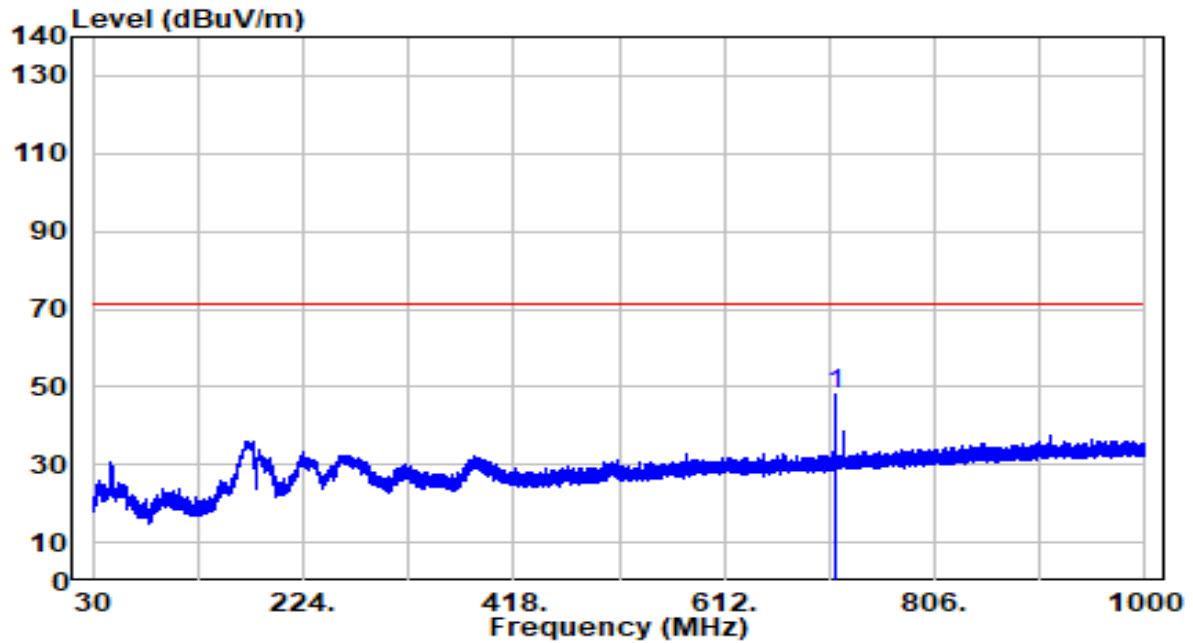


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	715.063	19.81	28.37	48.18	-23.30	71.48	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

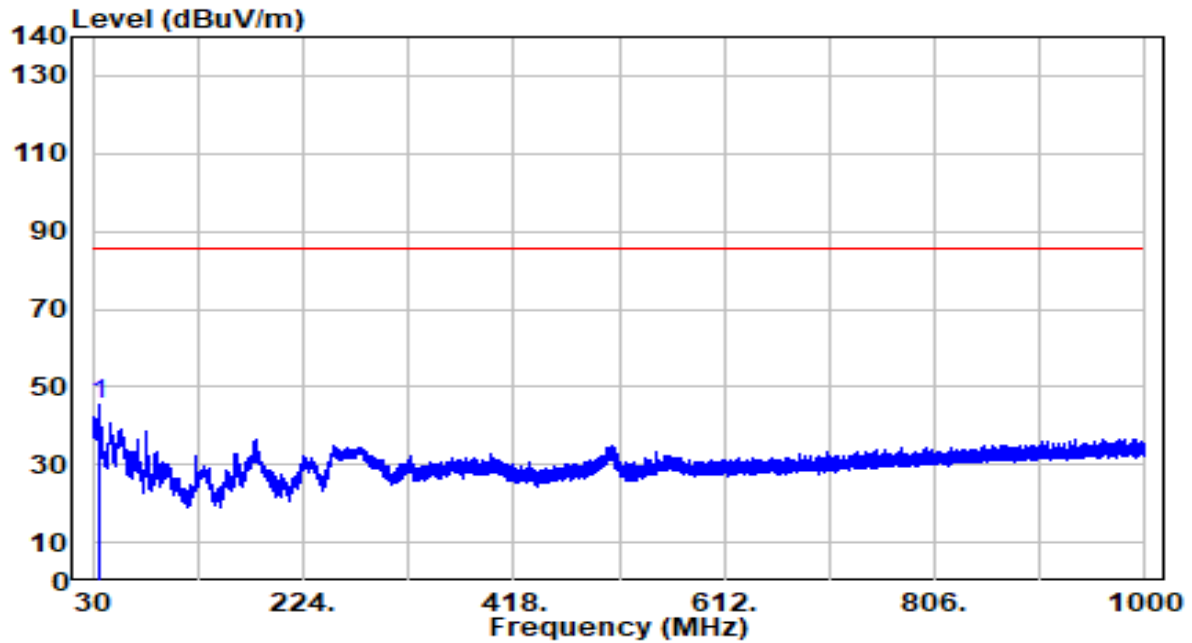


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.093	27.06	18.23	45.29	-40.36	85.65	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

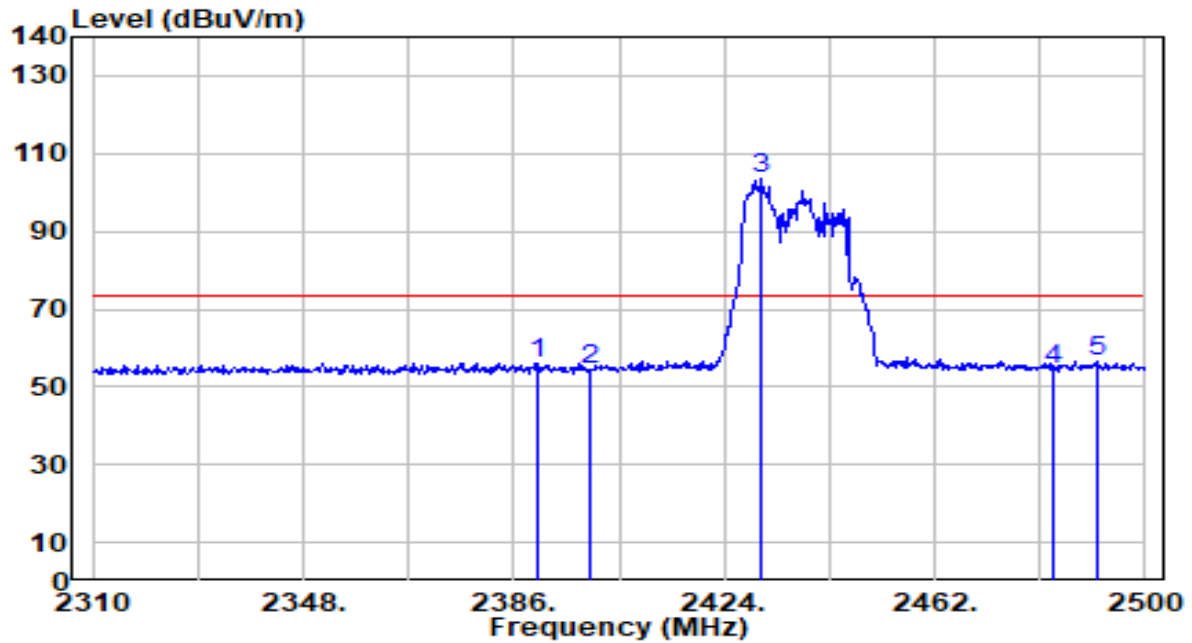


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2390.560	25.64	30.55	56.19	-17.41	73.60	186	224	Peak
2	2400.000	23.84	30.58	54.42	-19.18	73.60	186	224	Peak
3	2430.650	72.94	30.66	103.60	N/A	N/A	186	224	Peak
4	2483.500	23.79	30.81	54.60	-19.00	73.60	186	224	Peak
5	* 2491.450	25.56	30.84	56.40	-17.20	73.60	186	224	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

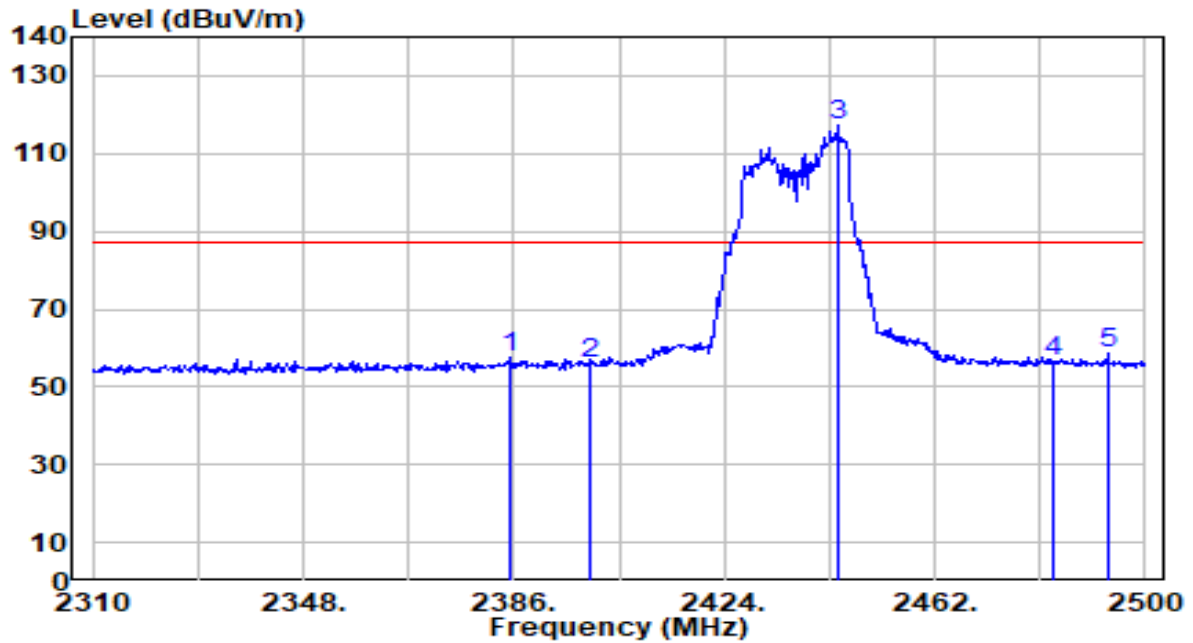


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	26.84	30.53	57.38	-29.88	87.26	200	324	Peak
2	2400.000	25.28	30.58	55.86	-31.40	87.26	200	324	Peak
3	2444.520	86.56	30.70	117.26	N/A	N/A	200	324	Peak
4	2483.500	25.86	30.81	56.67	-30.59	87.26	200	324	Peak
5	* 2493.160	27.67	30.84	58.51	-28.75	87.26	200	324	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

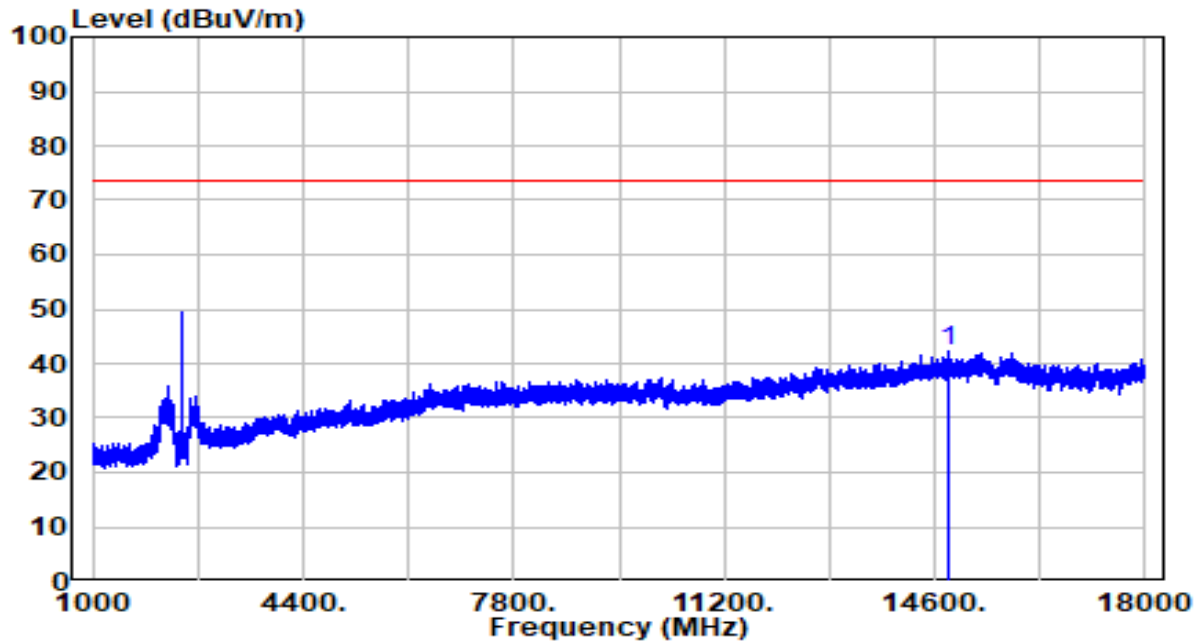


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14822.000	35.37	6.79	42.16	-31.44	73.60	100	193	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

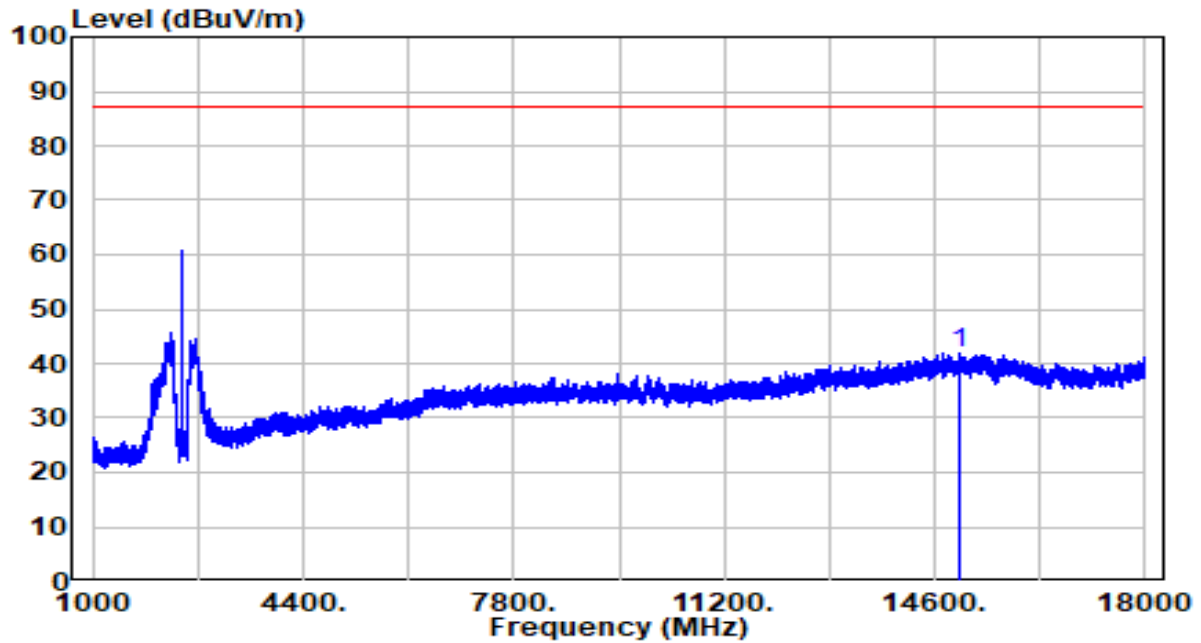


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14993.000	35.17	6.65	41.81	-45.45	87.26	100	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

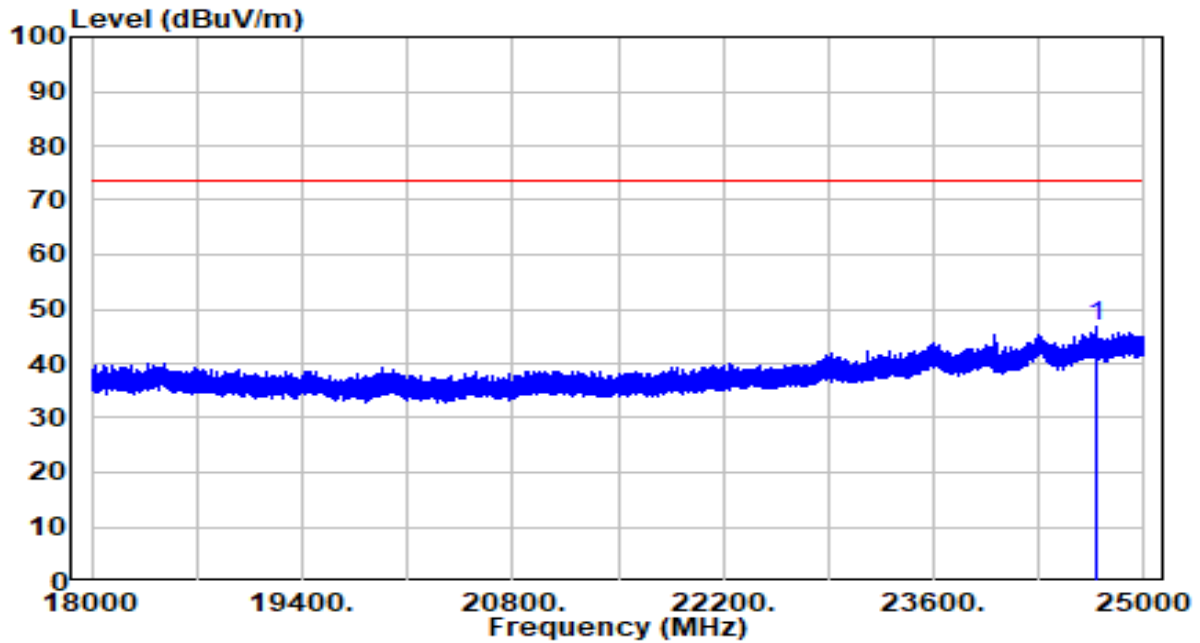


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24688.060	34.09	12.77	46.87	-26.73	73.60	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

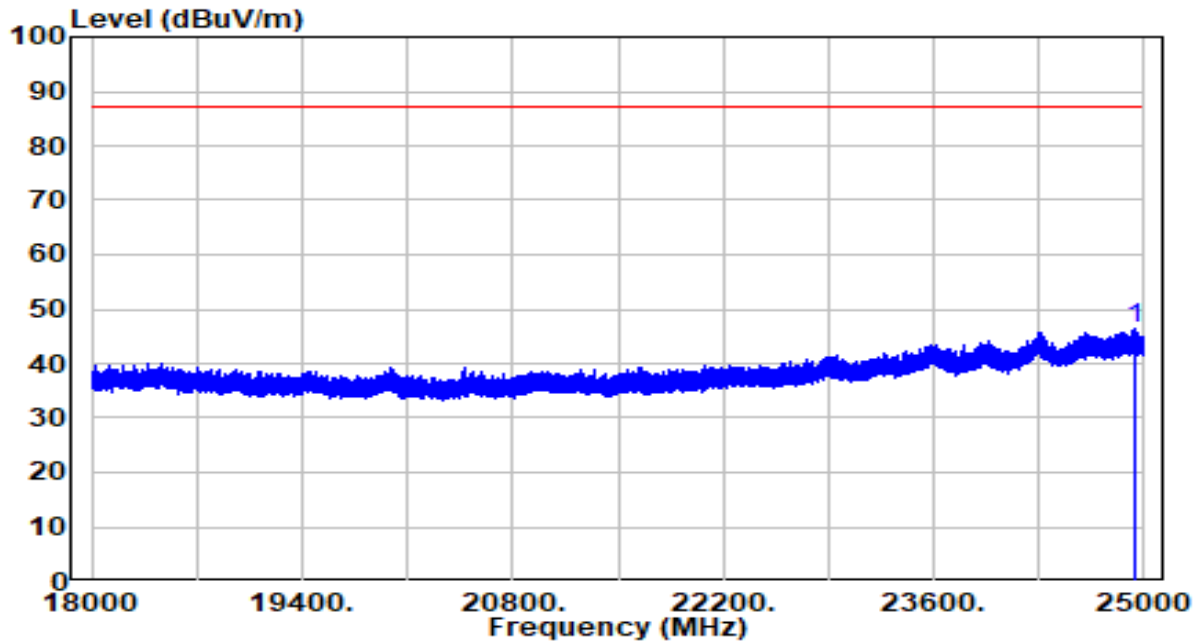


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24938.750	33.32	13.00	46.32	-40.94	87.26	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

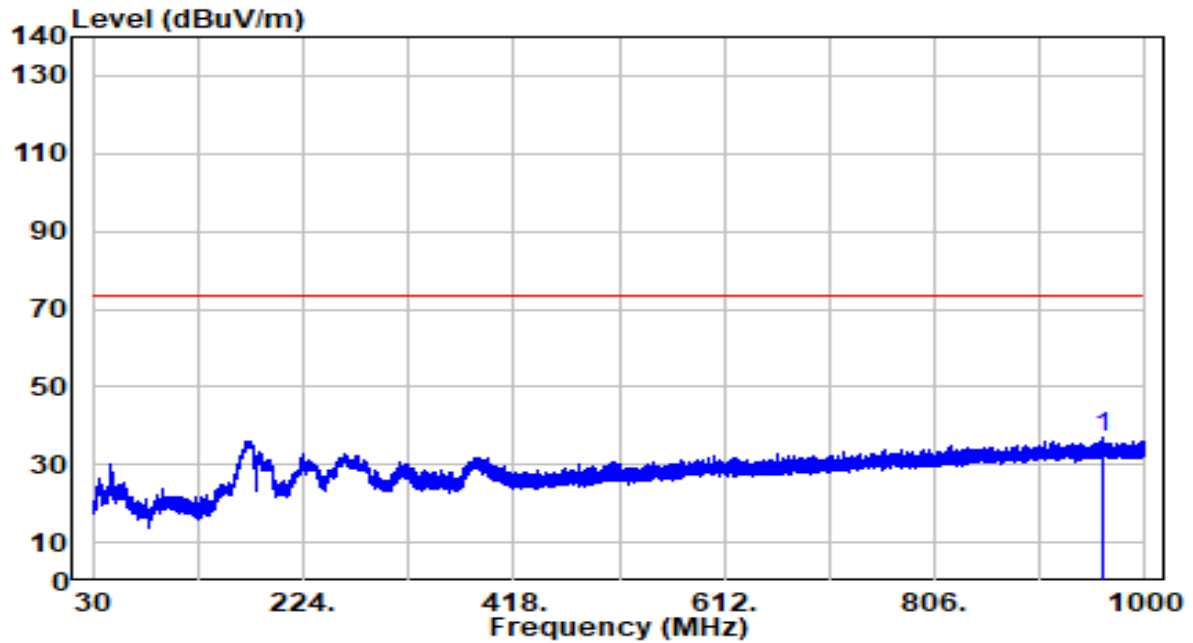


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	960.200	5.98	31.06	37.04	-36.56	73.60	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

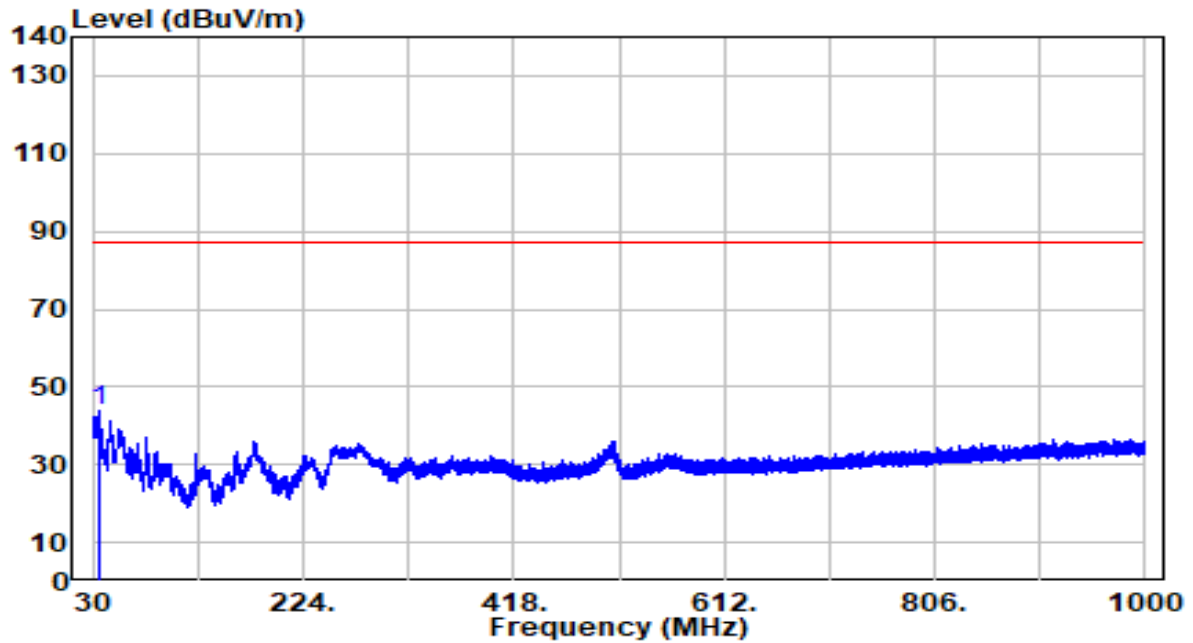


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.941	25.82	18.17	43.99	-43.27	87.26	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

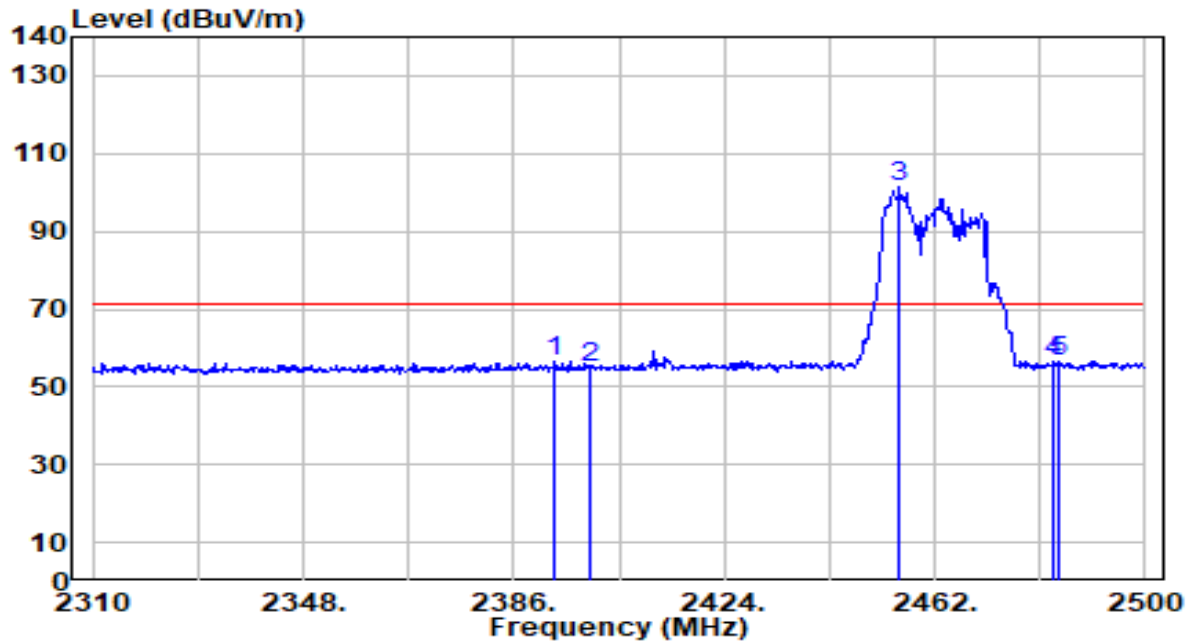


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2393.410	26.21	30.56	56.77	-14.64	71.41	200	226	Peak
2		2400.000	24.48	30.58	55.05	-16.36	71.41	200	226	Peak
3		2455.730	70.68	30.73	101.41	N/A	N/A	200	226	Peak
4		2483.500	25.46	30.81	56.27	-15.14	71.41	200	226	Peak
5		2484.610	25.64	30.82	56.46	-14.95	71.41	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

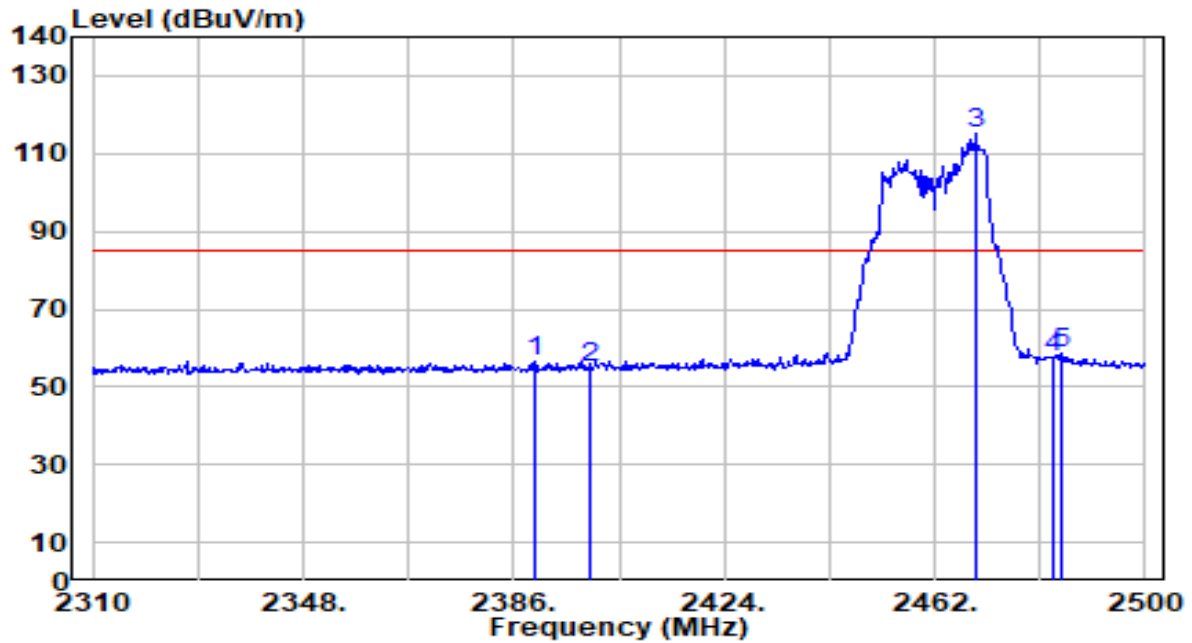


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.800	25.93	30.55	56.48	-28.57	85.05	200	322	Peak
2	2400.000	24.60	30.58	55.18	-29.87	85.05	200	322	Peak
3	2469.410	84.28	30.77	115.05	N/A	N/A	200	322	Peak
4	2483.500	26.91	30.81	57.72	-27.33	85.05	200	322	Peak
5	* 2484.800	27.91	30.82	58.73	-26.32	85.05	200	322	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

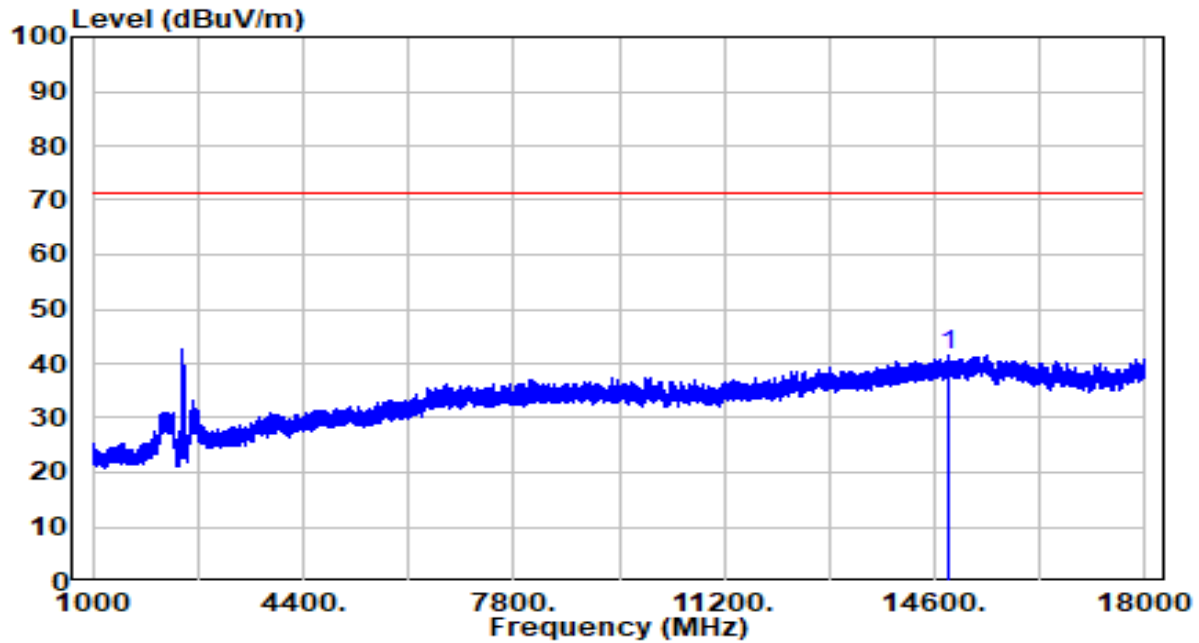


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14807.000	34.87	6.81	41.68	-29.73	71.41	100	282	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

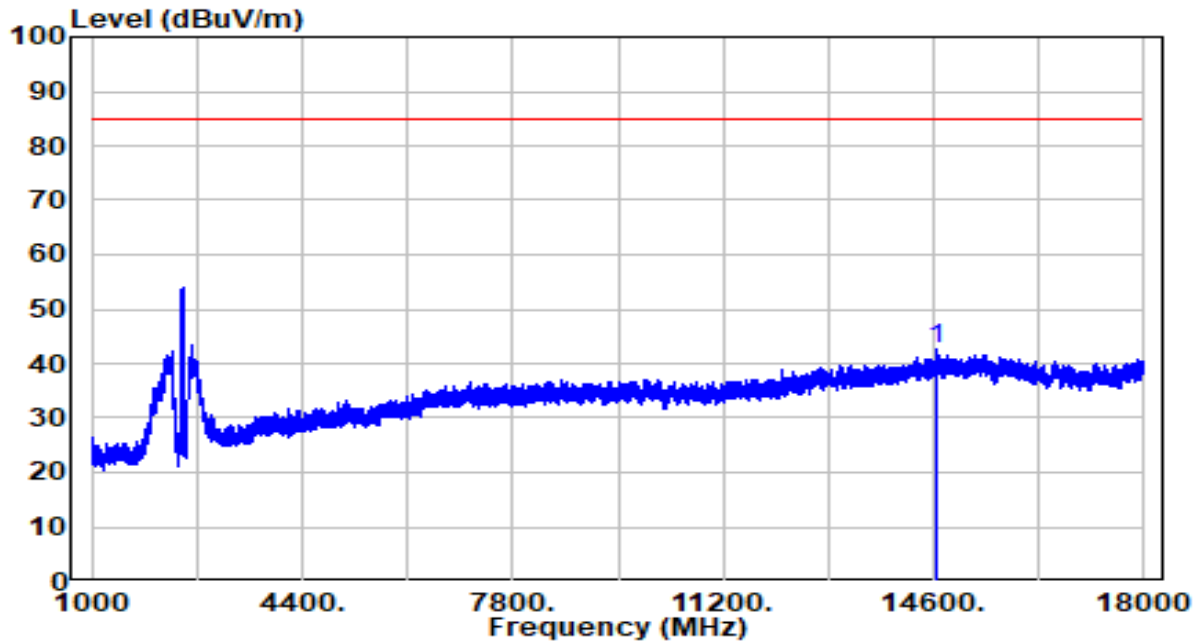


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14635.000	35.81	6.79	42.61	-42.44	85.05	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

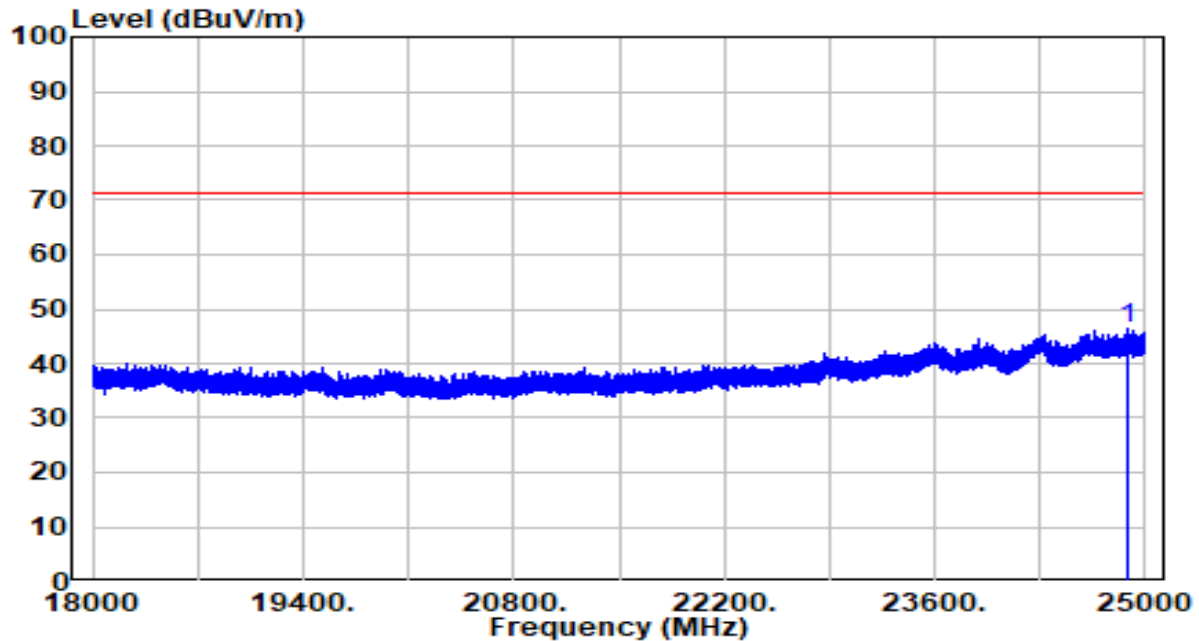


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24881.660	33.28	12.95	46.23	-25.18	71.41	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

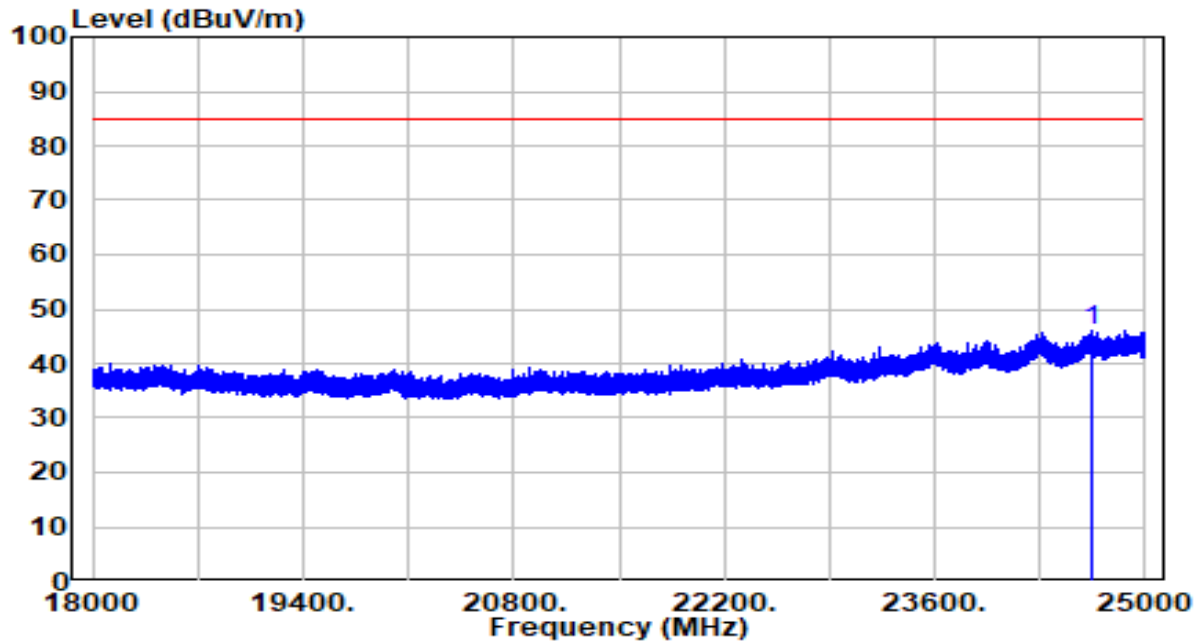


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24648.910	33.35	12.74	46.08	-38.97	85.05	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

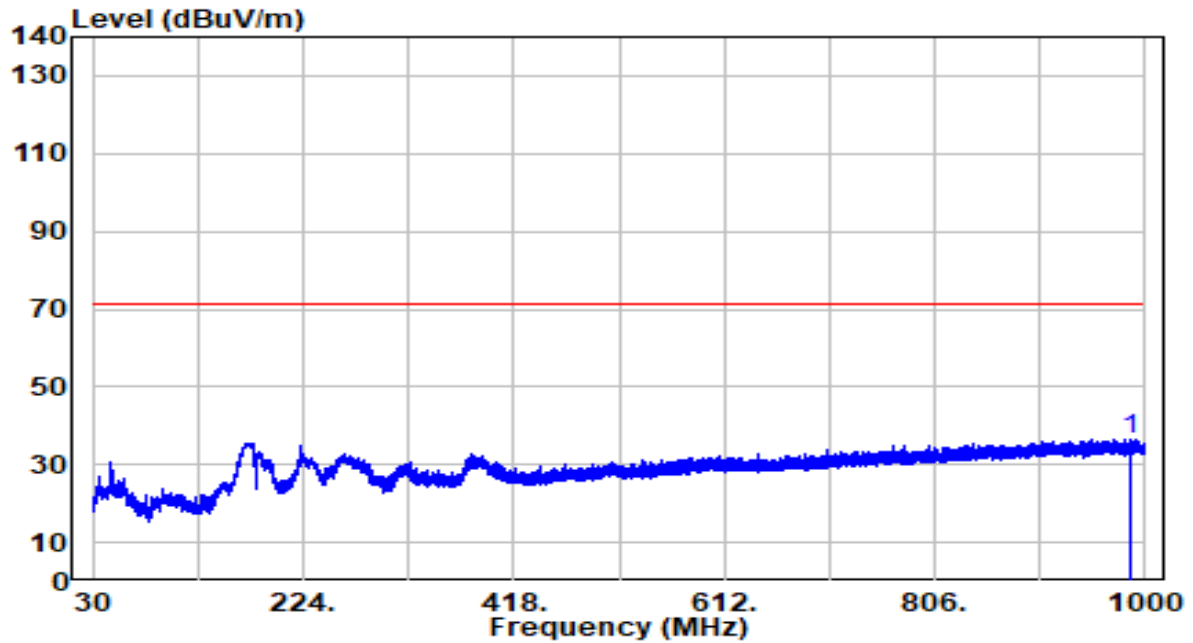


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	986.147	5.33	31.39	36.72	-34.69	71.41	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

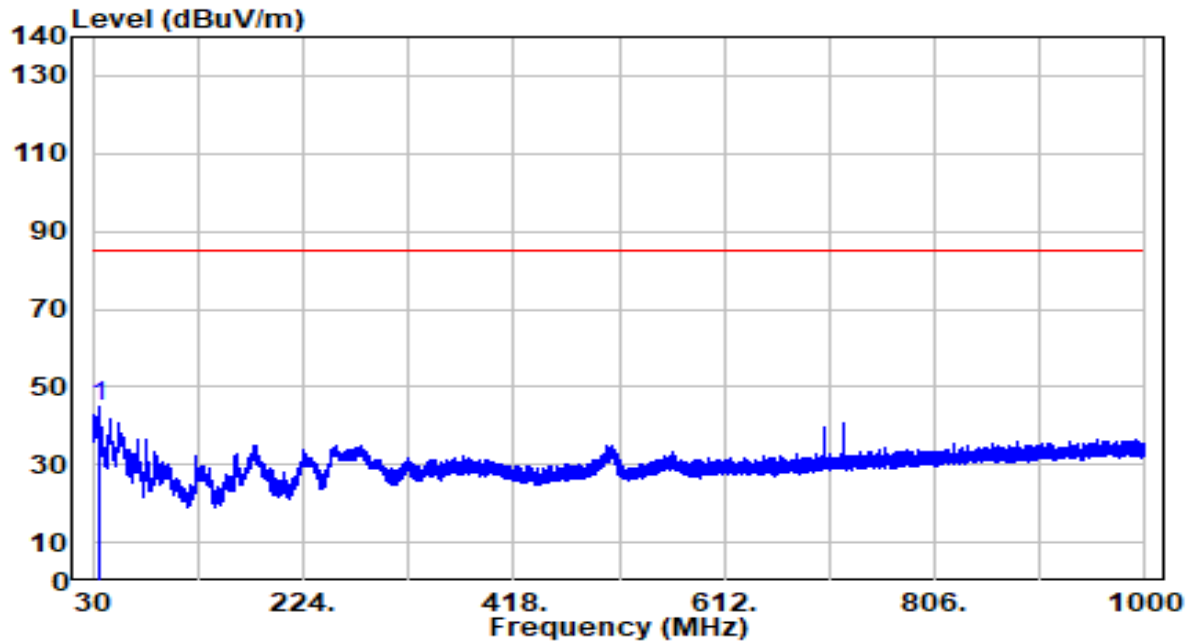


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.214	26.38	18.28	44.66	-40.39	85.05	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

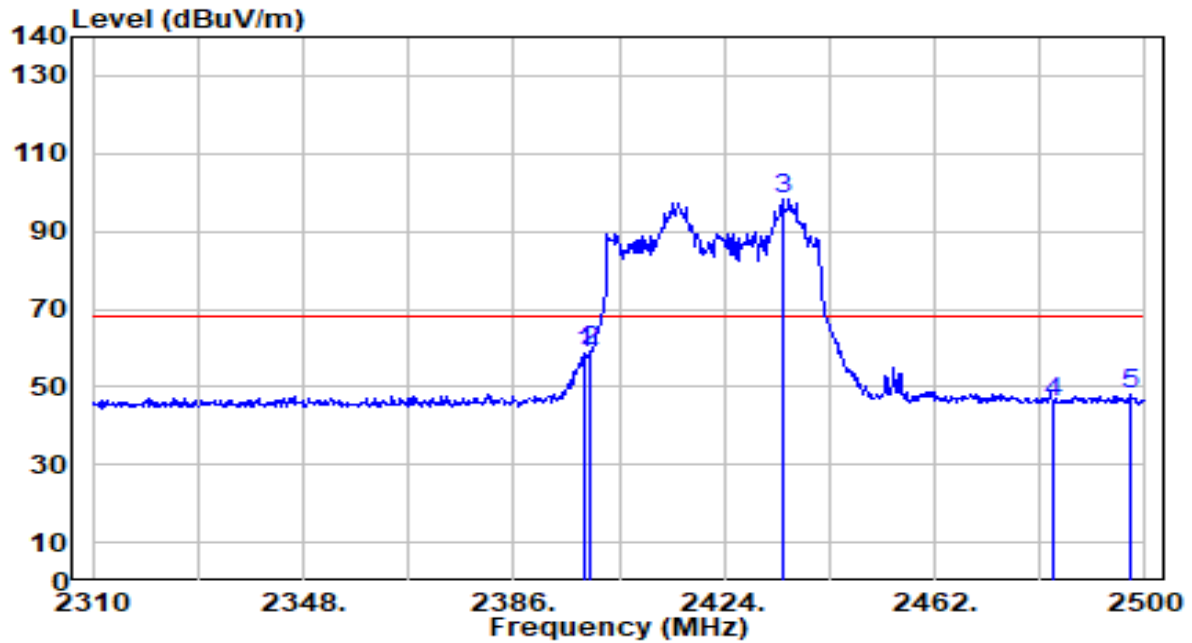


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.920	28.09	30.57	58.67	-9.56	68.23	100	212	Peak
2	*	2400.000	28.58	30.58	59.15	-9.08	68.23	100	212	Peak
3		2434.450	67.55	30.67	98.23	N/A	N/A	100	212	Peak
4		2483.500	15.29	30.81	46.11	-22.12	68.23	100	212	Peak
5		2497.150	16.99	30.85	47.84	-20.39	68.23	100	212	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

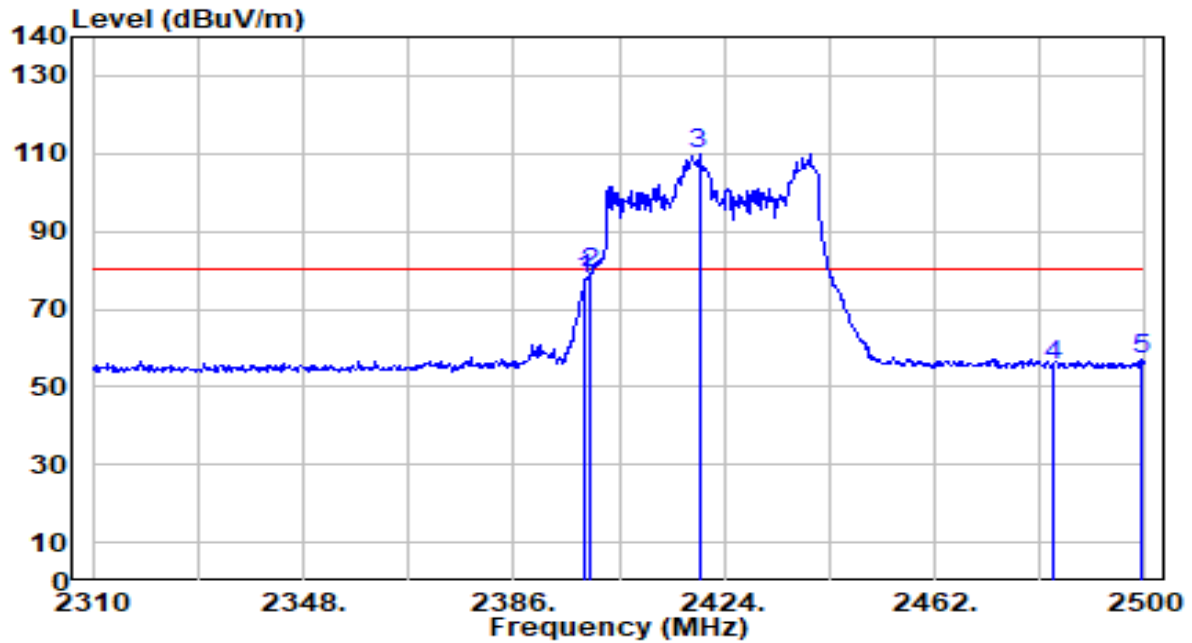


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2398.920	47.34	30.57	77.92	-2.21	80.13	200	95	Peak
2	*	2400.000	48.66	30.58	79.23	-0.90	80.13	200	95	Peak
3		2419.440	79.50	30.63	110.13	N/A	N/A	200	95	Peak
4		2483.500	24.48	30.81	55.30	-24.83	80.13	200	95	Peak
5		2499.430	26.06	30.86	56.92	-23.21	80.13	200	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

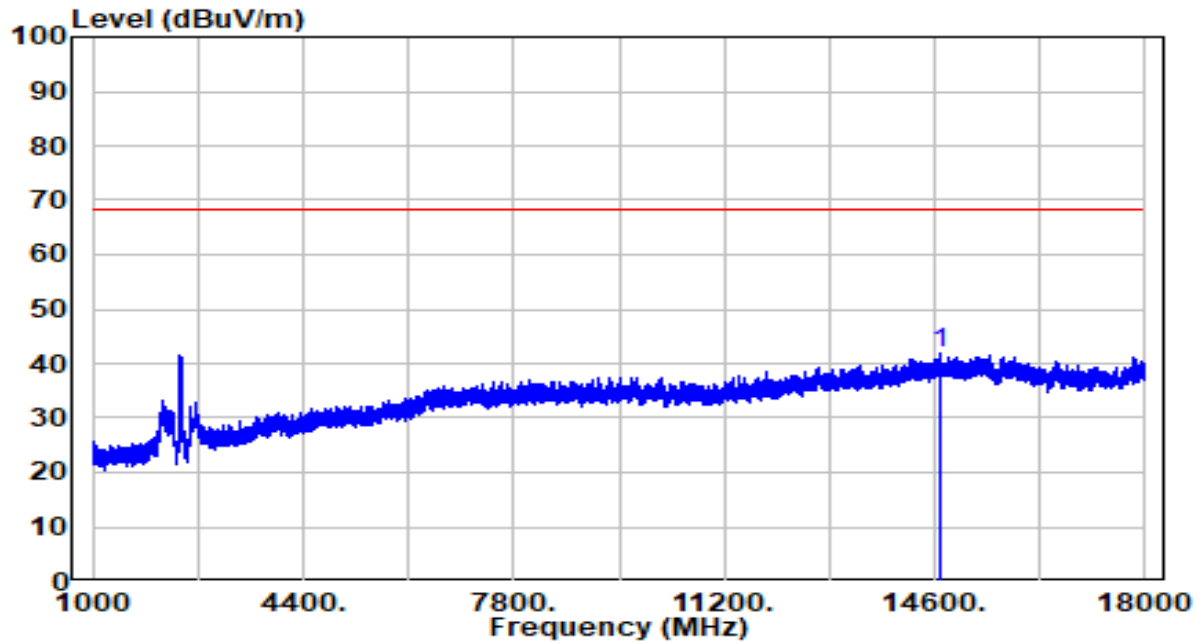


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14692.000	34.93	6.80	41.73	-26.50	68.23	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

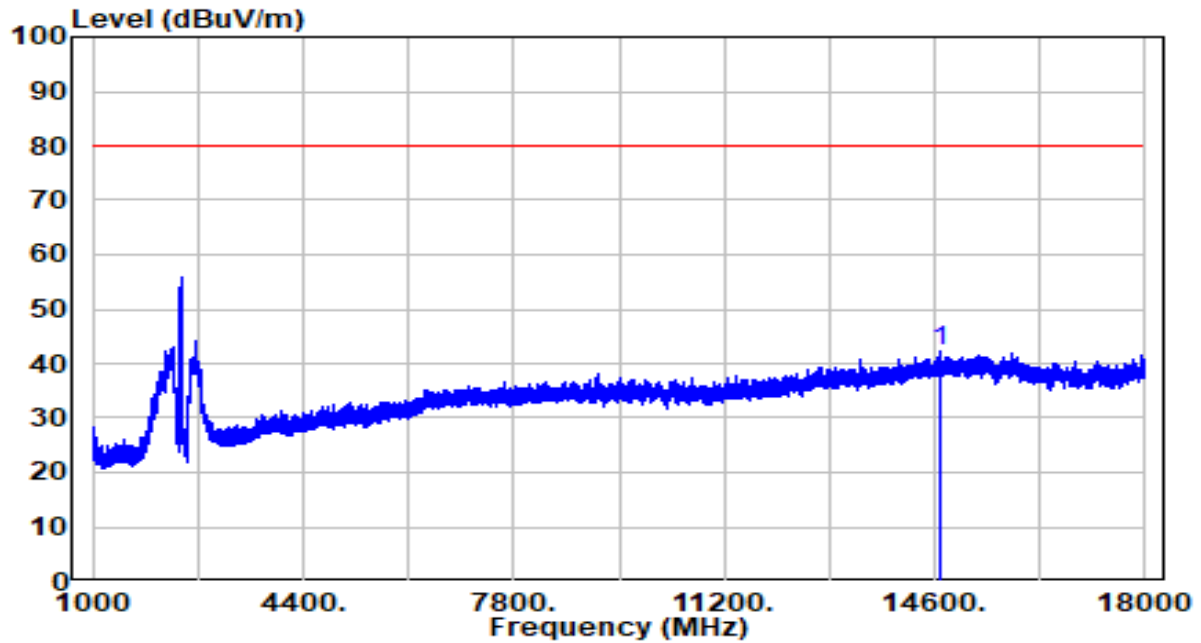


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14693.000	35.40	6.80	42.20	-37.93	80.13	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

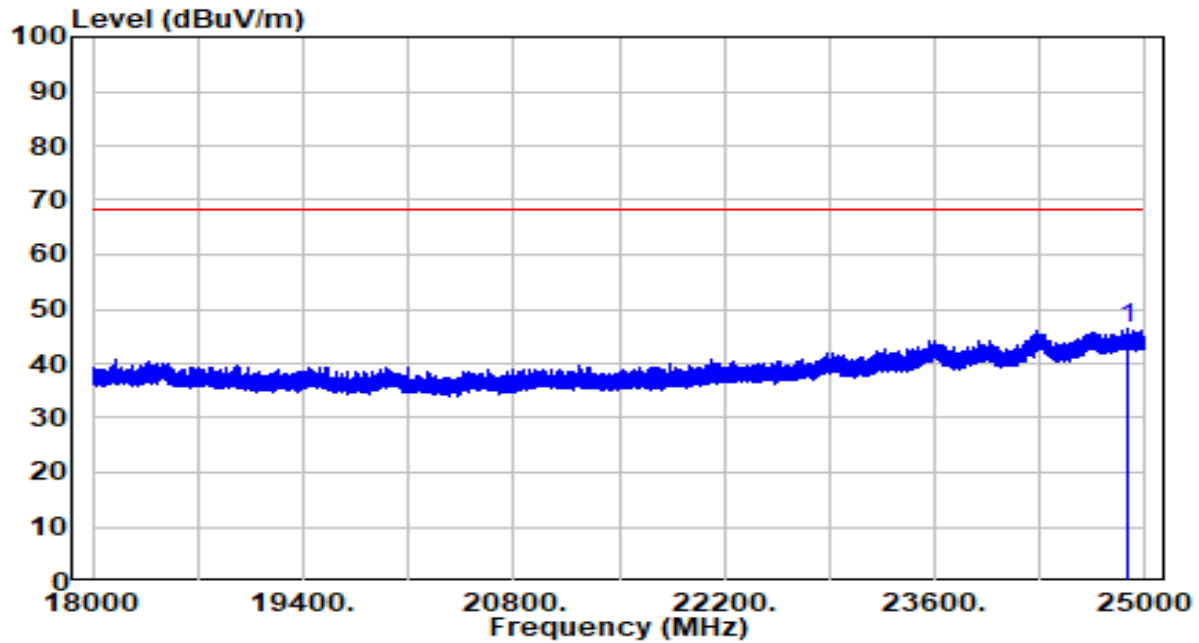


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24888.660	33.39	12.95	46.34	-21.89	68.23	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

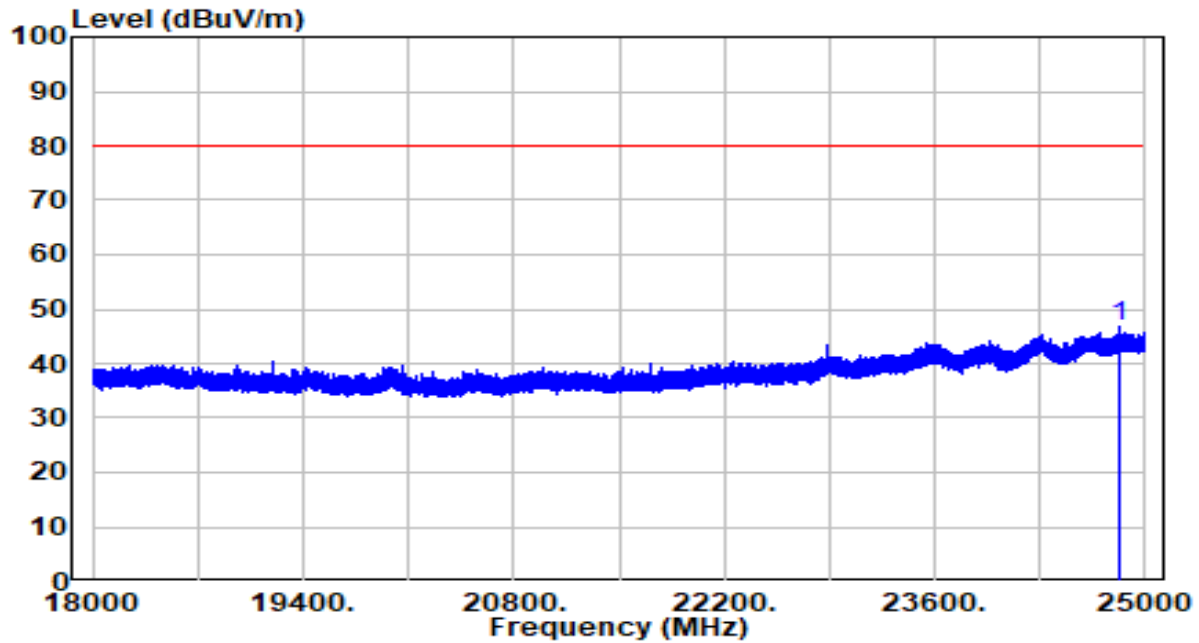


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24832.220	33.76	12.90	46.66	-33.47	80.13	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

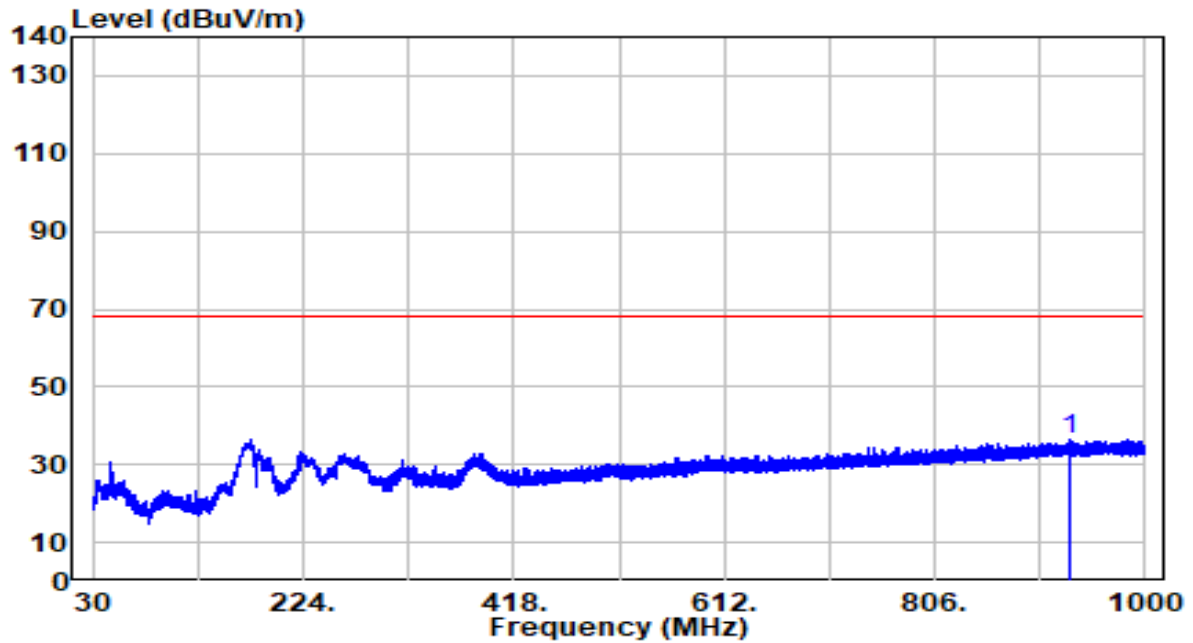


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	930.827	5.48	30.84	36.32	-31.91	68.23	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

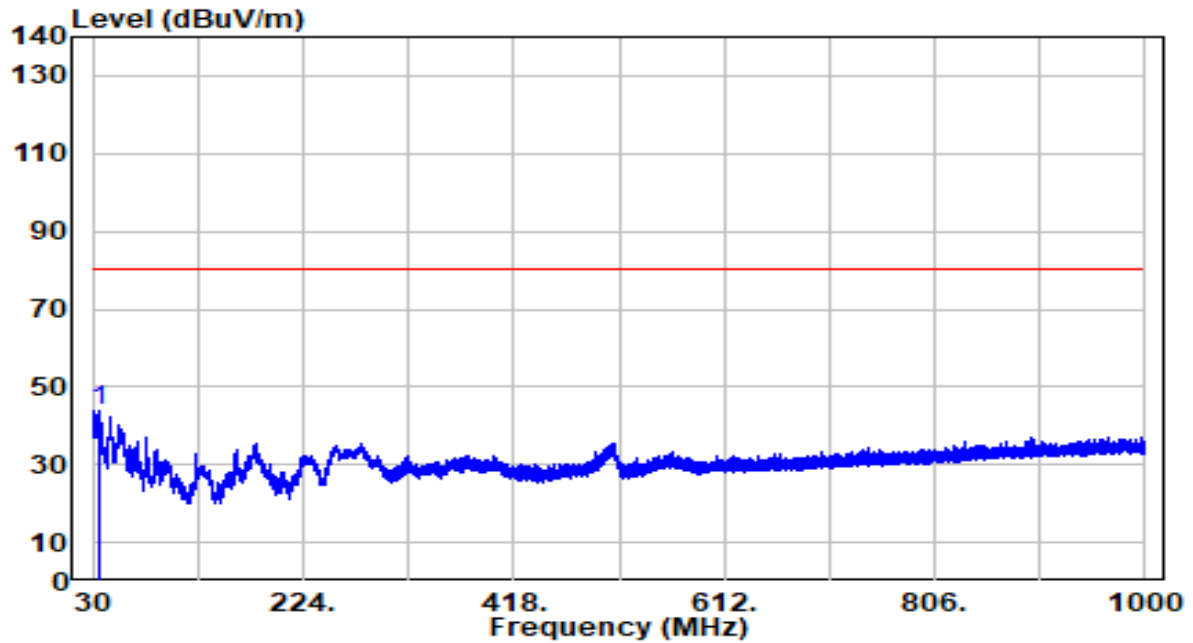


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.820	25.69	18.13	43.82	-36.31	80.13	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

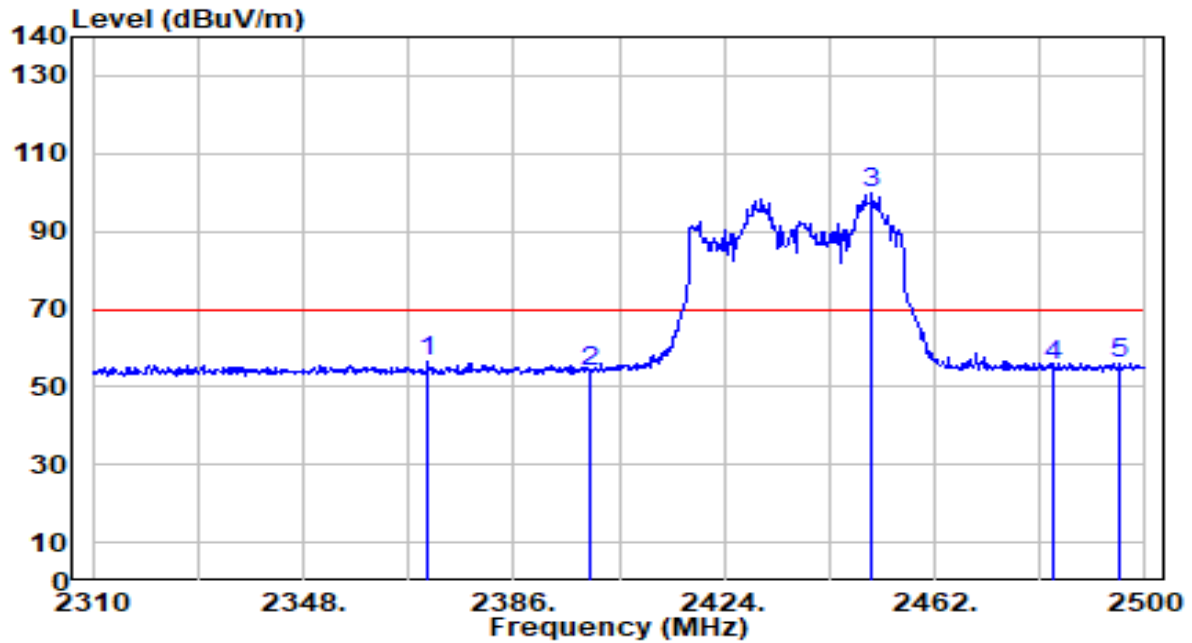


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2370.610	26.05	30.49	56.54	-13.21	69.75	178	220	Peak
2		2400.000	23.44	30.58	54.02	-15.73	69.75	178	220	Peak
3		2450.790	69.03	30.72	99.75	N/A	N/A	178	220	Peak
4		2483.500	24.72	30.81	55.53	-14.22	69.75	178	220	Peak
5		2495.440	25.39	30.85	56.24	-13.51	69.75	178	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

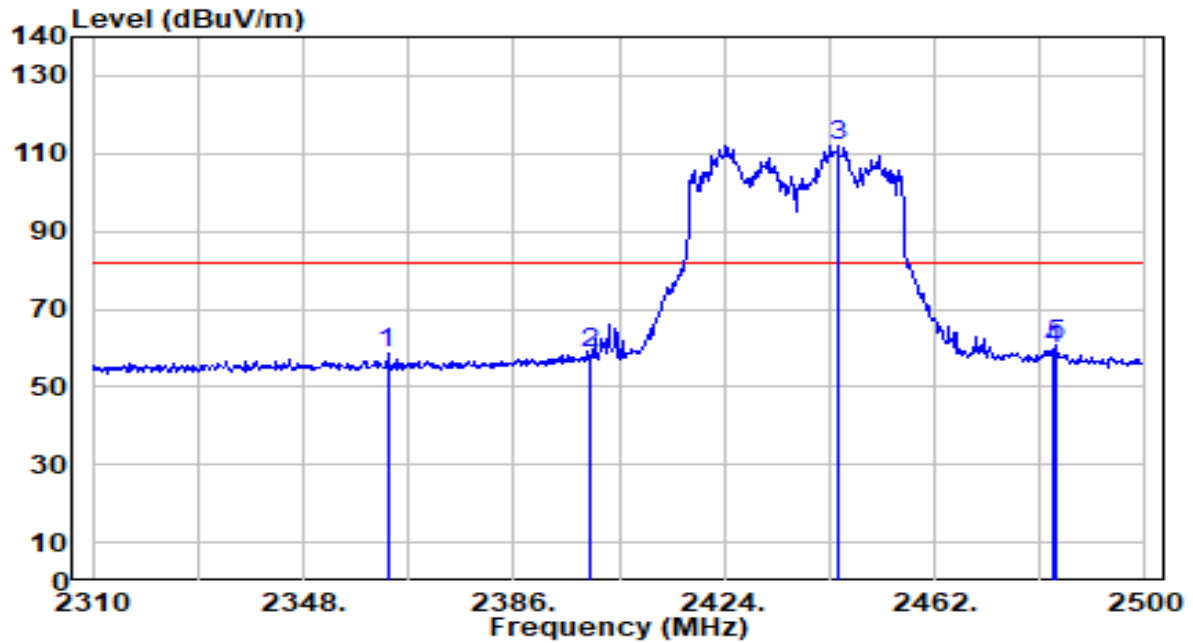


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2363.200	27.98	30.47	58.45	-23.47	81.92	200	326	Peak
2	2400.000	28.15	30.58	58.73	-23.19	81.92	200	326	Peak
3	2444.520	81.22	30.70	111.92	N/A	N/A	200	326	Peak
4	2483.500	28.85	30.81	59.66	-22.26	81.92	200	326	Peak
5	* 2484.040	29.86	30.81	60.68	-21.24	81.92	200	326	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

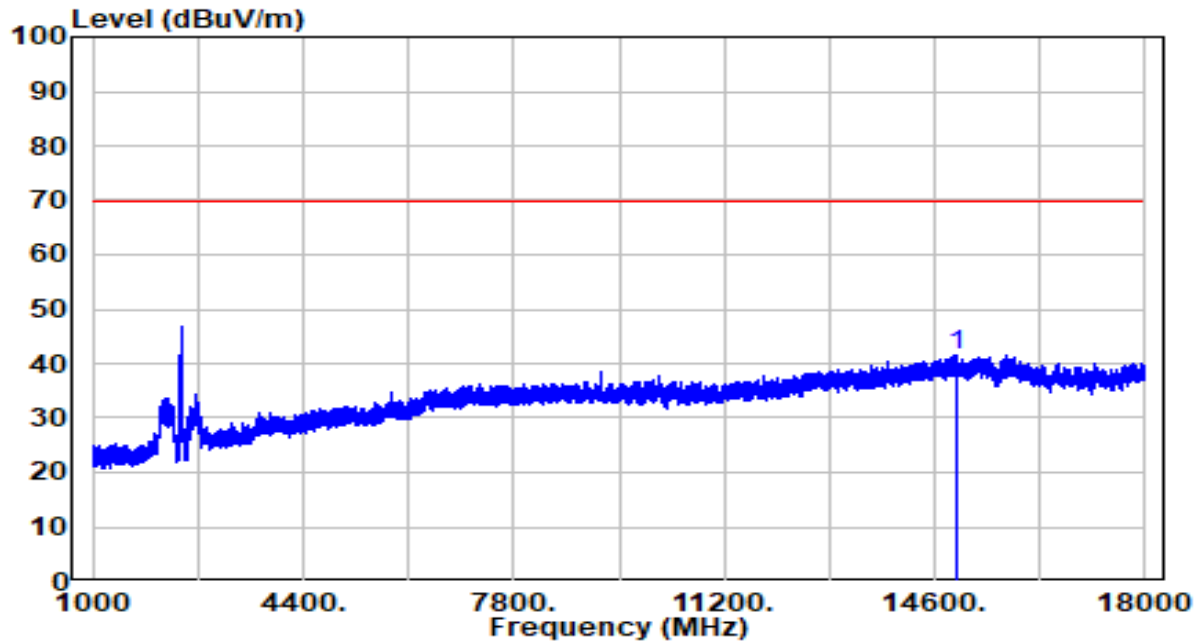


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	14956.000	34.78	6.68	41.46	-28.29	69.75	100	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

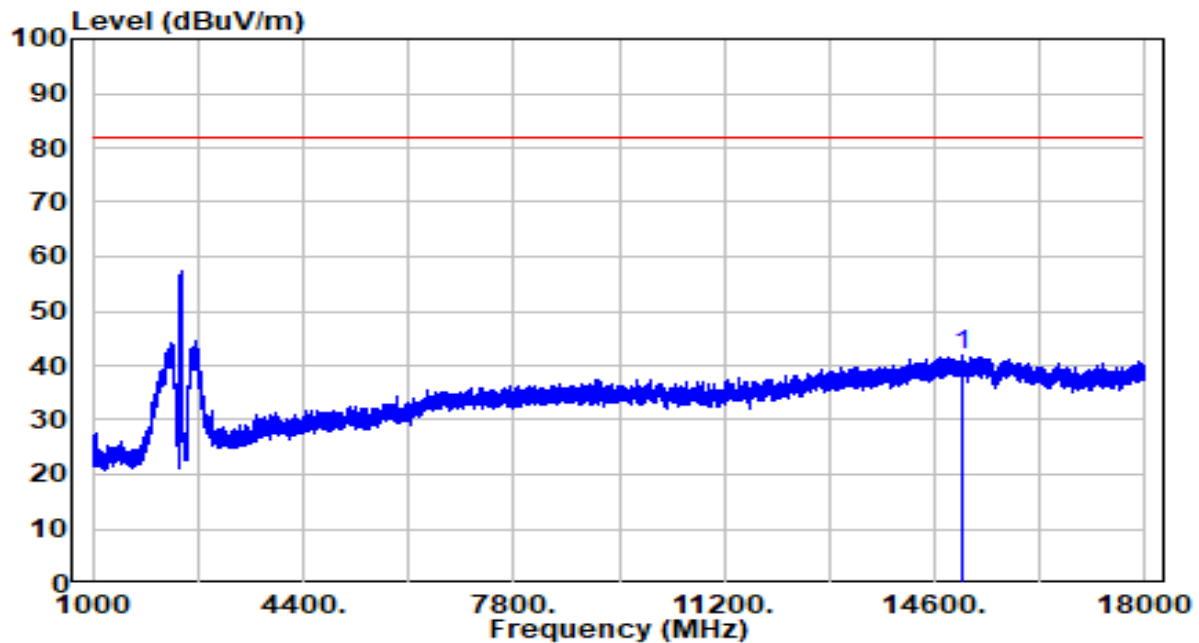


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15032.000	35.30	6.64	41.94	-39.98	81.92	100	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

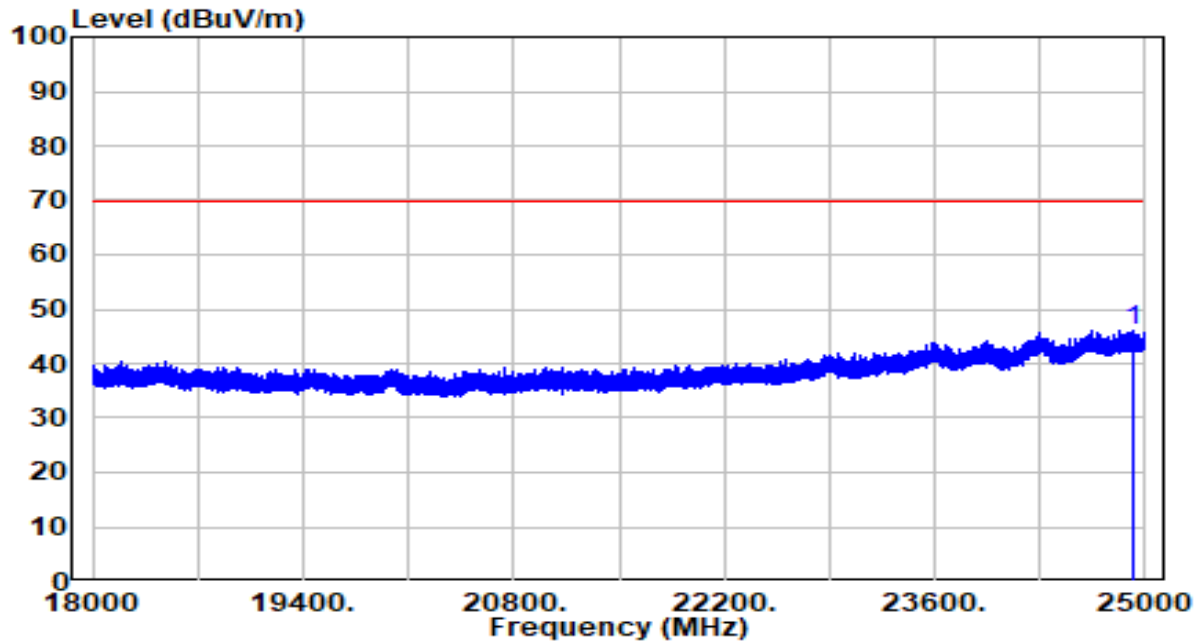


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24926.940	32.92	12.99	45.91	-23.84	69.75	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

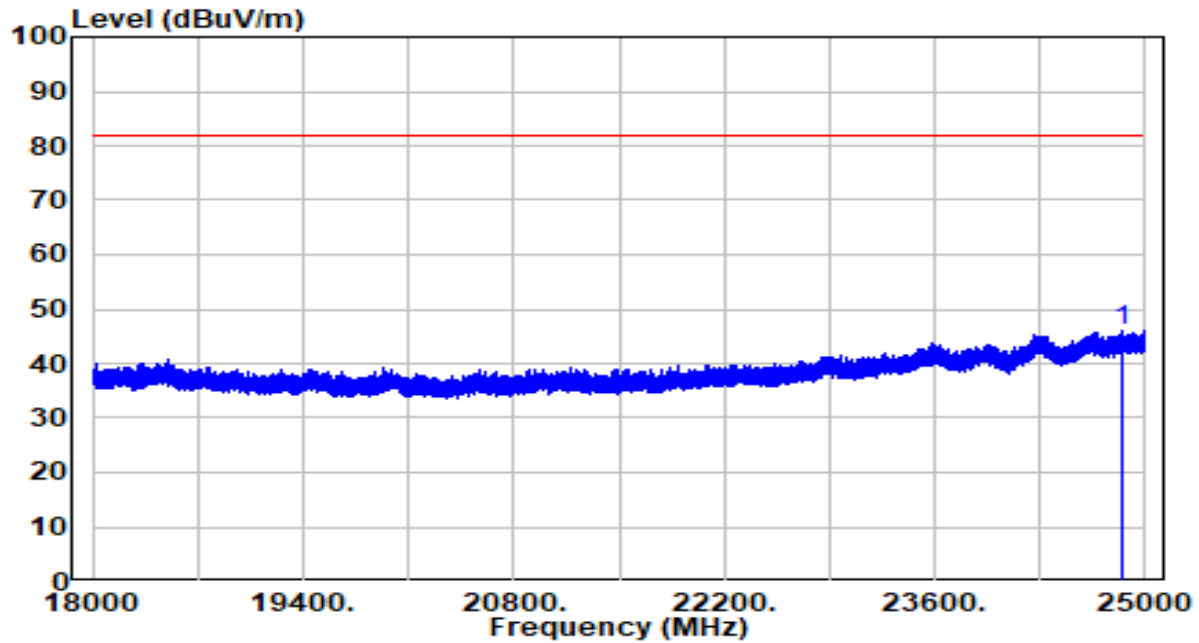


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24843.590	33.00	12.91	45.91	-36.01	81.92	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

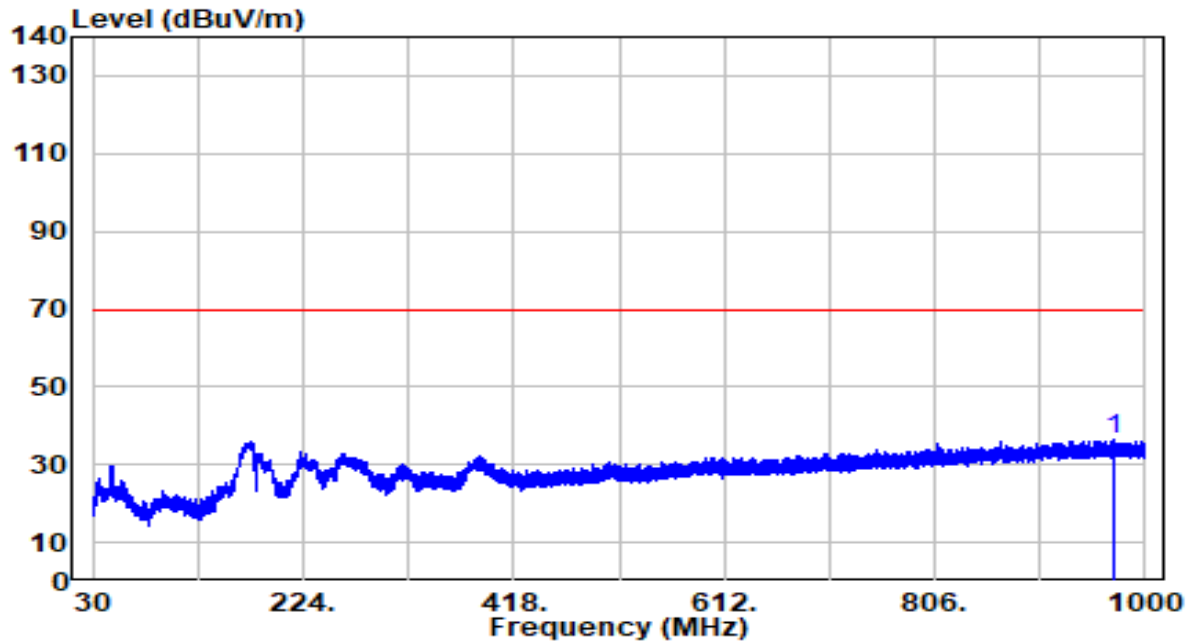


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	971.537	5.13	31.20	36.34	-33.41	69.75	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

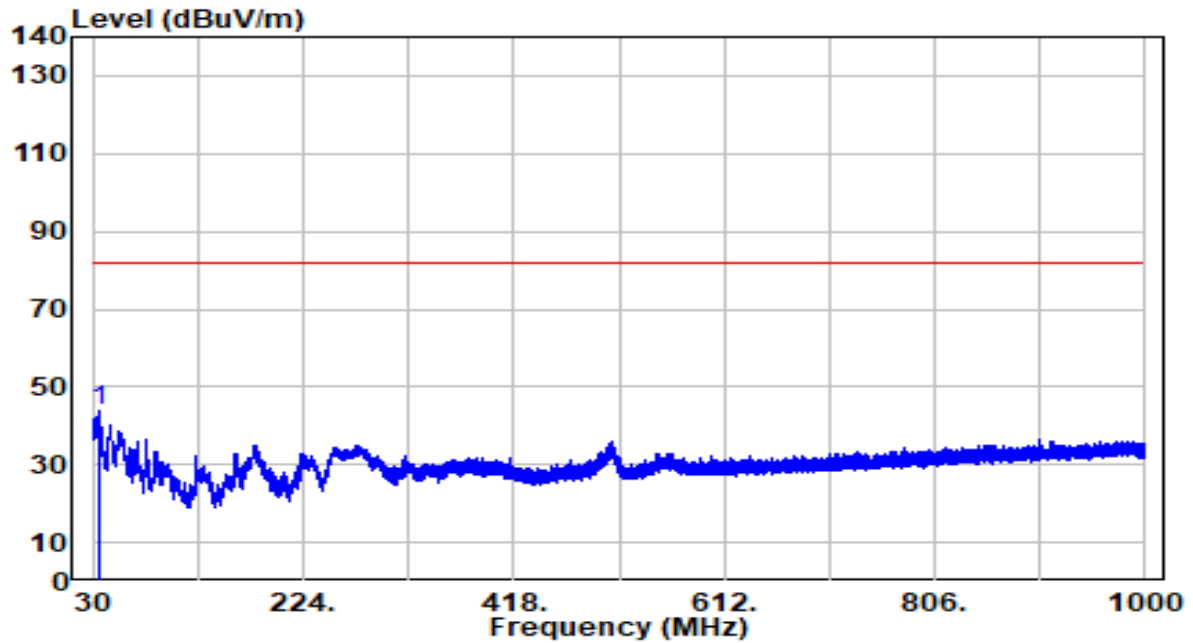


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	36.608	25.53	18.43	43.96	-37.96	81.92	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

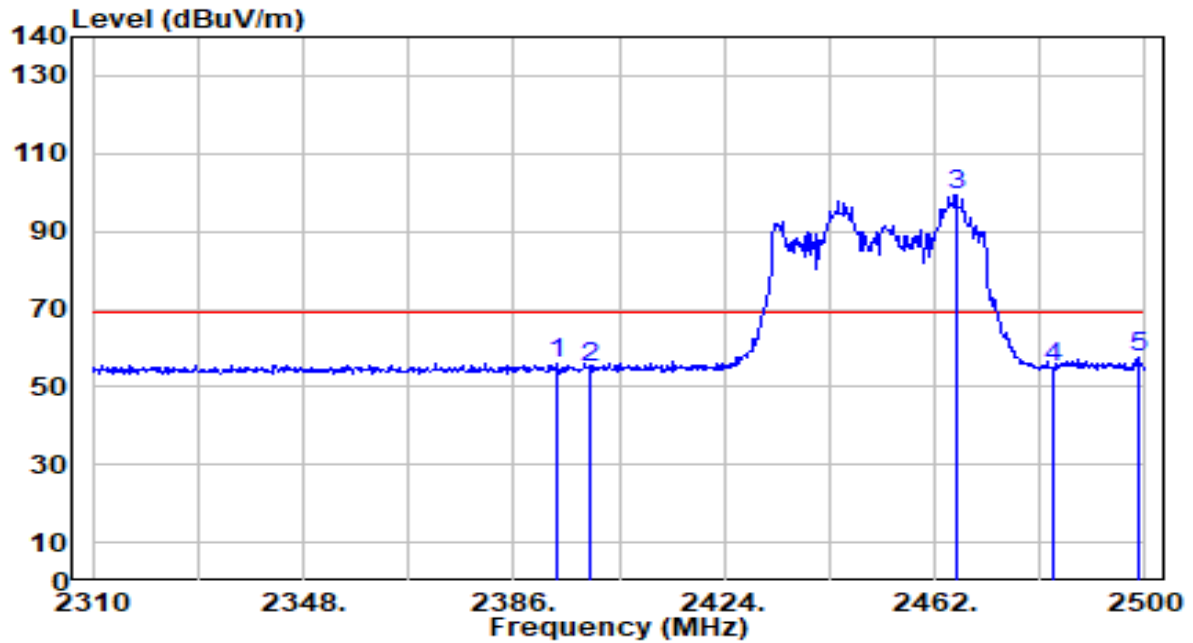


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2393.980	25.45	30.56	56.00	-13.32	69.32	200	226	Peak
2	2400.000	24.43	30.58	55.00	-14.32	69.32	200	226	Peak
3	2465.800	68.55	30.76	99.32	N/A	N/A	200	226	Peak
4	2483.500	23.93	30.81	54.75	-14.57	69.32	200	226	Peak
5	* 2498.670	26.66	30.86	57.52	-11.80	69.32	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-16
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

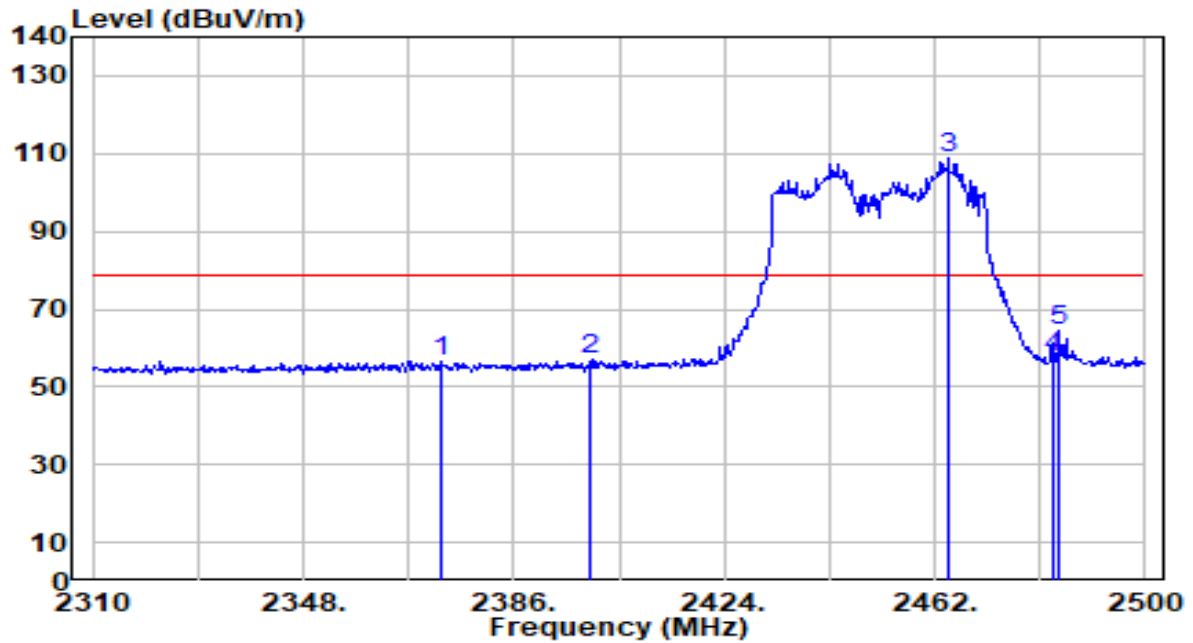


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2372.700	26.29	30.50	56.78	-21.83	78.61	200	153	Peak
2	2400.000	26.23	30.58	56.80	-21.81	78.61	200	153	Peak
3	2464.470	77.85	30.76	108.61	N/A	N/A	200	153	Peak
4	2483.500	26.57	30.81	57.38	-21.23	78.61	200	153	Peak
5	* 2484.420	33.90	30.82	64.71	-13.90	78.61	200	153	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

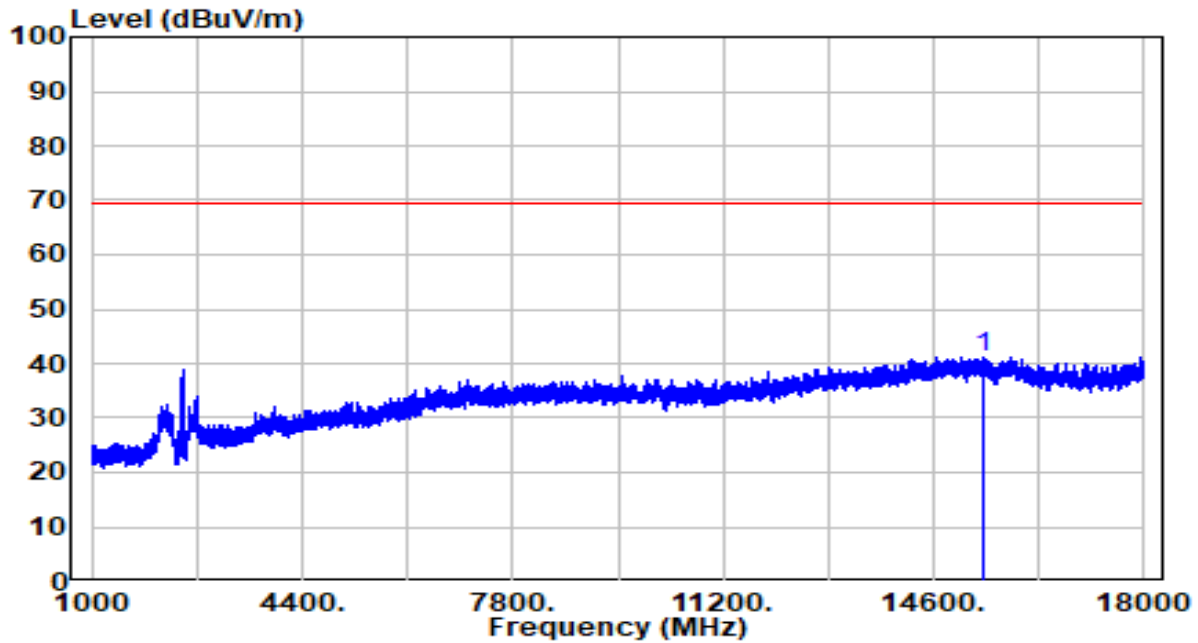


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15383.000	34.54	6.59	41.13	-28.19	69.32	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-18
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

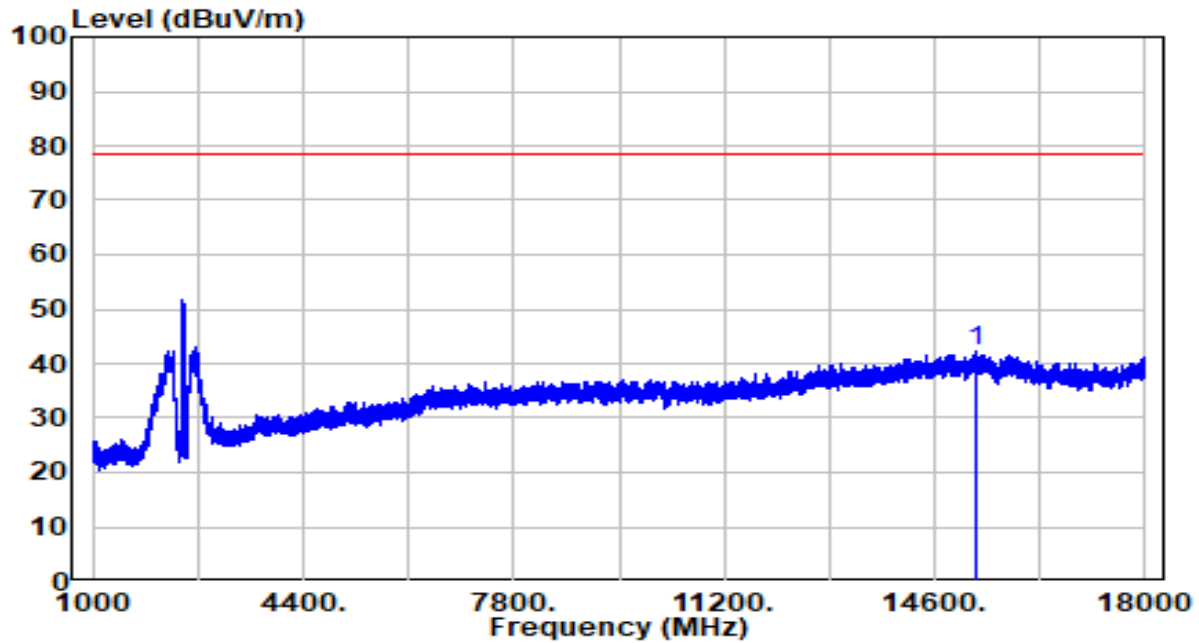


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	15285.000	35.81	6.63	42.44	-36.17	78.61	100	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

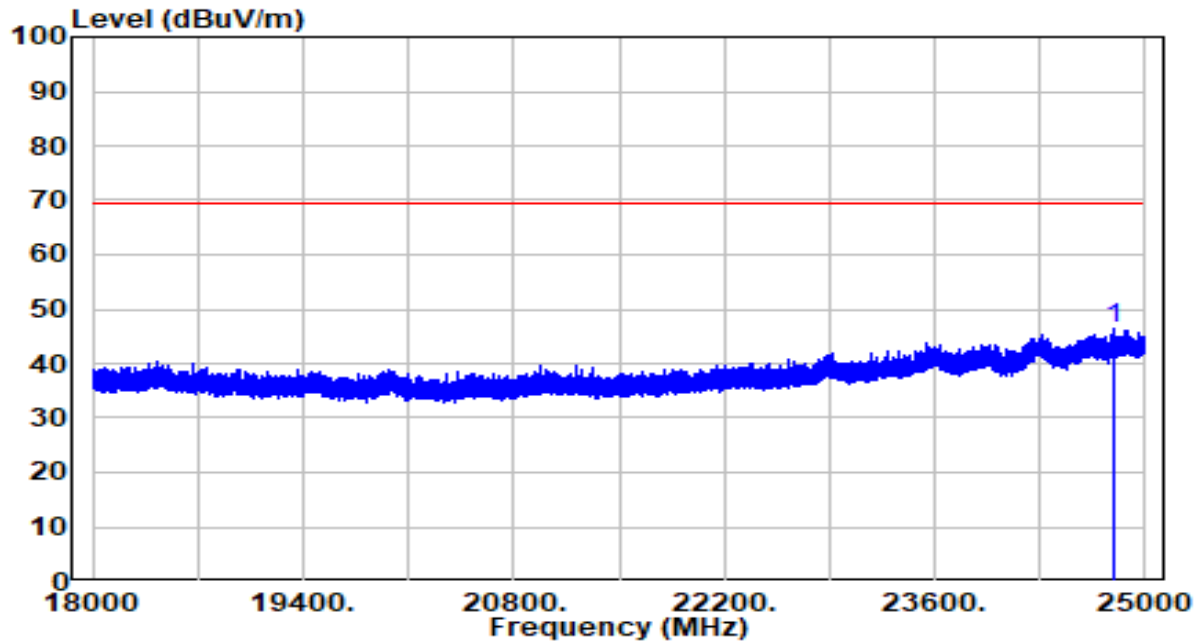


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24785.840	33.40	12.86	46.26	-23.06	69.32	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-19
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

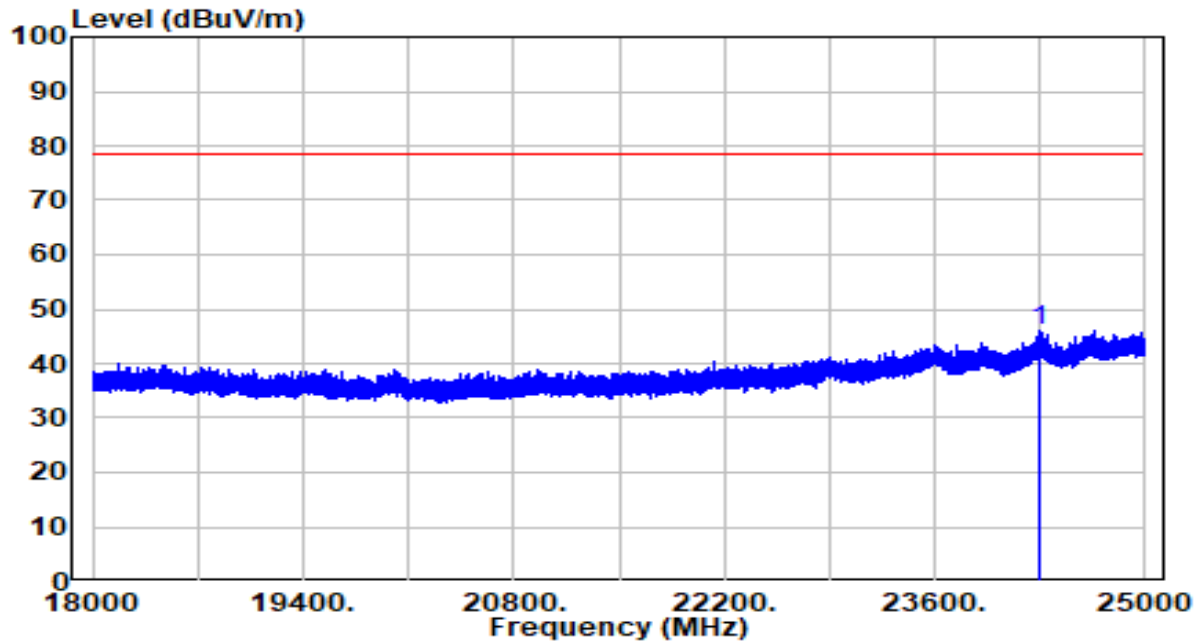


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24293.220	33.67	12.54	46.21	-32.40	78.61	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

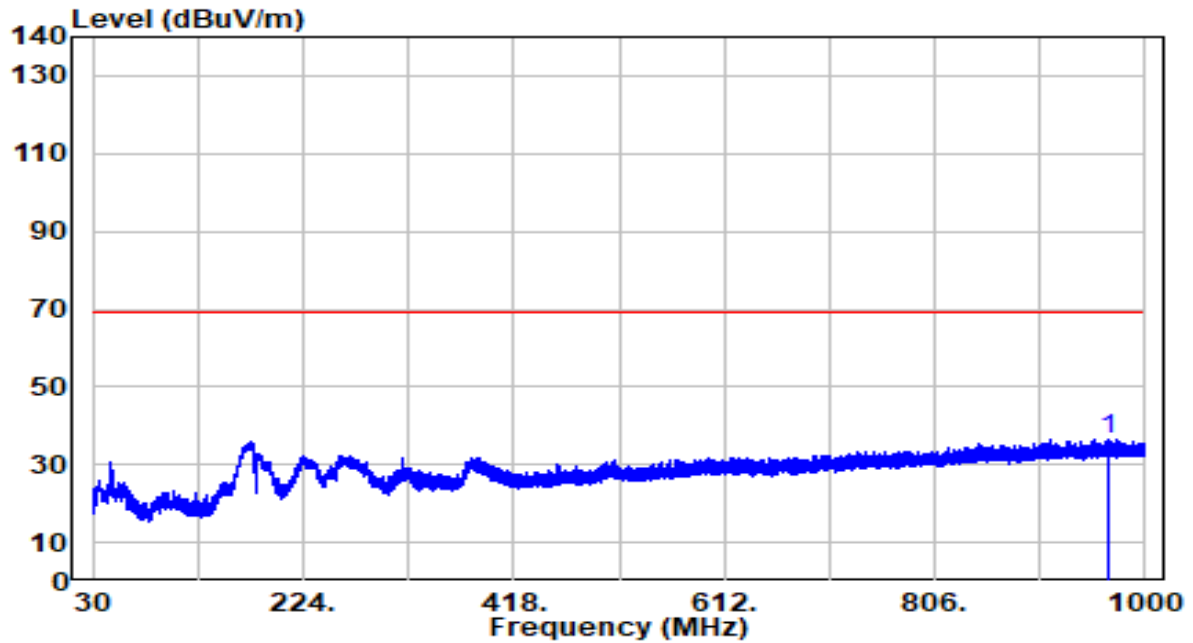


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	965.201	5.38	31.12	36.50	-32.82	69.32	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-20
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

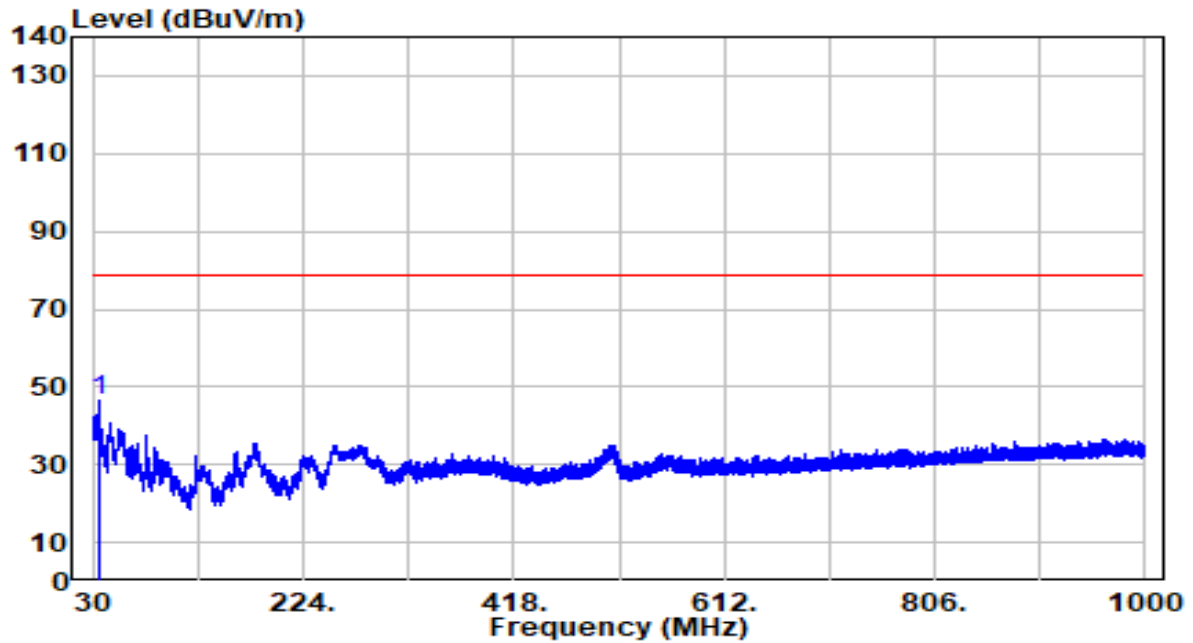

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.638	28.39	18.06	46.45	-32.16	78.61	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

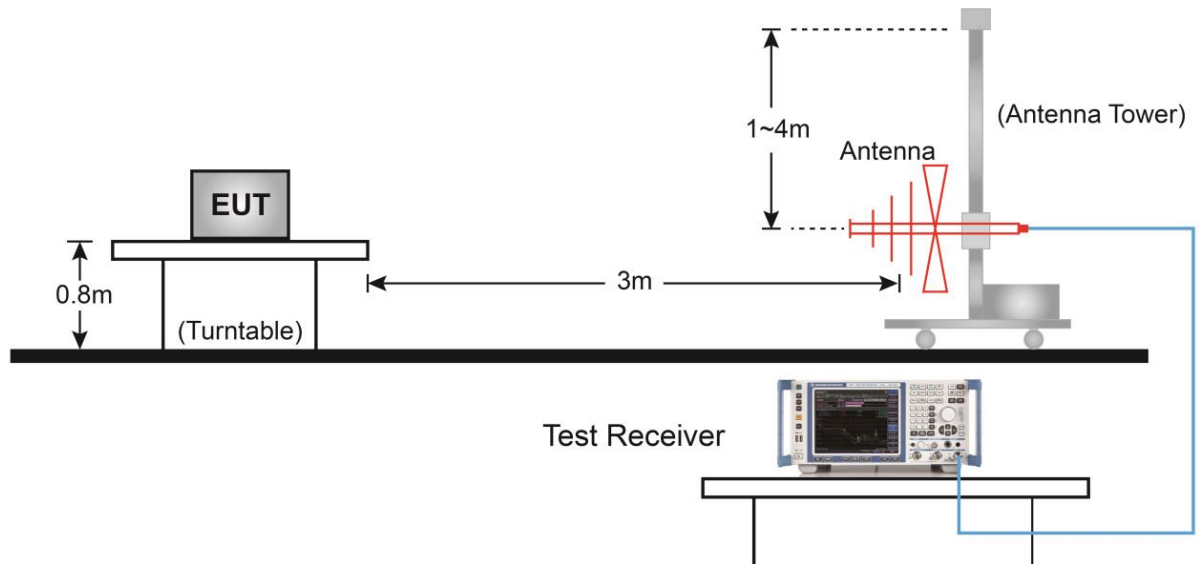


Above 1GHz Test Setup:

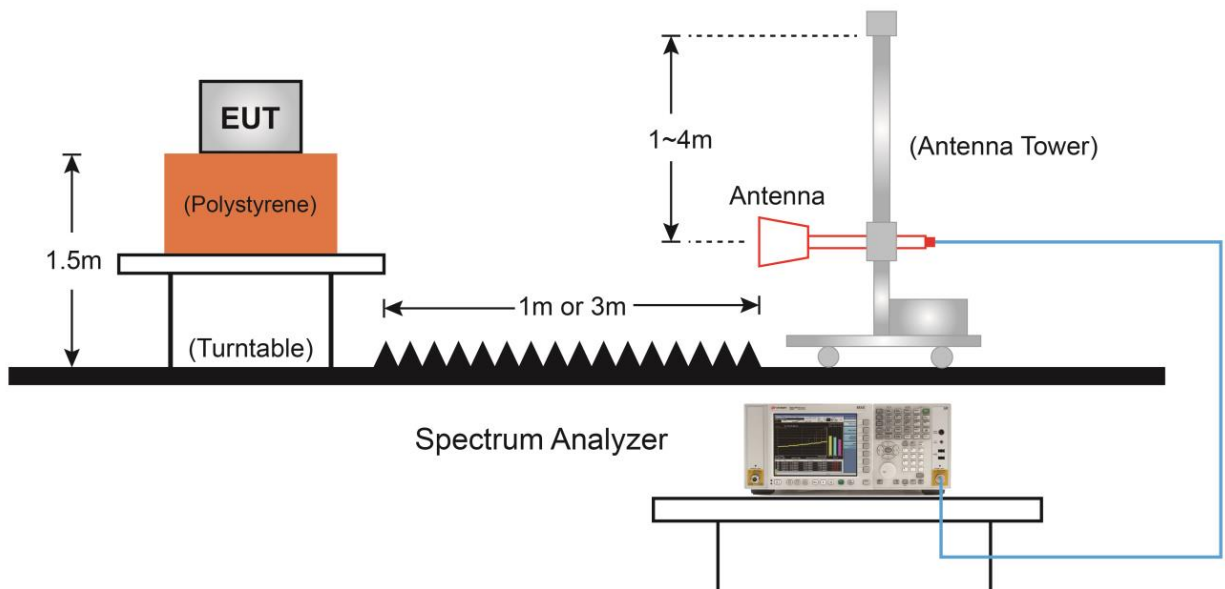

7.6.5. Test Result

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-02
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

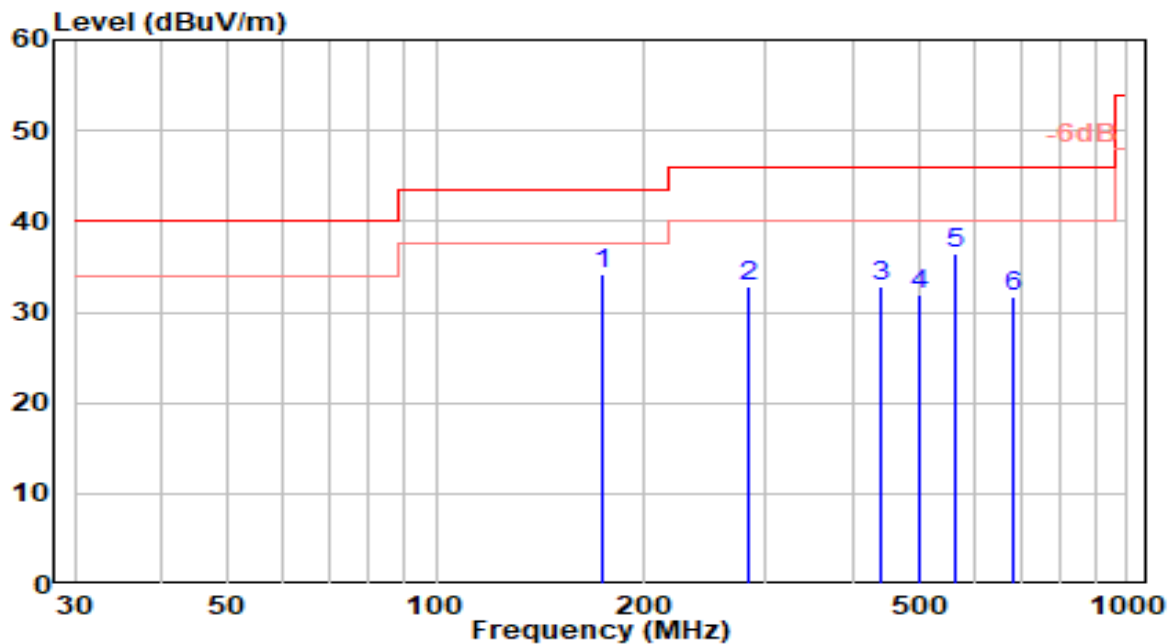


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	173.310	18.19	16.00	34.18	-9.32	43.50	200	269	QP
2		283.090	12.63	20.23	32.86	-13.14	46.00	100	304	QP
3		440.440	9.20	23.72	32.92	-13.08	46.00	200	286	QP
4		498.490	6.95	24.97	31.92	-14.08	46.00	200	136	QP
5		564.830	10.33	26.13	36.46	-9.54	46.00	200	160	QP
6		686.320	3.84	27.84	31.68	-14.32	46.00	100	100	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-02
Factor	VULB 9162	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

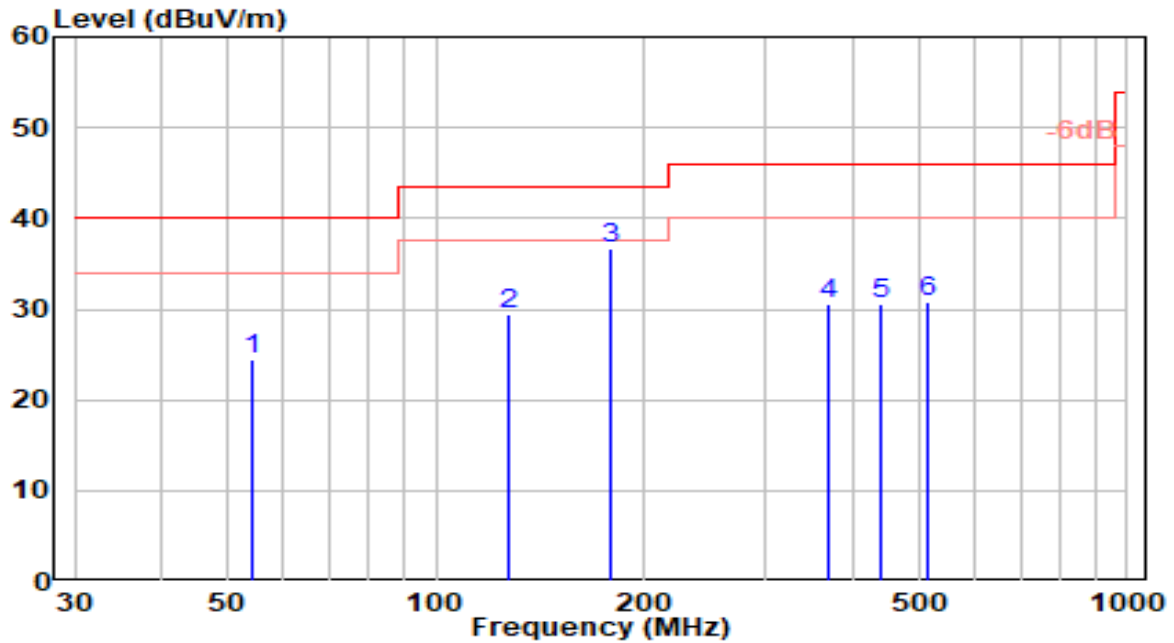


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	54.360	4.43	19.92	24.34	-15.66	40.00	100	176	QP
2	127.850	13.81	15.63	29.44	-14.06	43.50	100	253	QP
3	* 178.120	20.36	16.26	36.62	-6.88	43.50	100	122	QP
4	369.470	7.85	22.80	30.65	-15.35	46.00	100	351	QP
5	440.850	6.85	23.72	30.58	-15.42	46.00	100	240	QP
6	513.960	5.67	25.22	30.89	-15.11	46.00	100	108	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

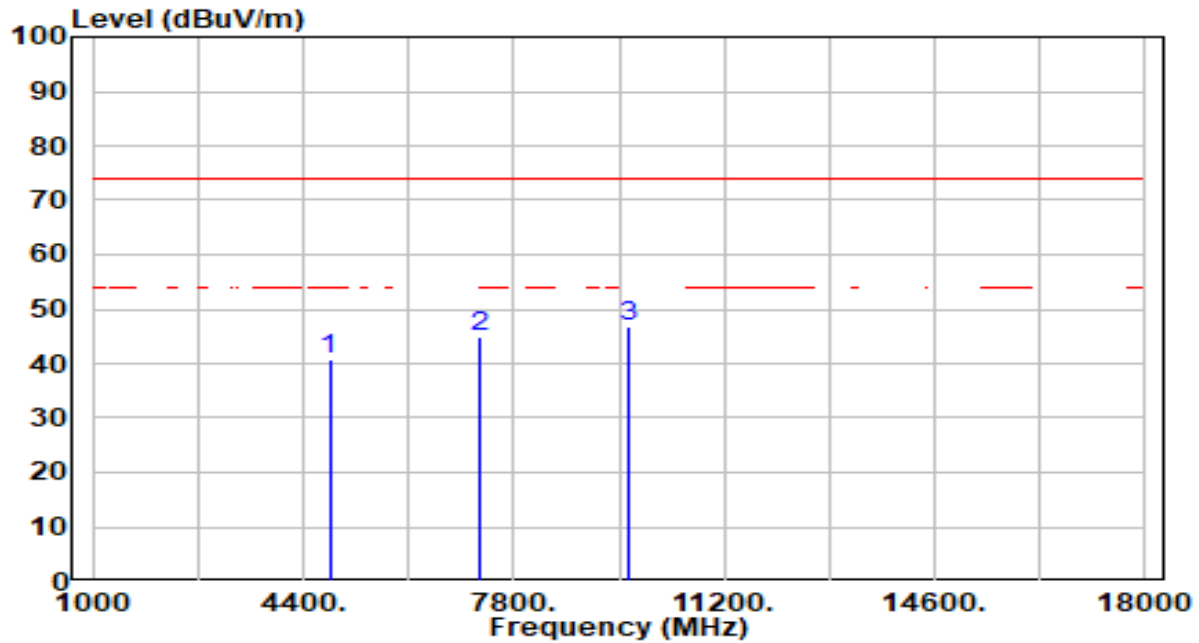


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.78	0.15	40.93	-33.07	74.00	300	232	Peak
2	7236.000	39.12	5.81	44.93	-29.07	74.00	200	208	Peak
3	* 9648.000	41.73	5.16	46.90	-27.10	74.00	200	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

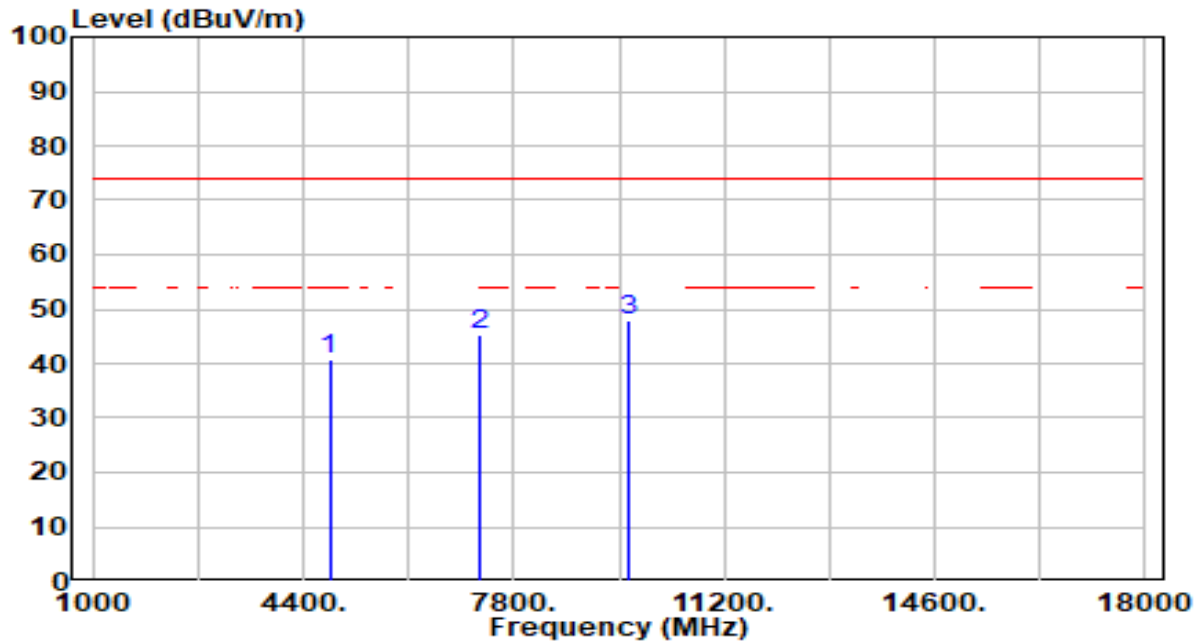


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.47	0.15	40.62	-33.38	74.00	100	8	Peak
2	7236.000	39.36	5.81	45.17	-28.83	74.00	100	6	Peak
3	* 9648.000	42.77	5.16	47.94	-26.06	74.00	100	266	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

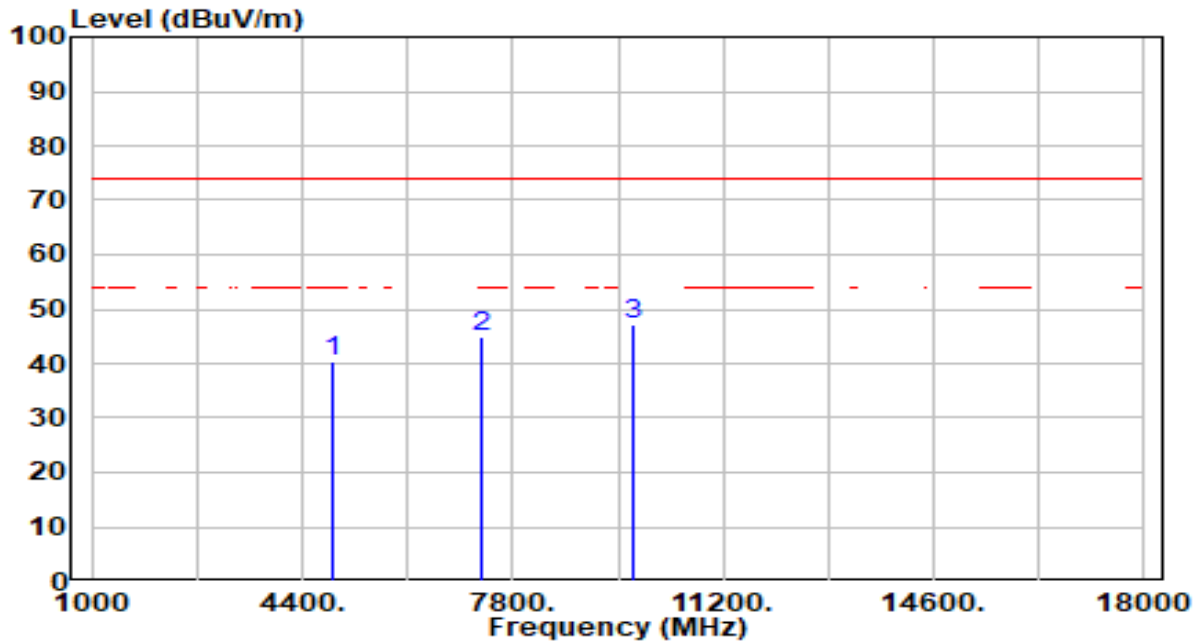


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.94	0.25	40.19	-33.81	74.00	100	153	Peak
2	7311.000	39.06	5.82	44.88	-29.12	74.00	100	264	Peak
3	* 9748.000	41.92	5.19	47.12	-26.88	74.00	100	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

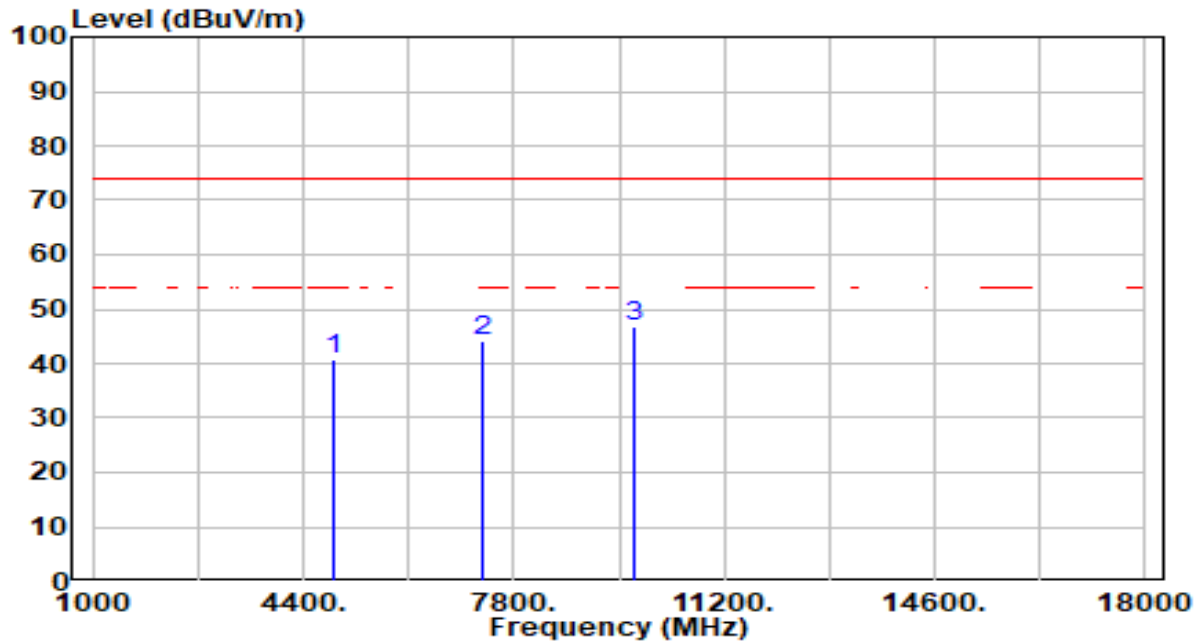


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.33	0.25	40.59	-33.41	74.00	100	84	Peak
2	7311.000	38.25	5.82	44.07	-29.93	74.00	100	21	Peak
3	* 9748.000	41.51	5.19	46.70	-27.30	74.00	100	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

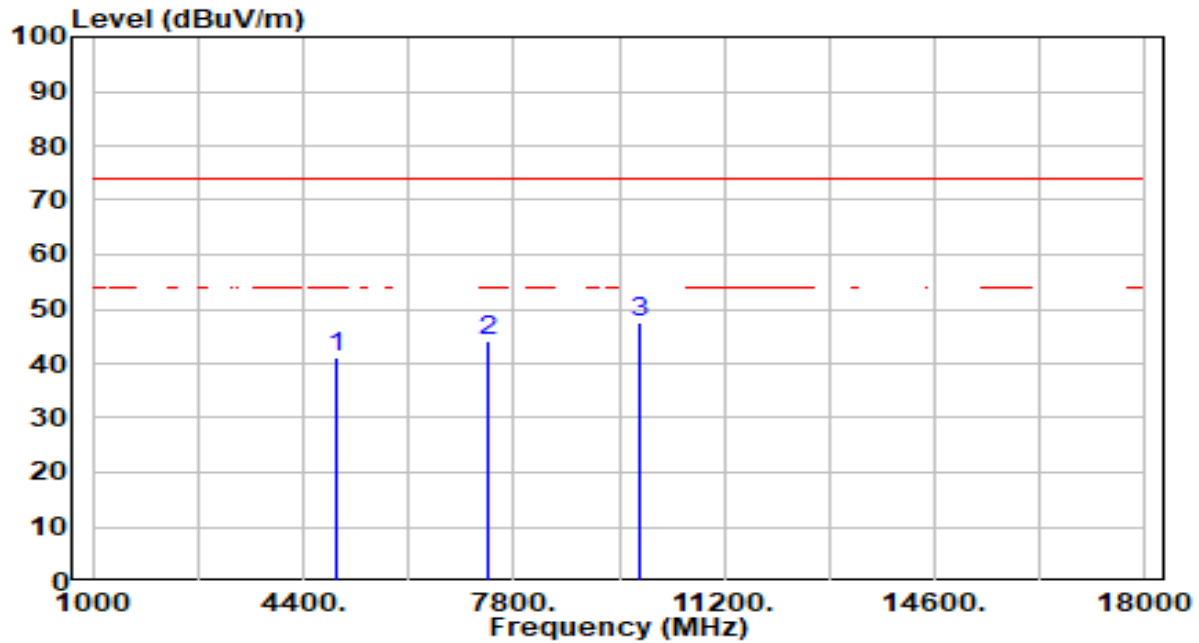


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.61	0.35	40.97	-33.03	74.00	100	223	Peak
2	7386.000	38.43	5.82	44.26	-29.74	74.00	100	0	Peak
3	* 9848.000	42.36	5.22	47.59	-26.41	74.00	100	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

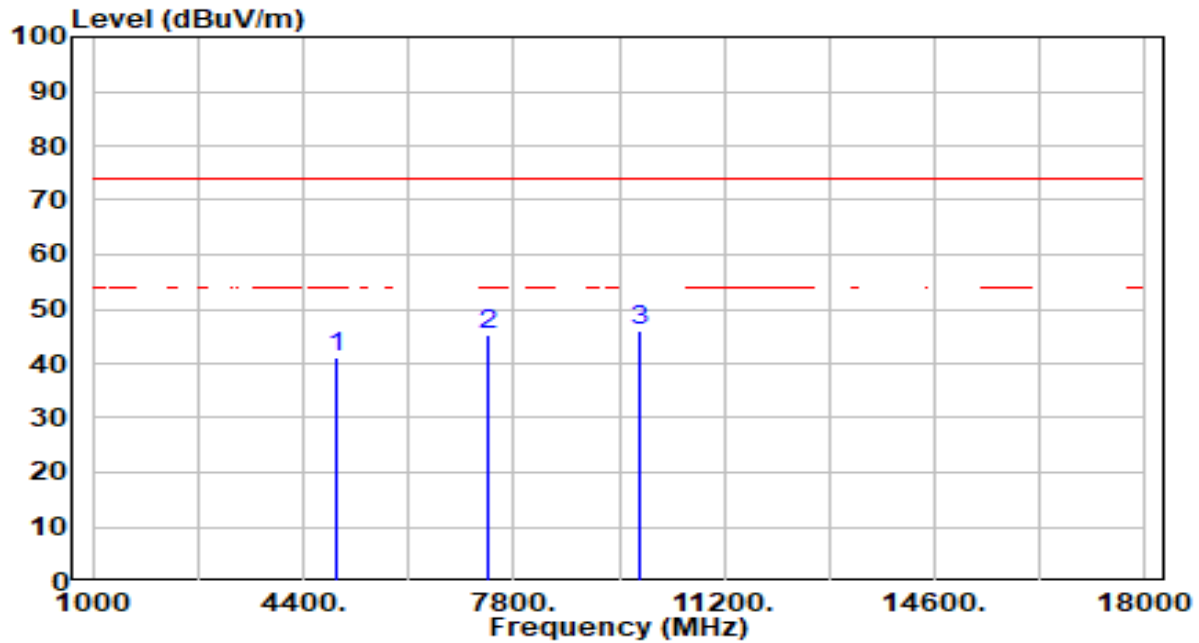


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.81	0.35	41.16	-32.84	74.00	100	286	Peak
2	7386.000	39.27	5.82	45.10	-28.90	74.00	100	289	Peak
3	* 9848.000	40.97	5.22	46.19	-27.81	74.00	100	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

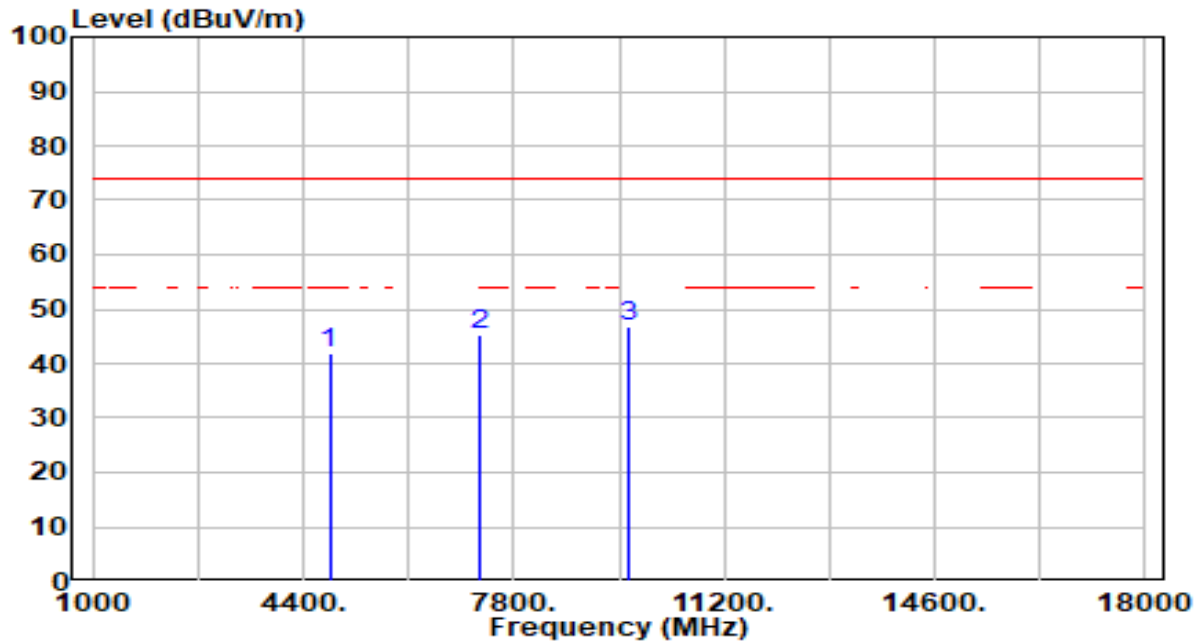


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.87	0.15	42.02	-31.98	74.00	100	74	Peak
2	7236.000	39.54	5.81	45.36	-28.64	74.00	100	176	Peak
3	* 9648.000	41.78	5.16	46.94	-27.06	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

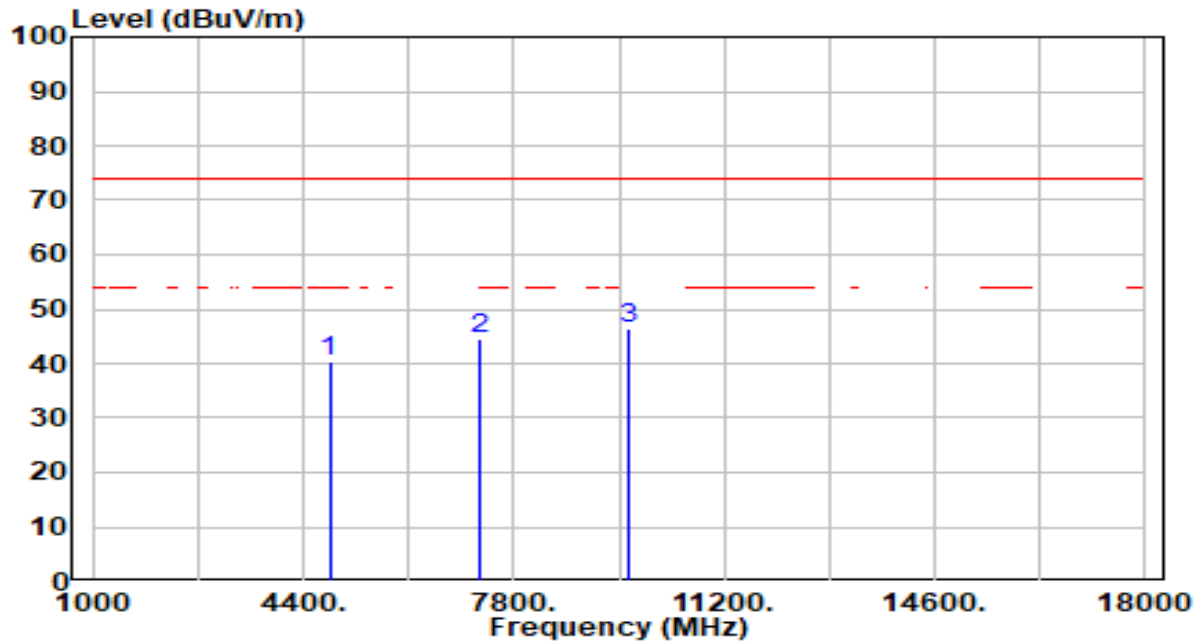


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.13	0.15	40.28	-33.72	74.00	100	360	Peak
2	7236.000	38.70	5.81	44.51	-29.49	74.00	100	24	Peak
3	* 9648.000	41.26	5.16	46.42	-27.58	74.00	100	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

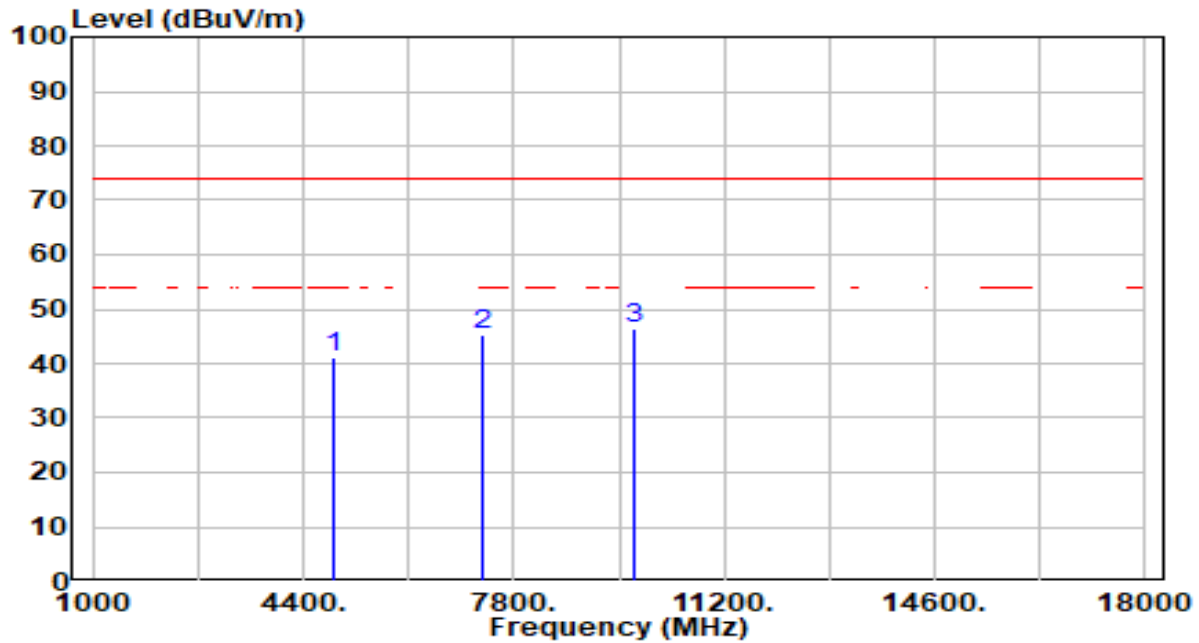


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.79	0.25	41.05	-32.95	74.00	100	270	Peak
2	7311.000	39.30	5.82	45.12	-28.88	74.00	100	0	Peak
3	* 9748.000	41.31	5.19	46.50	-27.50	74.00	100	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

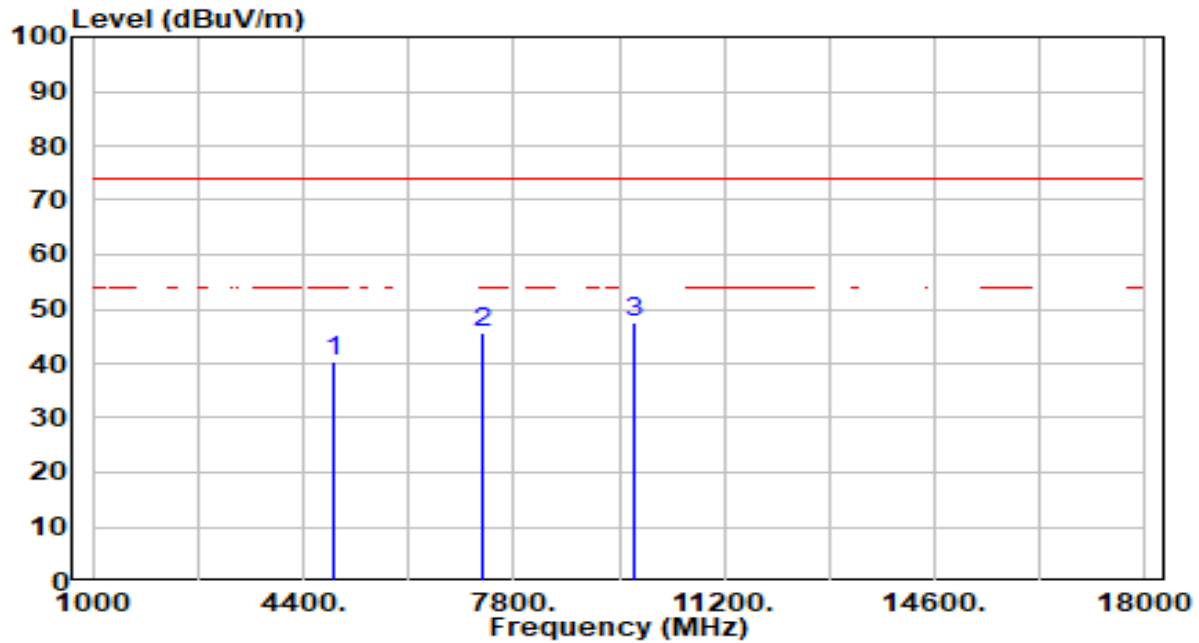


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.06	0.25	40.31	-33.69	74.00	100	260	Peak
2	7311.000	39.98	5.82	45.79	-28.21	74.00	100	37	Peak
3	* 9748.000	42.30	5.19	47.50	-26.50	74.00	100	71	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

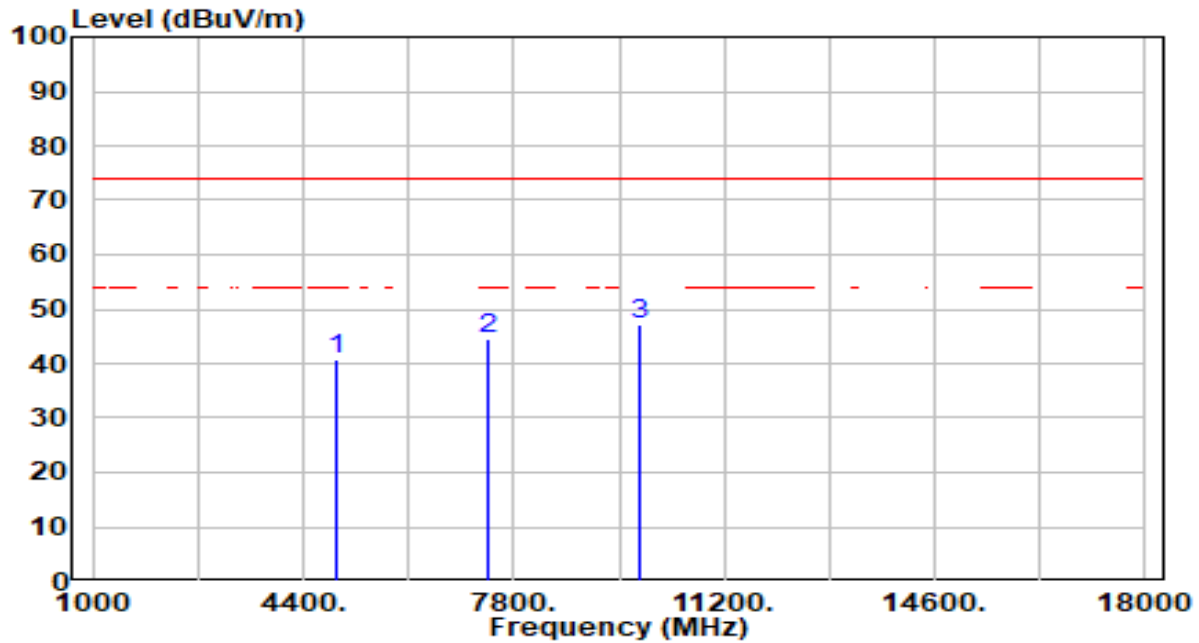


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.28	0.35	40.63	-33.37	74.00	100	315	Peak
2	7386.000	38.72	5.82	44.55	-29.45	74.00	100	332	Peak
3	* 9848.000	41.88	5.22	47.11	-26.89	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

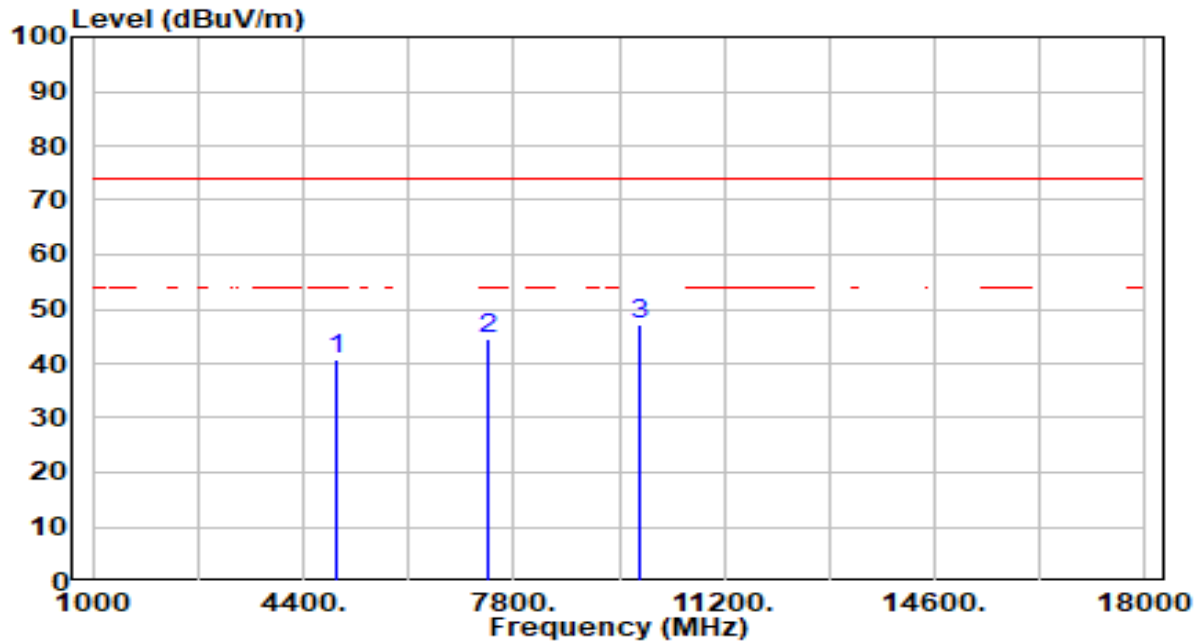


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.39	0.35	40.75	-33.25	74.00	100	264	Peak
2	7386.000	38.84	5.82	44.66	-29.34	74.00	100	31	Peak
3	* 9848.000	41.89	5.22	47.11	-26.89	74.00	100	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

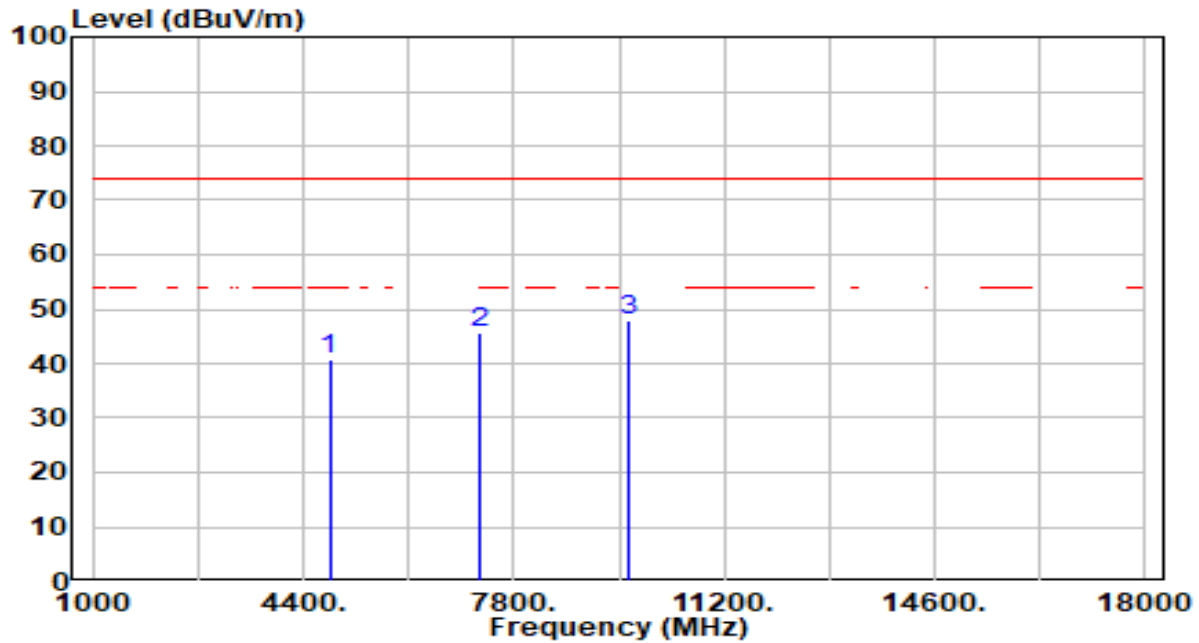


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.71	0.15	40.86	-33.14	74.00	100	159	Peak
2	7236.000	39.77	5.81	45.58	-28.42	74.00	100	28	Peak
3	* 9648.000	42.66	5.16	47.82	-26.18	74.00	100	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

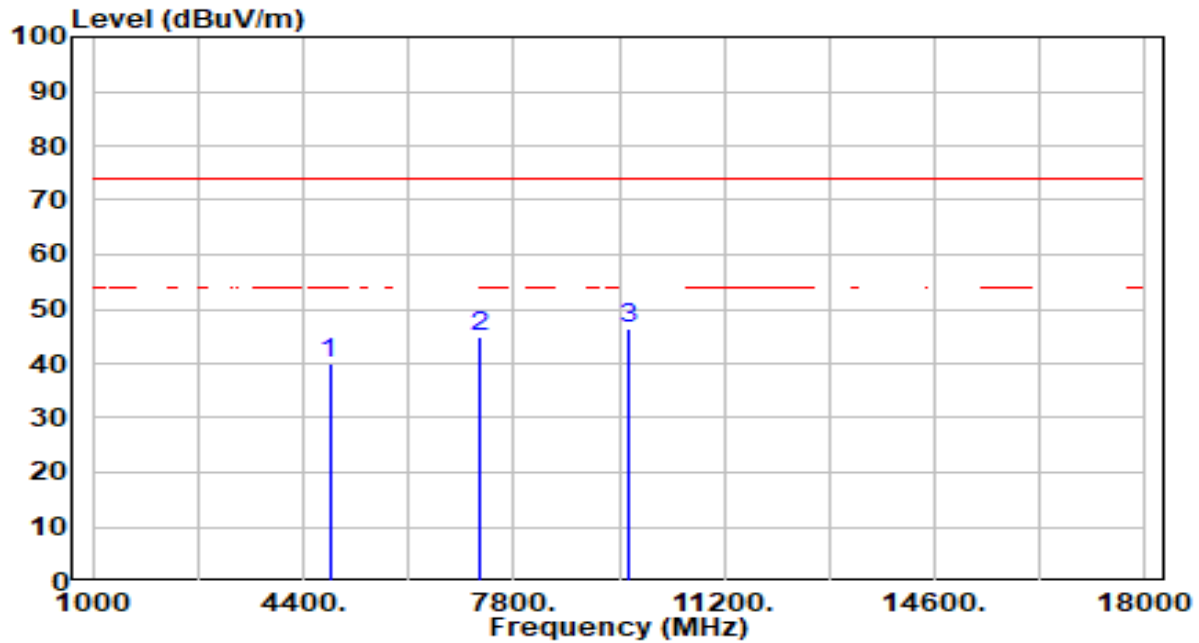


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.95	0.15	40.10	-33.90	74.00	100	360	Peak
2	7236.000	39.21	5.81	45.03	-28.97	74.00	100	247	Peak
3	* 9648.000	41.20	5.16	46.36	-27.64	74.00	100	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

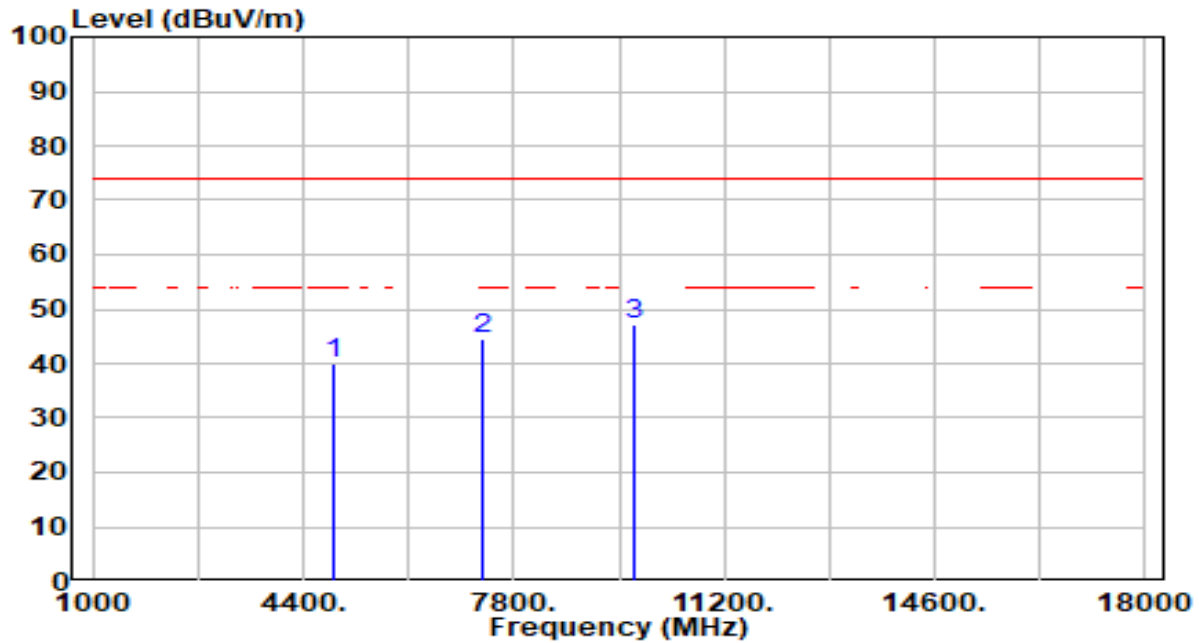


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.71	0.25	39.96	-34.04	74.00	100	120	Peak
2	7311.000	38.86	5.82	44.68	-29.32	74.00	100	284	Peak
3	* 9748.000	41.91	5.19	47.10	-26.90	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

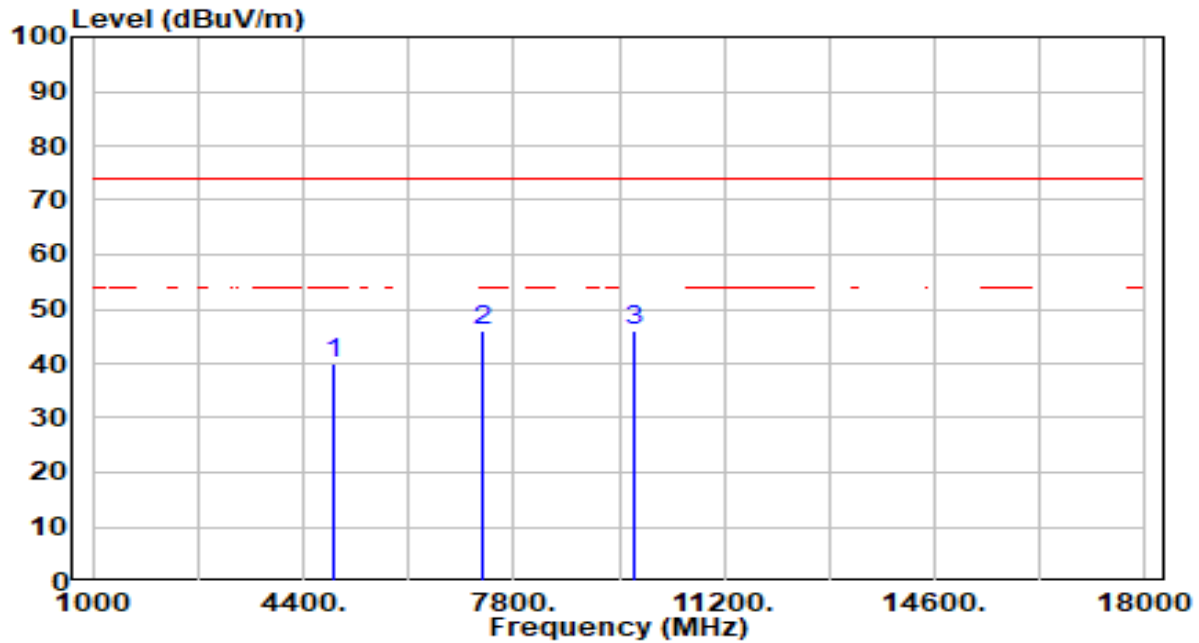


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.90	0.25	40.16	-33.84	74.00	100	210	Peak
2	7311.000	40.17	5.82	45.98	-28.02	74.00	100	360	Peak
3	* 9748.000	40.79	5.19	45.99	-28.01	74.00	100	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

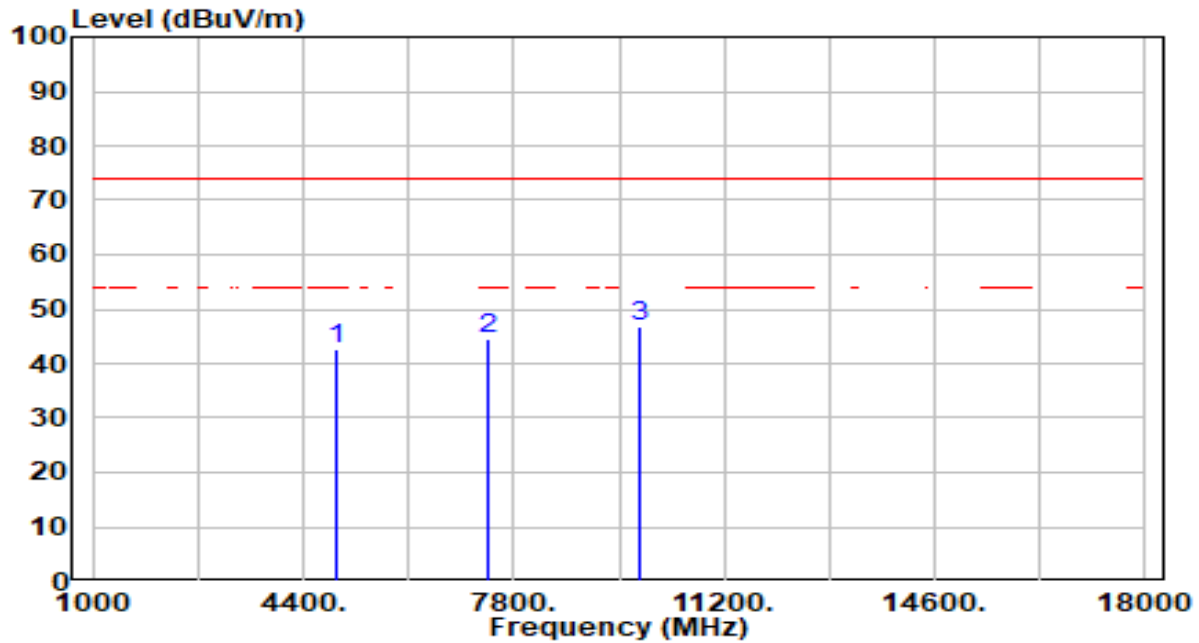


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	42.11	0.35	42.47	-31.53	74.00	100	167	Peak
2	7386.000	38.87	5.82	44.69	-29.31	74.00	100	308	Peak
3	* 9848.000	41.54	5.22	46.76	-27.24	74.00	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

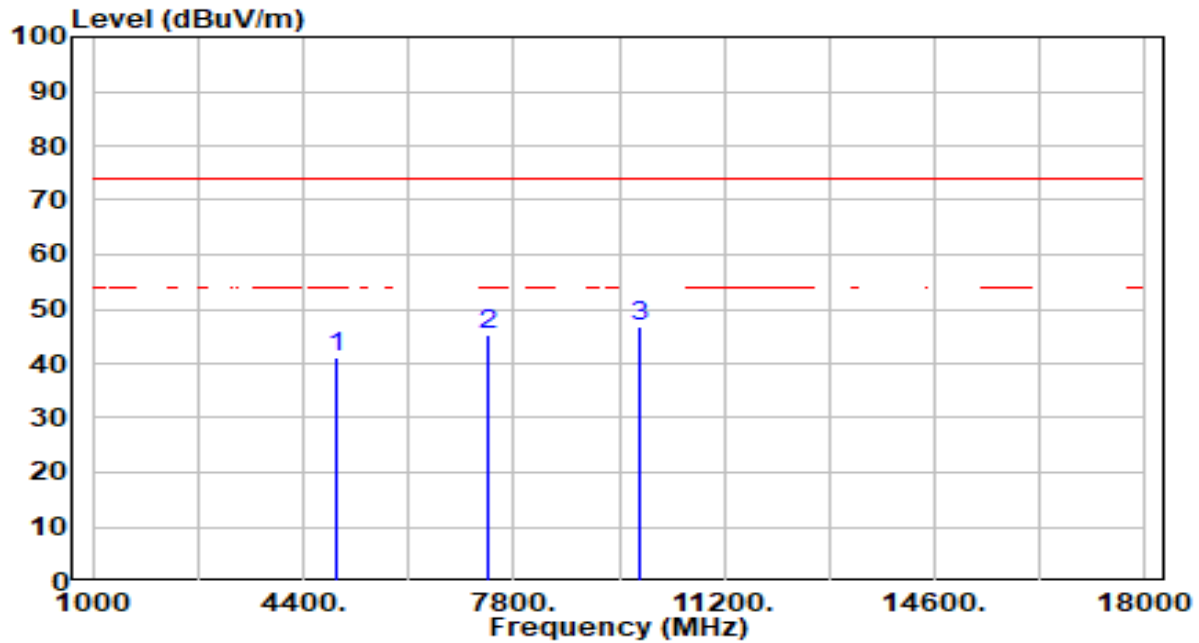


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.87	0.35	41.23	-32.77	74.00	100	165	Peak
2	7386.000	39.58	5.82	45.40	-28.60	74.00	100	139	Peak
3	* 9848.000	41.69	5.22	46.91	-27.09	74.00	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

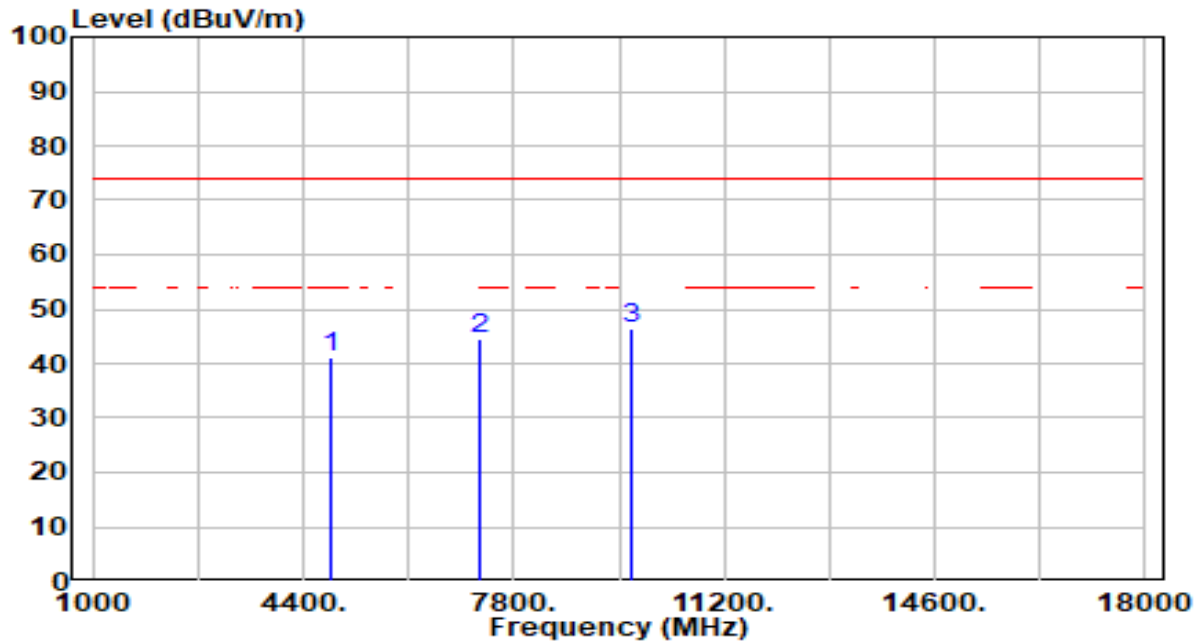


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.81	0.19	41.00	-33.00	74.00	100	306	Peak
2	7266.000	38.72	5.81	44.54	-29.46	74.00	100	0	Peak
3	* 9688.000	41.07	5.18	46.25	-27.75	74.00	100	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

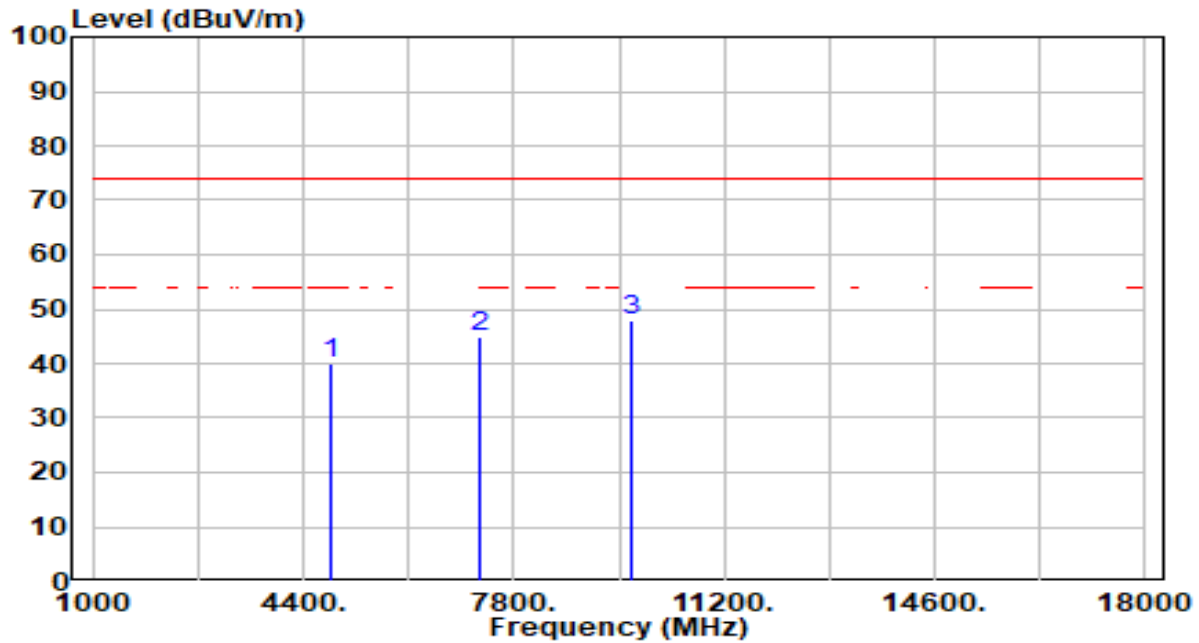


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.74	0.19	39.93	-34.07	74.00	100	312	Peak
2	7266.000	39.00	5.81	44.81	-29.19	74.00	100	17	Peak
3	* 9688.000	42.90	5.18	48.08	-25.92	74.00	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

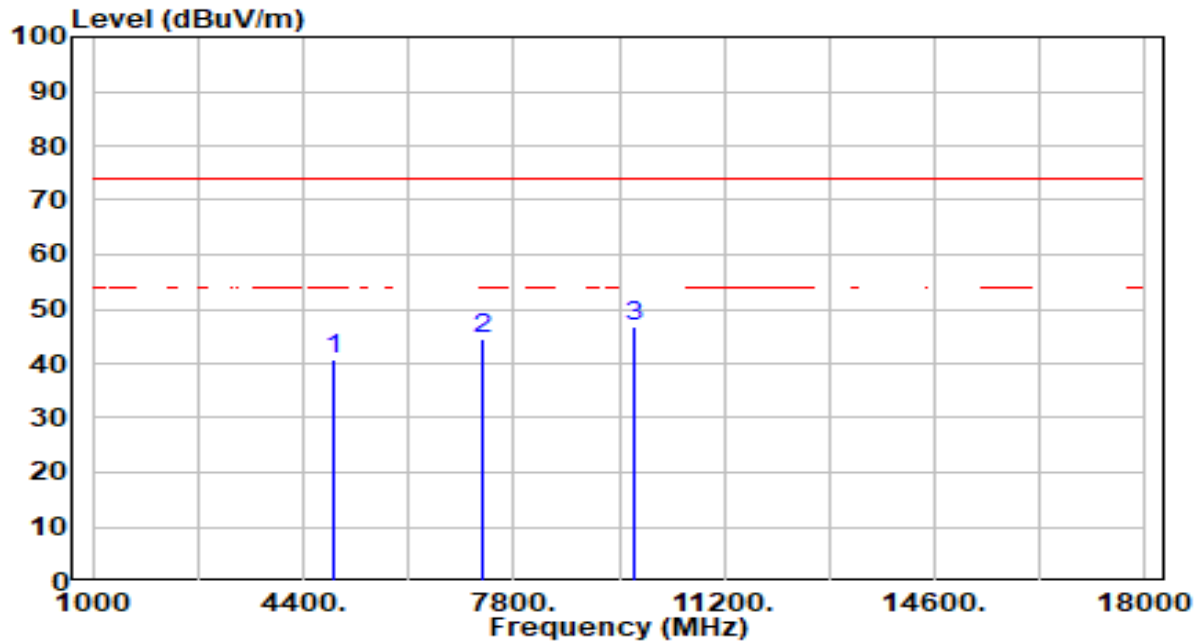


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.34	0.25	40.59	-33.41	74.00	100	249	Peak
2	7311.000	38.65	5.82	44.47	-29.53	74.00	100	0	Peak
3	* 9748.000	41.60	5.19	46.79	-27.21	74.00	100	-1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

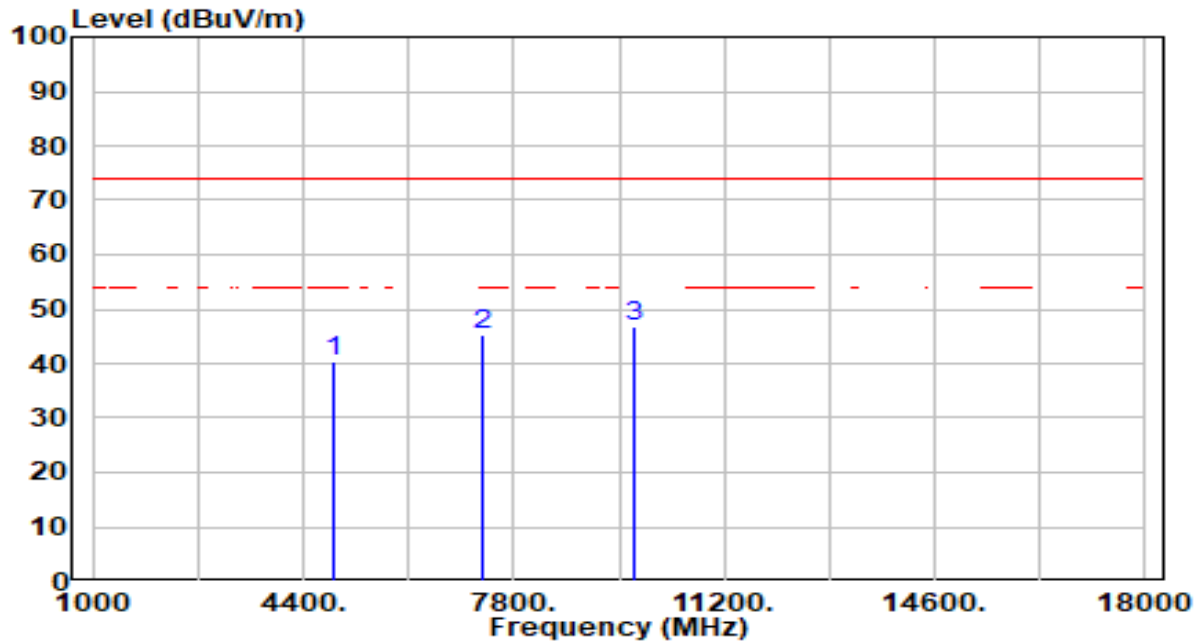


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.29	0.25	40.54	-33.46	74.00	100	144	Peak
2	7311.000	39.32	5.82	45.14	-28.86	74.00	100	0	Peak
3	* 9748.000	41.65	5.19	46.84	-27.16	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

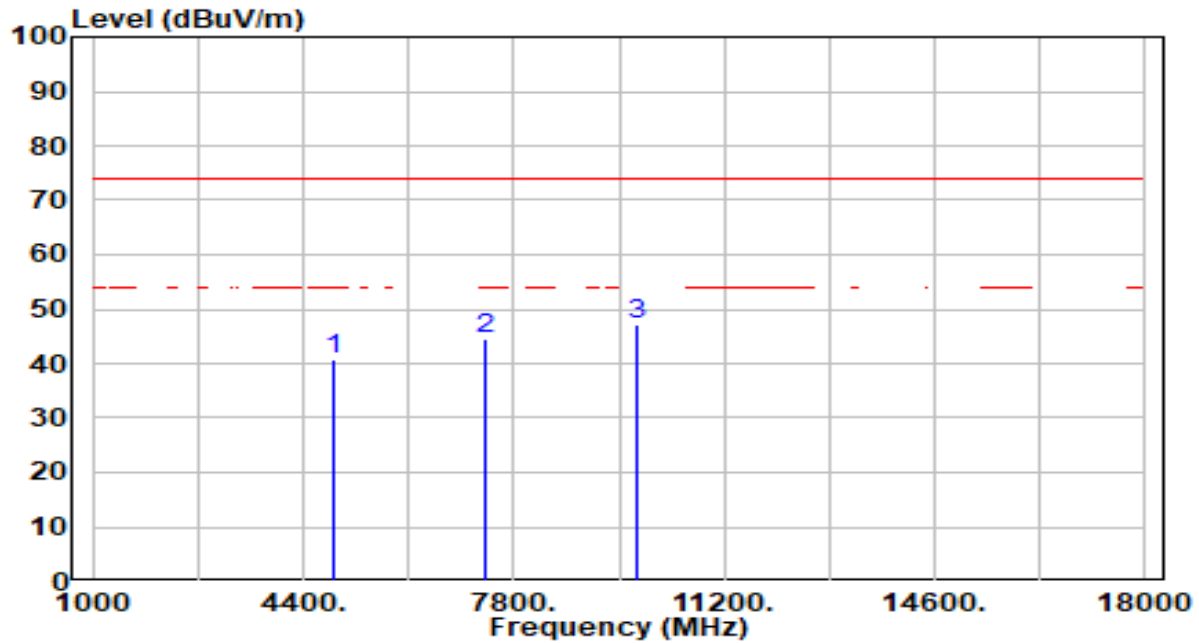


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.49	0.31	40.80	-33.20	74.00	100	222	Peak
2	7356.000	38.56	5.82	44.38	-29.62	74.00	100	105	Peak
3	* 9808.000	41.83	5.21	47.04	-26.96	74.00	100	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

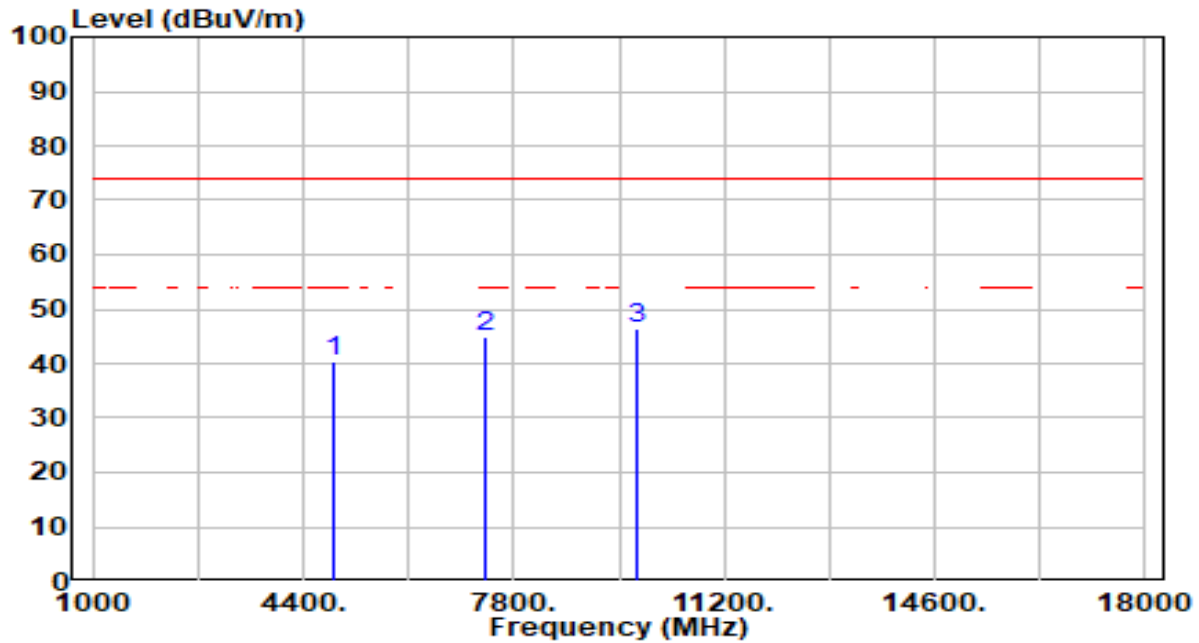


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.94	0.31	40.25	-33.75	74.00	100	136	Peak
2	7356.000	38.91	5.82	44.73	-29.27	74.00	100	201	Peak
3	* 9808.000	41.12	5.21	46.33	-27.67	74.00	100	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

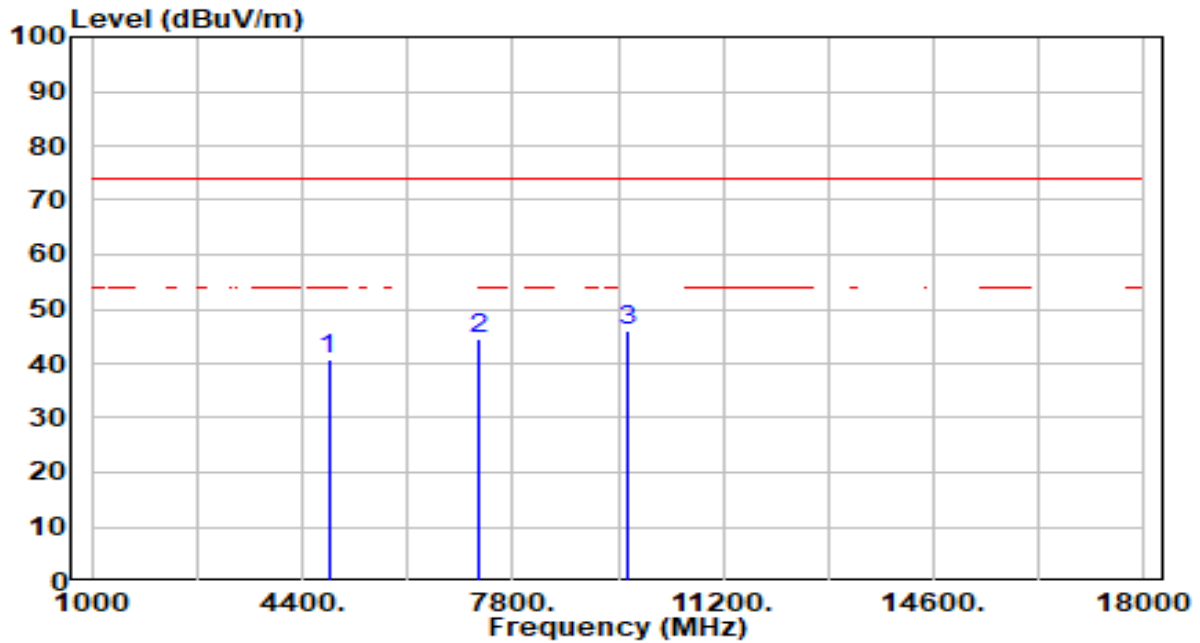


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.71	0.15	40.86	-33.14	74.00	100	90	Peak
2	7236.000	38.75	5.81	44.56	-29.44	74.00	100	203	Peak
3	* 9648.000	40.84	5.16	46.00	-28.00	74.00	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

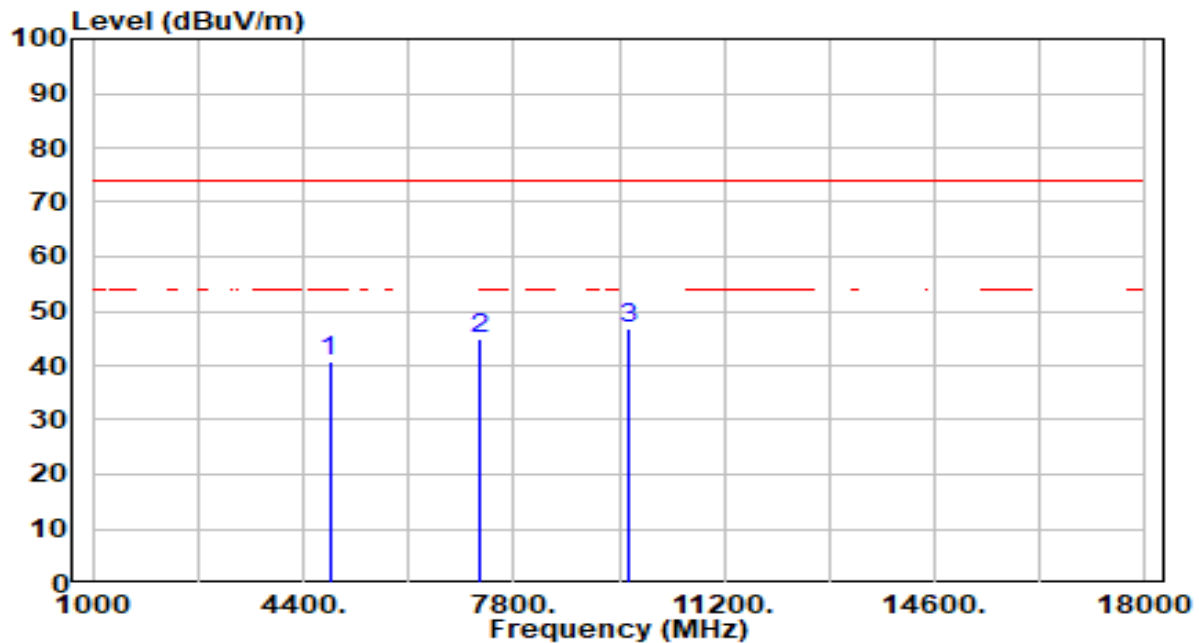


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.72	0.15	40.87	-33.13	74.00	100	173	Peak
2	7236.000	39.10	5.81	44.91	-29.09	74.00	100	0	Peak
3	* 9648.000	41.69	5.16	46.85	-27.15	74.00	100	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

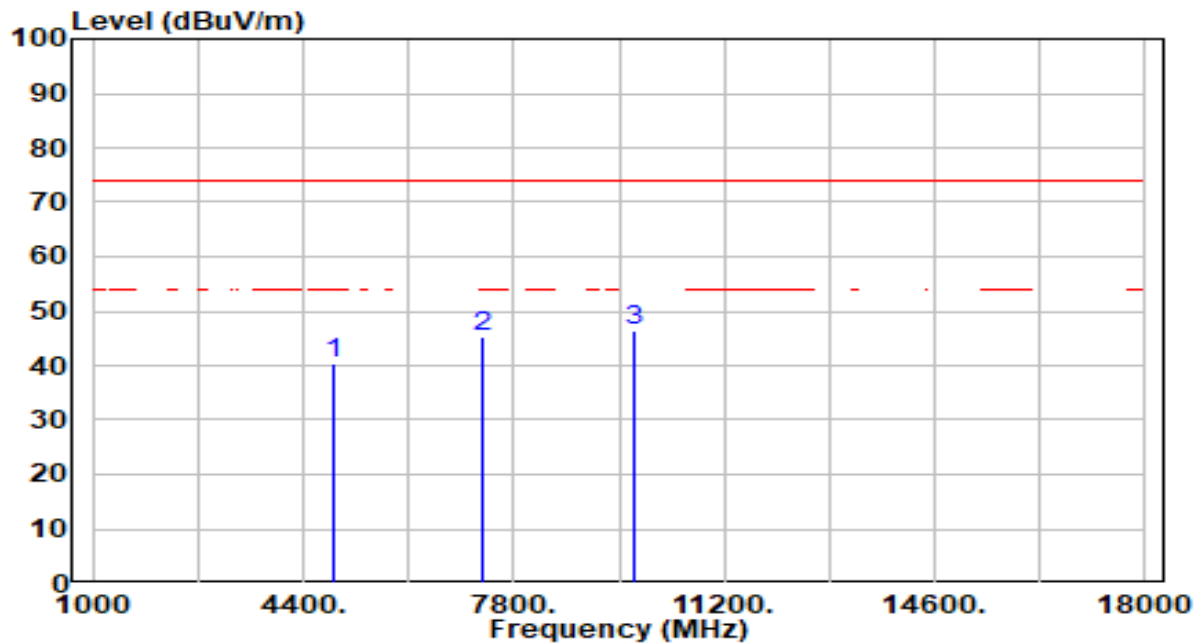


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.21	0.25	40.46	-33.54	74.00	100	203	Peak
2	7311.000	39.32	5.82	45.14	-28.86	74.00	100	71	Peak
3	* 9748.000	41.29	5.19	46.48	-27.52	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

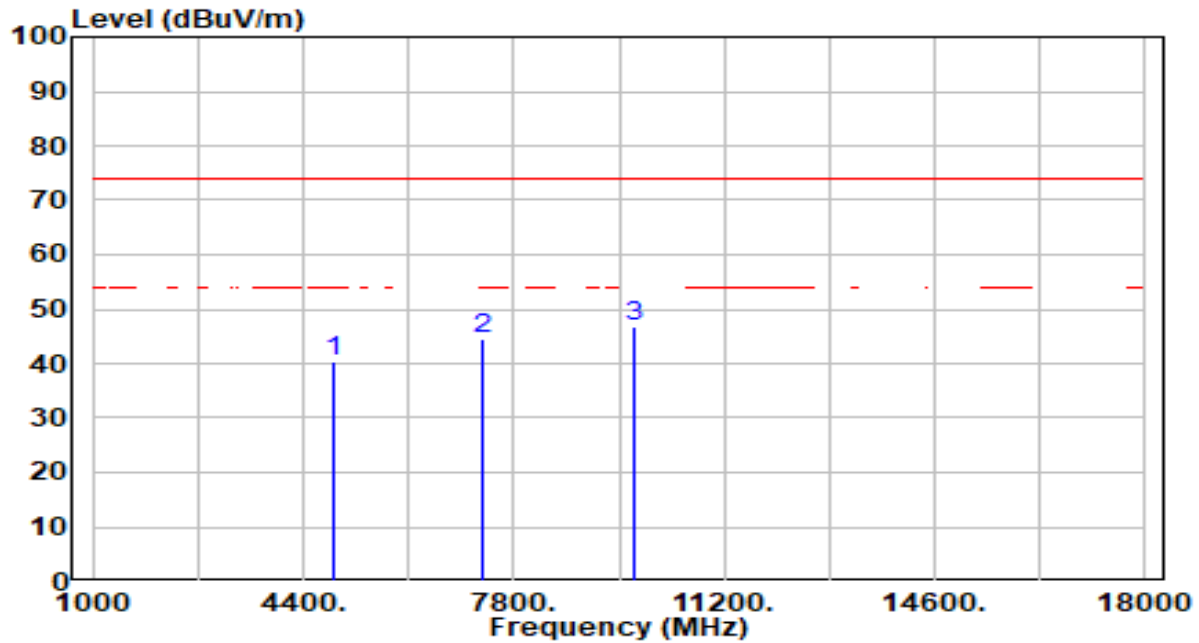


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.08	0.25	40.33	-33.67	74.00	100	34	Peak
2	7311.000	38.59	5.82	44.41	-29.59	74.00	100	272	Peak
3	* 9748.000	41.55	5.19	46.74	-27.26	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

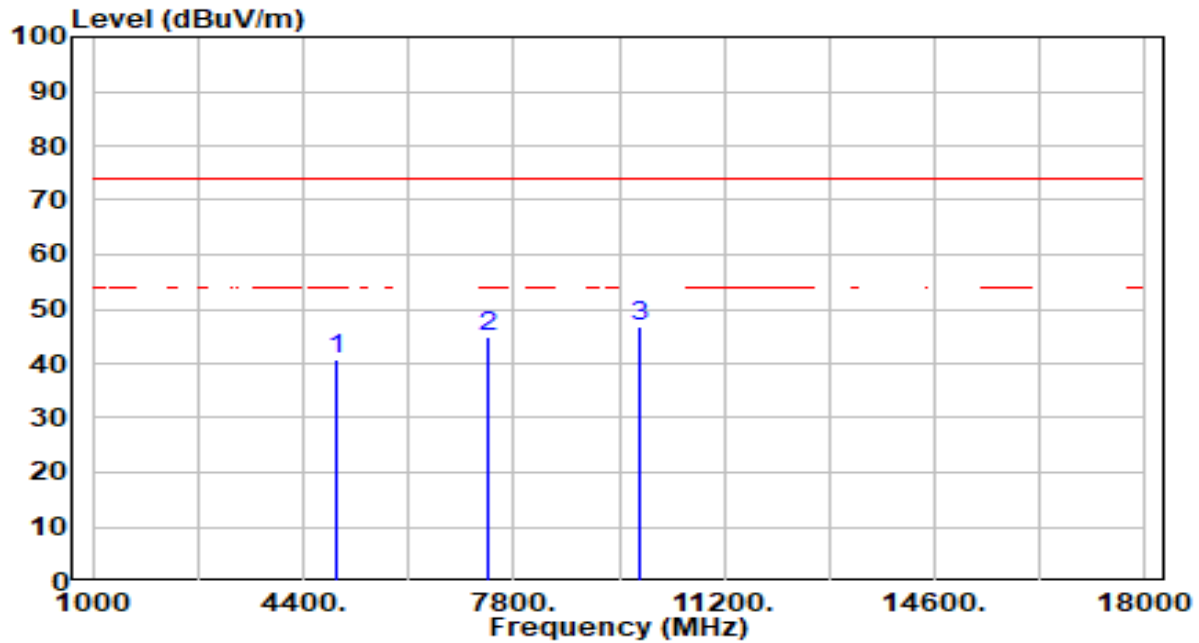


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.36	0.35	40.71	-33.29	74.00	100	251	Peak
2	7386.000	39.19	5.82	45.02	-28.98	74.00	100	24	Peak
3	* 9848.000	41.73	5.22	46.95	-27.05	74.00	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

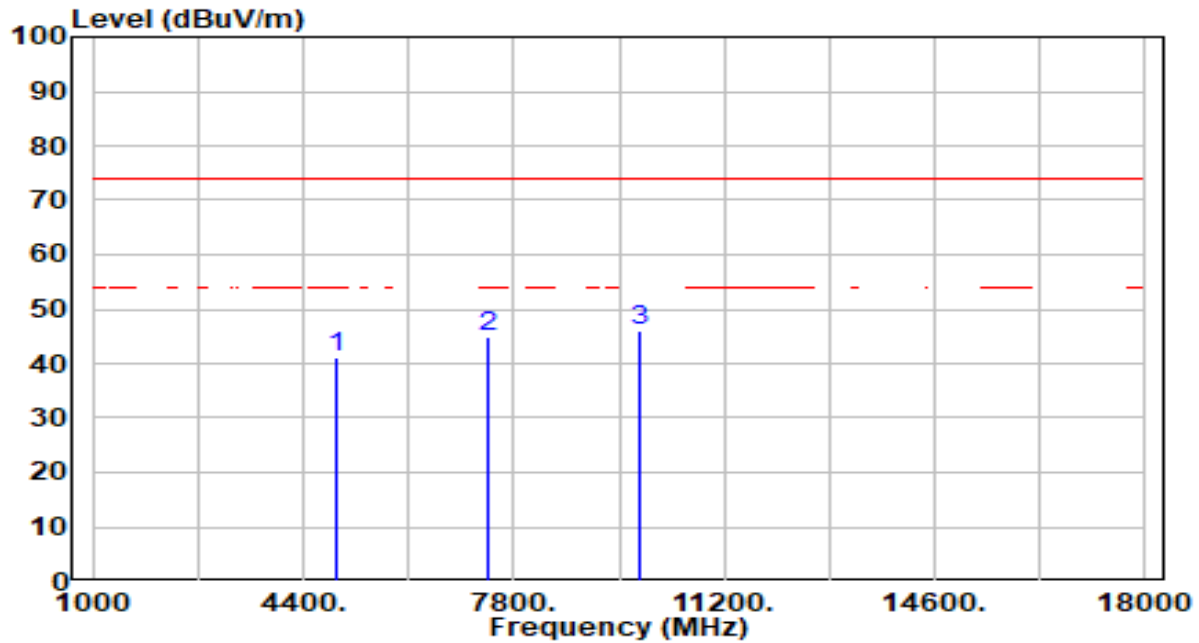


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.72	0.35	41.08	-32.92	74.00	100	352	Peak
2	7386.000	38.92	5.82	44.75	-29.25	74.00	100	76	Peak
3	* 9848.000	40.83	5.22	46.06	-27.94	74.00	100	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

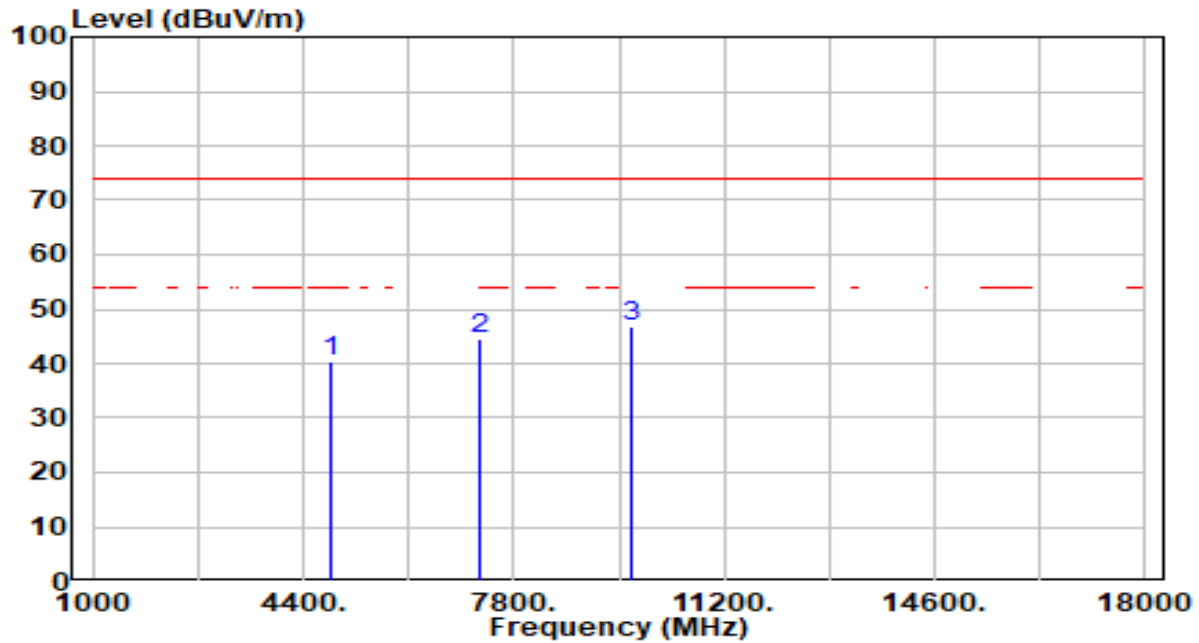


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.16	0.19	40.36	-33.64	74.00	100	314	Peak
2	7266.000	38.53	5.81	44.35	-29.65	74.00	100	322	Peak
3	* 9688.000	41.59	5.18	46.77	-27.23	74.00	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

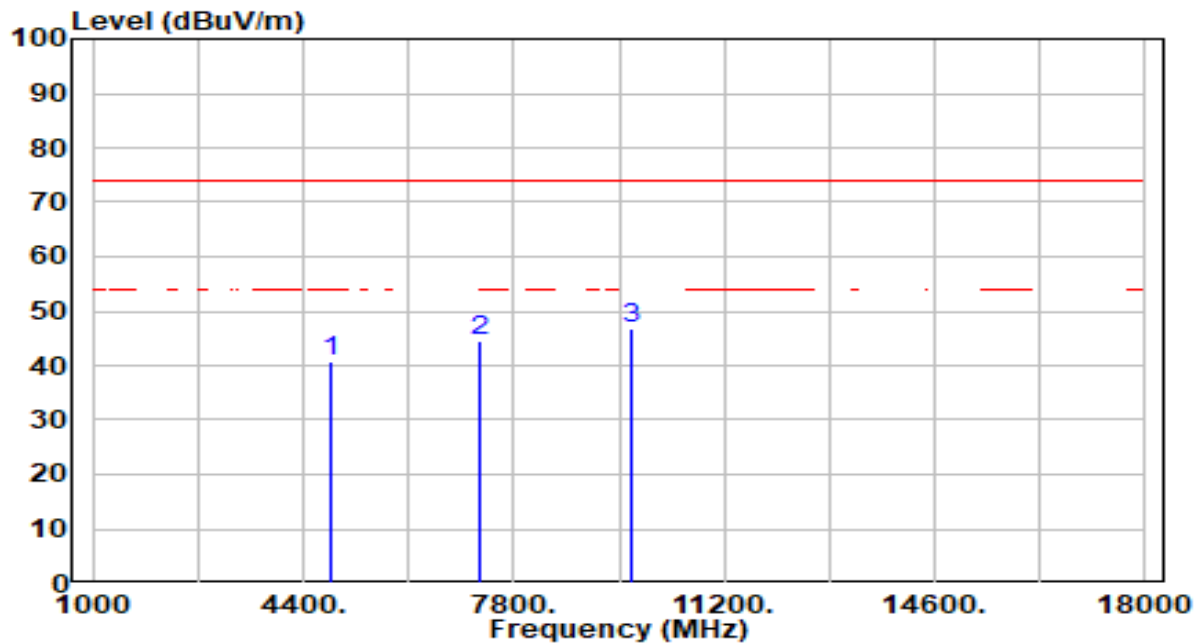


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.52	0.19	40.71	-33.29	74.00	100	78	Peak
2	7266.000	38.67	5.81	44.48	-29.52	74.00	100	282	Peak
3	* 9688.000	41.57	5.18	46.75	-27.25	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

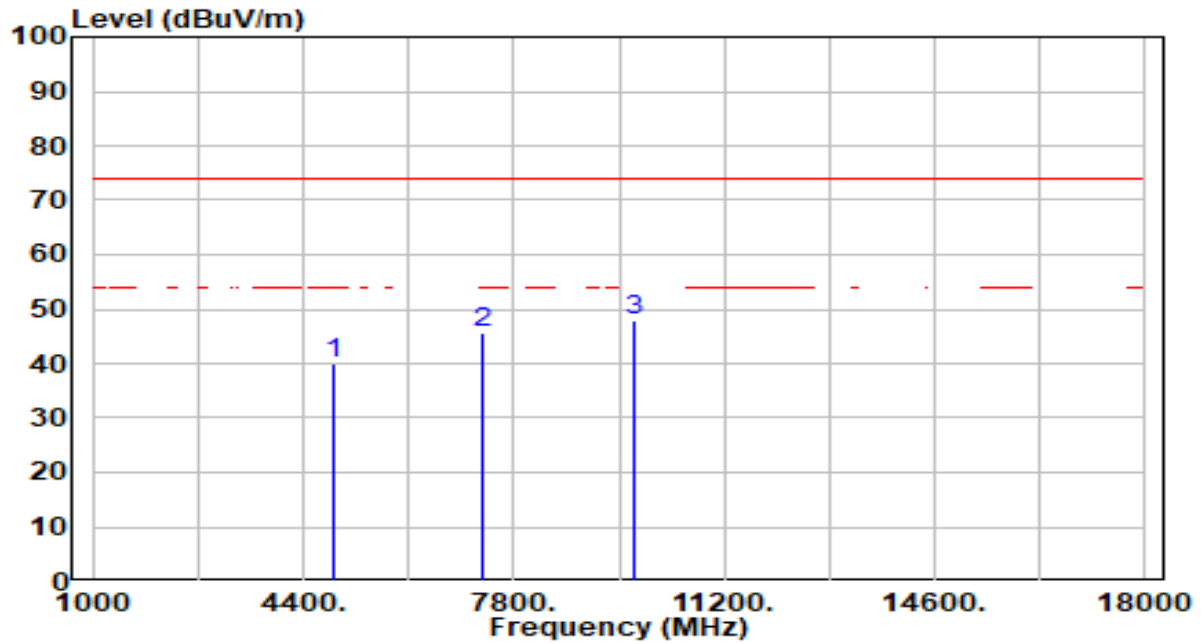


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.79	0.25	40.04	-33.96	74.00	100	286	Peak
2	7311.000	39.70	5.82	45.52	-28.48	74.00	100	223	Peak
3	* 9748.000	42.69	5.19	47.88	-26.12	74.00	100	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

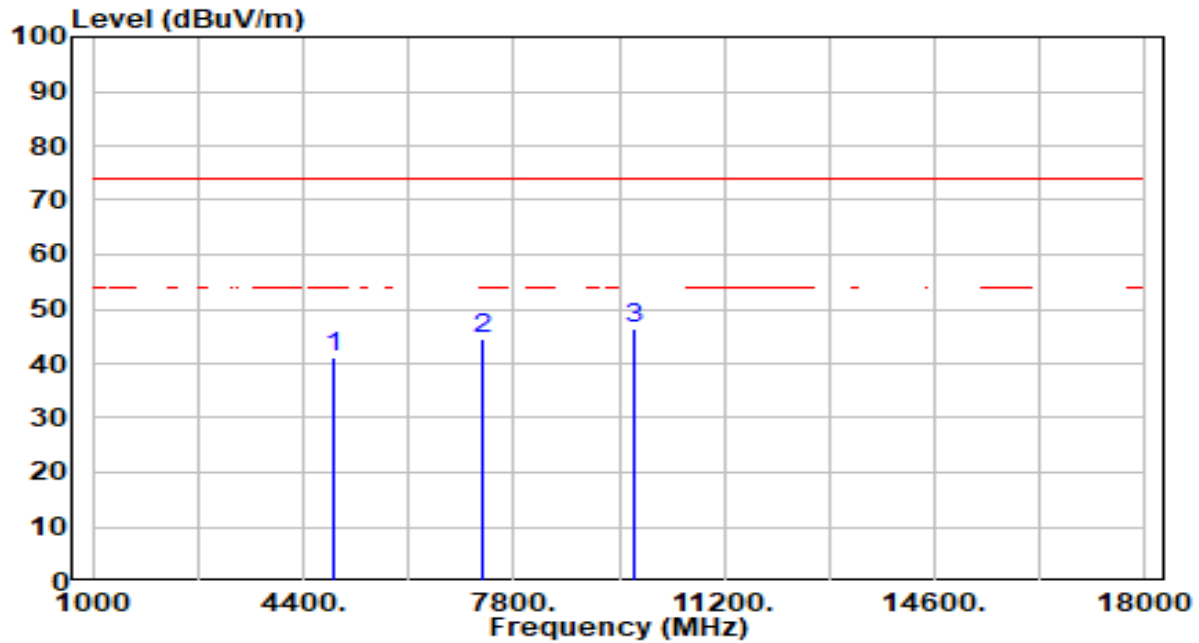


No		Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	40.81	0.25	41.06	-32.94	74.00	100	295	Peak
2		7311.000	38.84	5.82	44.66	-29.34	74.00	100	266	Peak
3	*	9748.000	41.22	5.19	46.41	-27.59	74.00	100	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

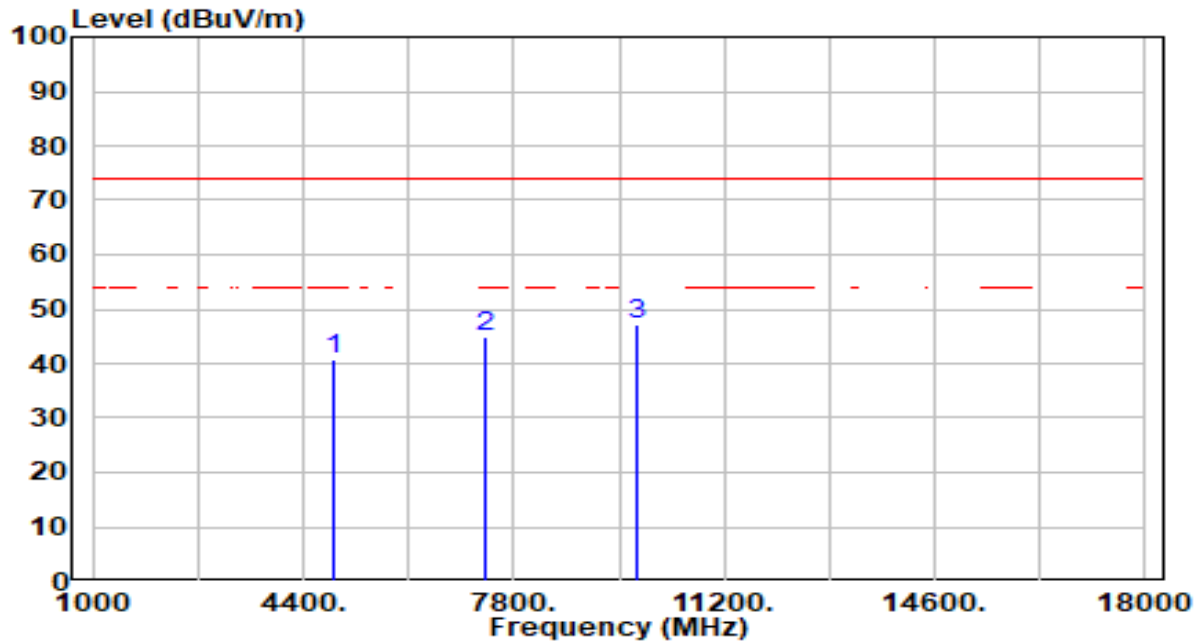


No		Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	40.39	0.31	40.70	-33.30	74.00	100	360	Peak
2		7356.000	38.98	5.82	44.81	-29.19	74.00	100	176	Peak
3	*	9808.000	41.96	5.21	47.17	-26.83	74.00	100	281	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

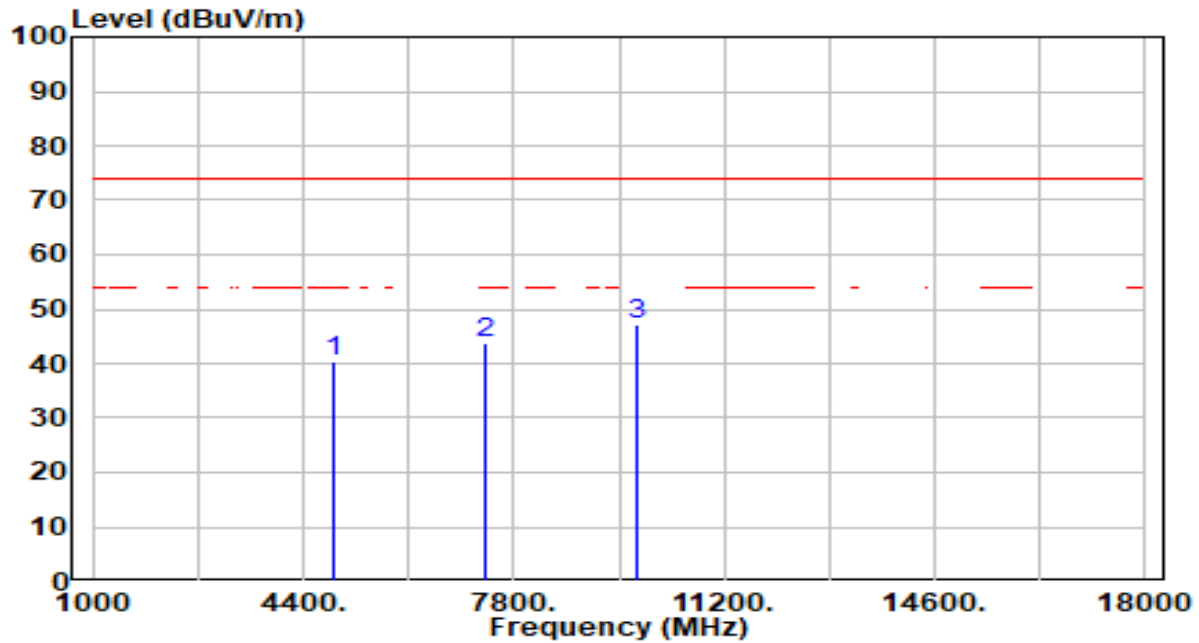


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.13	0.31	40.44	-33.56	74.00	100	346	Peak
2	7356.000	38.08	5.82	43.90	-30.10	74.00	100	206	Peak
3	* 9808.000	42.10	5.21	47.31	-26.69	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

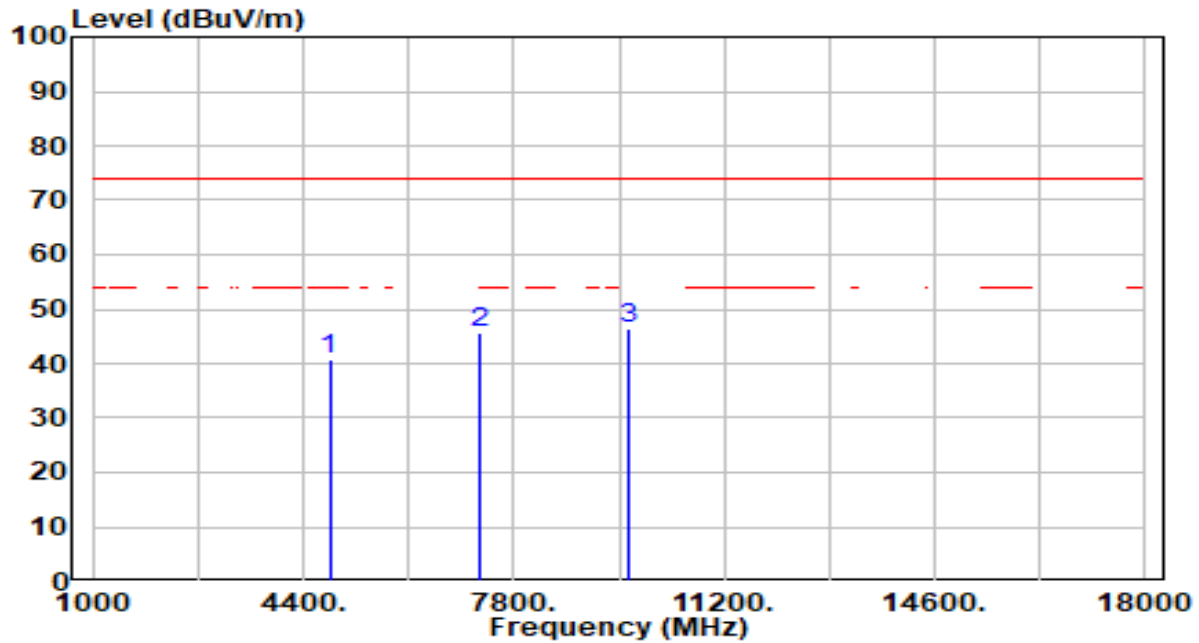


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.56	0.15	40.71	-33.29	74.00	100	232	Peak
2	7236.000	39.93	5.81	45.74	-28.26	74.00	100	354	Peak
3	* 9648.000	41.43	5.16	46.59	-27.41	74.00	100	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

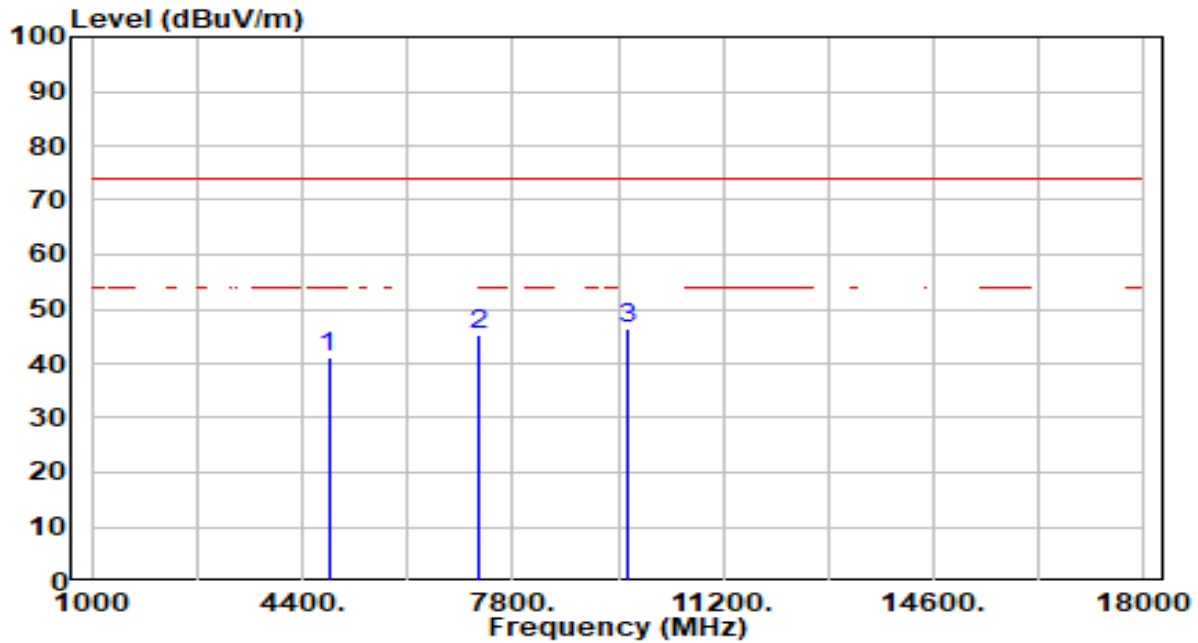


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.05	0.15	41.20	-32.80	74.00	100	102	Peak
2	7236.000	39.49	5.81	45.30	-28.70	74.00	100	51	Peak
3	* 9648.000	41.28	5.16	46.44	-27.56	74.00	100	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

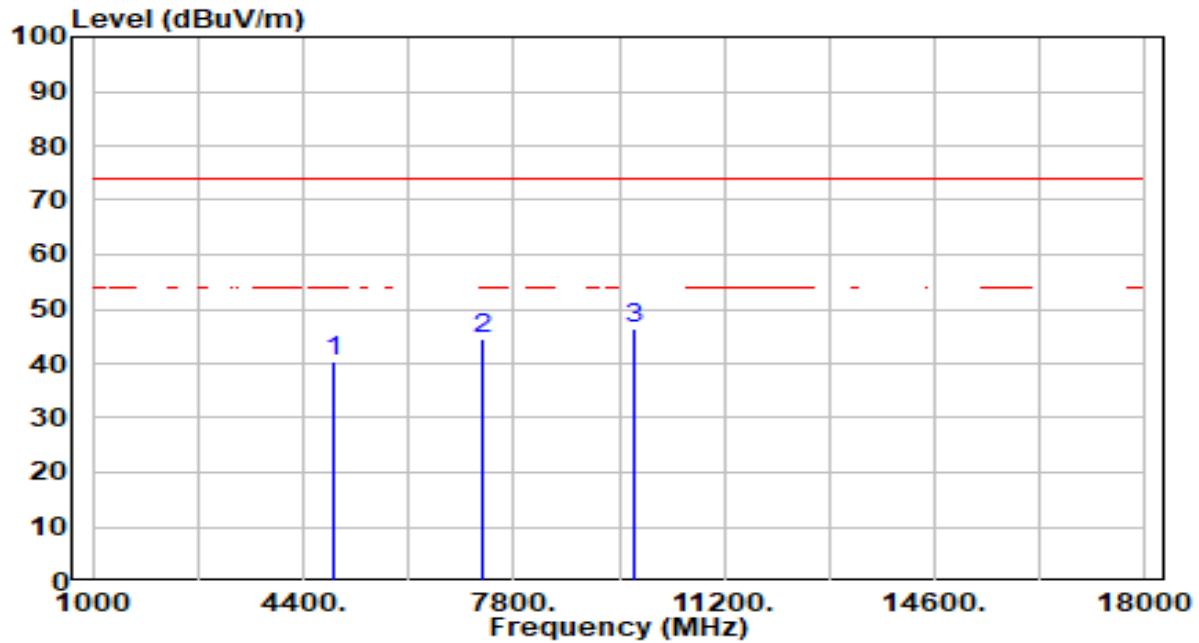


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.94	0.25	40.19	-33.81	74.00	100	314	Peak
2	7311.000	38.85	5.82	44.67	-29.33	74.00	100	331	Peak
3	* 9748.000	41.29	5.19	46.48	-27.52	74.00	100	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

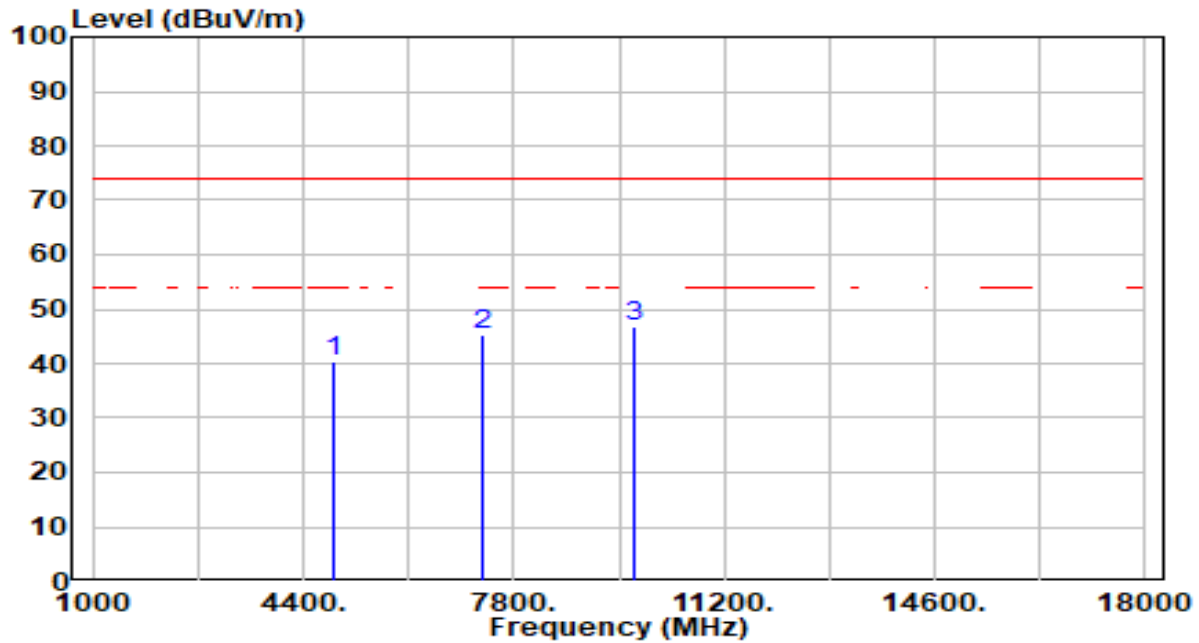


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.22	0.25	40.47	-33.53	74.00	100	285	Peak
2	7311.000	39.58	5.82	45.39	-28.61	74.00	100	293	Peak
3	* 9748.000	41.52	5.19	46.71	-27.29	74.00	100	181	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

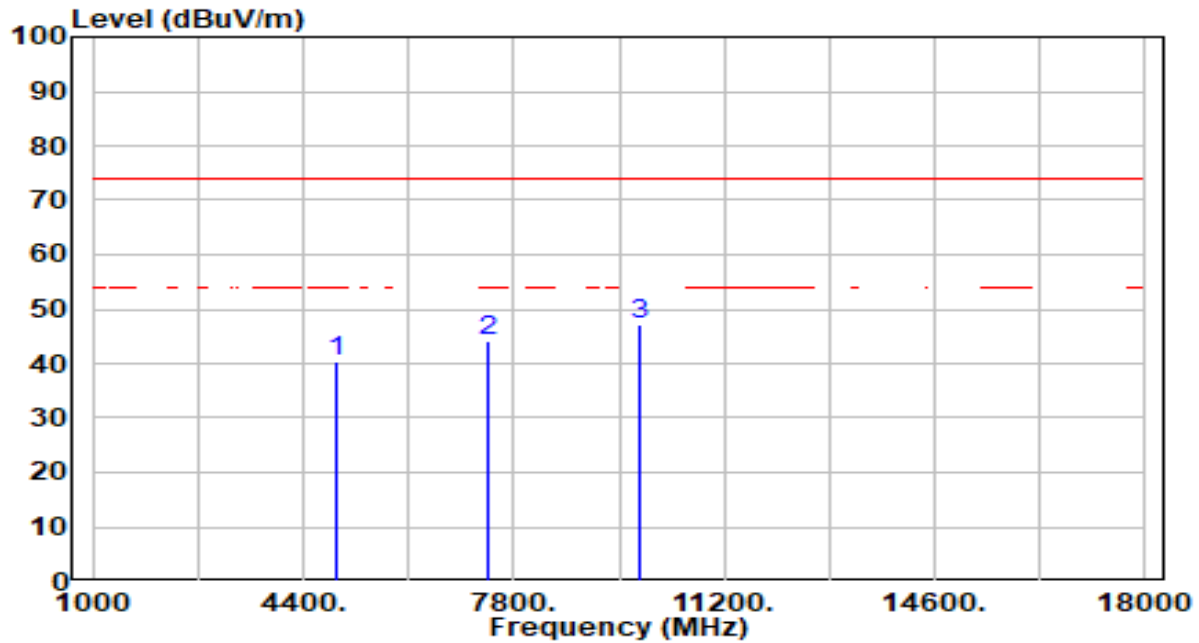


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.85	0.35	40.20	-33.80	74.00	100	115	Peak
2	7386.000	38.45	5.82	44.28	-29.72	74.00	100	80	Peak
3	* 9848.000	41.98	5.22	47.20	-26.80	74.00	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

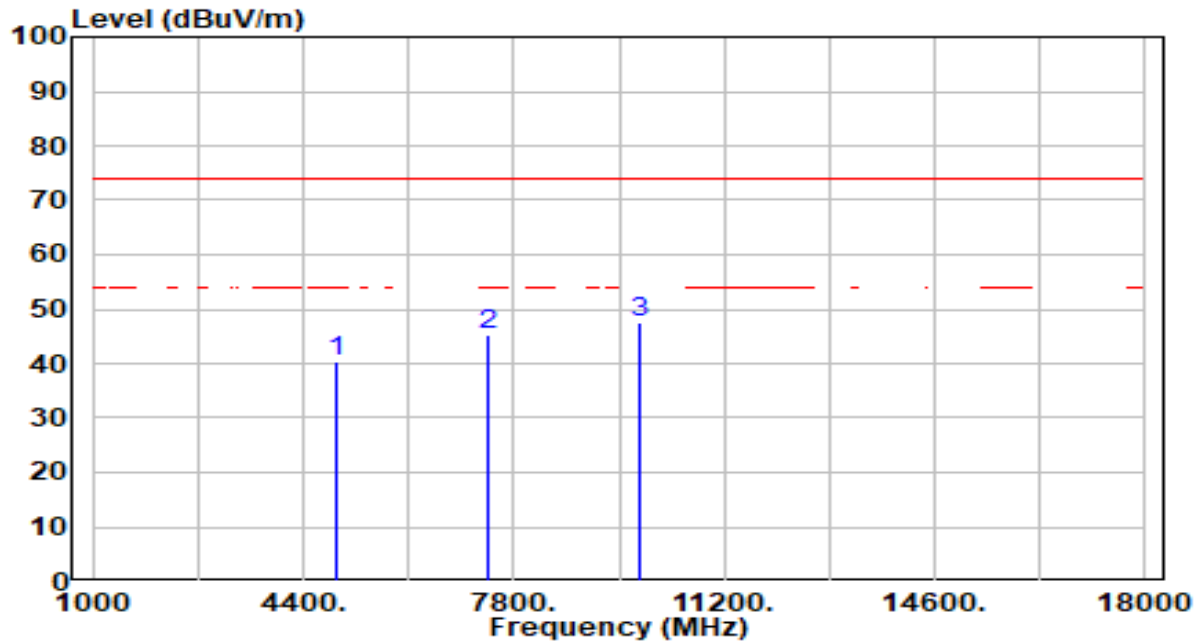


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.07	0.35	40.42	-33.58	74.00	100	314	Peak
2	7386.000	39.62	5.82	45.44	-28.56	74.00	100	346	Peak
3	* 9848.000	42.21	5.22	47.43	-26.57	74.00	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

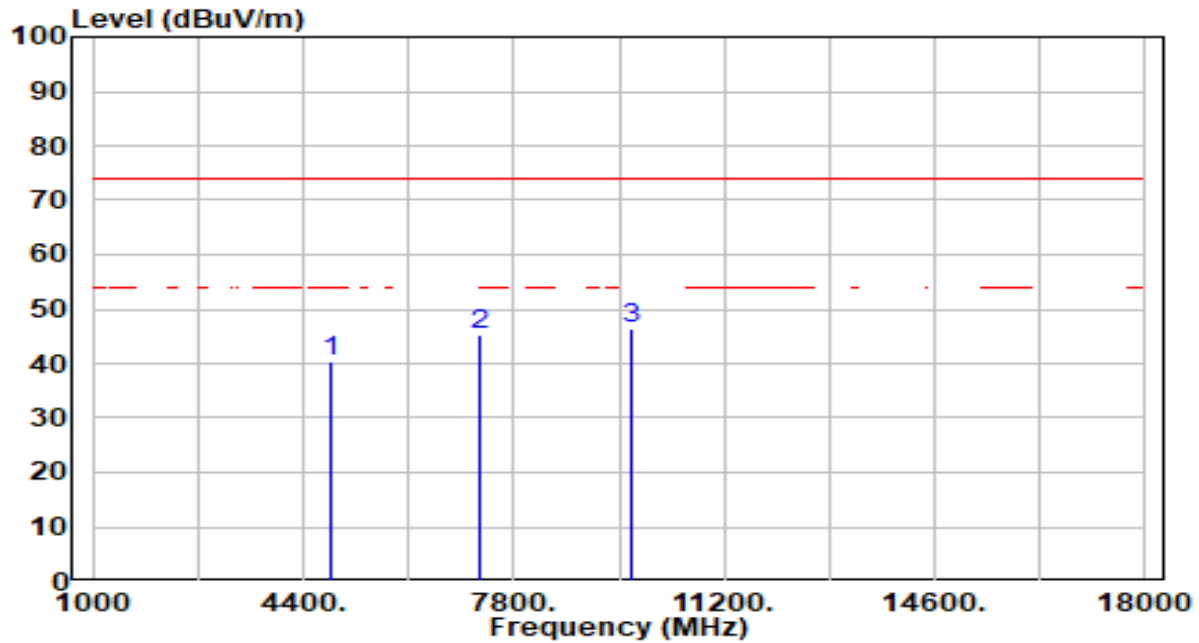


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.19	0.19	40.38	-33.62	74.00	100	158	Peak
2	7266.000	39.63	5.81	45.44	-28.56	74.00	100	331	Peak
3	* 9688.000	41.16	5.18	46.34	-27.66	74.00	100	268	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

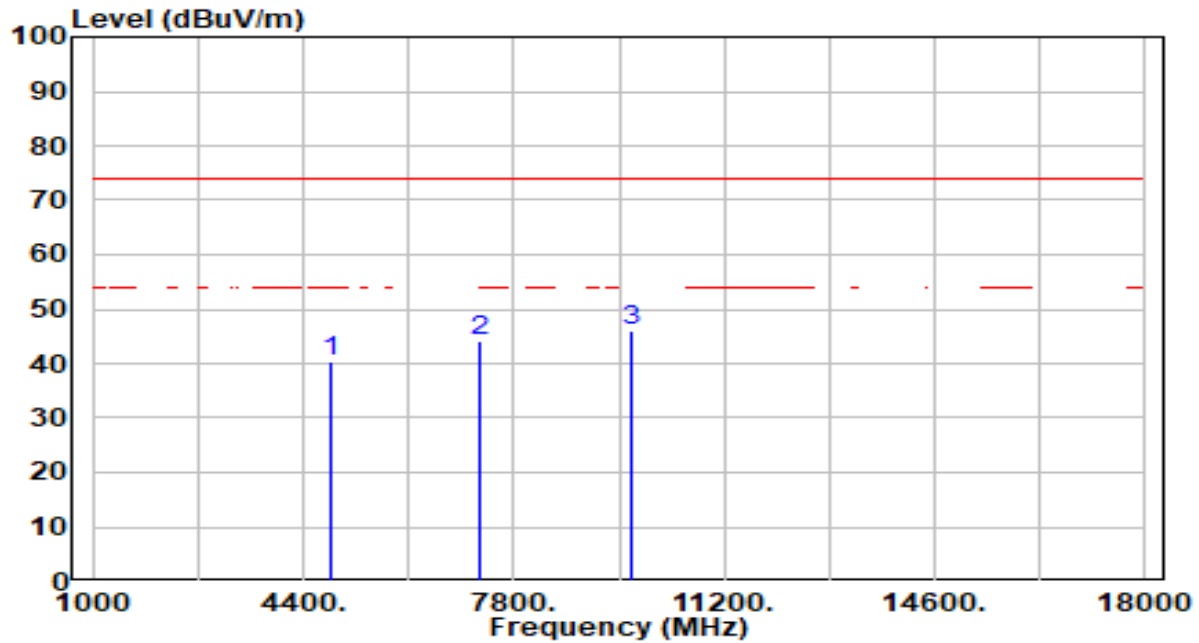


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.09	0.19	40.28	-33.72	74.00	100	149	Peak
2	7266.000	38.51	5.81	44.32	-29.68	74.00	100	146	Peak
3	* 9688.000	40.84	5.18	46.01	-27.99	74.00	100	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

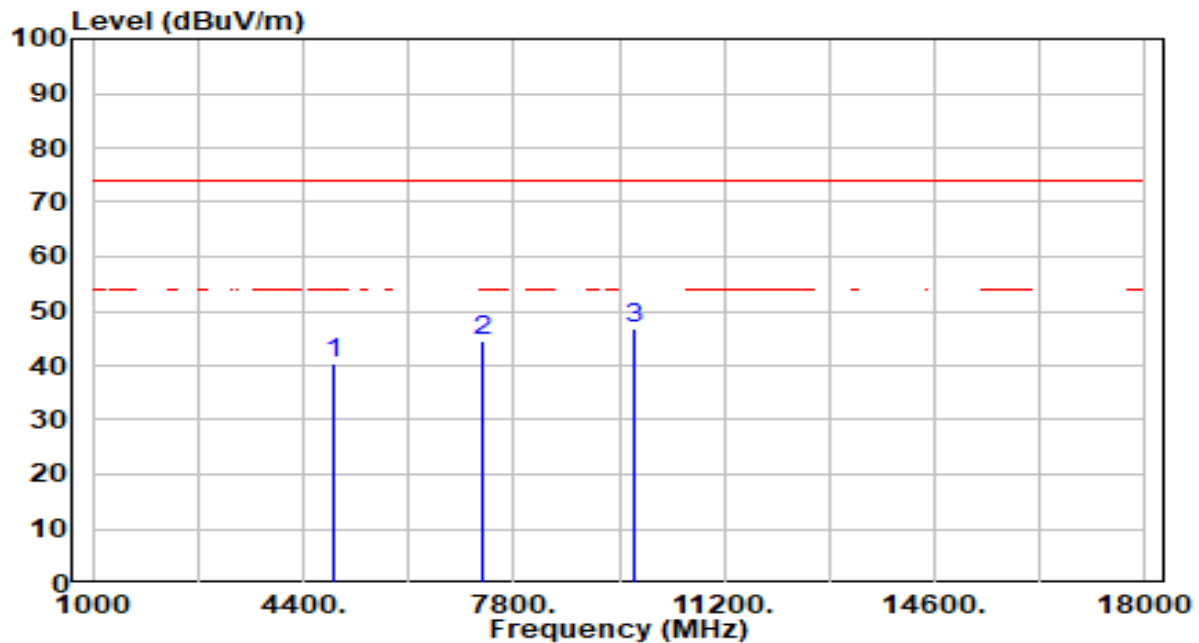


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.15	0.25	40.40	-33.60	74.00	100	180	Peak
2	7311.000	38.68	5.82	44.49	-29.51	74.00	100	113	Peak
3	* 9748.000	41.41	5.19	46.61	-27.39	74.00	100	81	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

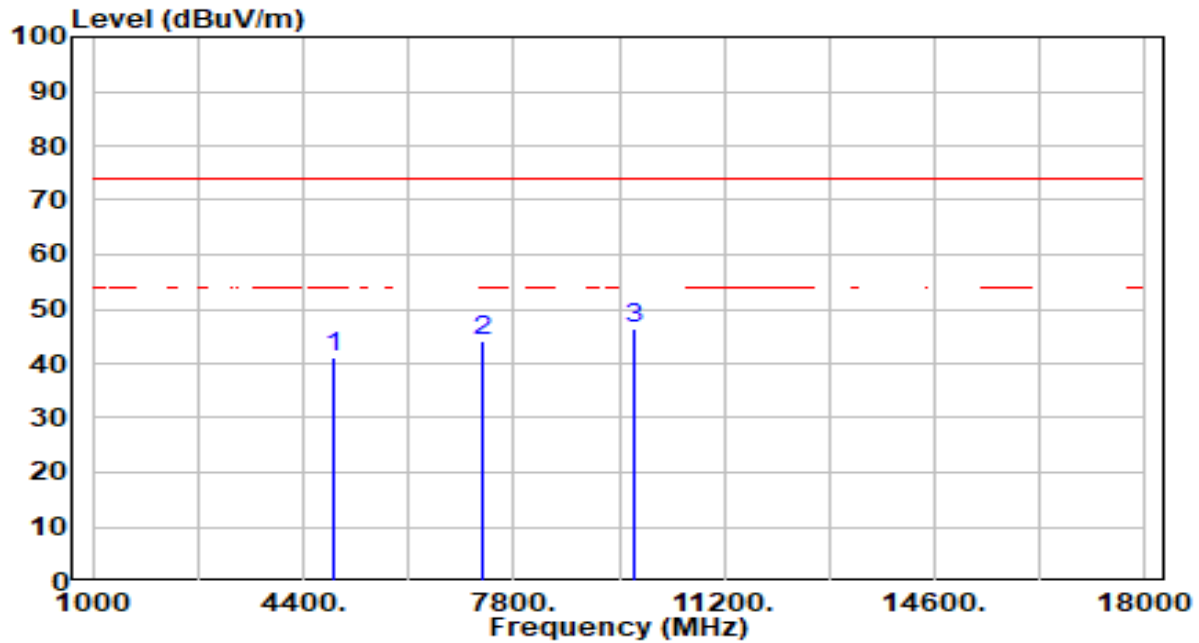


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.05	0.25	41.30	-32.70	74.00	100	98	Peak
2	7311.000	38.37	5.82	44.18	-29.82	74.00	100	360	Peak
3	* 9748.000	41.06	5.19	46.25	-27.75	74.00	100	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

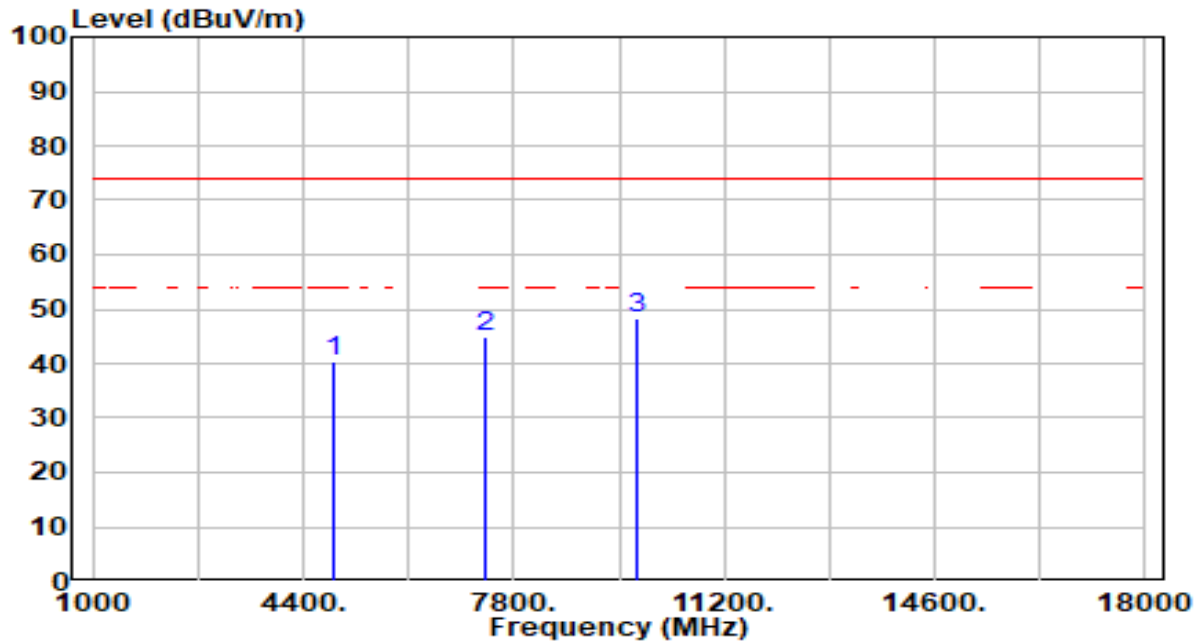


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.24	0.31	40.56	-33.44	74.00	100	49	Peak
2	7356.000	38.94	5.82	44.76	-29.24	74.00	100	335	Peak
3	* 9808.000	43.04	5.21	48.25	-25.75	74.00	100	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

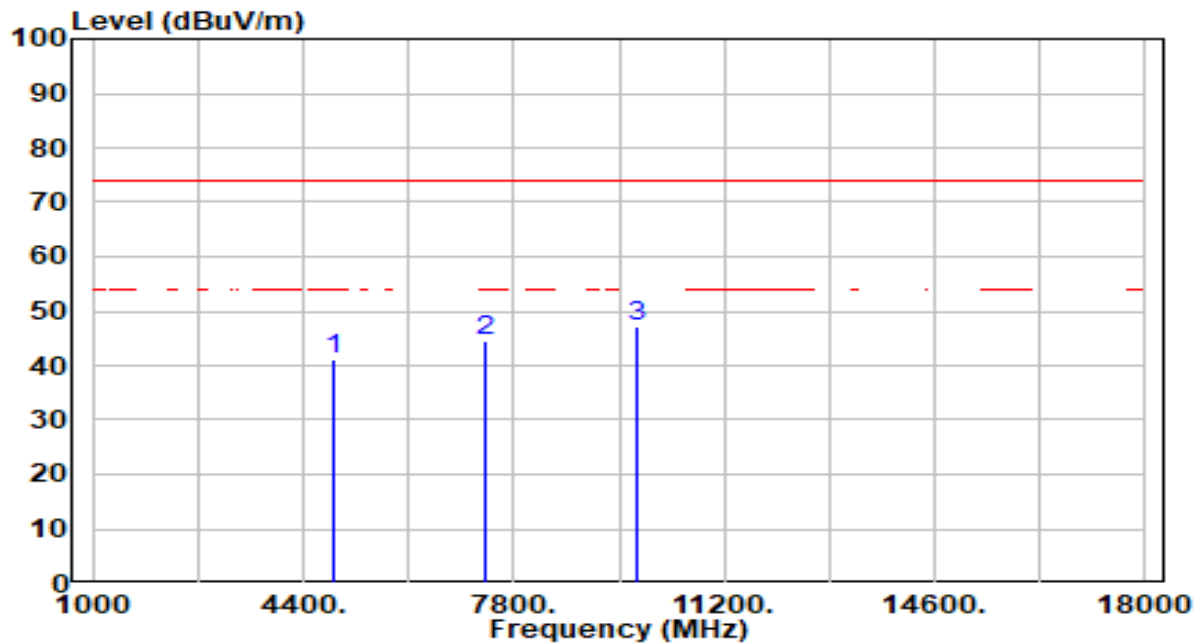


No	Frequency (MHz)	Reading (dBm)	C.F (dB)	Measurement (dBm)	Margin (dB)	Limit (dBm)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.71	0.31	41.02	-32.98	74.00	100	179	Peak
2	7356.000	38.86	5.82	44.68	-29.32	74.00	100	280	Peak
3	* 9808.000	42.09	5.21	47.30	-26.70	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBm) = Reading(dBm) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-30
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

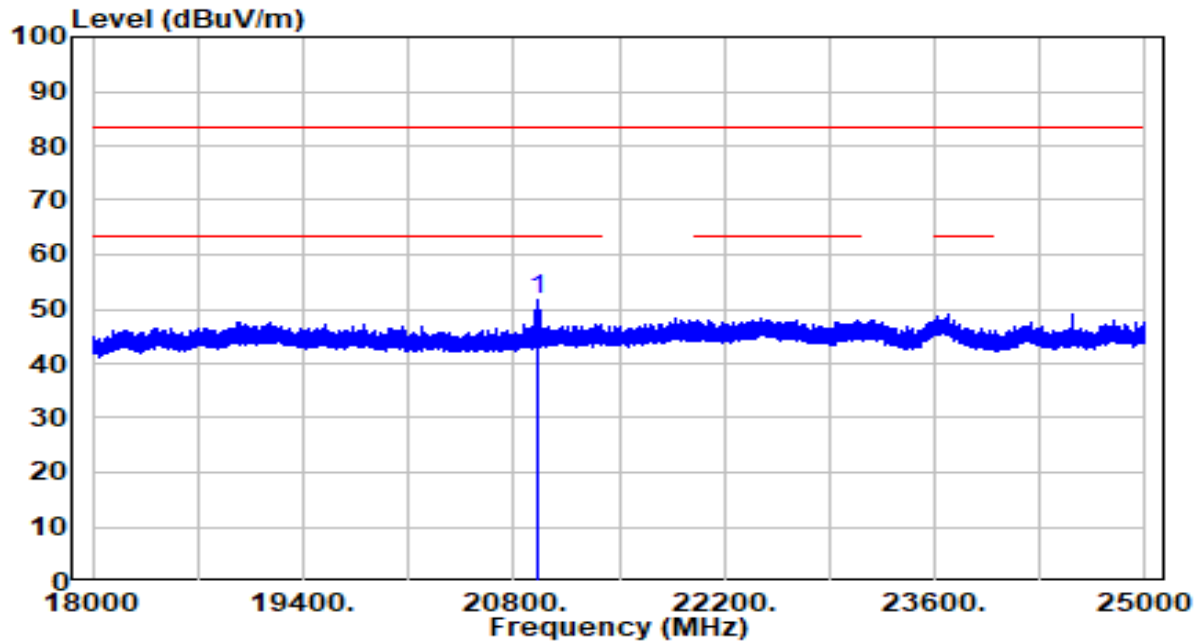


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	20965.380	40.90	10.89	51.79	-31.71	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-30
Factor	BBHA 9170	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

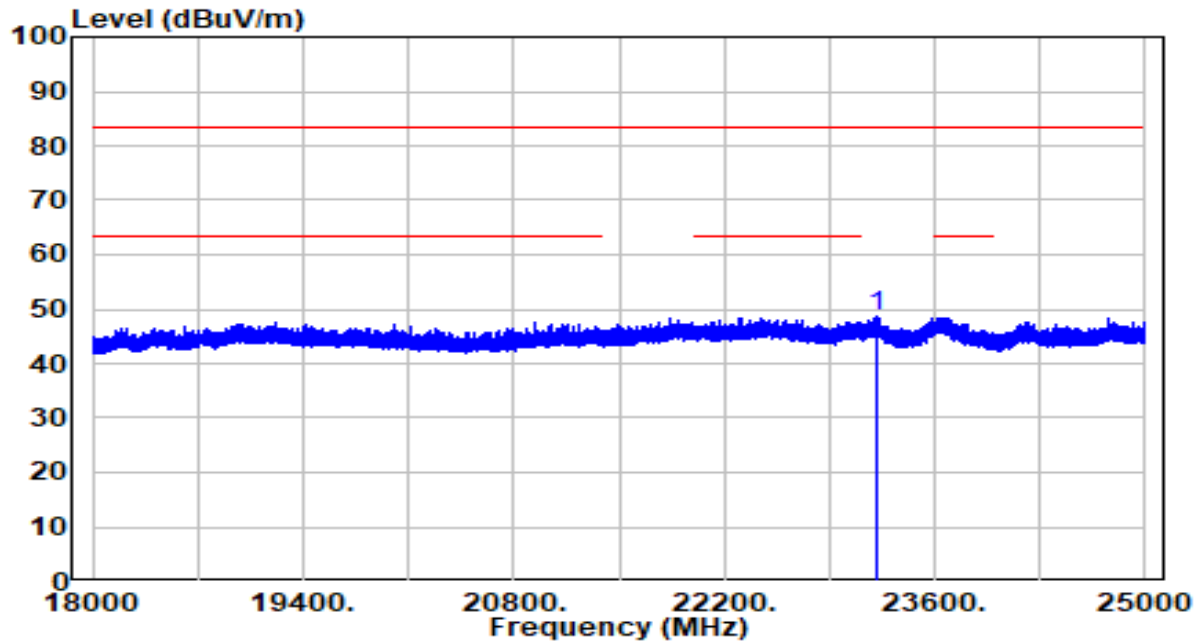

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23221.560	36.09	12.47	48.55	-34.95	83.50	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

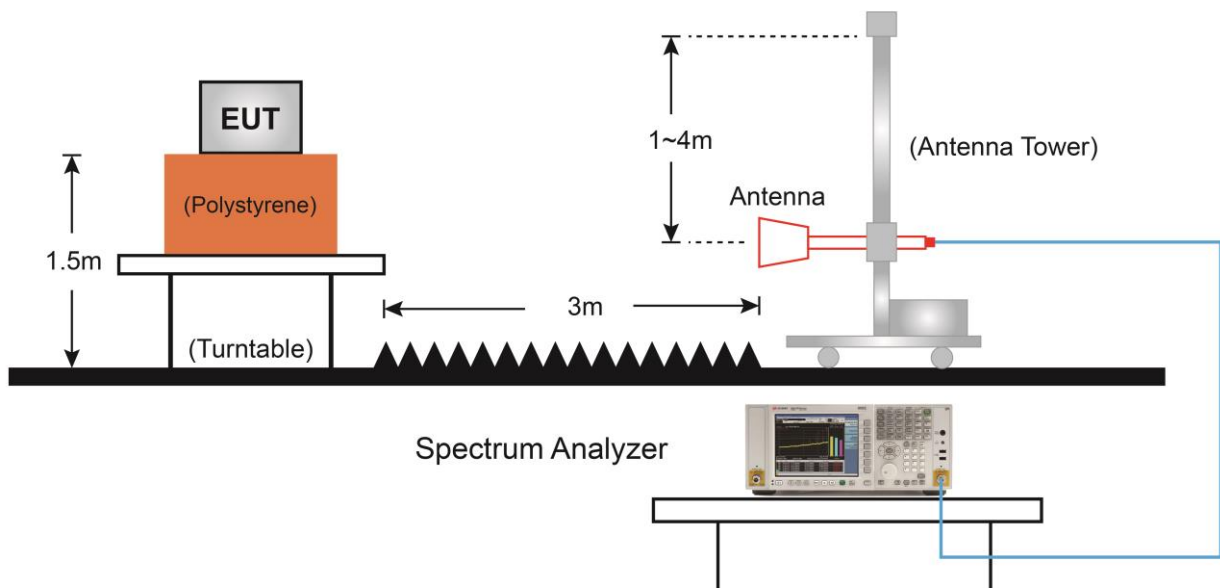7.7.4.Test Setup

7.7.5. Test Result

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

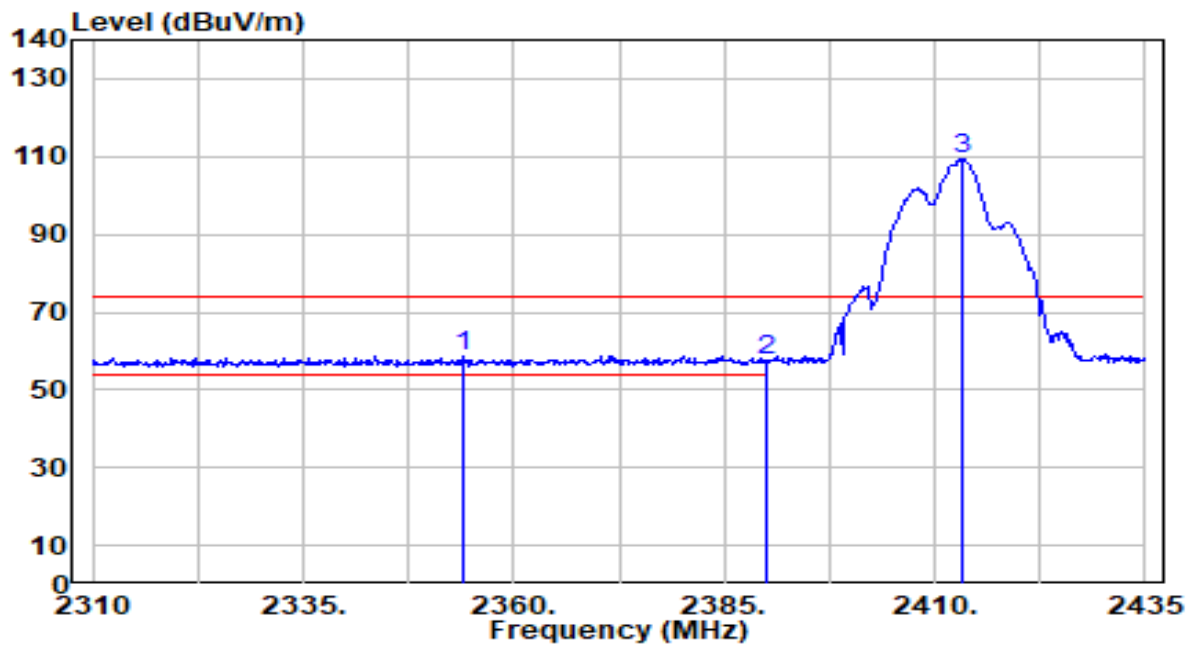


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2353.875	28.22	30.45	58.66	-15.34	74.00	100	215	Peak
2		2390.000	27.24	30.55	57.79	-16.21	74.00	100	215	Peak
3		2413.250	78.68	30.61	109.29	N/A	N/A	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

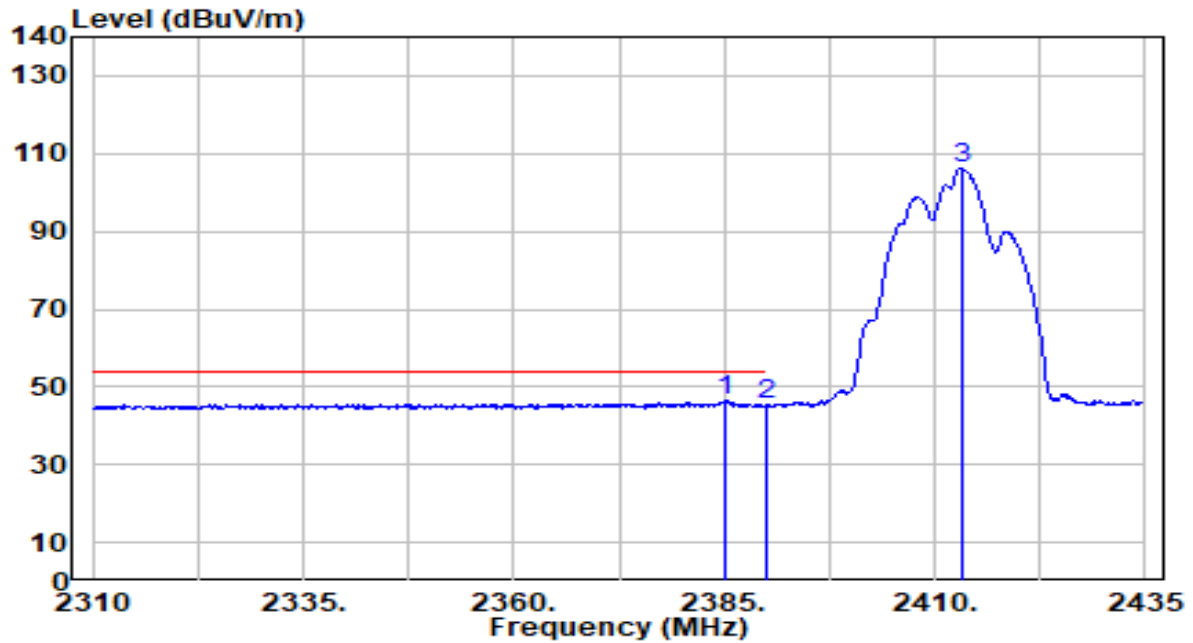


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.000	15.83	30.53	46.36	-7.64	54.00	100	215	Average
2		2390.000	14.84	30.55	45.38	-8.62	54.00	100	215	Average
3		2413.125	75.54	30.61	106.15	N/A	N/A	100	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

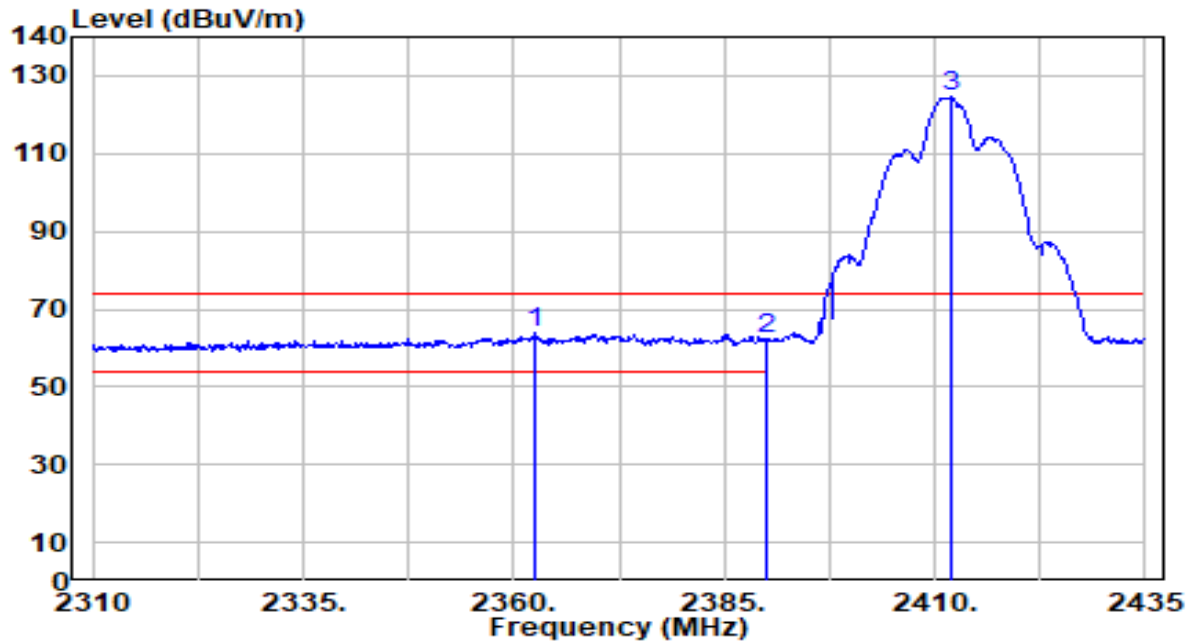


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2362.500	33.42	30.47	63.89	-10.11	74.00	200	358	Peak
2		2390.000	31.72	30.55	62.26	-11.74	74.00	200	358	Peak
3		2412.000	93.82	30.61	124.43	N/A	N/A	200	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

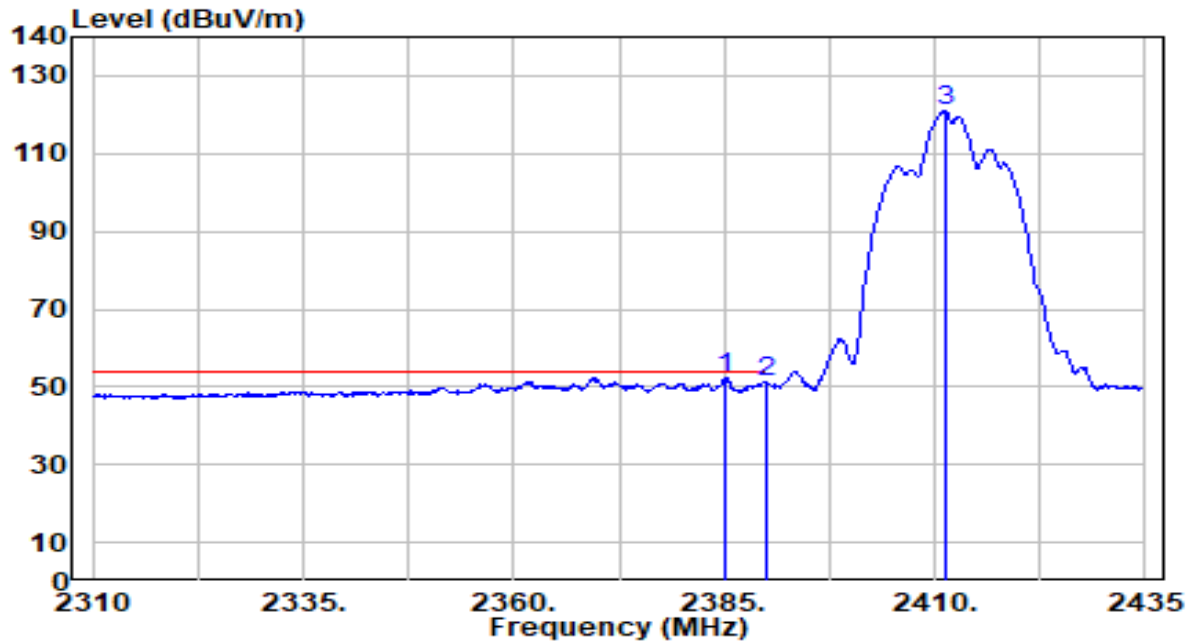


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.125	21.75	30.53	52.29	-1.71	54.00	200	358	Average
2		2390.000	20.48	30.55	51.03	-2.97	54.00	200	358	Average
3		2411.250	90.35	30.61	120.96	N/A	N/A	200	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

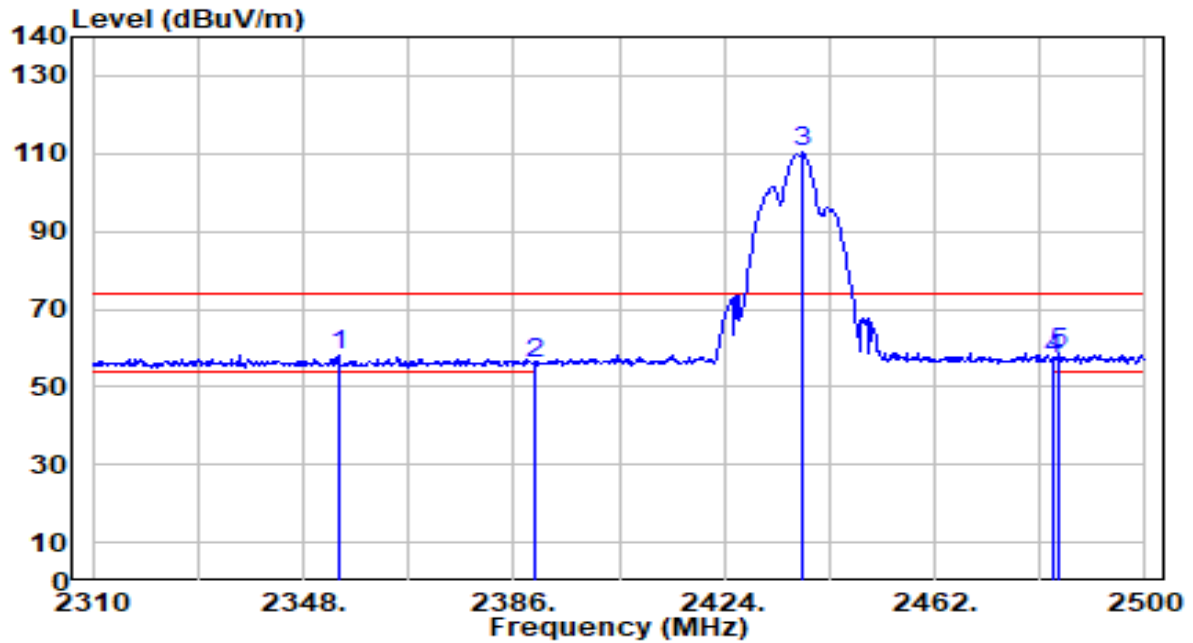


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2354.270	27.47	30.45	57.92	-16.08	74.00	254	236	Peak
2	2390.000	25.31	30.55	55.85	-18.15	74.00	254	236	Peak
3	2438.060	79.50	30.68	110.18	N/A	N/A	254	236	Peak
4	2483.500	26.24	30.81	57.06	-16.94	74.00	254	236	Peak
5	* 2484.610	27.64	30.82	58.46	-15.54	74.00	254	236	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

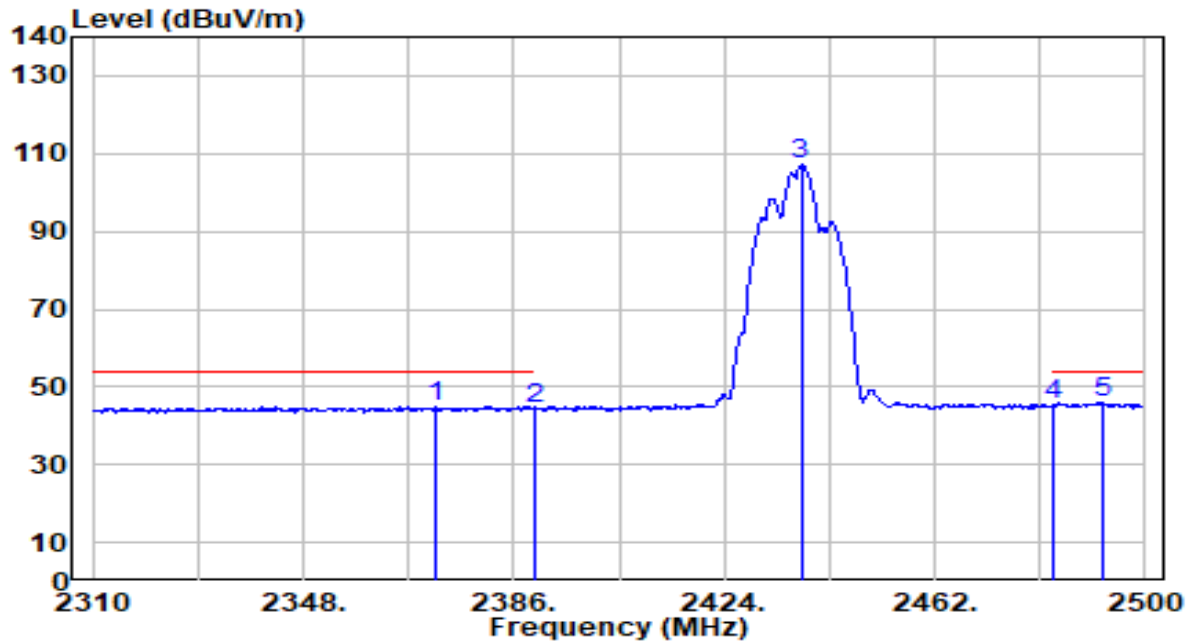


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2371.940	14.59	30.50	45.08	-8.92	54.00	254	236	Average
2	2390.000	13.85	30.55	44.39	-9.61	54.00	254	236	Average
3	2437.870	76.64	30.68	107.32	N/A	N/A	254	236	Average
4	2483.500	14.60	30.81	45.41	-8.59	54.00	254	236	Average
5	* 2492.210	15.25	30.84	46.09	-7.91	54.00	254	236	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

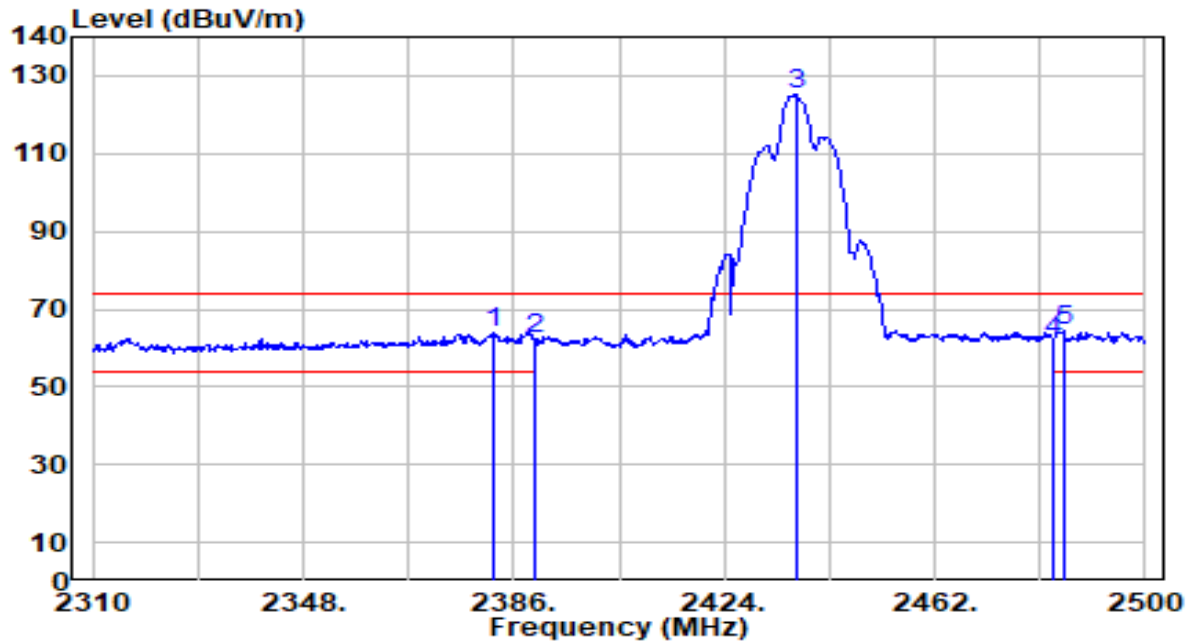


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.390	33.53	30.53	64.05	-9.95	74.00	200	356	Peak
2	2390.000	31.73	30.55	62.28	-11.72	74.00	200	356	Peak
3	2437.110	94.45	30.68	125.13	N/A	N/A	200	356	Peak
4	2483.500	31.16	30.81	61.97	-12.03	74.00	200	356	Peak
5	* 2485.180	33.37	30.82	64.19	-9.81	74.00	200	356	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

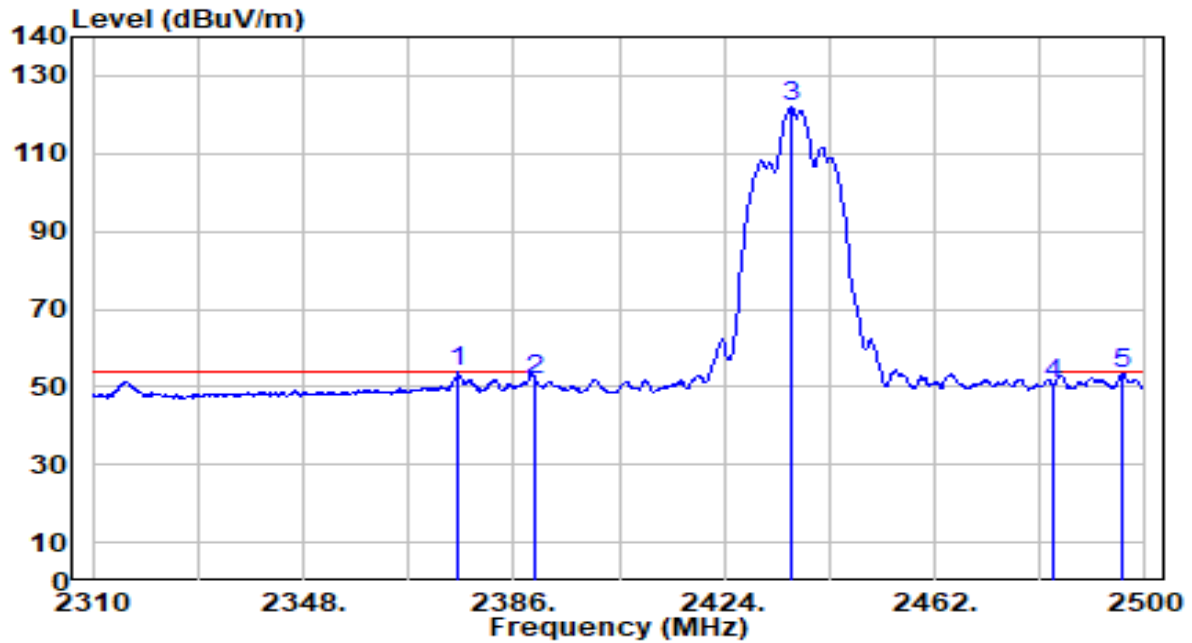


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.930	23.23	30.51	53.73	-0.27	54.00	200	356	Average
2		2390.000	21.25	30.55	51.80	-2.20	54.00	200	356	Average
3		2436.160	91.36	30.68	122.04	N/A	N/A	200	356	Average
4		2483.500	19.82	30.81	50.63	-3.37	54.00	200	356	Average
5		2495.820	22.70	30.85	53.55	-0.45	54.00	200	356	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

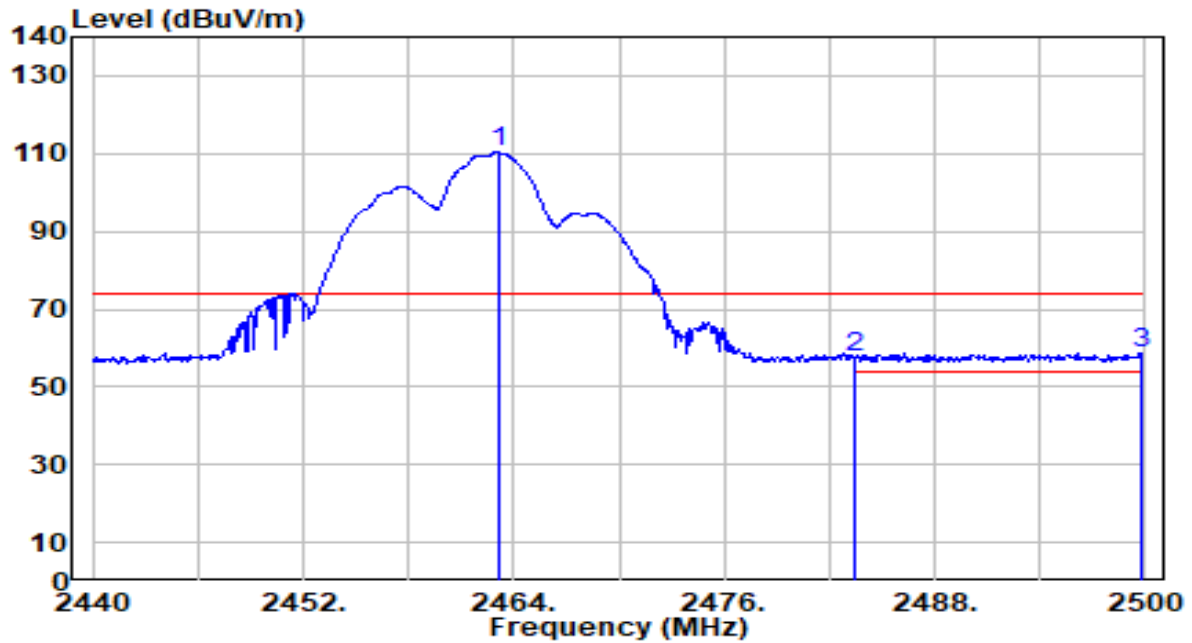


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	79.50	30.76	110.26	N/A	N/A	200	229	Peak
2	2483.500	26.70	30.81	57.51	-16.49	74.00	200	229	Peak
3	* 2499.760	27.99	30.86	58.85	-15.15	74.00	200	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

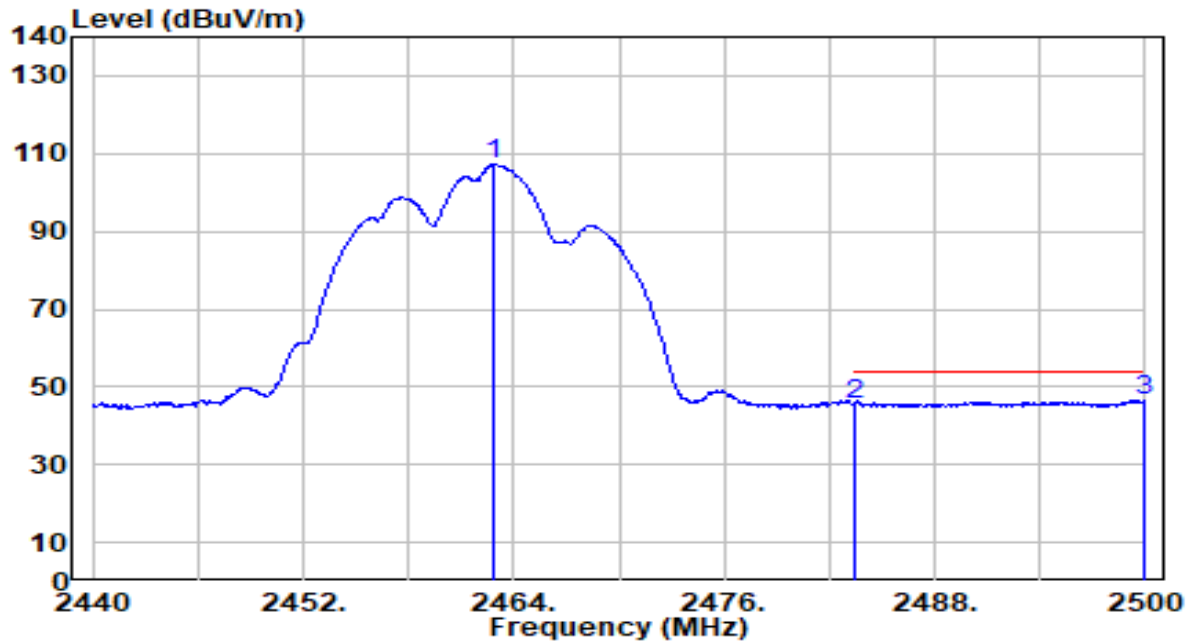


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.920	76.53	30.75	107.28	N/A	N/A	200	229	Average
2	2483.500	14.81	30.81	45.62	-8.38	54.00	200	229	Average
3	* 2500.000	15.66	30.86	46.52	-7.48	54.00	200	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

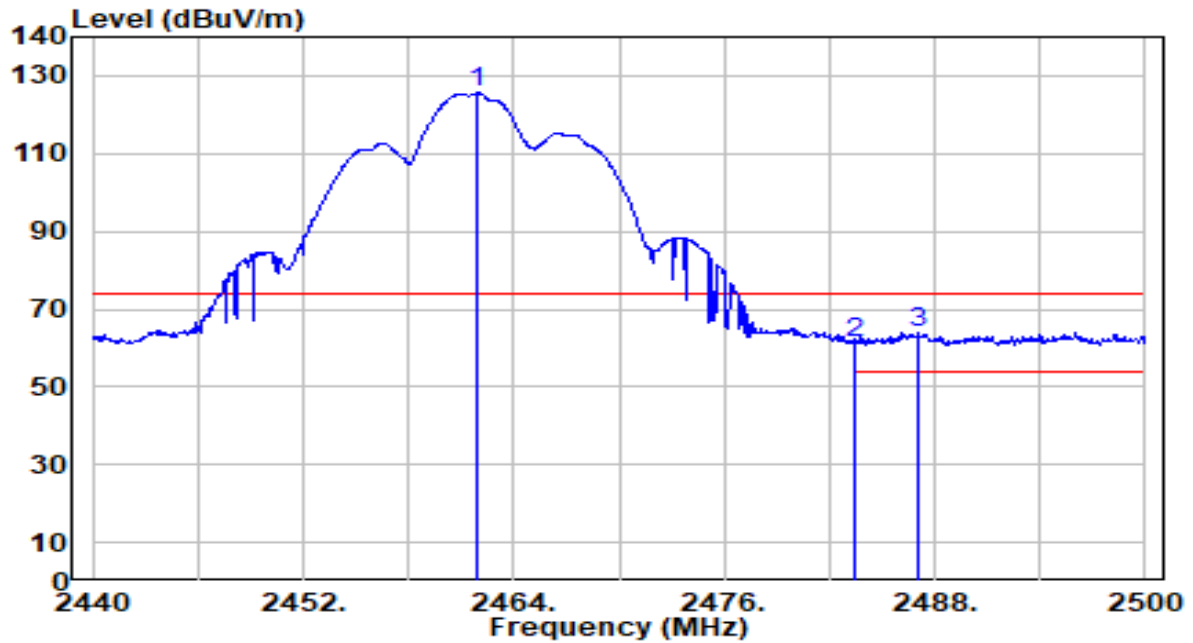


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.960	94.80	30.75	125.55	N/A	N/A	200	358	Peak
2	2483.500	30.67	30.81	61.48	-12.52	74.00	200	358	Peak
3	* 2487.100	33.08	30.82	63.91	-10.09	74.00	200	358	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11b_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

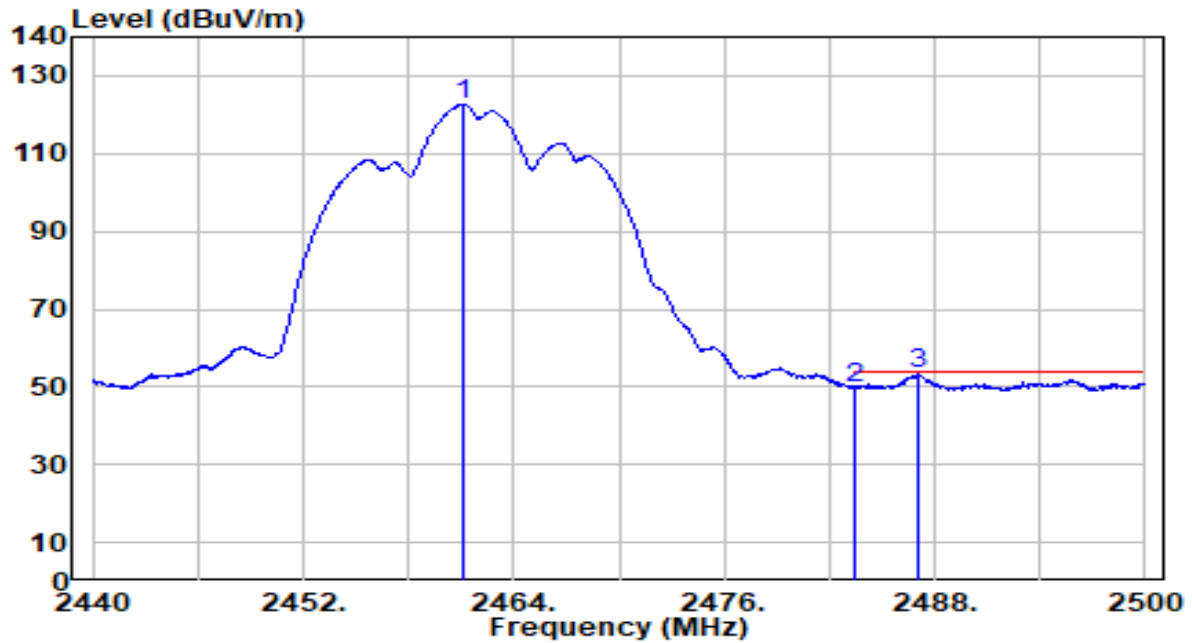


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	91.84	30.75	122.59	N/A	N/A	200	358	Average
2	2483.500	18.89	30.81	49.70	-4.30	54.00	200	358	Average
3	* 2487.040	22.63	30.82	53.45	-0.55	54.00	200	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

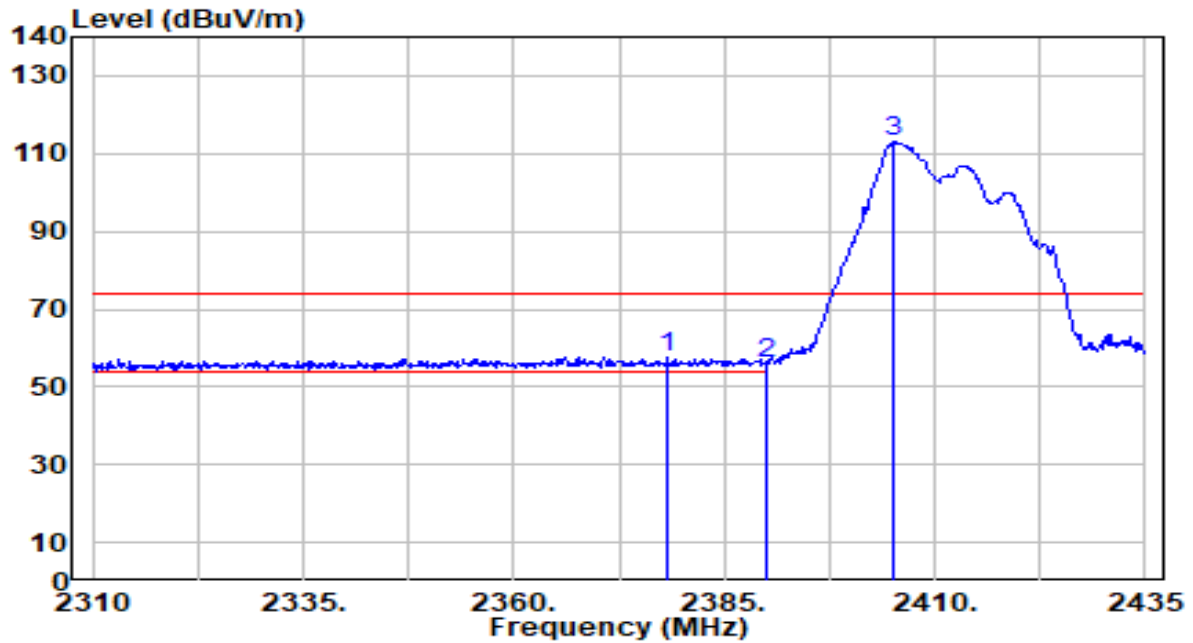


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.375	27.28	30.51	57.80	-16.20	74.00	107	212	Peak
2		2390.000	25.61	30.55	56.15	-17.85	74.00	107	212	Peak
3		2405.125	82.41	30.59	113.01	N/A	N/A	107	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

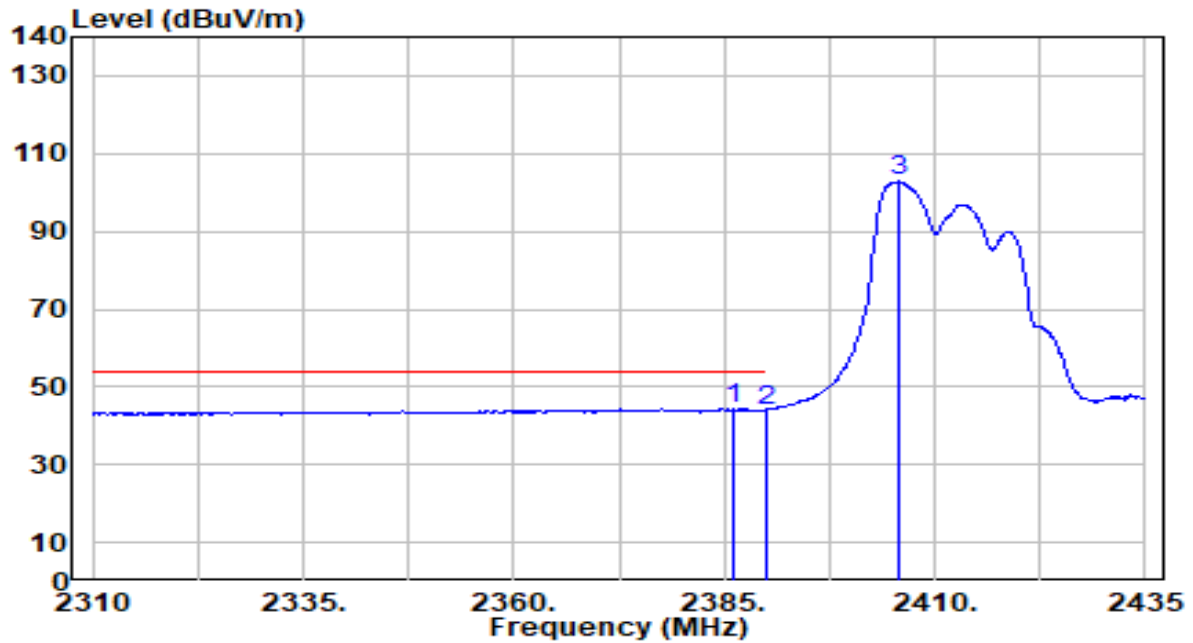


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.250	13.84	30.54	44.38	-9.62	54.00	107	212	Average
2		2390.000	13.55	30.55	44.10	-9.90	54.00	107	212	Average
3		2405.625	72.20	30.59	102.79	N/A	N/A	107	212	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

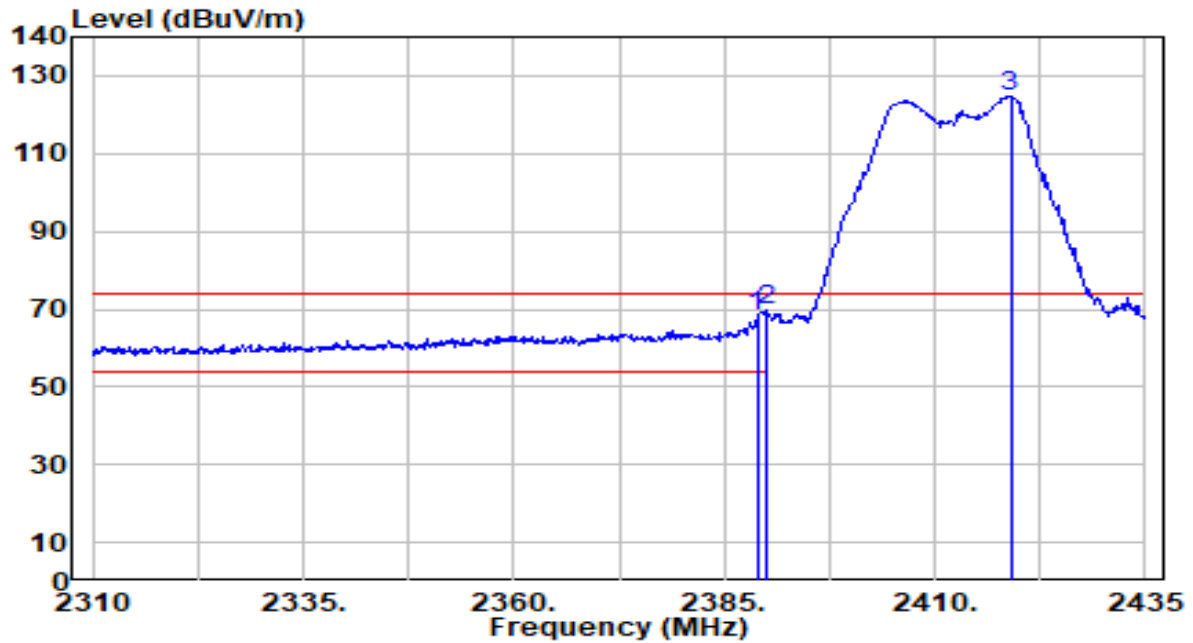


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	37.41	30.54	67.96	-6.04	74.00	200	331	Peak
2	*	2390.000	39.16	30.55	69.71	-4.29	74.00	200	331	Peak
3		2419.000	94.16	30.63	124.79	N/A	N/A	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

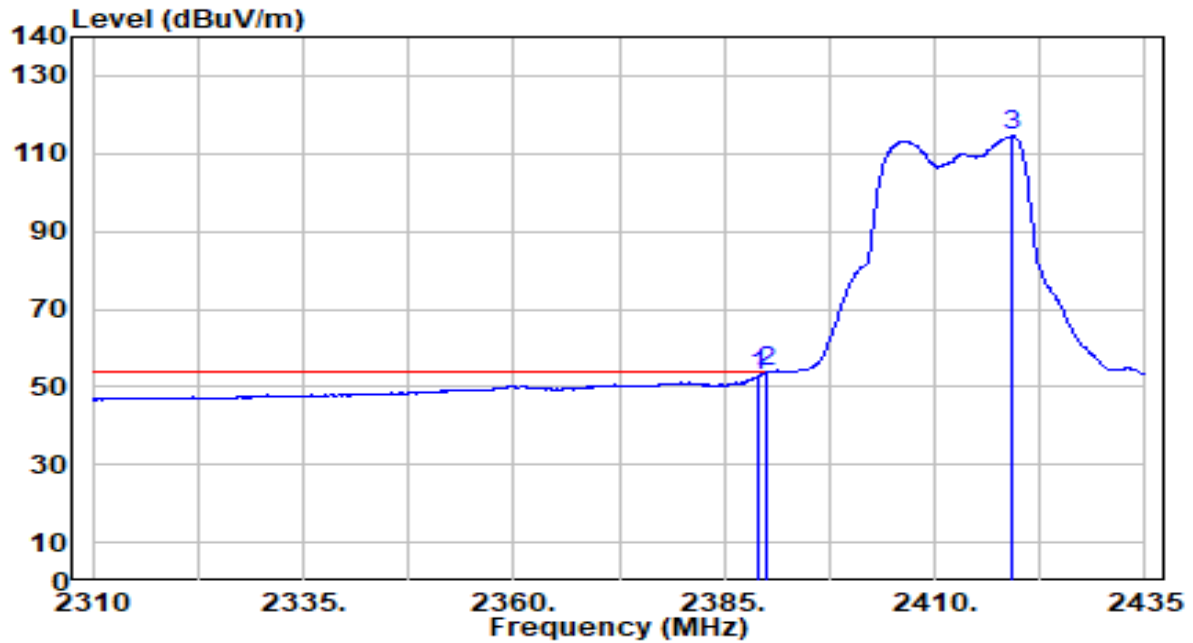


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.12	30.54	52.67	-1.33	54.00	200	331	Average
2	*	2390.000	23.26	30.55	53.81	-0.19	54.00	200	331	Average
3		2419.125	83.82	30.63	114.45	N/A	N/A	200	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

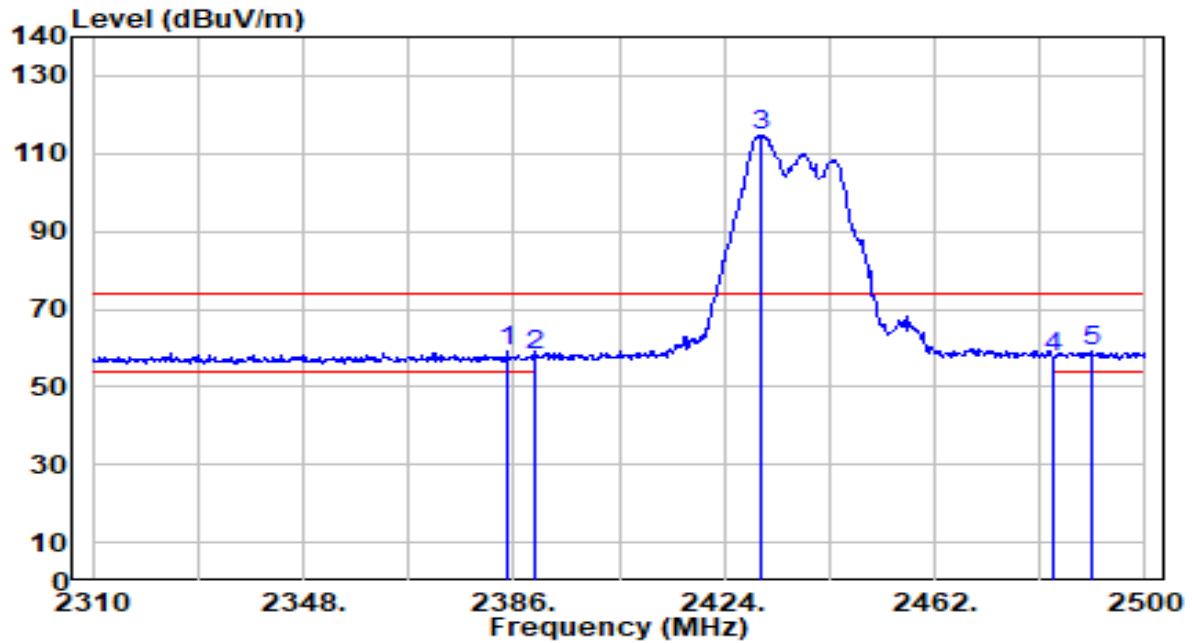


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.670	28.48	30.53	59.01	-14.99	74.00	184	225	Peak
2	2390.000	27.46	30.55	58.01	-15.99	74.00	184	225	Peak
3	2430.840	84.15	30.66	114.82	N/A	N/A	184	225	Peak
4	2483.500	26.89	30.81	57.70	-16.30	74.00	184	225	Peak
5	* 2490.500	28.48	30.83	59.32	-14.68	74.00	184	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

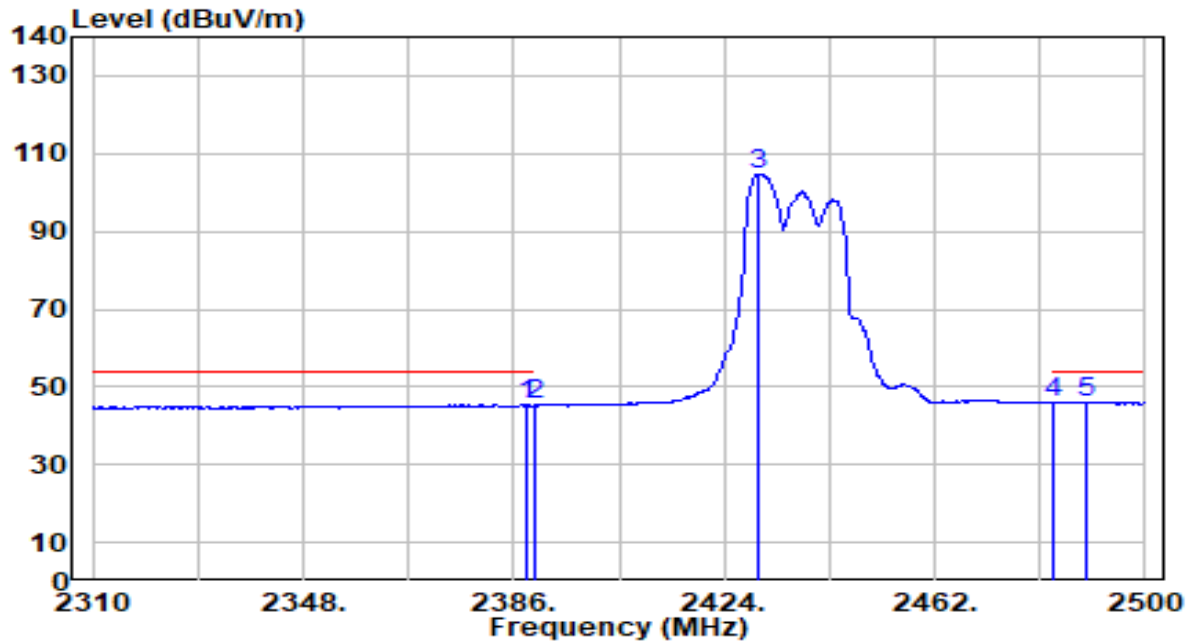


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	14.97	30.54	45.51	-8.49	54.00	184	225	Average
2	2390.000	14.68	30.55	45.22	-8.78	54.00	184	225	Average
3	2430.270	74.05	30.66	104.71	N/A	N/A	184	225	Average
4	2483.500	15.05	30.81	45.87	-8.13	54.00	184	225	Average
5	* 2489.550	15.35	30.83	46.18	-7.82	54.00	184	225	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

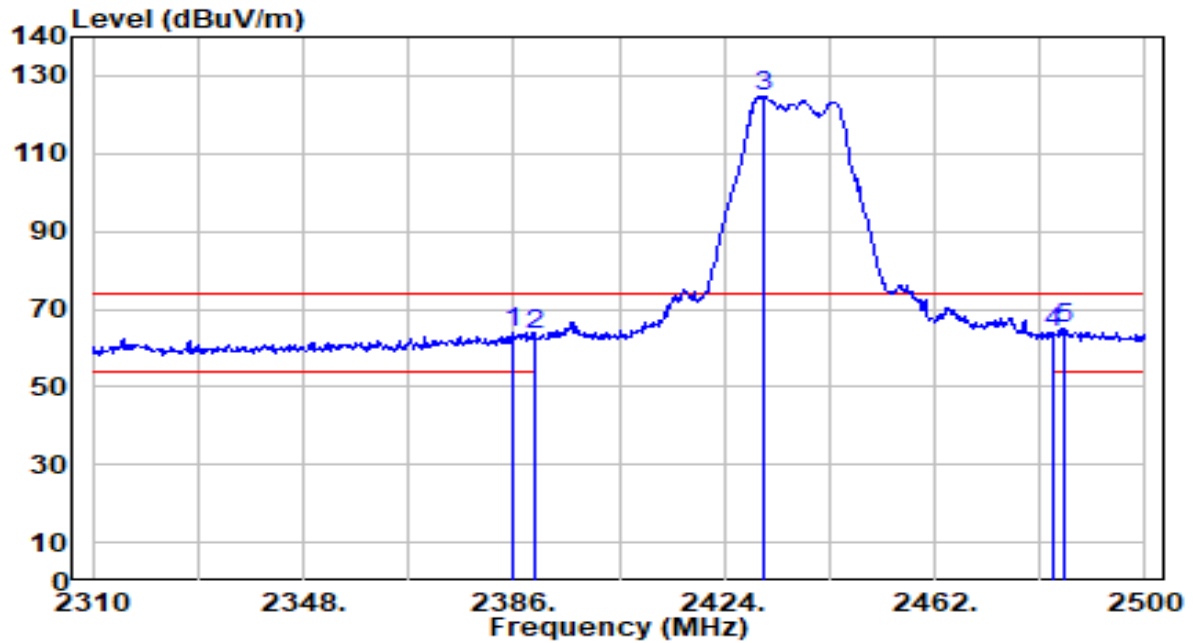


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.000	33.56	30.54	64.10	-9.90	74.00	200	339	Peak
2	2390.000	33.11	30.55	63.65	-10.35	74.00	200	339	Peak
3	2431.220	94.19	30.66	124.85	N/A	N/A	200	339	Peak
4	2483.500	33.34	30.81	64.15	-9.85	74.00	200	339	Peak
5	* 2485.370	34.38	30.82	65.20	-8.80	74.00	200	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

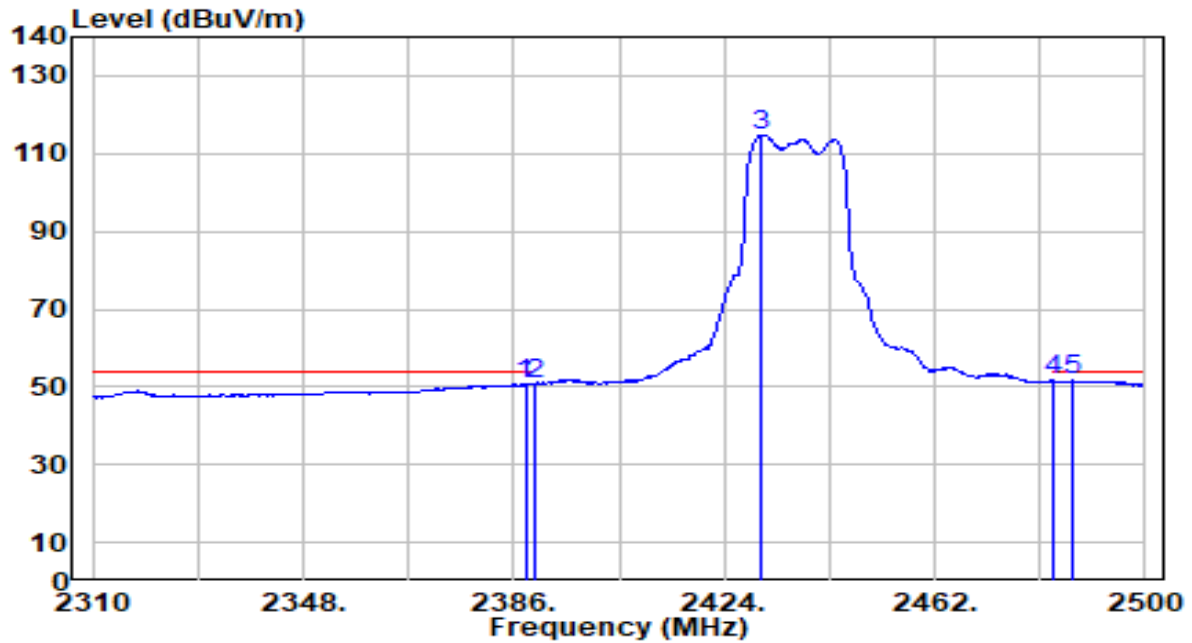


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	20.30	30.54	50.85	-3.15	54.00	200	339	Average
2	2390.000	20.35	30.55	50.89	-3.11	54.00	200	339	Average
3	2430.840	84.08	30.66	114.74	N/A	N/A	200	339	Average
4	2483.500	20.73	30.81	51.54	-2.46	54.00	200	339	Average
5	* 2486.890	20.91	30.82	51.74	-2.26	54.00	200	339	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

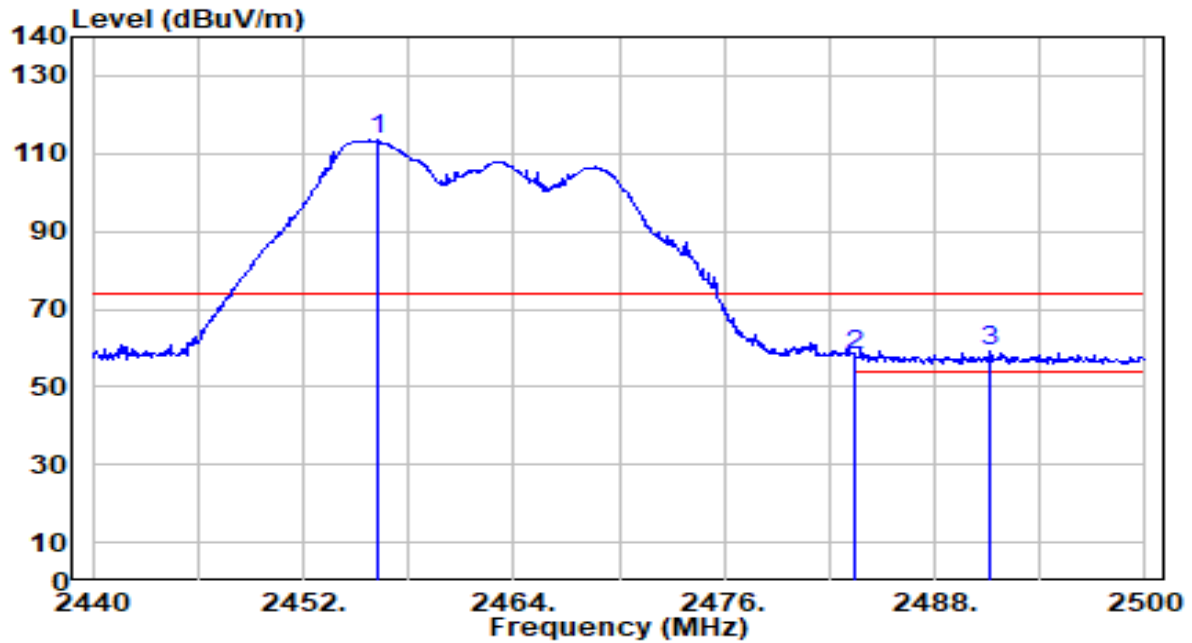


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.260	82.63	30.74	113.37	N/A	N/A	200	226	Peak
2	2483.500	27.23	30.81	58.04	-15.96	74.00	200	226	Peak
3	* 2491.120	28.55	30.83	59.39	-14.61	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

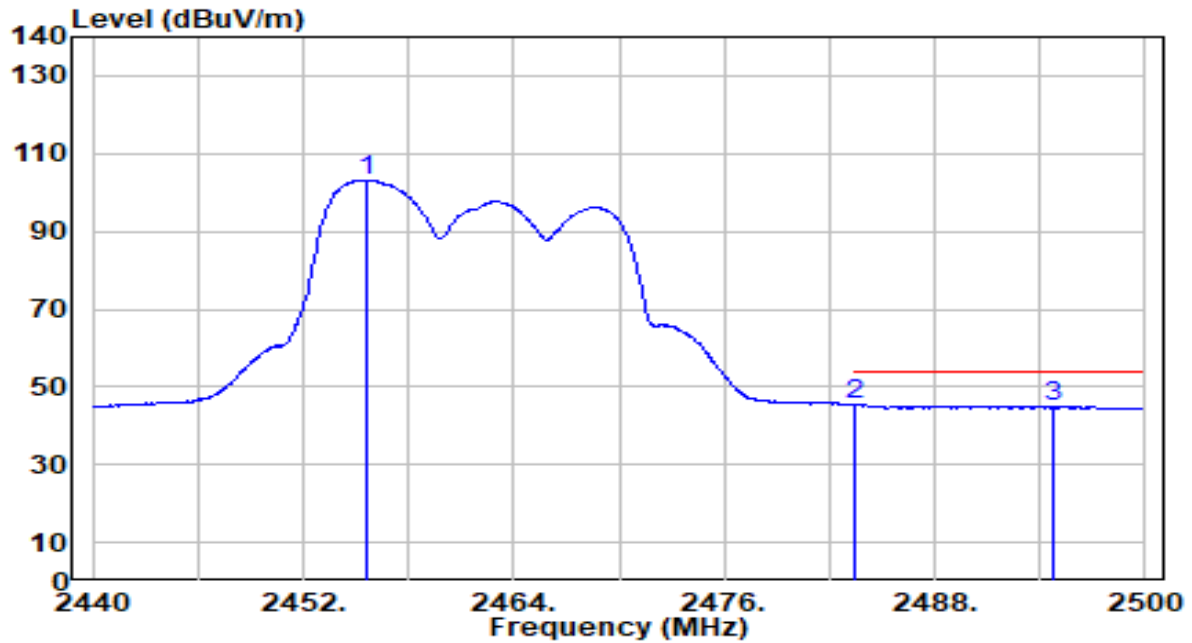


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.600	72.53	30.73	103.26	N/A	N/A	200	226	Average
2	*	2483.500	14.54	30.81	45.35	-8.65	54.00	200	226	Average
3		2494.720	14.23	30.85	45.07	-8.93	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

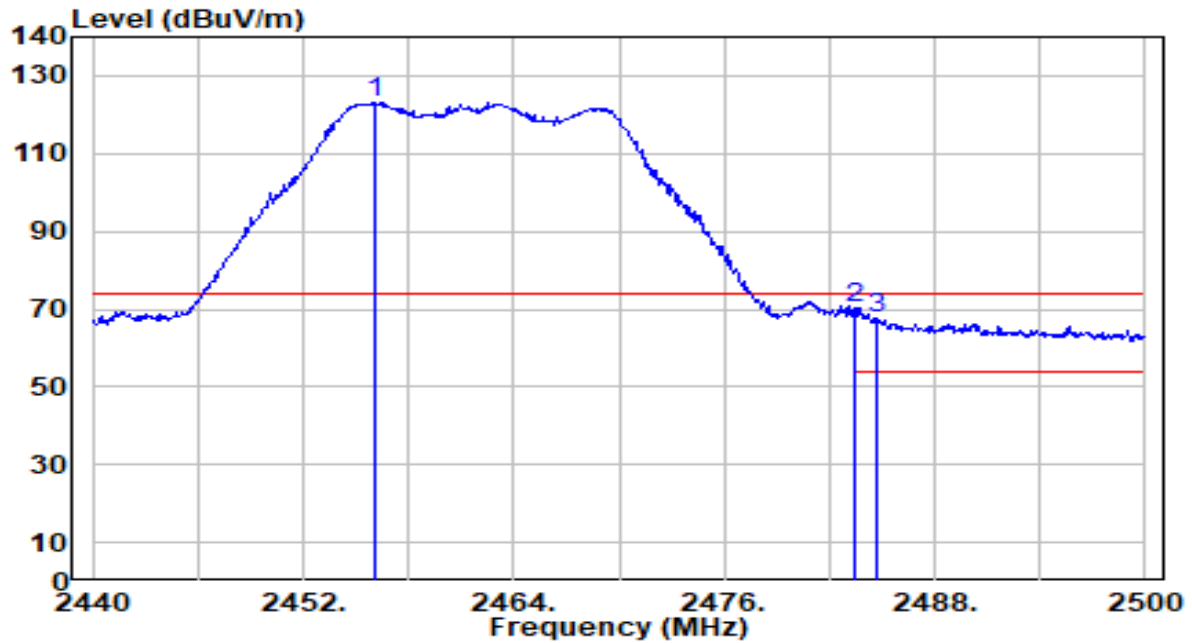


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.080	92.48	30.74	123.21	N/A	N/A	200	340	Peak
2	*	2483.500	39.66	30.81	70.47	-3.53	74.00	200	340	Peak
3		2484.760	36.87	30.82	67.69	-6.31	74.00	200	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11g_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

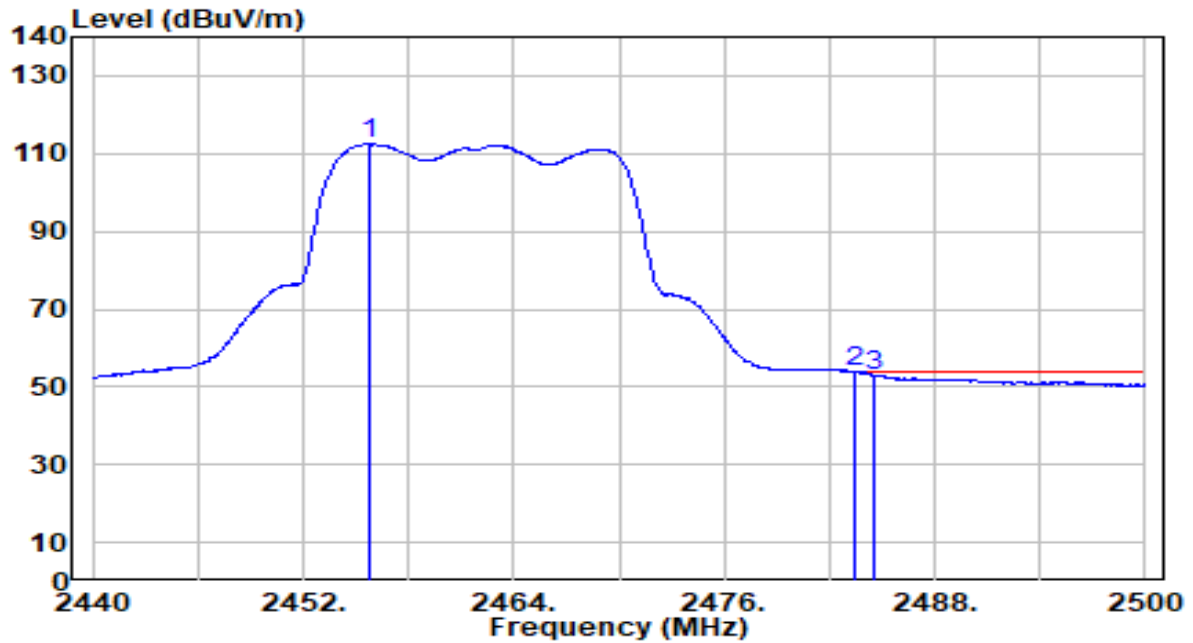


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.840	81.64	30.73	112.38	N/A	N/A	200	340	Average
2	*	2483.500	23.08	30.81	53.90	-0.10	54.00	200	340	Average
3		2484.580	22.23	30.82	53.05	-0.95	54.00	200	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

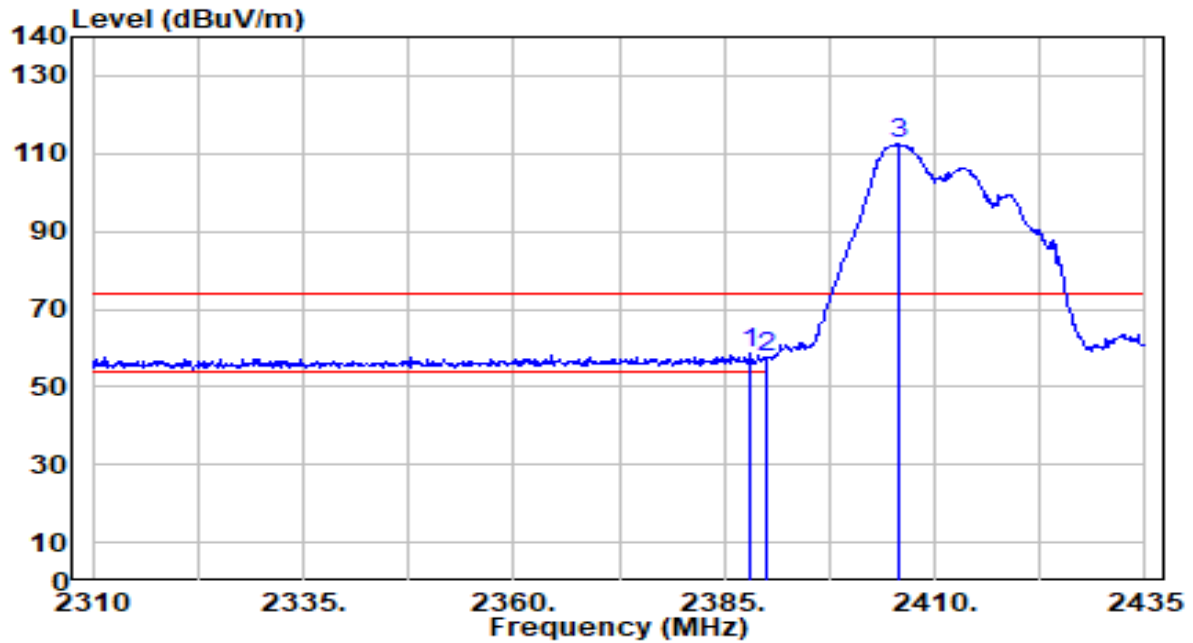


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.125	27.84	30.54	58.39	-15.61	74.00	110	212	Peak
2		2390.000	27.03	30.55	57.58	-16.42	74.00	110	212	Peak
3		2405.750	81.83	30.59	112.42	N/A	N/A	110	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

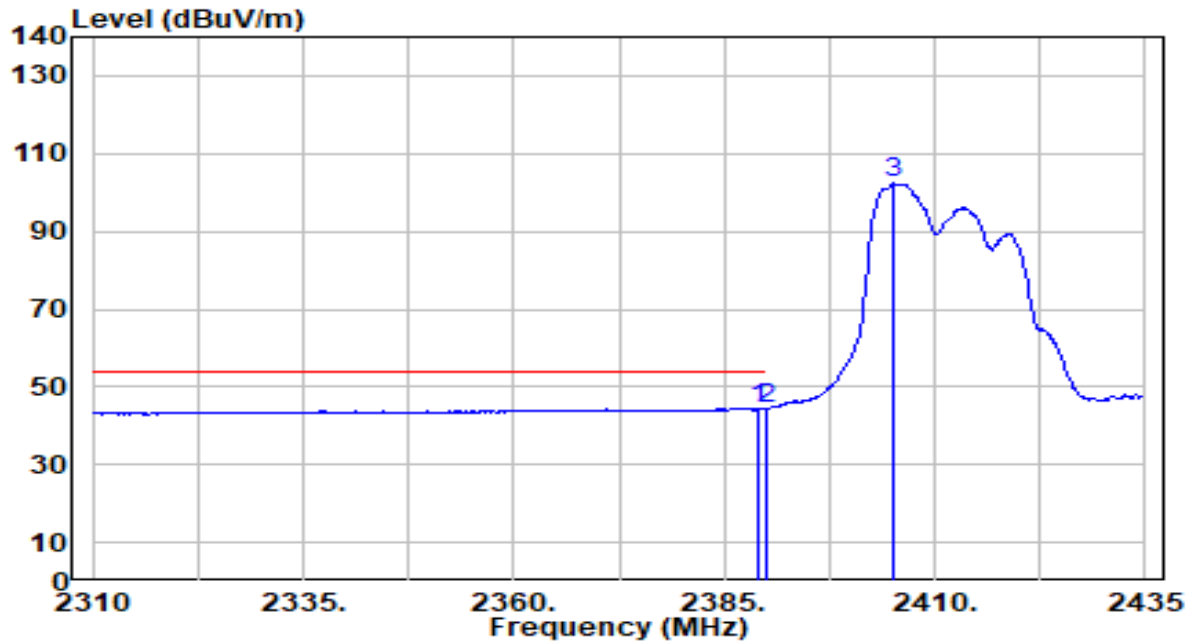


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	13.78	30.54	44.32	-9.68	54.00	110	212	Average
2	*	2390.000	13.83	30.55	44.38	-9.62	54.00	110	212	Average
3		2405.000	71.72	30.59	102.31	N/A	N/A	110	212	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

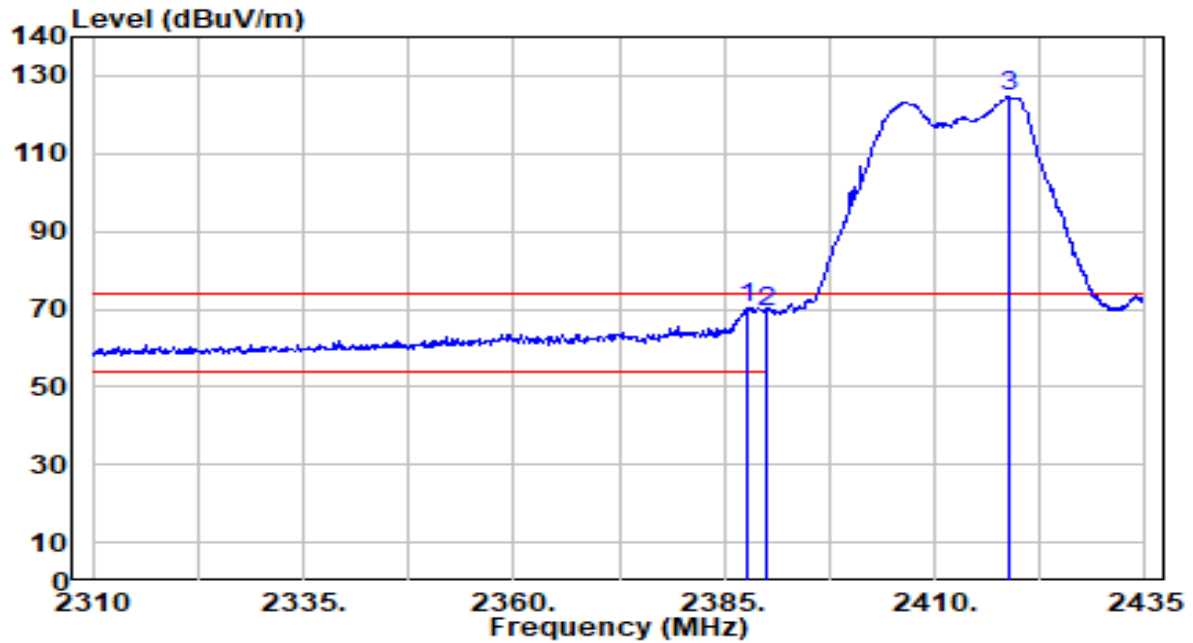


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	39.87	30.54	70.41	-3.59	74.00	200	331	Peak
2		2390.000	38.62	30.55	69.16	-4.84	74.00	200	331	Peak
3		2418.875	94.17	30.63	124.80	N/A	N/A	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

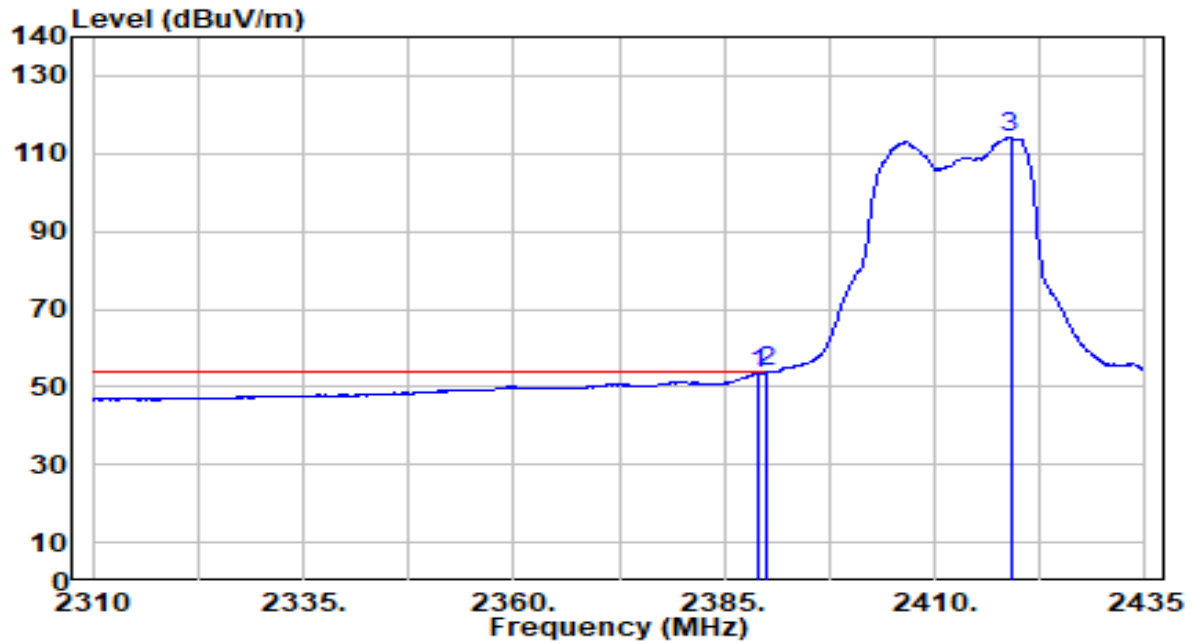


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	22.79	30.54	53.34	-0.66	54.00	200	331	Average
2	*	2390.000	23.28	30.55	53.83	-0.17	54.00	200	331	Average
3		2419.000	83.63	30.63	114.26	N/A	N/A	200	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

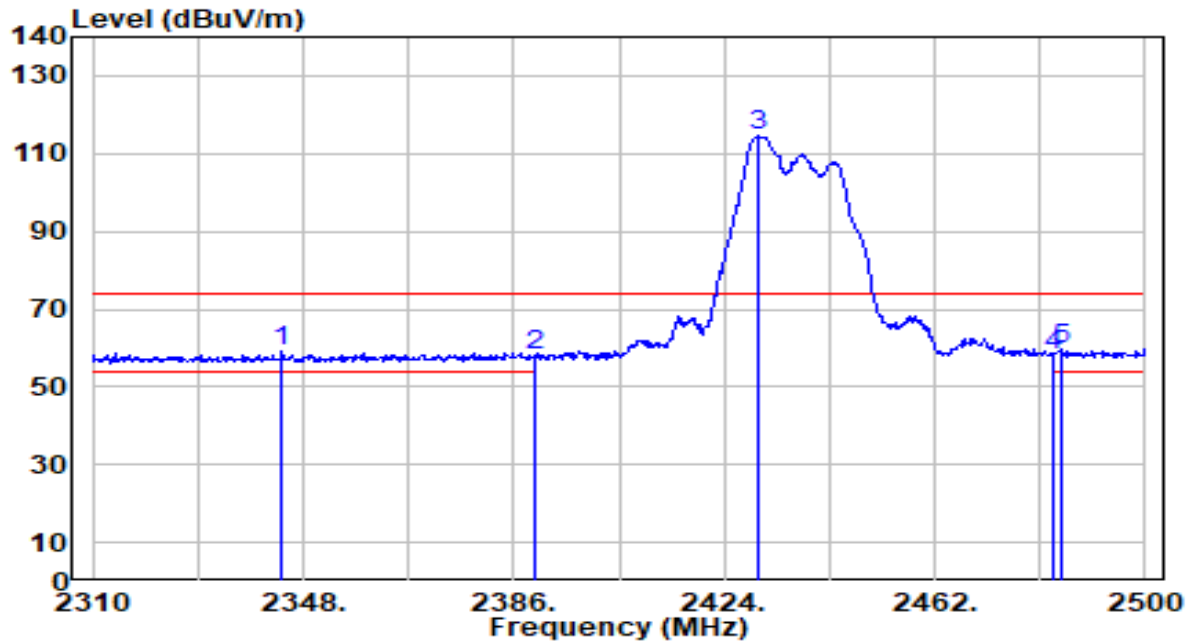


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2344.200	28.54	30.42	58.96	-15.04	74.00	183	225	Peak
2	2390.000	27.50	30.55	58.05	-15.95	74.00	183	225	Peak
3	2430.080	83.95	30.66	114.62	N/A	N/A	183	225	Peak
4	2483.500	27.08	30.81	57.89	-16.11	74.00	183	225	Peak
5	* 2484.990	28.68	30.82	59.49	-14.51	74.00	183	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

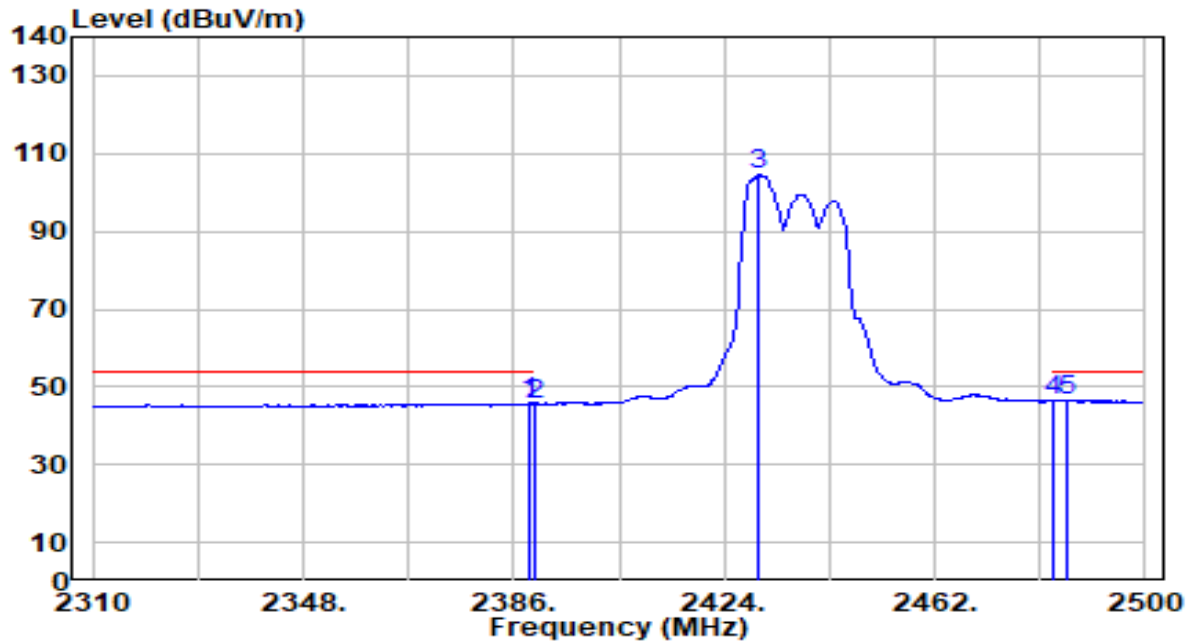


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	15.18	30.54	45.73	-8.27	54.00	183	225	Average
2	2390.000	15.07	30.55	45.62	-8.38	54.00	183	225	Average
3	2430.270	73.83	30.66	104.49	N/A	N/A	183	225	Average
4	2483.500	15.43	30.81	46.24	-7.76	54.00	183	225	Average
5	* 2485.750	15.66	30.82	46.48	-7.52	54.00	183	225	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

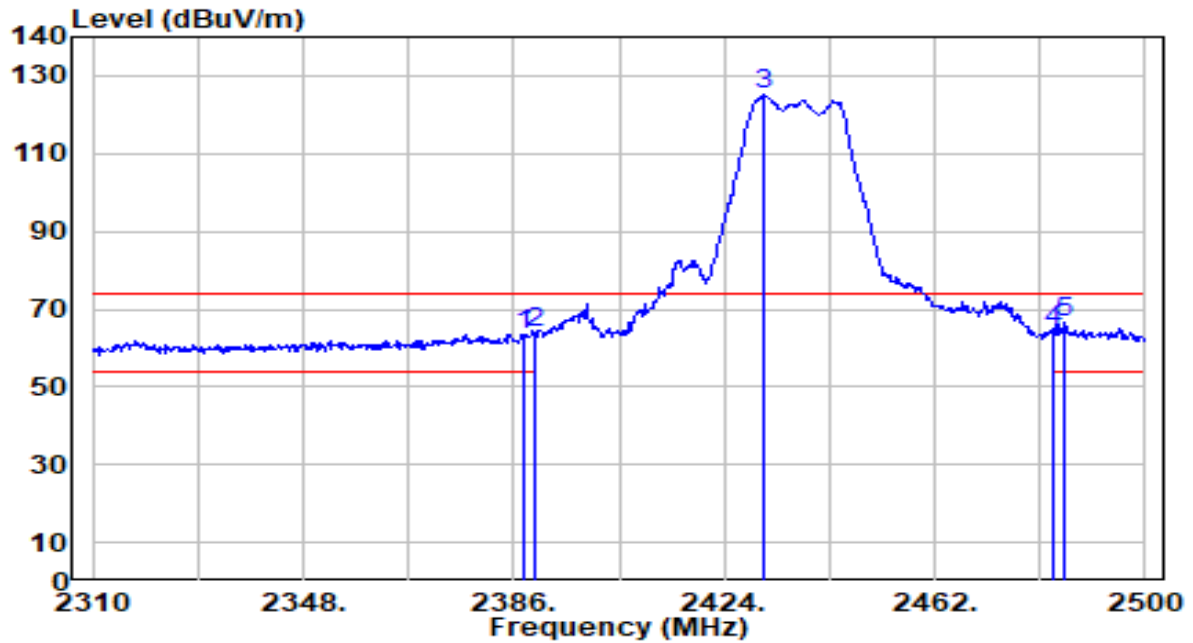


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	32.88	30.54	63.42	-10.58	74.00	200	339	Peak
2	2390.000	33.33	30.55	63.88	-10.12	74.00	200	339	Peak
3	2431.220	94.32	30.66	124.99	N/A	N/A	200	339	Peak
4	2483.500	33.50	30.81	64.31	-9.69	74.00	200	339	Peak
5	* 2485.370	35.61	30.82	66.43	-7.57	74.00	200	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

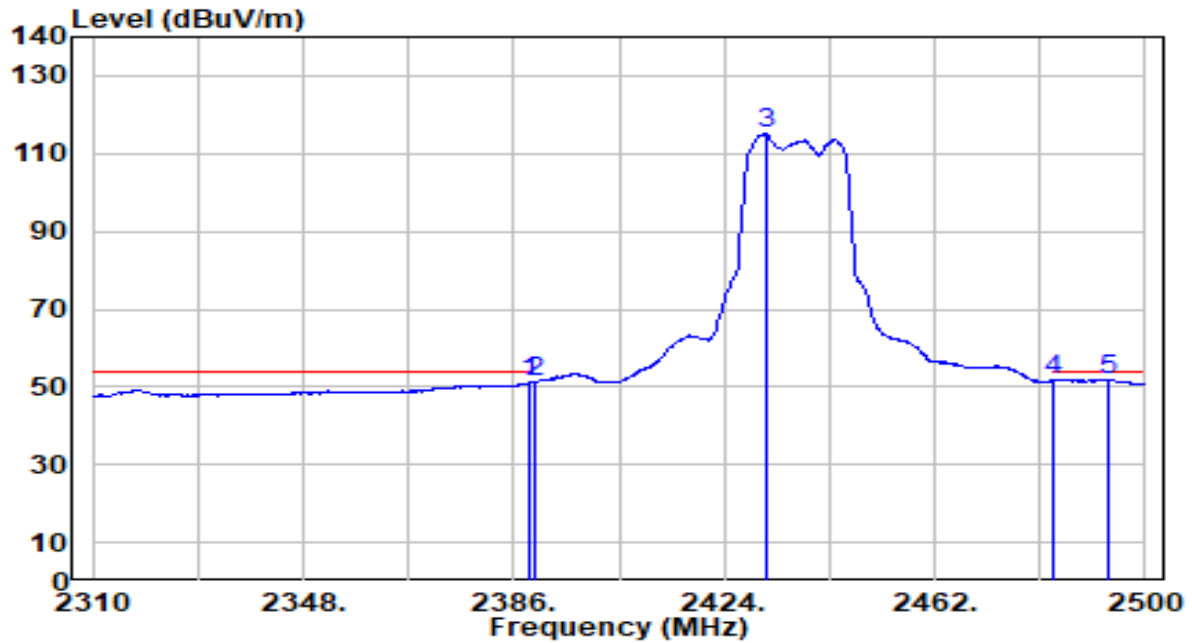


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	20.53	30.54	51.08	-2.92	54.00	200	339	Average
2	2390.000	20.69	30.55	51.24	-2.76	54.00	200	339	Average
3	2431.410	84.29	30.67	114.96	N/A	N/A	200	339	Average
4	2483.500	20.77	30.81	51.58	-2.42	54.00	200	339	Average
5	* 2493.540	21.09	30.84	51.93	-2.07	54.00	200	339	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

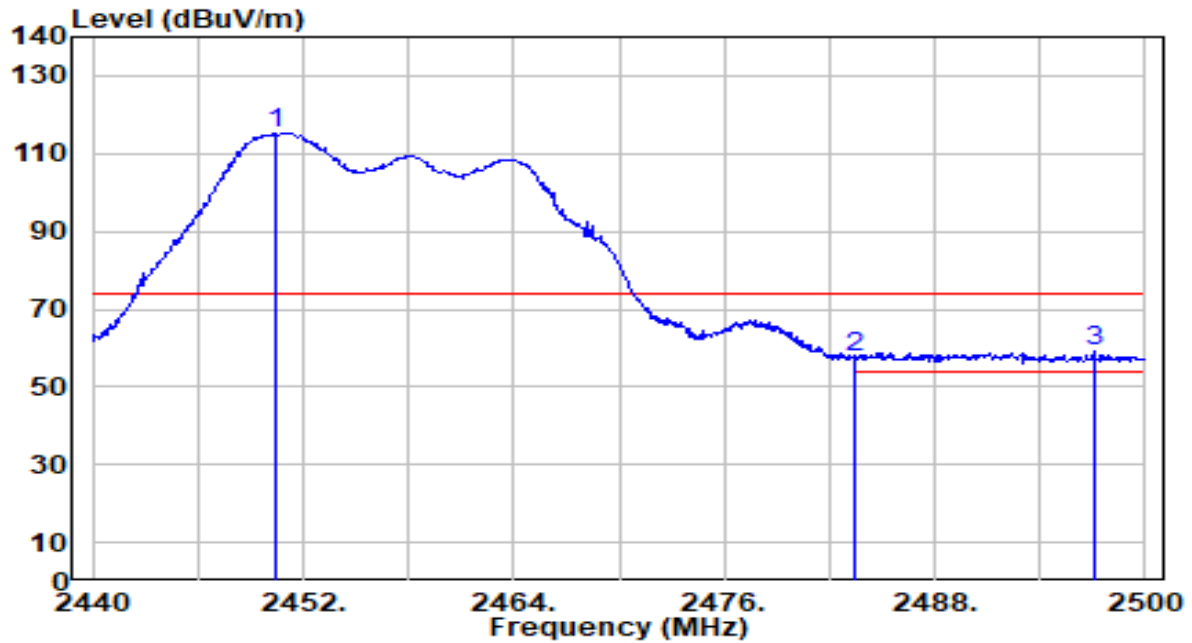


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.380	84.58	30.72	115.30	N/A	N/A	200	225	Peak
2	2483.500	26.73	30.81	57.54	-16.46	74.00	200	225	Peak
3	* 2497.060	28.20	30.85	59.05	-14.95	74.00	200	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

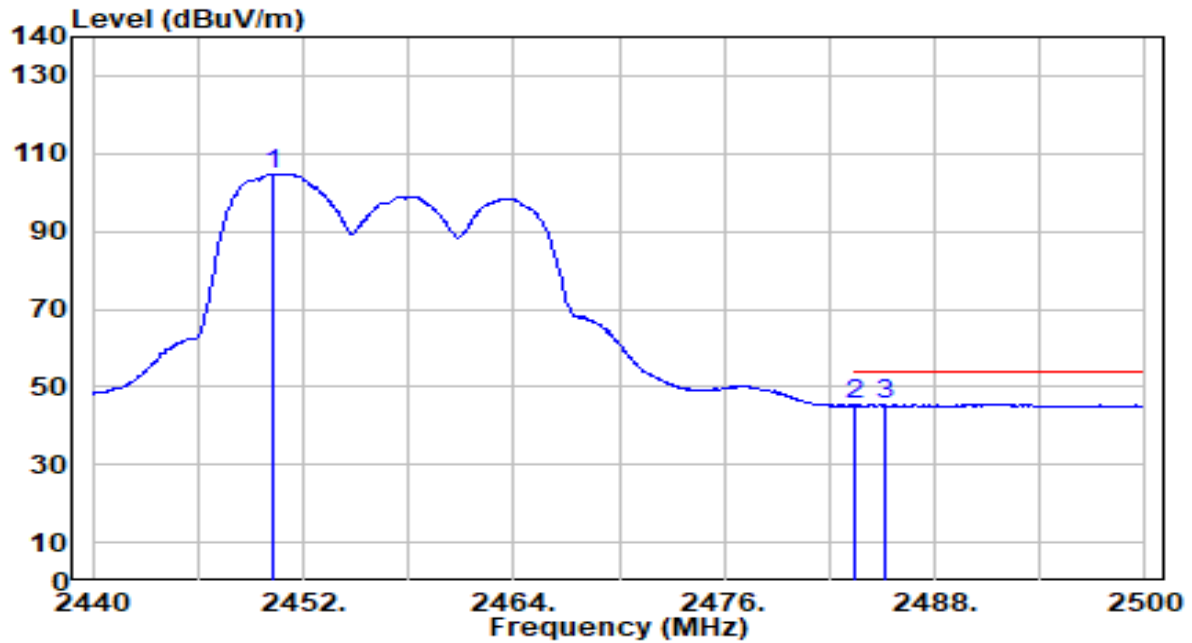


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.260	74.03	30.72	104.74	N/A	N/A	200	225	Average
2		2483.500	14.36	30.81	45.17	-8.83	54.00	200	225	Average
3	*	2485.180	14.77	30.82	45.59	-8.41	54.00	200	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

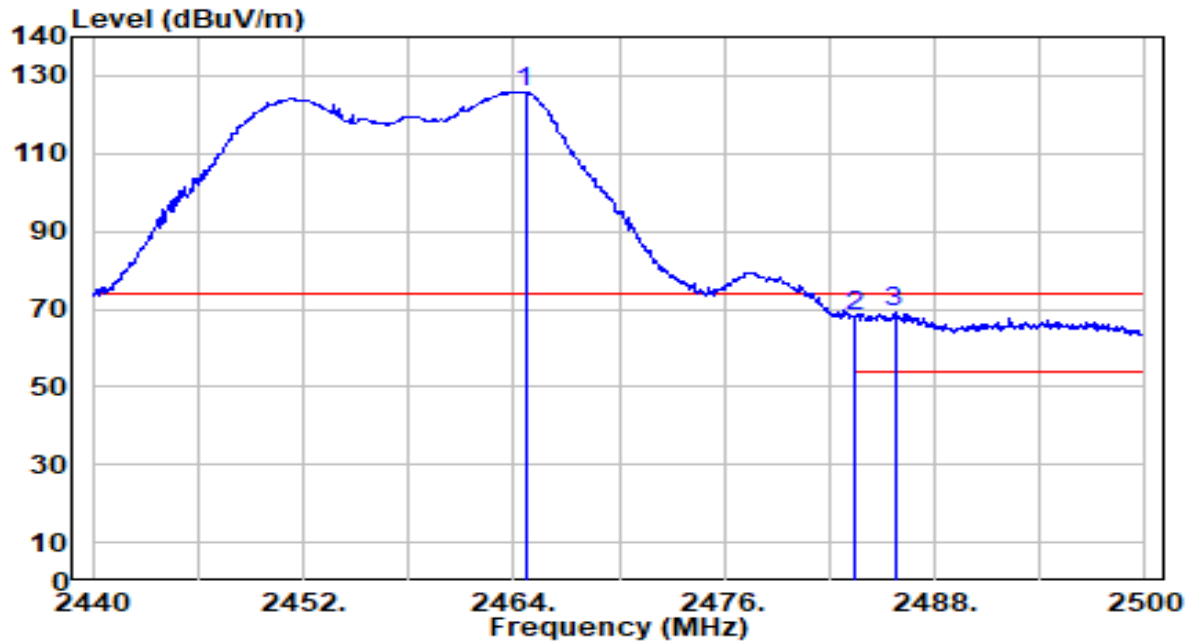


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.660	95.16	30.76	125.92	N/A	N/A	222	331	Peak
2	2483.500	37.51	30.81	68.32	-5.68	74.00	222	331	Peak
3	* 2485.720	38.43	30.82	69.25	-4.75	74.00	222	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

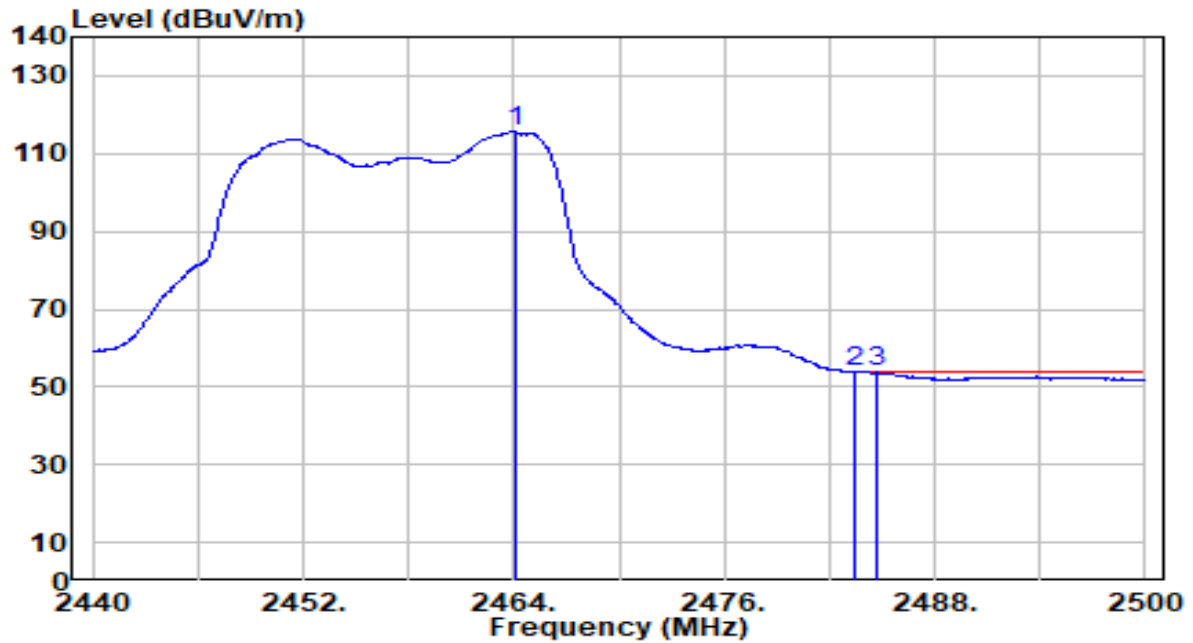


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.060	84.77	30.76	115.53	N/A	N/A	222	331	Average
2	*	2483.500	23.00	30.81	53.82	-0.18	54.00	222	331	Average
3		2484.640	22.85	30.82	53.66	-0.34	54.00	222	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

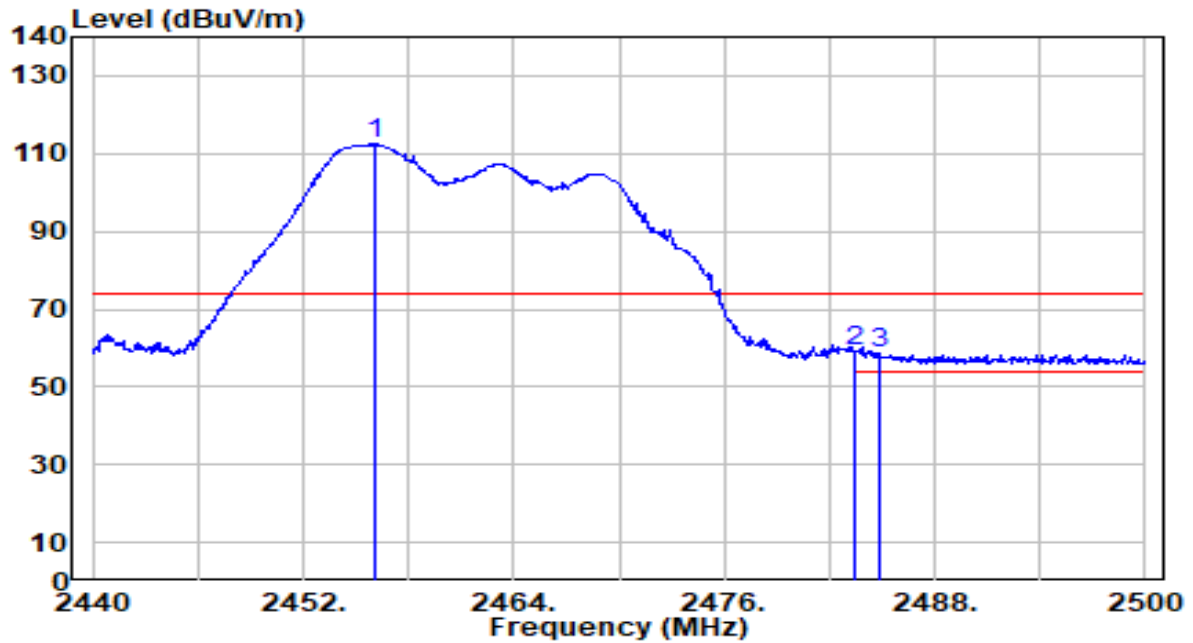


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.020	81.71	30.74	112.45	N/A	N/A	200	227	Peak
2	*	2483.500	28.58	30.81	59.39	-14.61	74.00	200	227	Peak
3		2484.820	28.03	30.82	58.85	-15.15	74.00	200	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

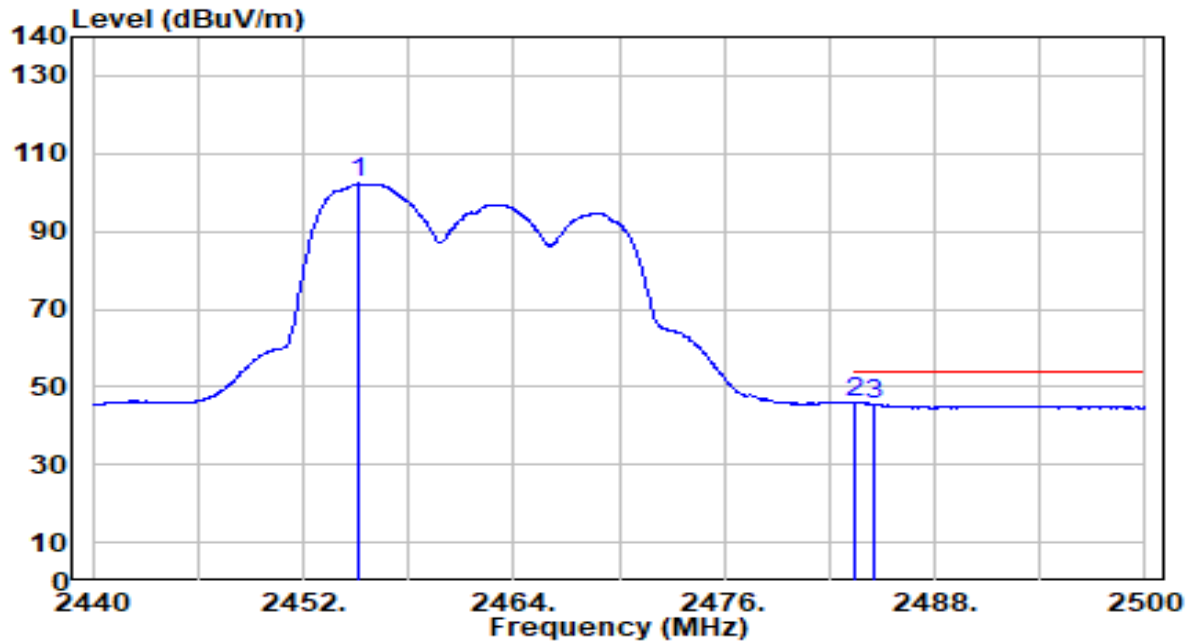


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.180	71.59	30.73	102.33	N/A	N/A	200	227	Average
2	*	2483.500	15.07	30.81	45.88	-8.12	54.00	200	227	Average
3		2484.520	14.76	30.82	45.58	-8.42	54.00	200	227	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

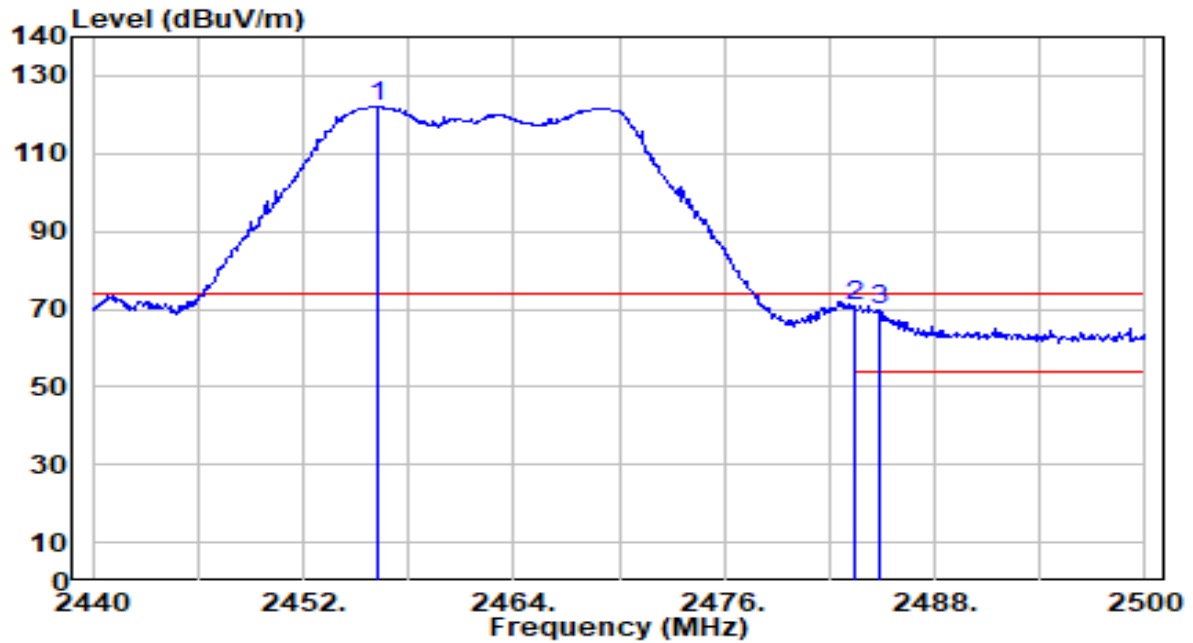


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.260	91.50	30.74	122.24	N/A	N/A	199	336	Peak
2	*	2483.500	40.18	30.81	71.00	-3.00	74.00	199	336	Peak
3		2484.880	38.69	30.82	69.50	-4.50	74.00	199	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

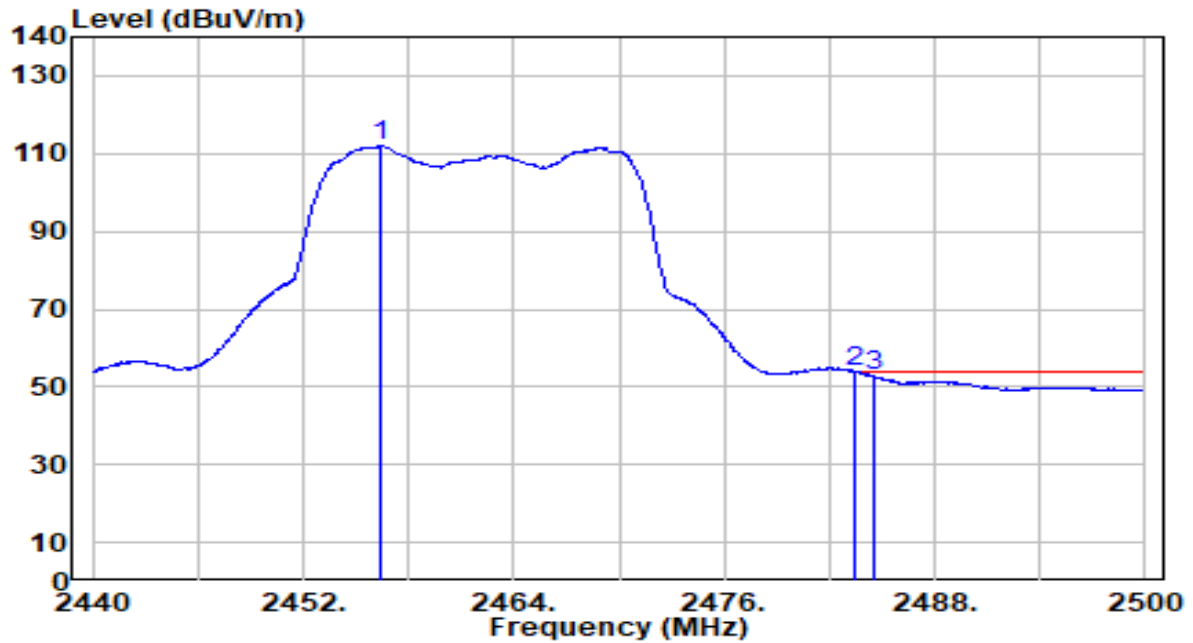


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.440	81.04	30.74	111.77	N/A	N/A	199	336	Average
2	*	2483.500	23.00	30.81	53.81	-0.19	54.00	199	336	Average
3		2484.520	21.77	30.82	52.59	-1.41	54.00	199	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

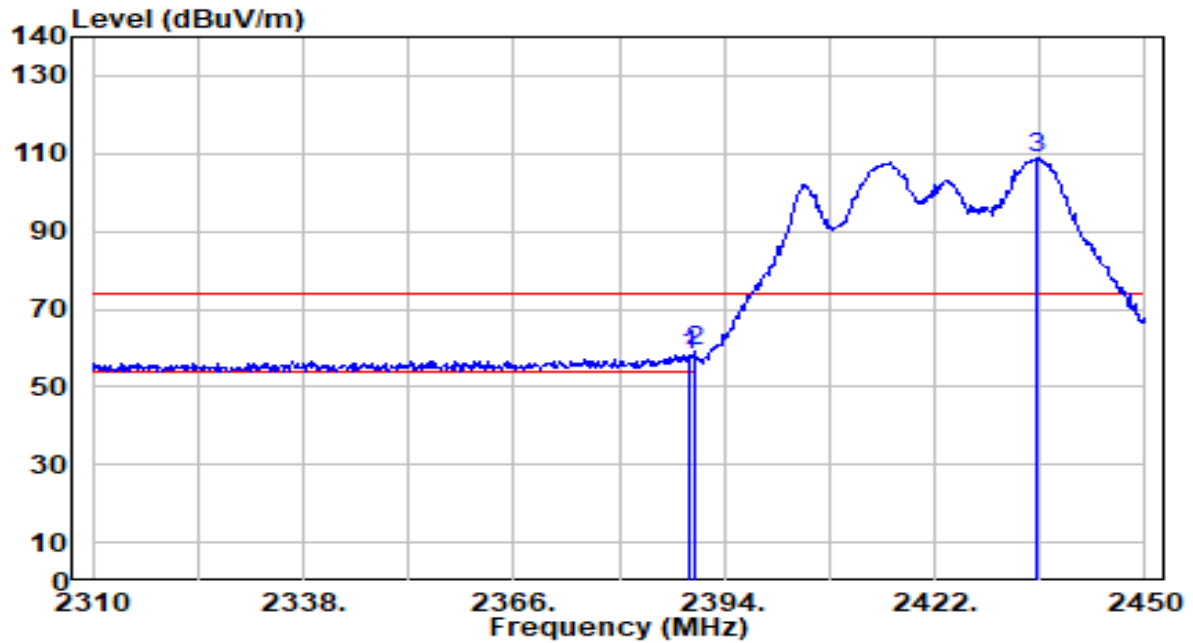


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.240	27.56	30.55	58.11	-15.89	74.00	100	213	Peak
2	*	2390.000	28.44	30.55	58.98	-15.02	74.00	100	213	Peak
3		2435.440	78.03	30.68	108.71	N/A	N/A	100	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

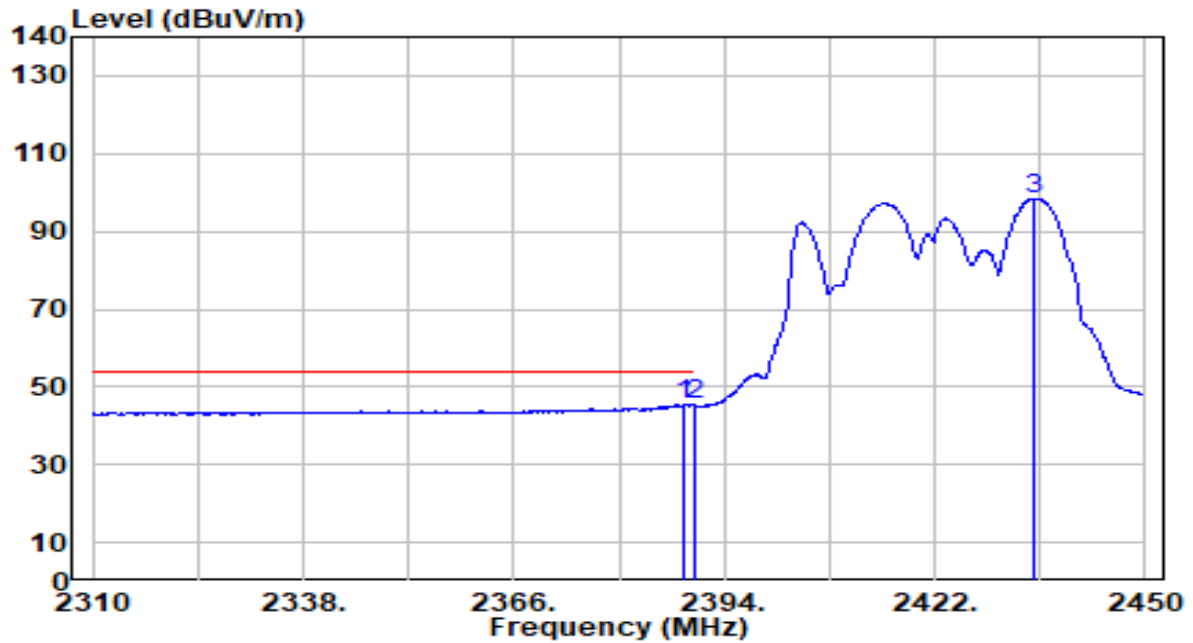


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.680	14.82	30.54	45.36	-8.64	54.00	100	213	Average
2		2390.000	14.70	30.55	45.25	-8.75	54.00	100	213	Average
3		2435.160	67.80	30.68	98.48	N/A	N/A	100	213	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

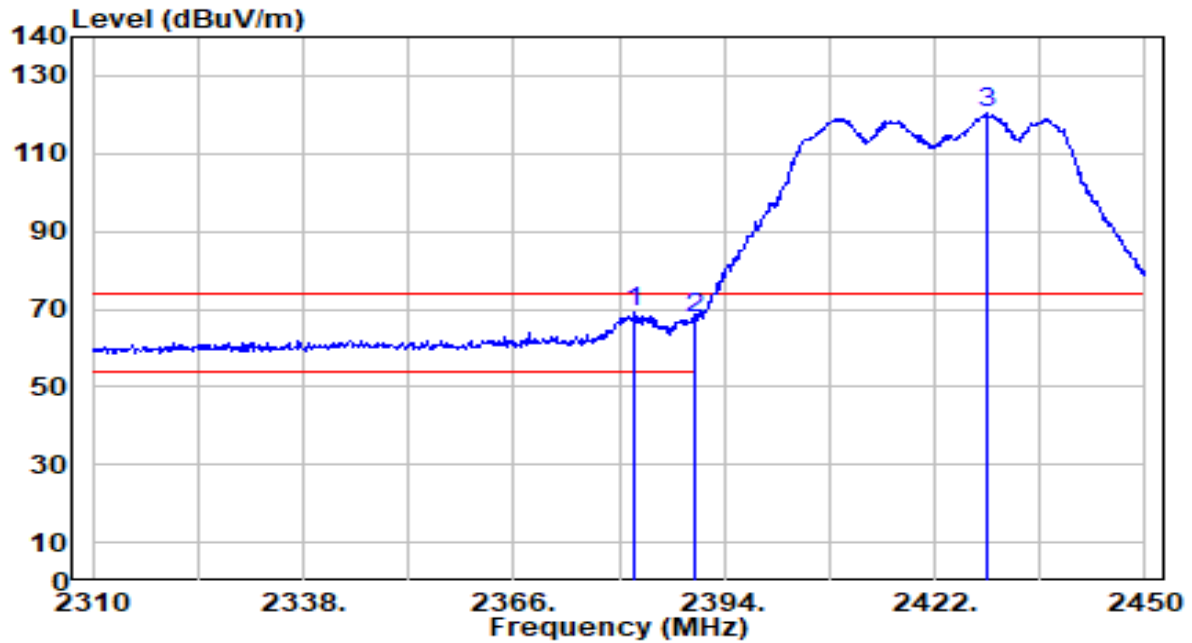


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.100	38.75	30.53	69.27	-4.73	74.00	200	331	Peak
2		2390.000	37.17	30.55	67.71	-6.29	74.00	200	331	Peak
3		2428.860	89.55	30.66	120.20	N/A	N/A	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

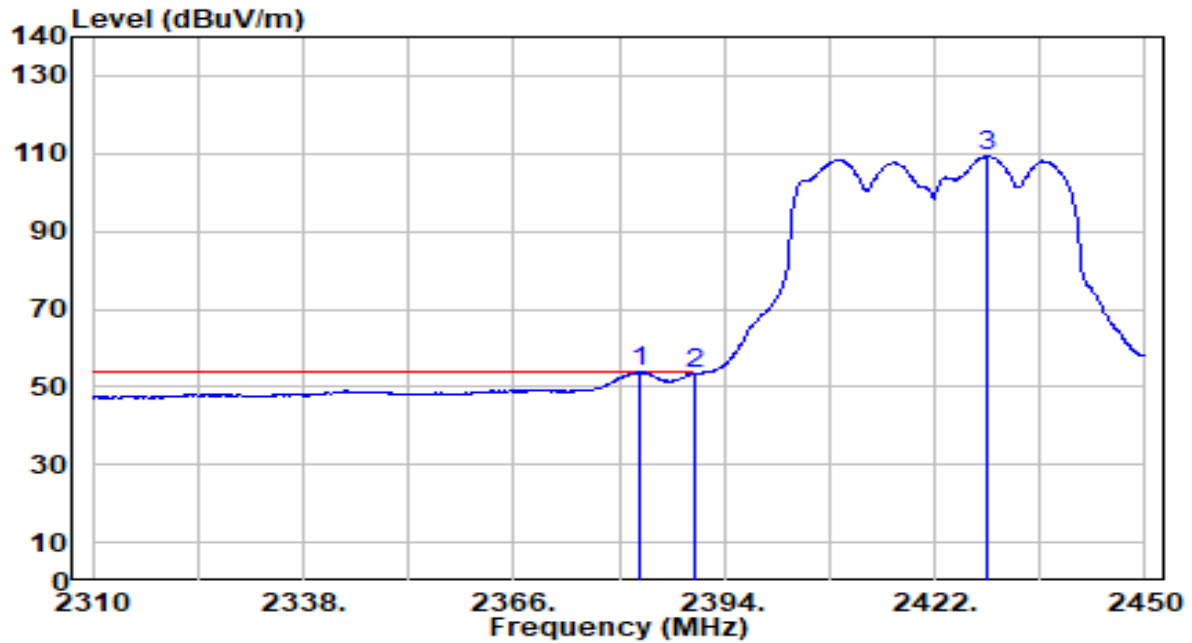


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.800	23.31	30.53	53.84	-0.16	54.00	200	331	Average
2		2390.000	22.58	30.55	53.13	-0.87	54.00	200	331	Average
3		2429.140	78.66	30.66	109.32	N/A	N/A	200	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

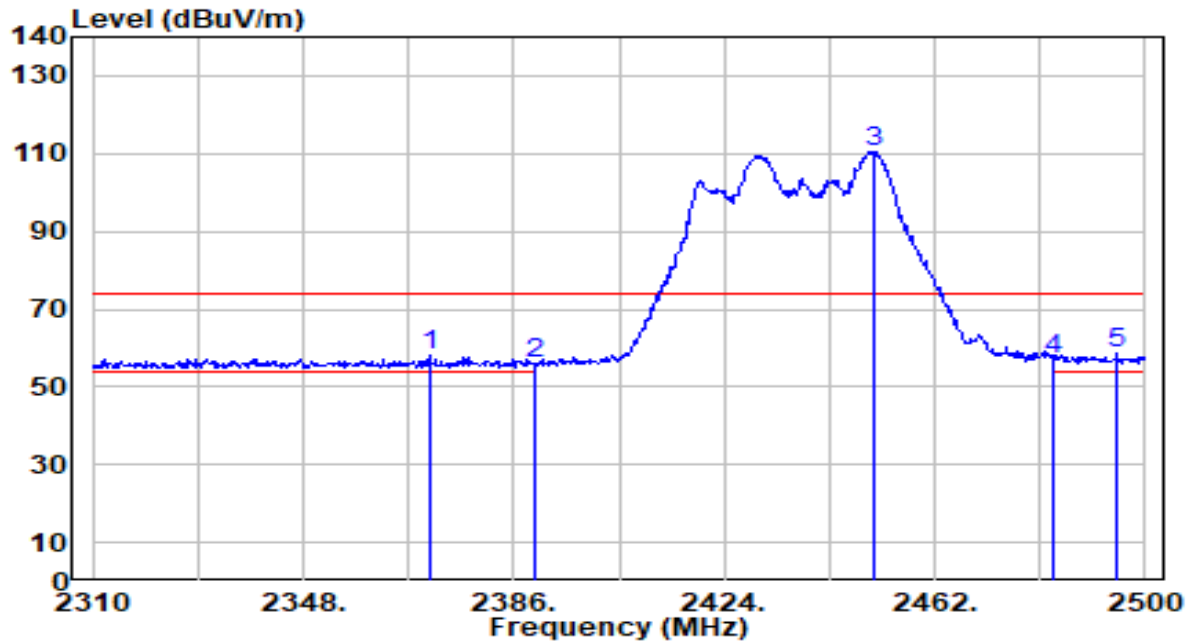


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2370.800	27.75	30.49	58.24	-15.76	74.00	200	225	Peak
2	2390.000	25.46	30.55	56.01	-17.99	74.00	200	225	Peak
3	2451.170	79.94	30.72	110.66	N/A	N/A	200	225	Peak
4	2483.500	26.38	30.81	57.20	-16.80	74.00	200	225	Peak
5	* 2495.060	27.55	30.85	58.39	-15.61	74.00	200	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

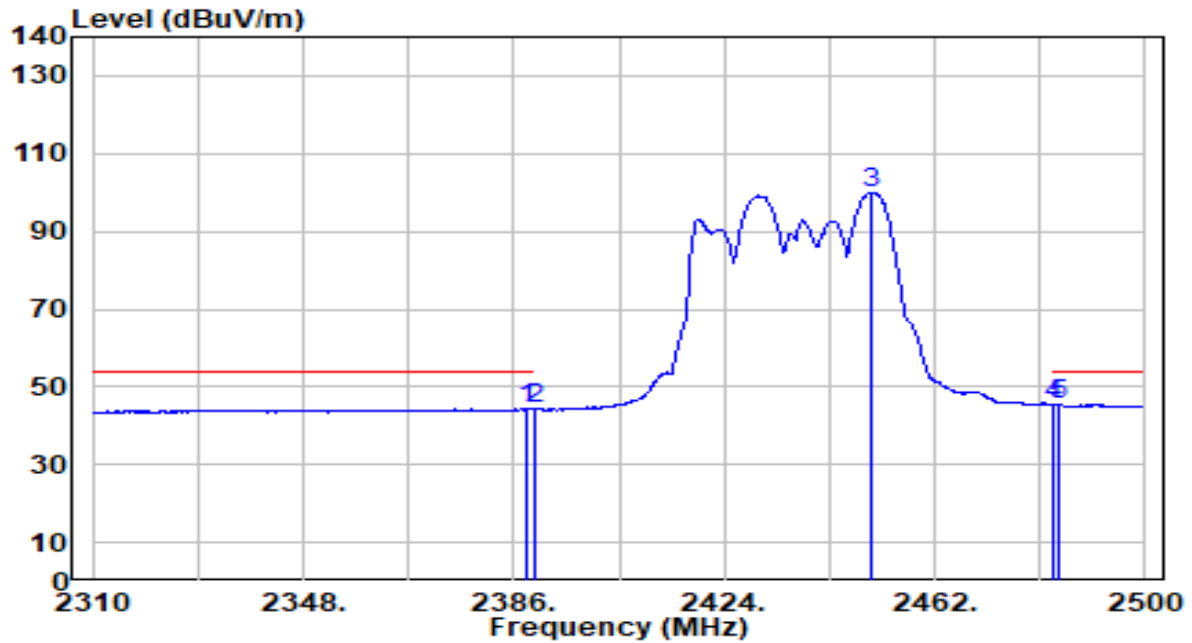


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	13.72	30.54	44.26	-9.74	54.00	200	225	Average
2	2390.000	13.62	30.55	44.16	-9.84	54.00	200	225	Average
3	2450.790	69.29	30.72	100.01	N/A	N/A	200	225	Average
4	* 2483.500	14.75	30.81	45.56	-8.44	54.00	200	225	Average
5	2484.230	14.65	30.82	45.46	-8.54	54.00	200	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

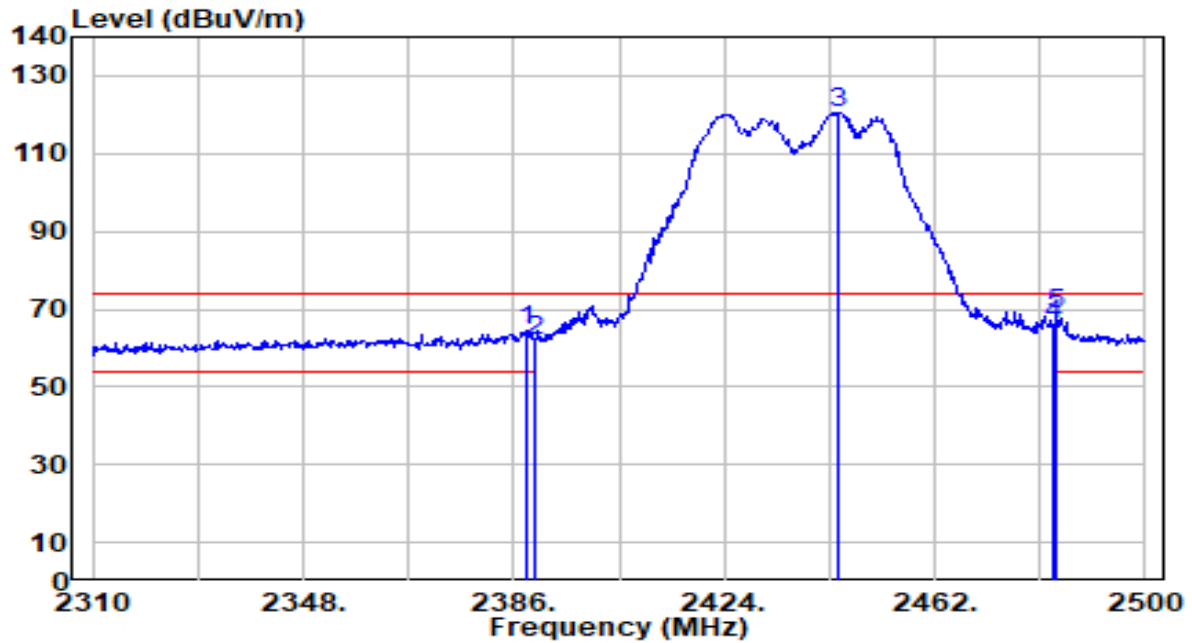


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	34.16	30.54	64.71	-9.29	74.00	200	329	Peak
2	2390.000	31.13	30.55	61.68	-12.32	74.00	200	329	Peak
3	2444.520	89.91	30.70	120.61	N/A	N/A	200	329	Peak
4	2483.500	35.18	30.81	65.99	-8.01	74.00	200	329	Peak
5	* 2484.040	37.85	30.81	68.67	-5.33	74.00	200	329	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

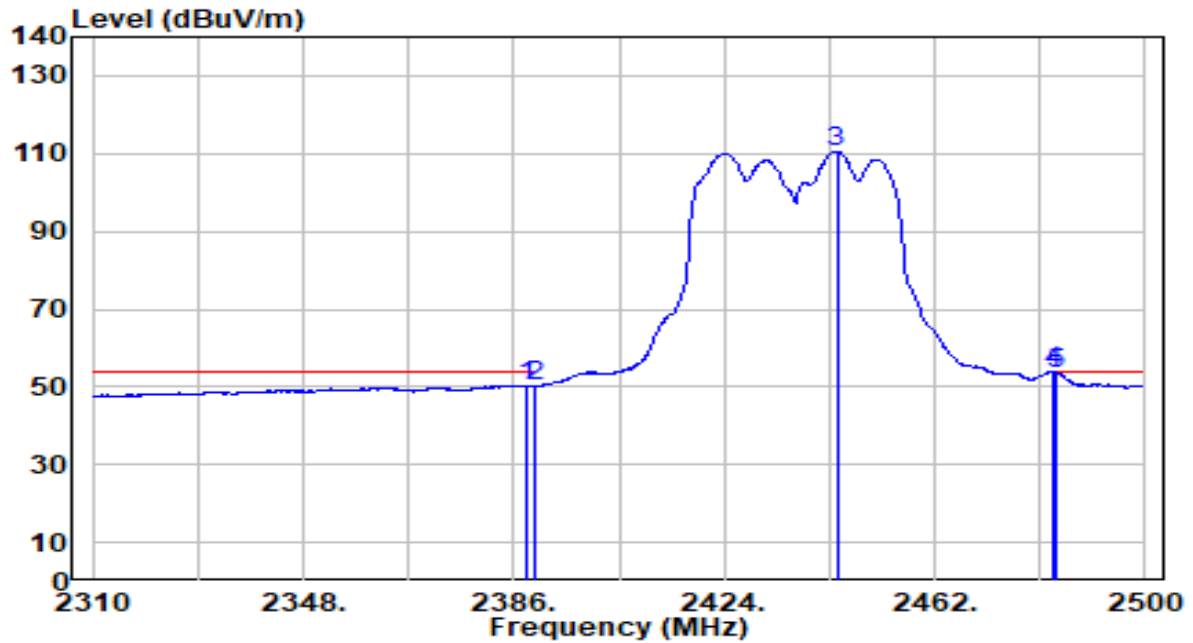


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.280	19.87	30.54	50.41	-3.59	54.00	200	329	Average
2		2390.000	19.78	30.55	50.33	-3.67	54.00	200	329	Average
3		2444.330	79.87	30.70	110.57	N/A	N/A	200	329	Average
4	*	2483.500	23.00	30.81	53.82	-0.18	54.00	200	329	Average
5		2484.040	22.70	30.81	53.52	-0.48	54.00	200	329	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

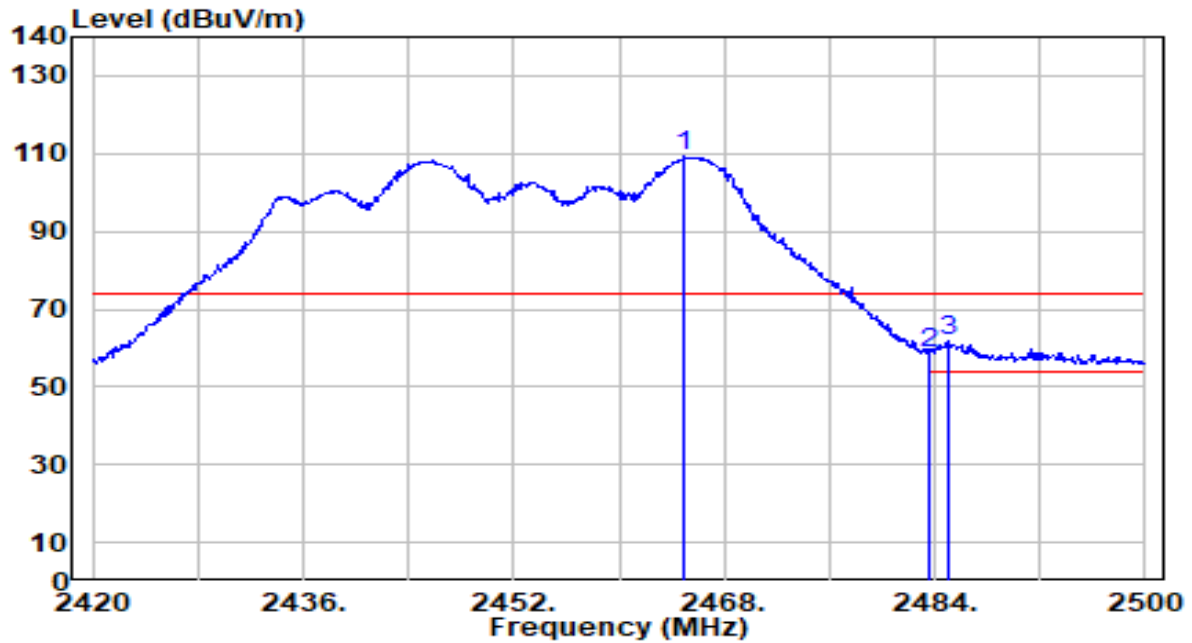


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.960	78.36	30.76	109.12	N/A	N/A	200	226	Peak
2		2483.500	28.05	30.81	58.87	-15.13	74.00	200	226	Peak
3	*	2485.120	31.14	30.82	61.96	-12.04	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

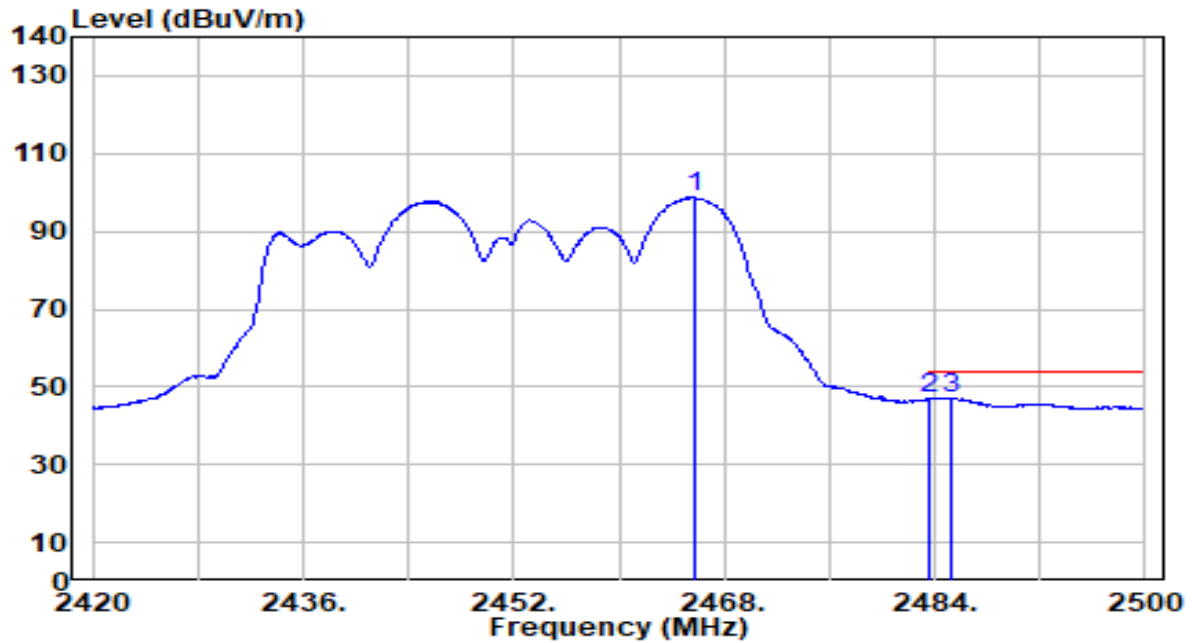


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.680	67.86	30.76	98.62	N/A	N/A	200	226	Average
2	2483.500	16.06	30.81	46.88	-7.12	54.00	200	226	Average
3	* 2485.280	16.37	30.82	47.19	-6.81	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

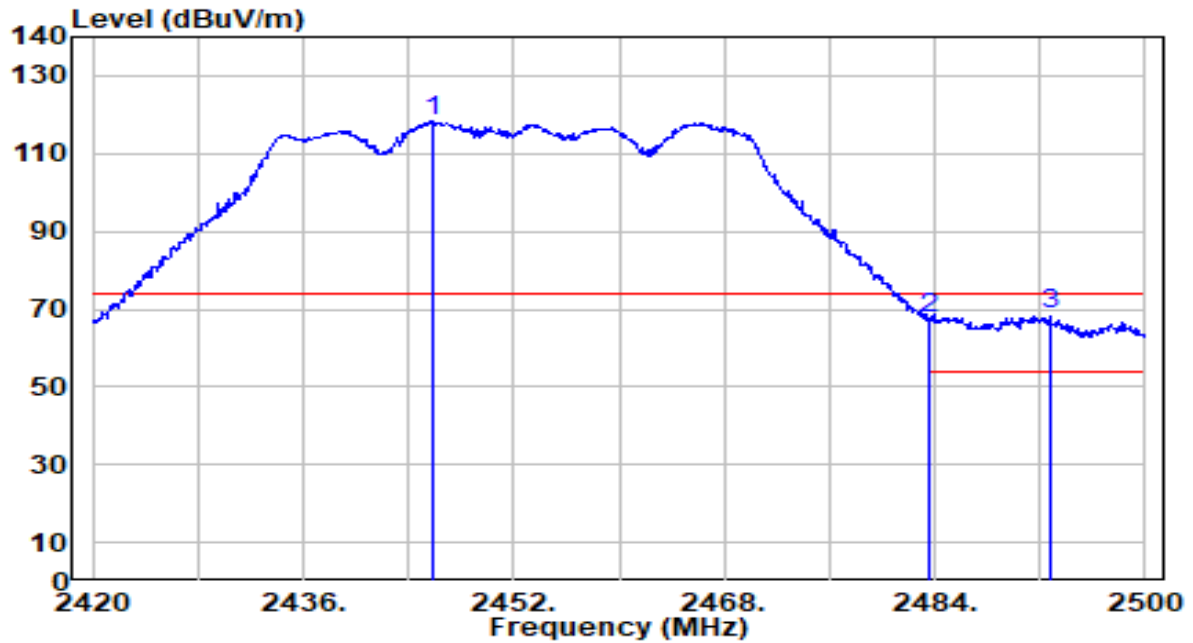


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.760	87.53	30.71	118.23	N/A	N/A	200	341	Peak
2	2483.500	36.57	30.81	67.38	-6.62	74.00	200	341	Peak
3	* 2492.800	37.85	30.84	68.69	-5.31	74.00	200	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

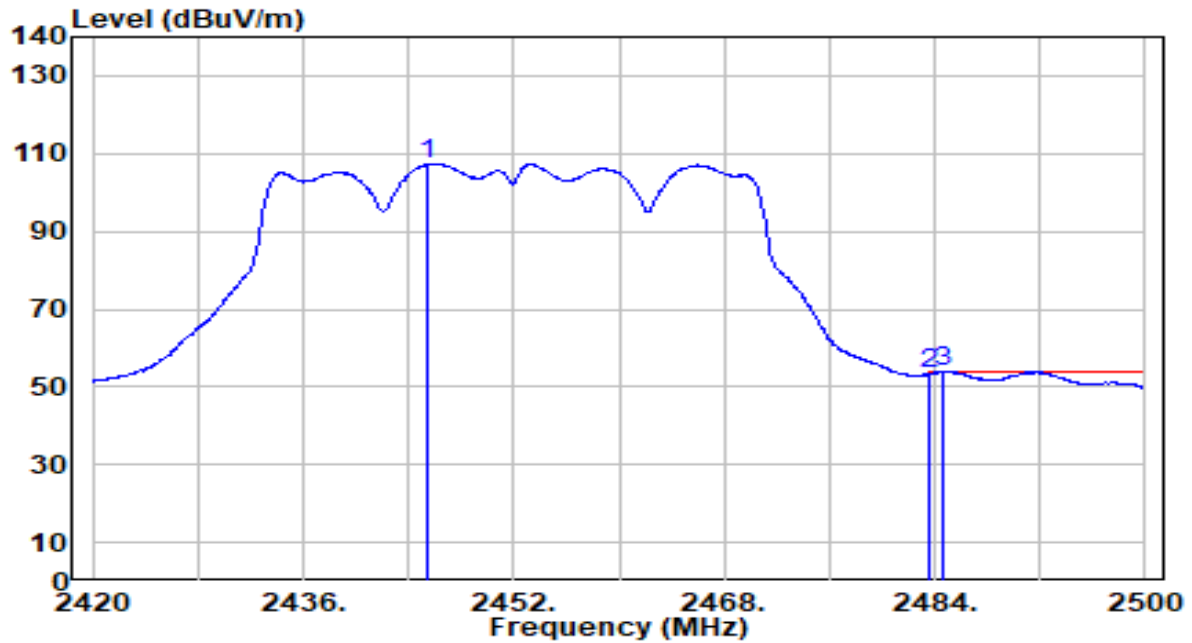


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.520	76.72	30.71	107.42	N/A	N/A	200	341	Average
2	2483.500	22.39	30.81	53.21	-0.79	54.00	200	341	Average
3	* 2484.560	23.03	30.82	53.84	-0.16	54.00	200	341	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

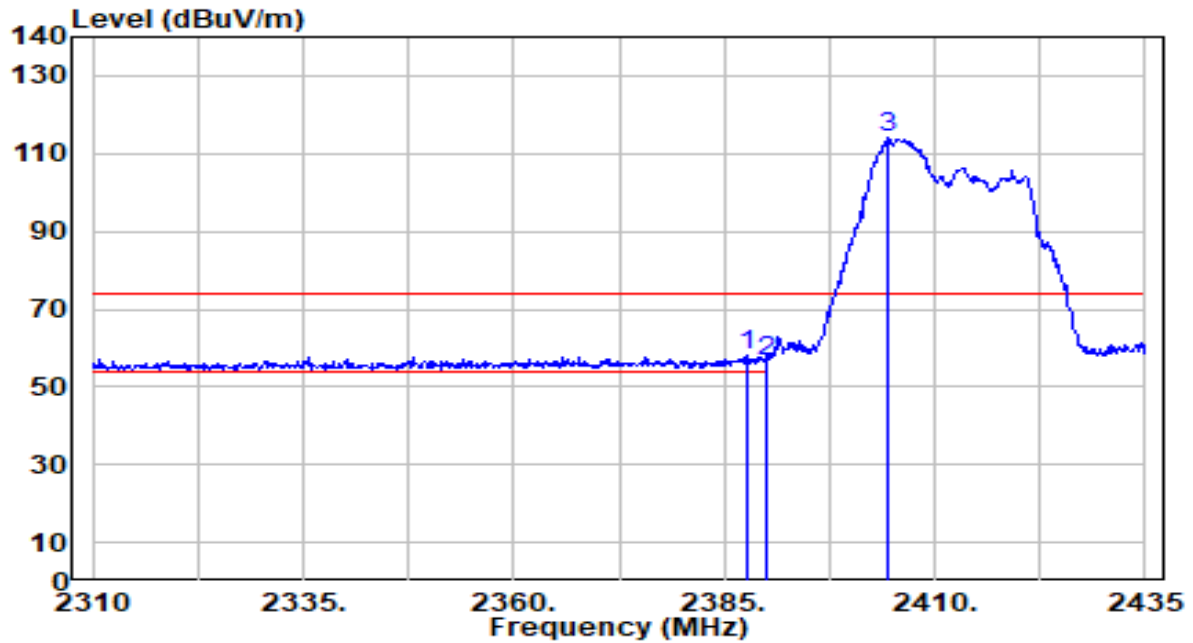


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	27.49	30.54	58.03	-15.97	74.00	110	208	Peak
2		2390.000	25.96	30.55	56.50	-17.50	74.00	110	208	Peak
3		2404.375	83.31	30.59	113.90	N/A	N/A	110	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

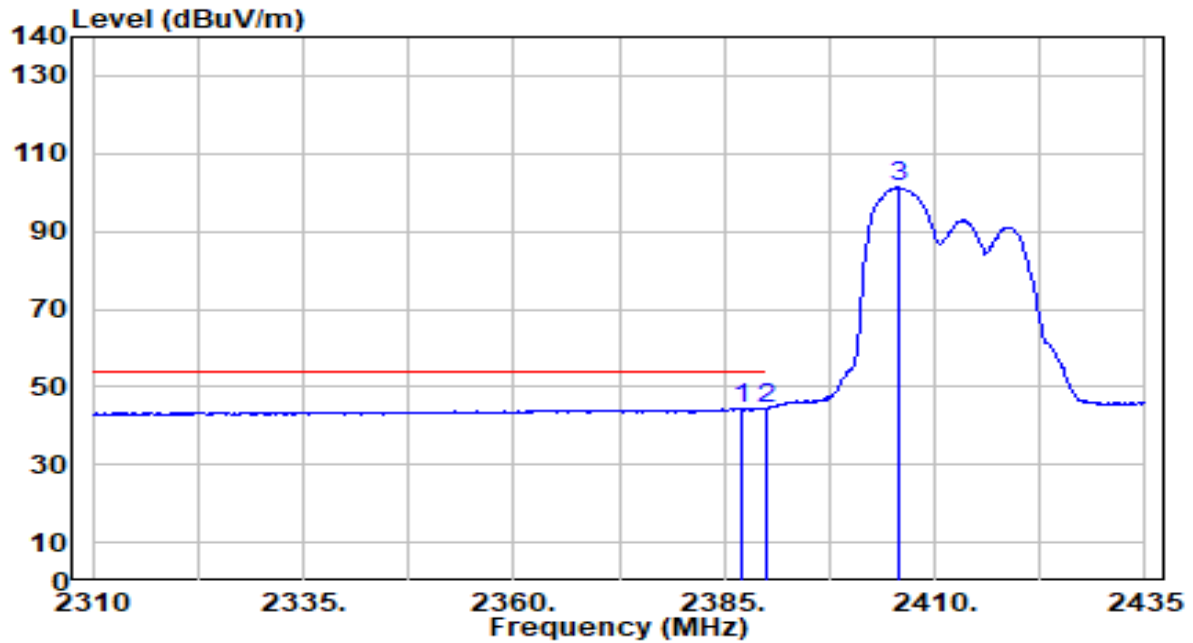


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.125	13.83	30.54	44.37	-9.63	54.00	110	208	Average
2	*	2390.000	13.92	30.55	44.47	-9.53	54.00	110	208	Average
3		2405.625	70.78	30.59	101.37	N/A	N/A	110	208	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

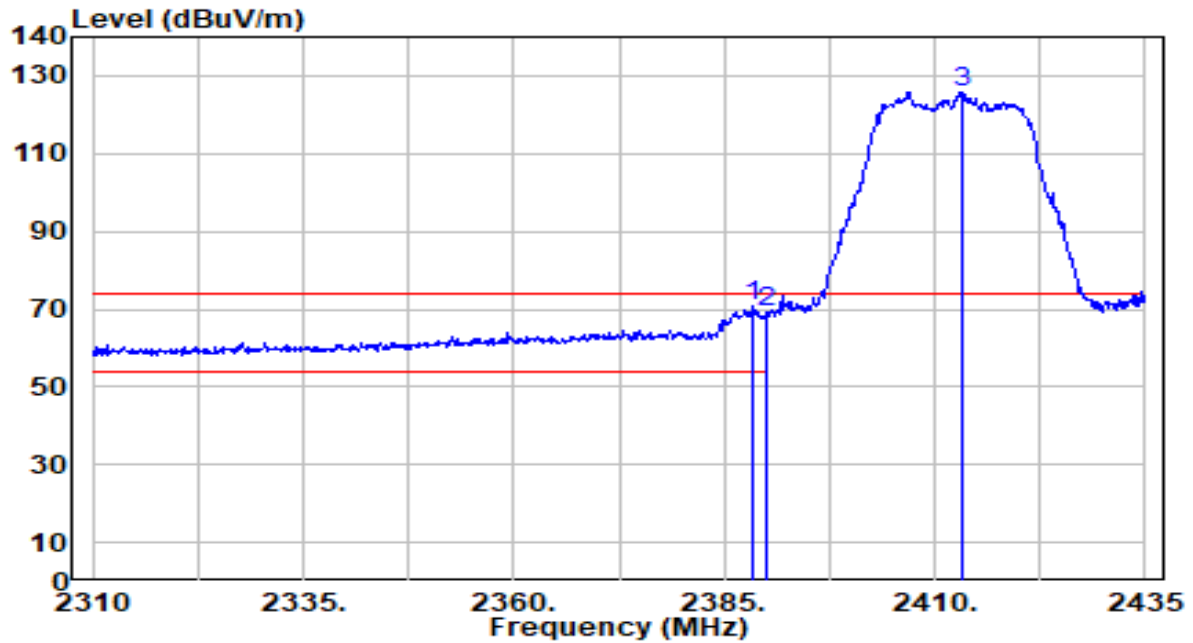


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	40.34	30.54	70.89	-3.11	74.00	200	340	Peak
2		2390.000	38.50	30.55	69.05	-4.95	74.00	200	340	Peak
3		2413.375	95.27	30.61	125.89	N/A	N/A	200	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

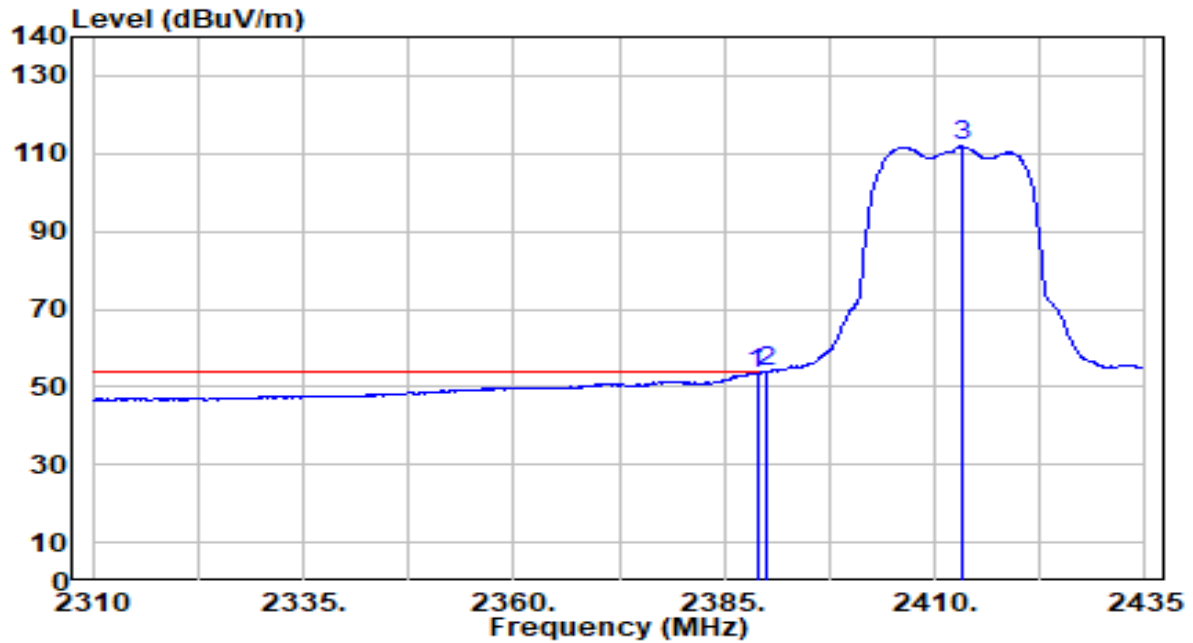


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.875	22.94	30.54	53.48	-0.52	54.00	200	340	Average
2	*	2390.000	23.33	30.55	53.88	-0.12	54.00	200	340	Average
3		2413.375	81.18	30.61	111.80	N/A	N/A	200	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

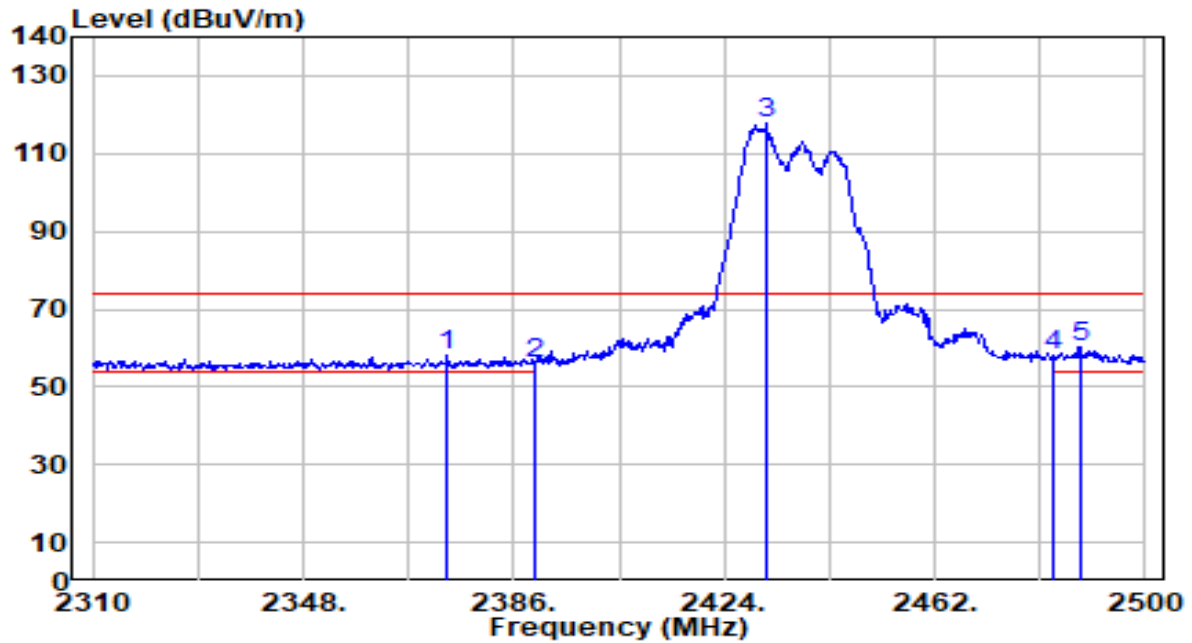


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2374.030	27.51	30.50	58.01	-15.99	74.00	183	225	Peak
2	2390.000	25.54	30.55	56.09	-17.91	74.00	183	225	Peak
3	2431.600	86.91	30.67	117.58	N/A	N/A	183	225	Peak
4	2483.500	27.24	30.81	58.05	-15.95	74.00	183	225	Peak
5	* 2488.220	29.56	30.83	60.39	-13.61	74.00	183	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

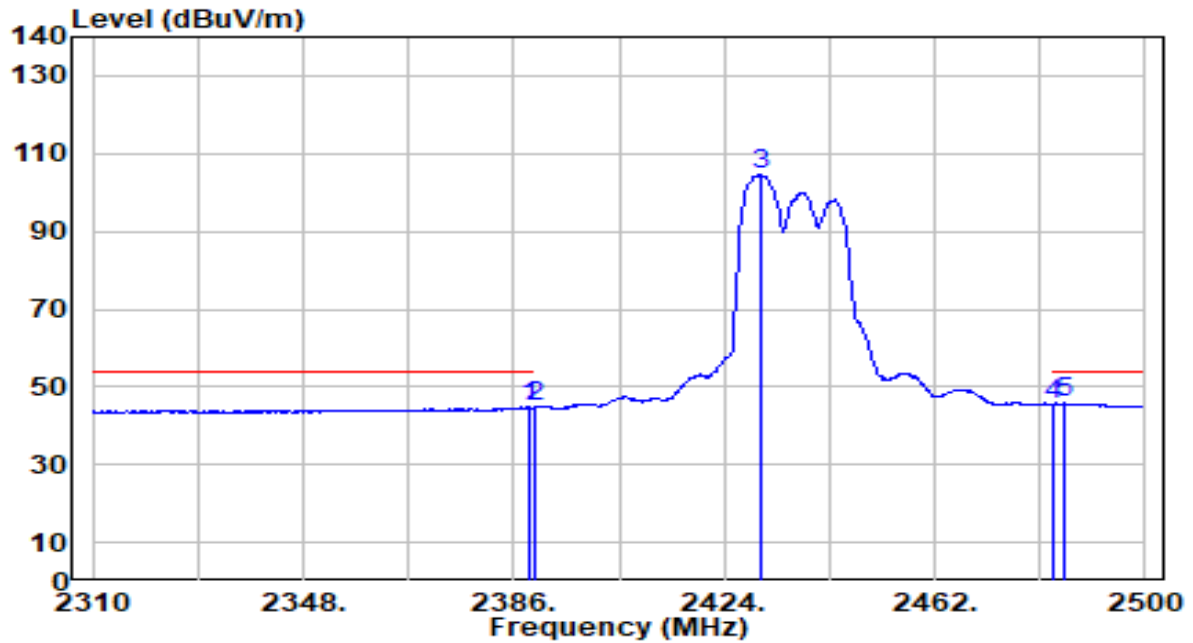


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	14.12	30.54	44.66	-9.34	54.00	183	225	Average
2	2390.000	14.29	30.55	44.83	-9.17	54.00	183	225	Average
3	2430.460	73.84	30.66	104.50	N/A	N/A	183	225	Average
4	2483.500	14.77	30.81	45.58	-8.42	54.00	183	225	Average
5	* 2485.370	14.89	30.82	45.70	-8.30	54.00	183	225	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

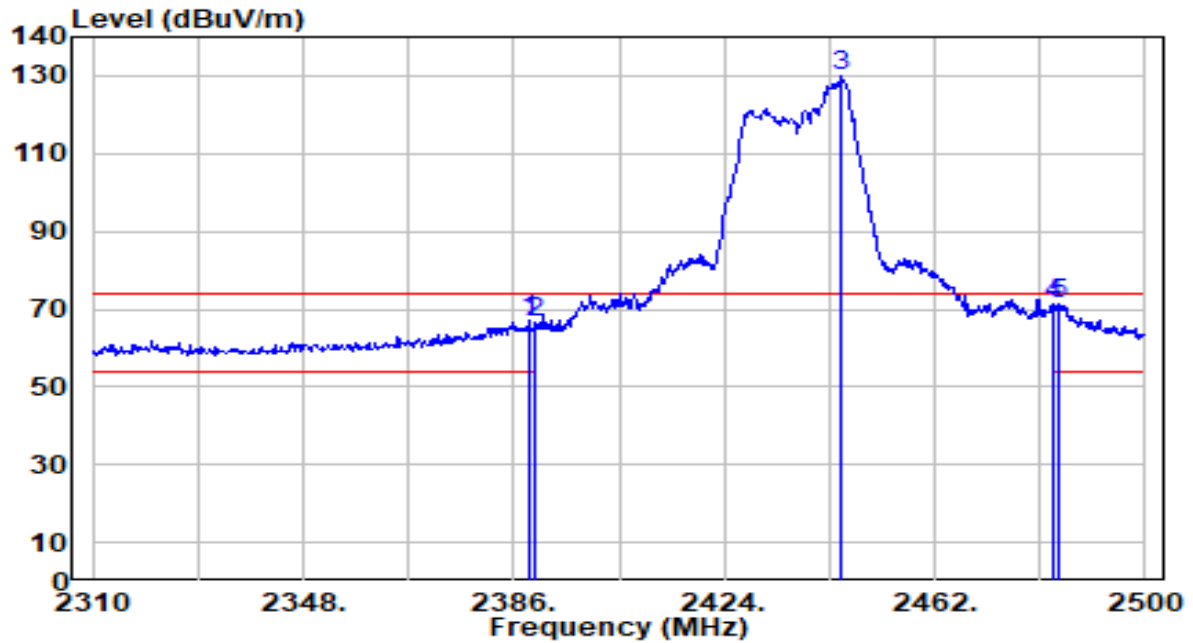


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	36.35	30.54	66.89	-7.11	74.00	215	321	Peak
2	2390.000	35.96	30.55	66.51	-7.49	74.00	215	321	Peak
3	2445.280	99.42	30.70	130.13	N/A	N/A	215	321	Peak
4	* 2483.500	40.64	30.81	71.45	-2.55	74.00	215	321	Peak
5	2484.420	40.33	30.82	71.15	-2.85	74.00	215	321	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

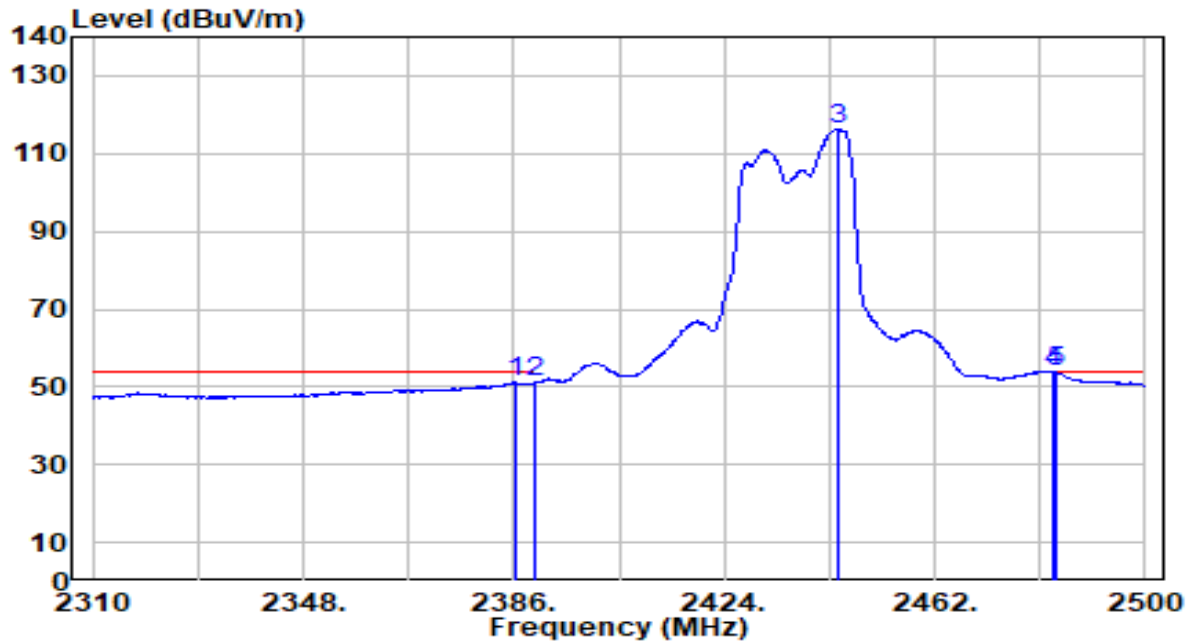


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	20.50	30.54	51.04	-2.96	54.00	215	324	Average
2	2390.000	20.74	30.55	51.29	-2.71	54.00	215	324	Average
3	2444.710	85.64	30.70	116.35	N/A	N/A	215	324	Average
4	2483.500	22.92	30.81	53.73	-0.27	54.00	215	324	Average
5	* 2484.040	23.04	30.81	53.86	-0.14	54.00	215	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

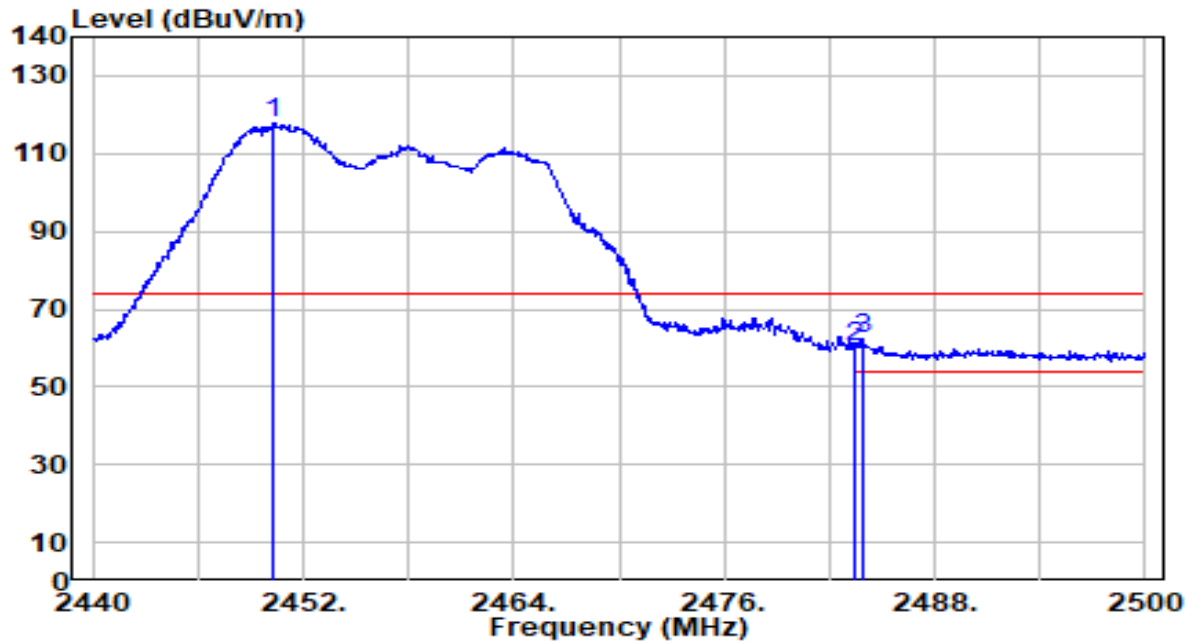


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.320	87.30	30.72	118.02	N/A	N/A	200	221	Peak
2	2483.500	29.27	30.81	60.08	-13.92	74.00	200	221	Peak
3	* 2483.920	31.68	30.81	62.50	-11.50	74.00	200	221	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

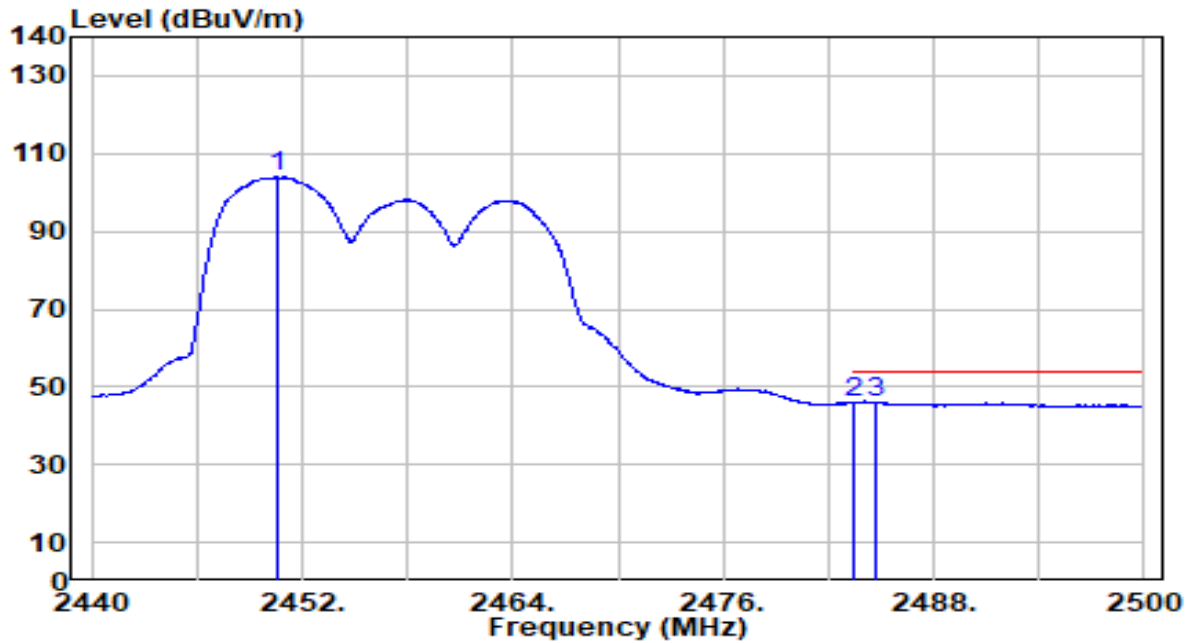


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.560	73.21	30.72	103.93	N/A	N/A	200	221	Average
2	2483.500	15.08	30.81	45.90	-8.10	54.00	200	221	Average
3	* 2484.640	15.24	30.82	46.06	-7.94	54.00	200	221	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

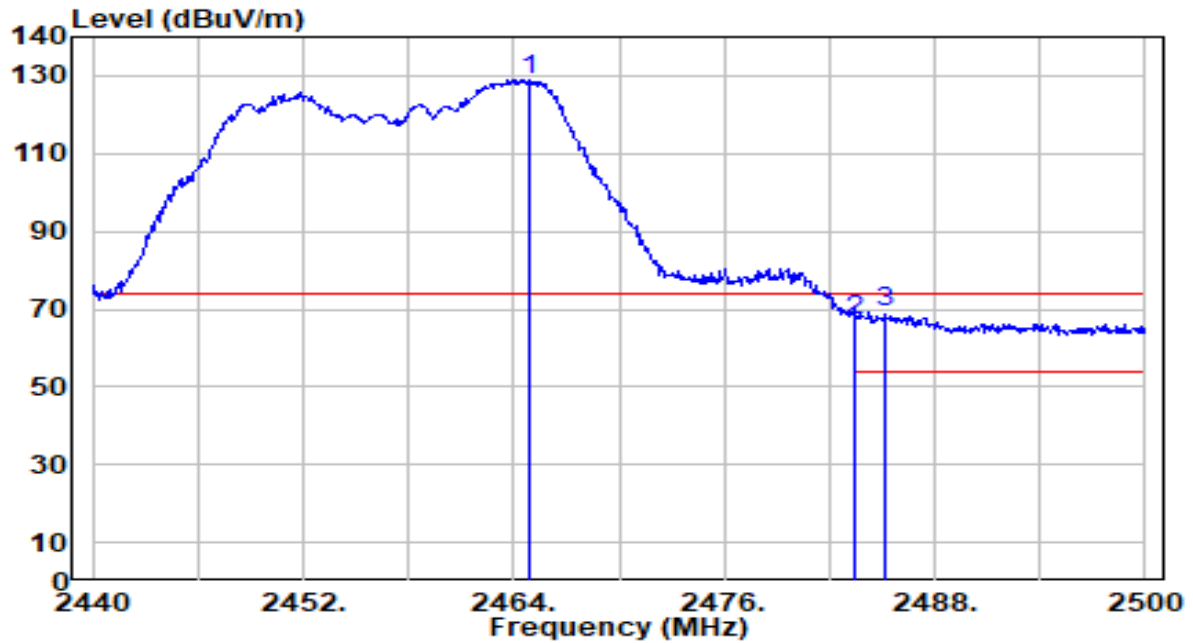


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.960	98.28	30.76	129.04	N/A	N/A	211	327	Peak
2	2483.500	36.50	30.81	67.31	-6.69	74.00	211	327	Peak
3	* 2485.180	38.23	30.82	69.05	-4.95	74.00	211	327	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

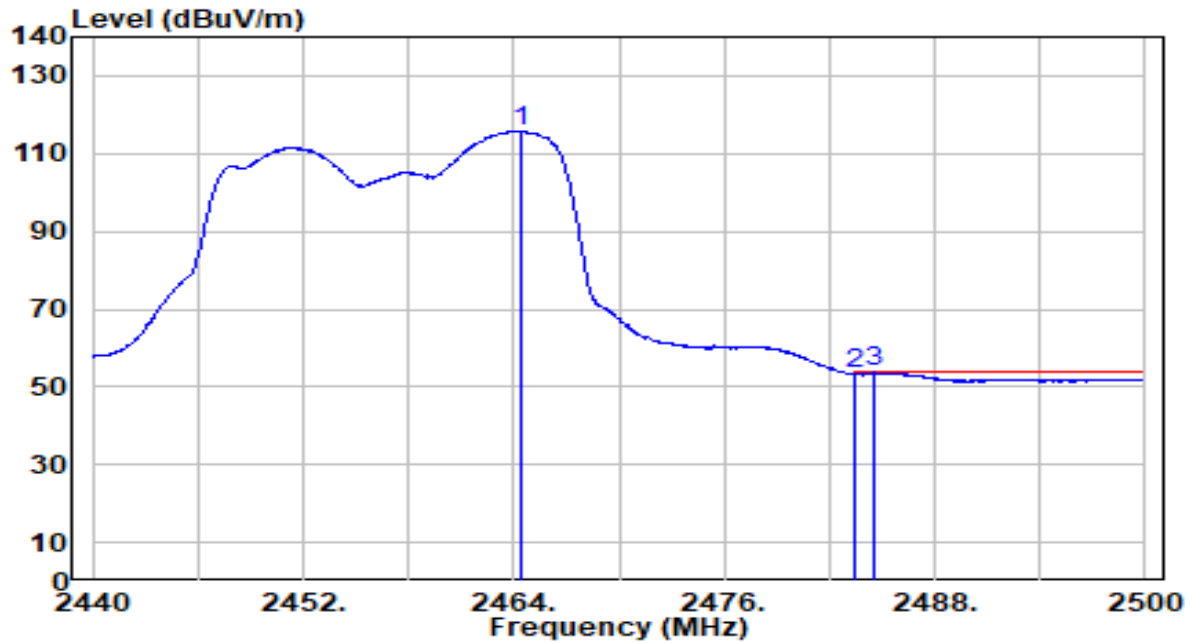


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.480	85.06	30.76	115.82	N/A	N/A	211	327	Average
2	2483.500	22.58	30.81	53.40	-0.60	54.00	211	327	Average
3	* 2484.580	23.04	30.82	53.86	-0.14	54.00	211	327	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

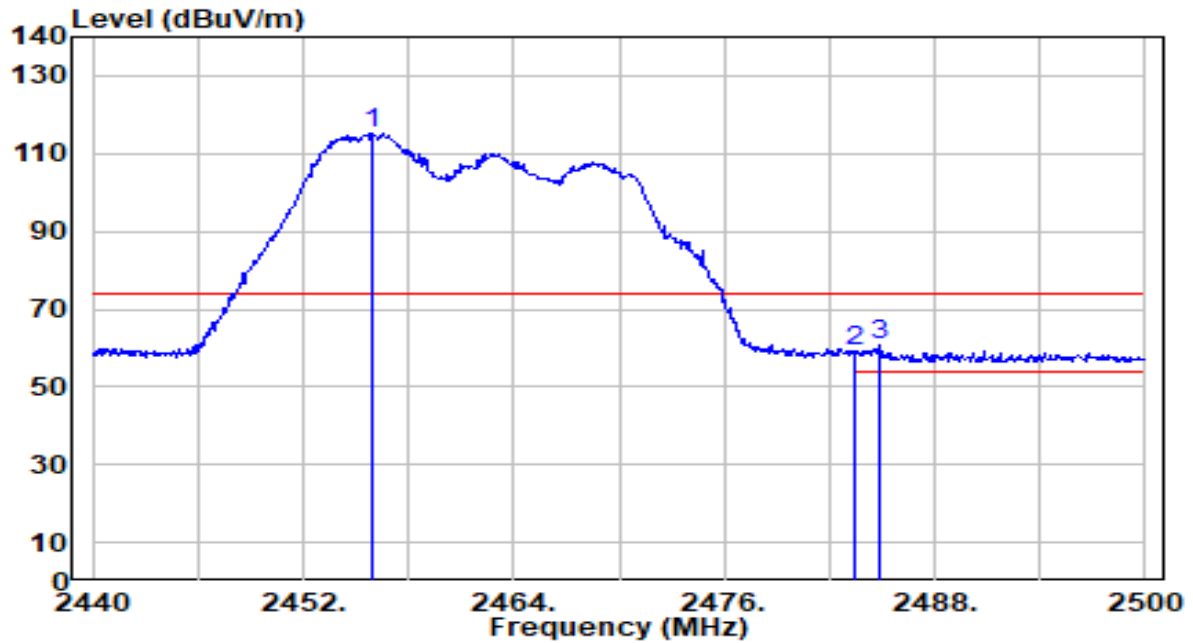


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.960	84.40	30.73	115.14	N/A	N/A	200	226	Peak
2	2483.500	28.35	30.81	59.17	-14.83	74.00	200	226	Peak
3	* 2484.820	29.68	30.82	60.50	-13.50	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

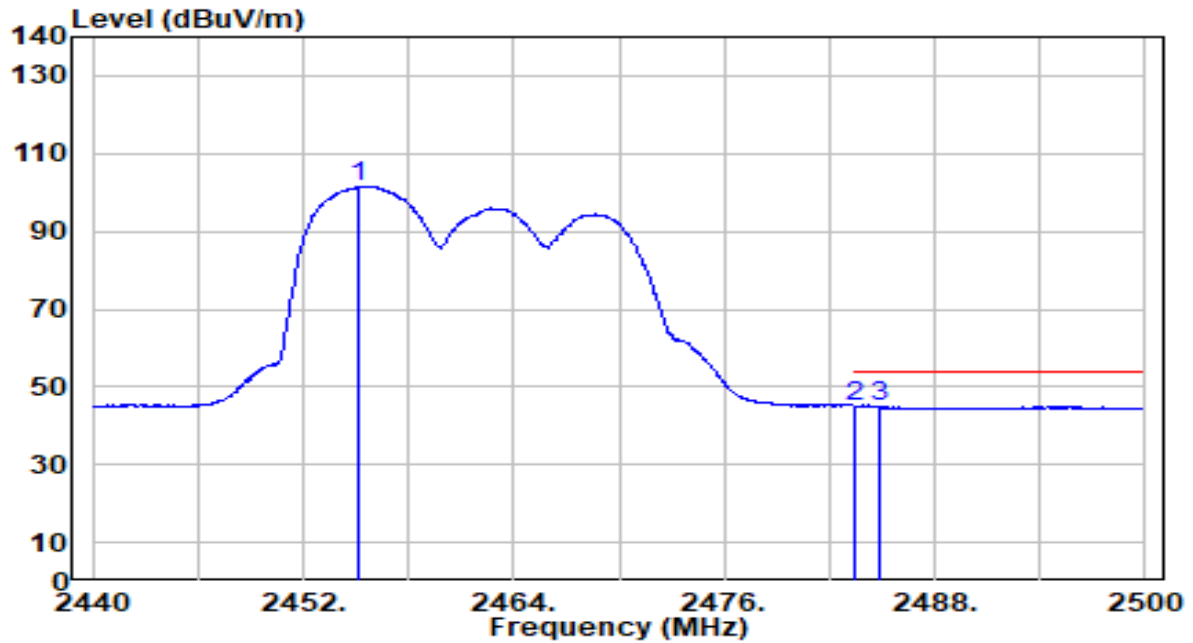


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.180	70.68	30.73	101.41	N/A	N/A	200	226	Average
2	*	2483.500	14.30	30.81	45.11	-8.89	54.00	200	226	Average
3		2484.820	14.15	30.82	44.97	-9.03	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

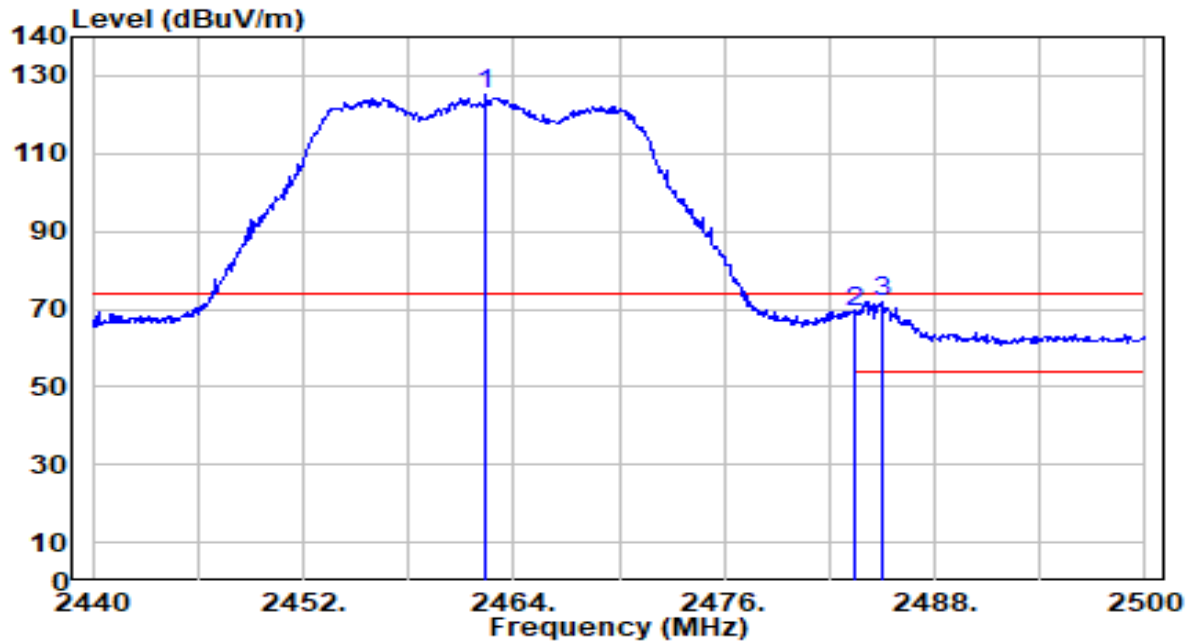


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.440	94.46	30.75	125.22	N/A	N/A	200	342	Peak
2	2483.500	38.48	30.81	69.30	-4.70	74.00	200	342	Peak
3	* 2485.060	41.21	30.82	72.03	-1.97	74.00	200	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

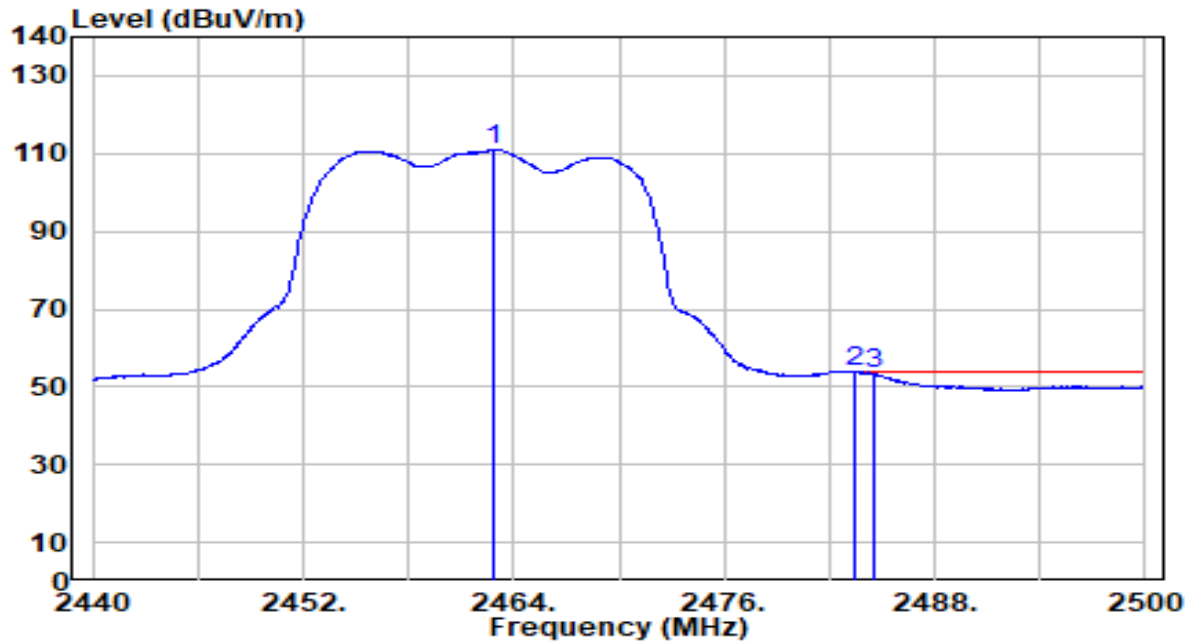


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.800	80.21	30.75	110.97	N/A	N/A	200	342	Average
2	*	2483.500	23.03	30.81	53.84	-0.16	54.00	200	342	Average
3		2484.520	22.36	30.82	53.18	-0.82	54.00	200	342	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

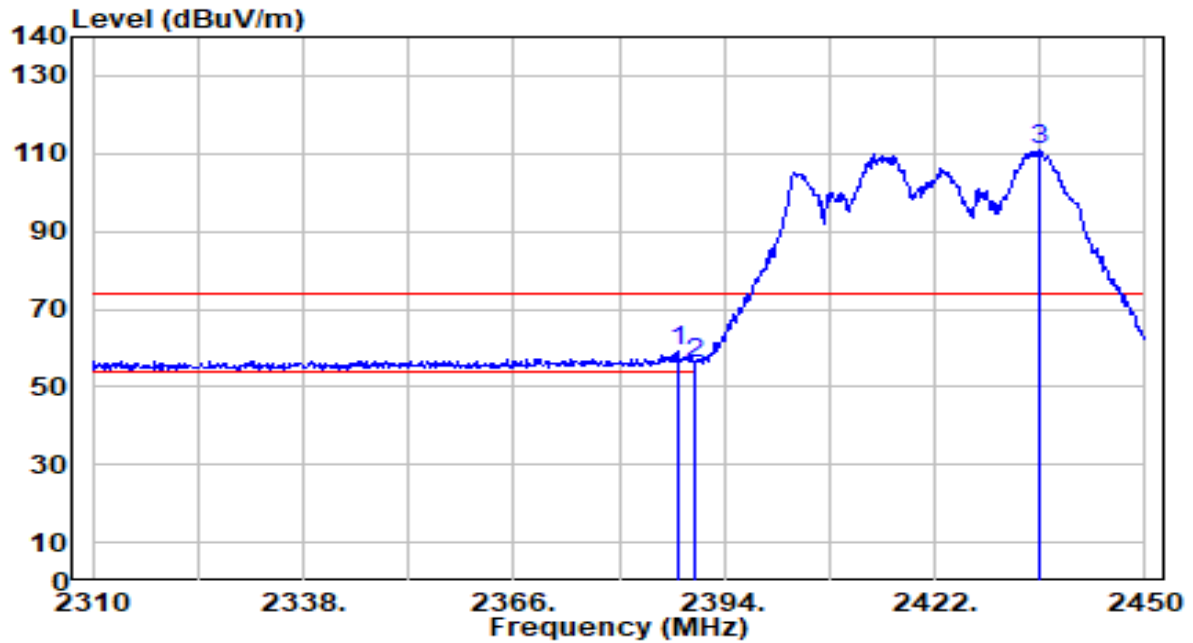


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.840	28.45	30.54	58.99	-15.01	74.00	103	213	Peak
2		2390.000	25.71	30.55	56.26	-17.74	74.00	103	213	Peak
3		2436.000	80.01	30.68	110.68	N/A	N/A	103	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

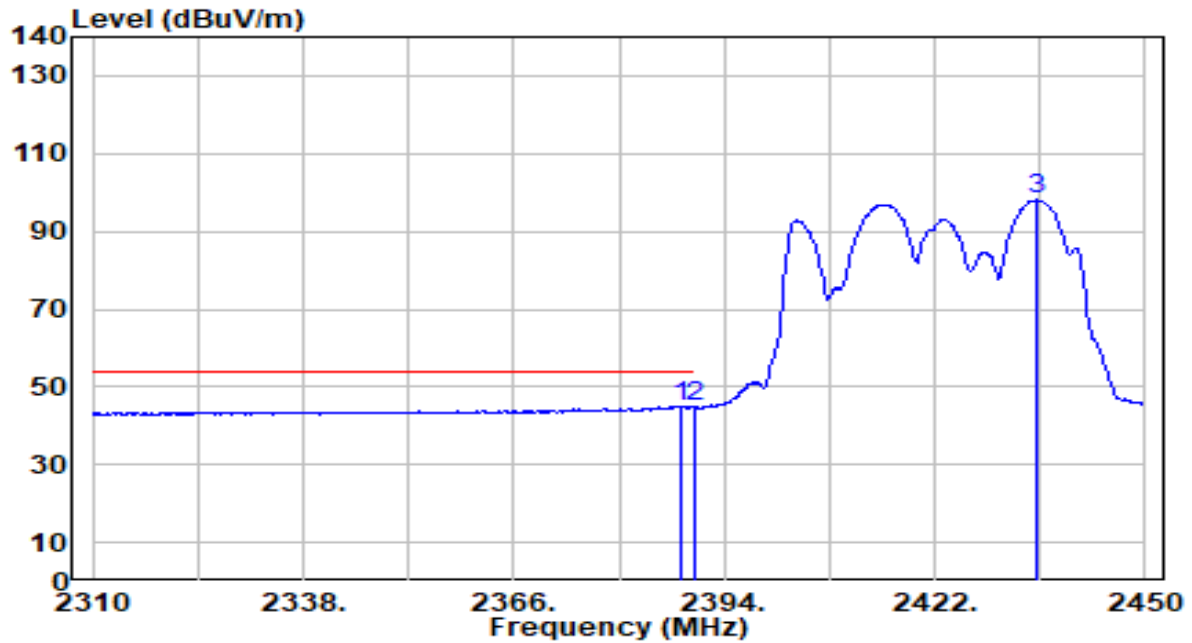


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.260	14.33	30.54	44.87	-9.13	54.00	103	213	Average
2		2390.000	14.15	30.55	44.69	-9.31	54.00	103	213	Average
3		2435.440	67.42	30.68	98.10	N/A	N/A	103	213	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

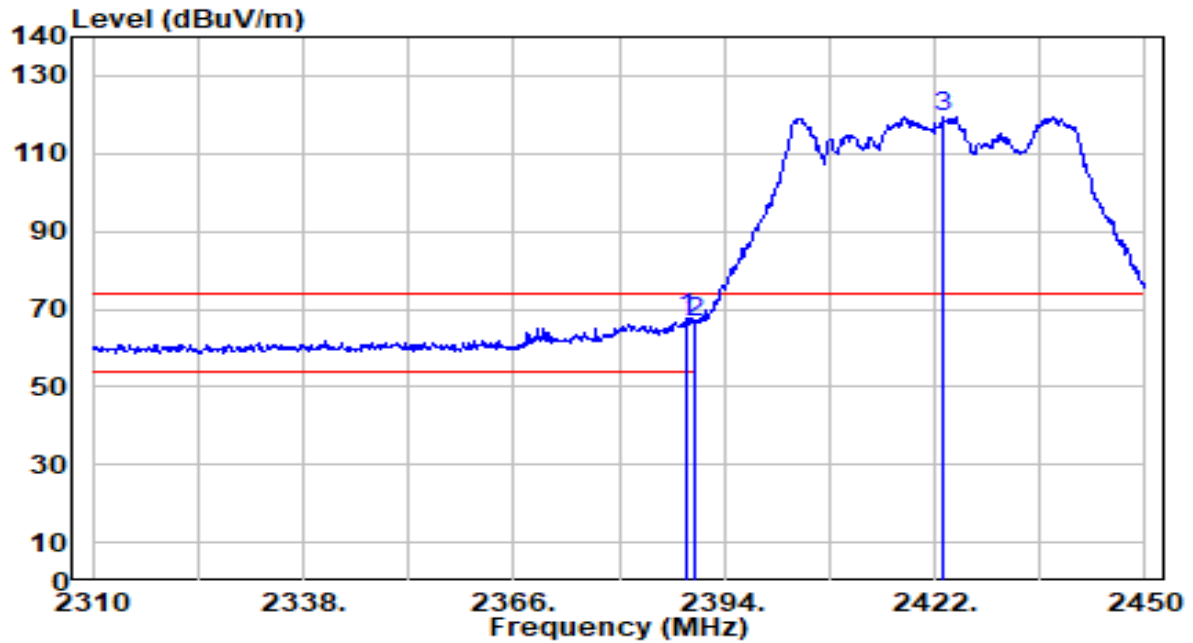


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.960	36.98	30.54	67.53	-6.47	74.00	200	299	Peak
2		2390.000	36.23	30.55	66.77	-7.23	74.00	200	299	Peak
3		2423.260	88.83	30.64	119.47	N/A	N/A	200	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

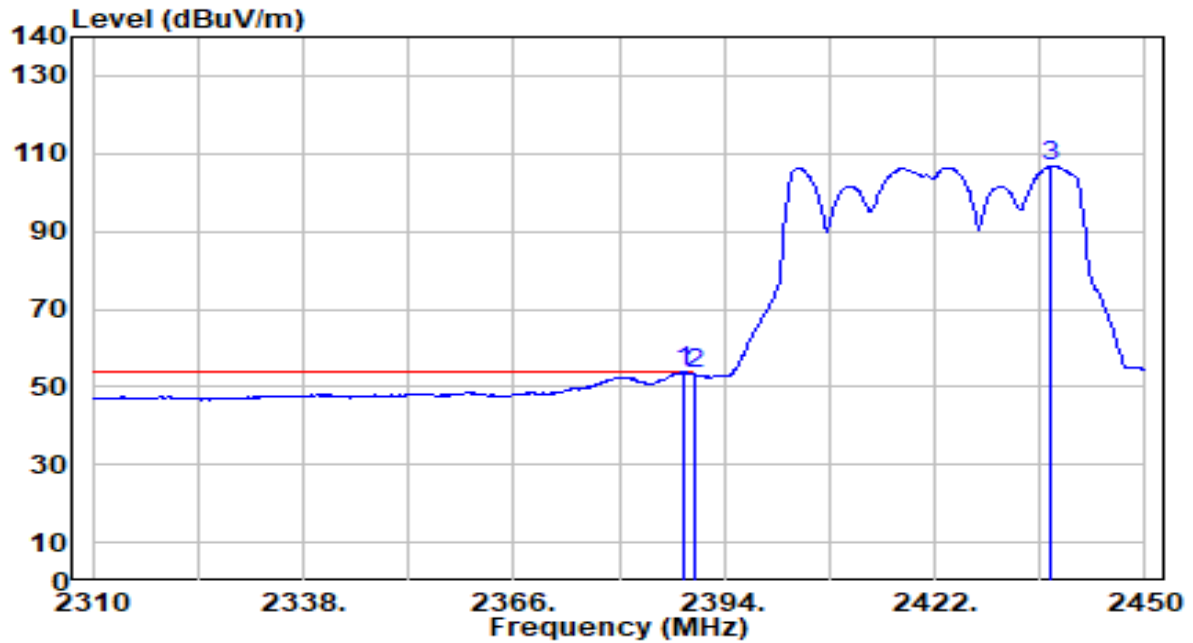


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.540	23.33	30.54	53.87	-0.13	54.00	200	299	Average
2		2390.000	22.69	30.55	53.24	-0.76	54.00	200	299	Average
3		2437.400	76.06	30.68	106.74	N/A	N/A	200	299	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

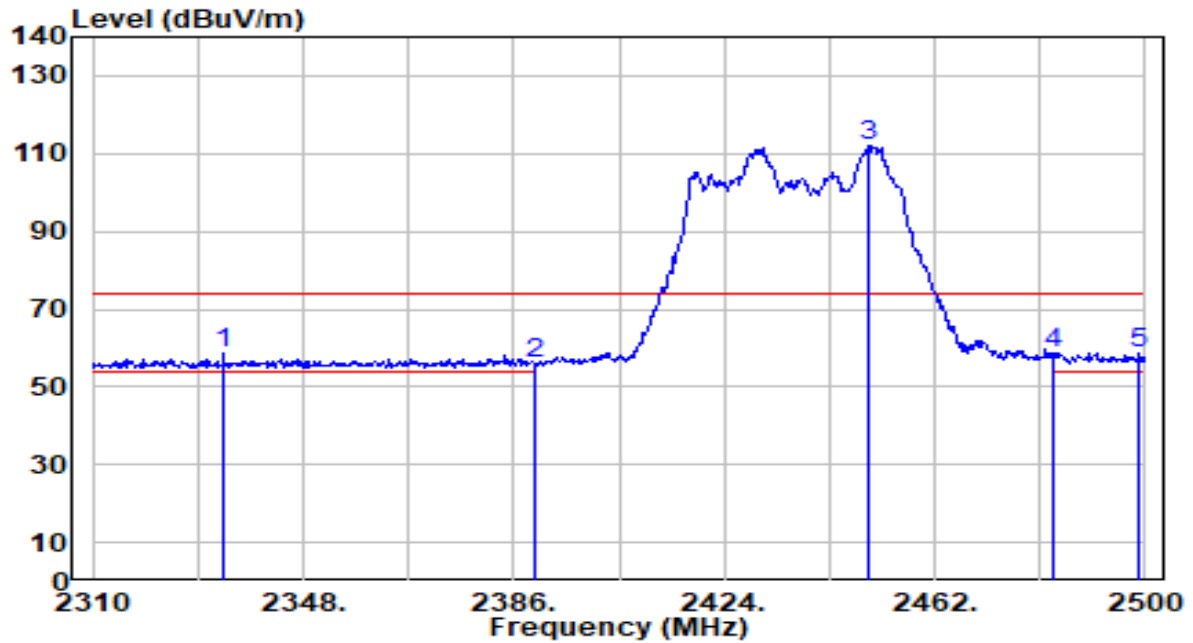


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2333.560	28.15	30.39	58.54	-15.46	74.00	200	222	Peak
2	2390.000	25.59	30.55	56.14	-17.86	74.00	200	222	Peak
3	2450.030	81.48	30.72	112.20	N/A	N/A	200	222	Peak
4	2483.500	27.62	30.81	58.43	-15.57	74.00	200	222	Peak
5	* 2499.050	27.69	30.86	58.55	-15.45	74.00	200	222	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

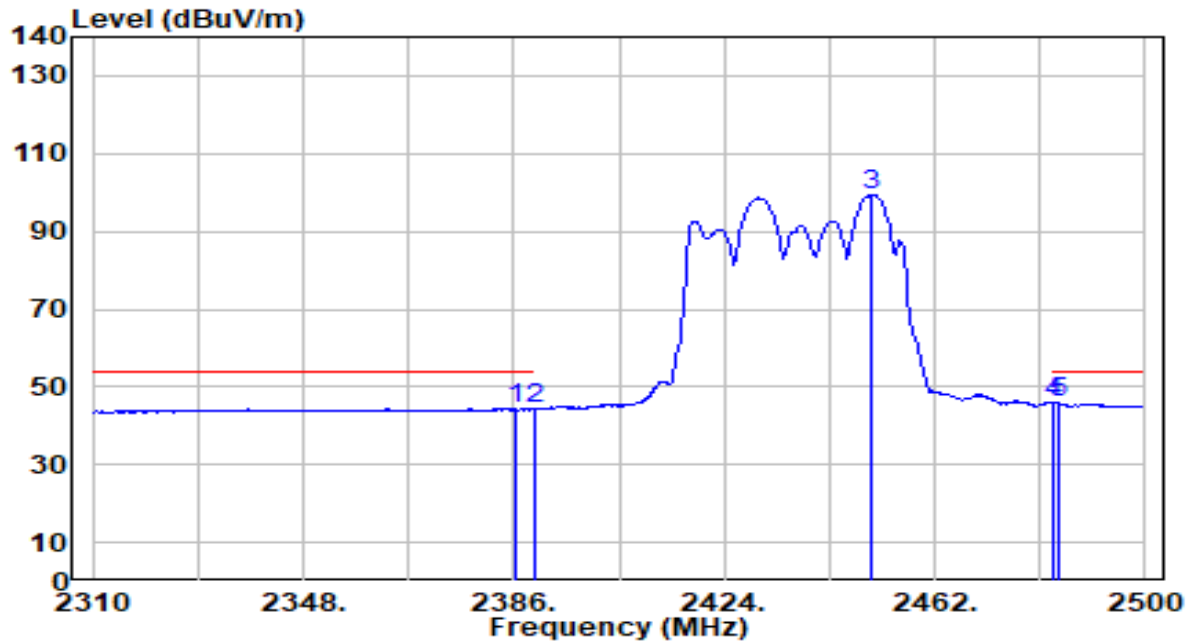


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	13.81	30.54	44.34	-9.66	54.00	200	222	Average
2	2390.000	13.64	30.55	44.19	-9.81	54.00	200	222	Average
3	2450.410	68.69	30.72	99.41	N/A	N/A	200	222	Average
4	2483.500	14.99	30.81	45.81	-8.19	54.00	200	222	Average
5	* 2484.230	15.19	30.82	46.00	-8.00	54.00	200	222	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

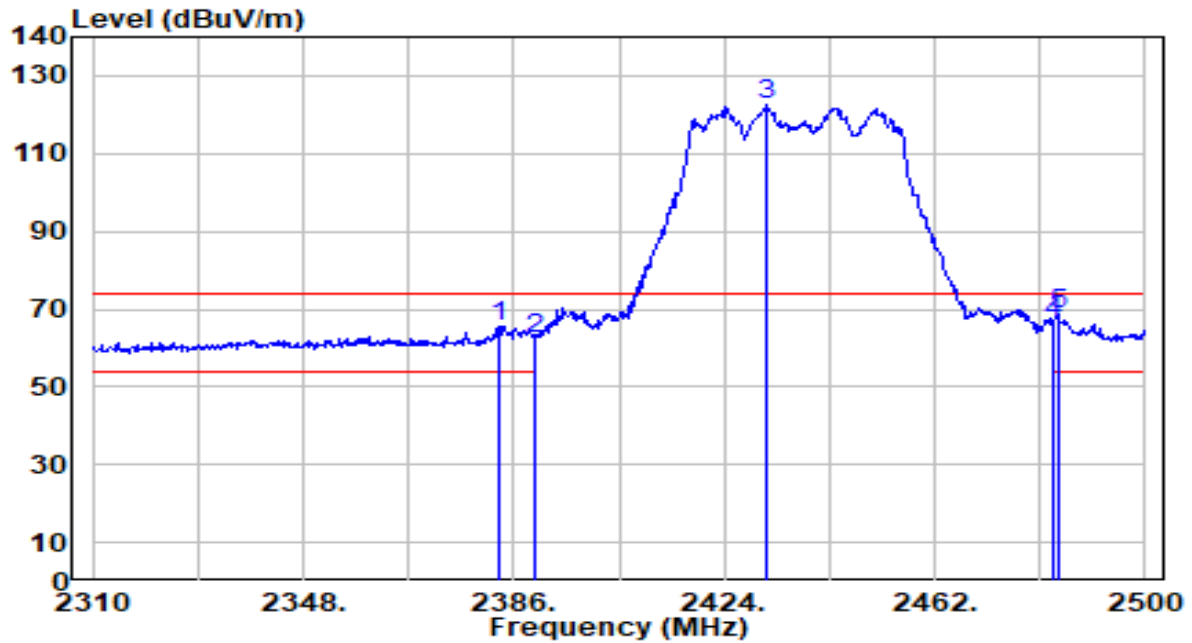


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.150	34.99	30.53	65.52	-8.48	74.00	200	334	Peak
2	2390.000	31.99	30.55	62.54	-11.46	74.00	200	334	Peak
3	2431.790	91.69	30.67	122.36	N/A	N/A	200	334	Peak
4	2483.500	35.93	30.81	66.74	-7.26	74.00	200	334	Peak
5	* 2484.230	37.63	30.82	68.44	-5.56	74.00	200	334	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

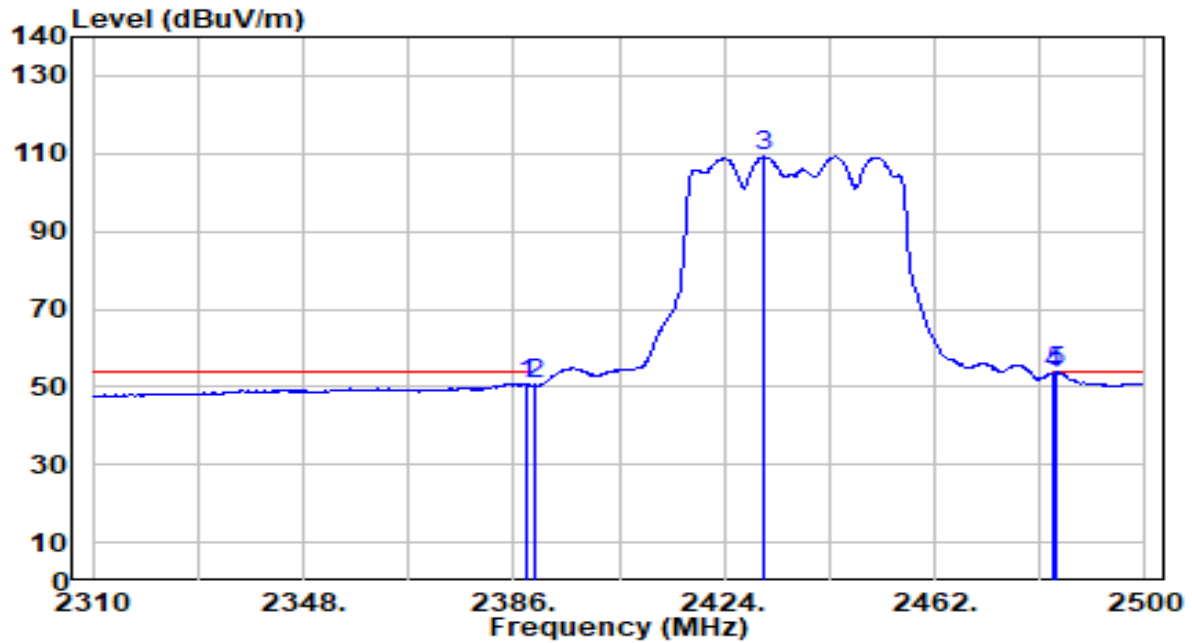


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	20.25	30.54	50.80	-3.20	54.00	200	334	Average
2	2390.000	19.92	30.55	50.47	-3.53	54.00	200	334	Average
3	2431.220	78.58	30.66	109.25	N/A	N/A	200	334	Average
4	2483.500	22.77	30.81	53.58	-0.42	54.00	200	334	Average
5	* 2484.040	23.02	30.81	53.84	-0.16	54.00	200	334	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

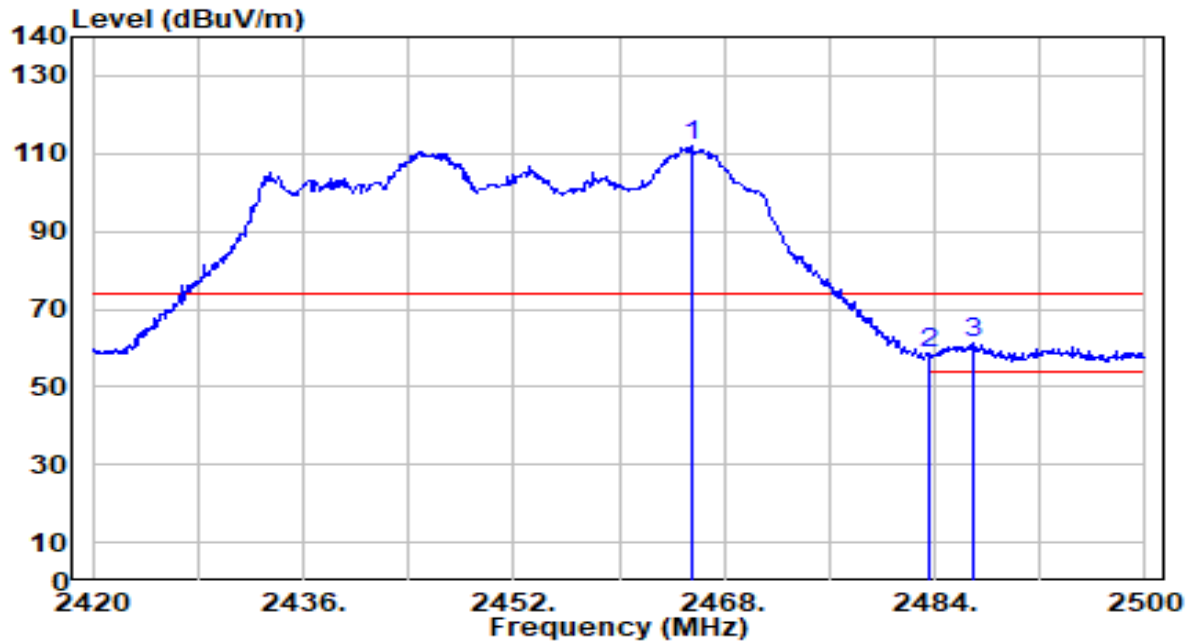


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.520	81.05	30.76	111.81	N/A	N/A	200	226	Peak
2	2483.500	27.63	30.81	58.45	-15.55	74.00	200	226	Peak
3	* 2486.960	30.27	30.82	61.10	-12.90	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

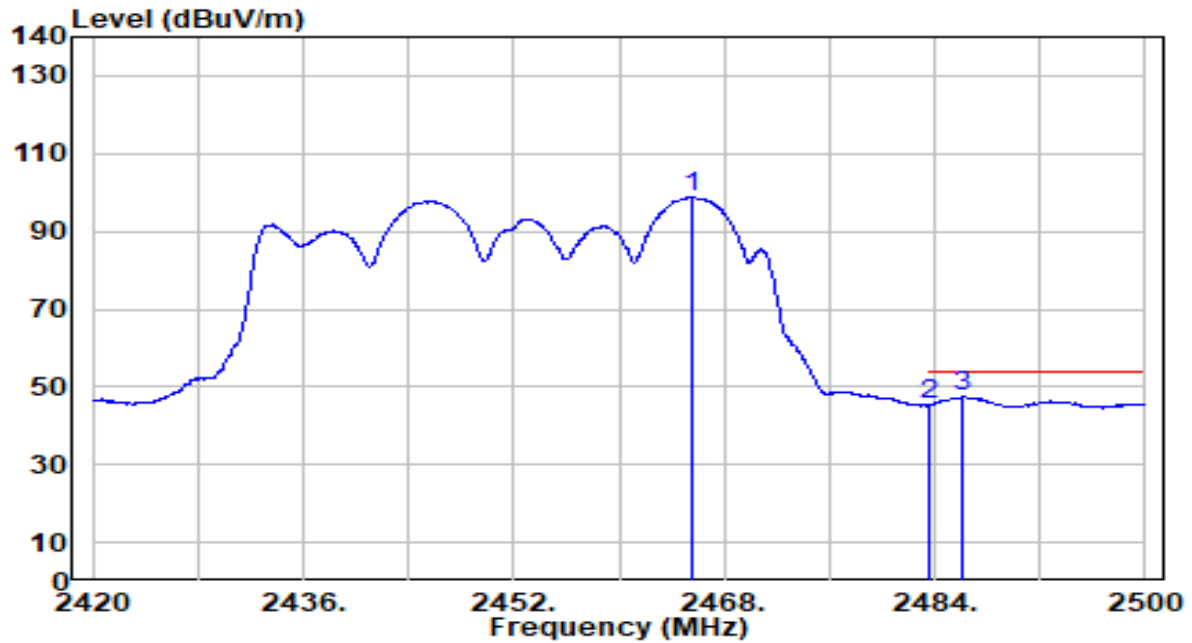


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.600	67.93	30.76	98.69	N/A	N/A	200	226	Average
2	2483.500	14.48	30.81	45.29	-8.71	54.00	200	226	Average
3	* 2486.160	16.53	30.82	47.35	-6.65	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

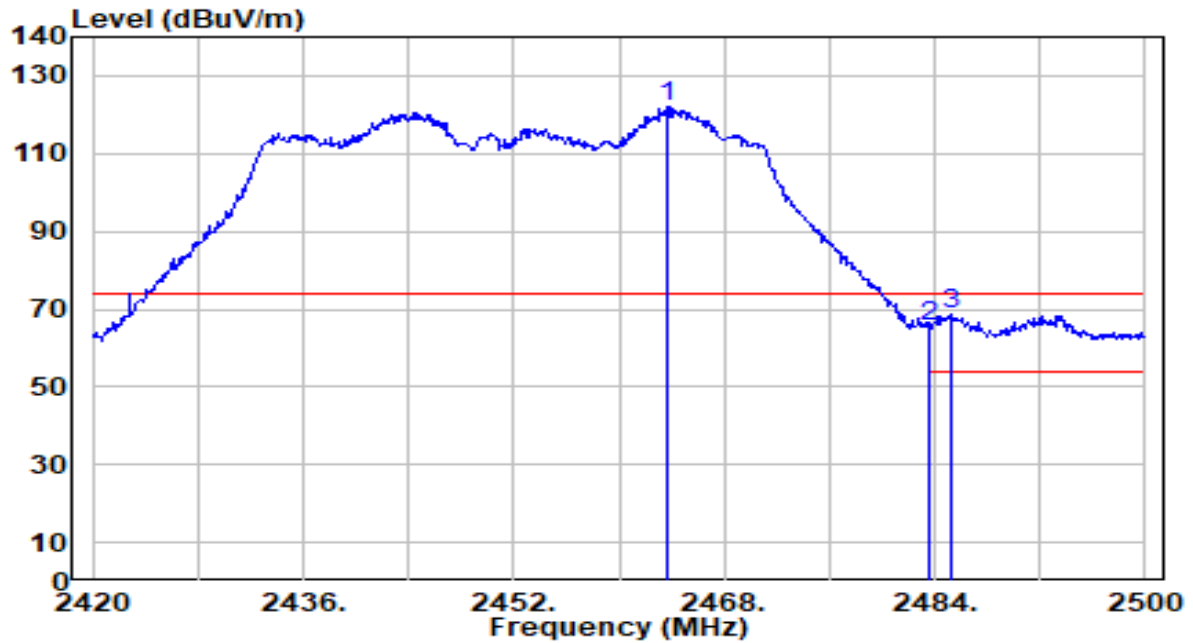


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.760	91.08	30.76	121.84	N/A	N/A	200	154	Peak
2	2483.500	34.53	30.81	65.34	-8.66	74.00	200	154	Peak
3	* 2485.280	37.81	30.82	68.62	-5.38	74.00	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

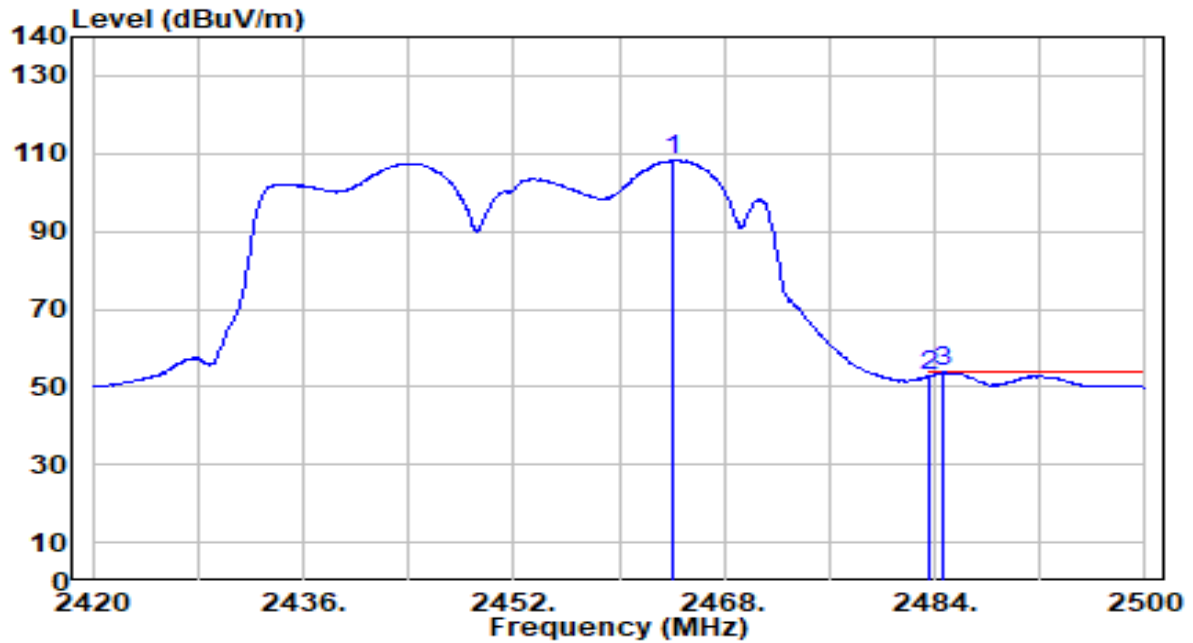


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.000	77.56	30.76	108.32	N/A	N/A	200	154	Average
2	2483.500	21.82	30.81	52.63	-1.37	54.00	200	154	Average
3	* 2484.720	23.02	30.82	53.83	-0.17	54.00	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

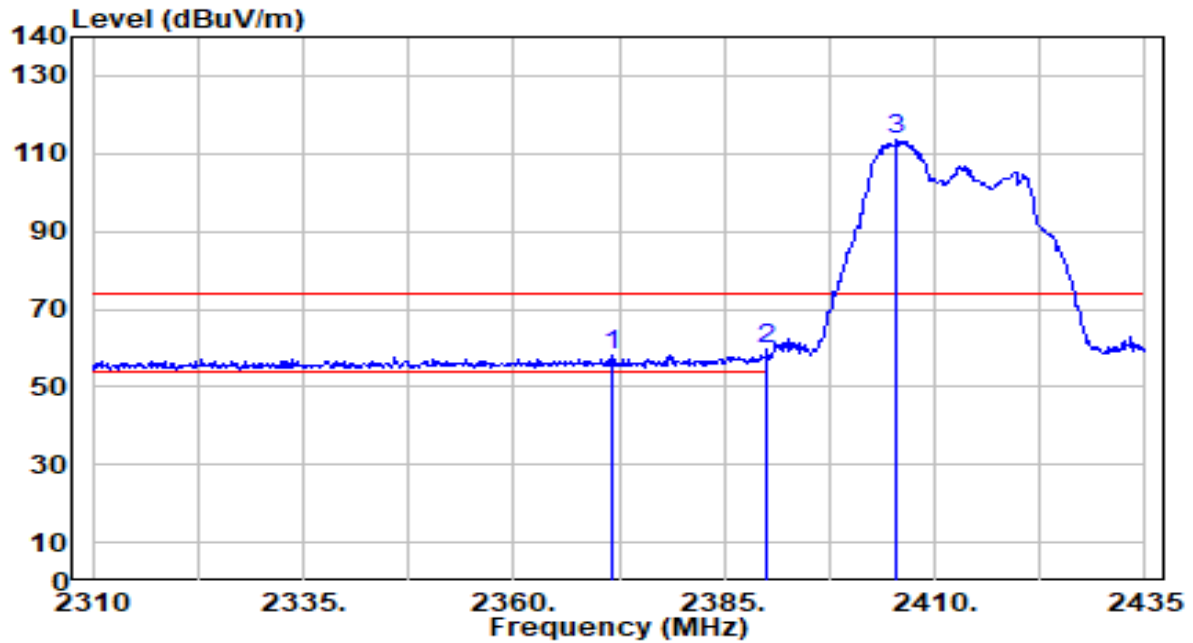


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2371.625	27.40	30.50	57.90	-16.10	74.00	100	206	Peak
2	*	2390.000	29.03	30.55	59.57	-14.43	74.00	100	206	Peak
3		2405.500	82.88	30.59	113.47	N/A	N/A	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

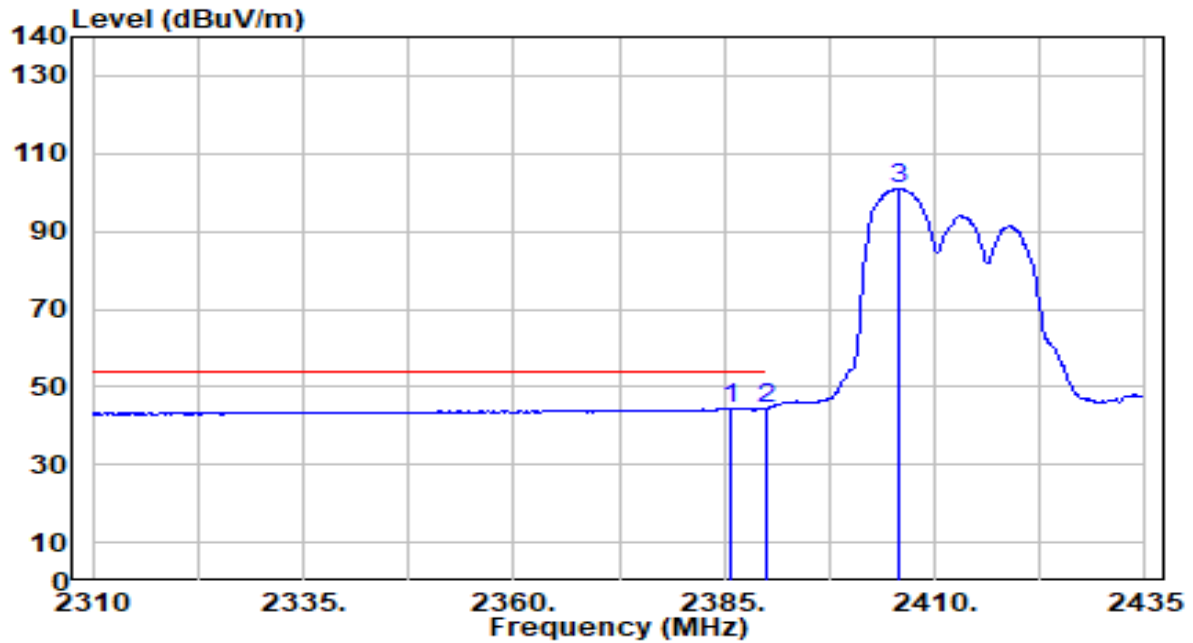


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	14.06	30.54	44.60	-9.40	54.00	100	206	Average
2		2390.000	14.00	30.55	44.54	-9.46	54.00	100	206	Average
3		2405.625	70.40	30.59	101.00	N/A	N/A	100	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

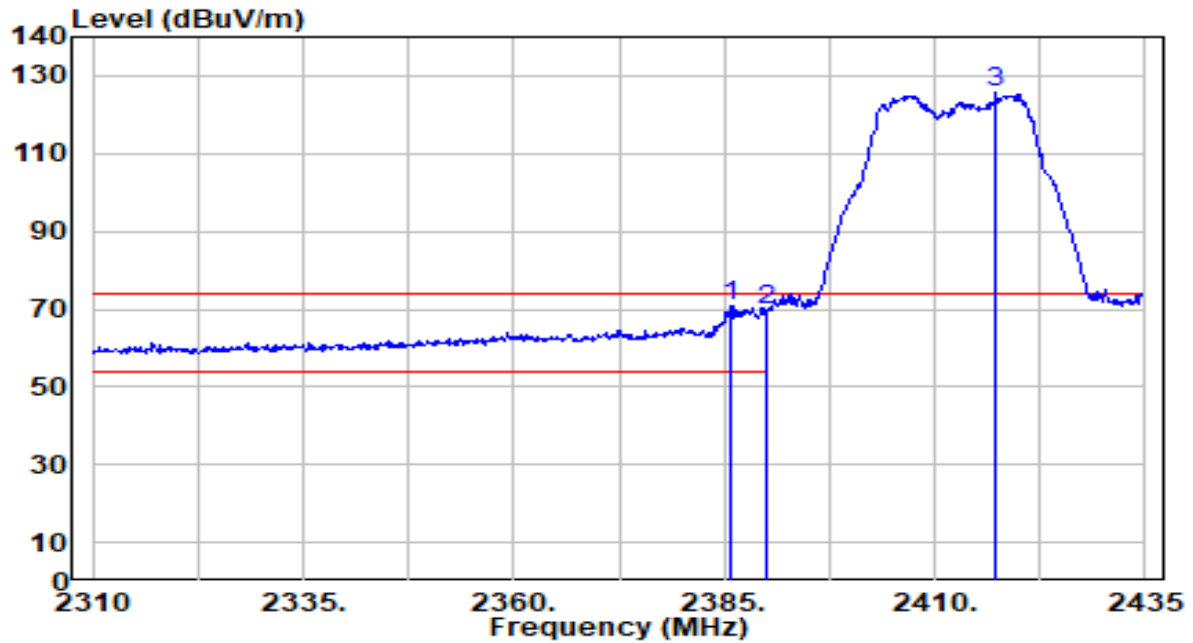


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	40.16	30.54	70.70	-3.30	74.00	204	334	Peak
2		2390.000	39.33	30.55	69.88	-4.12	74.00	204	334	Peak
3		2417.250	95.31	30.62	125.93	N/A	N/A	204	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

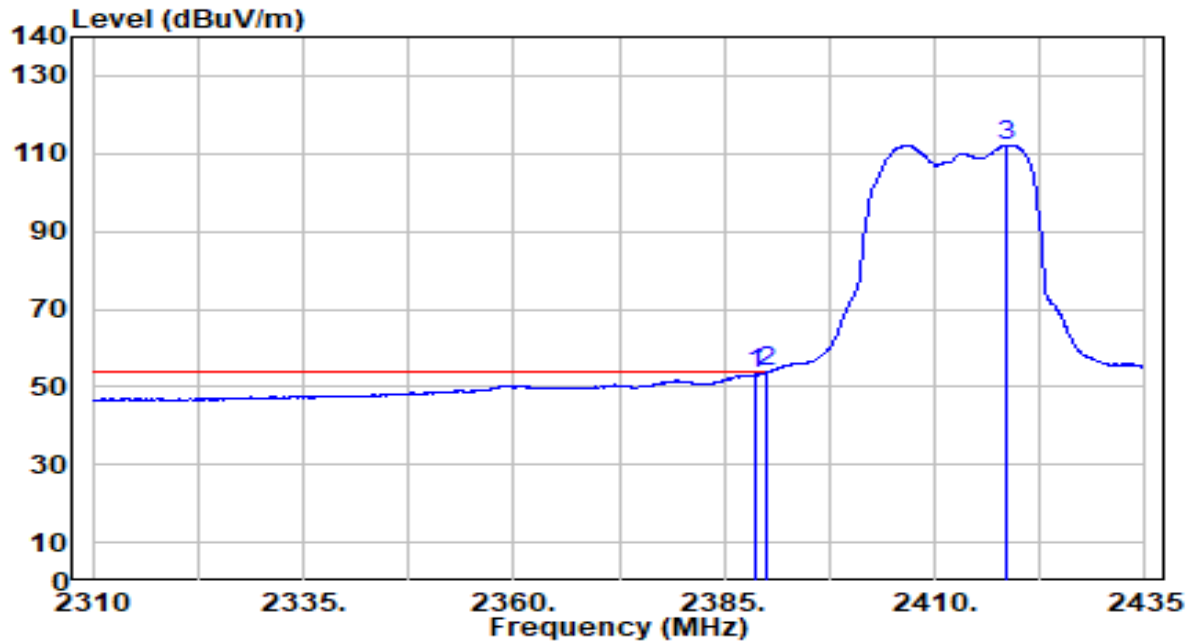


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	22.75	30.54	53.29	-0.71	54.00	204	334	Average
2	*	2390.000	23.33	30.55	53.88	-0.12	54.00	204	334	Average
3		2418.625	81.60	30.63	112.23	N/A	N/A	204	334	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

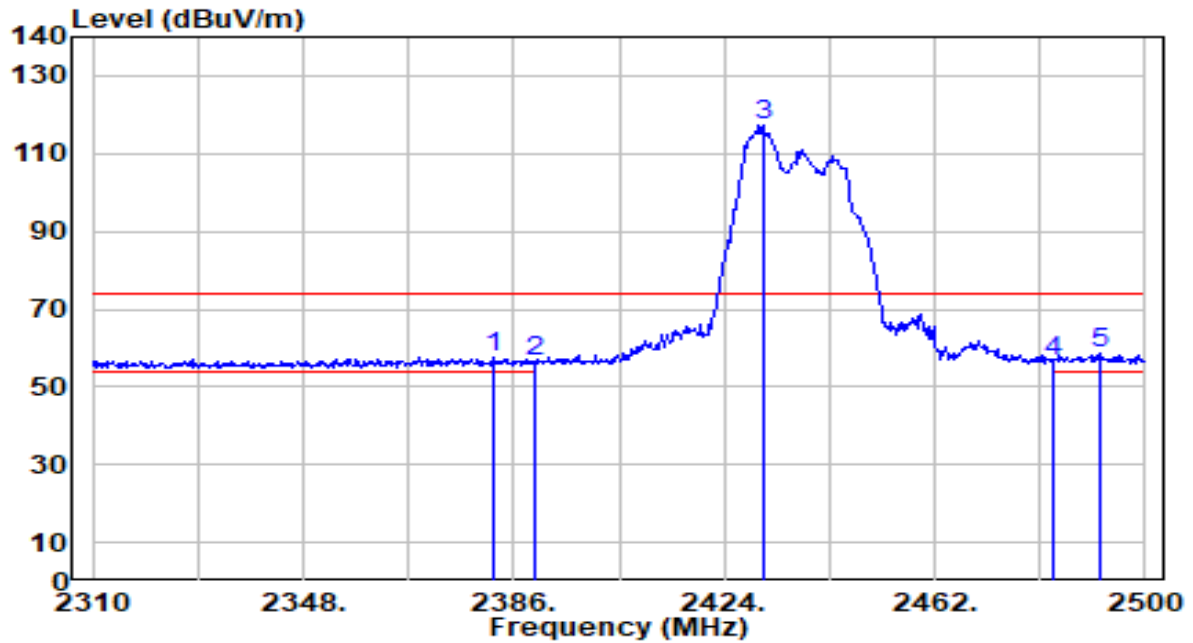


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.390	26.99	30.53	57.52	-16.48	74.00	186	224	Peak
2	2390.000	25.72	30.55	56.27	-17.73	74.00	186	224	Peak
3	2431.030	86.72	30.66	117.38	N/A	N/A	186	224	Peak
4	2483.500	25.57	30.81	56.39	-17.61	74.00	186	224	Peak
5	* 2491.640	27.69	30.84	58.53	-15.47	74.00	186	224	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

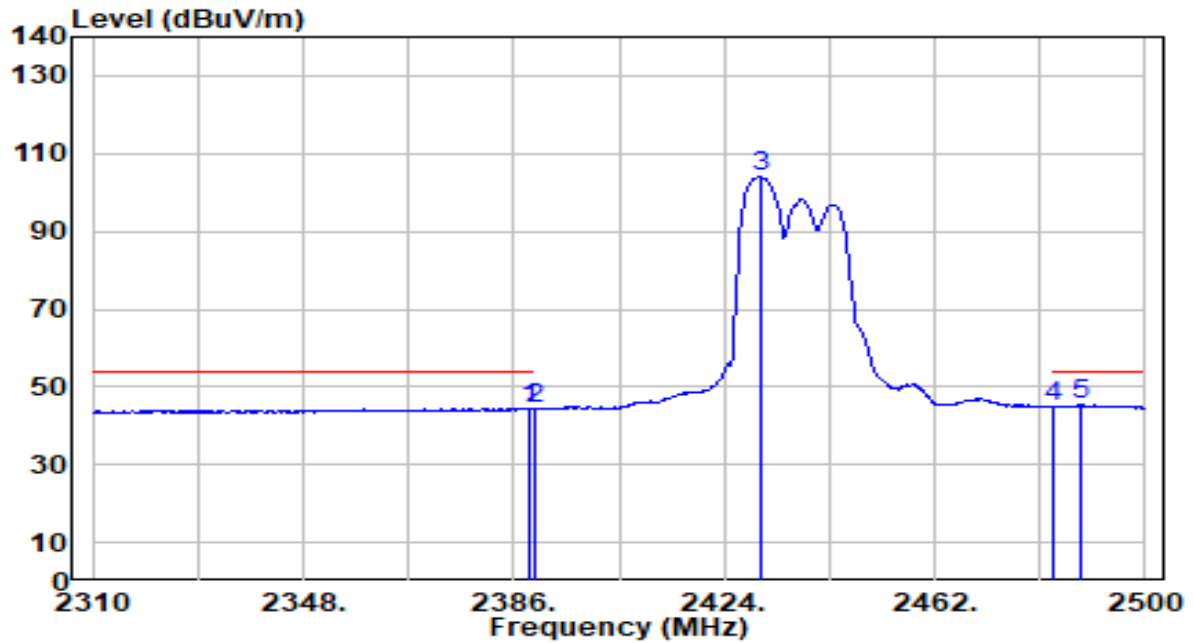


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	13.93	30.54	44.48	-9.52	54.00	186	224	Average
2	2390.000	13.82	30.55	44.37	-9.63	54.00	186	224	Average
3	2430.460	73.39	30.66	104.05	N/A	N/A	186	224	Average
4	2483.500	14.08	30.81	44.89	-9.11	54.00	186	224	Average
5	* 2488.220	14.61	30.83	45.43	-8.57	54.00	186	224	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

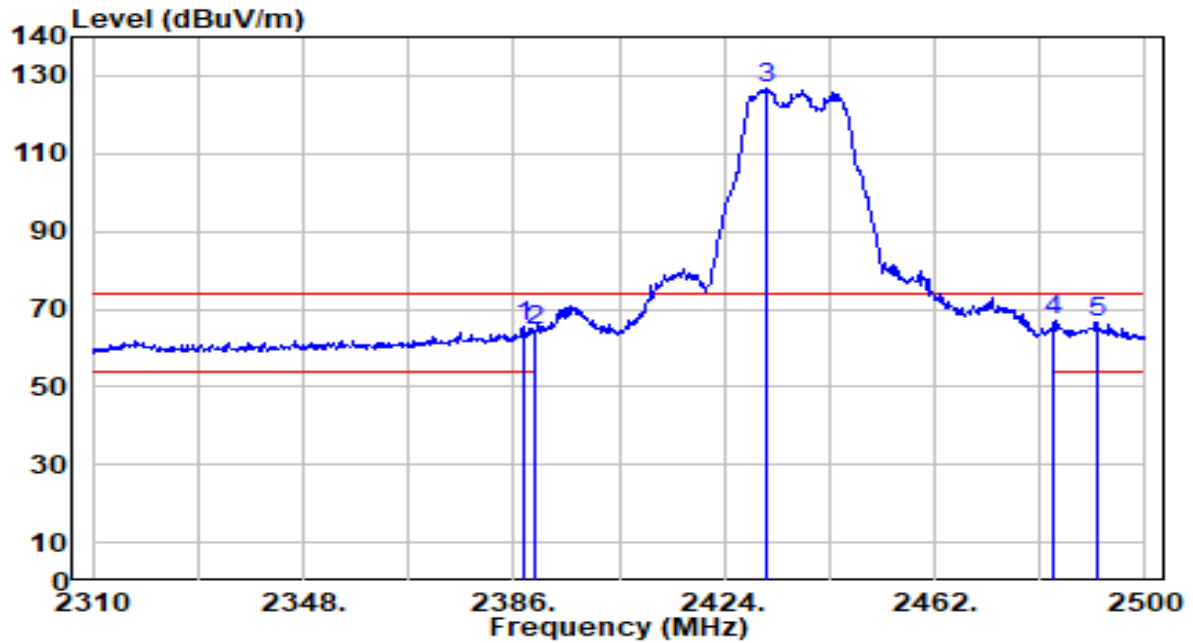


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	34.76	30.54	65.30	-8.70	74.00	200	339	Peak
2	2390.000	33.94	30.55	64.49	-9.51	74.00	200	339	Peak
3	2431.410	96.34	30.67	127.00	N/A	N/A	200	339	Peak
4	* 2483.500	36.45	30.81	67.26	-6.74	74.00	200	339	Peak
5	2491.260	35.68	30.84	66.51	-7.49	74.00	200	339	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

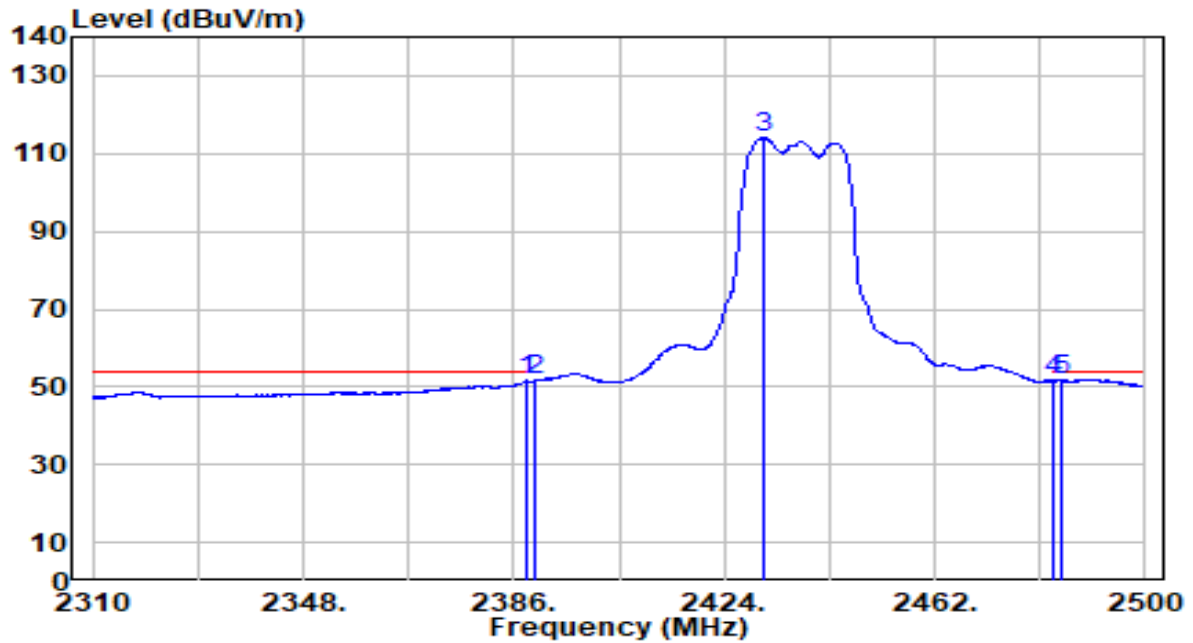


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	20.97	30.54	51.51	-2.49	54.00	200	339	Average
2	2390.000	21.19	30.55	51.74	-2.26	54.00	200	339	Average
3	2431.220	83.38	30.66	114.04	N/A	N/A	200	339	Average
4	2483.500	20.85	30.81	51.66	-2.34	54.00	200	339	Average
5	* 2484.990	21.10	30.82	51.92	-2.08	54.00	200	339	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

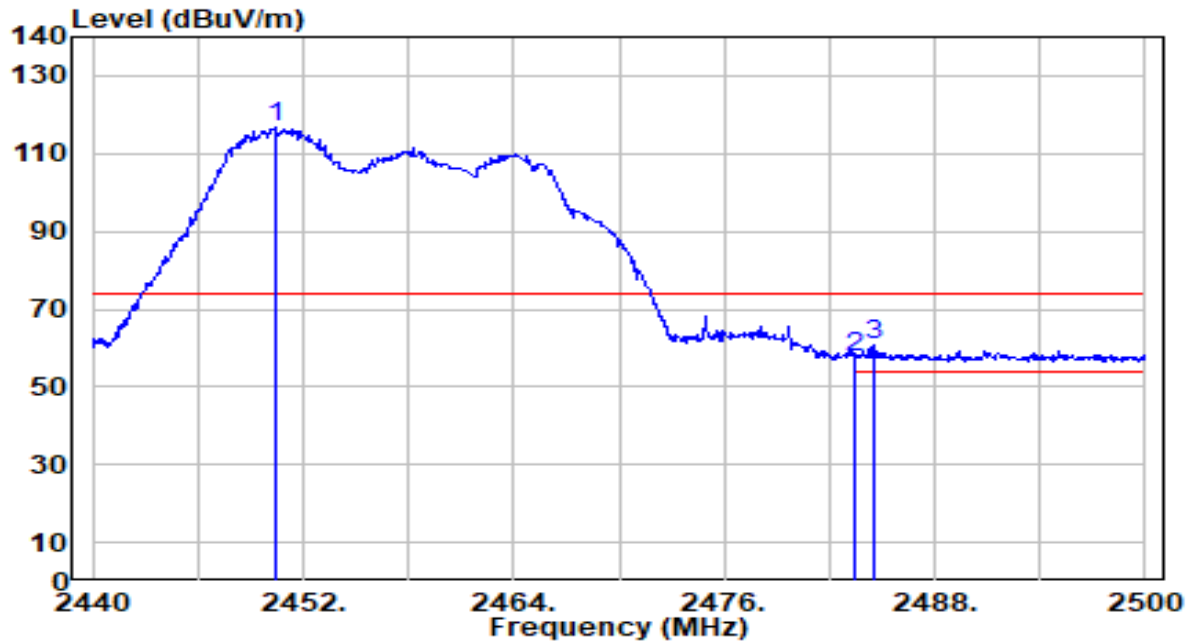


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.380	86.14	30.72	116.86	N/A	N/A	200	224	Peak
2	2483.500	26.97	30.81	57.78	-16.22	74.00	200	224	Peak
3	* 2484.580	30.05	30.82	60.87	-13.13	74.00	200	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

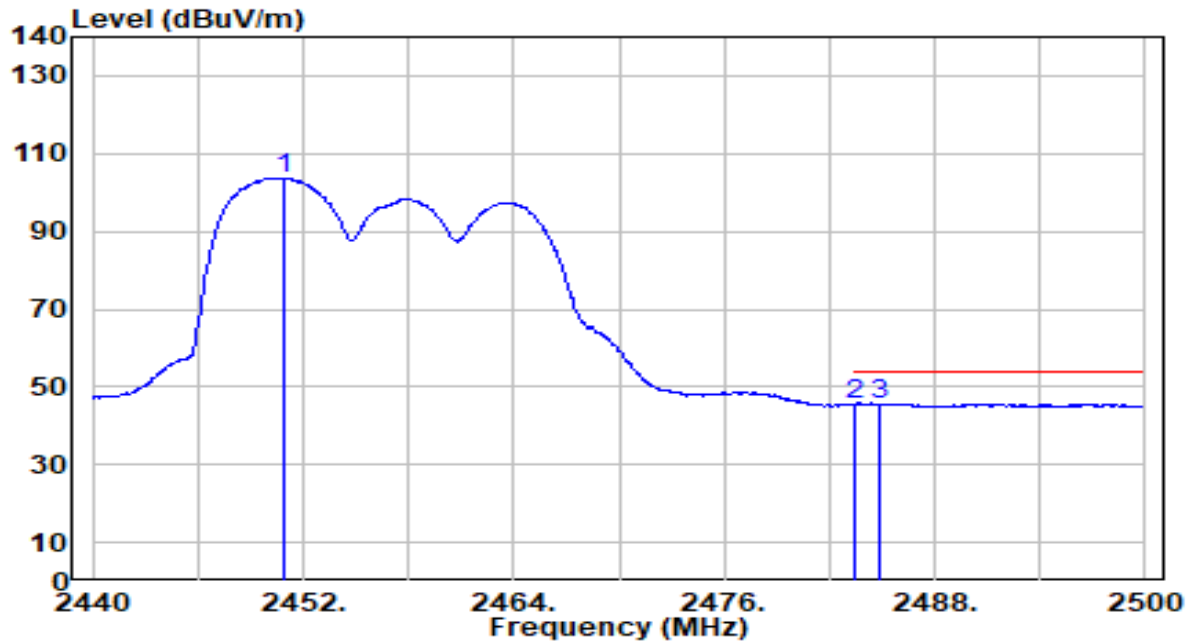


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.860	73.04	30.72	103.76	N/A	N/A	200	224	Average
2		2483.500	14.65	30.81	45.46	-8.54	54.00	200	224	Average
3	*	2484.880	14.81	30.82	45.63	-8.37	54.00	200	224	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

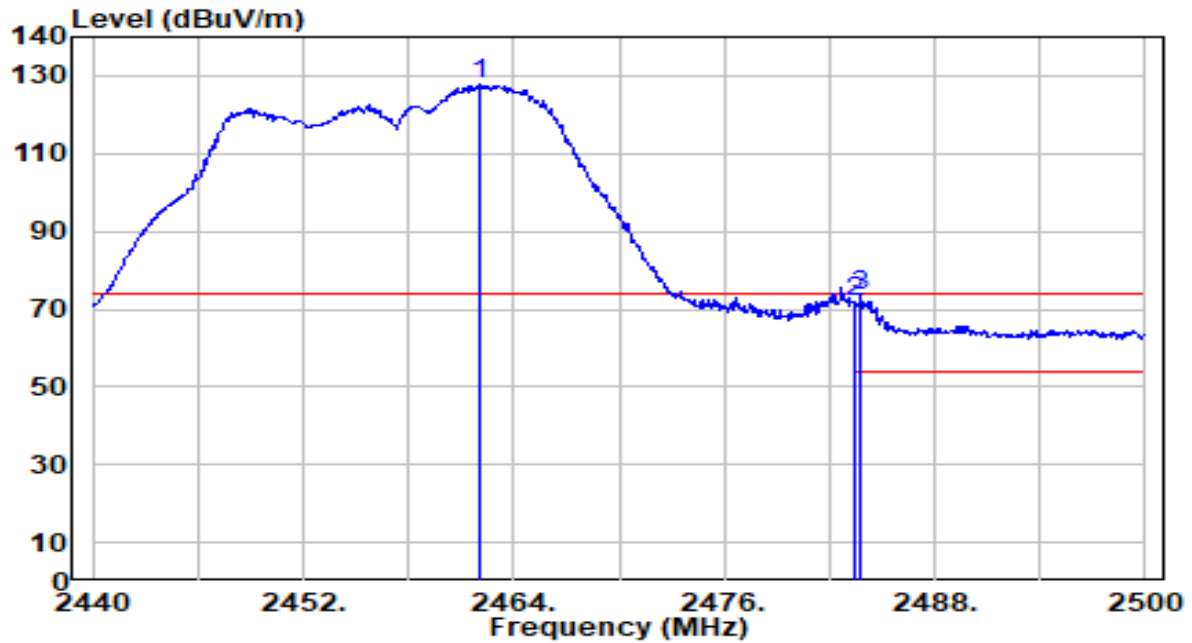


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.140	97.35	30.75	128.10	N/A	N/A	200	215	Peak
2	2483.500	40.83	30.81	71.65	-2.35	74.00	200	215	Peak
3	* 2483.740	42.36	30.81	73.17	-0.83	74.00	200	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

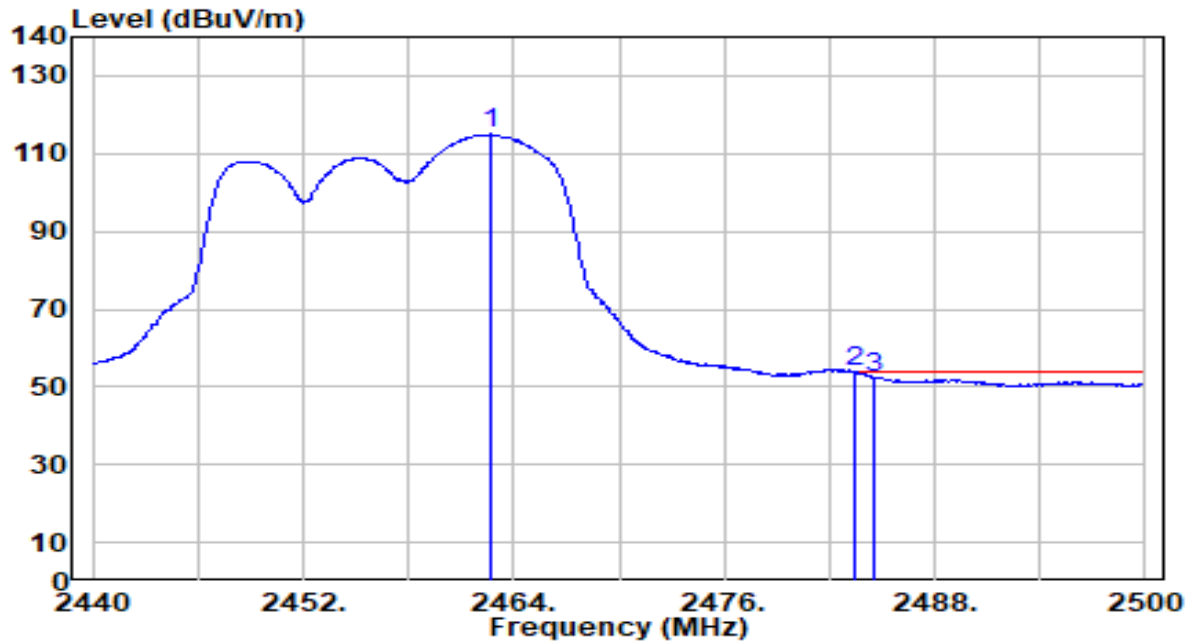


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.680	84.16	30.75	114.91	N/A	N/A	200	215	Average
2	*	2483.500	23.05	30.81	53.86	-0.14	54.00	200	215	Average
3		2484.520	21.63	30.82	52.44	-1.56	54.00	200	215	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

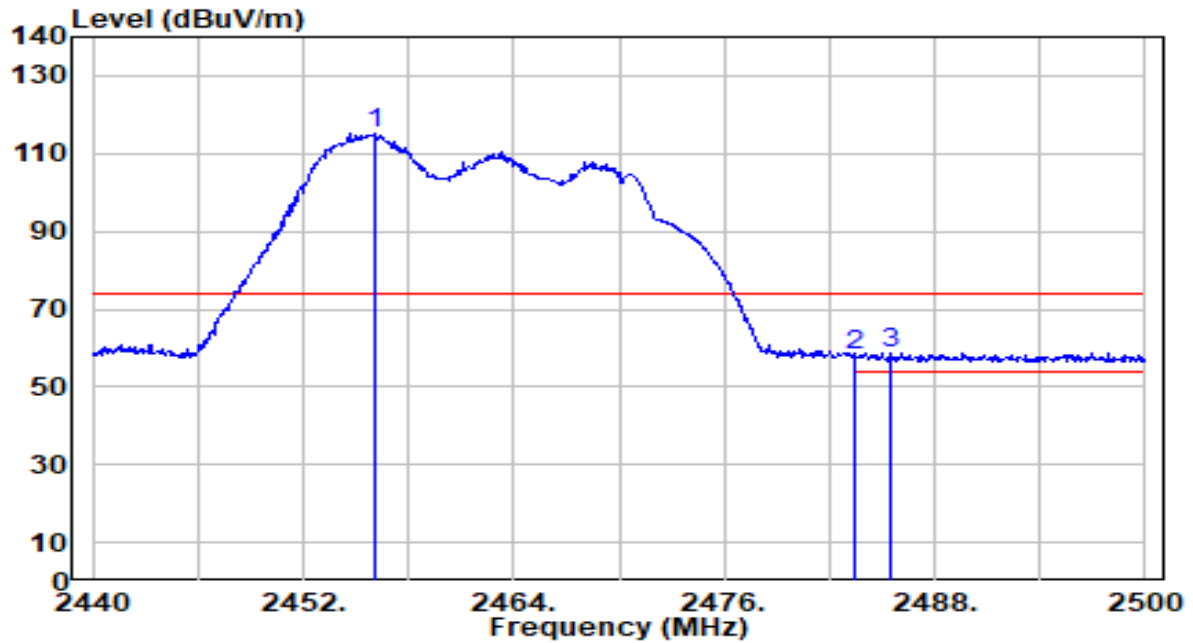


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.080	84.33	30.74	115.07	N/A	N/A	200	226	Peak
2	2483.500	27.06	30.81	57.87	-16.13	74.00	200	226	Peak
3	* 2485.480	27.86	30.82	58.68	-15.32	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

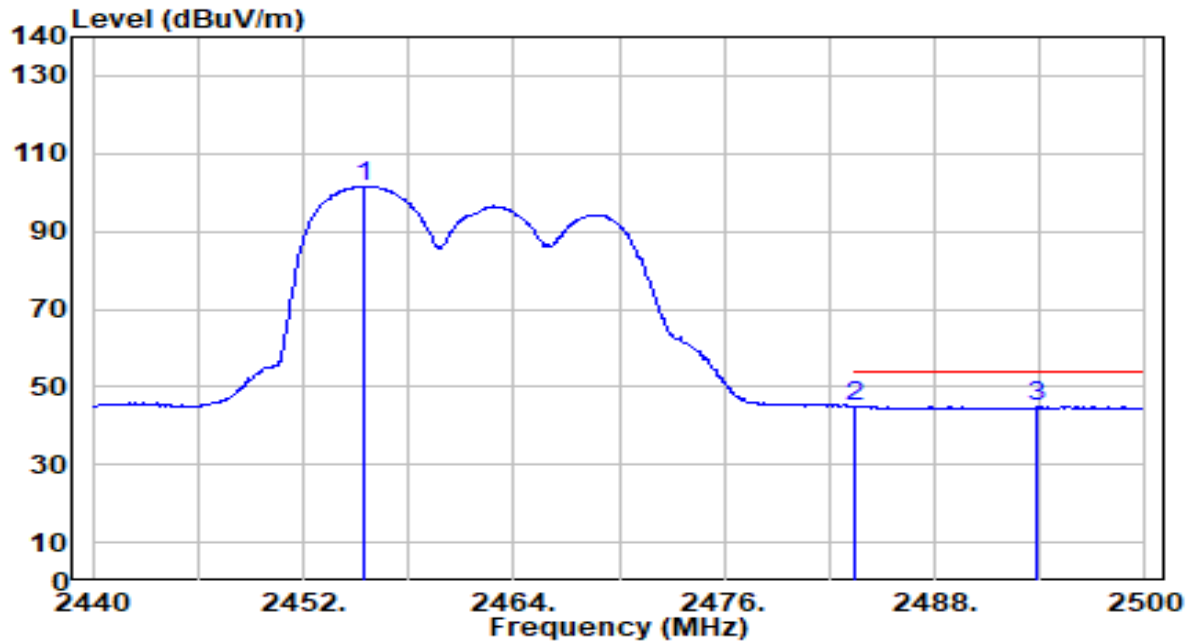


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.420	70.94	30.73	101.67	N/A	N/A	200	226	Average
2	*	2483.500	14.19	30.81	45.01	-8.99	54.00	200	226	Average
3		2493.820	14.03	30.84	44.87	-9.13	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

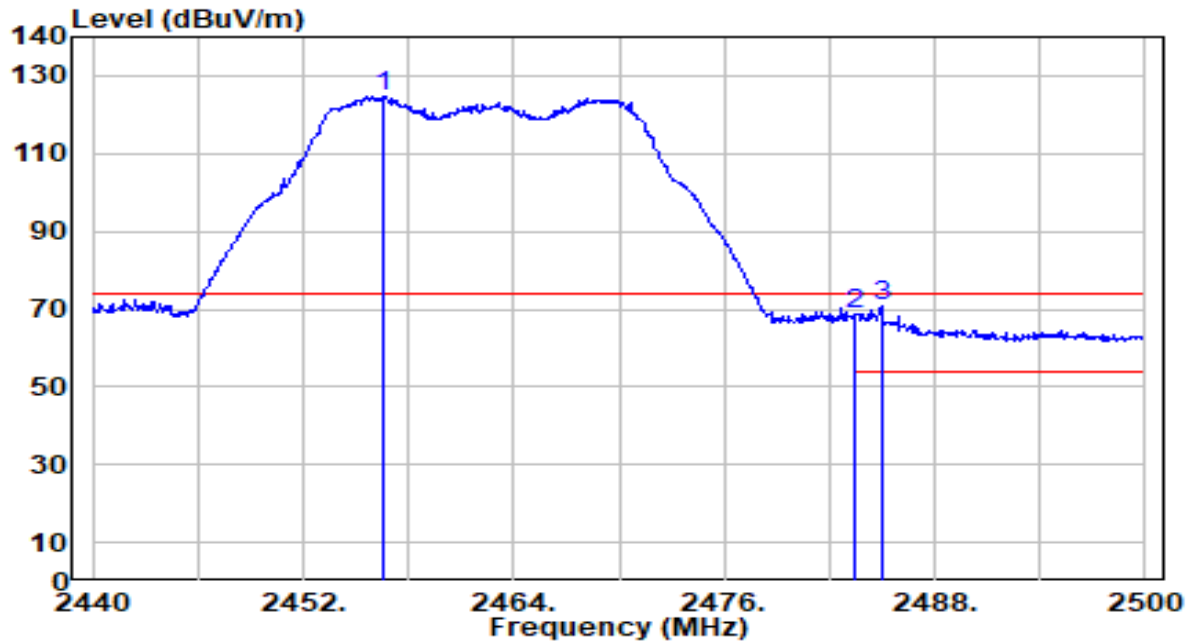


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.500	93.99	30.74	124.72	N/A	N/A	200	336	Peak
2	2483.500	37.97	30.81	68.79	-5.21	74.00	200	336	Peak
3	* 2484.940	39.80	30.82	70.62	-3.38	74.00	200	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

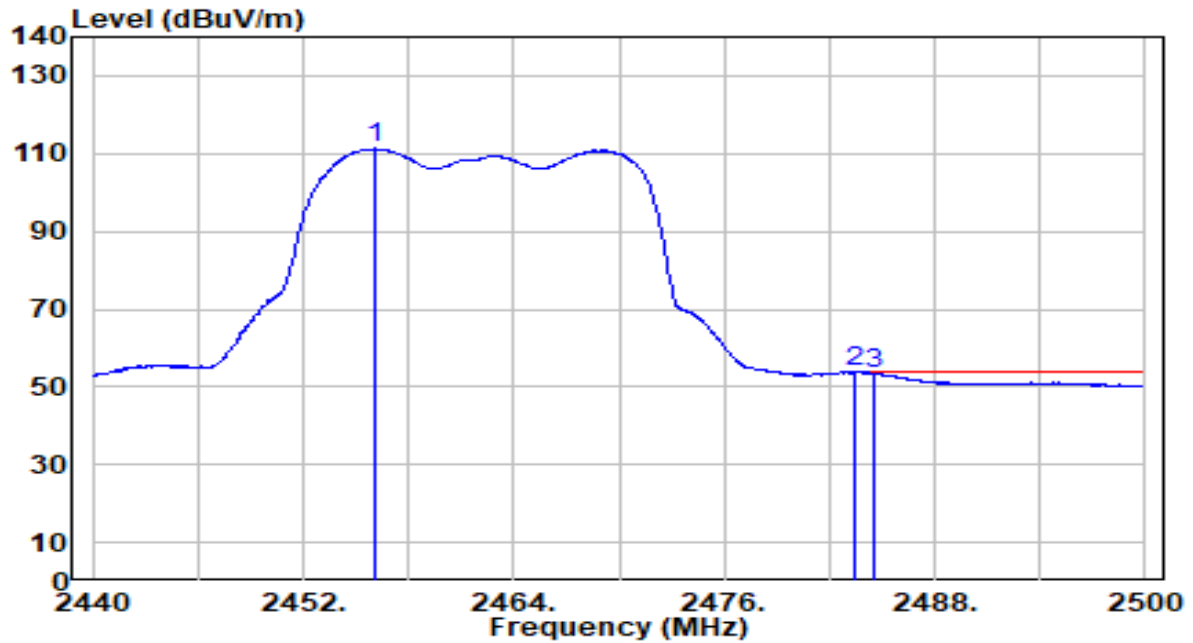


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.080	80.52	30.74	111.26	N/A	N/A	200	336	Average
2	*	2483.500	23.08	30.81	53.89	-0.11	54.00	200	336	Average
3		2484.520	22.69	30.82	53.51	-0.49	54.00	200	336	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

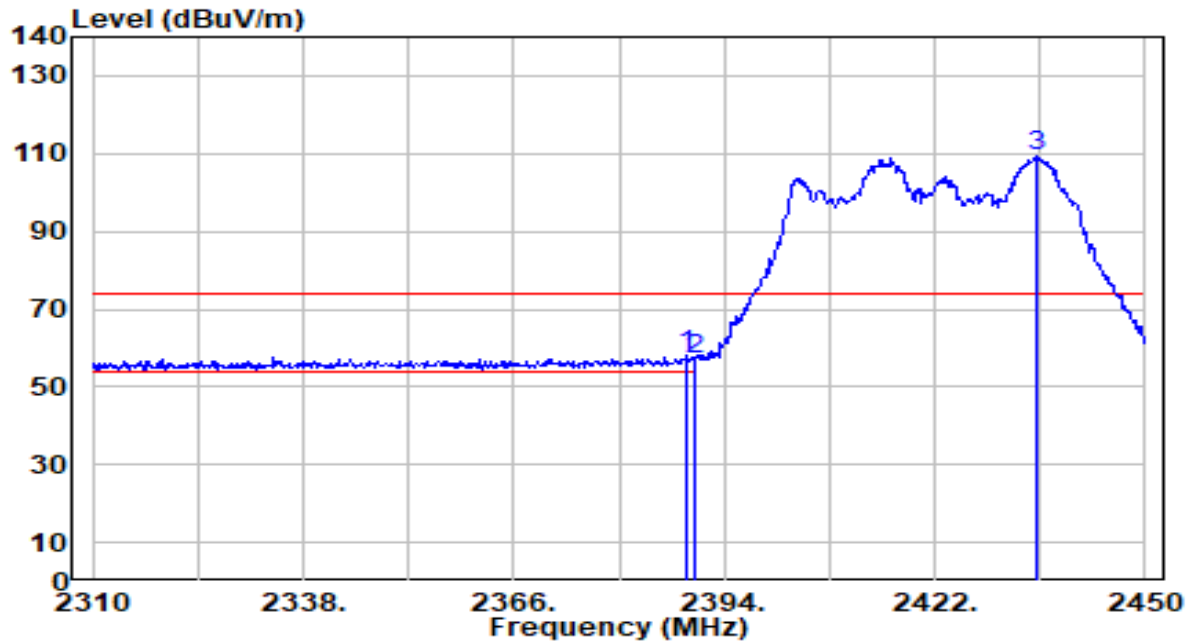


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.100	27.62	30.55	58.16	-15.84	74.00	100	212	Peak
2		2390.000	26.54	30.55	57.09	-16.91	74.00	100	212	Peak
3		2435.580	78.62	30.68	109.30	N/A	N/A	100	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

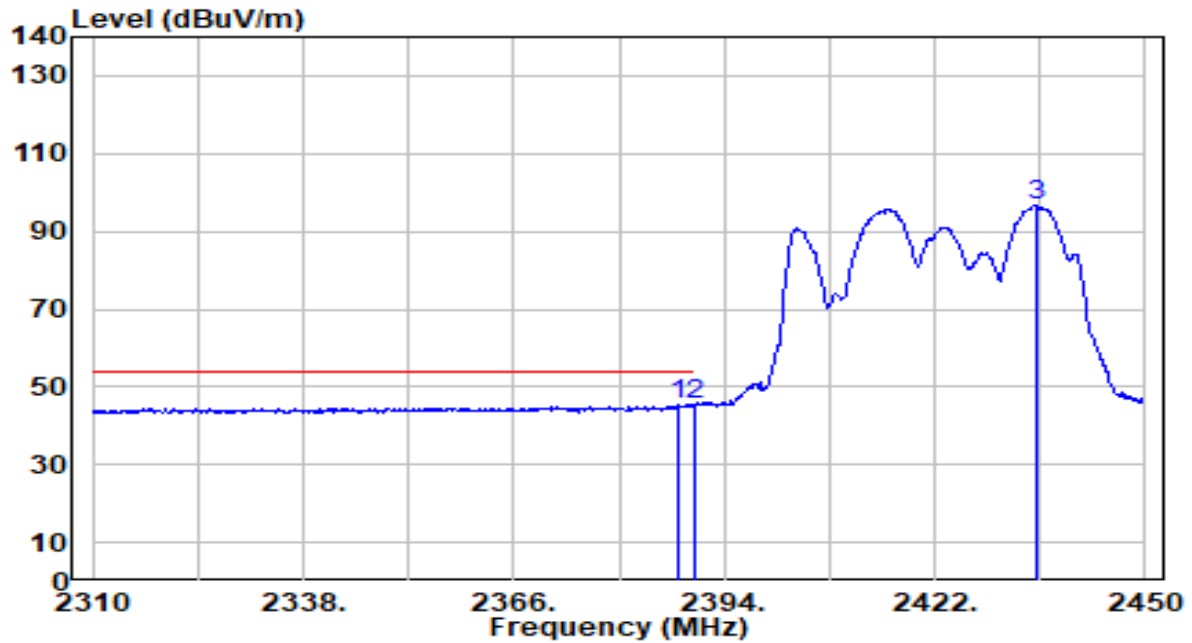


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.840	14.77	30.54	45.31	-8.69	54.00	100	212	Average
2	*	2390.000	14.96	30.55	45.51	-8.49	54.00	100	212	Average
3		2435.580	66.20	30.68	96.88	N/A	N/A	100	212	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

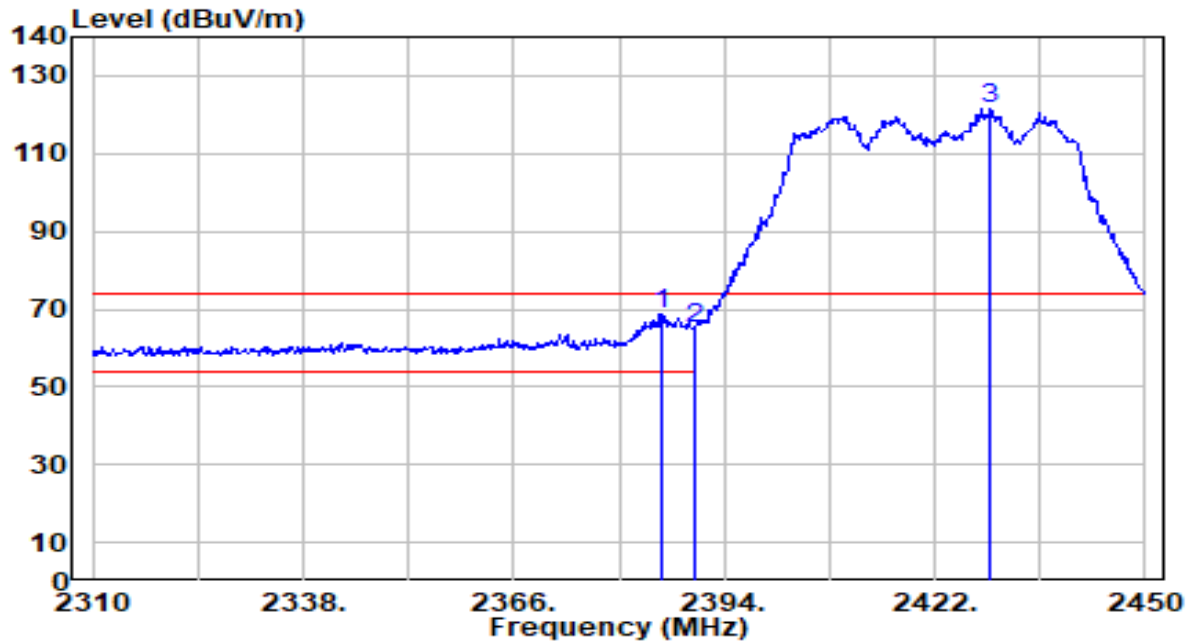


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	38.35	30.54	68.89	-5.11	74.00	200	331	Peak
2		2390.000	34.25	30.55	64.79	-9.21	74.00	200	331	Peak
3		2429.420	90.62	30.66	121.28	N/A	N/A	200	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

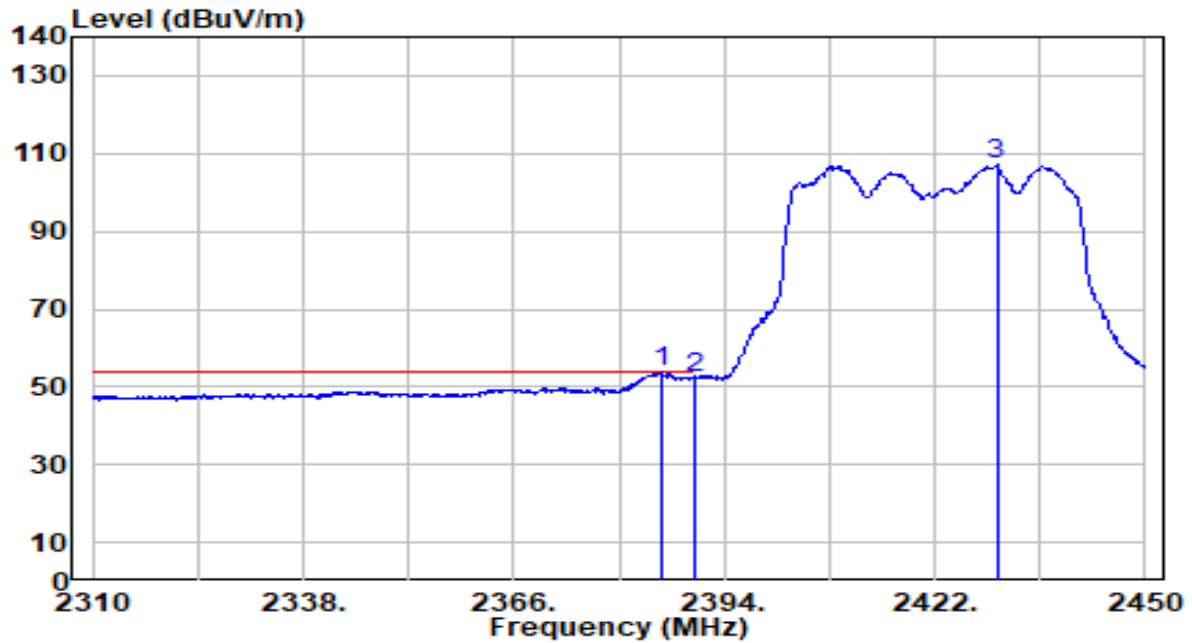


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	23.35	30.54	53.89	-0.11	54.00	200	331	Average
2		2390.000	21.61	30.55	52.16	-1.84	54.00	200	331	Average
3		2430.260	76.44	30.66	107.10	N/A	N/A	200	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

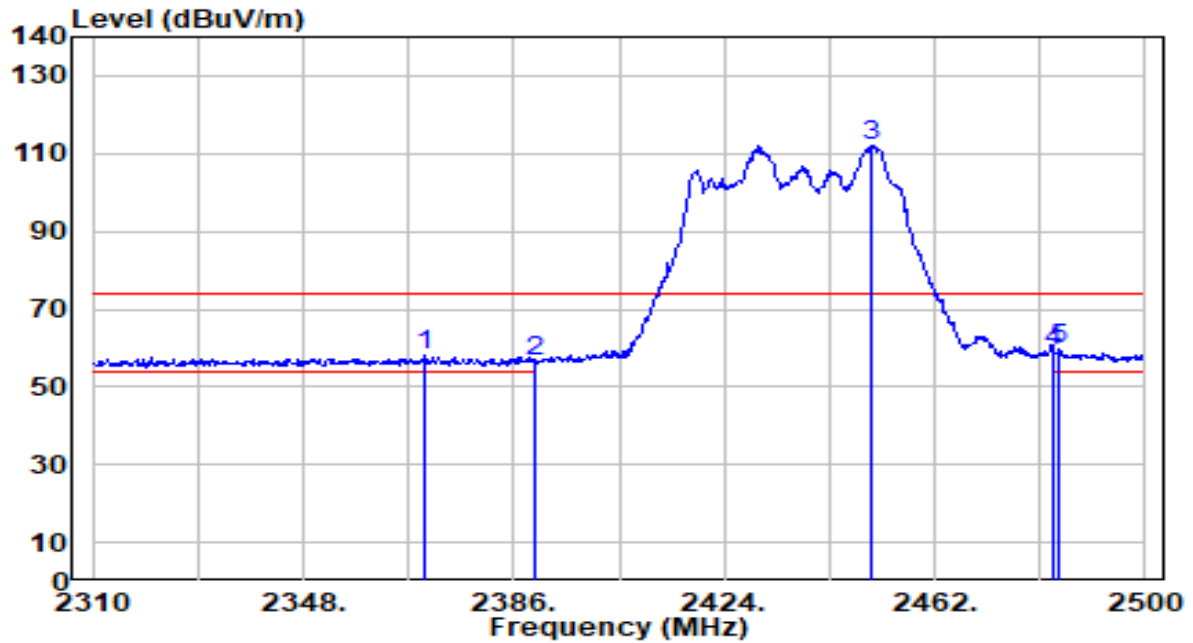


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2370.040	27.43	30.49	57.92	-16.08	74.00	178	224	Peak
2	2390.000	25.94	30.55	56.49	-17.51	74.00	178	224	Peak
3	2450.600	81.37	30.72	112.08	N/A	N/A	178	224	Peak
4	2483.500	28.12	30.81	58.94	-15.06	74.00	178	224	Peak
5	* 2484.420	28.95	30.82	59.76	-14.24	74.00	178	224	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

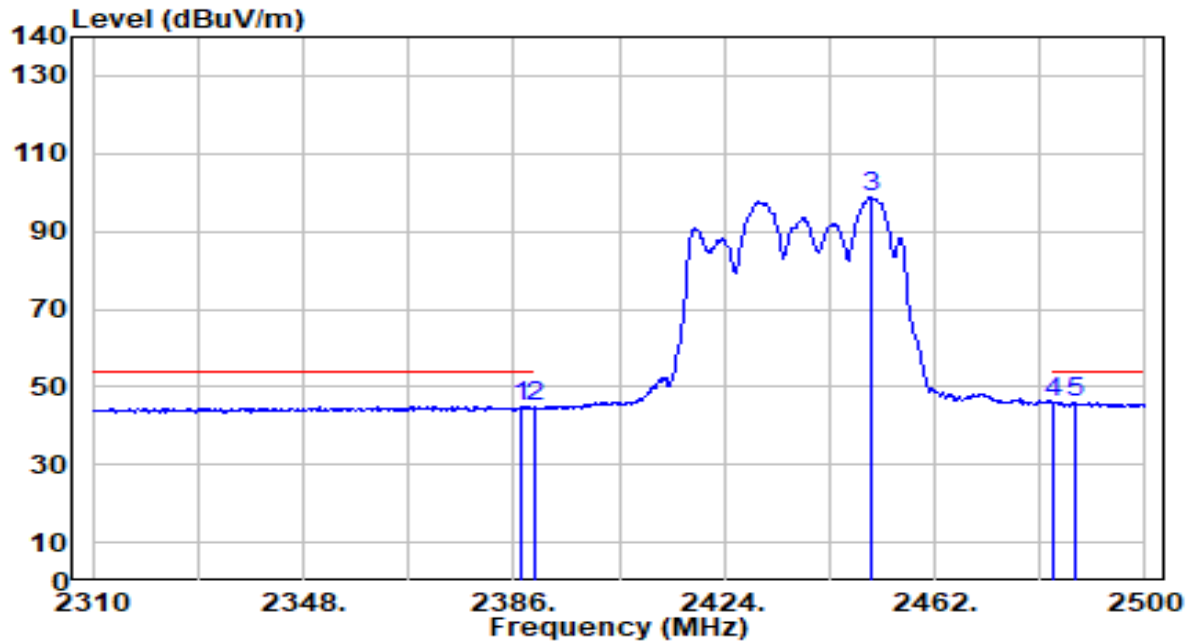


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	14.45	30.54	44.99	-9.01	54.00	178	224	Average
2	2390.000	14.38	30.55	44.93	-9.07	54.00	178	224	Average
3	2450.790	68.07	30.72	98.79	N/A	N/A	178	224	Average
4	2483.500	15.01	30.81	45.82	-8.18	54.00	178	224	Average
5	* 2487.460	15.30	30.82	46.12	-7.88	54.00	178	224	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

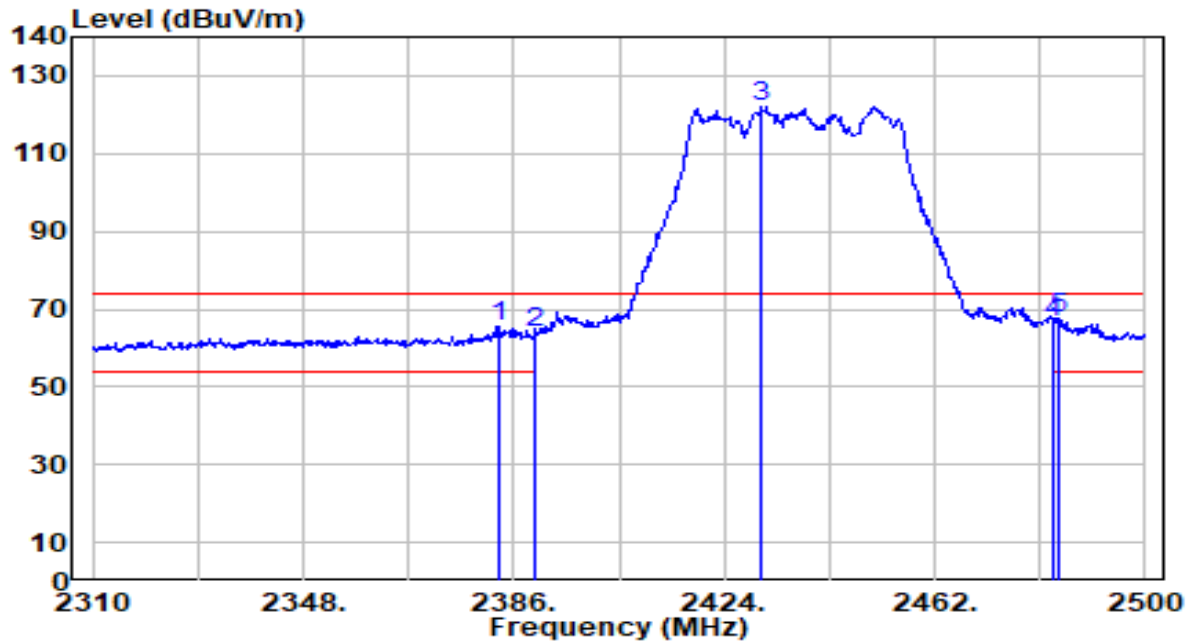


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.150	35.17	30.53	65.69	-8.31	74.00	200	340	Peak
2	2390.000	33.37	30.55	63.92	-10.08	74.00	200	340	Peak
3	2430.650	91.54	30.66	122.20	N/A	N/A	200	340	Peak
4	2483.500	35.56	30.81	66.37	-7.63	74.00	200	340	Peak
5	* 2484.420	36.91	30.82	67.73	-6.27	74.00	200	340	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

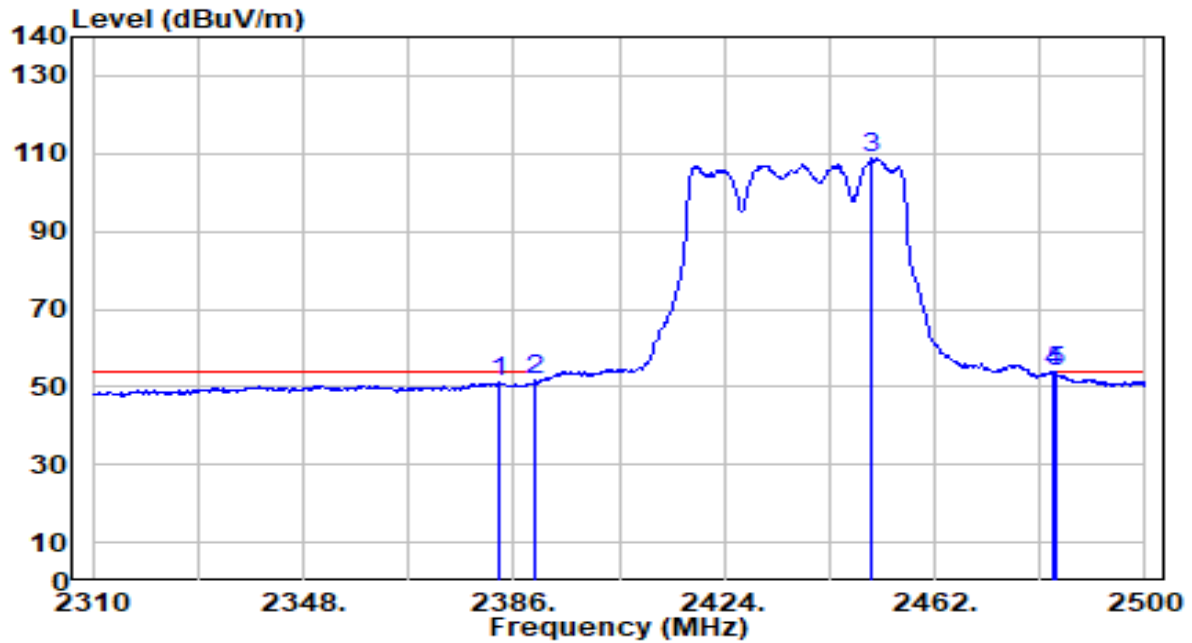


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.340	20.49	30.53	51.02	-2.98	54.00	200	340	Average
2		2390.000	20.98	30.55	51.53	-2.47	54.00	200	340	Average
3		2450.790	77.97	30.72	108.69	N/A	N/A	200	340	Average
4	*	2483.500	23.01	30.81	53.82	-0.18	54.00	200	340	Average
5		2484.040	22.84	30.81	53.66	-0.34	54.00	200	340	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

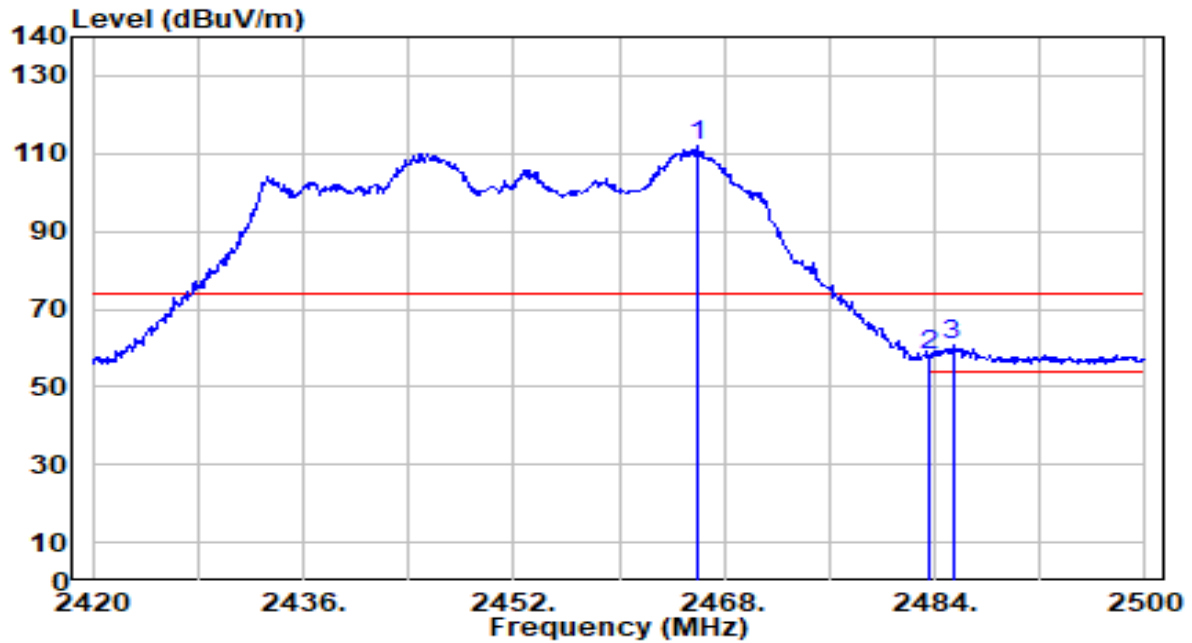


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2466.000	81.02	30.76	111.78	N/A	N/A	200	226	Peak
2	2483.500	27.12	30.81	57.93	-16.07	74.00	200	226	Peak
3	* 2485.360	29.69	30.82	60.51	-13.49	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

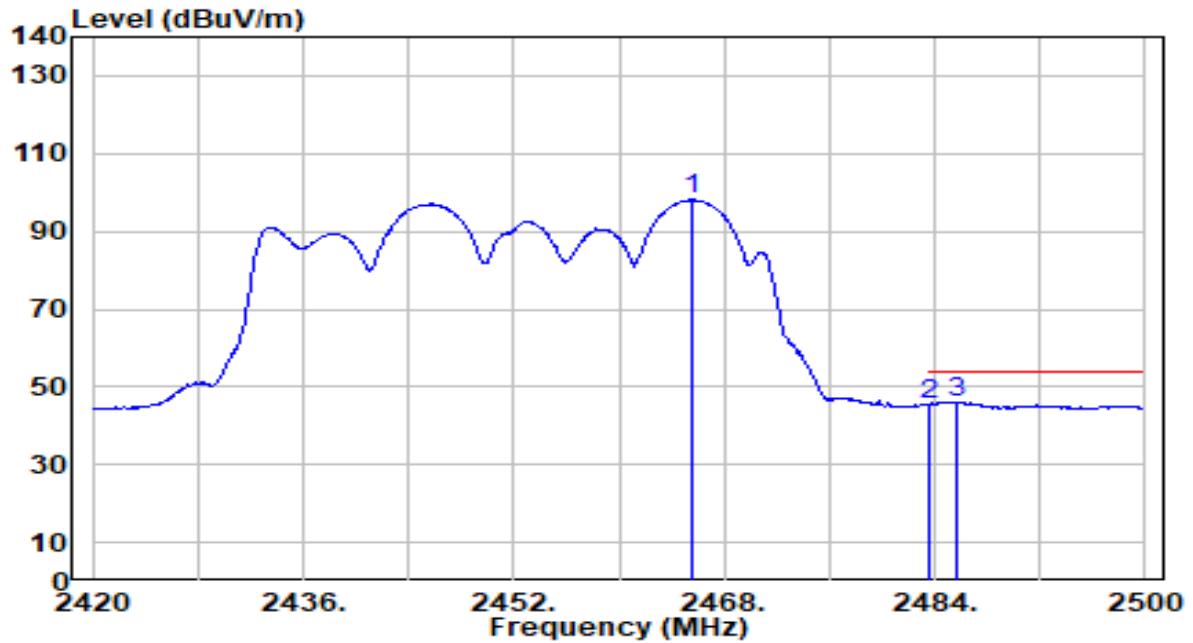


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.600	67.38	30.76	98.14	N/A	N/A	200	226	Average
2	2483.500	14.59	30.81	45.40	-8.60	54.00	200	226	Average
3	* 2485.600	15.32	30.82	46.14	-7.86	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

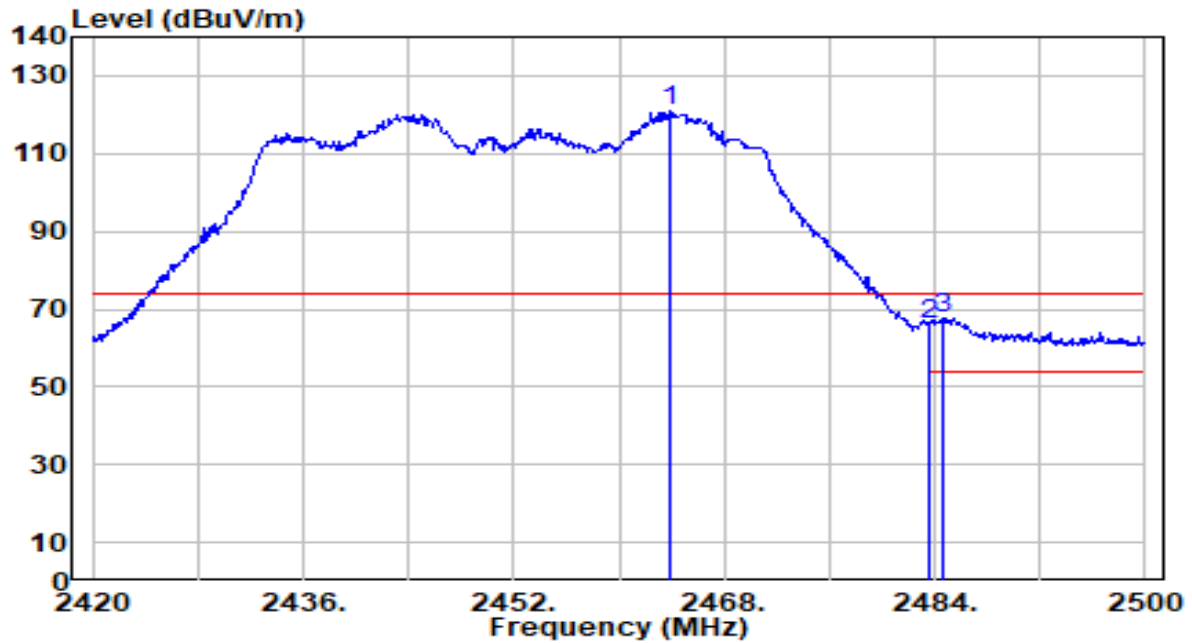


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.920	90.44	30.76	121.20	N/A	N/A	200	153	Peak
2	2483.500	35.48	30.81	66.29	-7.71	74.00	200	153	Peak
3	* 2484.720	36.93	30.82	67.75	-6.25	74.00	200	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-09-04
Factor	DRH18-E	Temp. / Humidity	23°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

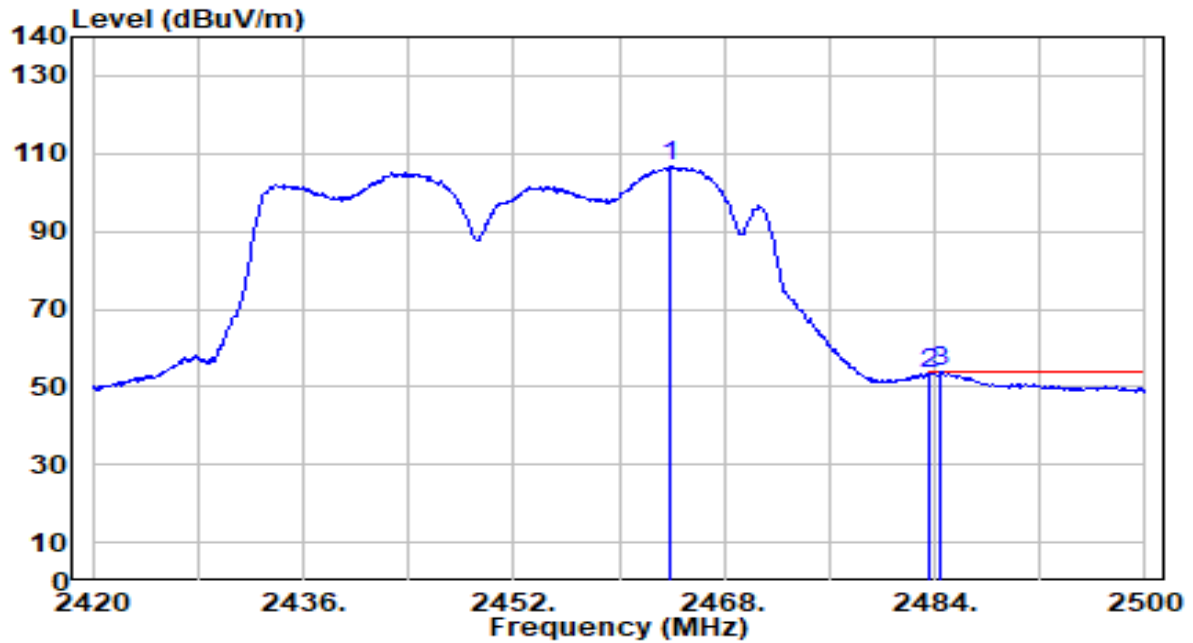

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.920	76.10	30.76	106.86	N/A	N/A	200	153	Average
2		2483.500	22.65	30.81	53.46	-0.54	54.00	200	153	Average
3	*	2484.480	23.07	30.82	53.88	-0.12	54.00	200	153	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

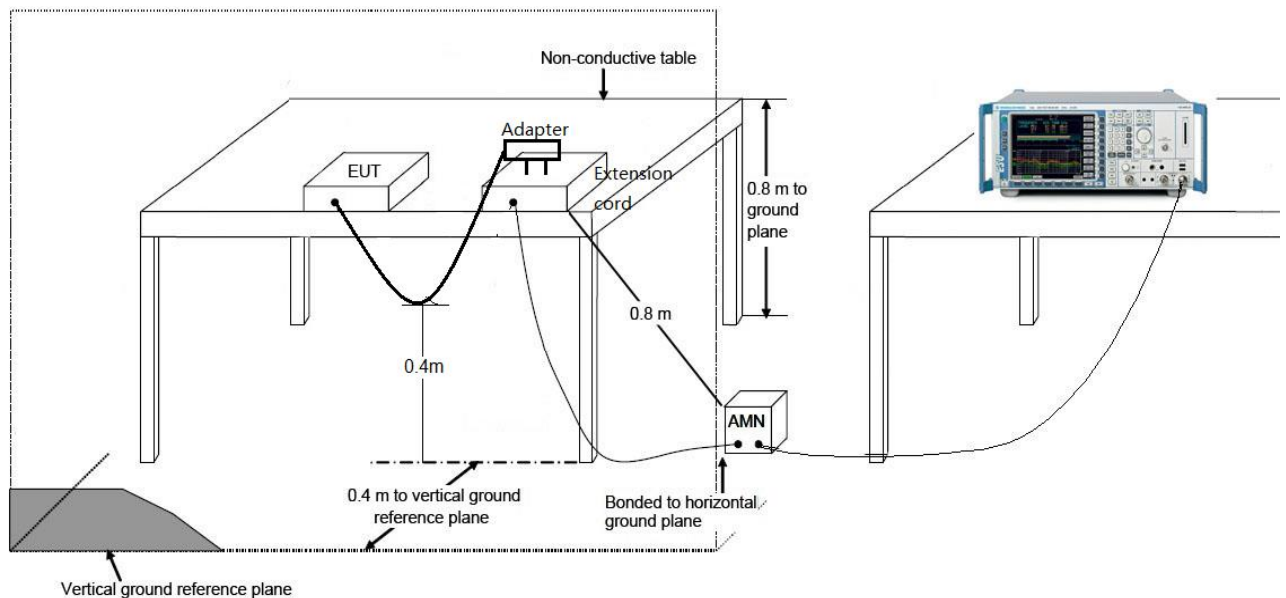

7.8.3.Test Result

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /49%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

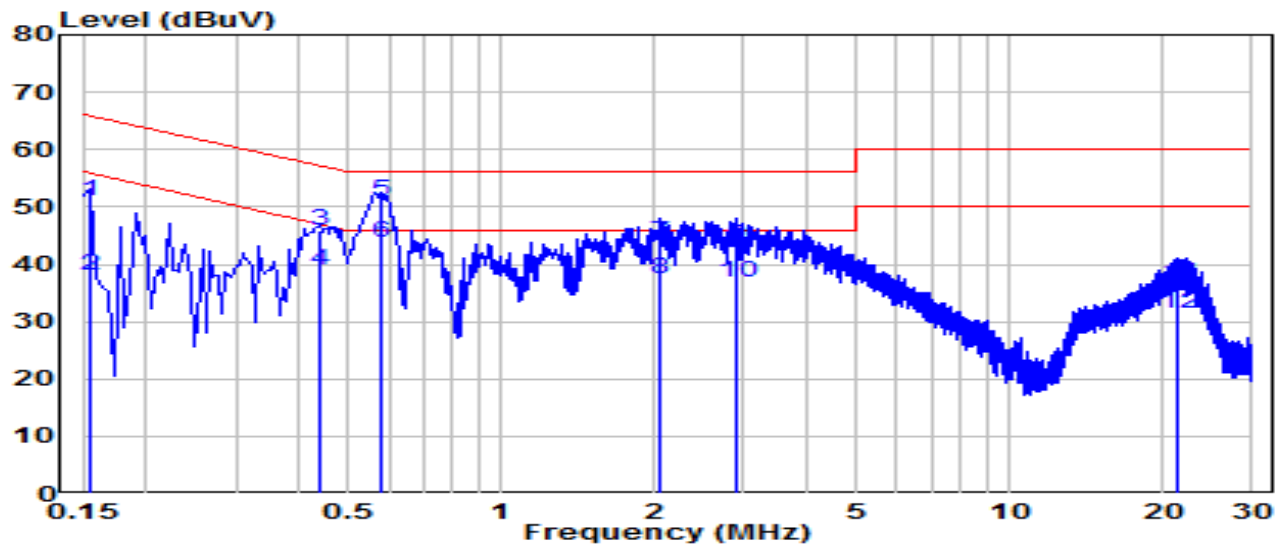


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	41.41	9.63	51.04	-14.72	65.75	QP
2	0.154	28.39	9.63	38.02	-17.74	55.75	Average
3	0.438	36.39	9.65	46.03	-11.07	57.10	QP
4	0.438	29.23	9.65	38.88	-8.22	47.10	Average
5	* 0.577	41.26	9.66	50.92	-5.08	56.00	QP
6	* 0.577	33.99	9.66	43.65	-2.35	46.00	Average
7	2.062	34.22	9.70	43.92	-12.08	56.00	QP
8	2.062	27.75	9.70	37.45	-8.55	46.00	Average
9	2.890	33.58	9.71	43.29	-12.71	56.00	QP
10	2.890	27.03	9.71	36.74	-9.26	46.00	Average
11	21.518	26.70	9.93	36.63	-23.37	60.00	QP
12	21.518	21.59	9.93	31.52	-18.48	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /49%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

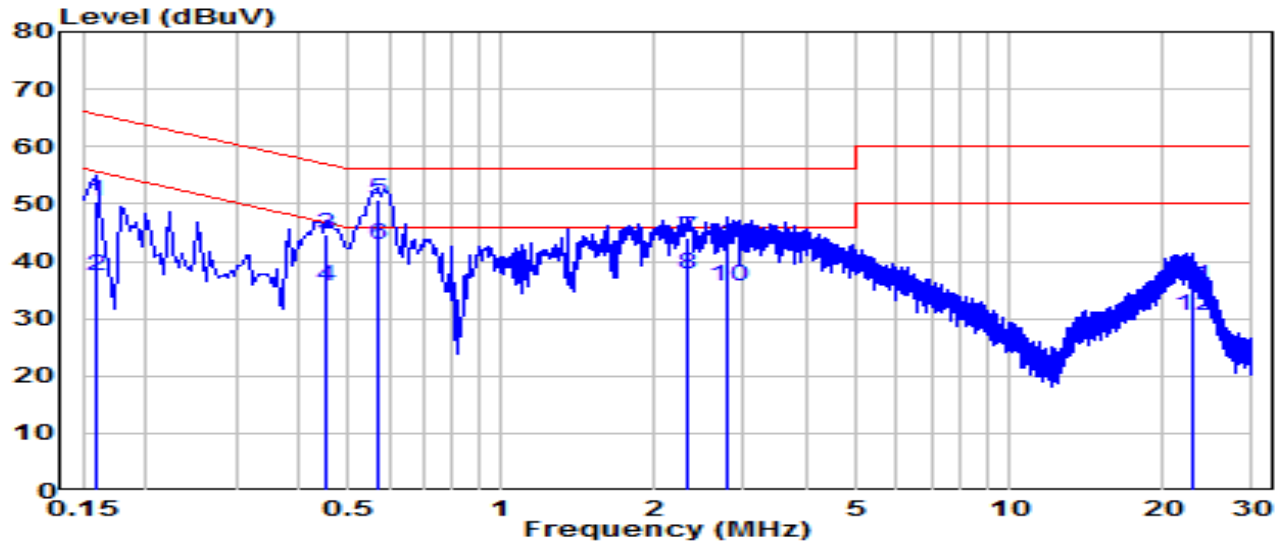


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	40.85	9.63	50.48	-15.03	65.52	QP
2	0.159	27.79	9.63	37.42	-18.10	55.52	Average
3	0.451	34.95	9.65	44.60	-12.25	56.85	QP
4	0.451	26.09	9.65	35.73	-11.11	46.85	Average
5	* 0.573	41.11	9.66	50.76	-5.24	56.00	QP
6	* 0.573	33.12	9.66	42.78	-3.22	46.00	Average
7	2.314	34.45	9.71	44.17	-11.83	56.00	QP
8	2.314	27.95	9.71	37.66	-8.34	46.00	Average
9	2.787	32.93	9.72	42.65	-13.35	56.00	QP
10	2.787	26.01	9.72	35.73	-10.27	46.00	Average
11	22.801	25.61	10.01	35.62	-24.38	60.00	QP
12	22.801	20.41	10.01	30.42	-19.58	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.8°C /49%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

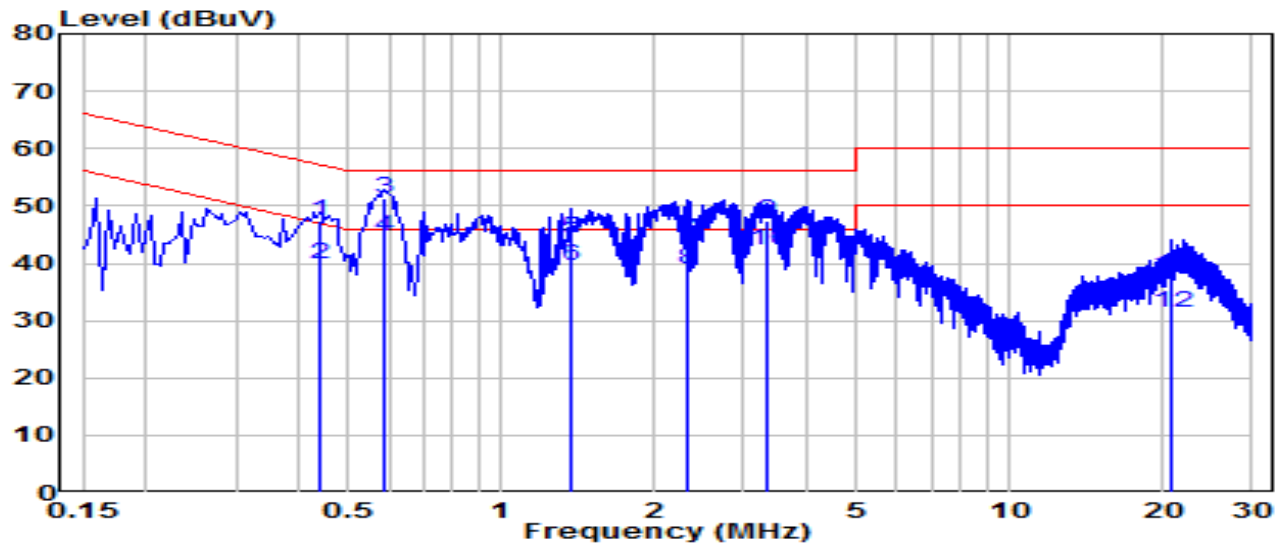


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.438	37.75	9.65	47.40	-9.70	57.10	QP
2	0.438	30.17	9.65	39.82	-7.28	47.10	Average
3	* 0.591	41.81	9.66	51.47	-4.53	56.00	QP
4	* 0.591	35.05	9.66	44.70	-1.30	46.00	Average
5	1.374	34.76	9.69	44.45	-11.55	56.00	QP
6	1.374	29.87	9.69	39.56	-6.44	46.00	Average
7	2.314	34.33	9.70	44.03	-11.97	56.00	QP
8	2.314	29.23	9.70	38.93	-7.07	46.00	Average
9	3.327	37.79	9.72	47.51	-8.49	56.00	QP
10	3.327	32.67	9.72	42.39	-3.61	46.00	Average
11	20.753	27.80	9.94	37.74	-22.26	60.00	QP
12	20.753	21.60	9.94	31.54	-18.46	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE19000 Tri-Band Wi-Fi 7 Router	Date of Test	2024-08-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.8°C /49%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

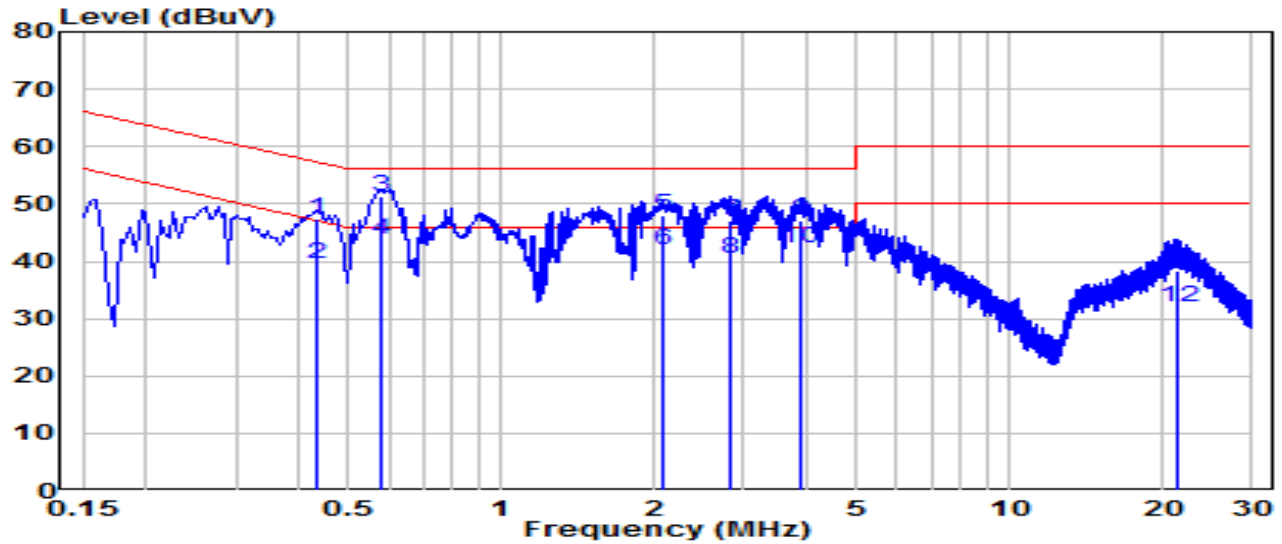

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.433	37.72	9.65	47.37	-9.82	57.19	QP
2	0.433	29.86	9.65	39.50	-7.68	47.19	Average
3	* 0.582	41.55	9.66	51.21	-4.79	56.00	QP
4	* 0.582	34.21	9.66	43.87	-2.13	46.00	Average
5	2.085	38.15	9.71	47.86	-8.14	56.00	QP
6	2.085	32.12	9.71	41.83	-4.17	46.00	Average
7	2.814	37.29	9.72	47.01	-8.99	56.00	QP
8	2.814	30.62	9.72	40.35	-5.65	46.00	Average
9	3.858	37.41	9.74	47.14	-8.86	56.00	QP
10	3.858	32.50	9.74	42.24	-3.76	46.00	Average
11	21.343	28.41	10.00	38.41	-21.59	60.00	QP
12	21.343	22.01	10.00	32.01	-17.99	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2407TW0116-UT” file.

Appendix B : External Photograph

Refer to “2407TW0116-UE” file.

Appendix C : Internal Photograph

Refer to “2407TW0116-UI” file.

_____ The End _____