


Appendix B

Peak Output Power




Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
Ref Lvl	2.93 dBm	VBW	1 MHz	
20 dBm	2.40209118 GHz	SWT	5 ms	Unit dBm

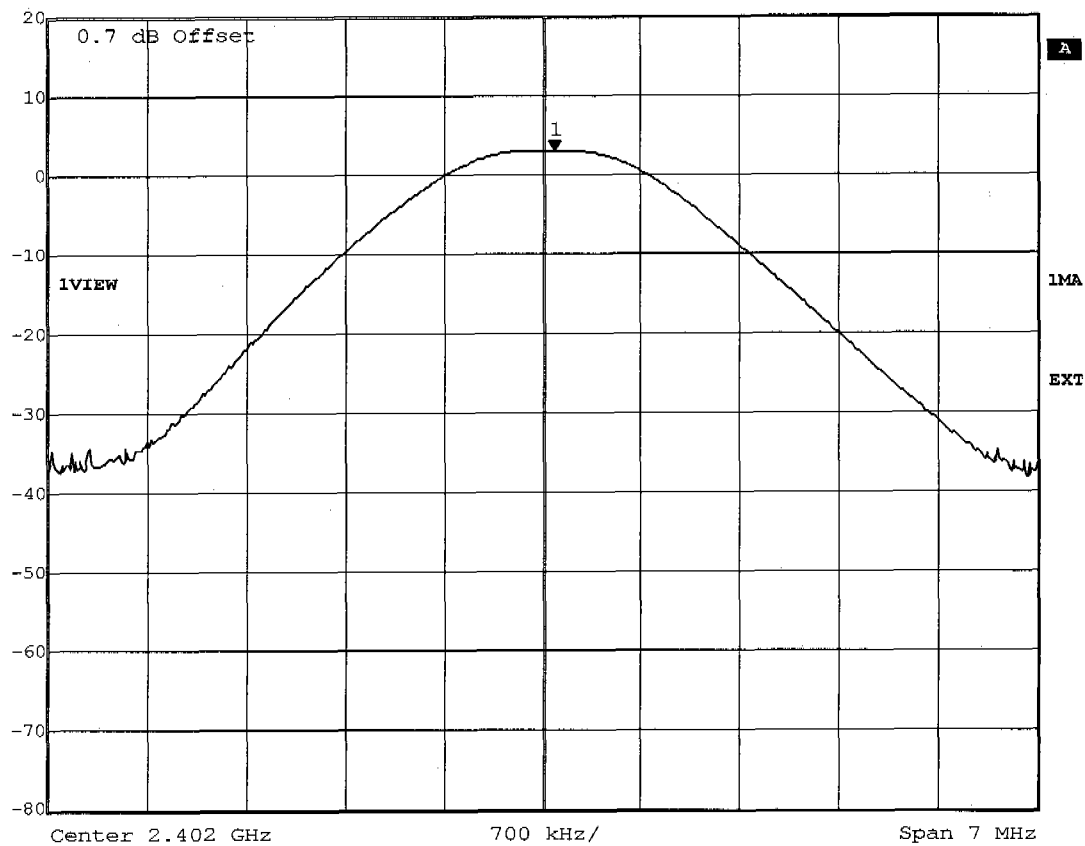

Title: Peak Output Power conducted Ch.: 0
Comment A: Jabra BT500
Date: 6.APR.2005 08:19:04




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.51 dBm VBW 1 MHz
20 dBm 2.44117535 GHz SWT 5 ms Unit dBm

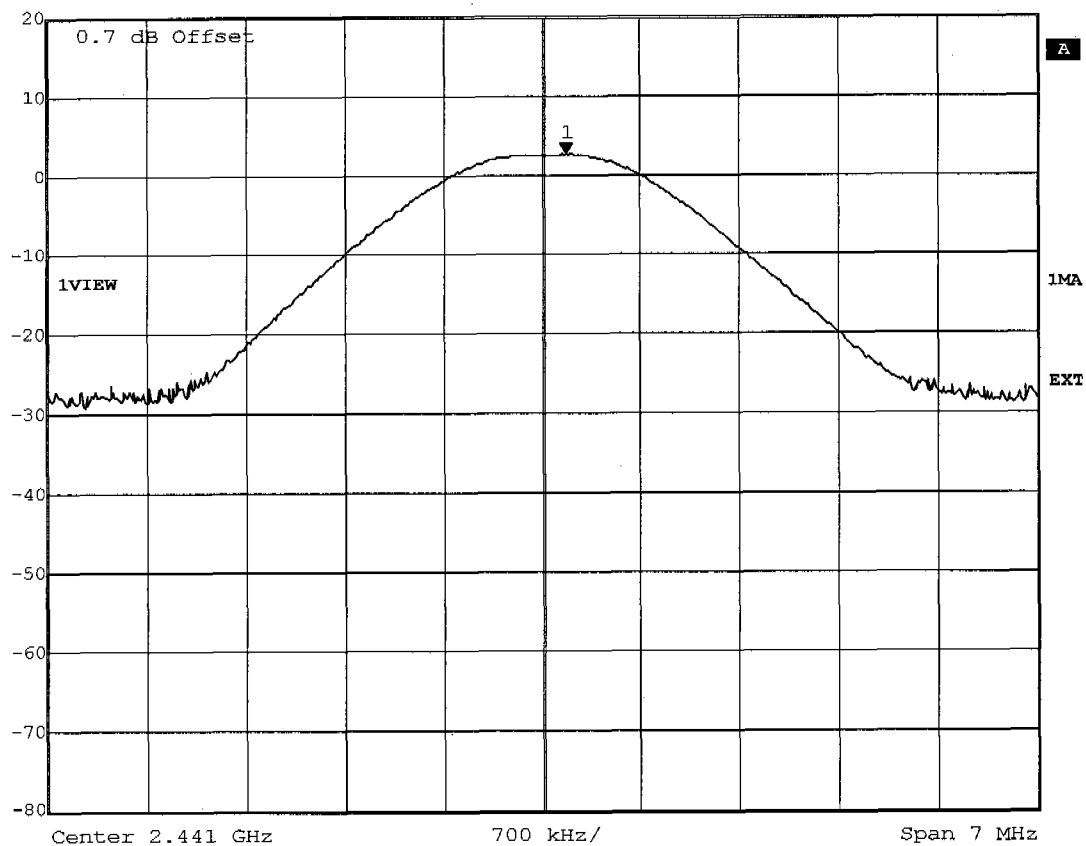

Title: Peak Output Power conducted Ch.: 39
Comment A: Jabra BT500
Date: 6.APR.2005 08:20:09



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
20 dBm	1.82 dBm	VBW	1 MHz		
	2.48017535 GHz	SWT	5 ms	Unit	dBm

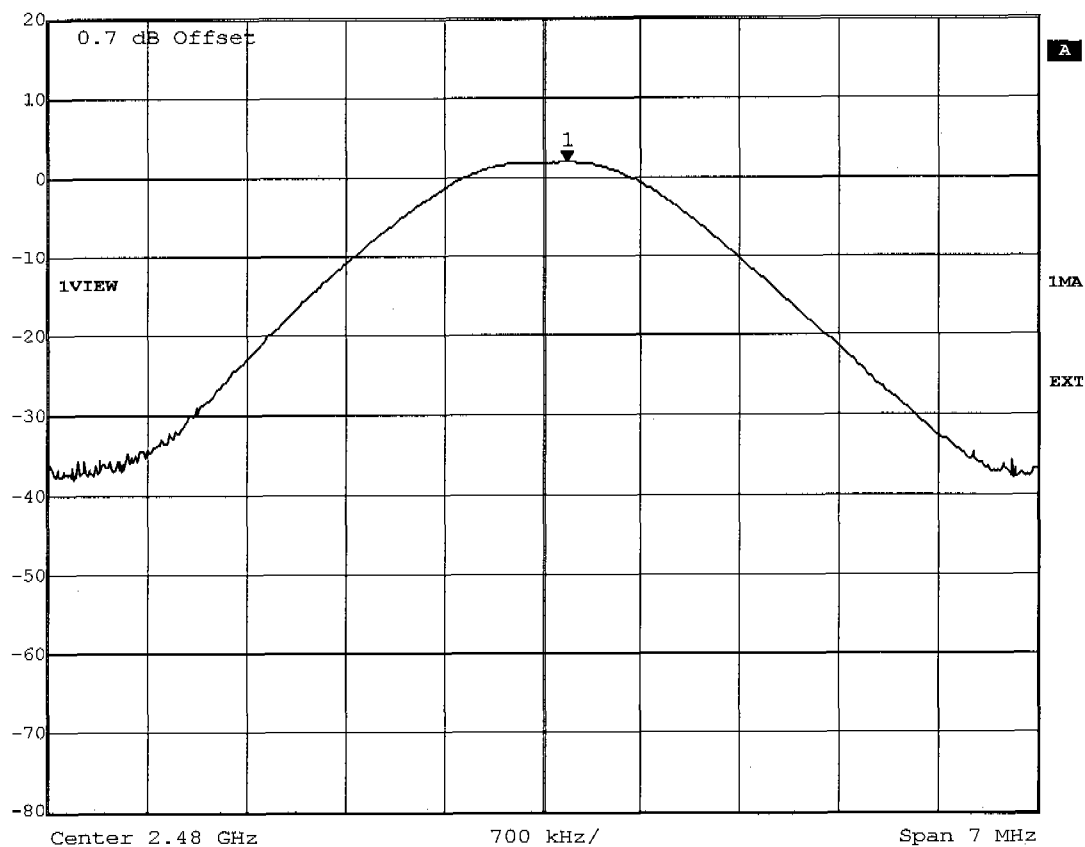

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra BT500
Date: 6.APR.2005 08:21:00


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 94.95dBµV/m, REW: 100kHz

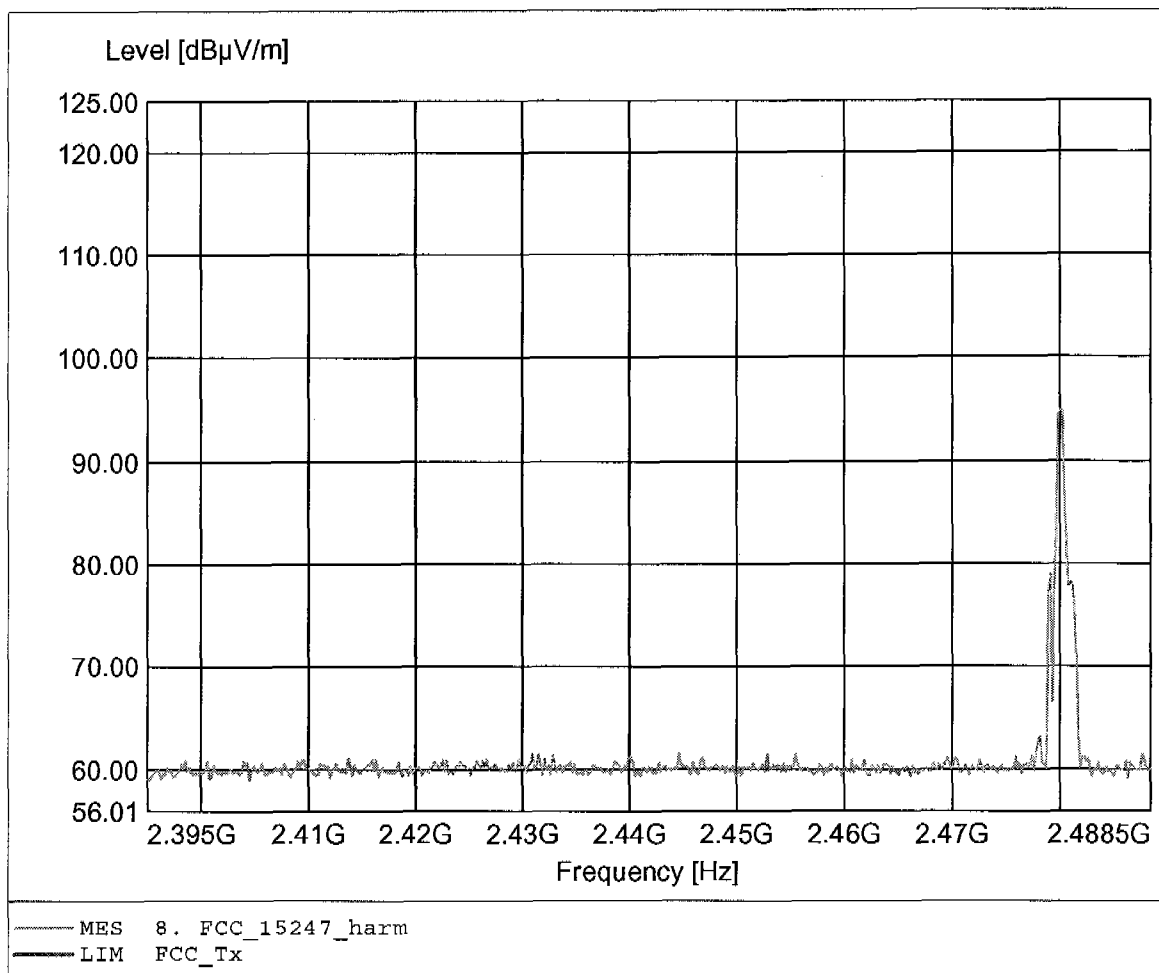

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.44dBµV/m, RBW: 100kHz

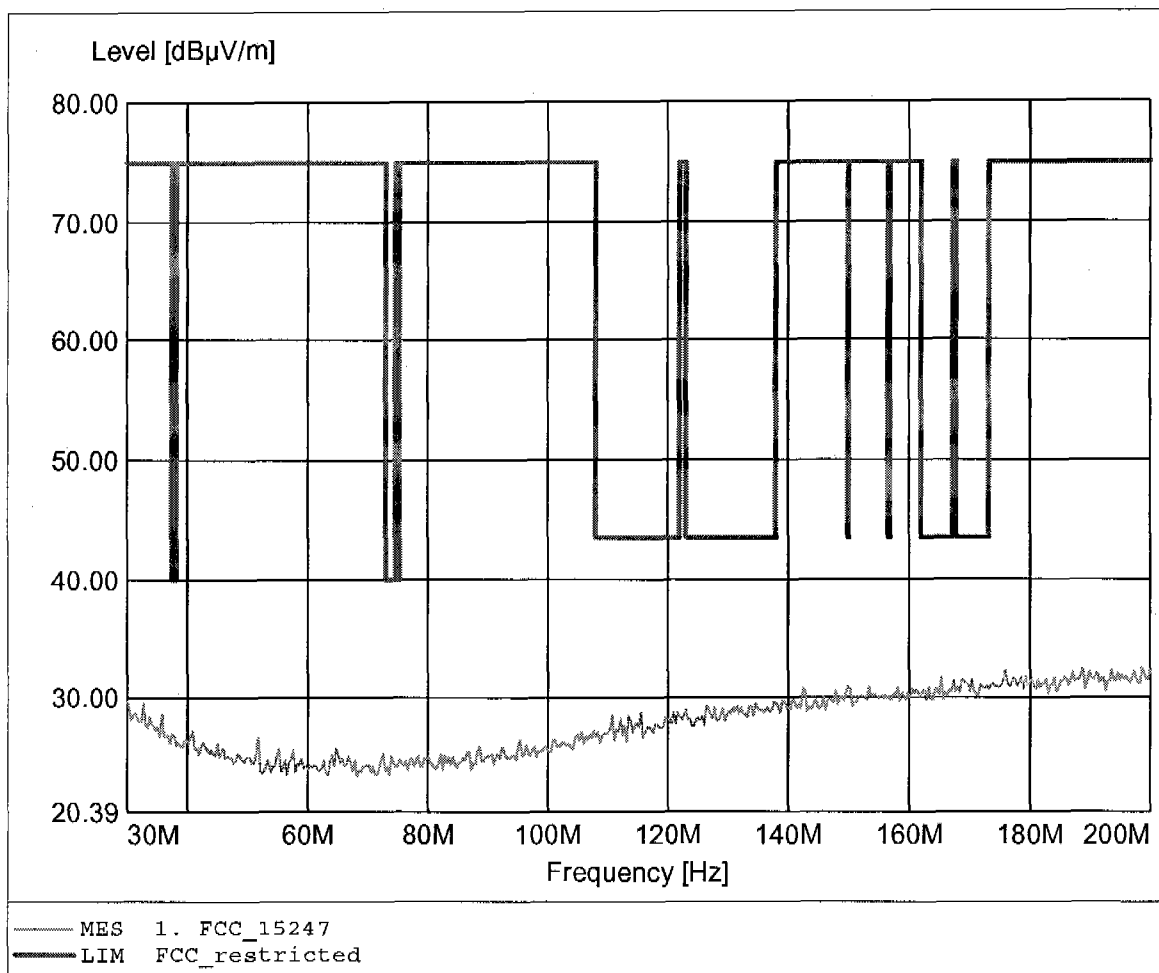

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 33.33dBµV/m, RBW: 100kHz

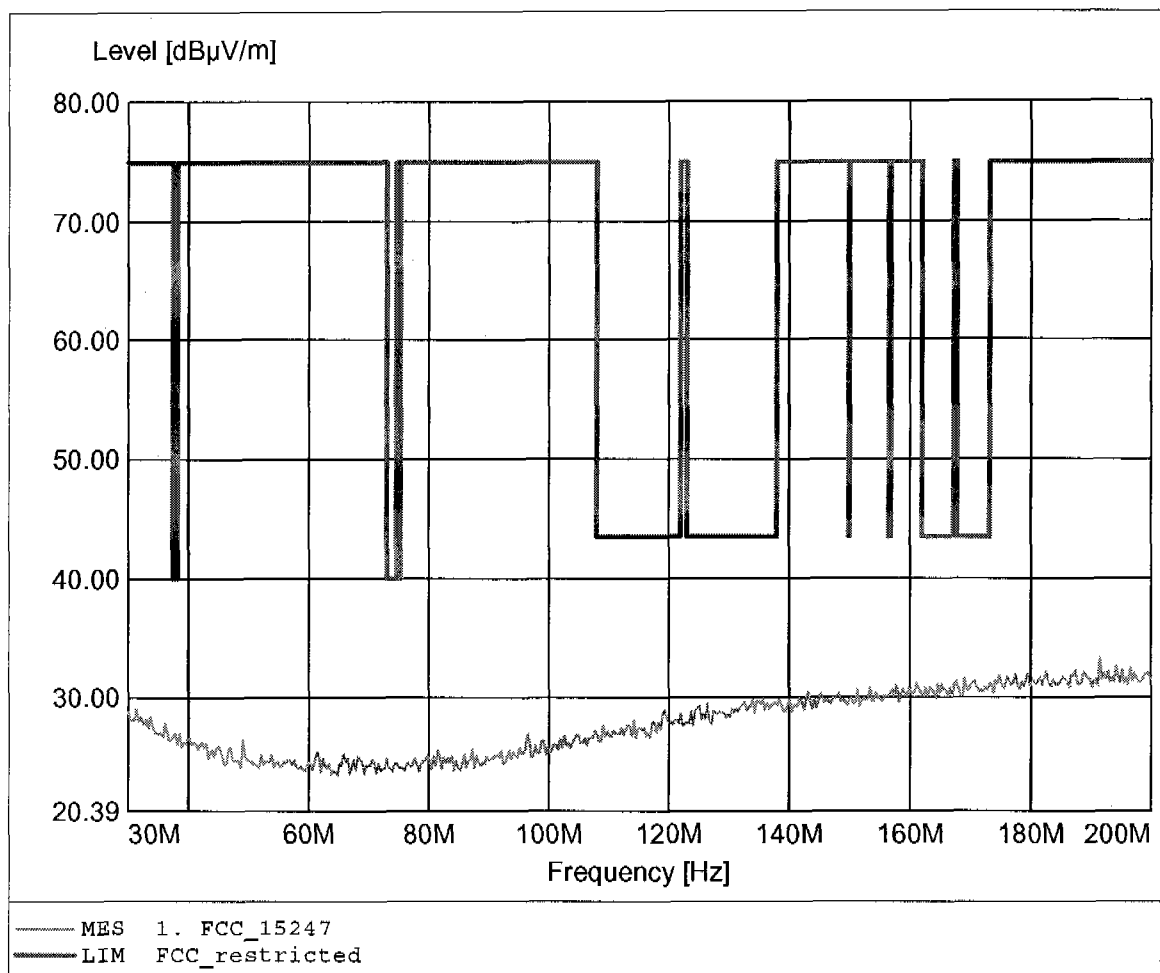

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 812.425MHz, Emax: 23.25dBµV/m, RBW: 100kHz

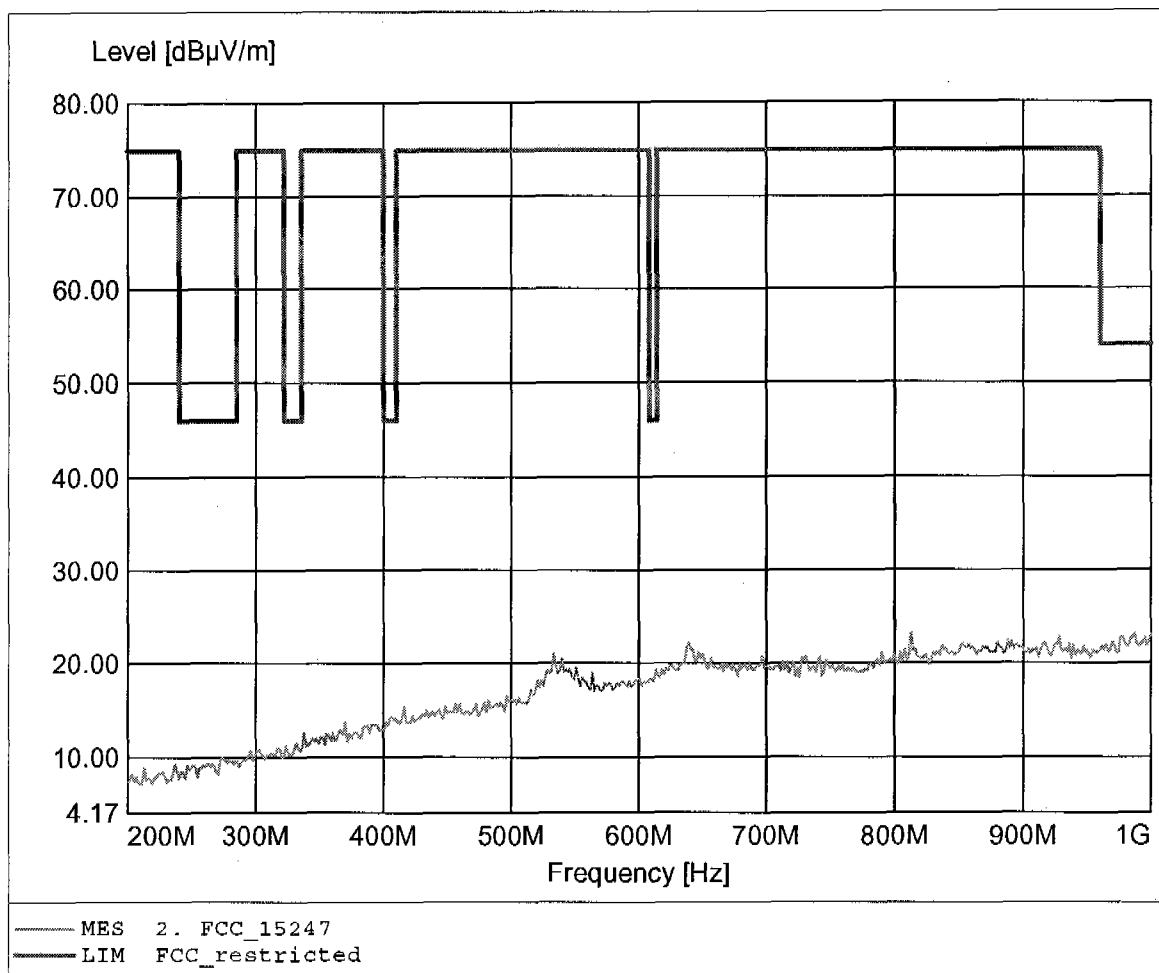

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 998.397MHz, Emax: 23.02dBµV/m, RBW: 100kHz

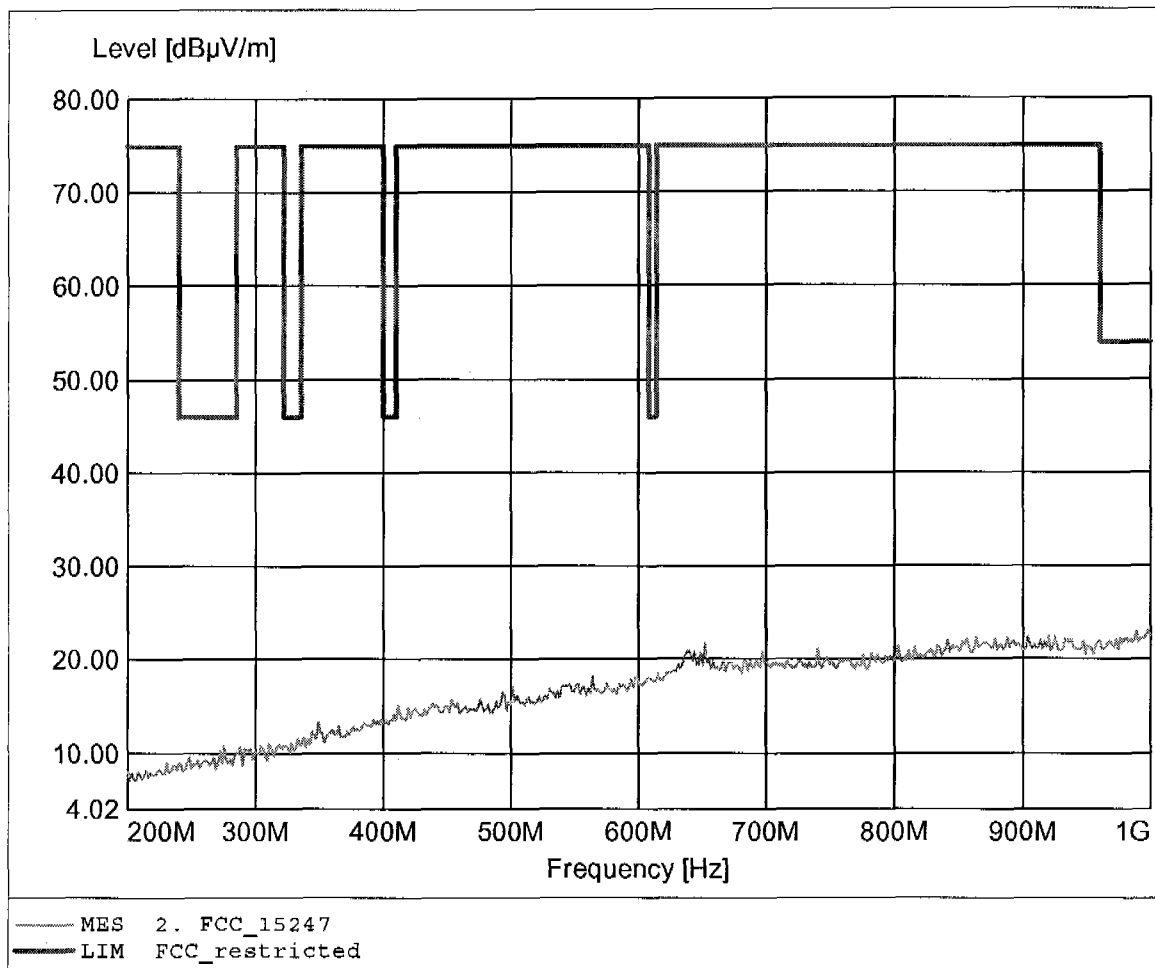

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.397GHz, Emax: 48.78dBμV/m, RBW: 1MHz

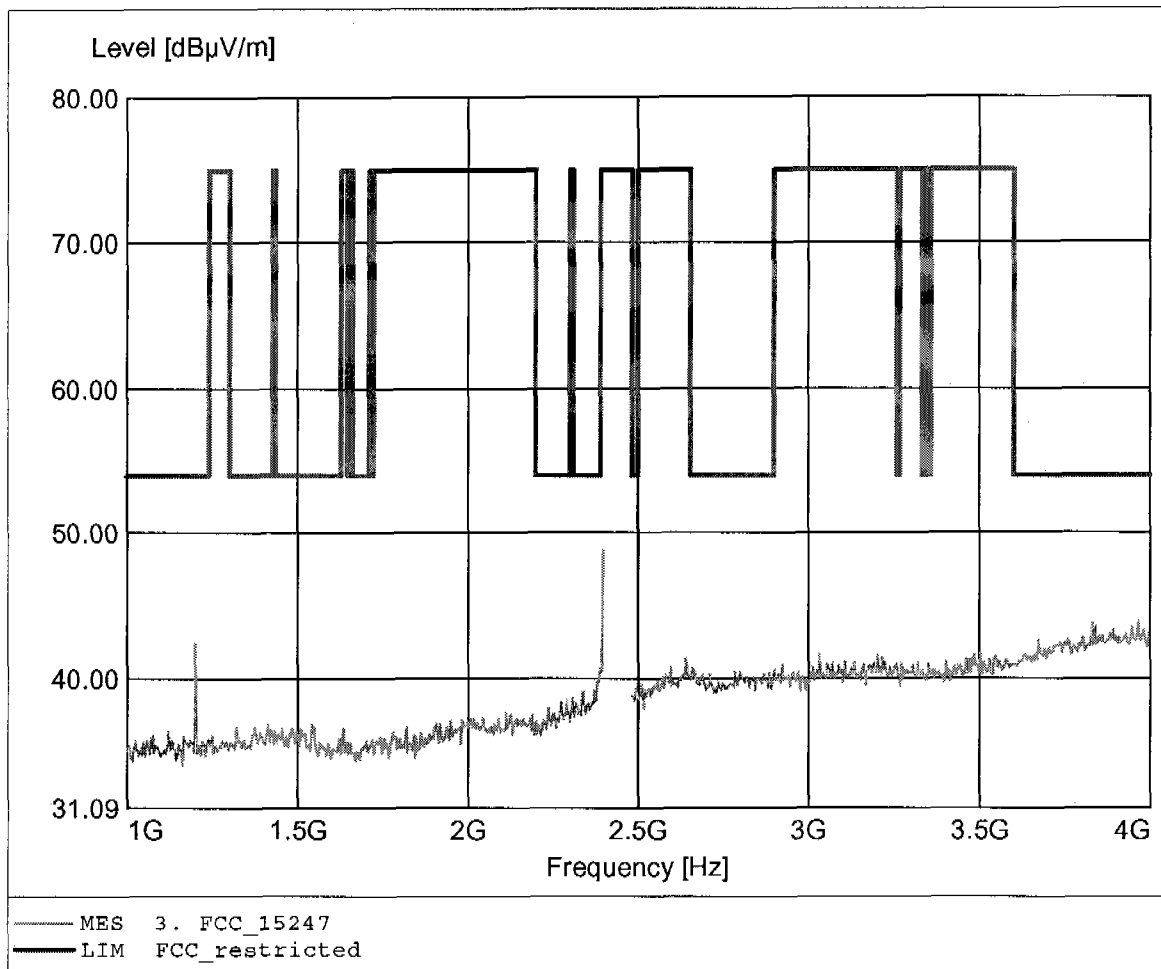

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.936GHz, Emax: 44.11dBµV/m, RBW: 1MHz

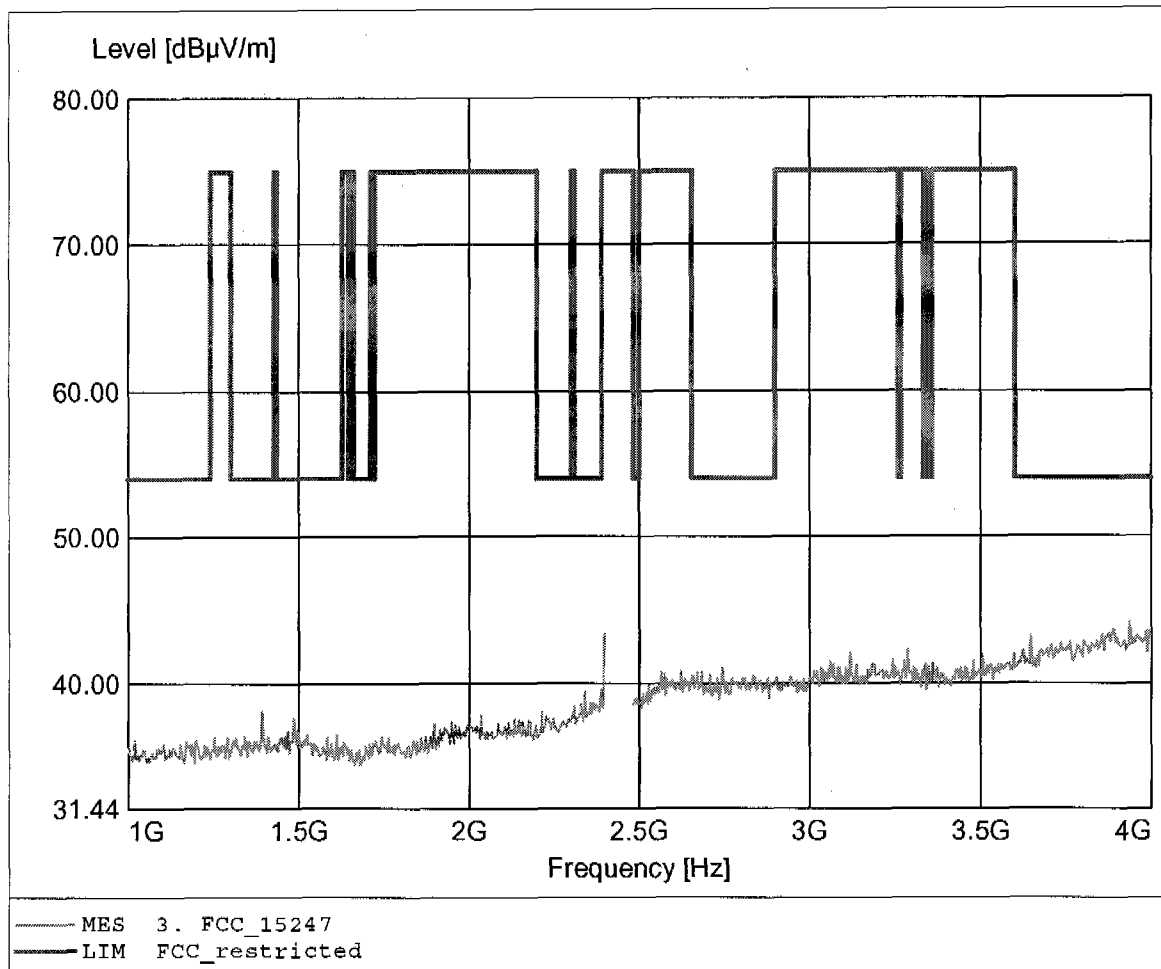

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 51.20dBμV/m, RBW: 1MHz

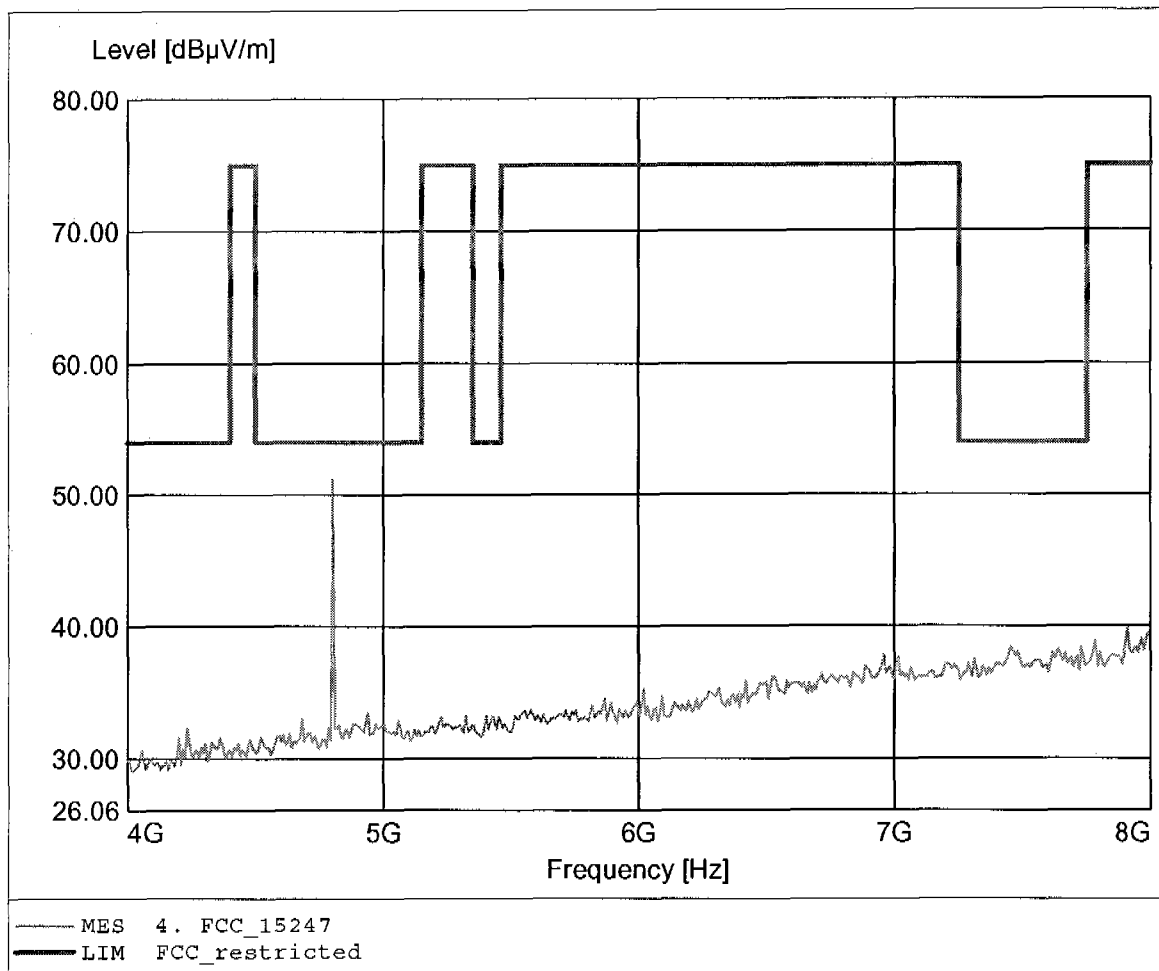

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 50.15dBµV/m, RBW: 1MHz

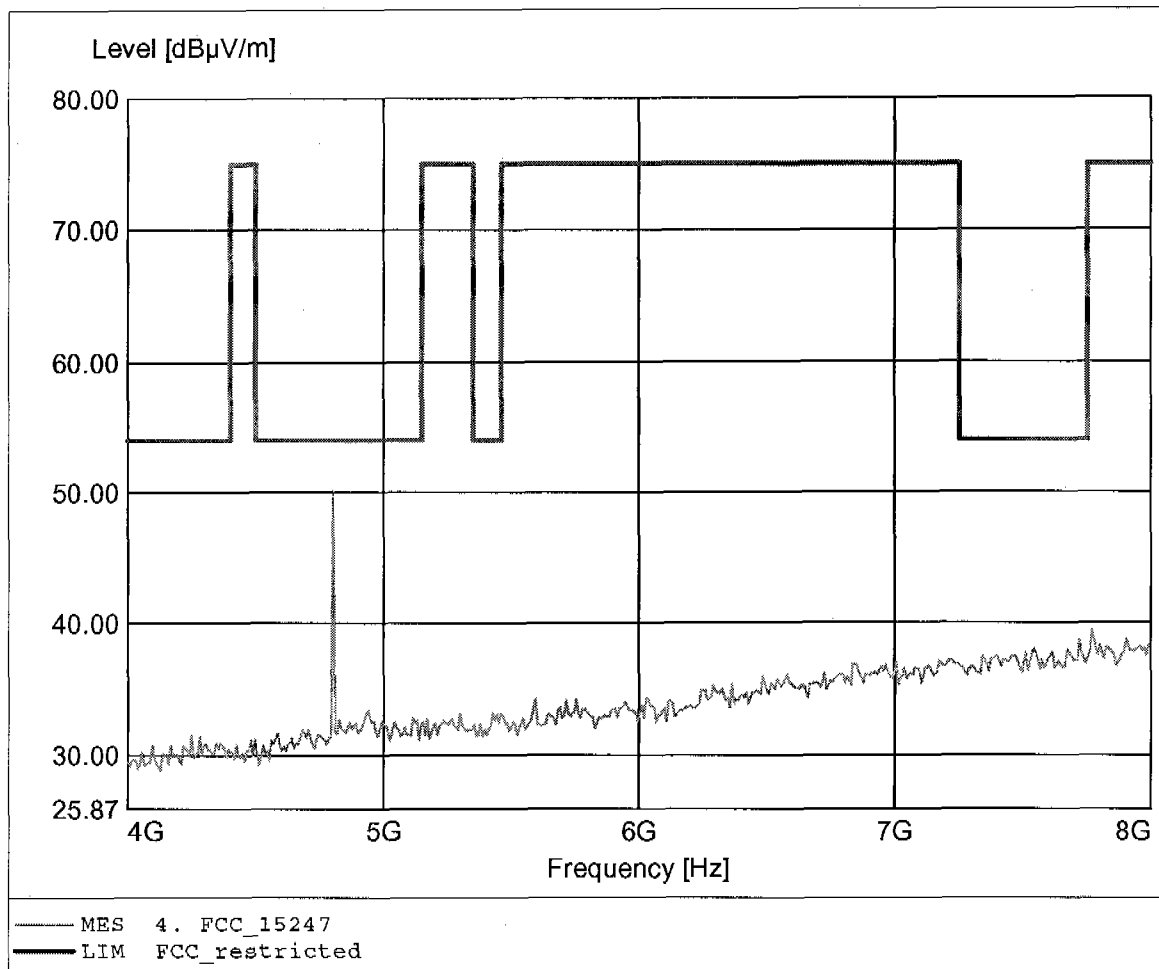

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.431GHz, Emax: 43.01dBμV/m, RBW: 1MHz

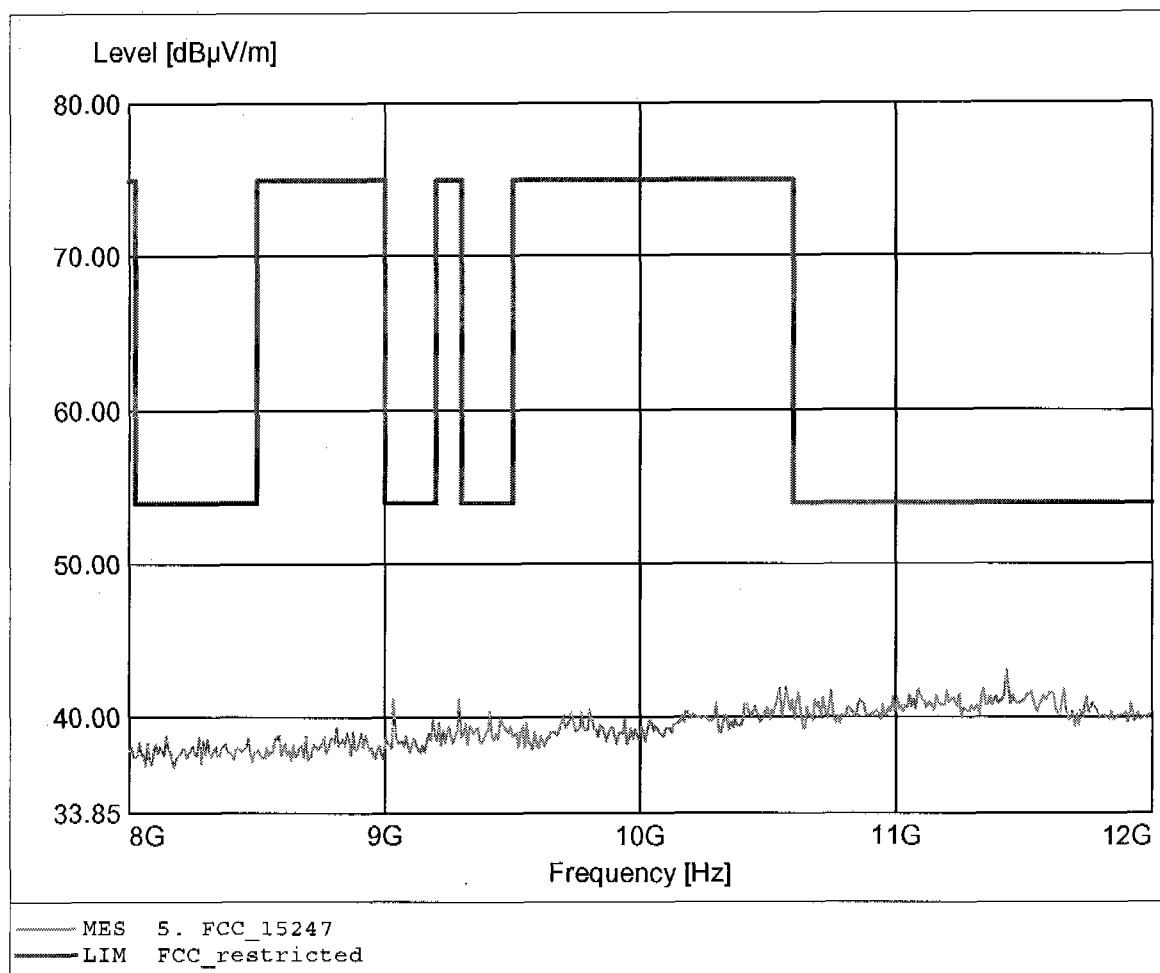

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.279GHz, Emax: 42.30dBµV/m, RBW: 1MHz

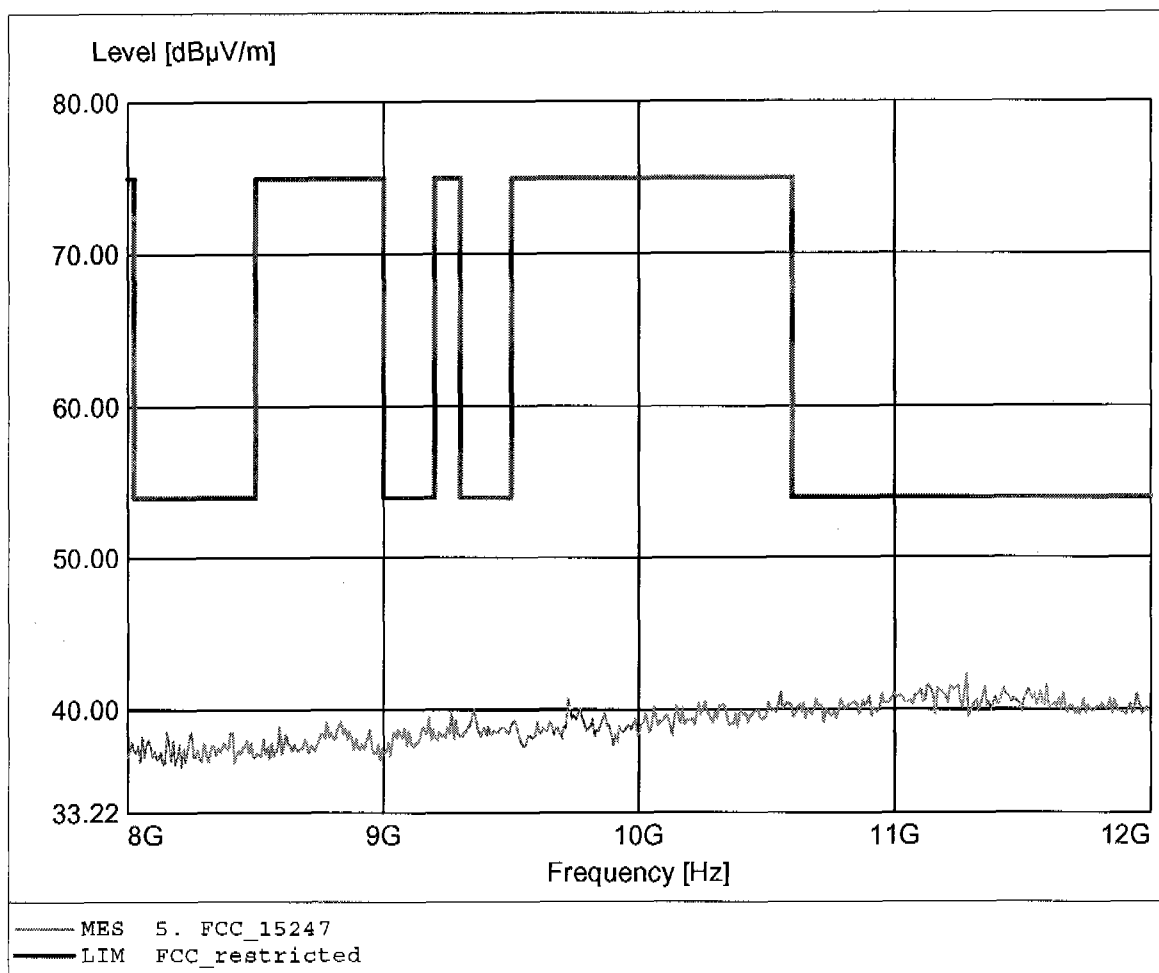

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.285GHz, Emax: 44.61dBμV/m, RBW: 1MHz

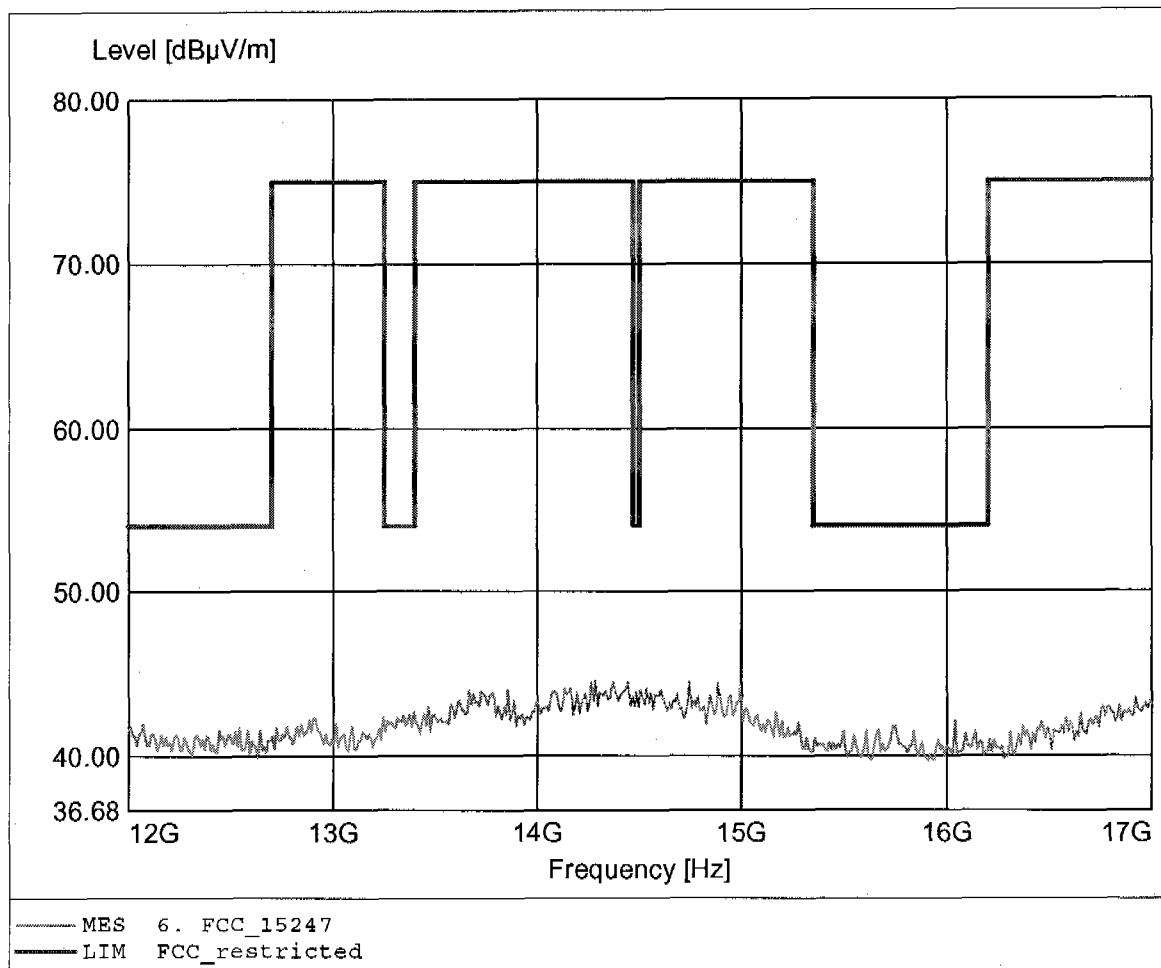

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.495GHz, Emax: 45.01dBµV/m, RBW: 1MHz

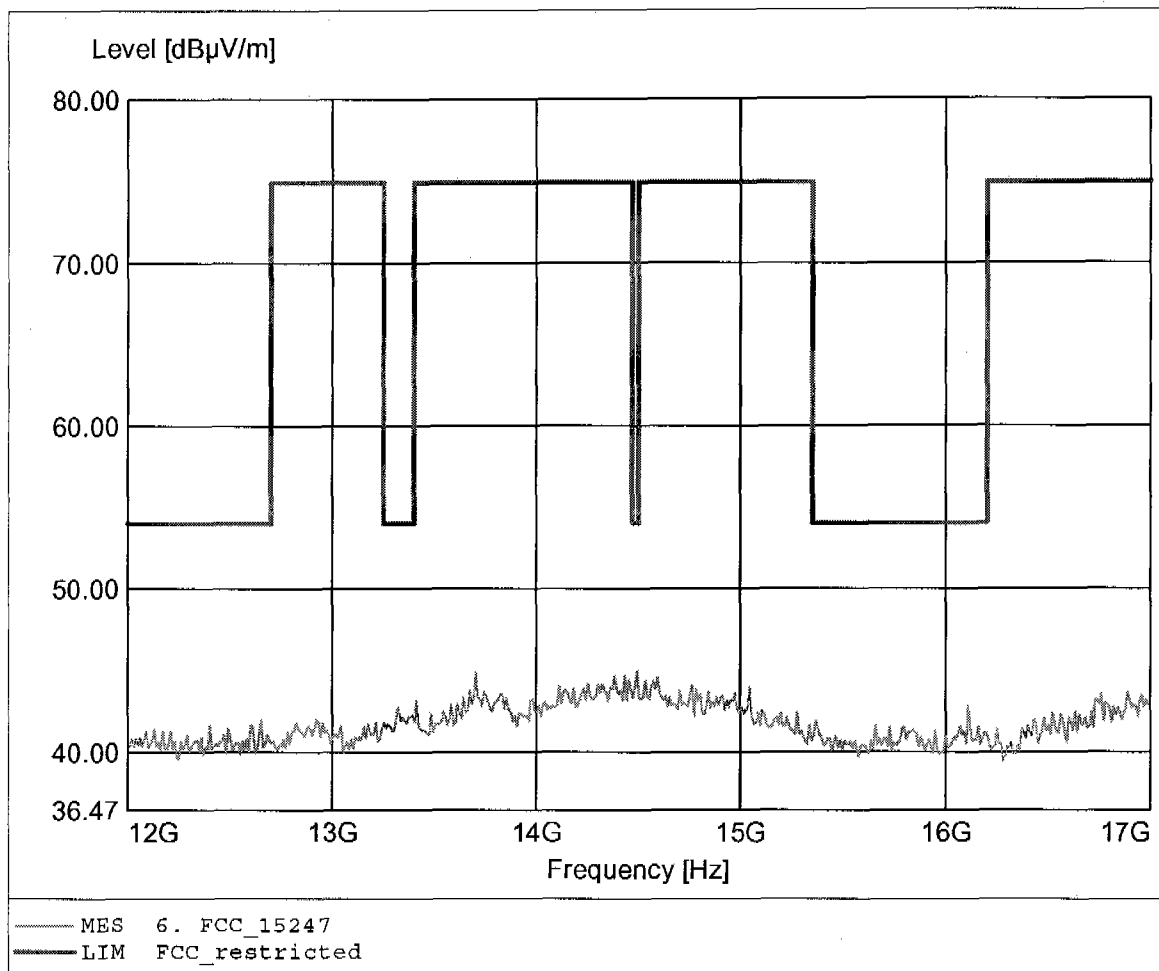

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.968GHz, Emax: 45.84dBuV/m, RBW: 1MHz

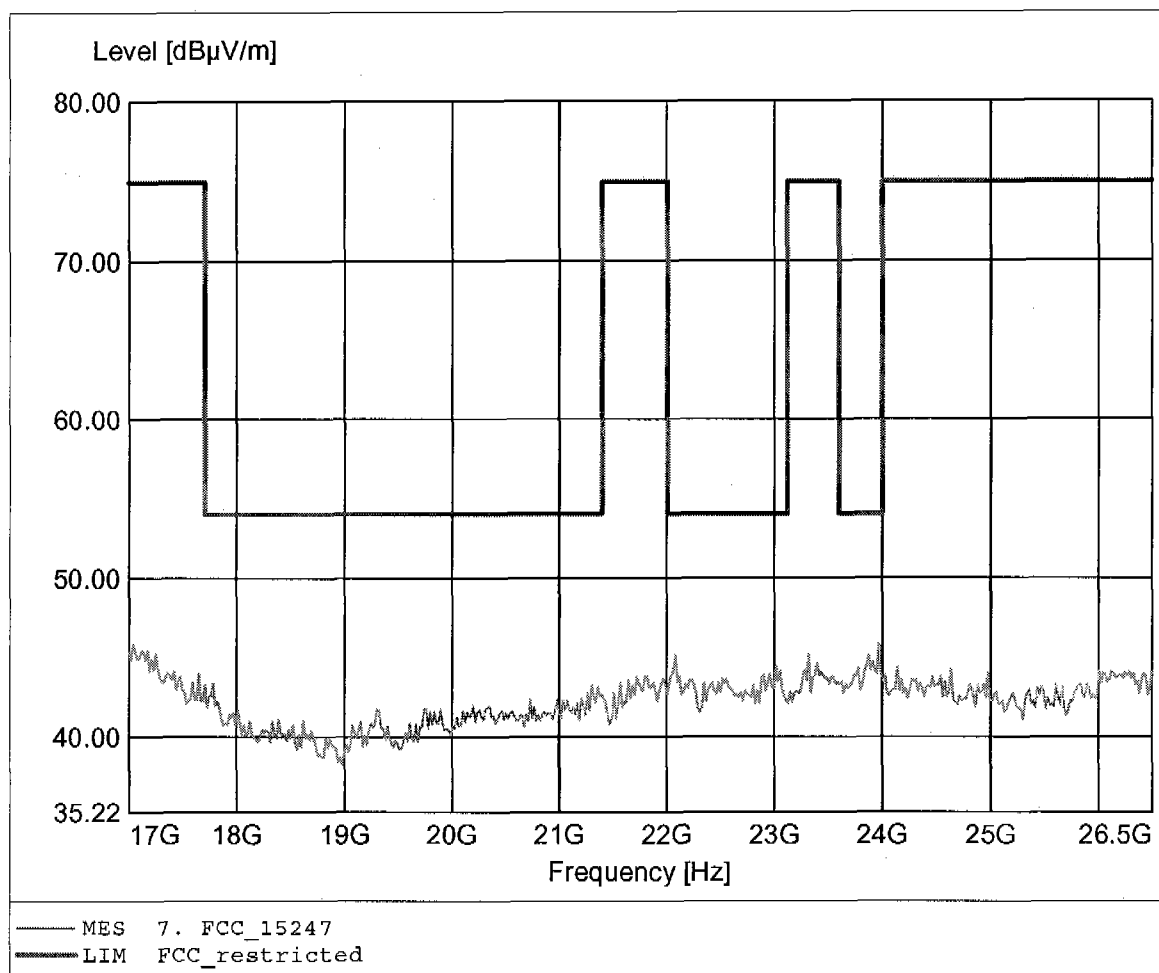

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.00dBμV/m, RBW: 1MHz

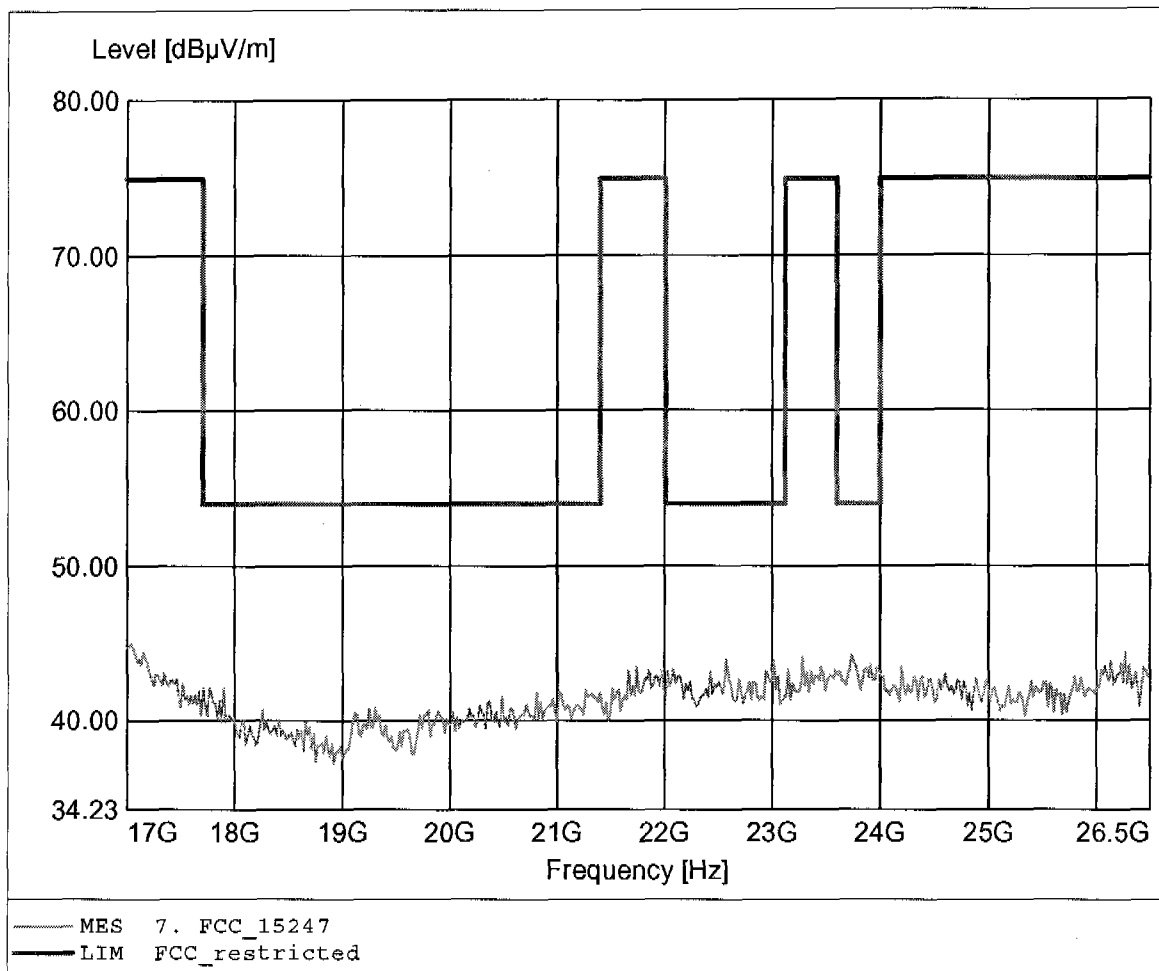

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.713MHz, Emax: 32.77dBµV/m, RBW: 100kHz

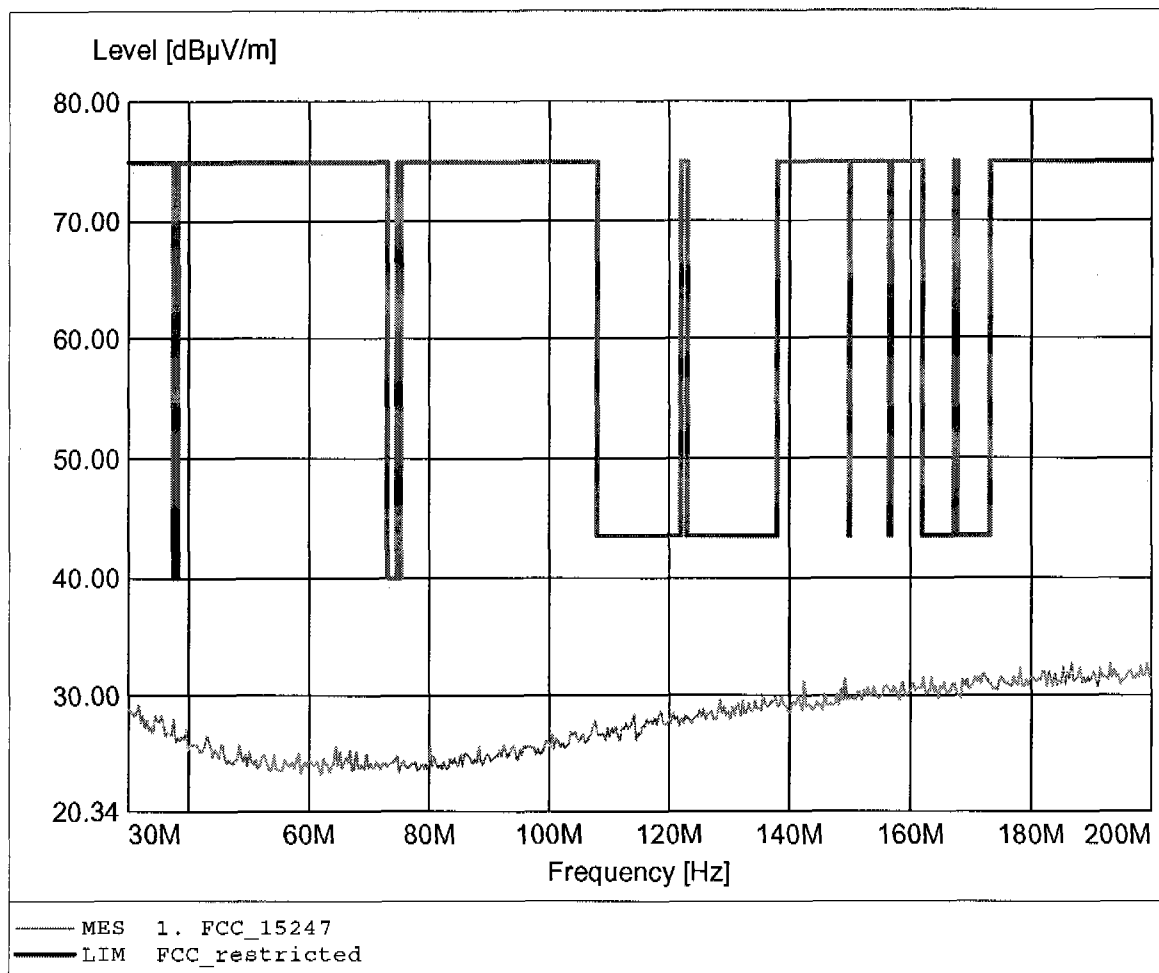

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 32.84dBµV/m, RBW: 100kHz

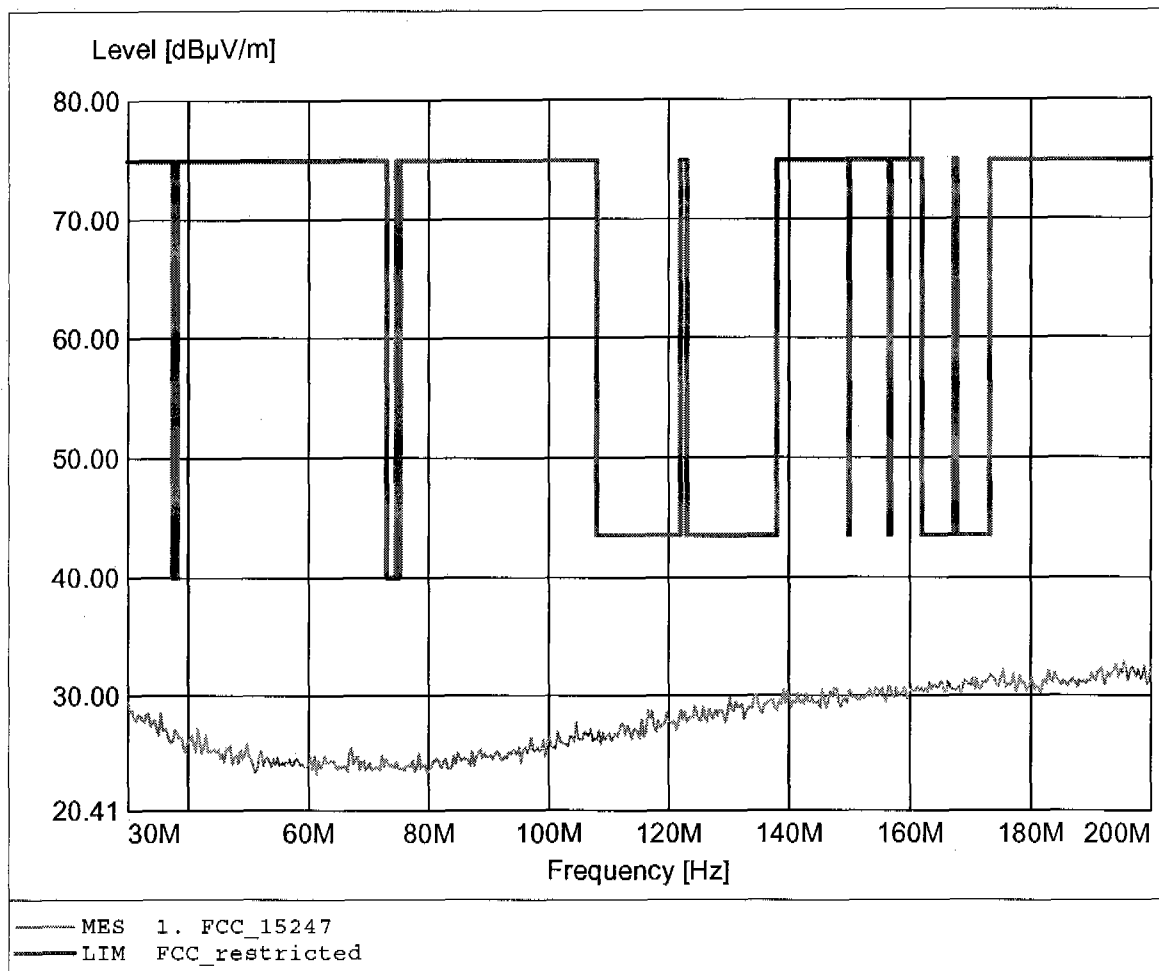

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 963.126MHz, Emax: 23.21dBµV/m, RBW: 100kHz

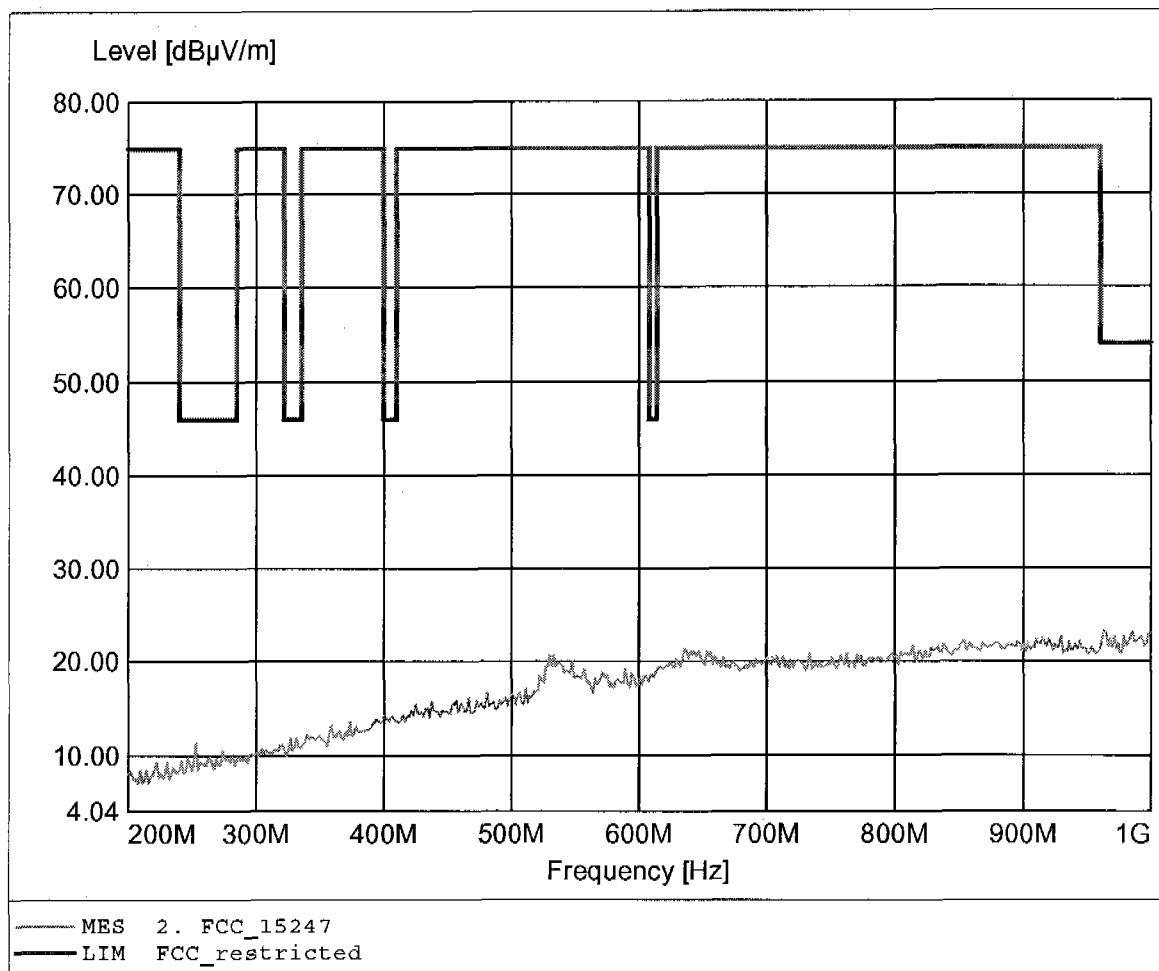

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 23.28dBµV/m, RBW: 100kHz

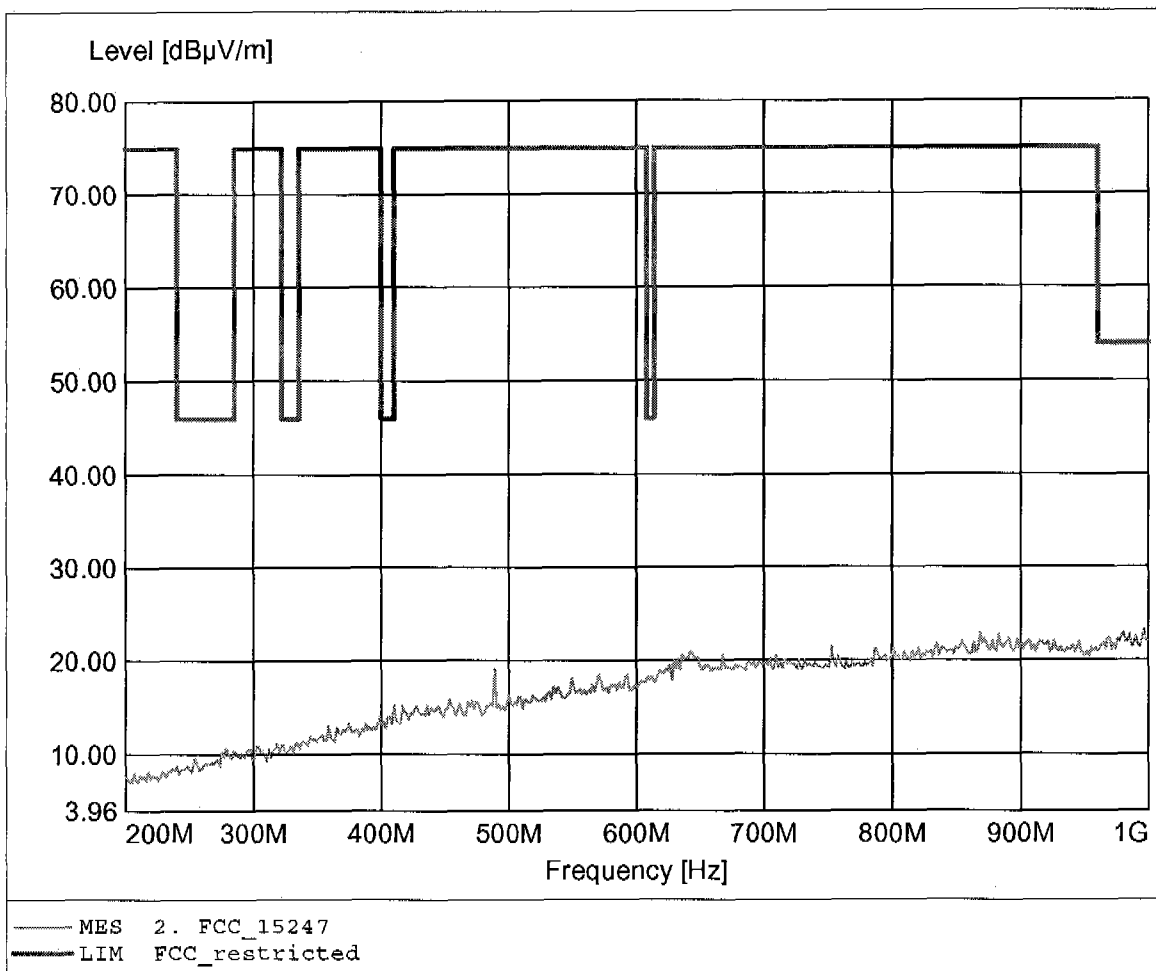

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.851GHz, Emax: 43.52dBuV/m, RBW: 1MHz

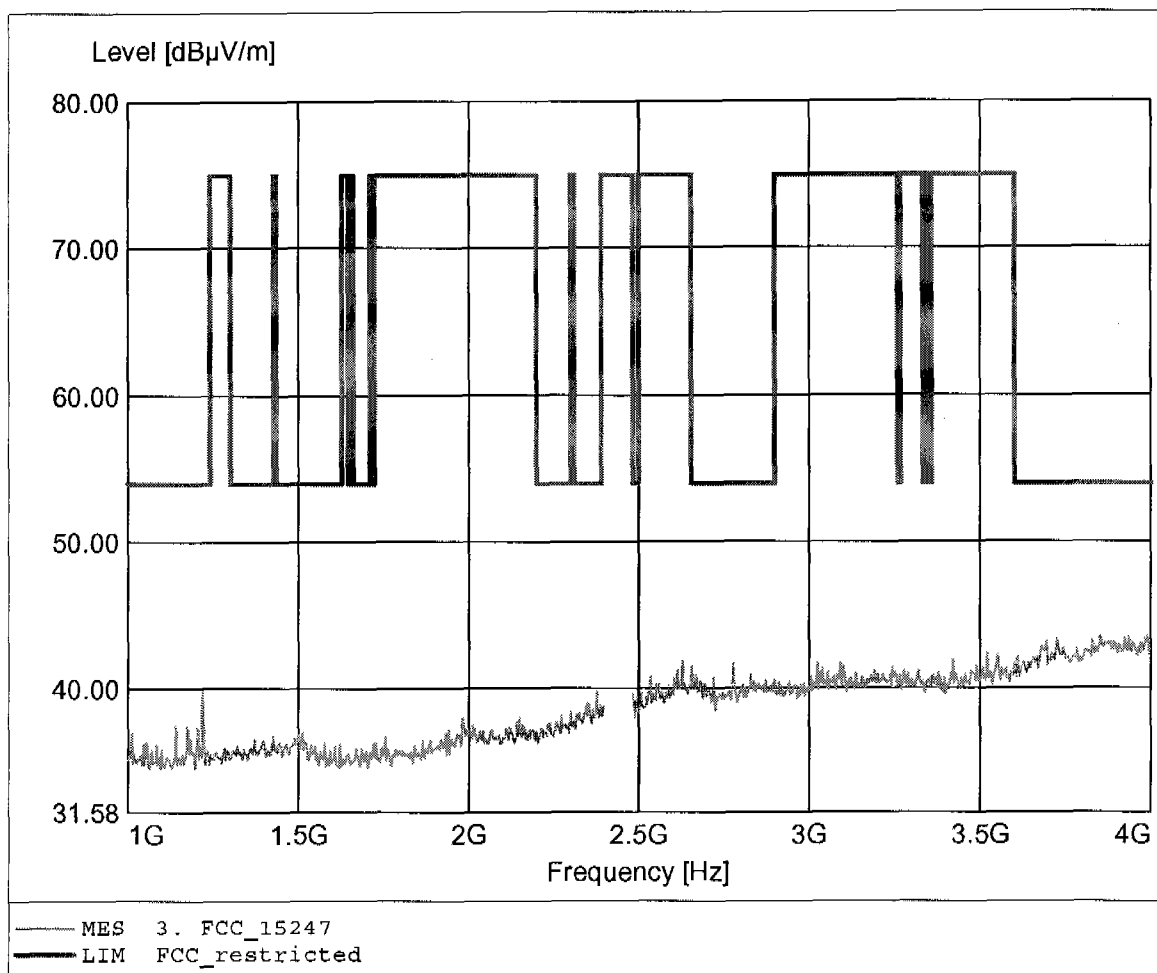

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.985GHz, Emax: 43.45dBuV/m, RBW: 1MHz

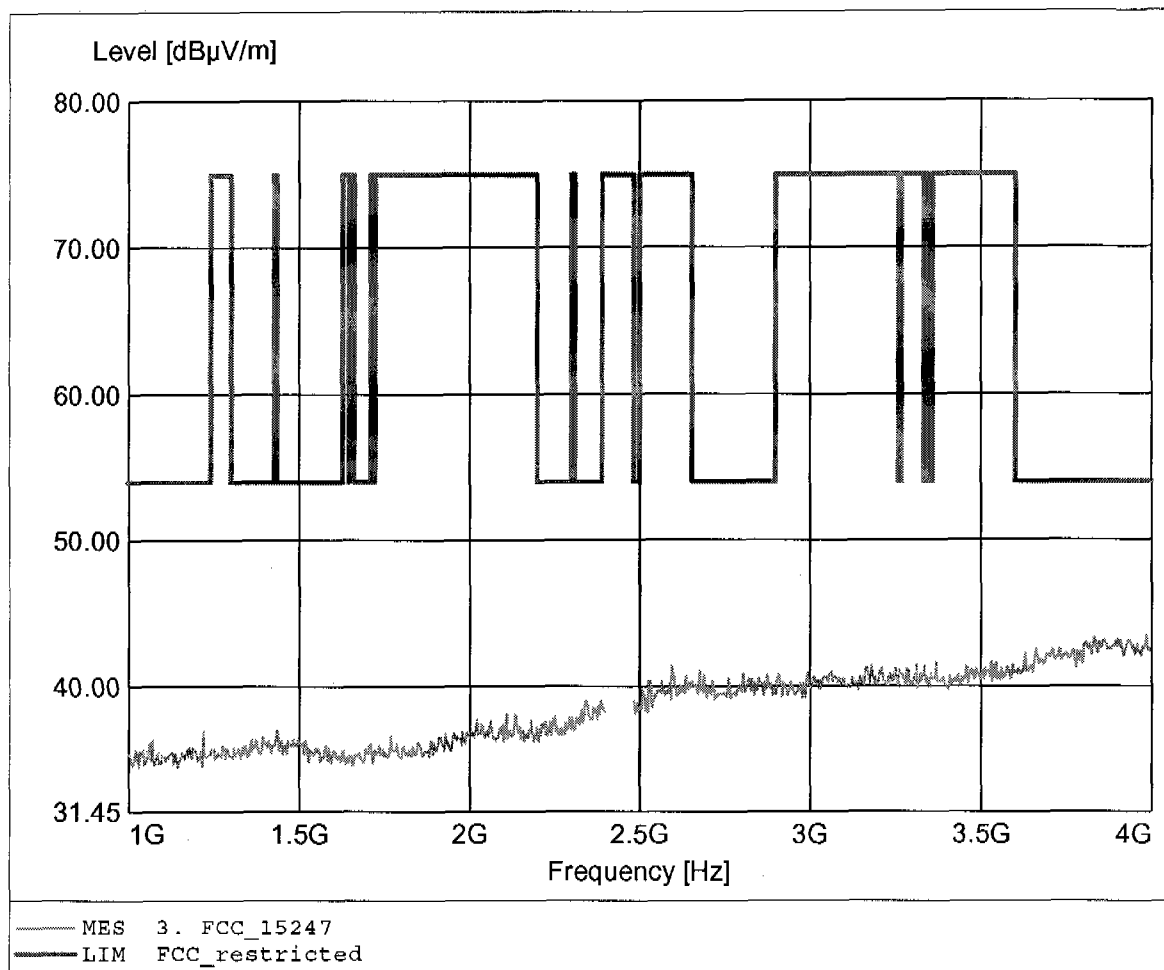

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 46.52dBuV/m, RBW: 1MHz

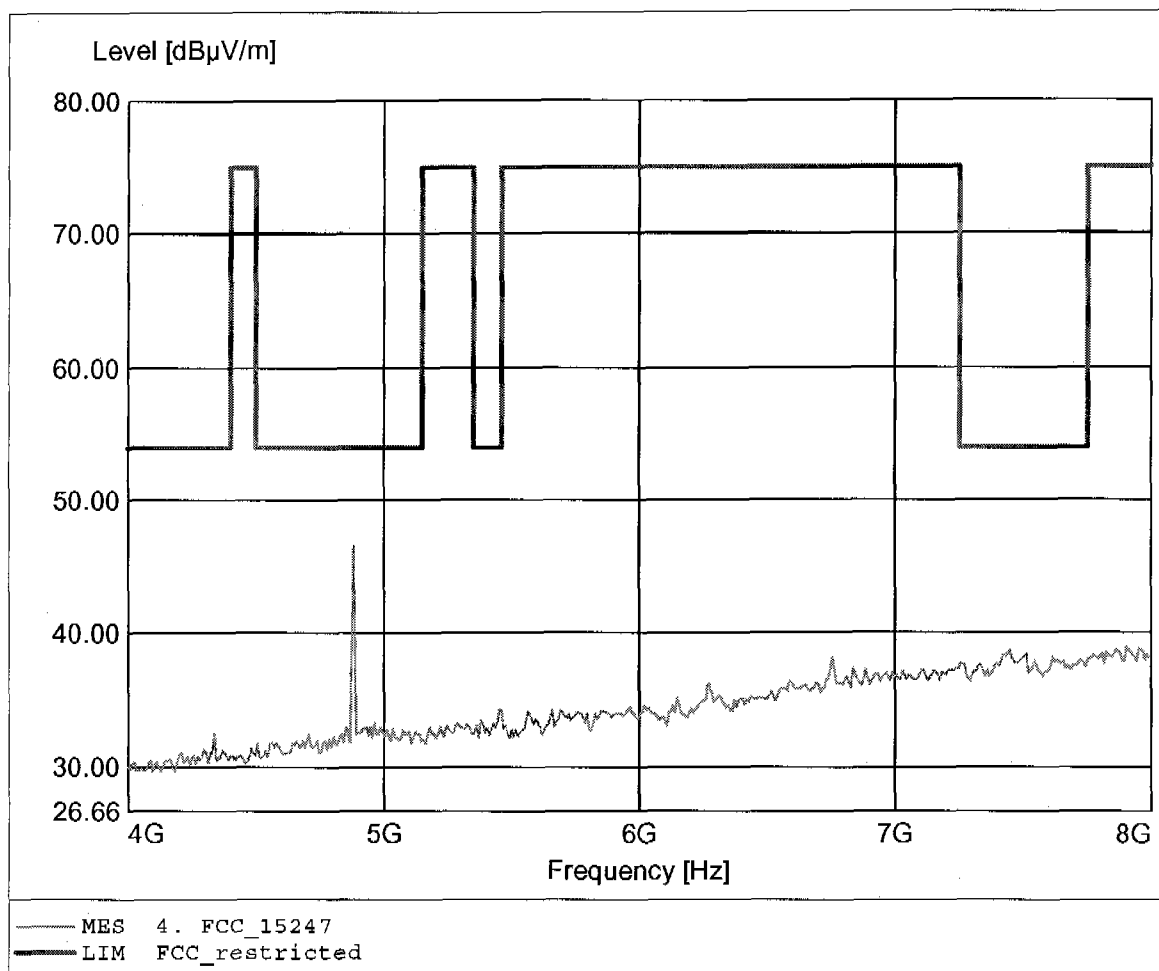

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.12dBμV/m, RBW: 1MHz

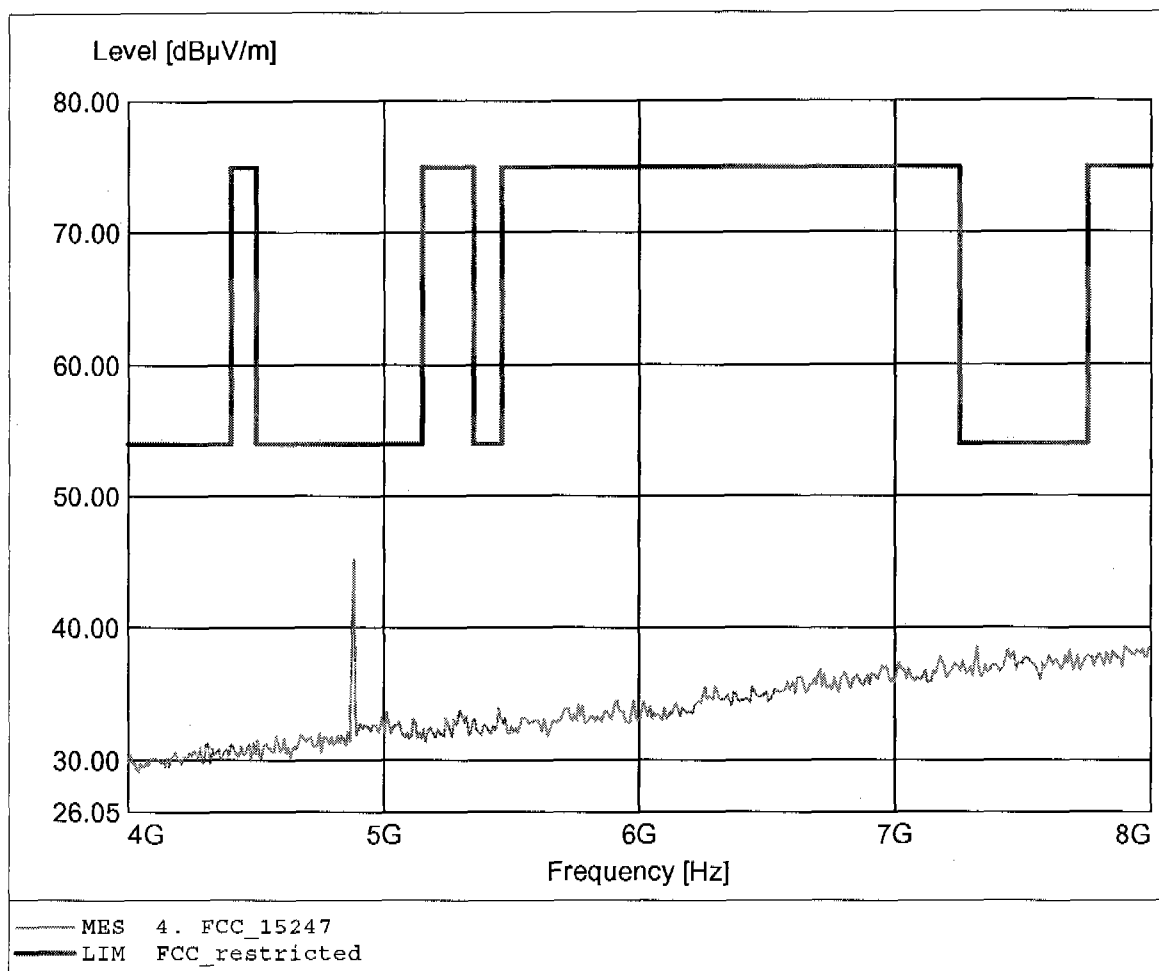

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.078GHz, Emax: 41.66dBµV/m, RBW: 1MHz

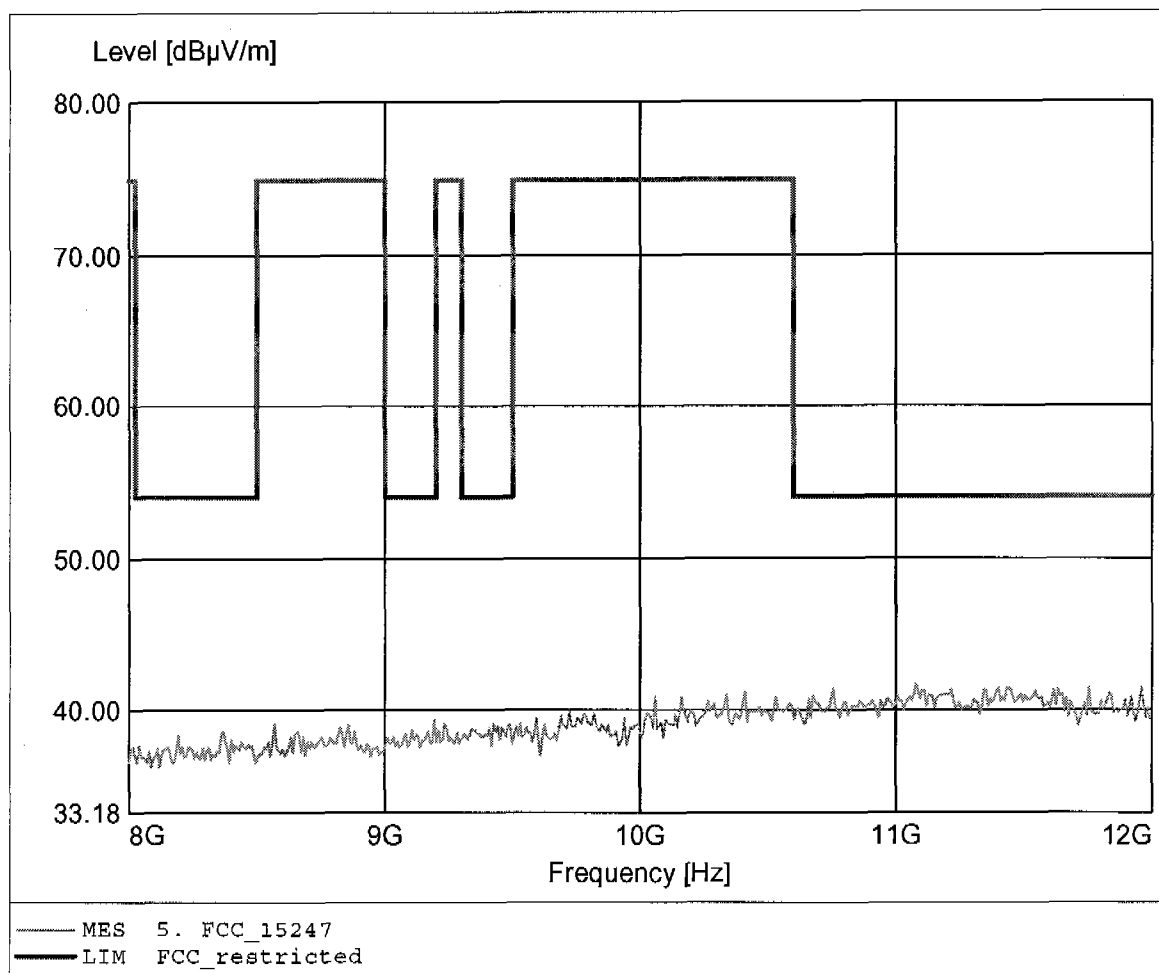

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.094GHz, Emax: 42.36dBuV/m, RBW: 1MHz

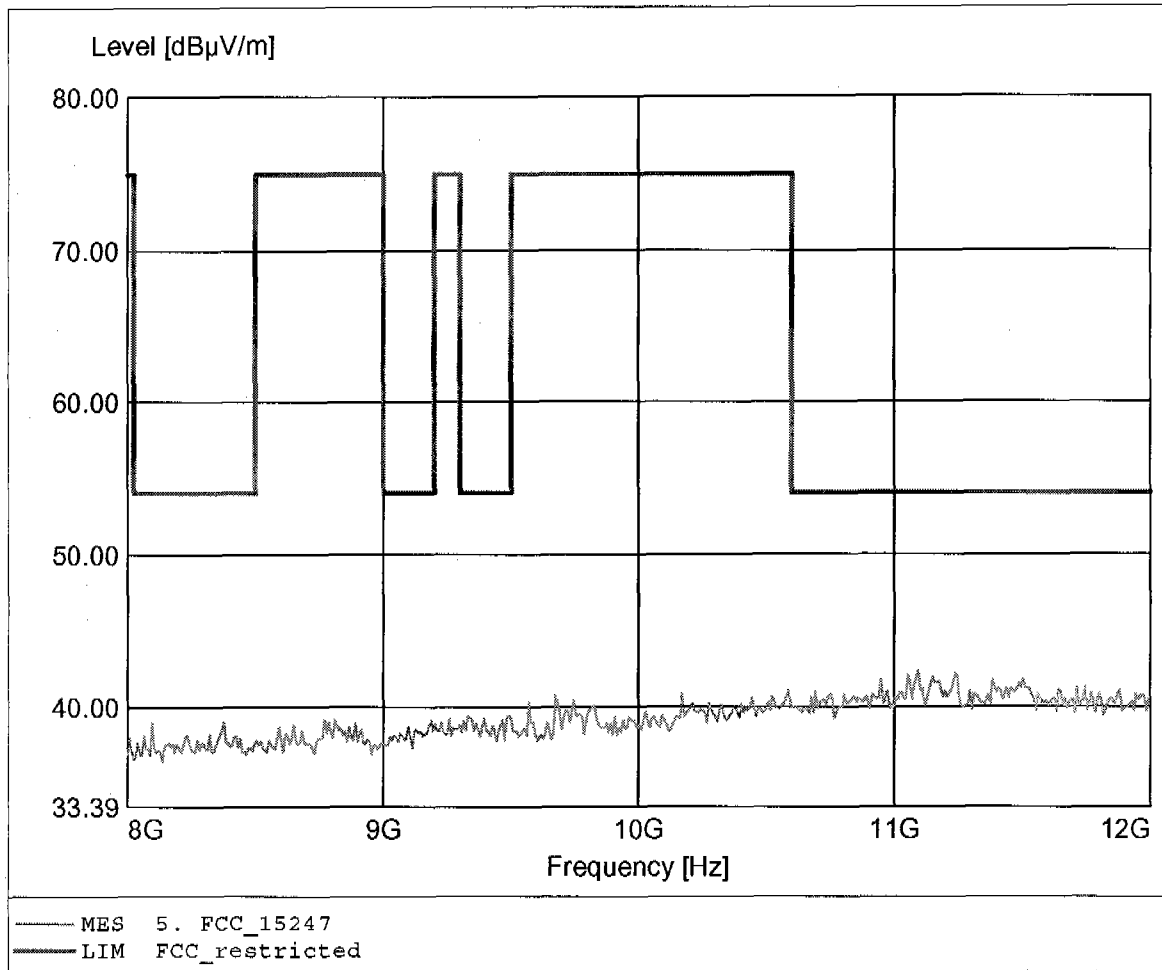

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.605GHz, Emax: 45.40dBμV/m, RBW: 1MHz

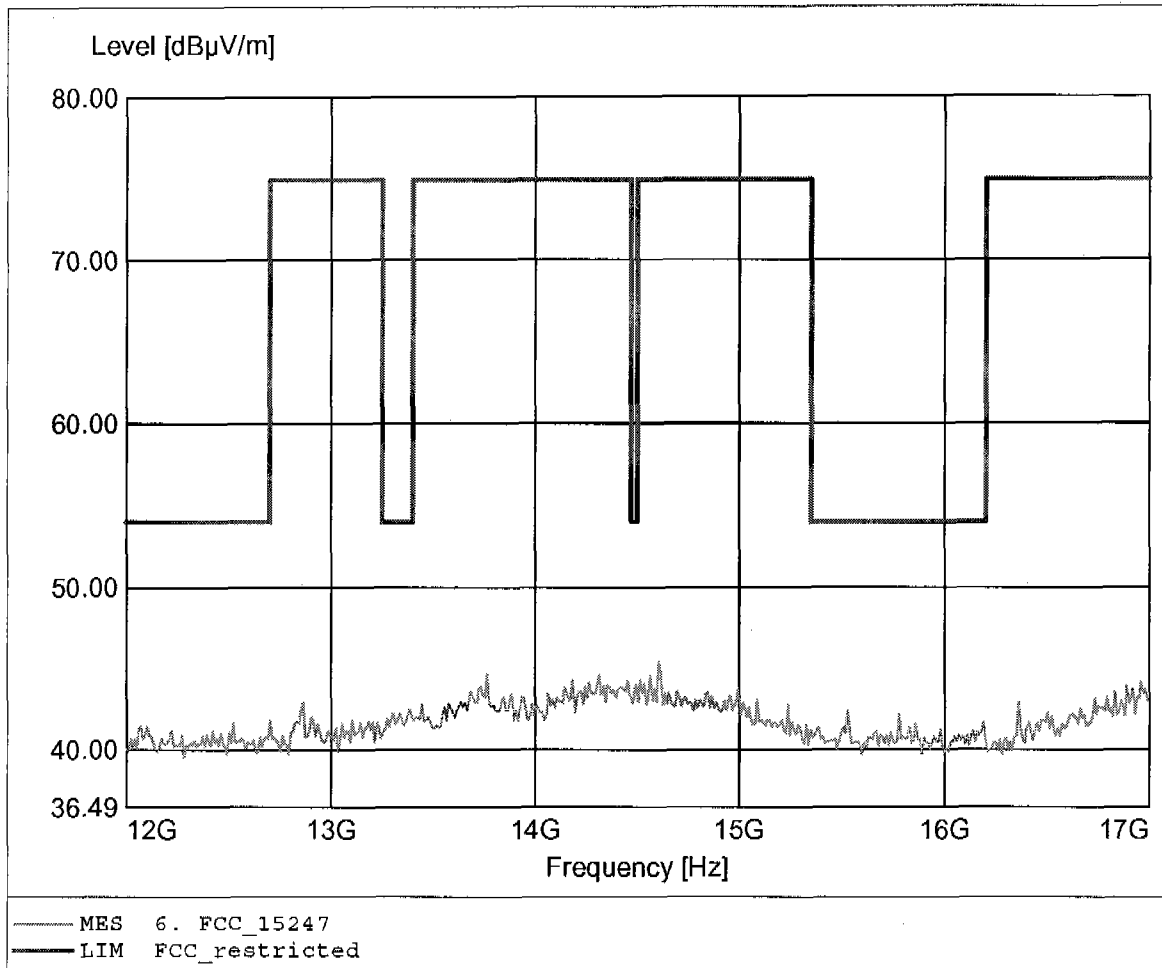

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.345GHz, Emax: 45.16dBuV/m, RBW: 1MHz

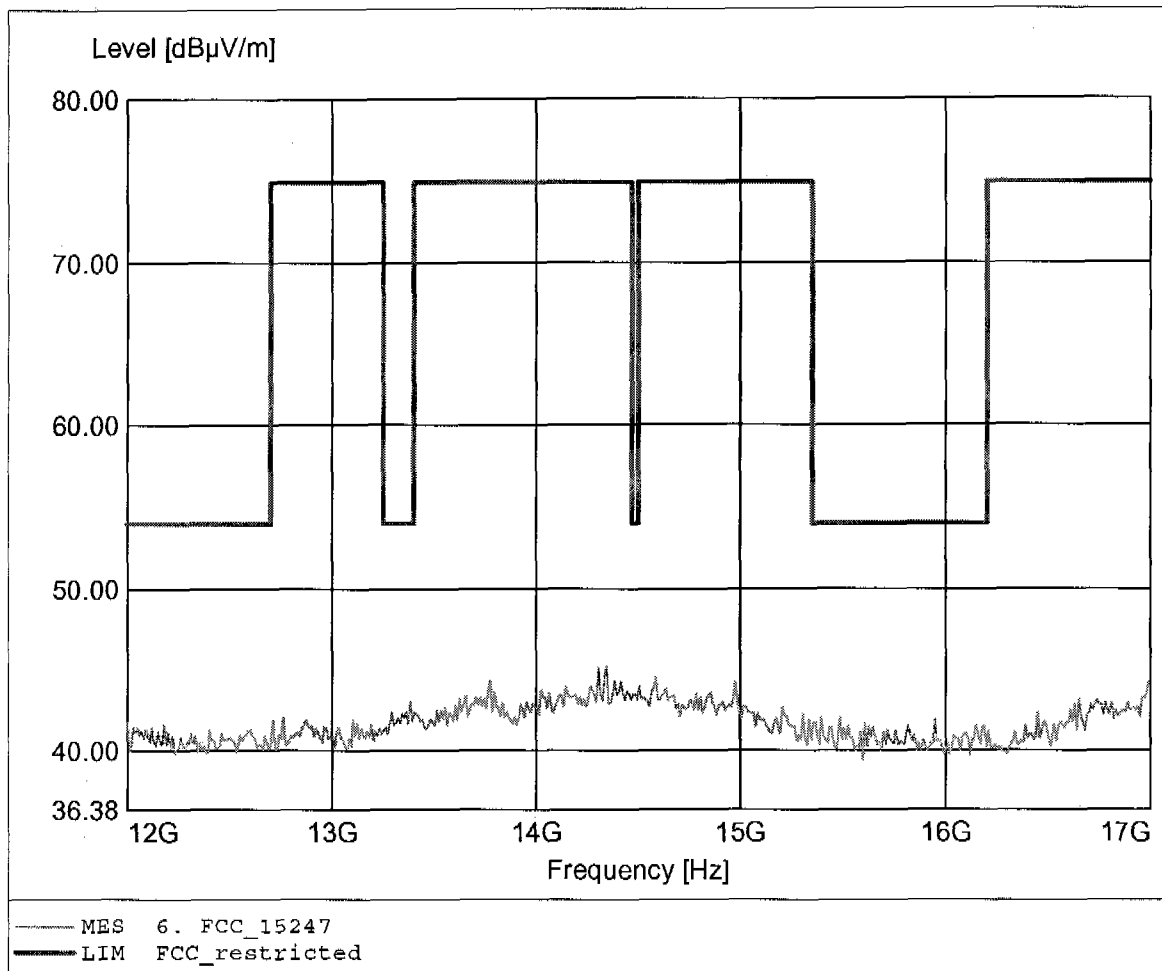

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 45.84dBuV/m, RBW: 1MHz

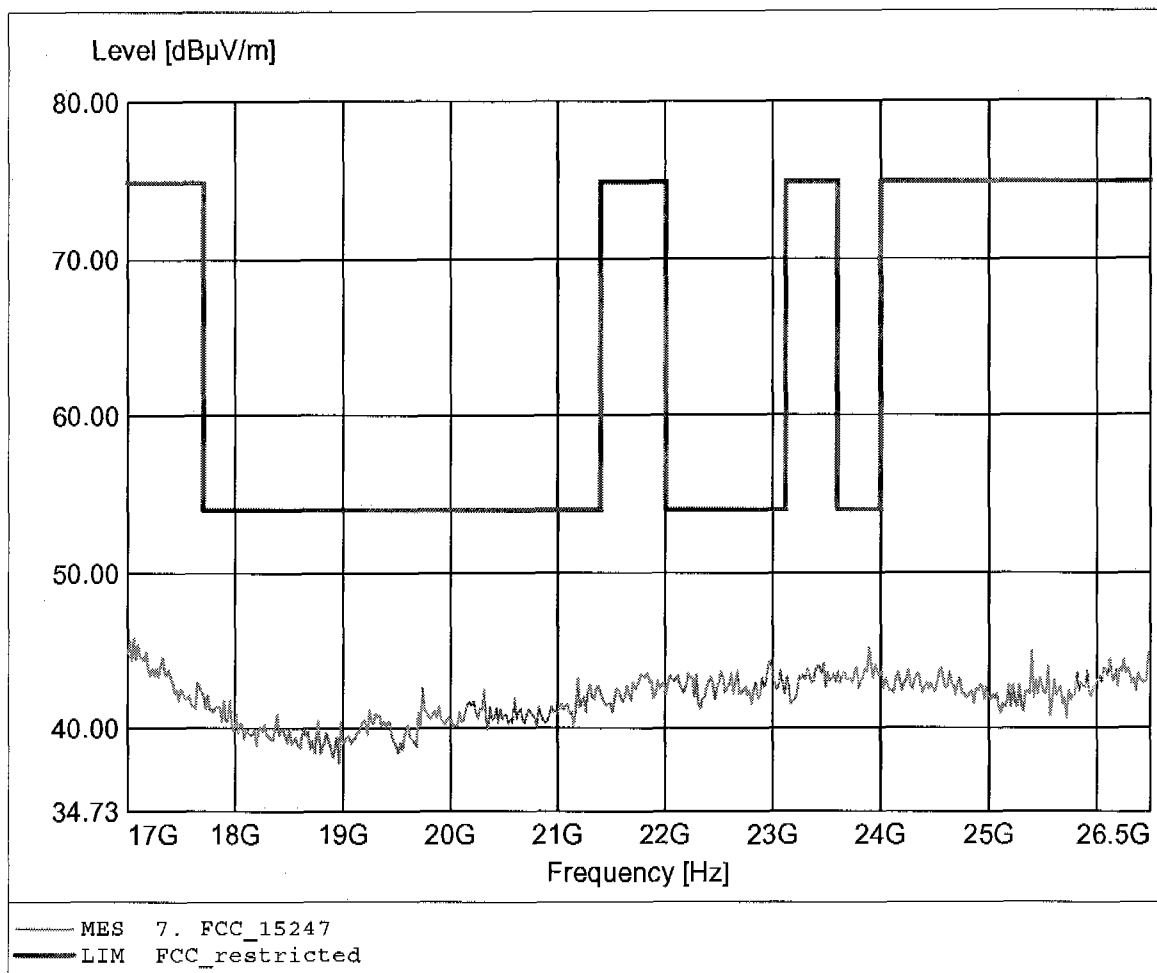

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.70dBuV/m, RBW: 1MHz

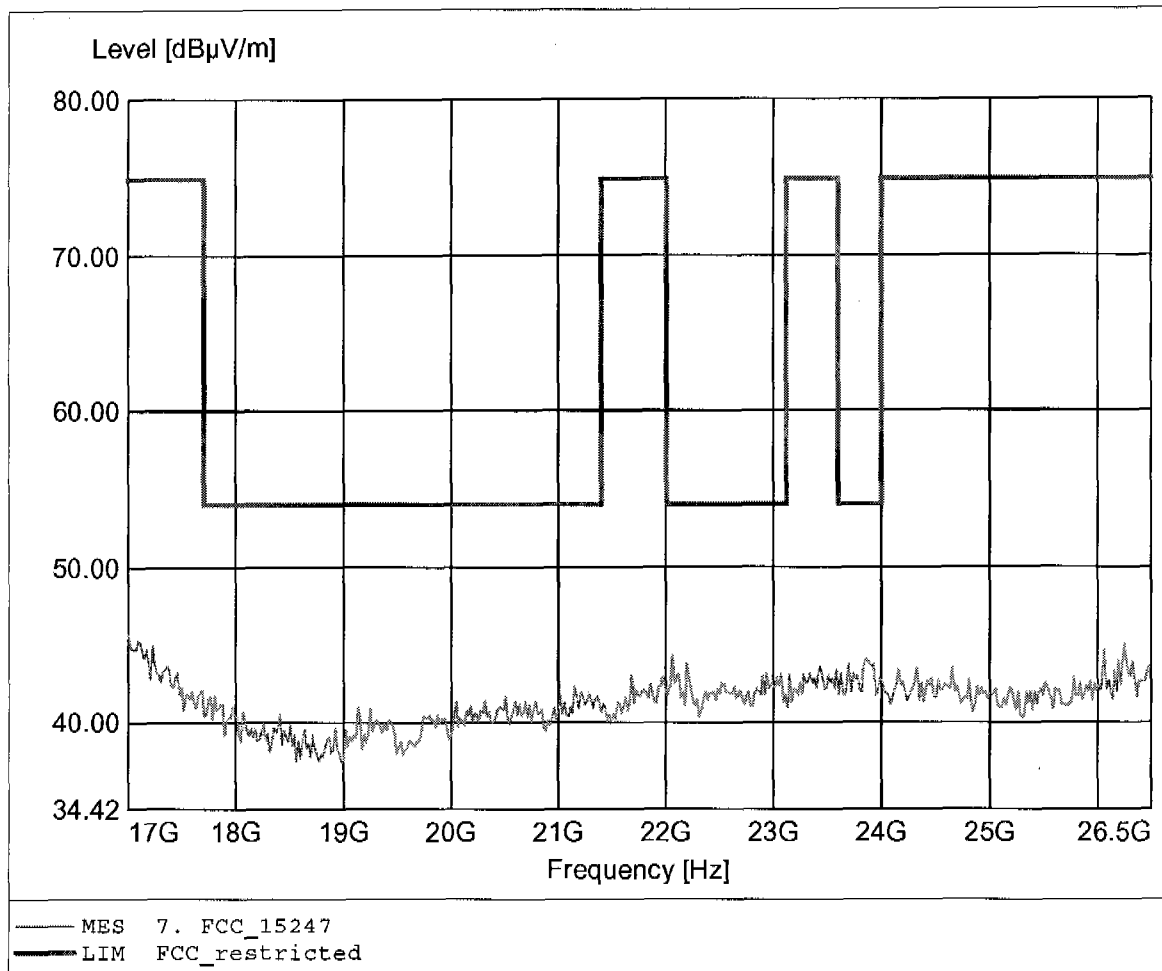

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 170.020MHz, Emax: 33.71dBµV/m, RBW: 100kHz

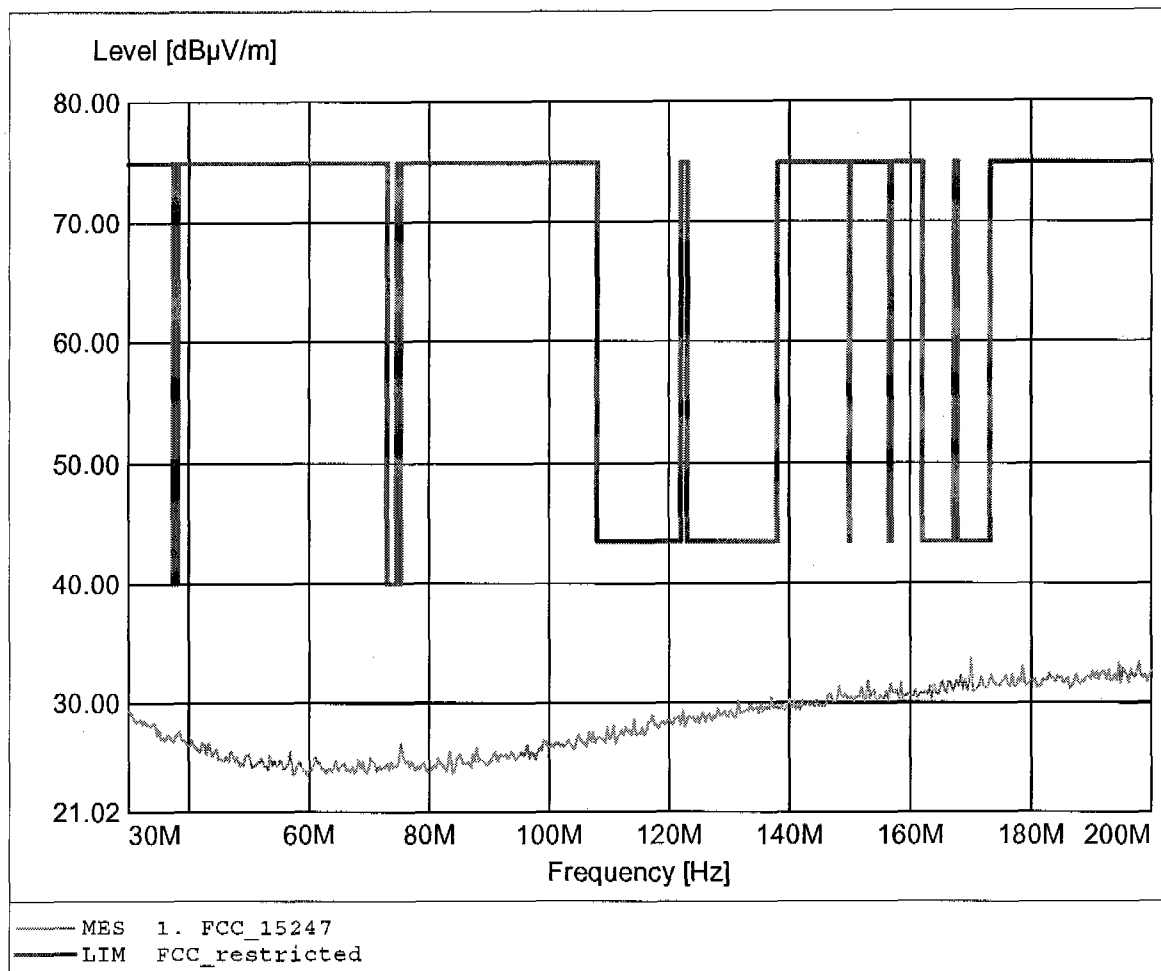

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 200.000MHz, Emax: 33.01dBµV/m, RBW: 100kHz

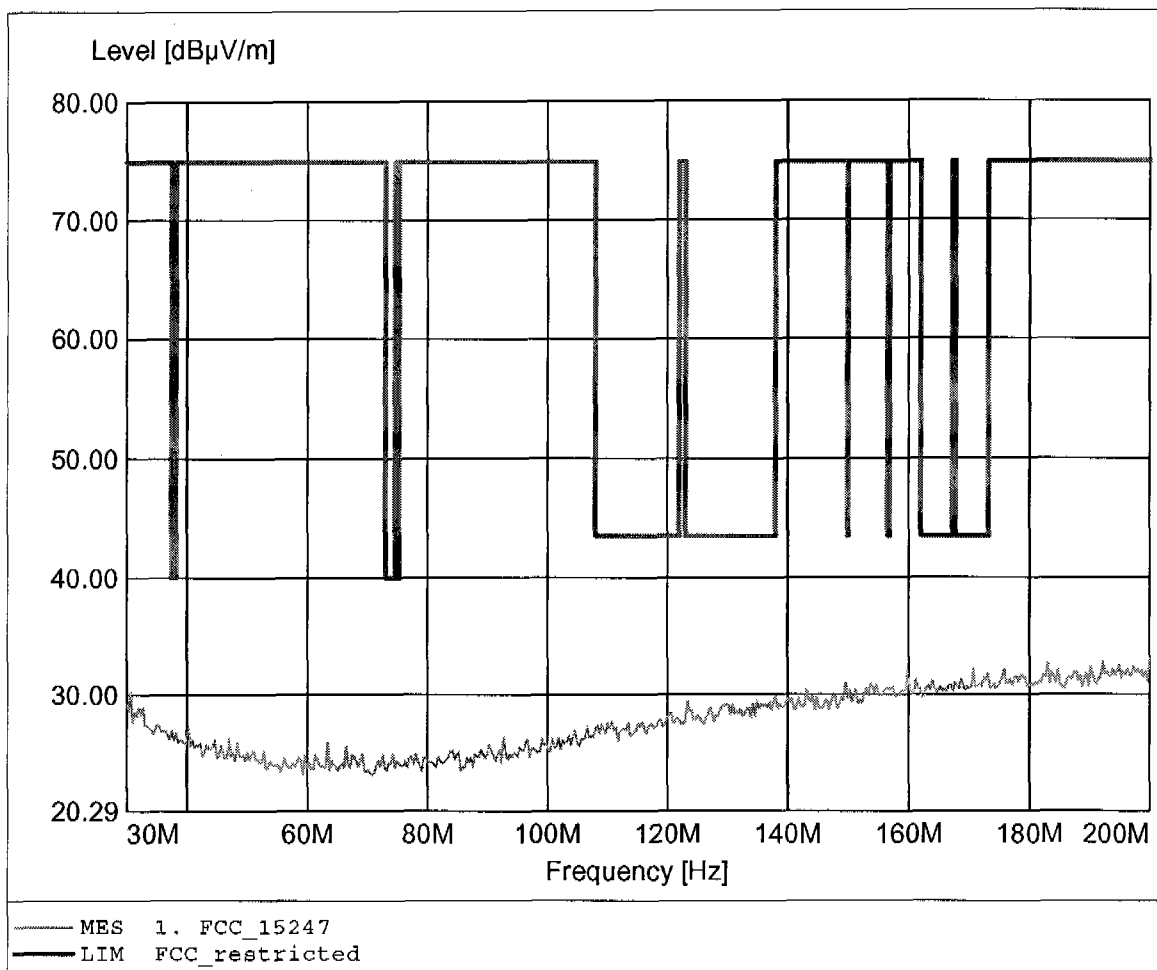

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 854.108MHz, Emax: 22.71dBuV/m, RBW: 100kHz

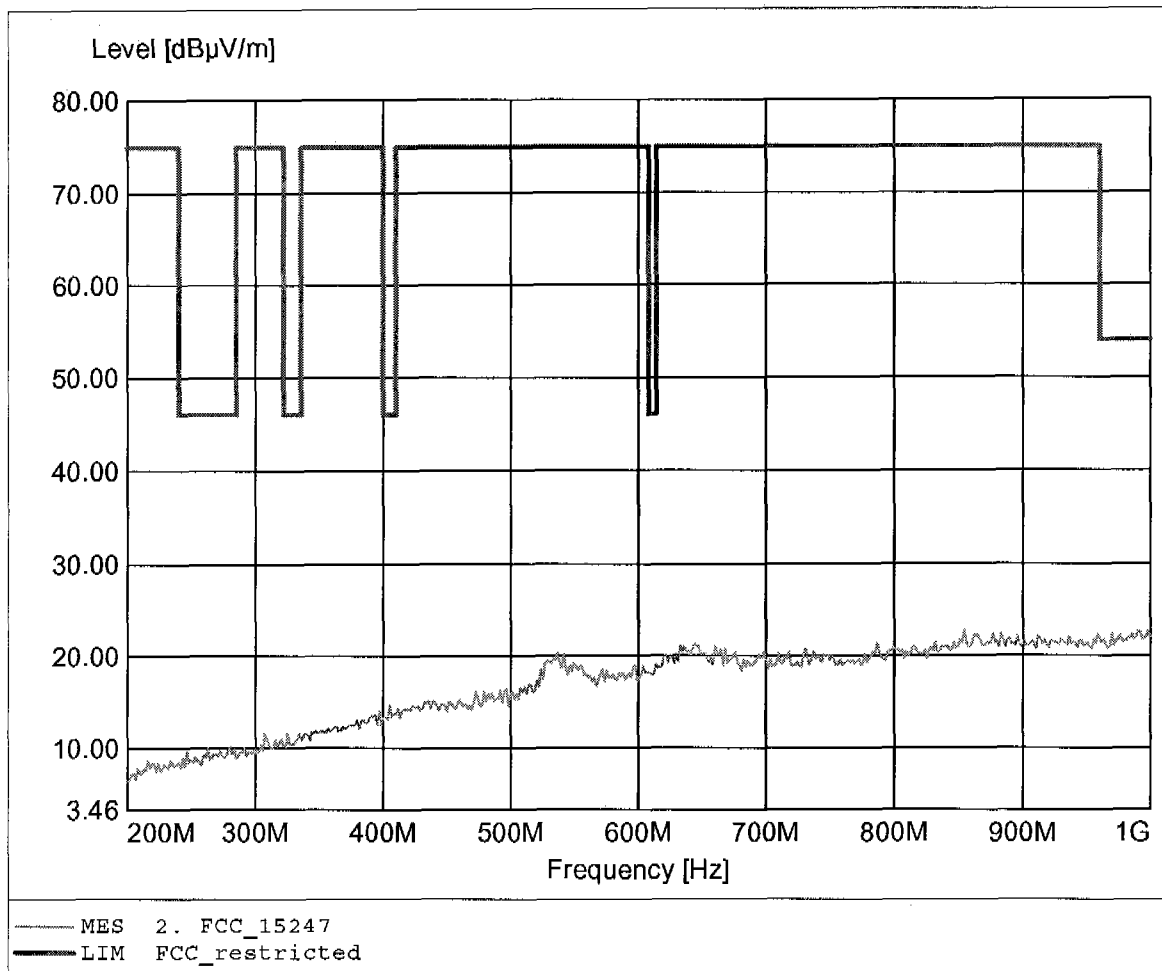

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 908.617MHz, Emax: 23.95dBµV/m, RBW: 100kHz

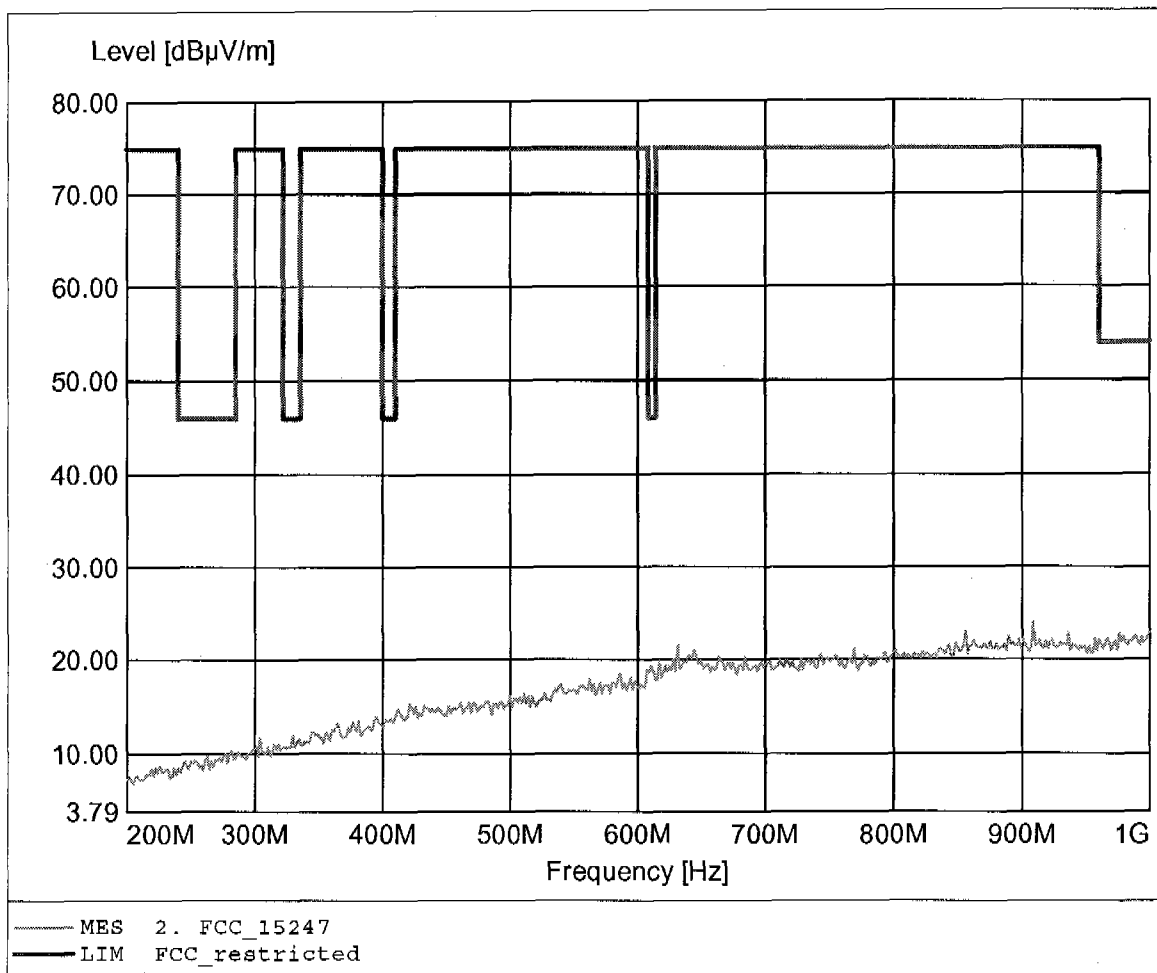

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 46.98dBuV/m, RBW: 1MHz

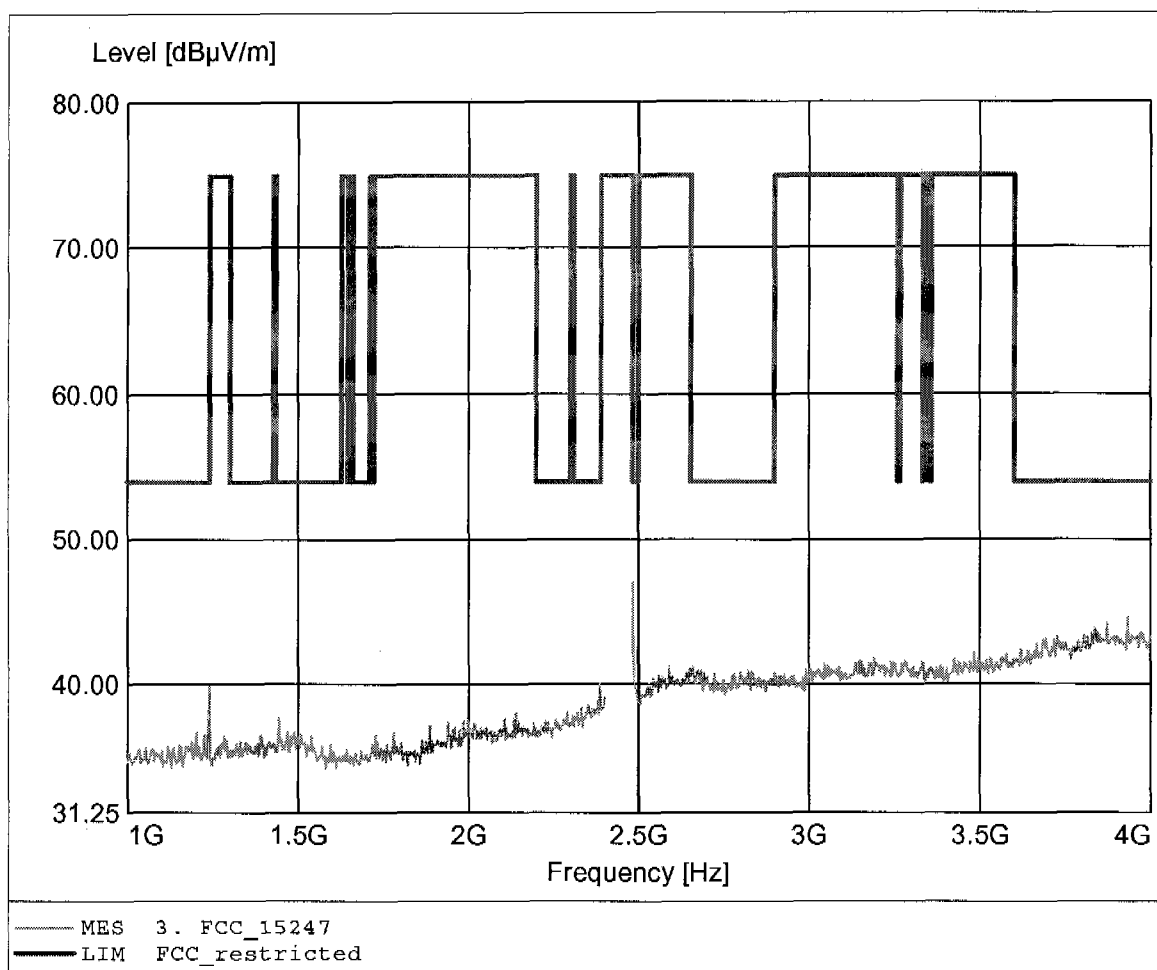

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.894GHz, Emax: 44.30dBuV/m, RBW: 1MHz

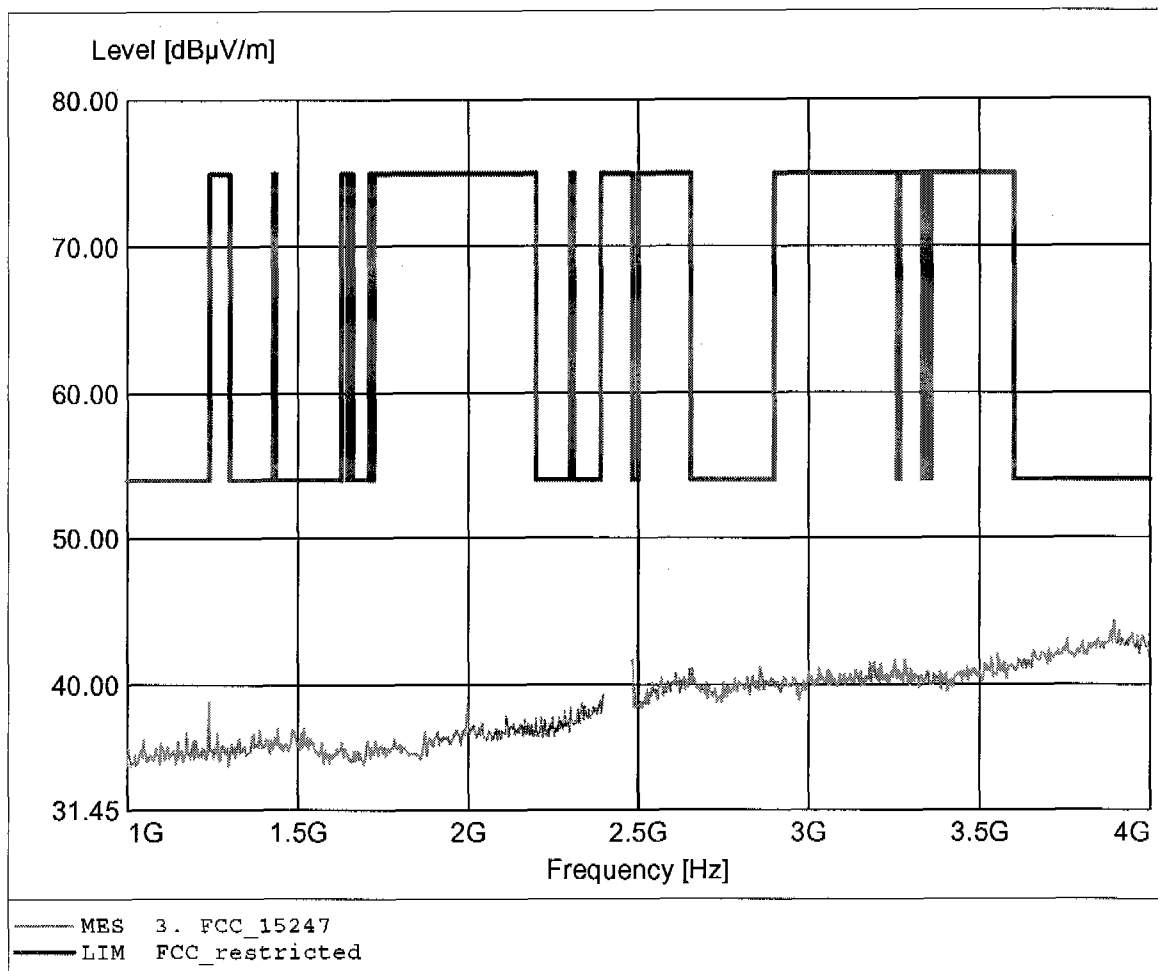

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 45.15dBµV/m, RBW: 1MHz

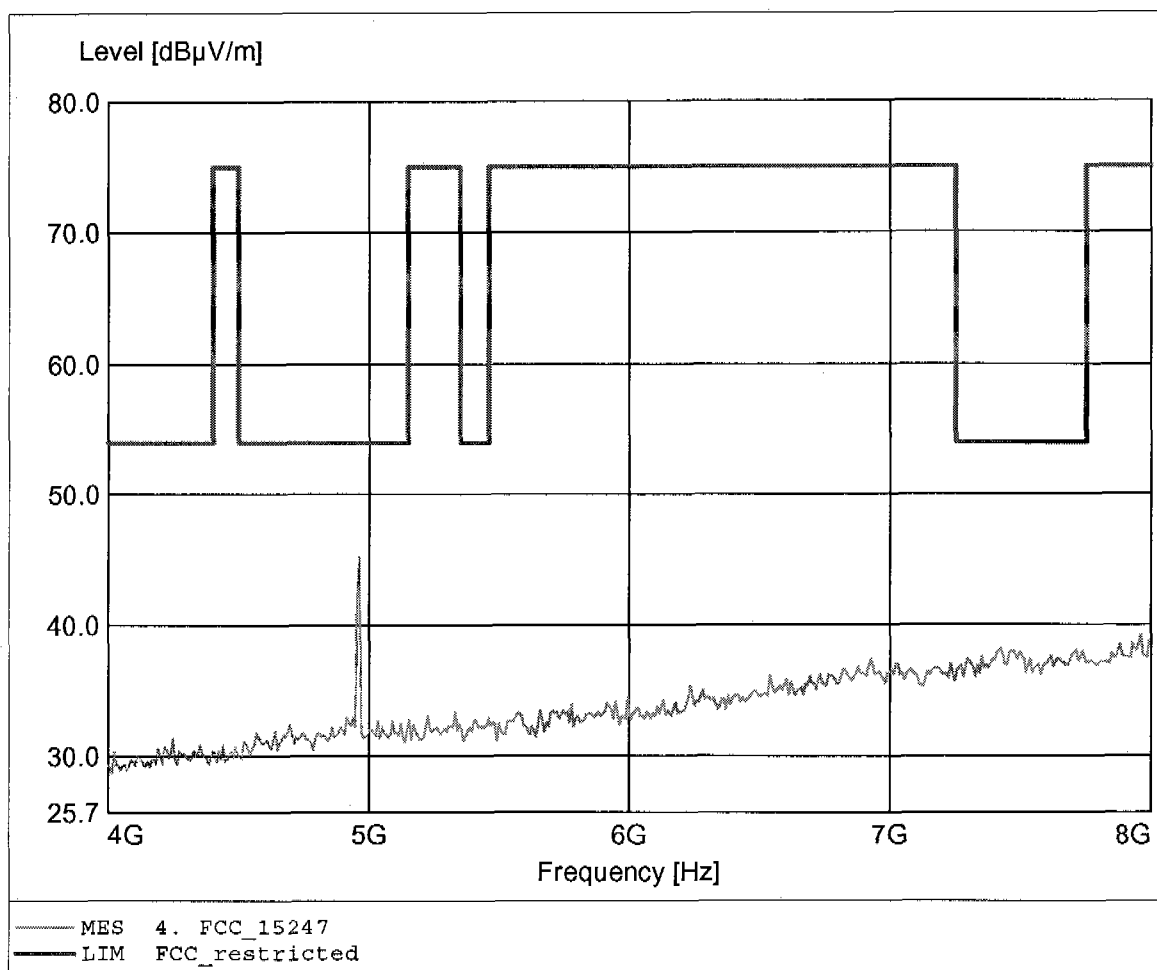

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 45.63dBμV/m, RBW: 1MHz

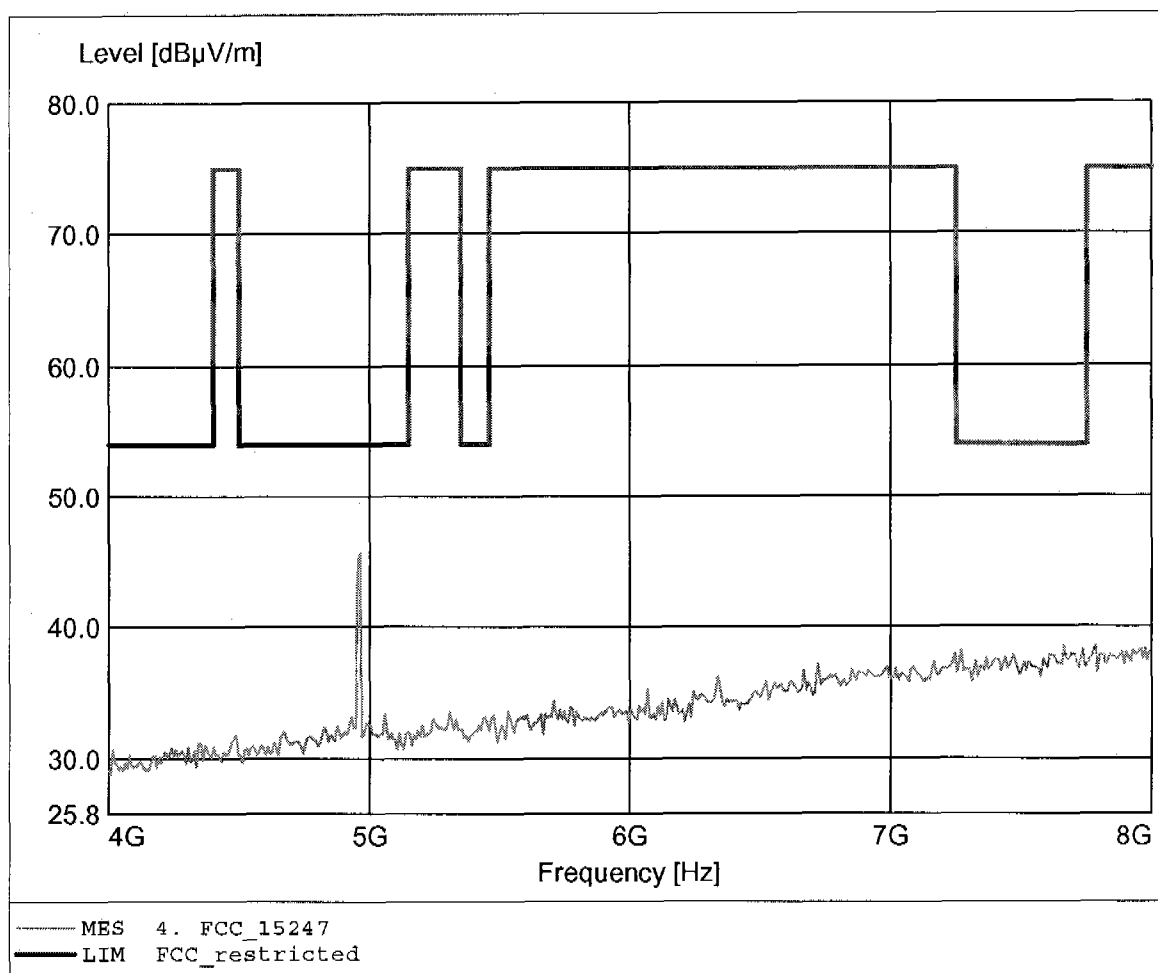

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.894GHz, Emax: 41.90dBuV/m, RBW: 1MHz

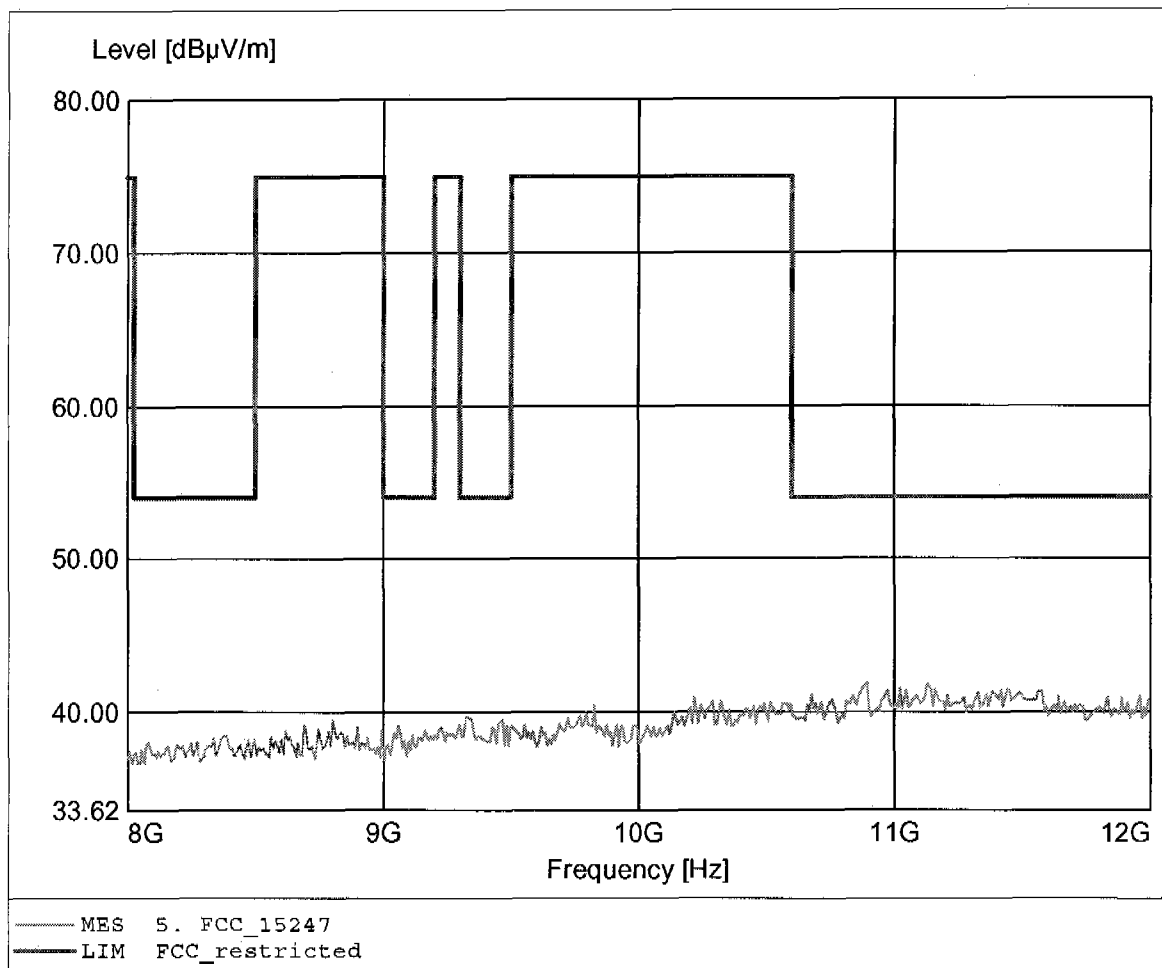

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.110GHz, Emax: 42.10dBμV/m, RBW: 1MHz

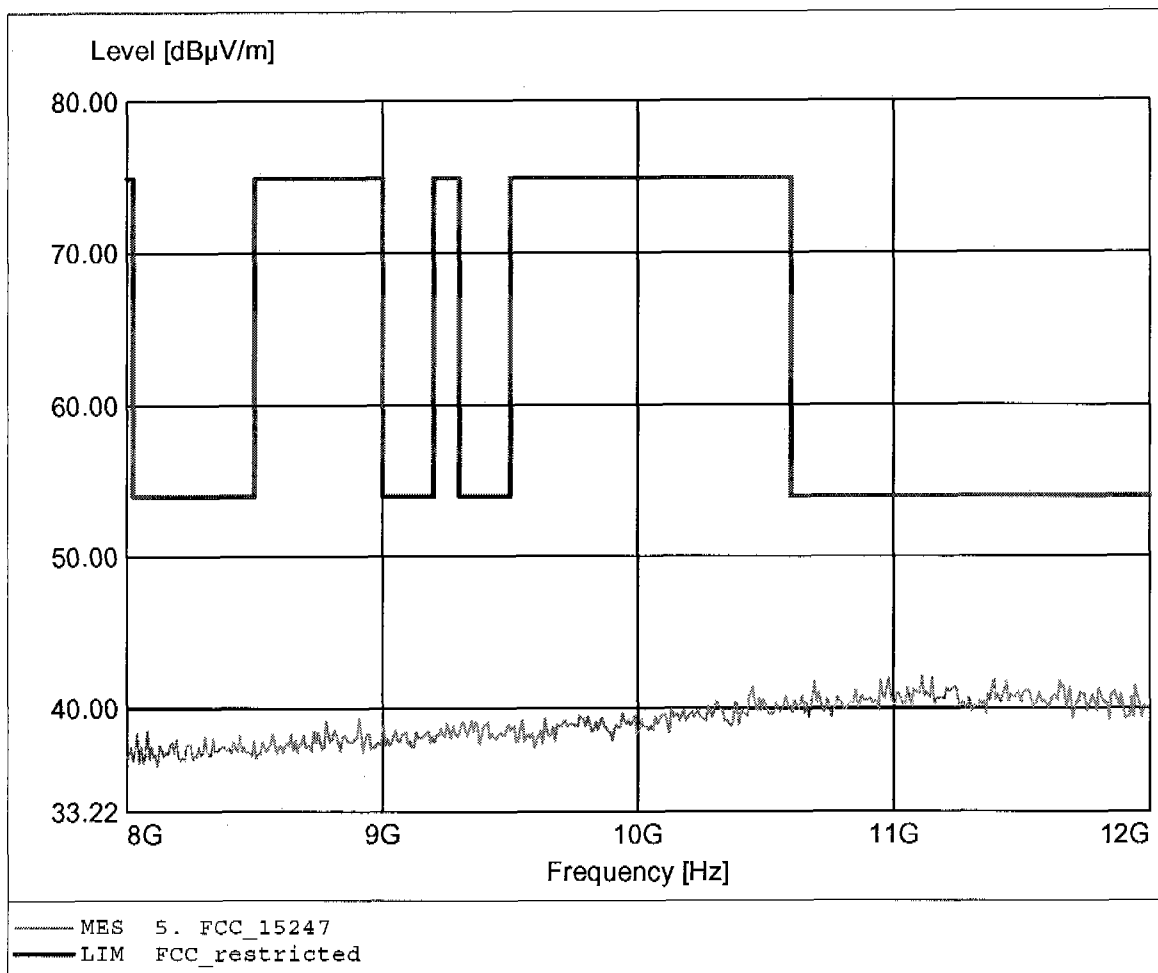

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 45.49dBµV/m, RBW: 1MHz

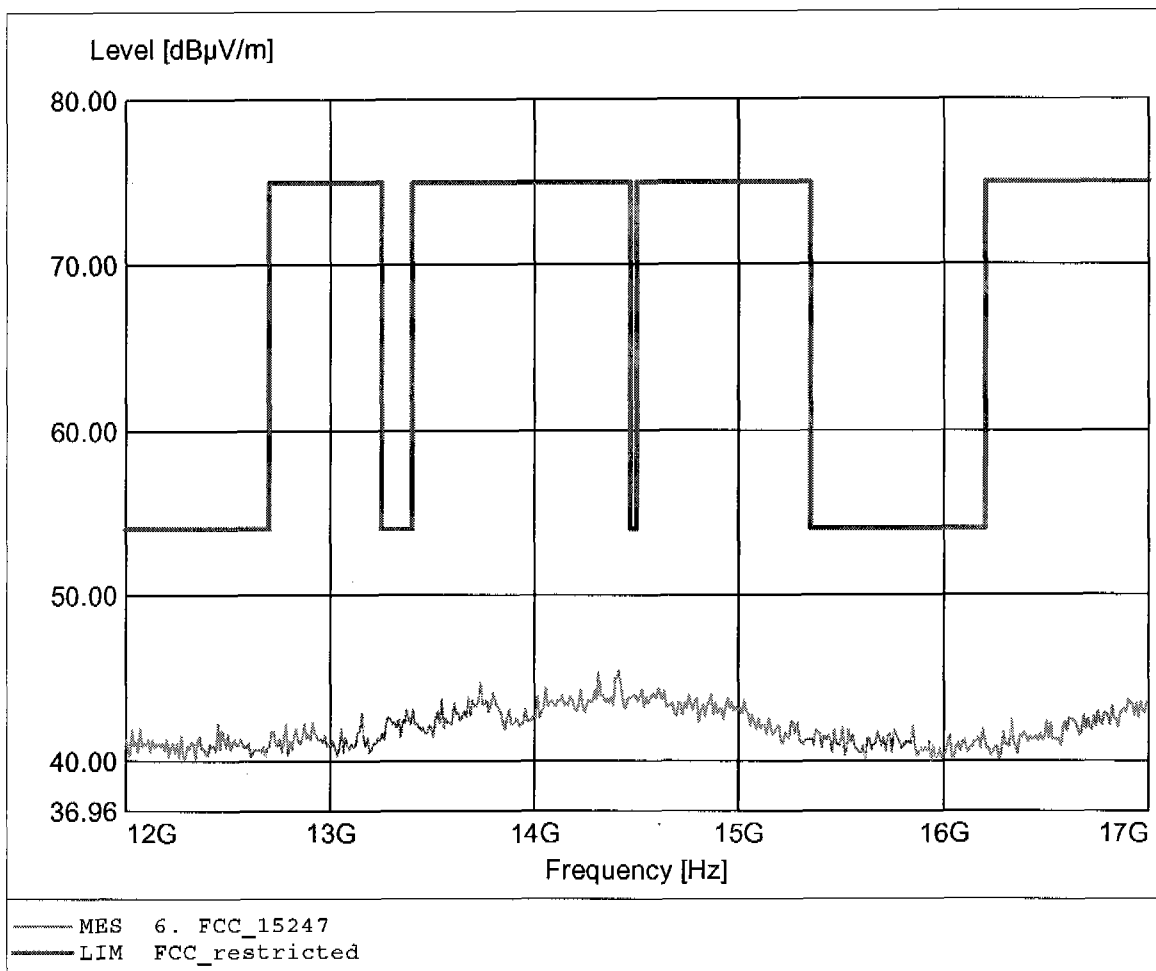

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.345GHz, Emax: 45.29dBuV/m, RBW: 1MHz

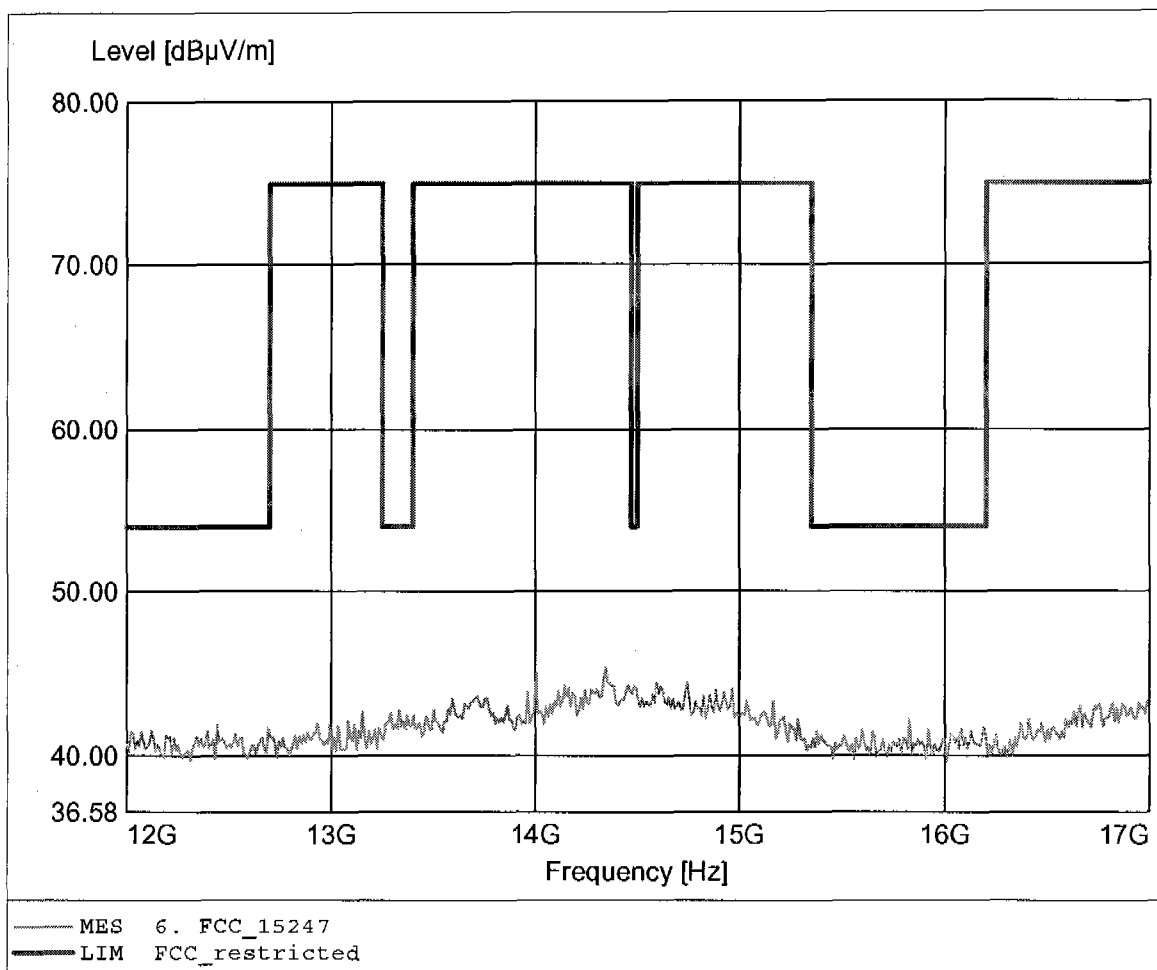

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.152GHz, Emax: 45.50dBuV/m, RBW: 1MHz

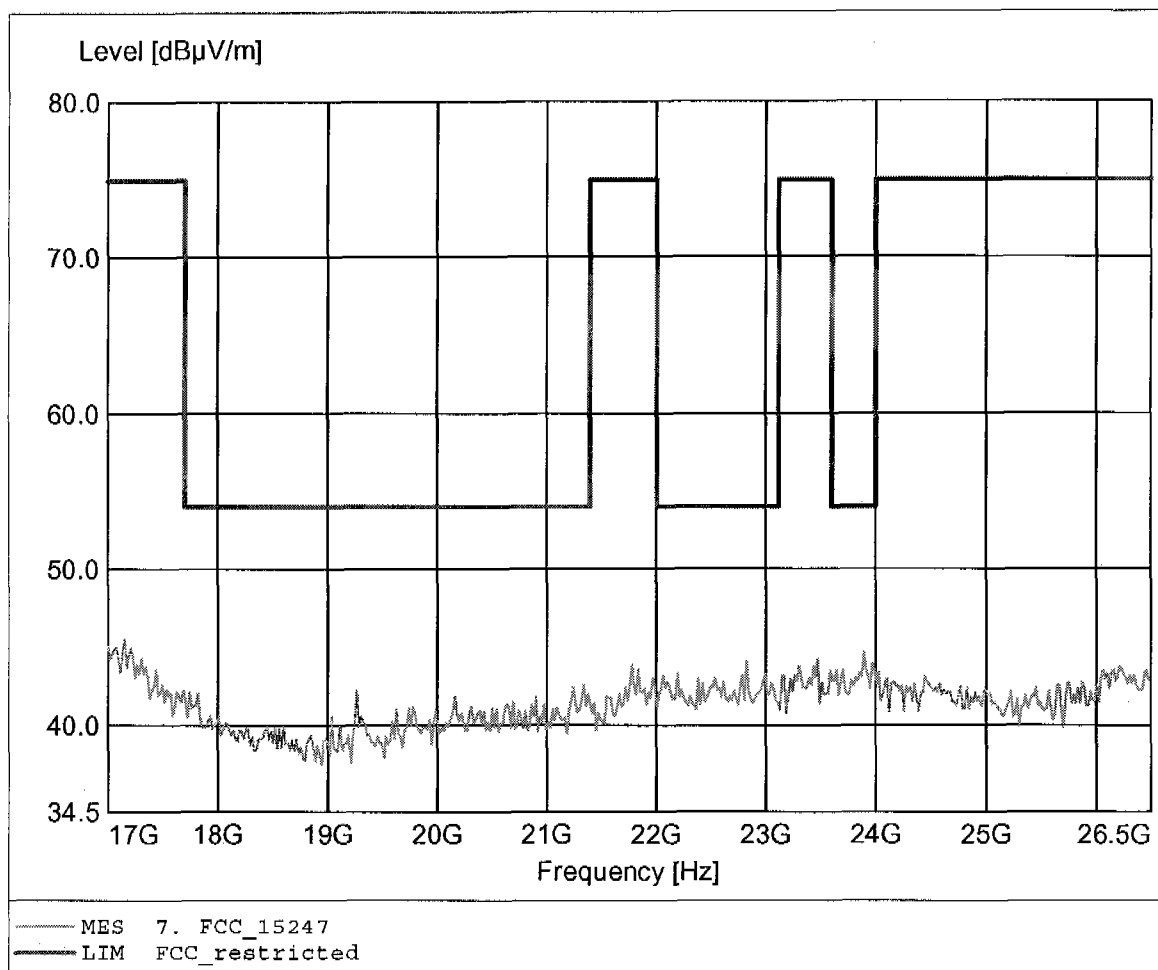

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT500
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 44.98dBμV/m, RBW: 1MHz

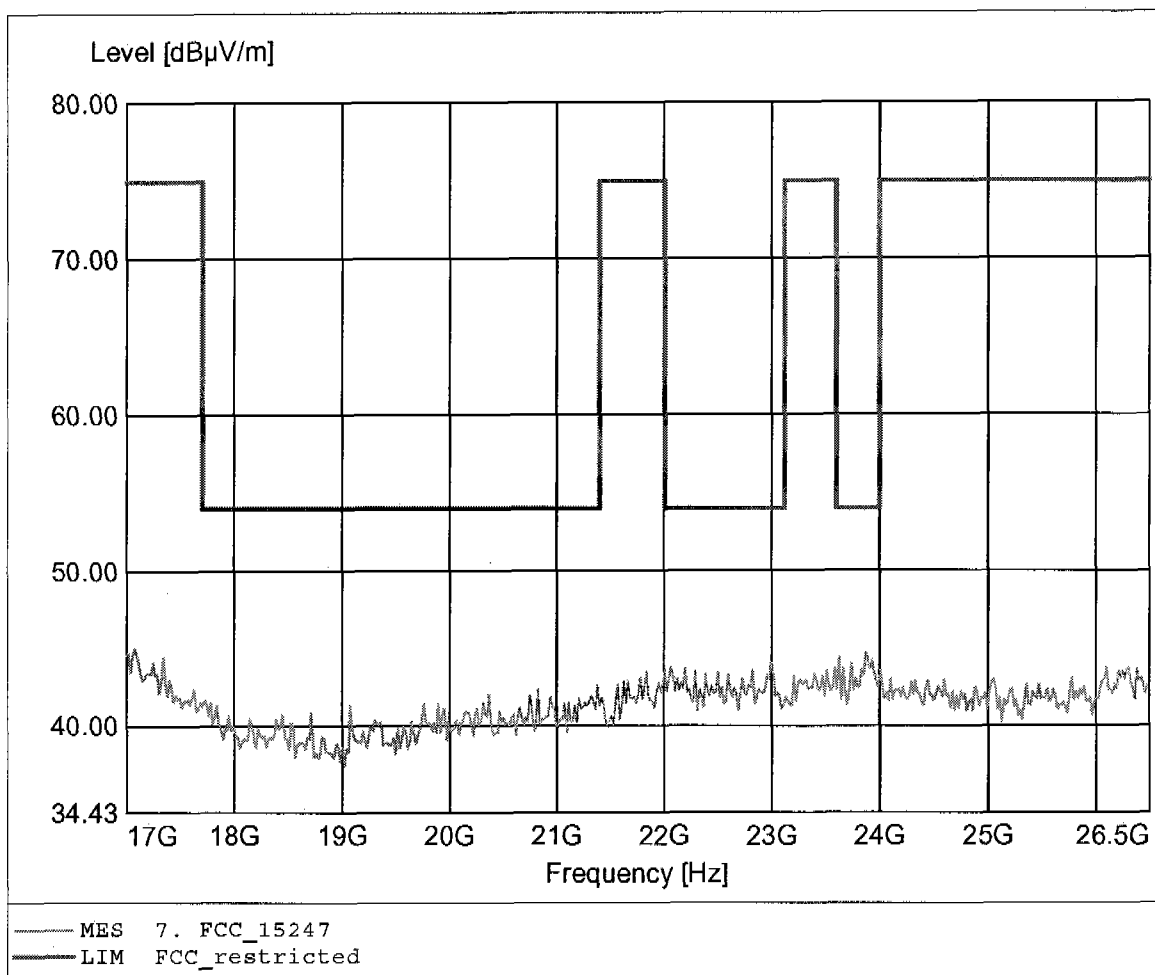

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.03 dB VBW 100 kHz
10 dBm 1.00080160 MHz SWT 5 ms Unit dBm

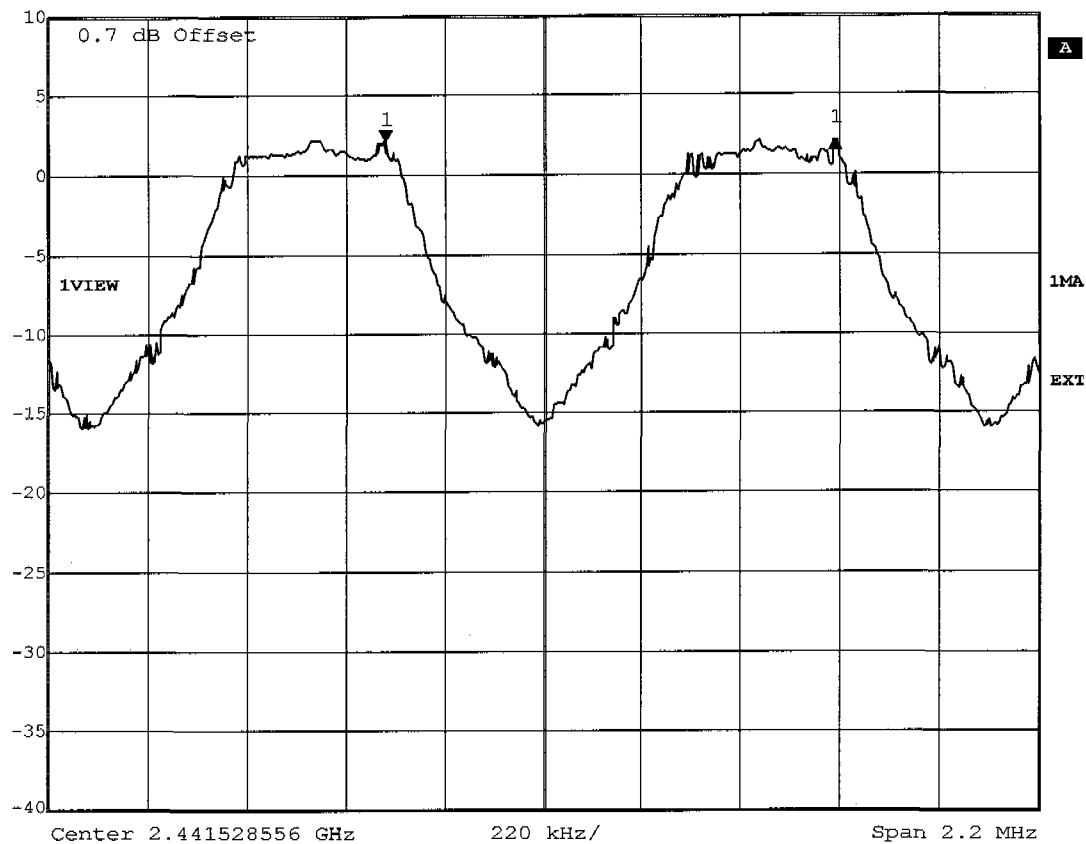

Title: Carrier Frequency Separation
Comment A: Jabra BT500
Date: 6.APR.2005 09:10:37


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

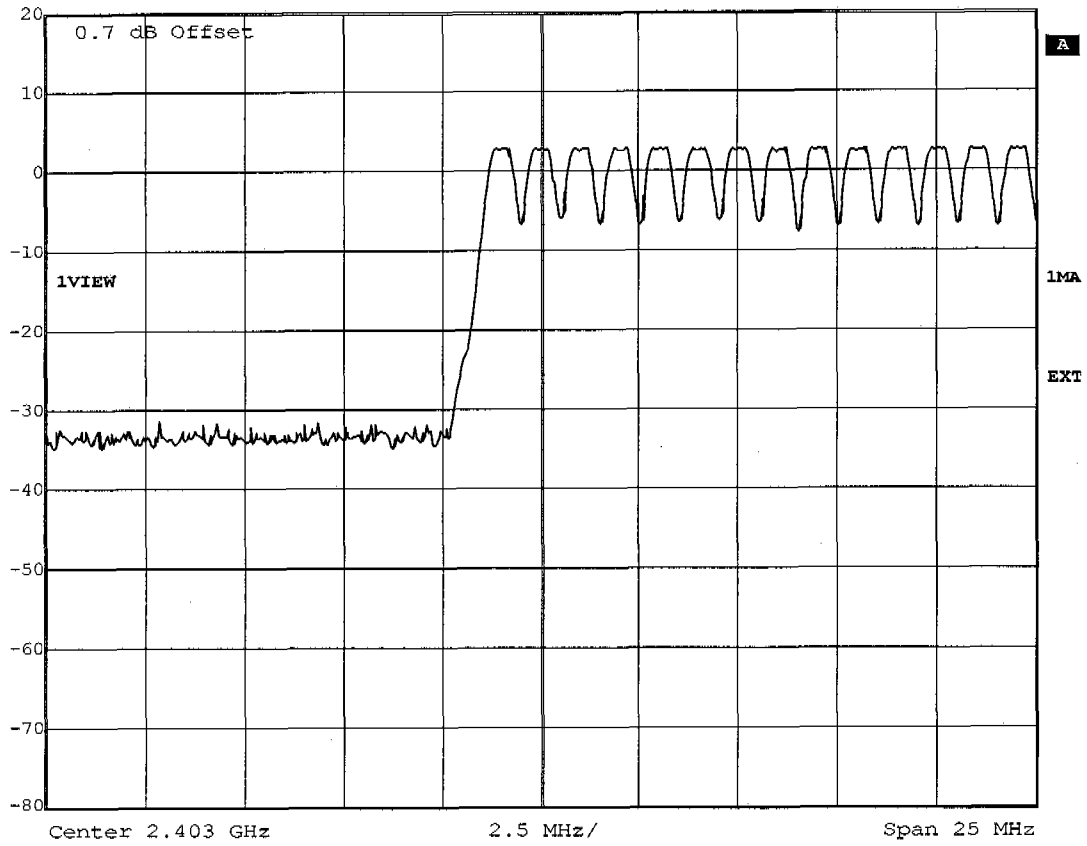


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra BT500
Date: 6.APR.2005 09:23:28



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

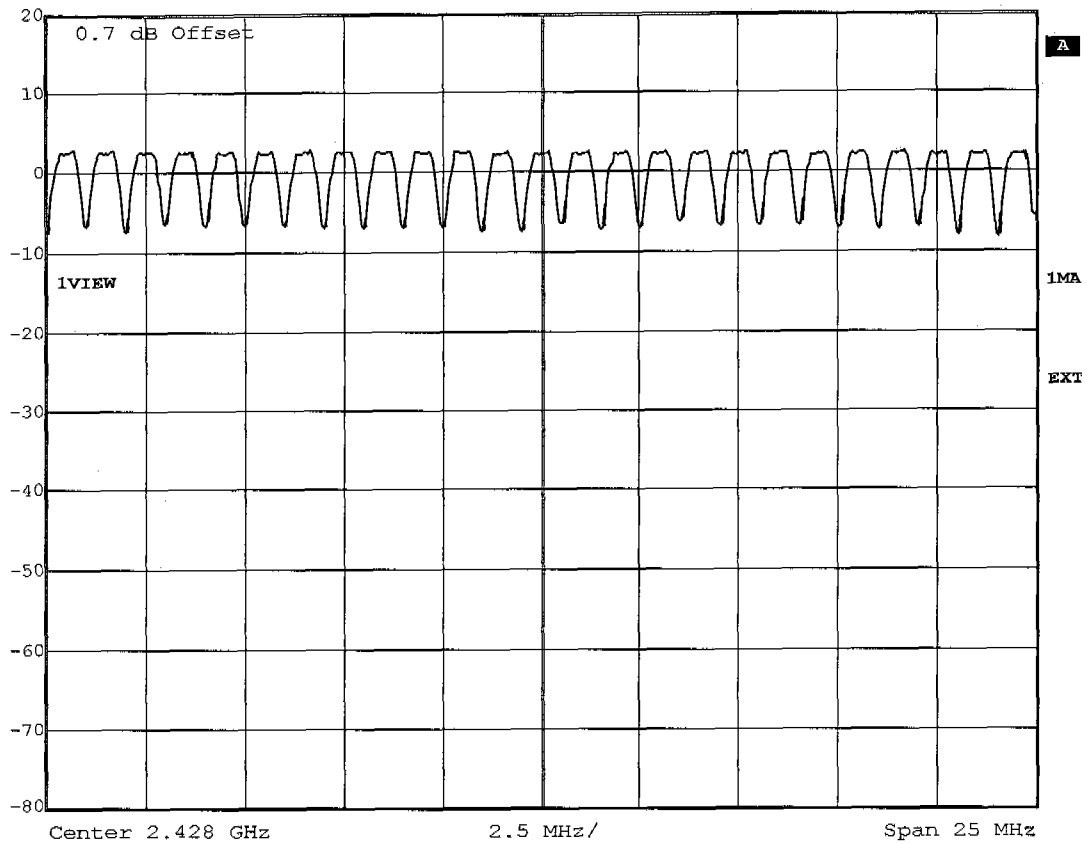


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra BT500
Date: 6.APR.2005 09:25:01



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

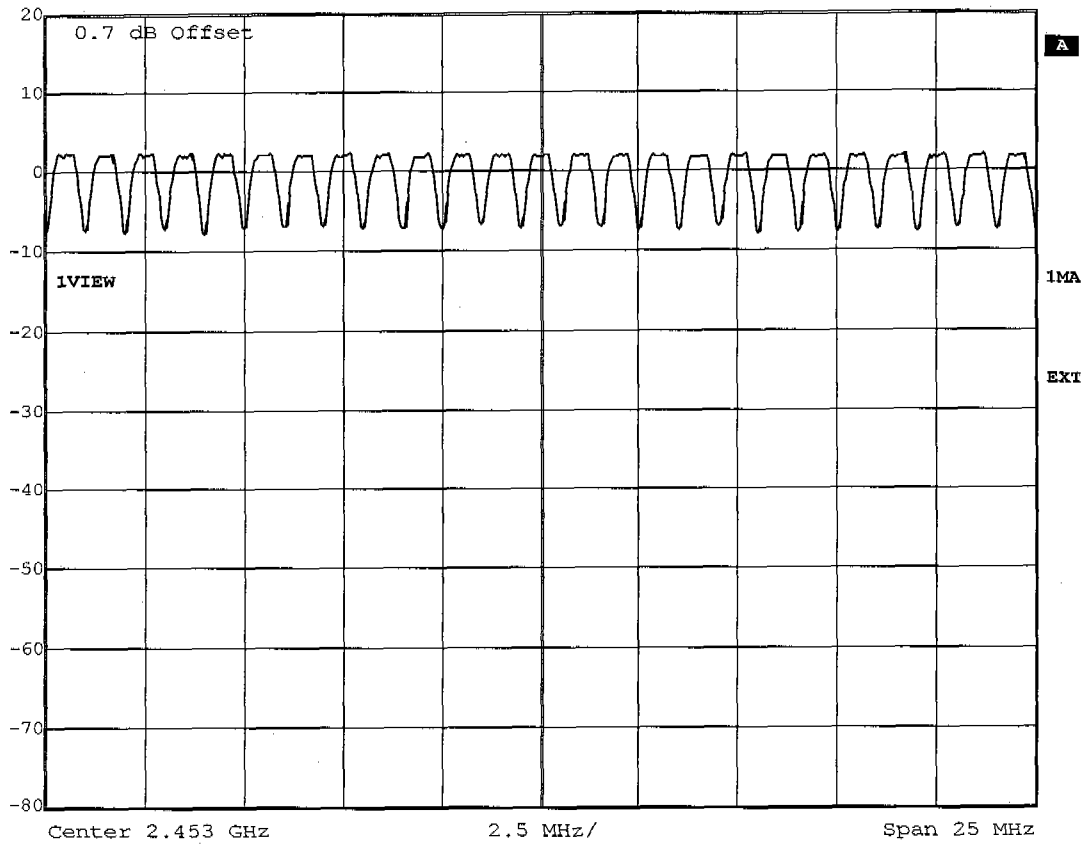


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra BT500
Date: 6.APR.2005 09:26:28



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

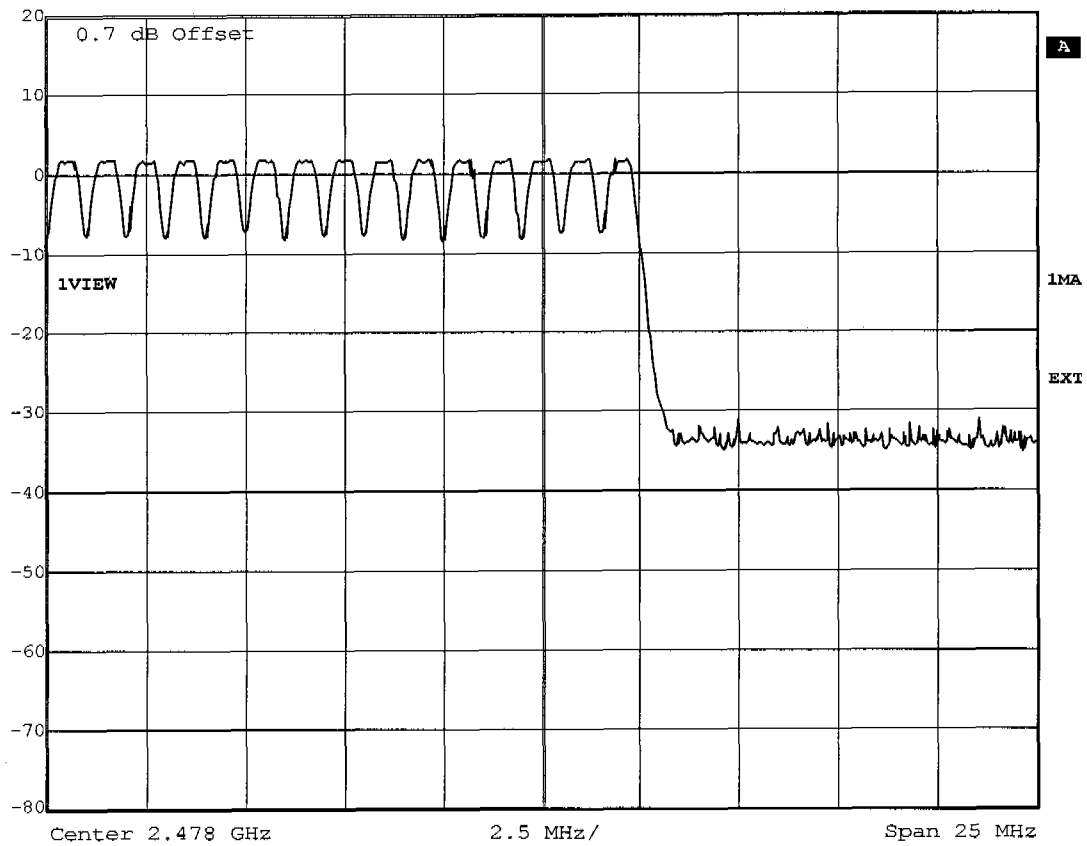


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra BT500
Date: 6.APR.2005 09:27:54



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

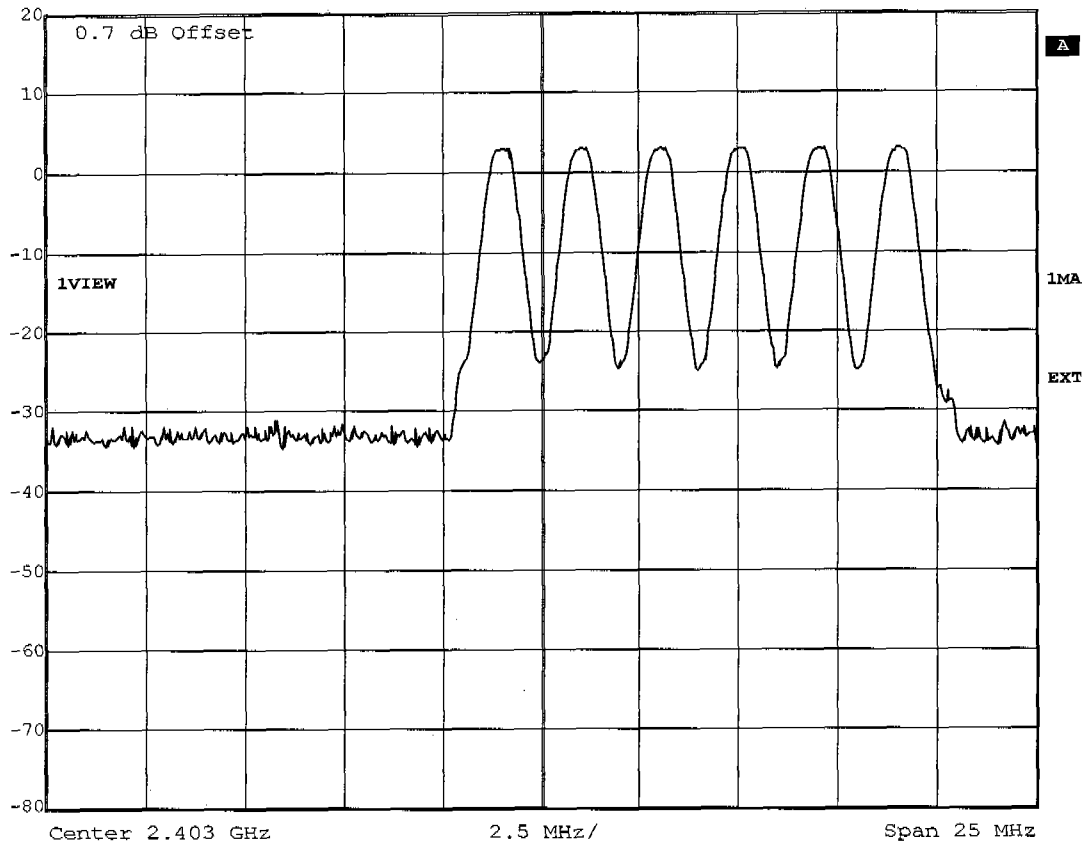


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT500
Date: 6.APR.2005 10:38:44



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

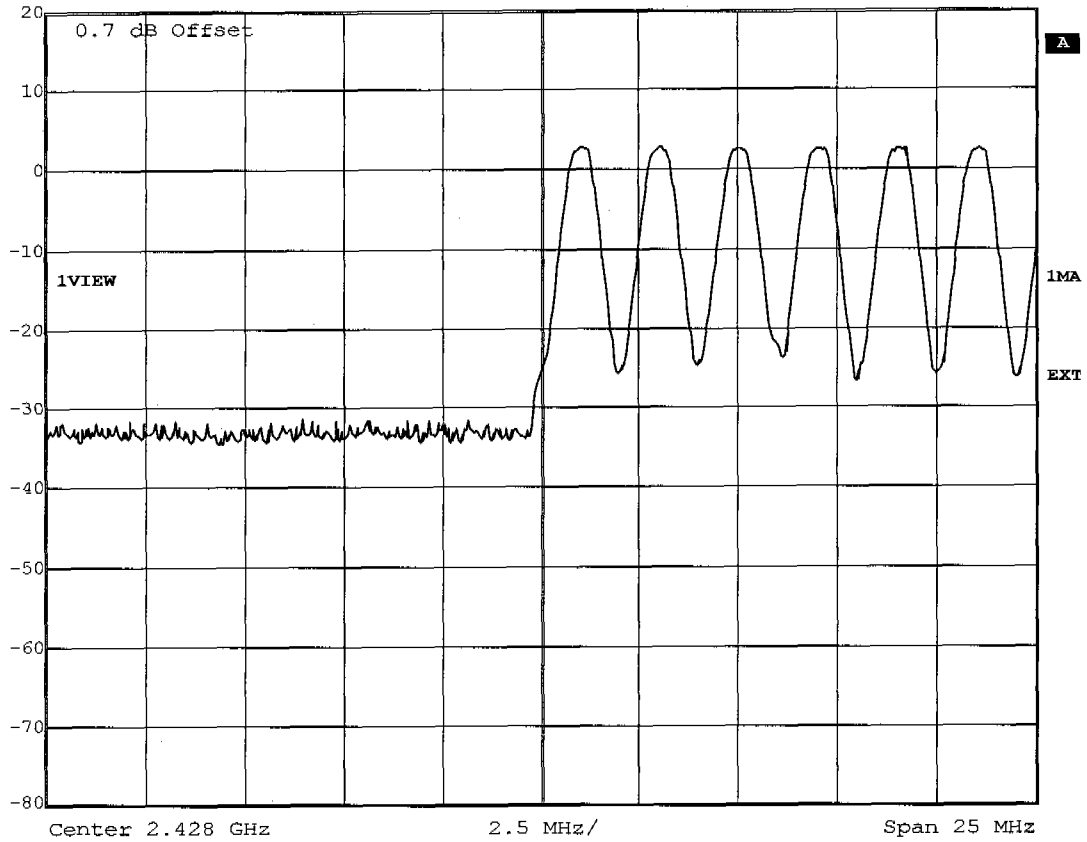


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT500
Date: 6.APR.2005 10:41:25



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

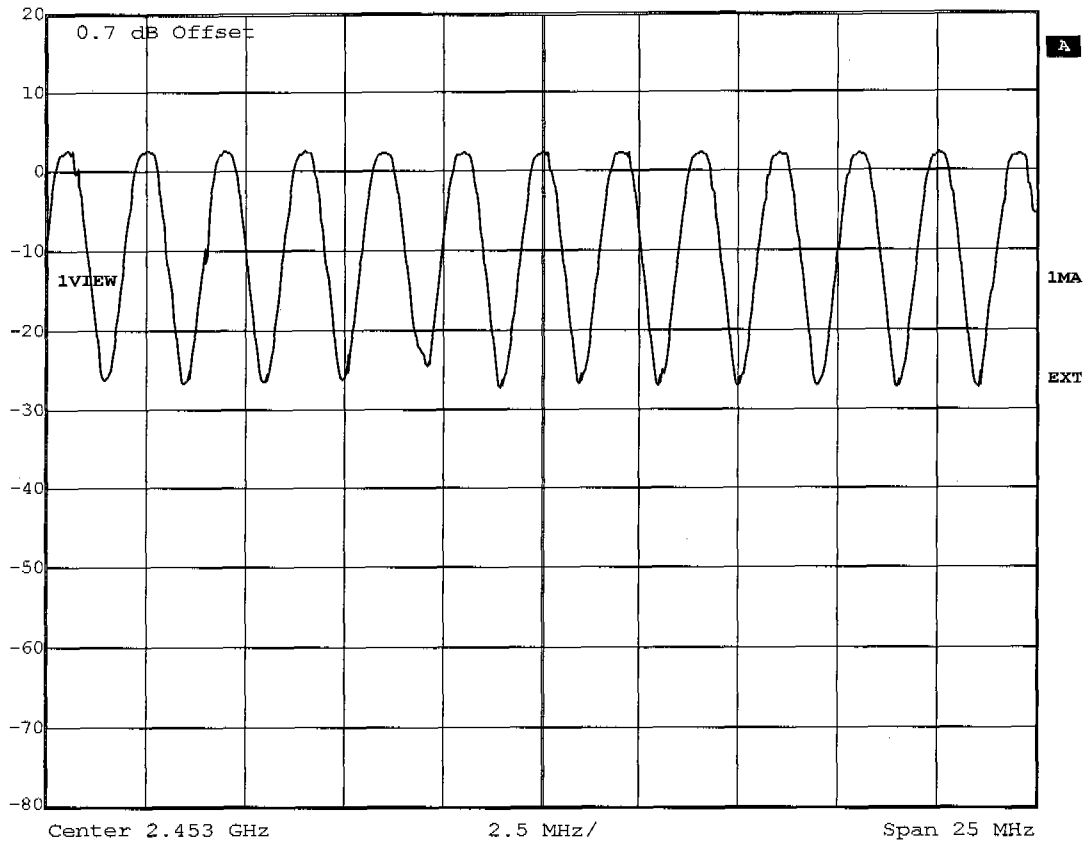


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT500
Date: 6.APR.2005 10:43:18



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

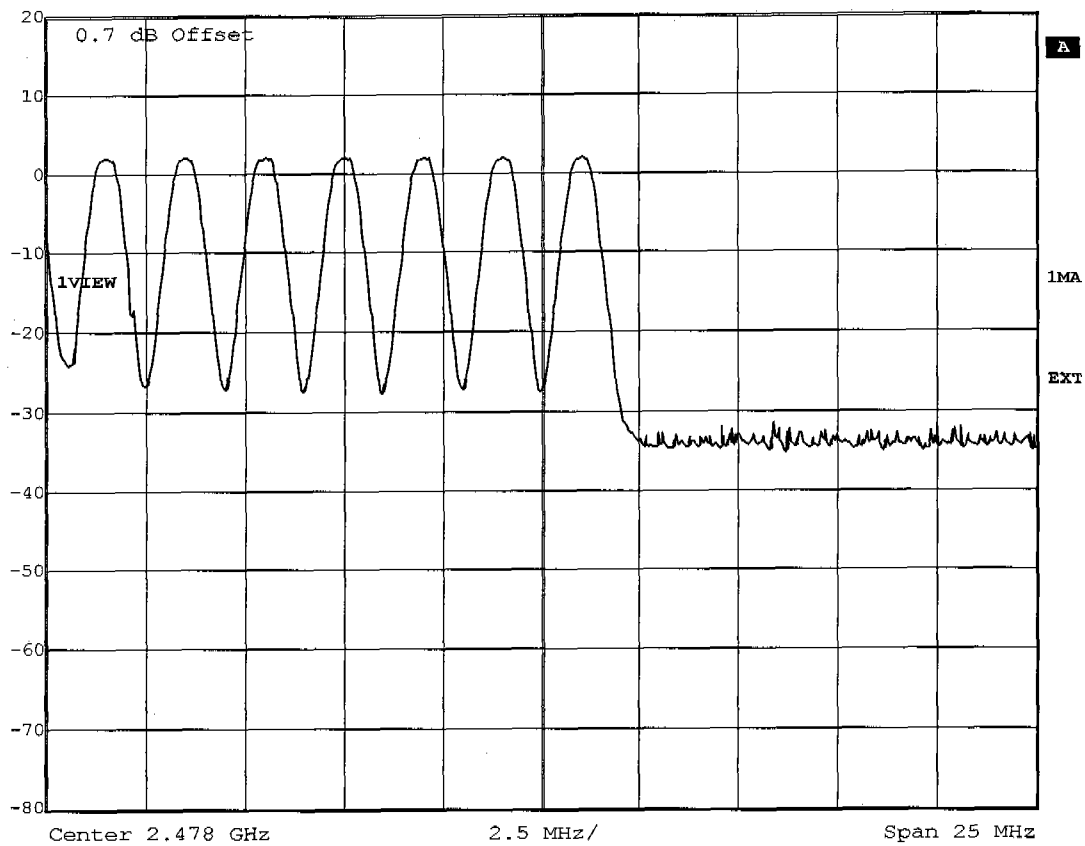


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Jabra BT500
Date: 6.APR.2005 10:50:35

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 0.05 dB VBW 1 MHz
10 dBm 1.674752 ms SWT 3.5 ms Unit dBm

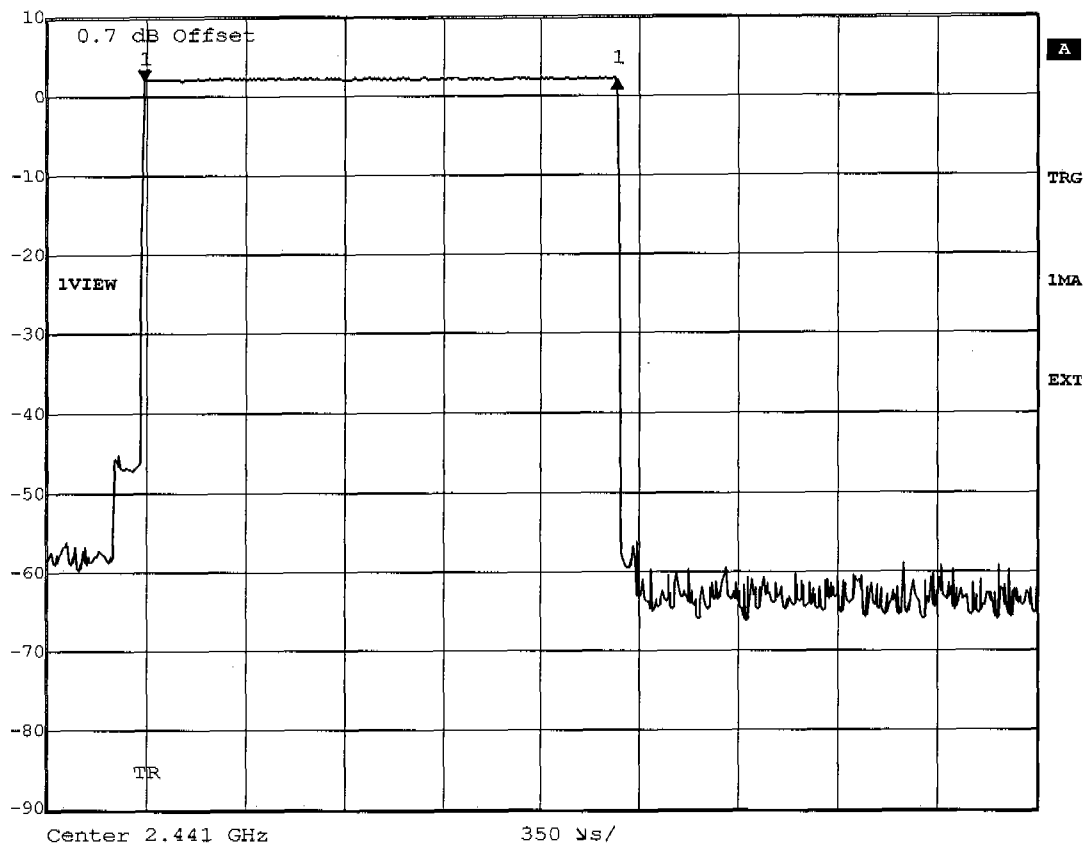

Title: Time of occupancy (Hopping DH3) 107 events * 1.67ms=178.69ms
Comment A: Jabra BT500
Date: 6.APR.2005 09:48:38




Delta 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl -0.22 dB VBW 1 MHz
20 dBm 119.311824 μ s SWT 300 μ s Unit dBm

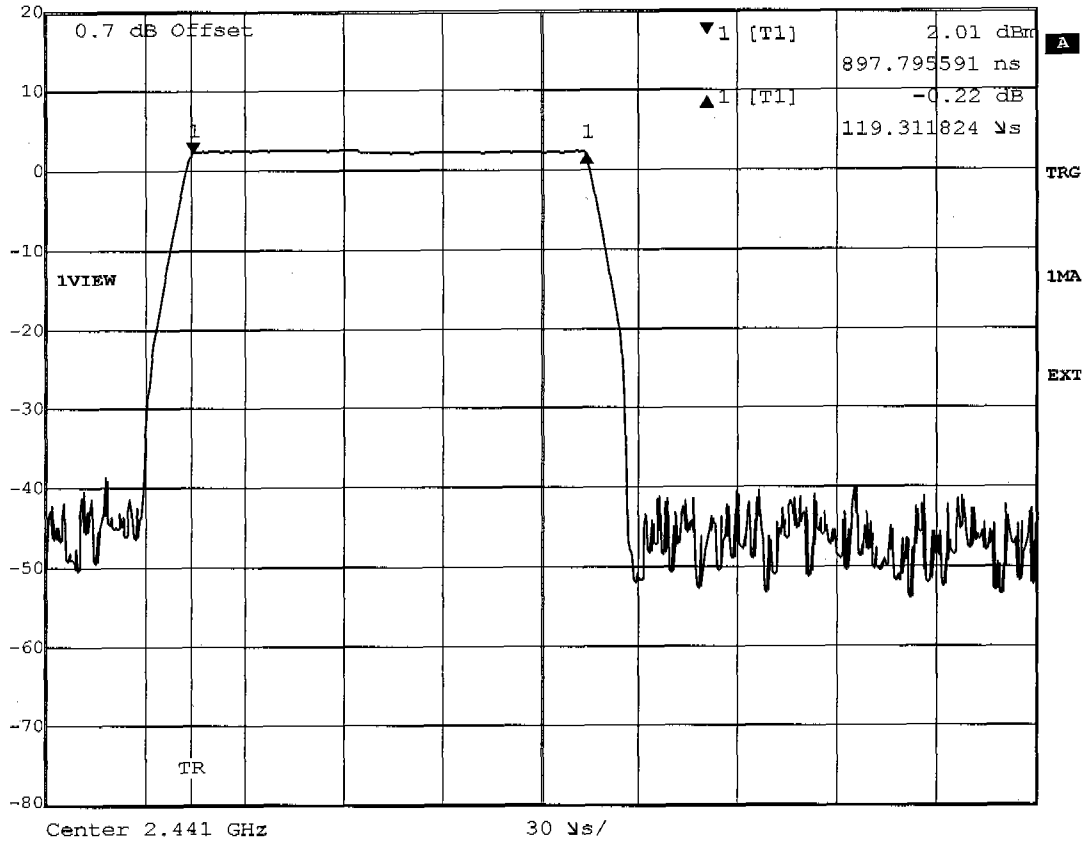

Title: Time of occupancy (Inquiry mode) 367 events * 0.119ms=43.7ms
Comment A: Jabra BT500
Date: 6.APR.2005 11:04:33



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.10 dB VBW 1 MHz
28 dBm 3.767335 ms SWT 7.4 ms Unit dBm

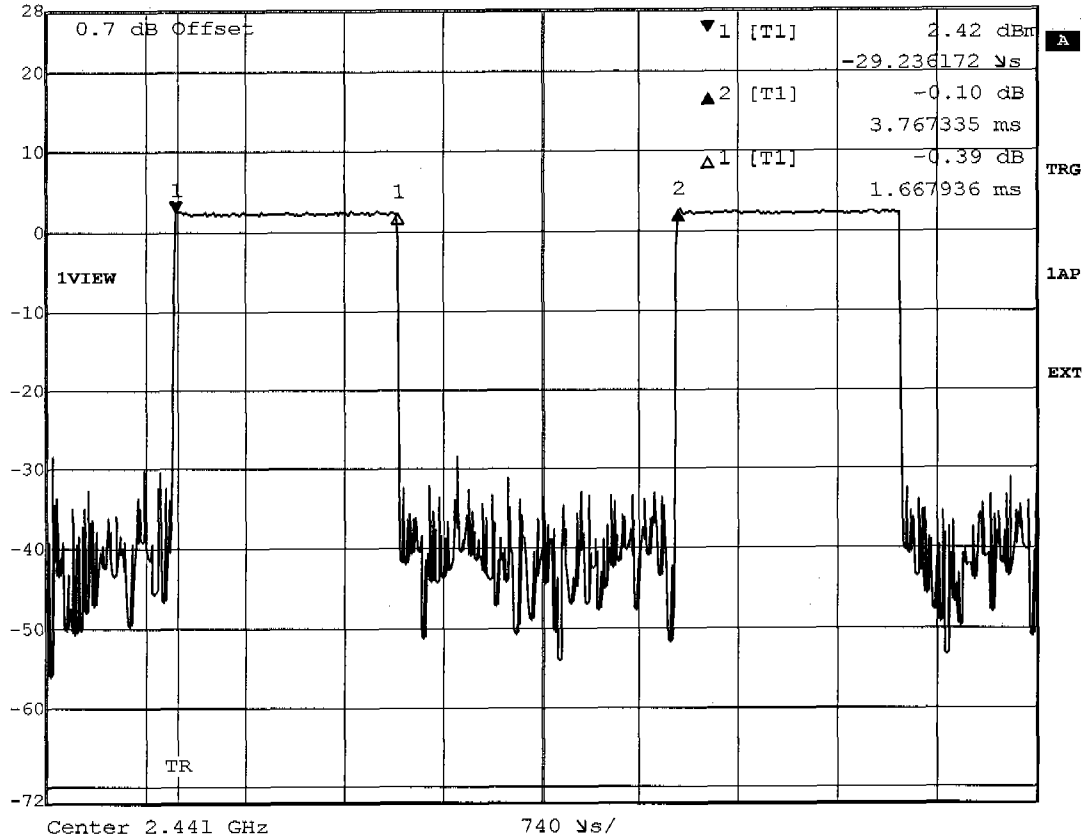


Title: Duty Cycle
Comment A: Jabra BT500
Date: 6.APR.2005 08:42:46

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl 0.19 dB VBW 10 kHz
10 dBm 824.44889780 kHz SWT 56 ms Unit dBm

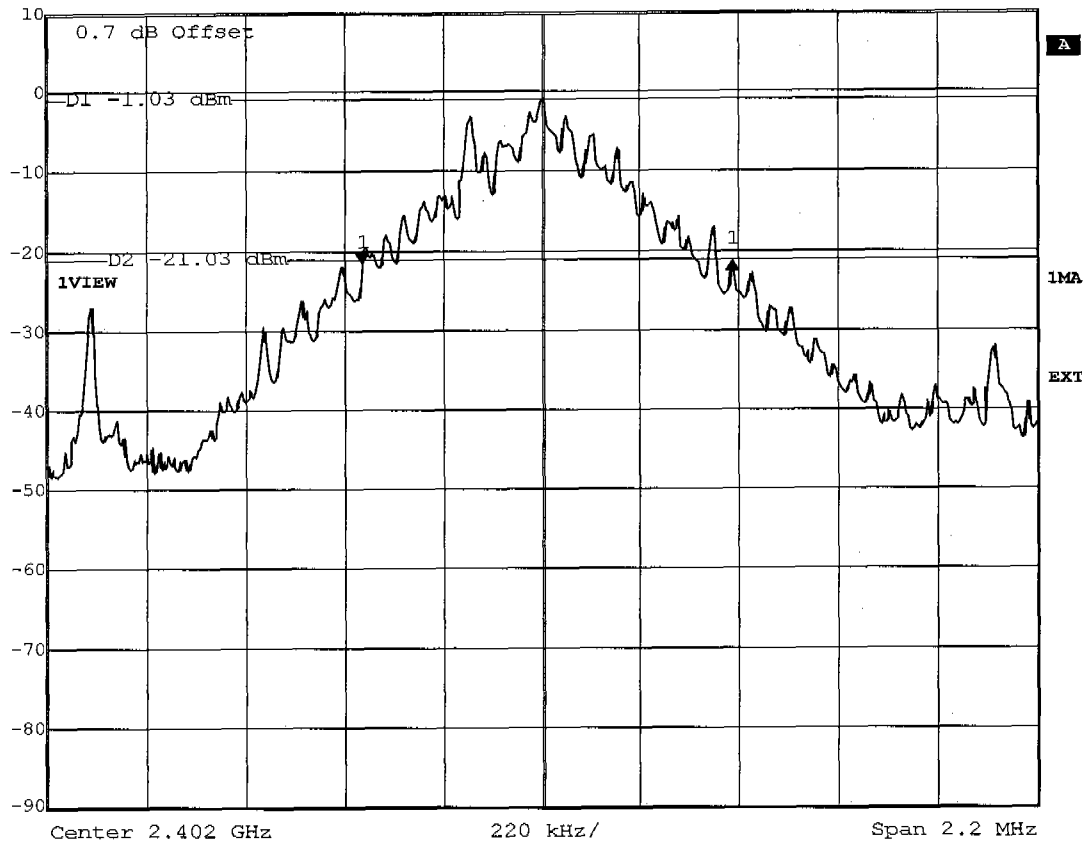

Title: -20dB Bandwidth Ch.: 0
Comment A: Jabra BT500
Date: 6.APR.2005 08:25:54




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl 0.11 dB VBW 10 kHz
10 dBm 793.58717435 kHz SWT 56 ms Unit dBm

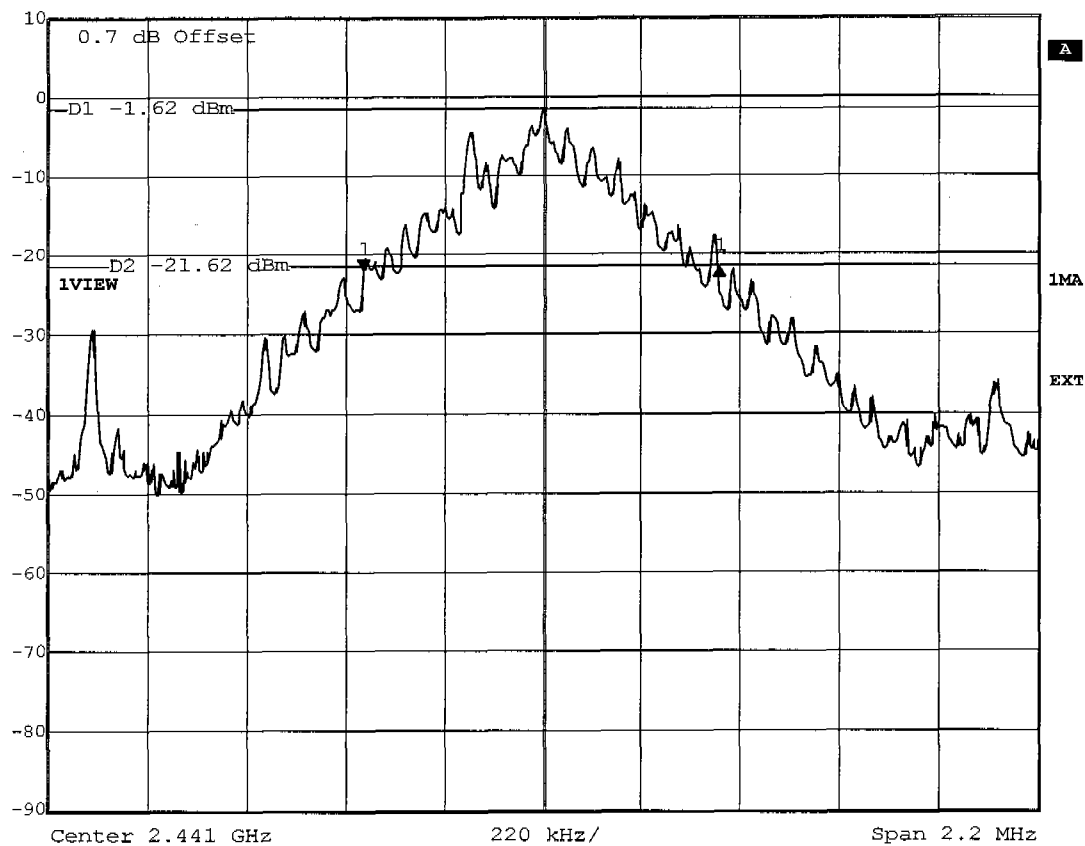

Title: -20dB Bandwidth Ch.: 39
Comment A: Jabra BT500
Date: 6.APR.2005 08:27:14



Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl 0.01 dB VBW 10 kHz
10 dBm 824.44889780 kHz SWT 56 ms Unit dBm

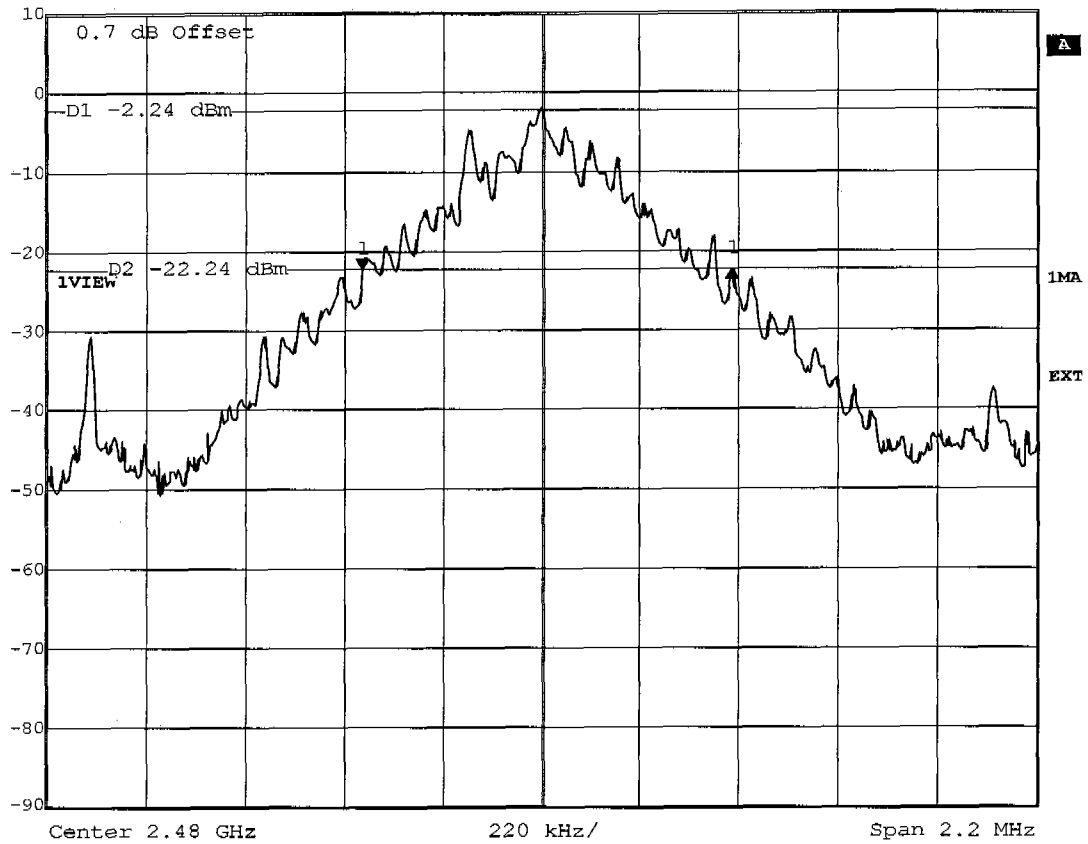


Title: -20dB Bandwidth Ch.: 78
Comment A: Jabra BT500
Date: 6.APR.2005 08:29:28

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 35.30 dB VBW 50 kHz
20 dBm 2.27705411 MHz SWT 5 ms Unit dBm

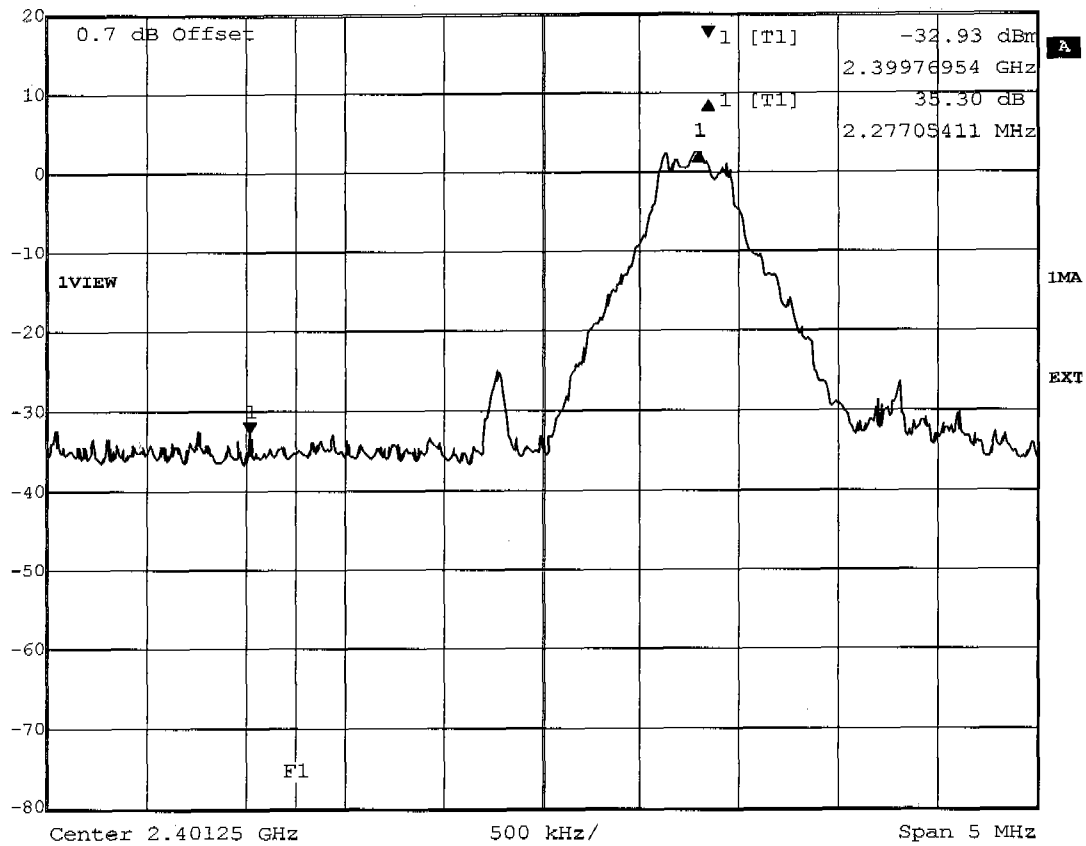

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT500
Date: 6.APR.2005 08:37:01




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.21 dB VBW 50 kHz
20 dBm -3.45739479 MHz SWT 5 ms Unit dBm

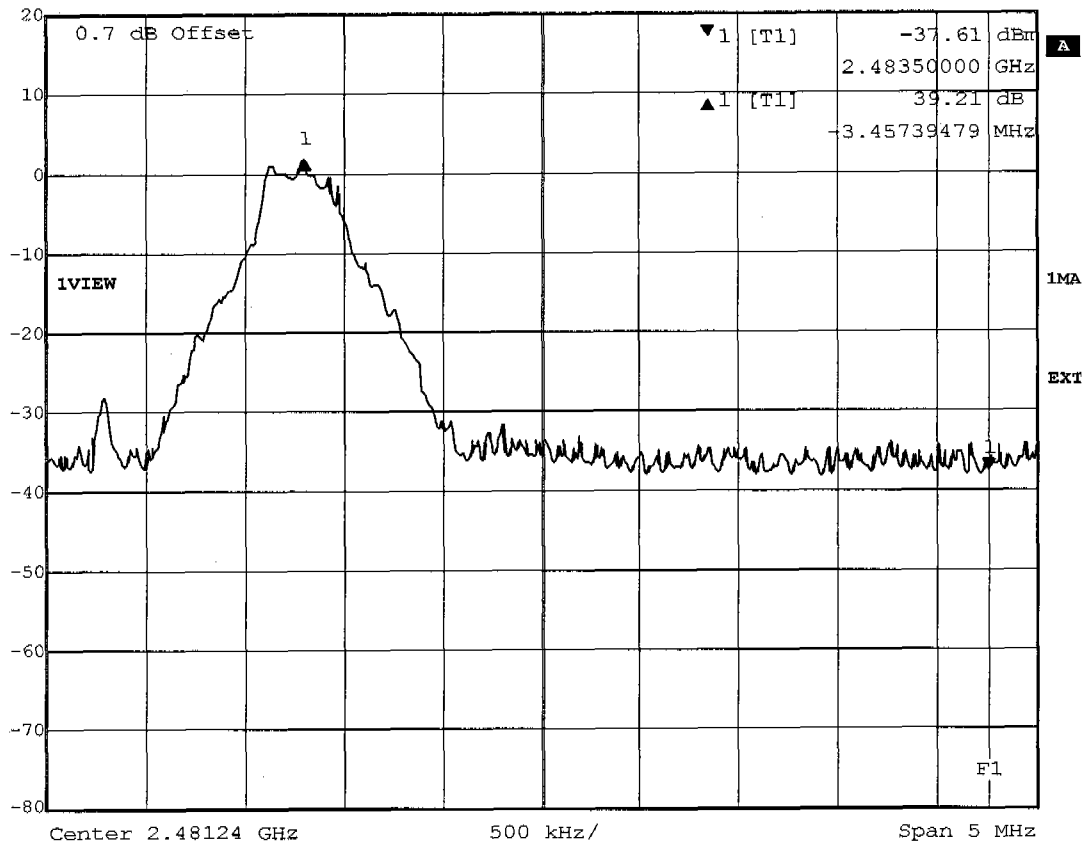

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT500
Date: 6.APR.2005 08:38:30




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 36.52 dB VBW 50 kHz
20 dBm 2.28356713 MHz SWT 5 ms Unit dBm

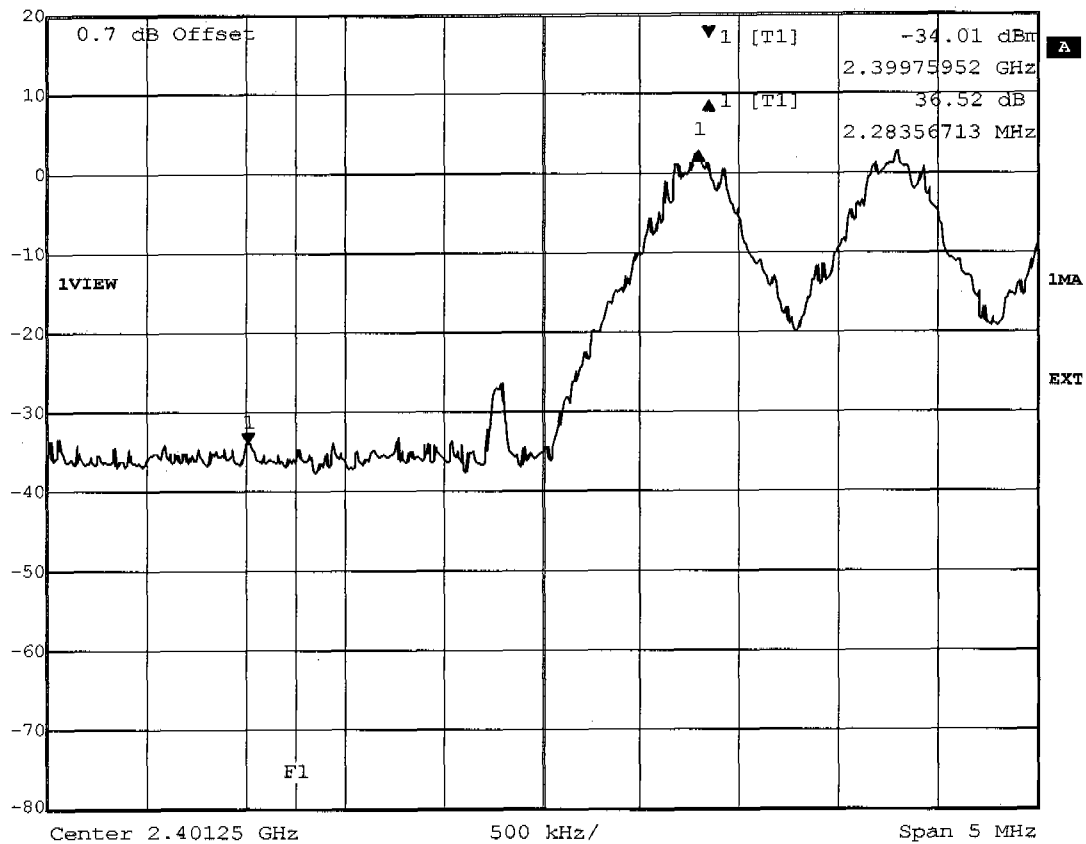

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT500
Date: 6.APR.2005 08:50:57



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 37.95 dB VBW 50 kHz
20 dBm -3.46721443 MHz SWT 5 ms Unit dBm

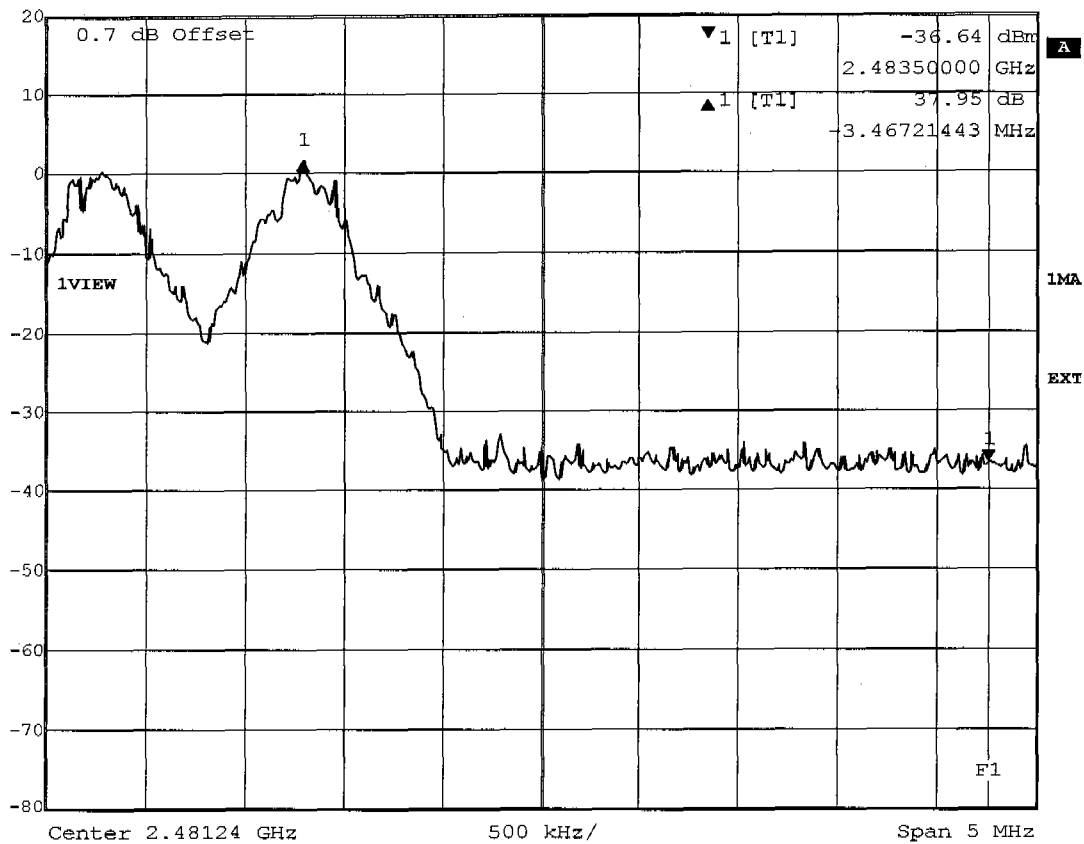


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT500
Date: 6.APR.2005 08:57:07

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
Manufacturer: GN Netcom A/S
Operating Condition: Unom: 120 VAC (AC/DC-adapter), Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: Jabra BT500 mode: charging

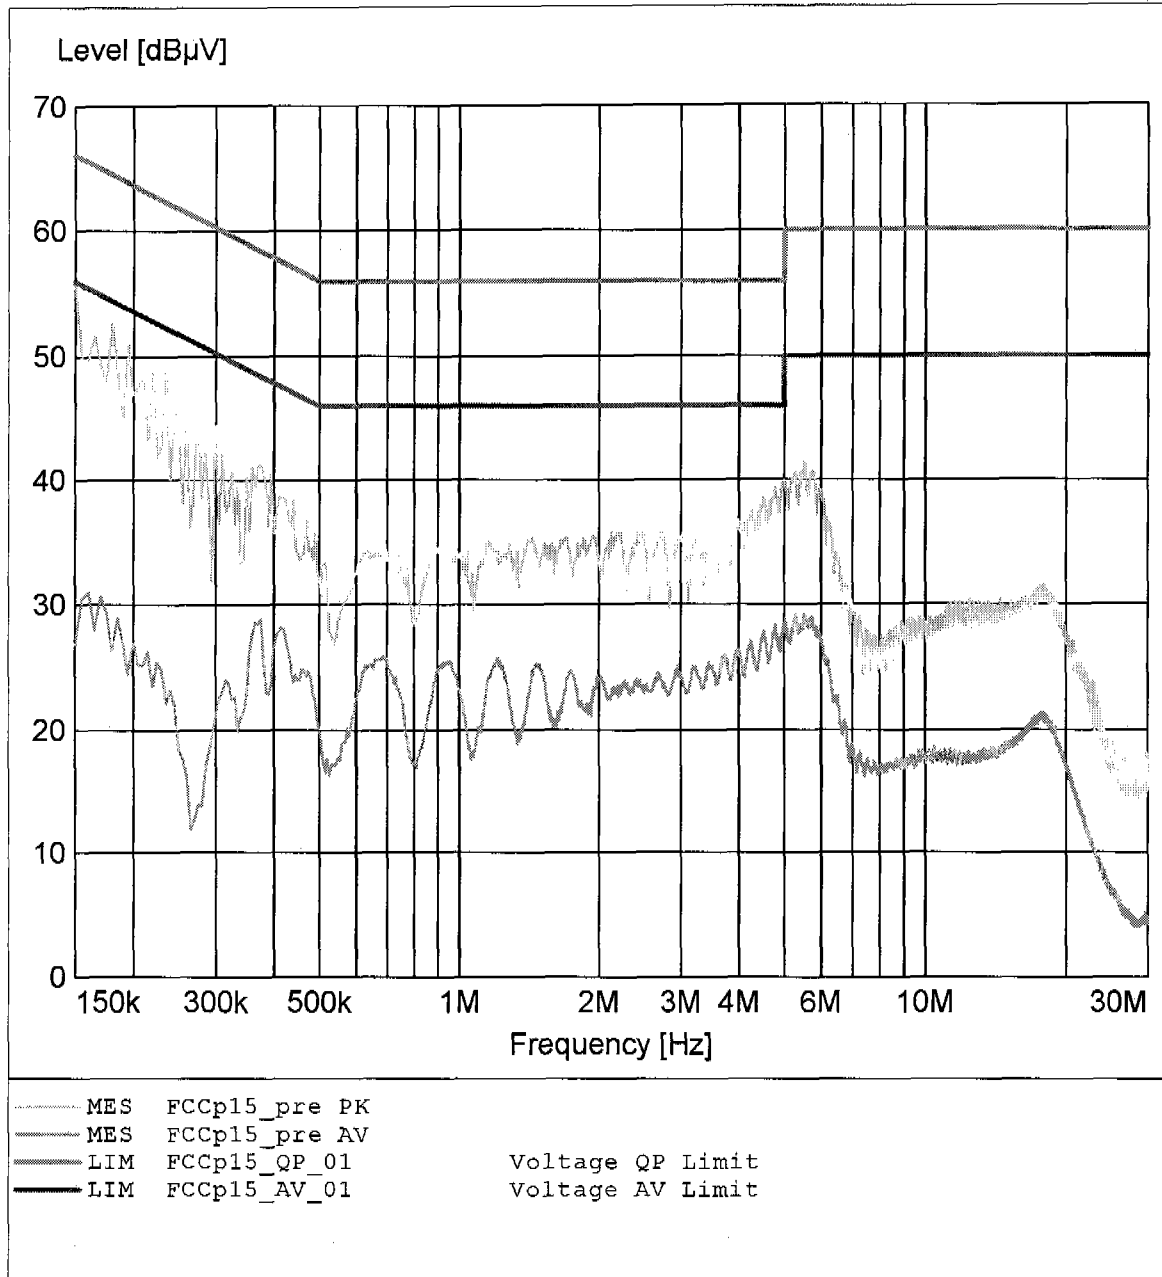

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
 Manufacturer: GN Netcom A/S
 Operating Condition: Unom: 120 VAC (AC/DC-adapter), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Marquardt
 Test Specification: V-Network: ESH2-Z5 (N)
 Comment: model: Jabra BT500 mode: charging

