



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

## **Transmitter Certification**

of

FCC ID: K6610573X20

Model: VXA-300

to

**Federal Communications Commission**

Rule Part(s) 87

Date of report: February 12, 2004

**On the Behalf of the Applicant:**

Vertex Standard Co., Ltd.

**At the Request of:**

P.O. 01/08/04

Vertex Standard USA Inc.  
10900 Walker Street  
Cypress, CA 90630

**Attention of:**

Mikio Maruya, Executive Vice President  
(800) 255-9237; FAX: (800) 477-9237  
(714) 827-7600; FAX: -8100  
m.maruya@vxstdusa.com

**Supervised by:**

A handwritten signature in black ink that reads 'M. Flom P. Eng'. The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.

## List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

Applicant: Vertex Standard Co., Ltd.

FCC ID: K6610573X20

### By Applicant:

- |   |   |
|---|---|
| 1. Letter of Authorization                  | x |
| 2. Confidentiality Request: 0.457 And 0.459 | x |
| 3. Identification Drawings, 2.1033(c)(11)   |   |
| <u>x</u> Label                              |   |
| <u>x</u> Location of Label                  |   |
| <u>x</u> Compliance Statement               |   |
| <u>x</u> Location of Compliance Statement   |   |
| 4. Photographs, 2.1033(c)(12)               | x |
| 5. Documentation: 2.1033(c)                 |   |
| (3) User Manual                             | x |
| (9) Tune Up Info                            | x |
| (10) Schematic Diagram                      | x |
| (10) Circuit Description                    | x |
| Block Diagram                               | x |
| Parts List                                  | x |
| Active Devices                              | x |
| 6. MPE/SAR Report                           | x |

### By M.F.A. Inc.:

- A. Testimonial & Statement of Certification

**The Applicant has been cautioned as to the following:**

**15.21 Information to the User.**

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a) Special Accessories.**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## Table of Contents

<b>Rule</b>	<b>Description</b>	<b>Page</b>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	7
	Standard Test Conditions and Engineering Practices	8
2.1046(a)	Carrier Output Power (Conducted)	9
2.1046(a)	ERP Carrier Power (Radiated)	11
2.1051	Unwanted Emissions (Transmitter Conducted)	12
2.1053(a)	Field Strength of Spurious Radiation	16
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	20
2.1047(a)	Audio Low Pass Filter (Voice Input)	23
2.1047(a)	Audio Frequency Response	26
2.1055(b)(1)	Frequency Stability (Voltage Variation)	31
2.202(g)	Necessary Bandwidth and Emission Bandwidth	32

Page Number 1 of 32.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) **Test Report**

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0420016

d) Client: Vertex Standard USA Inc.  
10900 Walker Street  
Cypress, CA 90630

e) Identification: VXA-300  
FCC ID: K6610573X20

EUT Description: Portable Airband Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: February 12, 2004  
EUT Received: January 8, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Equipment Tested:

Type	Quantity	Manufacturer	Model	Serial No	FCC ID:
EUT	1	Vertex Standard	VXA-300	3N000001	K6610573X20
EUT	1	Vertex Standard	VXA-300	3N000002	K6610573X20

Page Number

2 of 32.

**List of General Information Required for Certification**

In Accordance with FCC Rules and Regulations,  
Volume II, Part 2 and to

87, Confidentiality

Sub-part 2.1033**(c)(1): Name and Address of Applicant:**

Vertex Standard Co., Ltd.  
4-8-8 Nakameguro, Meguro-Ku  
Tokyo 153-8644 Japan

**Manufacturer:**

Vertex Standard Co., Ltd.  
4-8-8 Nakameguro, Meguro-Ku  
Tokyo 153-8644 Japan

**(c)(2): FCC ID:**

K6610573X20

**Model Number:**

VXA-300

**(c)(3): Instruction Manual(s):**

Please see attached exhibits

**(c)(4): Type of Emission:**

6K00A3E

**(c)(5): Frequency Range, MHz:**

118 to 136.975

**(c)(6): Power Rating, Watts:**

\_\_\_\_ Switchable

\_\_\_\_ x \_\_\_\_ Variable

1.5

\_\_\_\_ N/A

**FCC Grant Note:**

BF - The output power is  
continuously variable from the  
value listed in this entry to 20%-  
25% of the value listed.

**(c)(7): Maximum Power Rating, Watts:**

100

**DUT Results:**

Passes \_\_\_\_ x \_\_\_\_ Fails \_\_\_\_

Page Number

3 of 32.

### **Information for Push-To-Talk Devices**

Type and number of antenna to be used for this device:

One. Quarter Wave Whip

Maximum antenna gain for antenna indicated above:

0dBi

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?

No

Other hardware or operating restrictions that could limit a person's RF Exposure:

Yes – Timeout Timer

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

No

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

2.3cm

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?


In User Manual

Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:


In User Manual

Page Number 4 of 32.

## Industry Canada



**Certification and Engineering Bureau**  
**M. Flom Associates Inc.**



is recognized as an approved testing facility,  
in accordance with the provisions of the  
Industry Canada Terminal Attachment  
Programme, subject to any exclusions  
specified in their letter of approval.

*[Signature]*  
Director, Certification and Engineering Bureau

Canada

**Industry Canada** Industry Canada  
Certification and Engineering Bureau  
1241 Clyde Avenue  
Ottawa, Ontario  
K2C 1Y3

February 24, 1998

Mr. M. Flom  
M. Flom Associates, Inc.  
3356 North San Marcos Place, Suite 187  
Chandler, Arizona 85224-1571

Dear Mr. Flom,

The Bureau has received your test report for the Open Area Test Site located at Chandler, Arizona, dated January 30, 1998 and the supplemental information received February 24, 1998. I have reviewed the report and find it complies with RSP 106, Issue 7, section 3.3 Description of Open Area Test Site.

The site is acceptable to Industry Canada for the performance of radiated measurements. Please reference the file number "IC 2044" in the body of all test reports containing measurements made on this site. This reference number is the indication of Industry Canada's acceptance of your site. Your company has been added to our published list of qualified sites on the Bureau's web page. It is located at: <http://spectra.ic.gc.ca/cert>. Please keep the contact information current by notifying us if it changes or is in error.

Keep informed of the latest Industry Canada regulations by visiting the Bureau's site on the World Wide Web:  
<http://spectra.ic.gc.ca/cert/>  
or the Industry Canada main site at:  
<http://strategic.gc.ca>

Whenever major construction or repairs to the site are completed, a re-submission of the site attenuation characteristics will be required.

Yours sincerely,

*Brian Kruger*


Brian Kruger  
Head, EMC and Standards  
Certification and Engineering Bureau

Canada

Tel. No. (813) 952-3650  
Fax. No. (813) 952-1008

Our File: 46327-2044  
Submission: 19120-0

## NIST



**UNITED STATES DEPARTMENT OF COMMERCE**  
National Institute of Standards and Technology  
Gaithersburg, Maryland 20899

September 15, 1999

Mr. Morton Flom  
M. Flom Associates Inc.  
3356 N. San Marcos Place, Suite 107  
Chandler, AZ 85224

Dear Mr. Flom:

I am pleased to inform you that your laboratory has been validated by the Chinese Taipei Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation Mutual Recognition Arrangement (APEC MRA). Your laboratory is now formally designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC MRA between the American Institute in Taiwan (AIT) and the Taipei Economic and Cultural Representative Office (TECRO) in the United States, covering equipment subject to Electro-Magnetic Compatibility (EMC) requirements. The names of all validated and nominated laboratories will be posted on the NIST website at <http://ts.nist.gov/taec> under the "Asia" category.

As of August 1, 1999, you may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable EMC requirements. Your assigned BSMI number is 063-IN-E-041R; you must use this number when sending test reports to BSMI. Your designation will remain in force as long as your NVLAP and/or A2LA and/or BSMI accreditation remains valid for the CMS 1341R.

Please note that BSMI requires that the entity making application for the approval of regulated equipment must make such application in person at their Taipei office. BSMI also requires the cabinet of the authorized signatories who are authorized to sign the test reports. You can send this information via fax to C-Taipei CAB Response Manager at 301-975-5414. I am also enclosing a copy of the cover sheet that, according to BSMI requirements, must accompany every test report.

**NIST**

If you have any questions, please contact Robert Grahill at 301-975-6373 or for Dhillon at 301-975-1524. We appreciate your continued interest in our international conformity assessment activities.





Sincerely,

*[Signature]*  
Gladys L. Collins, Ph.D.  
Director, Office of Standards Services

Enclosure



## U.S. Coast Guard

	(Commandant) 11000 South Coast Guard Washington, D.C. 20548-0001 Ext. 10000 0-9072-3 Phone: (202) 267-1444 14714/160-164/W, PCOM ASDOC May 2, 1999	<b>U. S. Coast Guard Accepted Independent Laboratories</b>																																																	
<p>M. Flom Associates, Inc.          3356 N. San Marcos Pl. 107          Chandler, AZ 85224</p> <p>ACCEPTANCE AS AN INDEPENDENT LABORATORY FOR TESTING 406 MHz EPIRBs</p> <p>M. Flom Associates, Inc. is hereby accepted as an independent laboratory under 46 CFR 159 for testing 406 MHz Emergency Position Indicating Radio Beacons. These 406 MHz EPIRBs are type-accepted by the Federal Communications Commission under 47 CFR Parts 2 and 90, and are to be tested as outlined in the publication of the Radio Technical Commission for Maritime Services, entitled "RTCM Recommended Standards for 406 MHz Emergency Position Indicating Radio Beacons (EPIRBs)", dated July 31, 1997, with editorial update of December 31, 1997; Appendix A (RTCM Recommended Standards).</p> <p>Prior to conducting any testing you must obtain a copy of the RTCM Recommended Standards for 406 MHz EPIRBs from the Radio Technical Commission for Maritime Services, P.O. Box 19087, Washington, DC 20006.</p> <p>If you have any questions please contact LCRA Dene of my staff.</p>	Sincerely,  R. L. HARKLE Chief, Survival Systems Branch Maritime Vessel Inspection and Documentation Division By direction of the Commandant	<table border="1"> <thead> <tr> <th>Stationers Laboratory</th> <th>330 Phipps Road</th> <th>Northbrook, IL 60062</th> <th>Point of Contact</th> <th>Mr. Joe Brown</th> <th>03 May 98</th> <th>34</th> </tr> </thead> <tbody> <tr> <td>181.011</td> <td>406MHz Satellite EPIRBs</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>DENA Hager</td> <td>101 Convent Road</td> <td>Portsmouth, NH 03801</td> <td>PCOM NJ</td> <td>3062LAME</td> <td>Point of Contact</td> <td>Mr. Peter Gifford</td> </tr> <tr> <td>181.012</td> <td>Personal Flotation Device Lights</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>American Bureau of Shipping</td> <td>400 American Bldg</td> <td>10000 Northchase Dr.</td> <td>Houston, TX</td> <td>77059-0001</td> <td>Point of Contact</td> <td>Mr. Charles J. Dackel</td> </tr> <tr> <td>181.013</td> <td>Personal Flotation Device Lights</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Canadian Standards Assoc.</td> <td>170 Rexdale Blvd.</td> <td>Etobicoke, Ontario</td> <td>M9W 1R2</td> <td>CANADA</td> <td>Point of Contact</td> <td>Mr. Bruce Hunter</td> </tr> </tbody> </table>	Stationers Laboratory	330 Phipps Road	Northbrook, IL 60062	Point of Contact	Mr. Joe Brown	03 May 98	34	181.011	406MHz Satellite EPIRBs						DENA Hager	101 Convent Road	Portsmouth, NH 03801	PCOM NJ	3062LAME	Point of Contact	Mr. Peter Gifford	181.012	Personal Flotation Device Lights						American Bureau of Shipping	400 American Bldg	10000 Northchase Dr.	Houston, TX	77059-0001	Point of Contact	Mr. Charles J. Dackel	181.013	Personal Flotation Device Lights						Canadian Standards Assoc.	170 Rexdale Blvd.	Etobicoke, Ontario	M9W 1R2	CANADA	Point of Contact	Mr. Bruce Hunter
Stationers Laboratory	330 Phipps Road	Northbrook, IL 60062	Point of Contact	Mr. Joe Brown	03 May 98	34																																													
181.011	406MHz Satellite EPIRBs																																																		
DENA Hager	101 Convent Road	Portsmouth, NH 03801	PCOM NJ	3062LAME	Point of Contact	Mr. Peter Gifford																																													
181.012	Personal Flotation Device Lights																																																		
American Bureau of Shipping	400 American Bldg	10000 Northchase Dr.	Houston, TX	77059-0001	Point of Contact	Mr. Charles J. Dackel																																													
181.013	Personal Flotation Device Lights																																																		
Canadian Standards Assoc.	170 Rexdale Blvd.	Etobicoke, Ontario	M9W 1R2	CANADA	Point of Contact	Mr. Bruce Hunter																																													
M. S.W. J. C. 20340 100 Coast Guard, 2000	  POSTAGE AND FEES PAID United States Coast Guard 007 514	Wednesday, May 02 15:19:00 <span style="float: right;">Page 10 of 14</span>																																																	

M. Flom Associates, Inc.  
 3356 N. San Marcos Pl. 107  
 Chandler, AZ 85224

Page Number 6 of 32.

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	=	0.9
Collector Voltage, Vdc	=	15
Supply Voltage, Vdc	=	6-15vdc

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

☐ Attached Exhibits  
☒ N/A

(c)(14): **Test and Measurement Data:**

Follows

Page Number

7 of 32.

Sub-part

2.1033(c)(14):**Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_\_ 21 – Domestic Public Fixed Radio Services
- \_\_\_\_\_ 22 – Public Mobile Services
- \_\_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_\_ 23 – International Fixed Public Radiocommunication services
- \_\_\_\_\_ 24 – Personal Communications Services
- \_\_\_\_\_ 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_\_ 80 – Stations in the Maritime Services
- \_\_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_\_\_ 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- \_\_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- x   87 – Aviation Services
- \_\_\_\_\_ 90 – Private Land Mobile Radio Services
- \_\_\_\_\_ 94 – Private Operational-Fixed Microwave Service
- \_\_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_\_ 101 – Fixed Microwave Services

**Standard Test Conditions  
and  
Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

**Page Number** 9 of 32.

**Name of Test:** Carrier Output Power (Conducted)

**Specification:** 47 CFR 2.1046(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

**Test Equipment:** As per attached page

### Measurement Procedure

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

### Measurement Results (Worst case)

Frequency of Carrier, MHz = 128.000, 118.000, 136.975  
Ambient Temperature =  $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Power Setting	RF Power, Watts
High	1.5


Performed by:



Daniel M. Dillon, Test Engineer

### Transmitter Power Conducted Measurements

Test A. RF Power Output  
Test B. Frequency Stability

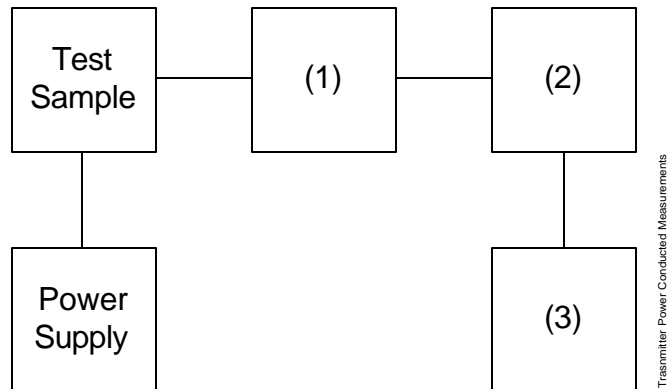

Asset	Description	s/n
(1)	<b>Coaxial Attenuator</b>	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(2)	<b>Power Meters</b>	
X i00020	HP 8901A Power Mode	2105A01087
(3)	<b>Frequency Counter</b>	
X i00020	HP 8901A Frequency Mode	2105A01087

Page Number 11 of 32.


**Name of Test:** ERP Carrier Power (Radiated)

**Specification:** TIA/EIA 603A (Substitution Method)

**2.2.17.1 Definition:** The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

**2.2.17.2 Method of Measurement:**

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

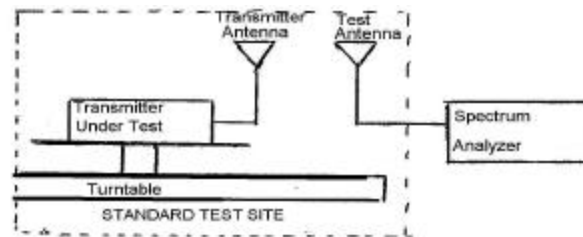

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} S 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

**Results**

	118 MHz		128 MHz		136.975 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	26.4	-0.3	28.5	-0.1	18.1	0.1
45°	26.0	-0.3	28.4	-0.1	18.8	0.1
90°	26.4	-0.3	28.3	-0.1	18.7	0.1
135°	26.3	-0.3	28.5	-0.1	18.5	0.1
180°	26.3	-0.3	28.2	-0.1	18.6	0.1
225°	26.5	-0.3	28.0	-0.1	18.3	0.1
270°	26.2	-0.3	28.3	-0.1	18.7	0.1
315°	26.2	-0.3	28.6	-0.1	18.4	0.1
<hr/>						
	118 MHz		128 MHz		136.975 MHz	
Av. Radiated Power:	26.2875 dBm		28.35 dBm		18.5125 dBm	

Page Number 12 of 32.

**Name of Test:** Unwanted Emissions (Transmitter Conducted)

**Specification:** 47 CFR 2.1051

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

**Test Equipment:** As per attached page

### Measurement Procedure

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. Measurement Results: Attached for worst case

Frequency of carrier, MHz	=	128.000, 118.000, 136.975
Spectrum Searched, GHz	=	0 to 10 x $F_c$
Maximum Response, Hz	=	891
All Other Emissions	=	= 20 dB Below Limit

Performed by:




Daniel M. Dillon, Test Engineer



**Transmitter Spurious Emission**

Test A. Occupied Bandwidth (In-Band Spurious)

Test B. Out-Of-Band Spurious

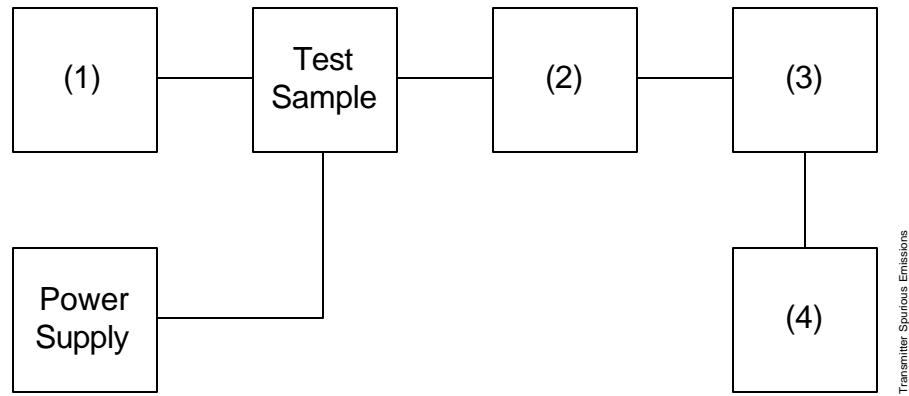

Asset	Description	s/n
<b>(1) Audio Oscillator/Generator</b>		
X i00017	HP 8903A Audio Analyzer	2216A01753
i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
<b>(2) Coaxial Attenuator</b>		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i0012/3	NARDA 766 (10 dB)	7802 or 7802A
<b>(3) Filters; Notch, HP, LP, BP</b>		
i00126	Eagle TNF-1 Notch Filter	100-250
i00125	Eagle TNF-1 Notch Filter	50-60
i00124	Eagle TNF-1 Notch Filter	250-850
<b>(4) Spectrum Analyzer</b>		
X i00048	HP 8566B Spectrum Analyzer	2511A01467
i00029	HP 8563E Spectrum Analyzer	3213A00104

Page Number 14 of 32.

**Name of Test:** Unwanted Emissions (Transmitter Conducted)Limit(s), dBc:  $-(43+10 \times \text{LOG } P) = -44.8$  (2 Watts)

g0410201: 2004-Jan-08 Thu 14:33:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	Level, dBc	Margin, dB
118.000000	235.996500	-59.8	-89.8	-46.8
128.000000	256.002000	-61.8	-91.8	-48.8
136.975000	273.959500	-58.8	-88.8	-45.8
118.000000	354.014500	-61.3	-91.3	-48.3
128.000000	384.002000	-65	-95	-52
136.975000	410.919000	-61.4	-91.4	-48.4
118.000000	472.008000	-61.2	-91.2	-48.2
128.000000	511.970500	-70.9	-100.9	-57.9
136.975000	548.091000	-62.4	-92.4	-49.4
118.000000	590.061000	-62.4	-92.4	-49.4
128.000000	639.785000	-72.4	-102.4	-59.4
136.975000	685.016000	-62	-92	-49
118.000000	707.802000	-62.9	-92.9	-49.9
128.000000	768.154000	-71.9	-101.9	-58.9
136.975000	821.990000	-63	-93	-50
118.000000	826.080500	-62	-92	-49
128.000000	896.146000	-72.1	-102.1	-59.1
118.000000	943.781500	-62.7	-92.7	-49.7
136.975000	958.745000	-60.9	-90.9	-47.9
128.000000	1024.057500	-72.2	-102.2	-59.2
118.000000	1062.157000	-62.2	-92.2	-49.2
136.975000	1096.029500	-62.7	-92.7	-49.7
128.000000	1152.030000	-71.8	-101.8	-58.8
118.000000	1179.877000	-61.7	-91.7	-48.7
136.975000	1232.846000	-62	-92	-49
128.000000	1280.185500	-71.3	-101.3	-58.3
118.000000	1297.866500	-62.3	-92.3	-49.3
136.975000	1369.593500	-61	-91	-48
128.000000	1408.207500	-71.5	-101.5	-58.5
118.000000	1415.923500	-61.9	-91.9	-48.9
136.975000	1506.817000	-61.8	-91.8	-48.8
118.000000	1533.899500	-61.3	-91.3	-48.3
128.000000	1535.787000	-70.9	-100.9	-57.9
136.975000	1643.538000	-60.4	-90.4	-47.4
118.000000	1652.119000	-61.9	-91.9	-48.9
128.000000	1663.827000	-71.9	-101.9	-58.9
118.000000	1770.210500	-61.1	-91.1	-48.1
136.975000	1780.438000	-61.8	-91.8	-48.8
128.000000	1791.832000	-70.8	-100.8	-57.8
136.975000	1917.441500	-61.1	-91.1	-48.1
128.000000	1919.879500	-71	-101	-58
136.975000	2054.751000	-60.5	-90.5	-47.5



Performed by:

Daniel M. Dillon, Test Engineer

Page Number 15 of 32.

**Name of Test:** Radiated Spurious Emissions

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	dBμ?	pico-watts
128.00	161.09	-61.7	184	677
128.00	693.21	-75.6	37	28
136.97	753.28	-72.7	52	54

Page Number 16 of 32.

**Name of Test:** Field Strength of Spurious Radiation

**Specification:** 47 CFR 2.1053(a)


**Guide:** ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

### Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


#### 1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
  - 2) Video Bandwidth = 3 times Resolution Bandwidth, or 30 kHz (22.917)
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

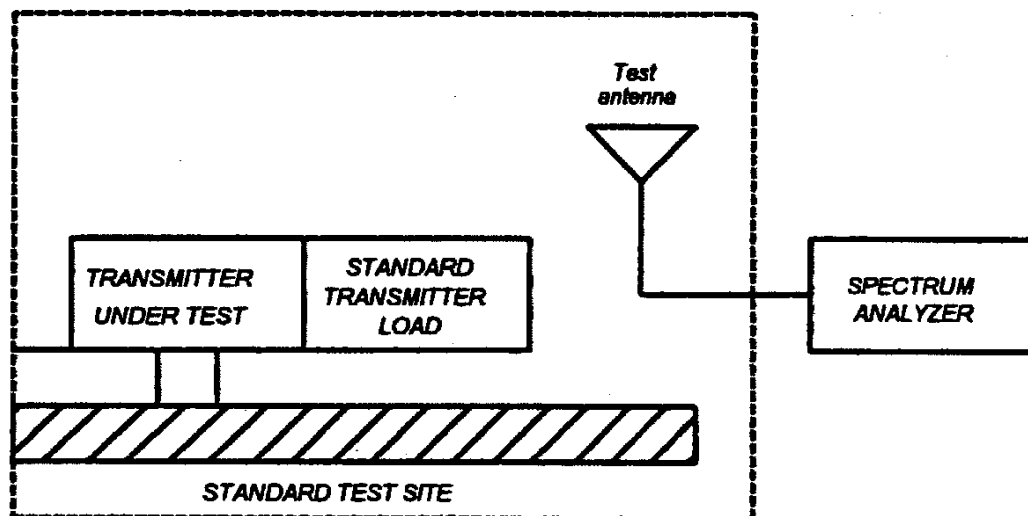

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

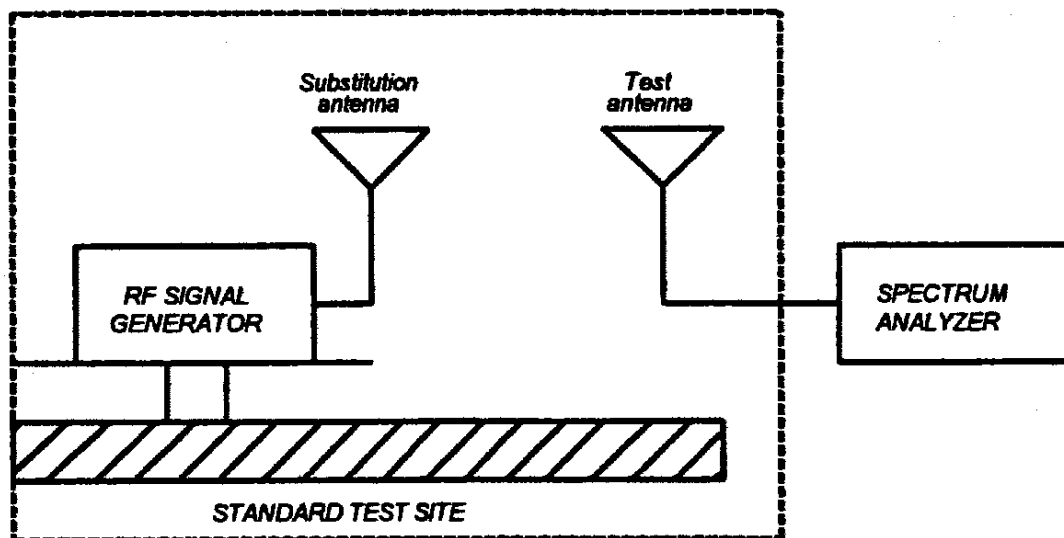

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Page Number 18 of 32.

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

$$\text{Radiated spurious emissions dB} = 10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step L)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

**Test Equipment:**

Asset	Description	s/n	Cycle	Last Cal
<b>Transducer</b>				
	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo. Sep-03
X	i00089	Apriel 2001 200MHz-1GHz	001500	12 mo. Sep-03
X	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo. Jan-04
<b>Amplifier</b>				
X	i00028	HP 8449A	2749A00121	12 mo. May-03
<b>Spectrum Analyzer</b>				
X	i00029	HP 8563E	3213A00104	12 mo. May-03
X	i00033	HP 85462A	3625A00357	12 mo. Aug-03
<b>Substitution Generator</b>				
X	i00067	HP 8920A Communication TS	3345U01242	12 mo. Oct-03
	i00207	HP 8753D Network Analyzer	3410A08514	12 mo. Jul-03

**Microphone, Antenna Port, and Cabling**

Microphone	_____	Cable Length	_____	Meters
Antenna Port Terminated	_____	Load	_____	Antenna Gain
All Ports Terminated by Load	_____	Peripheral	_____	

Page Number 19 of 32.

**Name of Test:** Field Strength of Spurious Radiation

g0410212: 2004-Jan-14 Wed 09:05:00

STATE: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	ERP, dBm	ERP, dBc
118.000000	236.006300	-47.3	≤-87.3
118.000000	354.012500	-48.5	≤-87.3
118.000000	472.010000	-44.3	≤-87.3
118.000000	590.016300	-37.3	≤-87.3
118.000000	708.011300	-43.4	≤-87.3
118.000000	826.017500	-55.1	≤-87.3
118.000000	944.016300	-38.7	≤-87.3
118.000000	1062.022500	-47.2	≤-87.3
118.000000	1180.028800	-60.2	≤-87.3



Performed by:

Daniel M. Dillon, Test Engineer

**Page Number** 20 of 32.

**Name of Test:** Emission Masks (Occupied Bandwidth)

**Specification:** 47 CFR 2.1049(c)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5/\pm 1.25$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. Measurement Results: Attached



Page Number


21 of 32.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g0410203: 2004-Jan-09 Fri 09:31:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

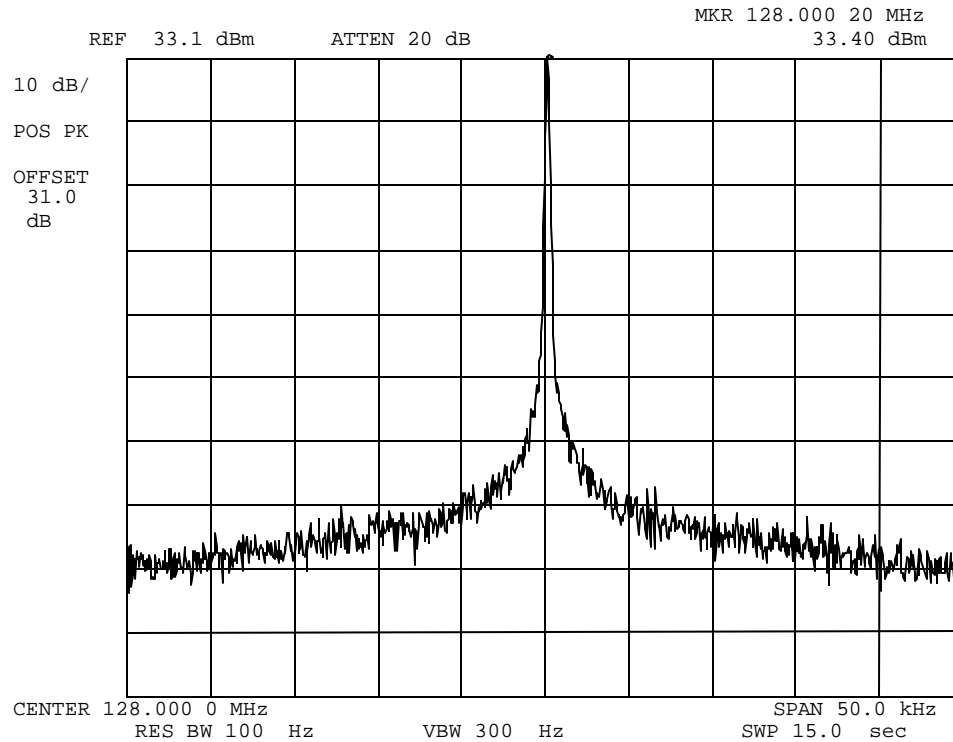

Power:

HIGH

Modulation:

NONE

Performed by:

Daniel M. Dillon, Test Engineer

Page Number


22 of 32.

**Name of Test:** Emission Masks (Occupied Bandwidth)

g0410204: 2004-Jan-09 Fri 09:48:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

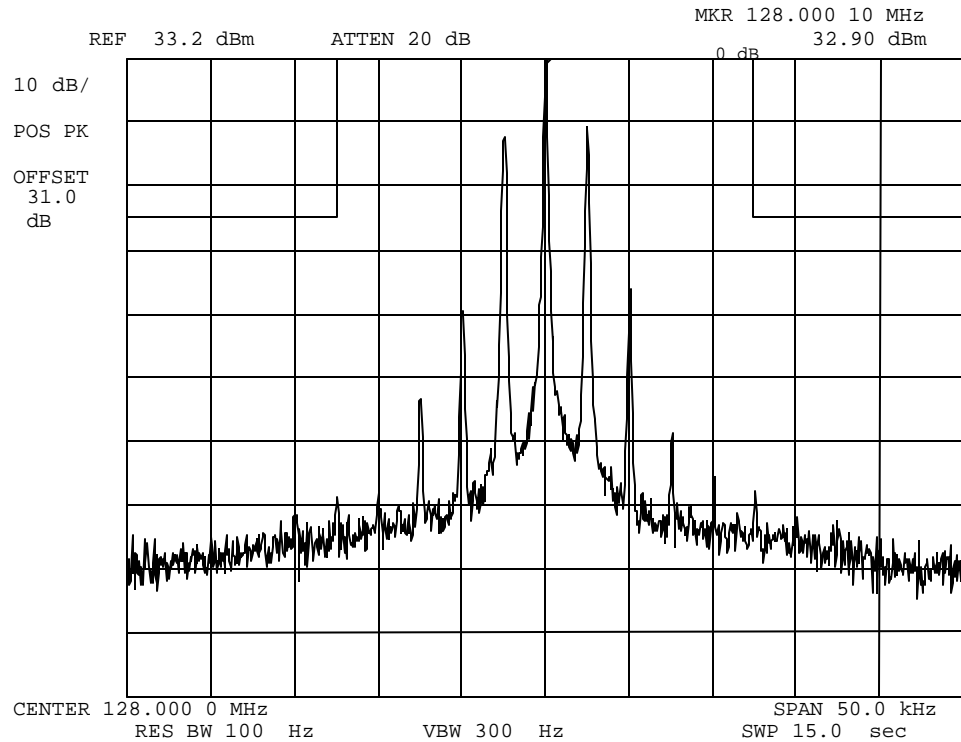Power:  
Modulation:HIGH  
VOICE  
MASK: FCC, 87.139, AM, 25kHz BW

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 23 of 32.

**Name of Test:** Audio Low Pass Filter (Voice Input)

**Specification:** 47 CFR 2.1047(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.15


**Test Equipment:** As per attached page

### **Measurement Procedure**

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. Measurement Results: Attached

**Transmitter Test Set-Up**

Test A. Modulation Capability/Distortion  
 Test B. Audio Frequency Response  
 Test C. Hum and Noise Level  
 Test D. Response of Low Pass Filter  
 Test E. Modulation Limiting

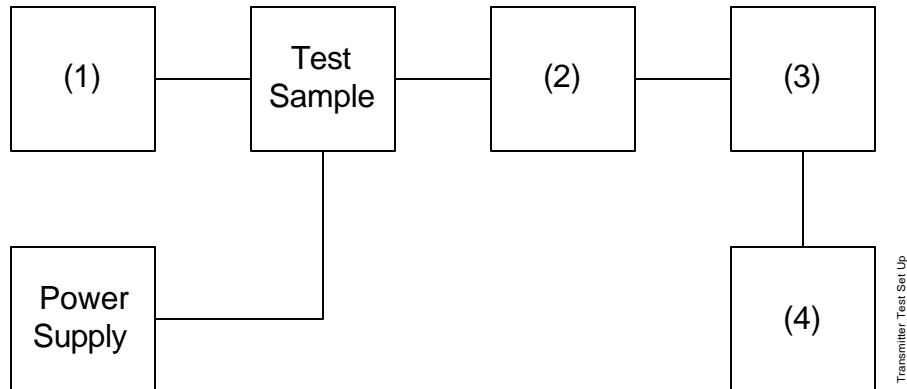

Asset	Description	s/n
<b>(1) Audio Oscillator</b>		
X i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
<b>(2) Coaxial Attenuator</b>		
i00122/3	NARDA 766 (10dB)10	7802 or 7802A
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
<b>(3) Modulation Analyzer</b>		
X i00020	HP 8901A Modulation Meter	2105A01087
<b>(4) Audio Analyzer</b>		
X i00001	HP 3586B Selective Level Meter	1928A01360

Page Number


25 of 32.

**Name of Test:** Audio Low Pass Filter (Voice Input)

g0410018: 2004-Jan-08 Thu 15:44:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

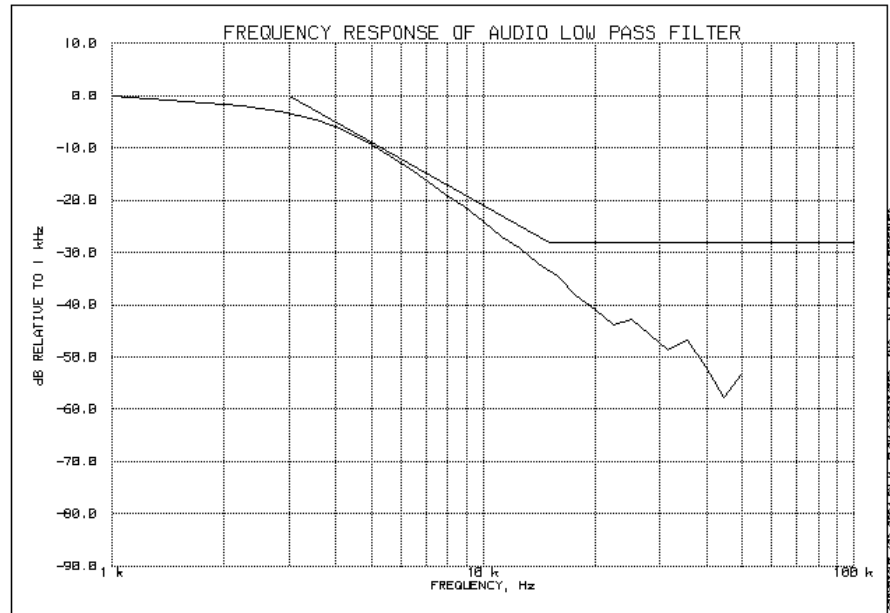

Performed by:

Daniel M. Dillon, Test Engineer

**Page Number** 26 of 32.

**Name of Test:** Audio Frequency Response

**Specification:** 47 CFR 2.1047(a)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

**Test Equipment:** As per previous page

#### **Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. Measurement Results: Attached

Page Number


27 of 32.

**Name of Test:** Audio Frequency Response

g0410010: 2004-Jan-08 Thu 15:16:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

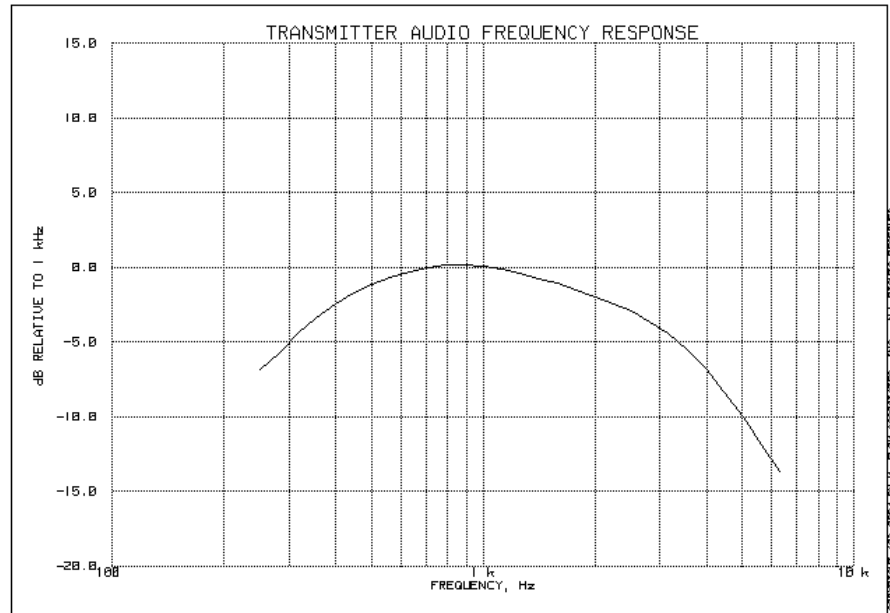

Frequency of Maximum Audio Response, Hz = 891

Additional points:

Frequency, Hz	Level, dB
300	-5.01
20000	-19.14
30000	-19.27
50000	-19.16

Performed by:

Daniel M. Dillon, Test Engineer

**Page Number** 28 of 32.

**Name of Test:** Frequency Stability (Temperature Variation)

**Specification:** 47 CFR 2.1055(a)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

**Test Conditions:** As Indicated

**Test Equipment:** As per previous page


### **Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Measurement Results: Attached, performed by Vertex Standard



**Transmitter Test Set-Up**


Frequency Stability: Temperature Variation  
 Frequency Stability: Voltage Variation

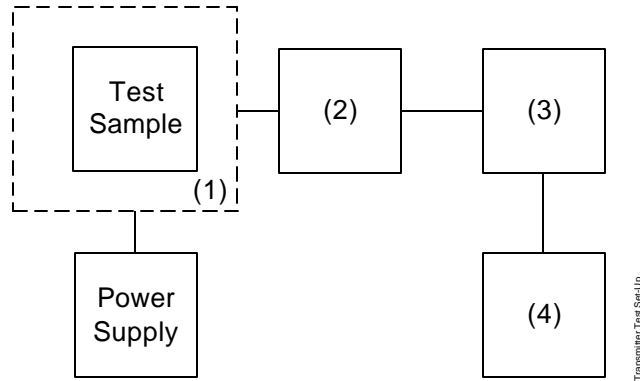

Asset	Description	s/n
<b>(1) Temperature, Humidity, Vibration</b>		
X i00027	Tenney Temp. Chamber	9083-765-234
<b>(2) Coaxial Attenuator</b>		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
<b>(3) RF Power</b>		
X i00067	HP 8920A Communications TS	3345U01242
<b>(4) Frequency Counter</b>		
X i00067	HP 8920A Communications TS	3345U01242

Page Number 30 of 32.

**Name of Test:** Frequency Stability (Temperature Variation)

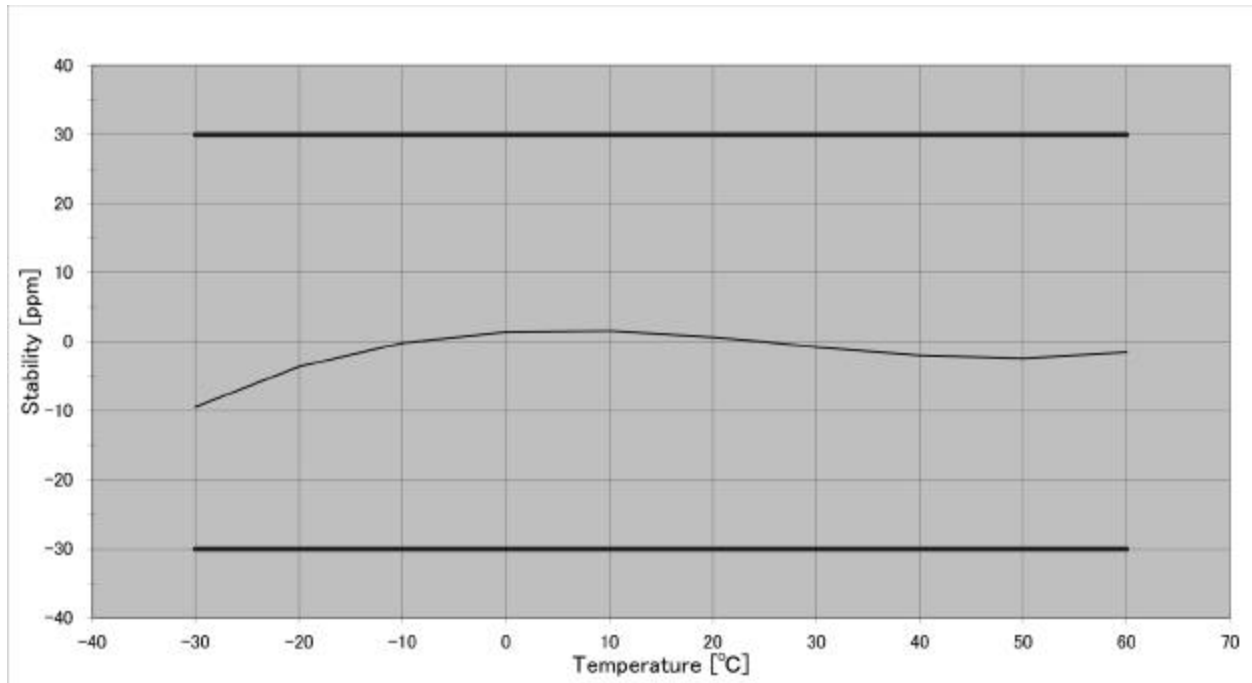

Page Number 31 of 32.

**Name of Test:** Frequency Stability (Voltage Variation)

**Specification:** 47 CFR 2.1055(d)(1)

**Guide:** ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT was placed in a temperature chamber at  $25 \pm 5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

**Results:** Frequency Stability (Voltage Variation)

g0410200: 2004-Jan-08 Thu 14:25:25

State: 0:General

Ambient Temperature:  $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Limit, ppm = 5  
 Limit, Hz = 640  
 Battery End Point (Voltage) = 5.6

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
115	8.5	128.00003	30	.234
100	7.4	128.00003	30	.234
85	6.3	128.00003	30	.234
62	5.6	128.00003	30	.234



Performed by:

Daniel M. Dillon, Test Engineer

Page Number 32 of 32.

**Name of Test:** Necessary Bandwidth and Emission Bandwidth

**Specification:** 47 CFR 2.202(g)

Modulation = 6K00A3E

**Necessary Bandwidth Calculation:**

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 0
Constant Factor (K)	= 1
Necessary Bandwidth ( $B_N$ ), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 6

Performed by:



Daniel M. Dillon, Test Engineer

END OF TEST REPORT

**Testimonial  
and  
Statement of Certification**

**This is to Certify:**

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.