



TEST REPORT

Report Number: R14176139-E5eV2

Applicant : Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0076, Japan

FCC ID : PY7-83262V

EUT Description : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
2022-03-25

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2022-03-16	Initial Issue	Noah Bennett
V2	2022-03-25	Harmonized all antenna descriptors to read as chain 0 and chain 1. Revised maximum output power in section 6.2 to only include 5.8 band power (not straddle channels).	Brian Kiewra

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULT SUMMARY	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES	7
5.3. MEASUREMENT UNCERTAINTY	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. EUT DESCRIPTION	8
6.2. MAXIMUM OUTPUT POWER	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
6.4. SOFTWARE AND FIRMWARE	8
6.5. WORST-CASE CONFIGURATION AND MODE	9
6.6. DESCRIPTION OF TEST SETUP	10
7. MEASUREMENT METHOD	11
8. TEST AND MEASUREMENT EQUIPMENT	12
9. ANTENNA PORT TEST RESULTS	15
9.1. ON TIME AND DUTY CYCLE	15
9.2. 6 dB BANDWIDTH	18
9.2.1. 802.11a MODE IN THE 5.8 GHz BAND	19
9.2.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND	21
9.2.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND	23
9.2.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	25
9.3. OUTPUT POWER AND PSD	26
9.3.1. 802.11a MODE IN THE 5.8 GHz BAND	27
9.3.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND	30
9.3.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND	33

9.3.4.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	36
10.	RADIATED TEST RESULTS	38
10.1.	TRANSMITTER ABOVE 1 GHz	39
10.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND	39
10.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND	43
10.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND	47
10.1.4.	TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND	51
11.	SETUP PHOTOS	55

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0076, Japan

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC

SERIAL NUMBER: QV77007QB8, QV77003RB8, QV770028AQ

SAMPLE RECEIPT DATE: 2022-01-13

DATE TESTED: 2022-02-09 to 2022-02-23

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.


Approved & Released
For UL LLC By:

Reviewed By:

Prepared By:



Mike Antola
Staff Engineer
Consumer Technology Division
UL LLC



Brian Kiewra
Project Engineer
Consumer Technology Division
UL LLC



Noah Bennett
Engineer
Consumer Technology Division
UL LLC

2. TEST RESULT SUMMARY

This report contains data provided by the applicant which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

Note - This report pertains to the 802.11a/n/ac mode in the 5.8 GHz band requirements of the EUT.

FCC Clause	Requirement	Result	Comment
See Comment	Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 12.2.
15.407 (e)	6 dB BW	Pass	None.
15.407 (a) (3), (h) (1)	Output Power		
15.407 (a) (3)	PSD		
15.209, 15.205, 15.407 (b)	Radiated Emissions		
15.207	AC Mains Conducted Emissions		

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with;

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15,
- FCC KDB 662911 D01 v02r01
- FCC KDB 905462 D06 v02
- FCC KDB 789033 D02 v02r01
- KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013,

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification # 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
☒	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A		27265	

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB +10.1 dB+ 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC.
Note - This report pertains to the 802.11a/n/ac mode in the 5.8 GHz band requirements of the EUT.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a summed maximum conducted output power as follows:

5.8 GHz BAND

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.8 GHz band, 2TX			
5745-5825	802.11a	13.20	20.89
5745-5825	802.11n HT20	13.00	19.95
5755-5795	802.11n HT40	12.80	19.05
5775	802.11ac VHT80	12.95	19.72

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:
The radio utilizes two loop antennas for diversity, with the following maximum gains:

Chain	Frequency Range (MHz)	Maximum Gain (dBi)
0	5725-5850	-3.8
1	5725-5850	-9.0

	Theory of Operation	Antenna	Manufacturer Tolerance	Block Diagram
Chain 0	WLAN Main/Bluetooth #1	WLAN Main/Bluetooth #1	Chain 0	WLAN Main/Bluetooth #1
Chain 1	WLAN Sub/Bluetooth #2	WLAN Sub/Bluetooth #2	Chain 1	WLAN Sub/Bluetooth #2

6.4. SOFTWARE AND FIRMWARE

The firmware version used during testing was 0.428.

6.5. WORST-CASE CONFIGURATION AND MODE

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Band edge was performed with the EUT set to transmit on low and high channels. Radiated spurious and harmonic emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the worst-case mode/channel based on power and PSD and can be found in report R14176139-E5fV2.

Worst-case data rates as provided by the client were:

- 802.11a mode: 6 Mbps
- 802.11n HT20mode: MCS0
- 802.11n HT40mode: MCS0
- 802.11ac VHT80 mode: MCS0 (Nss = 1)
- 802.11ac VHT160 mode: MCS0 (Nss = 1)

All testing performed in 2Tx mode (NSS=1), where power per chain is equivalent to the 1Tx power on each chain. This allows 2Tx testing to cover all 1Tx testing.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	14-dk1003dx	5CG016B4XM	TX2-RTL8821CE
NFC Tags	Hicarer	NTAG215	B091Z6NtN8	NA
Headphones	Sony	MDR-EX15AP	NA	NA
AC Adapter	Sony	XQZ-UC11-010-236-21	1821W34209742	NA
AC Adapter	Sony	XQZ-UC11-010-236-21	1821W34209856	NA
USB Cable Type C	Sony	XQZ-UB1	NA	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB-C	Non-Shielded	<3m	Connected to Power Supply
2	3.5mm	1	3.5mm Audio	Non-Shielded	<1m	Connected to headphones

TEST SETUP

The EUT is connected to a host laptop computer and configured via test software before the tests. Test software exercised the radio card.

SETUP DIAGRAMS

Please refer to R14176139-EP2 for setup diagrams

7. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 789033 D02 v02r01, Section B.

6 dB Emission BW: KDB 789033 D02 v02r01, Section C.2

Conducted Output Power: KDB 789033 D02 v02r01, Section E.3.b (Method PM-G)

Power Spectral Density: KDB 789033 D02 v02r01, Section F

Unwanted emissions in restricted bands: KDB 789033 D02 v02r01, Sections G.3, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v02r01, Sections G.3 and G.5.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	Common Equipment				
	Conducted Room 2				
SA0025	Spectrum Analyzer	Keysight Technologies	N9030A	2021-04-01	2022-04-01
PWM003	RF Power Meter	Keysight Technologies	N1911A	2021-08-30	2022-08-30
PWS006	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	N1921a	2021-12-17	2022-12-17
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2021-07-12	2022-07-12
76021	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	NA	NA
SOFTEMI	Antenna Port Software	UL	Version 2021.11.3	NA	NA
SOFTEMI	Antenna Port Software	UL	Version 2021.09.26	NA	NA
	Additional Equipment used				
MM0167 (PRE0126458)	True RMS Multimeter	AGILENT	U1232A	2021-08-17	2023-08-17

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2021-03-11	2022-03-11
	Gain-Loss Chains				
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2021-05-07	2022-05-07
	Receiver & Software				
SA0026	Spectrum Analyzer	Agilent	N9030A	2021-07-16	2022-07-16
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
210642	Environmental Meter	Fisher Scientific	210701942	2021-8-16	2023-08-16

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2021-05-03	2022-05-03
	Gain-Loss Chains				
C2-SAC03	Gain-loss string: 1-18GHz	Various	Various	2021-07-09	2022-07-09
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2021-03-10	2022-03-10
SA0020	Spectrum Analyzer	Agilent	E4446A	2021-05-25	2022-05-25
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 181474409	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 D02 Zero-Span Spectrum Analyzer Method.


ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a CDD	2.096	2.113	0.992	99.20	0.00	0.010
802.11n HT20 CDD	5.429	5.447	0.997	99.67	0.00	0.010
802.11n HT40 CDD	5.4260	5.4440	0.997	99.67	0.00	0.010
802.11ac VHT80 CDD	5.426	5.444	0.997	99.67	0.00	0.010

DUTY CYCLE PLOTS



DUTY CYCLE 802.11a CDD MODE

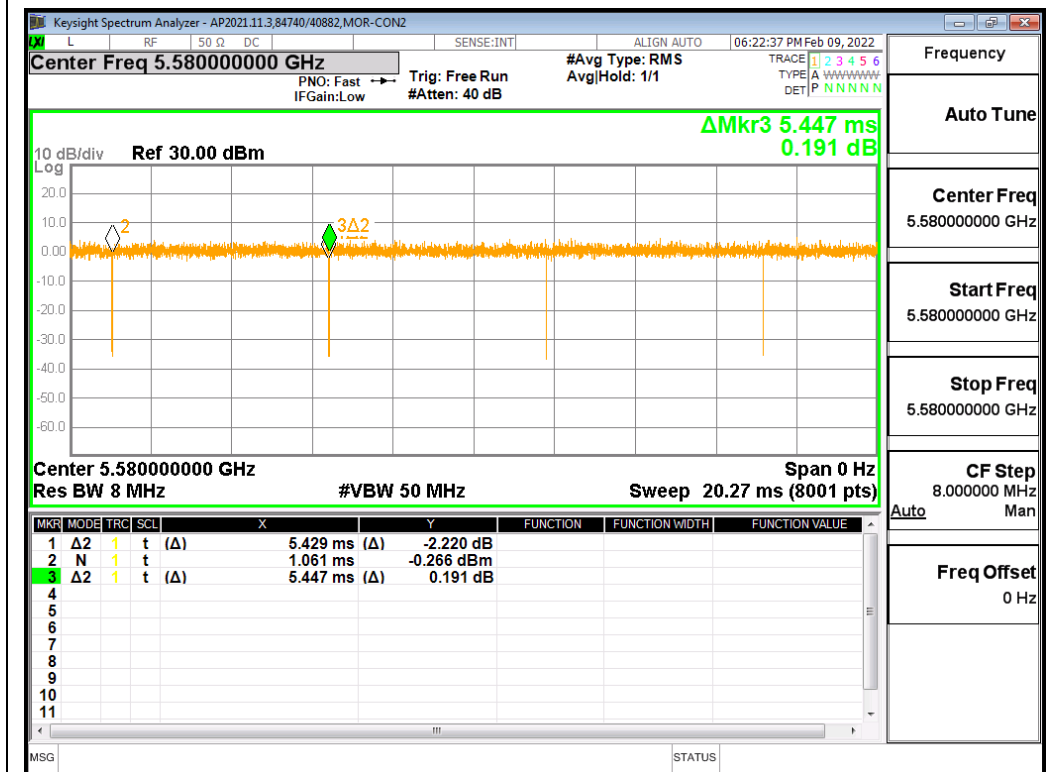

Sight Spectrum Analyzer - AP2021.11.3,84740/A0882,MOR-CONZ

L RF 50 Ω DC SENSE:INT ALIGN AUTO 06:24:36 PM Feb 09, 2022

Center Freq 5.55000000 GHz

PNO: Fast → Trig: Free Run #Avg Type: RMS Avg/Hold: 1/1
IFGain:Low #Atten: 40 dB

TRACE 1 2 3 4 5 6 TYPE A W N N N N N DET P N N N N N

10 dB/div Ref 30.00 dBm

Log

ΔMkr3 5.444 ms
0.385 dB

Center 5.55000000 GHz Span 0 Hz
Res BW 8 MHz #VBW 50 MHz Sweep 20.27 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ)	5.426 ms (Δ)	-6.996 dB		
2	N	1	t	(Δ)	2.455 ms	-6.996 dB		
3	Δ2	1	t	(Δ)	5.444 ms (Δ)	0.385 dB		
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
5.55000000 GHz

Start Freq
5.55000000 GHz

Stop Freq
5.55000000 GHz

CF Step
8.000000 MHz

Man

Freq Offset
0 Hz

Keysight Spectrum Analyzer - AP2021.11.3,84740/40882,MOR-CON2

Center Freq 5.61000000 GHz

Trig: Free Run #Atten: 40 dB

#Avg Type: RMS Avg/Hold: 1/1

07:35:19 PM Feb 09, 2022

Ref 30.00 dBm

10 dB/div

Log

ΔMkr3 5.444 ms -0.603 dB

Center 5.610000000 GHz

Res BW 8 MHz

#VBW 50 MHz

Sweep 20.27 ms (8001 pts)

Span 0 Hz

Mkr	Mode	TRC	SCL		X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ)	5.426 ms	2.475 dB			
2	N	1	t		886.7 μs	-7.643 dBm			
3	Δ2	1	t	(Δ)	5.444 ms	-0.603 dB			
4									
5									
6									
7									
8									
9									
10									
11									

MSG STATUS

Frequency

Auto Tune

Center Freq 5.610000000 GHz

Start Freq 5.610000000 GHz

Stop Freq 5.610000000 GHz

CF Step 8.000000 MHz

Auto Man

Freq Offset 0 Hz

This report shall not be reproduced except in full, without the written approval of UL LLC

9.2. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

9.2.1. 802.11a MODE IN THE 5.8 GHz BAND


2TX Chain 0 + Chain 1 CDD MODE

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low	5745	16.3360	16.3280	0.5
Mid	5785	15.3960	16.3360	0.5
High	5825	16.3040	16.3880	0.5
144	5720	3.2080	3.1400	0.5



LOW CHANNEL

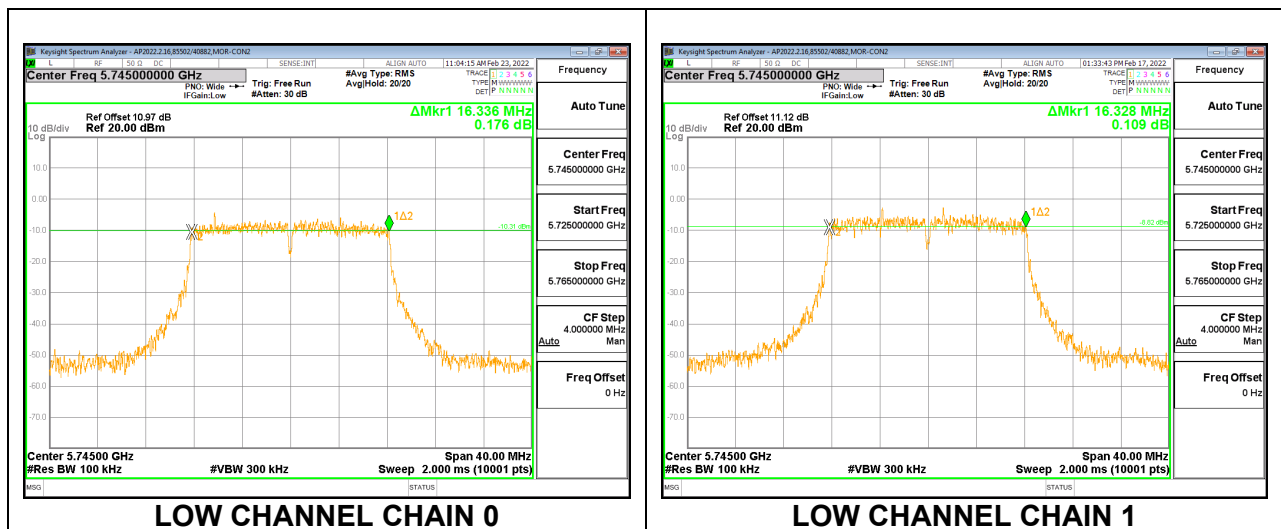



MID CHANNEL

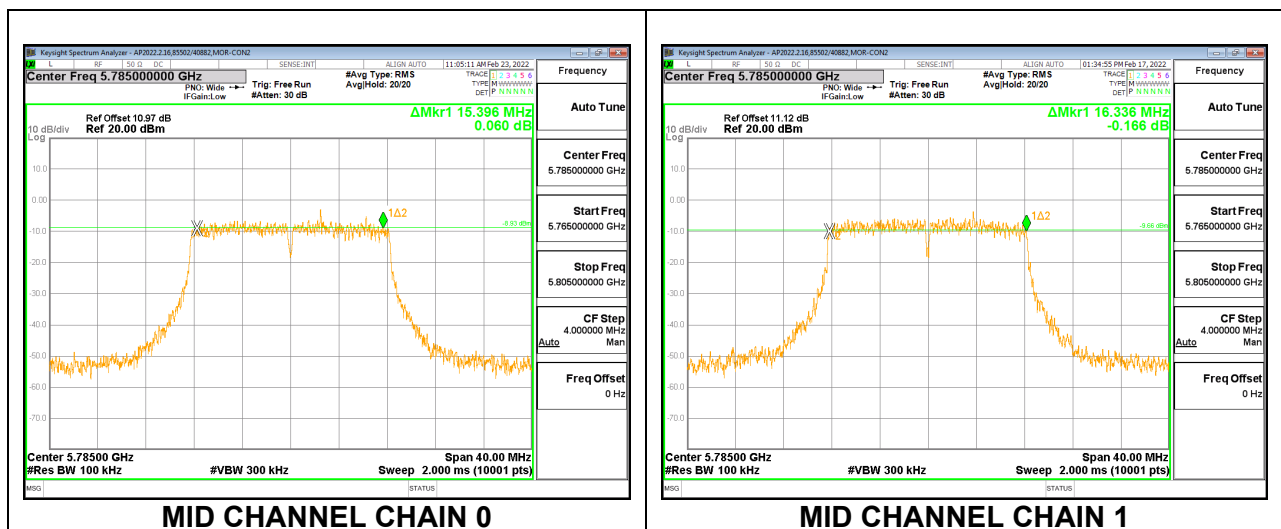

HIGH CHANNEL

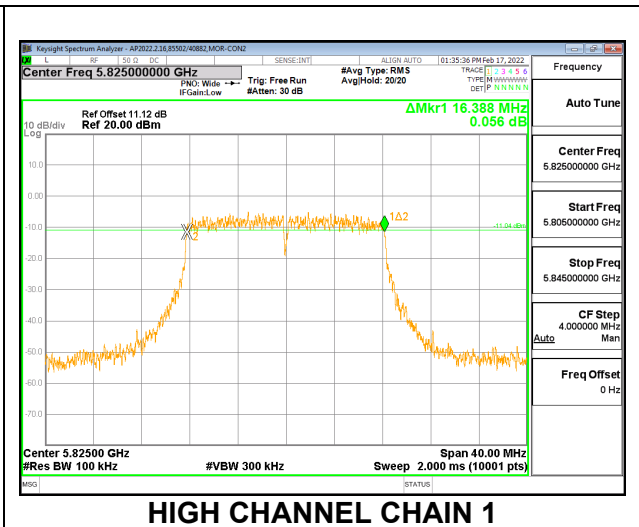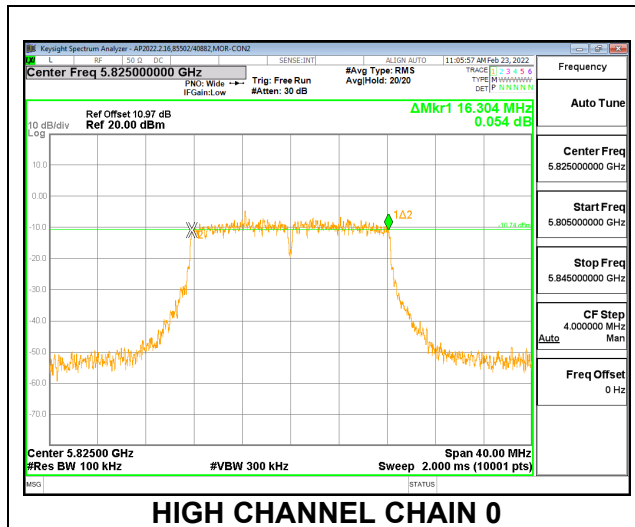

STRADDLE CHANNEL

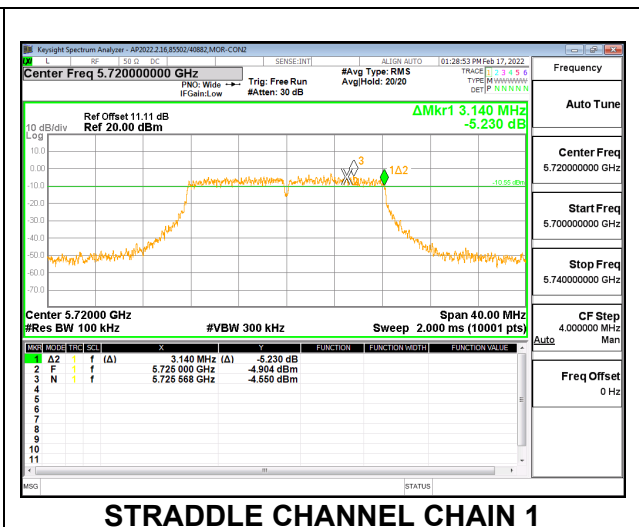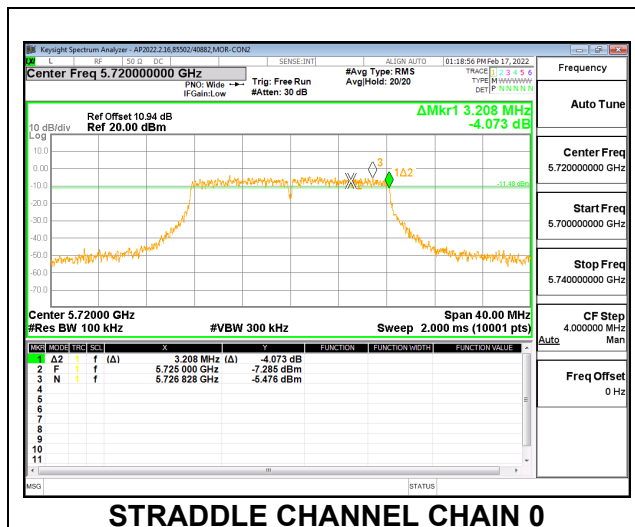


9.2.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND


2TX Chain 0 + Chain 1 CDD MODE

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low	5745	17.5840	16.4960	0.5
Mid	5785	17.4080	17.5800	0.5
High	5825	17.6200	17.6000	0.5
144	5720	3.8560	3.7800	0.5


LOW CHANNEL

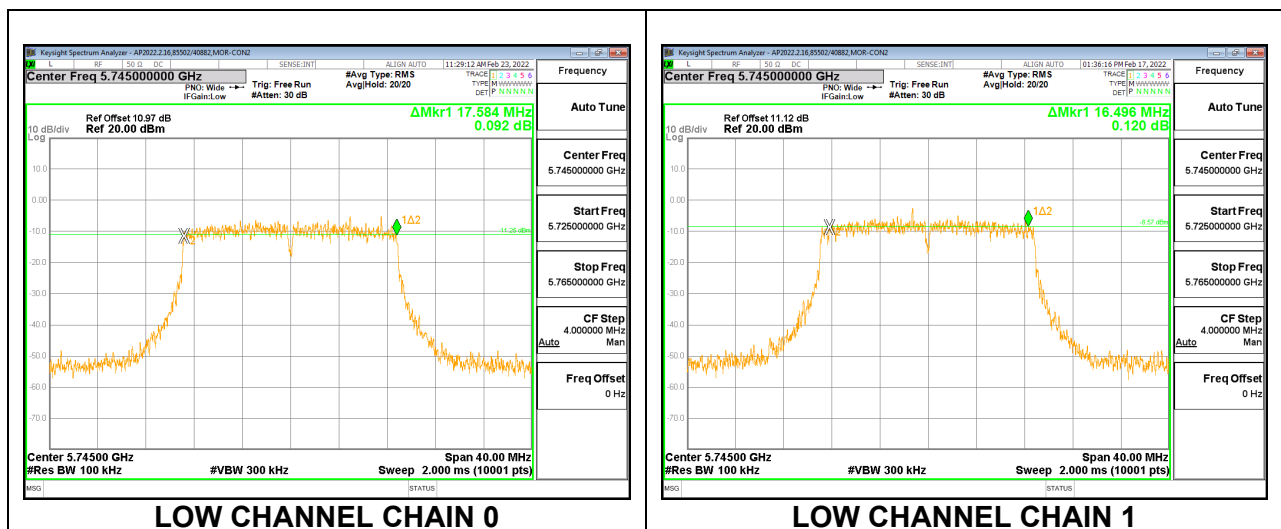


MID CHANNEL

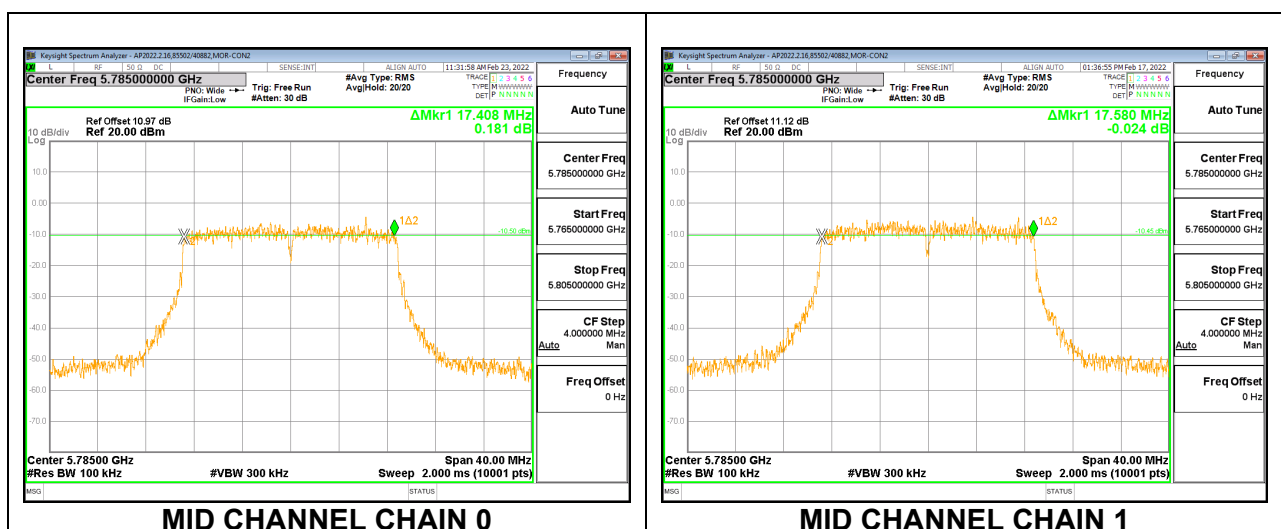

HIGH CHANNEL

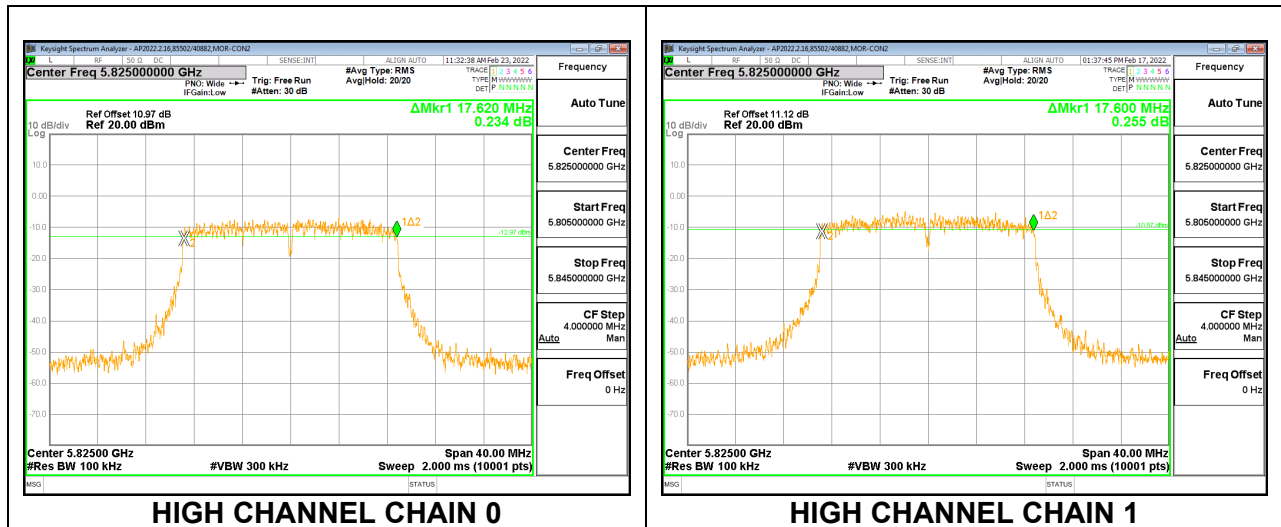

STRADLE CHANNEL


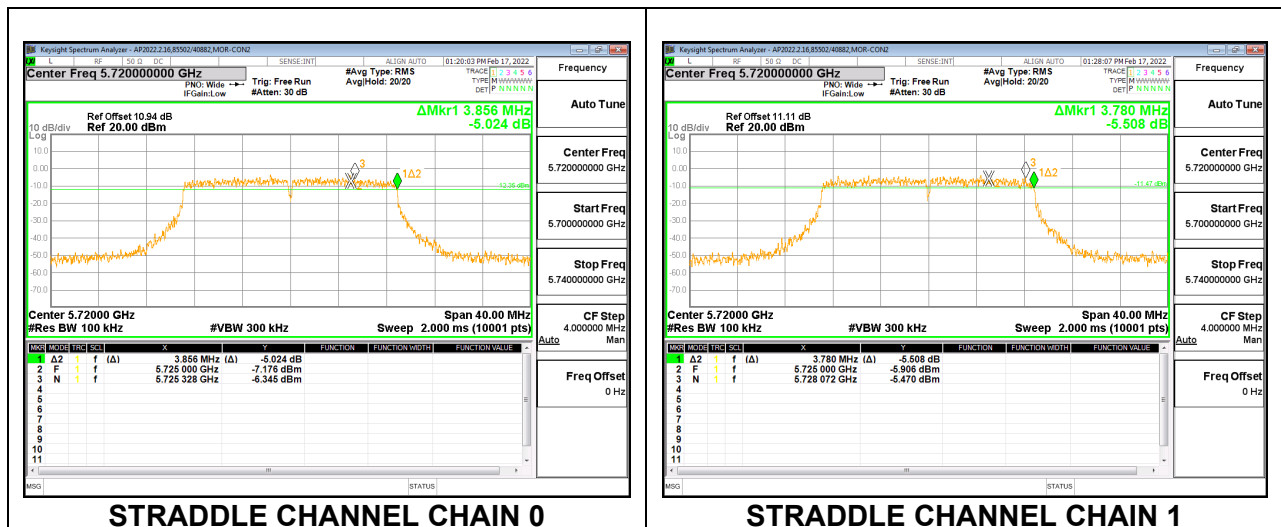


9.2.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND



2TX Chain 0 + Chain 1 CDD MODE

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Low	5755	36.3360	36.3520	0.5
High	5795	36.1680	36.3200	0.5
142	5710	3.1840	3.1680	0.5


LOW CHANNEL

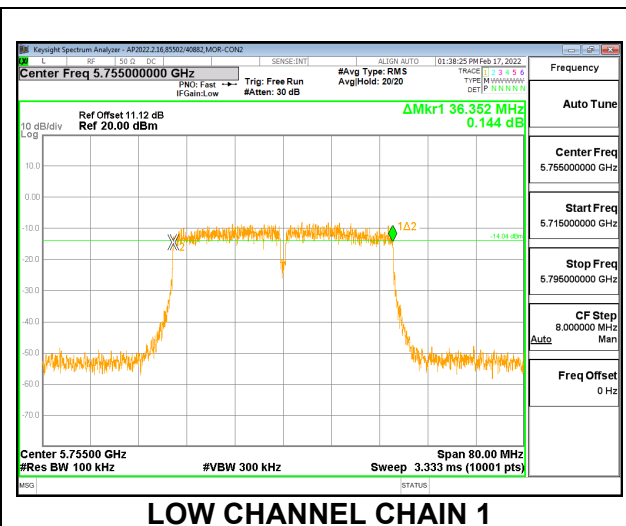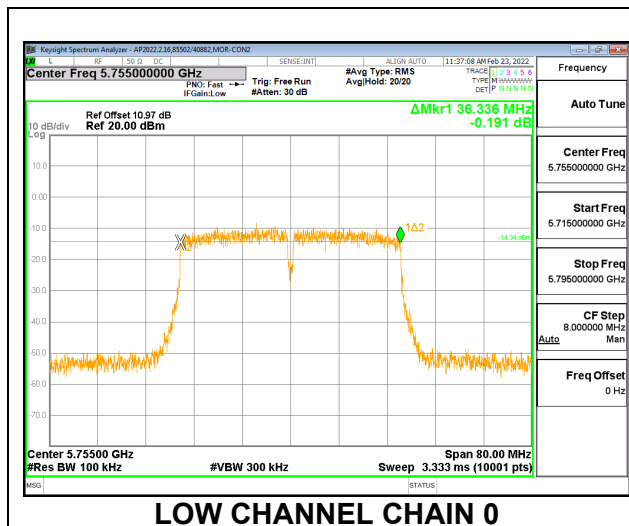

HIGH CHANNEL

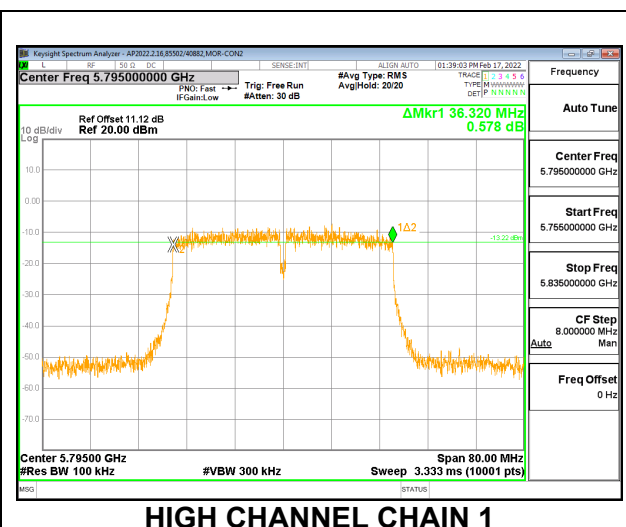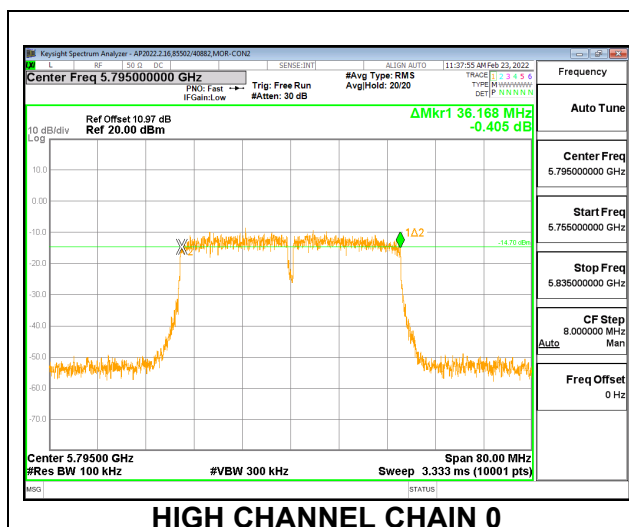

STRADDLE CHANNEL

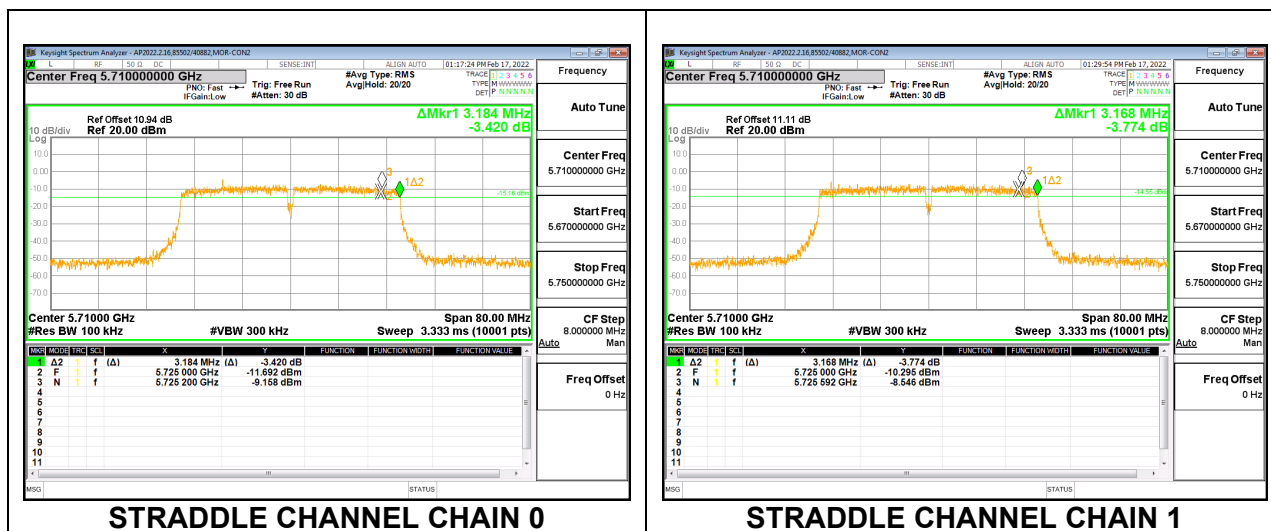


9.2.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


2TX Chain 0 + Chain 1 CDD MODE

Channel	Frequency (MHz)	6 dB BW Antenna 1 (MHz)	6 dB BW Antenna 2 (MHz)	Minimum Limit (MHz)
Mid	5775	76.0800	76.3840	0.5
138	5690	4.0240	3.2080	0.5

MID CHANNEL

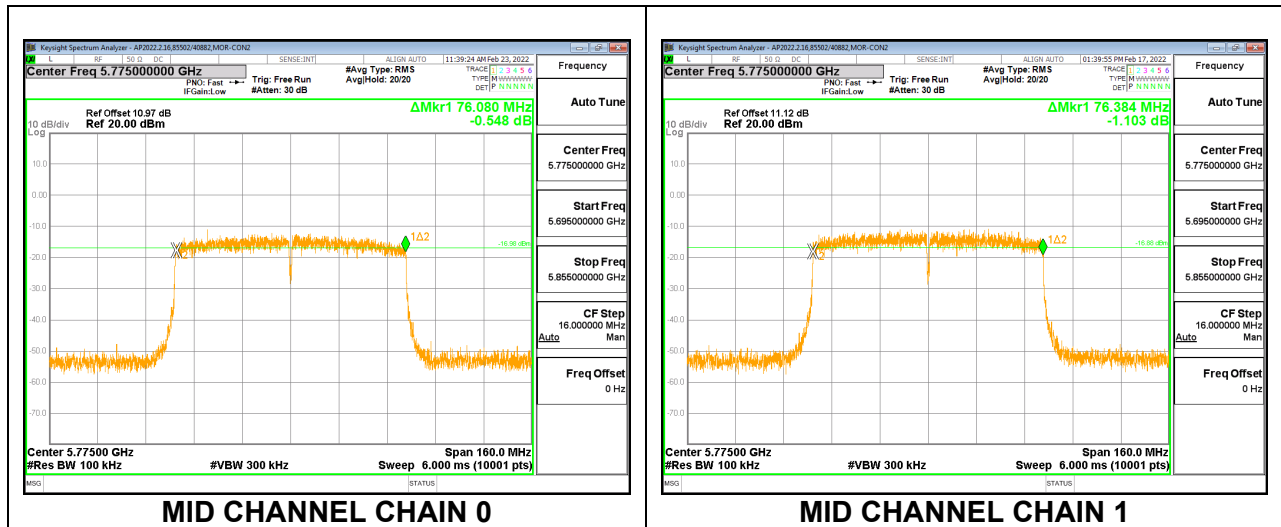

STRADDLE CHANNEL

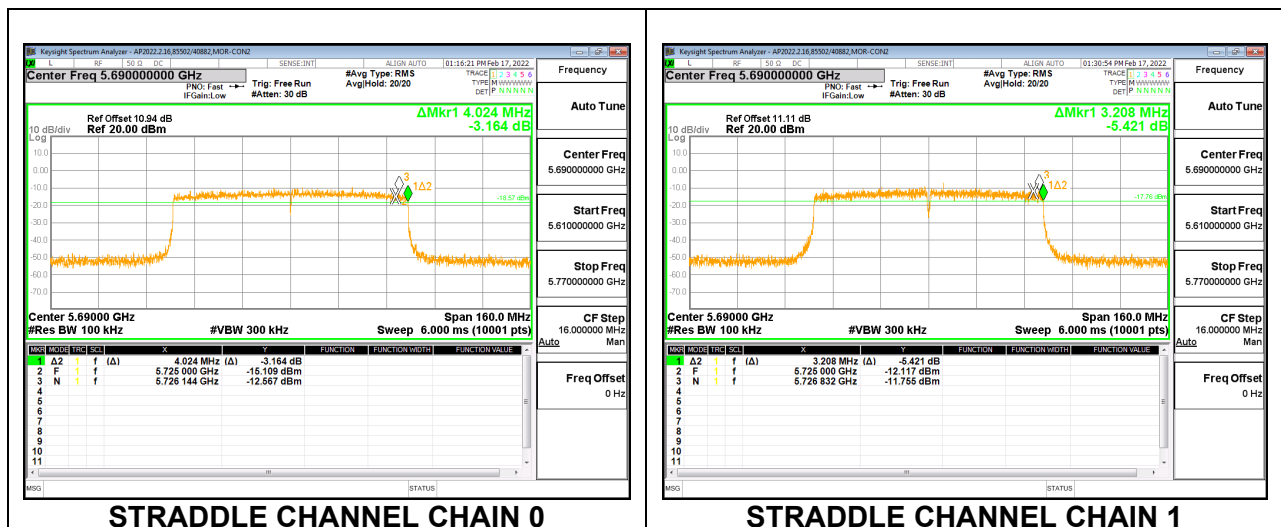

9.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407

Band 5.725-5.85 GHz

The maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

TEST PROCEDURE

The measurement method used for output power is KDB 789033 D02 v02r01, Section E.3.b (Method PM-G).

The measurement method used for power spectral density is KDB 789033 D02 v02r01, Section F

DIRECTIONAL ANTENNA GAIN

For 2 TX:

Tx chains are uncorrelated for power and correlated for PSD due to the device supporting CDD in all MIMO modes. The directional gains are as follows:

Band (GHz)	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)	Correlated Chains Directional Gain (dBi)
5.8	-3.80	-9.00	-5.66	-3.01

RESULTS

9.3.1. 802.11a MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

Test Engineer:	85502/40882
Test Date:	2022-02-15

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	-5.66	-3.01	30.00	30.00
Mid	5785	-5.66	-3.01	30.00	30.00
High	5825	-5.66	-3.01	30.00	30.00
144	5720	-5.66	-3.01	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	10.50	9.85	13.20	30.00	-16.80
Mid	5785	10.57	9.45	13.06	30.00	-16.94
High	5825	10.43	9.72	13.10	30.00	-16.90
144	5720	10.36	10.16	13.27	30.00	-16.73



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500KHz)	Chain 1 Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	-4.16	-4.72	-1.42	30.00	-31.42
Mid	5785	-4.01	-4.86	-1.41	30.00	-31.41
High	5825	-4.07	-4.48	-1.26	30.00	-31.26
144	5720	-5.15	-5.08	-2.10	30.00	-32.10


LOW CHANNEL

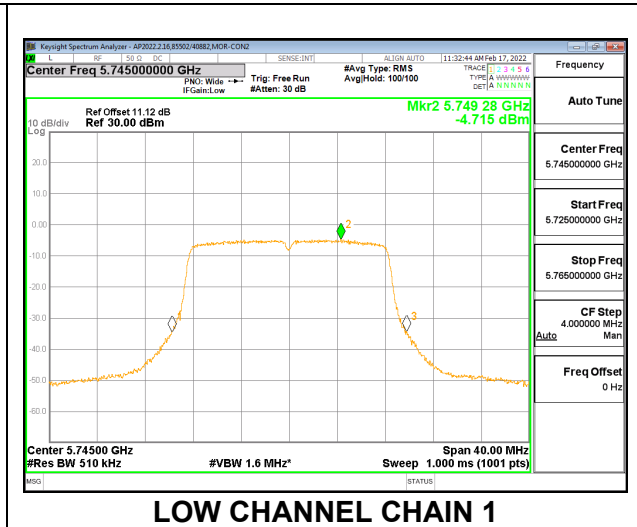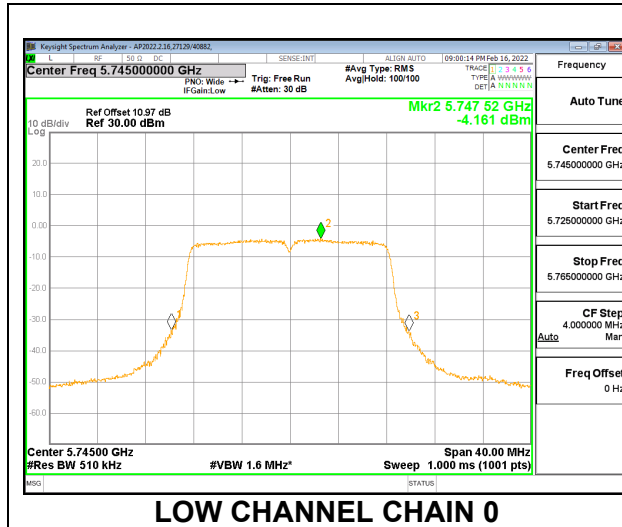


MID CHANNEL

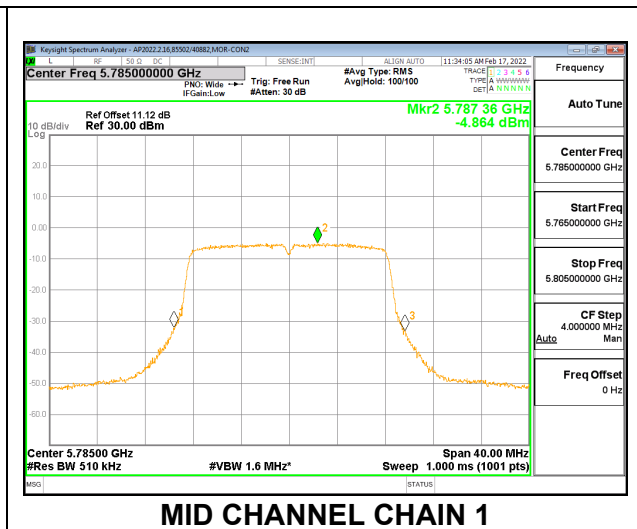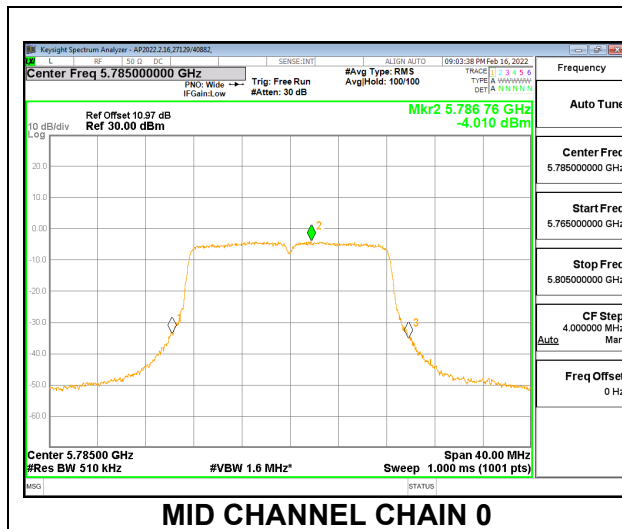

HIGH CHANNEL

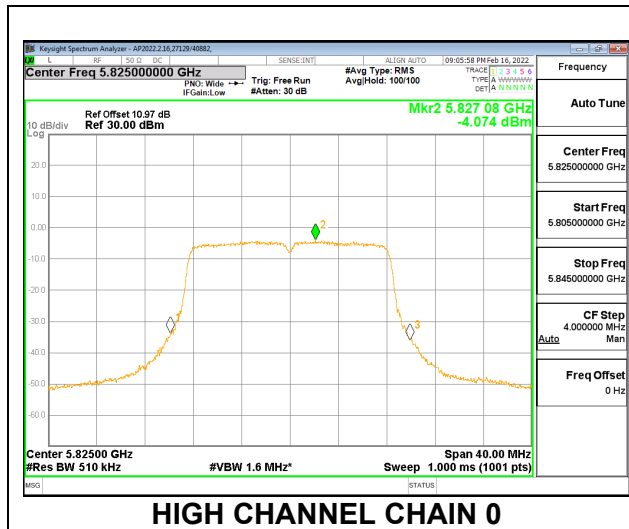


HIGH CHANNEL CHAIN 0

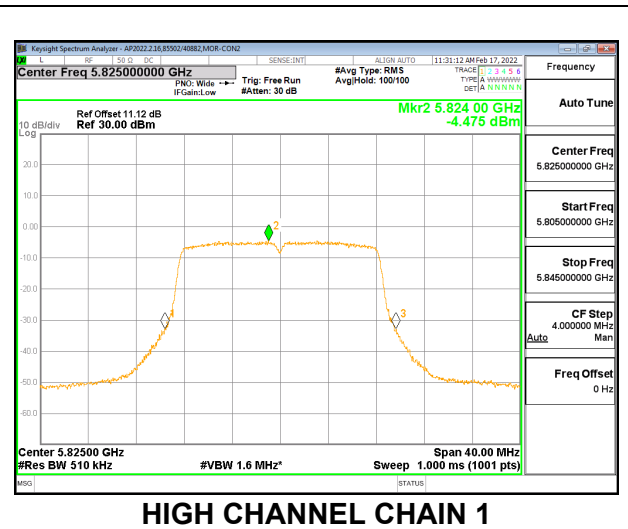


HIGH CHANNEL CHAIN 1

CHANNEL 144

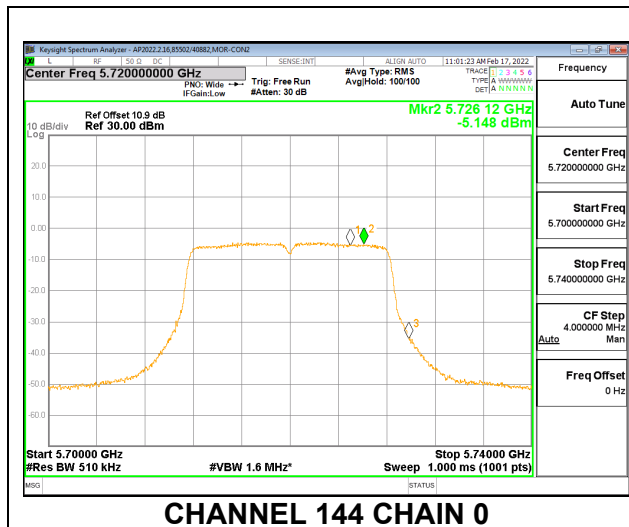

CHANNEL 144 CHAIN 0

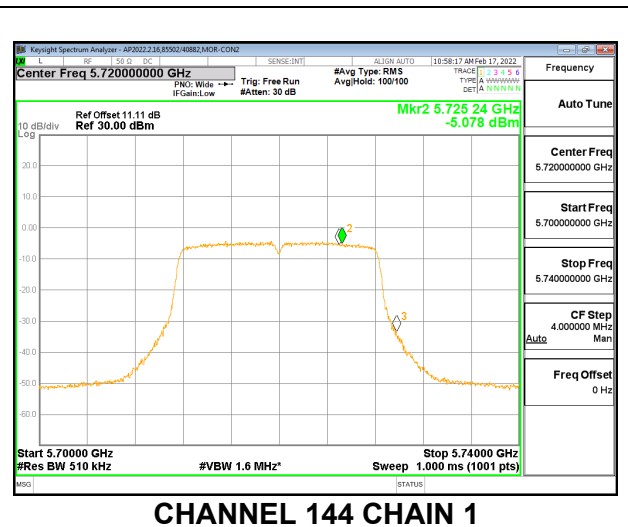

CHANNEL 144 CHAIN 1

9.3.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

Test Engineer:	85502/40882
Test Date:	2022-02-15

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5745	-5.66	-3.01	30.00	30.00
Mid	5785	-5.66	-3.01	30.00	30.00
High	5825	-5.66	-3.01	30.00	30.00
144	5720	-5.66	-3.01	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	9.93	9.03	12.51	30.00	-17.49
Mid	5785	10.45	9.33	12.94	30.00	-17.06
High	5825	10.31	9.65	13.00	30.00	-17.00
144	5720	10.31	9.98	13.16	30.00	-16.84



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500KHz)	Chain 1 Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5745	-5.14	-5.66	-2.38	30.00	-32.38
Mid	5785	-4.30	-5.22	-1.72	30.00	-31.72
High	5825	-4.68	-4.87	-1.77	30.00	-31.77
144	5720	-5.44	-5.30	-2.36	30.00	-32.36



LOW CHANNEL

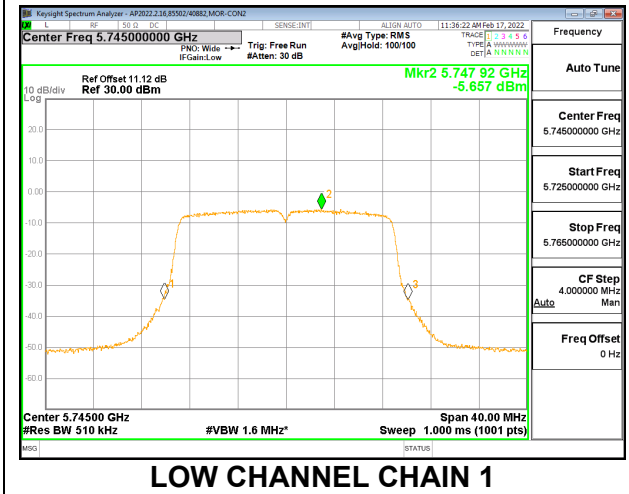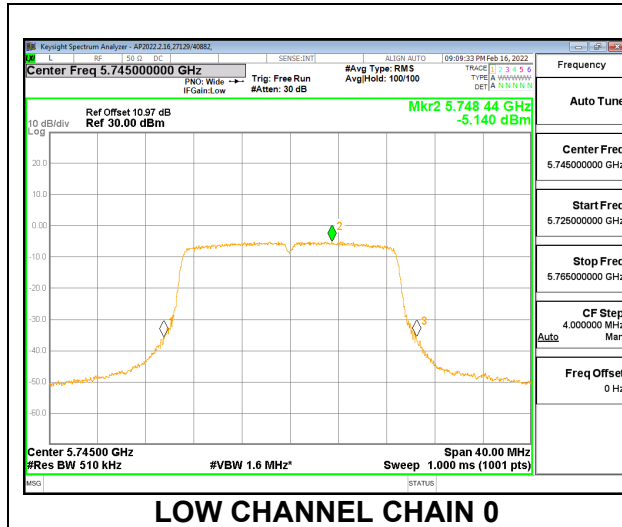



MID CHANNEL

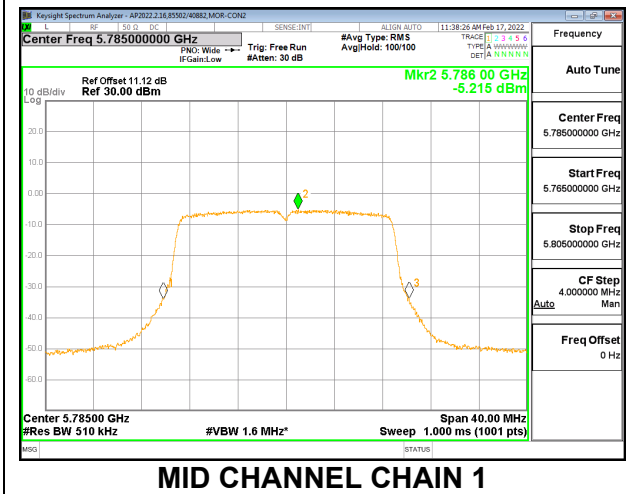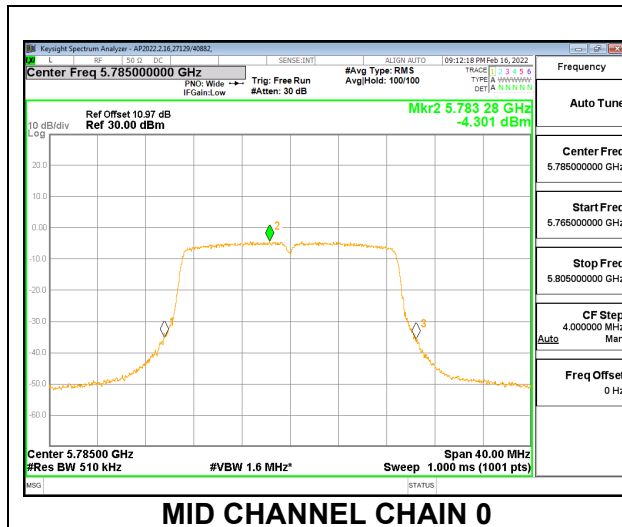

HIGH CHANNEL

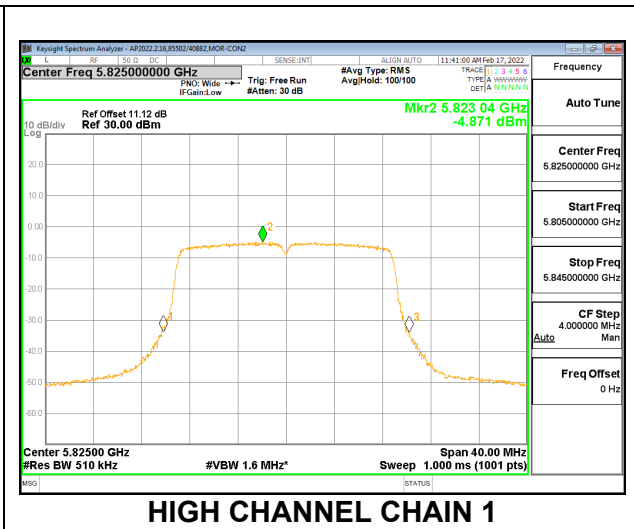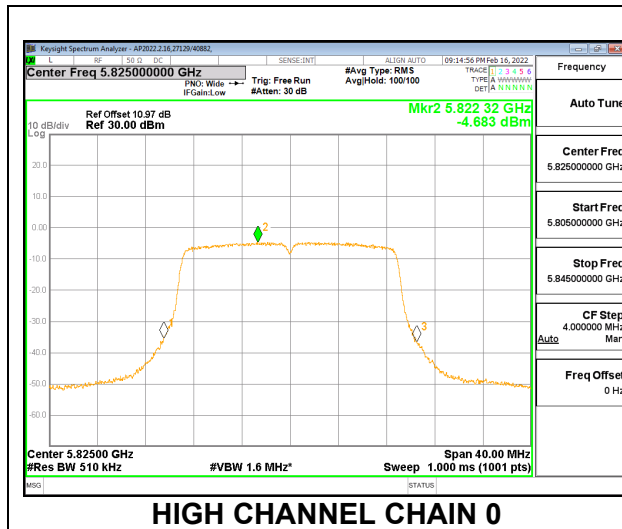

CHANNEL 144

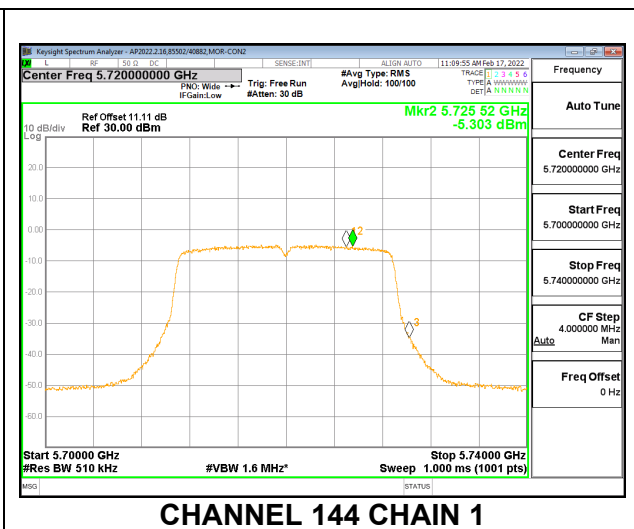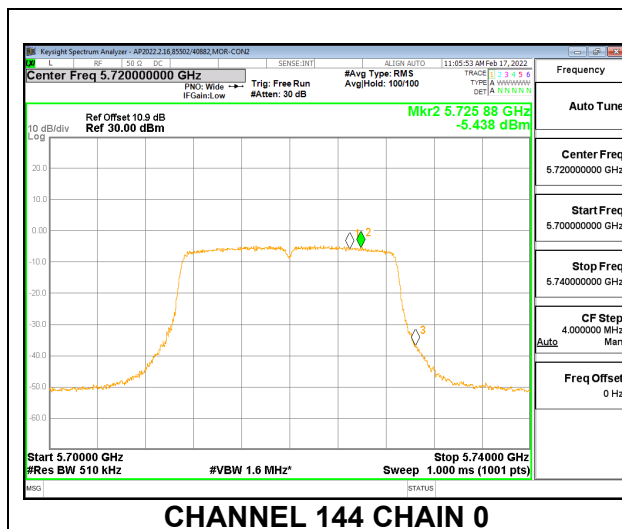

9.3.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

Test Engineer:	85502/40882
Test Date:	2022-02-15

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Low	5755	-5.66	-3.01	30.00	30.00
High	5795	-5.66	-3.01	30.00	30.00
142	5710	-5.66	-3.01	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	10.12	8.97	12.59	30.00	-17.41
High	5795	10.28	9.24	12.80	30.00	-17.20
142	5710	10.47	10.15	13.32	30.00	-16.68



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500KHz)	Chain 1 Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Low	5755	-8.18	-8.74	-5.44	30.00	-35.44
High	5795	-7.76	-8.40	-5.05	30.00	-35.05
142	5710	-9.24	-9.33	-6.28	30.00	-36.28


LOW CHANNEL

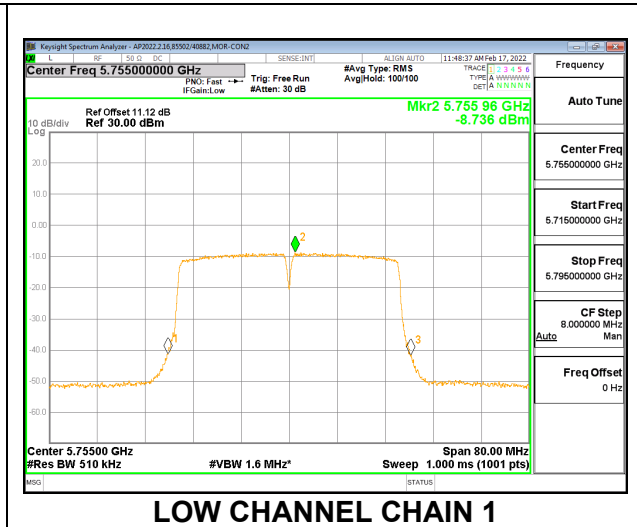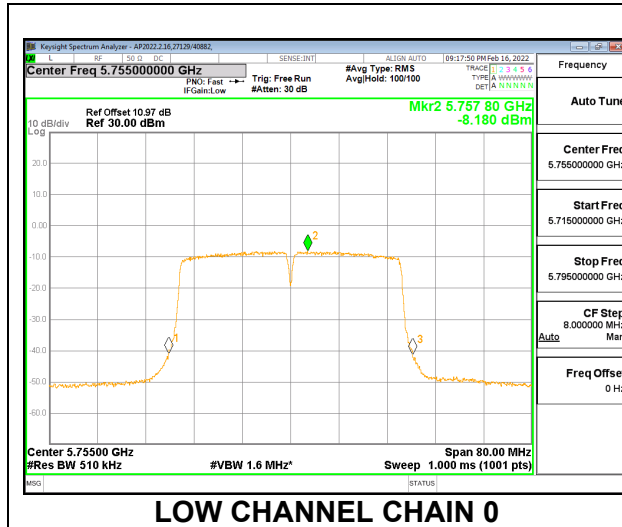

HIGH CHANNEL

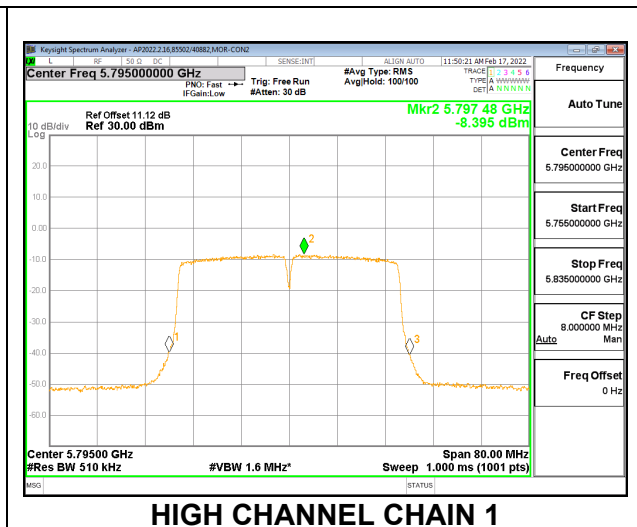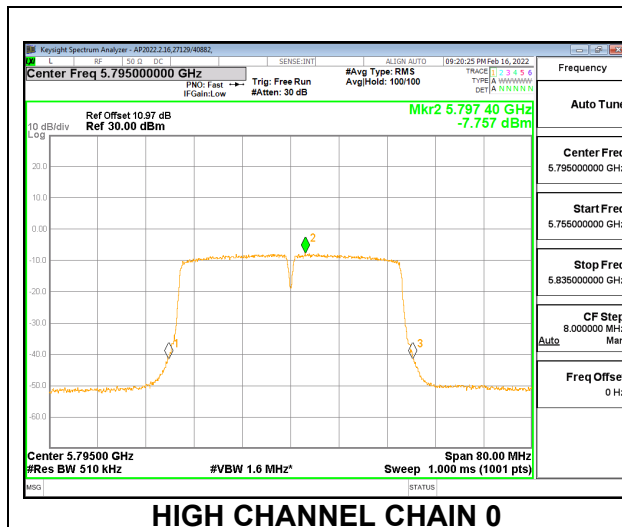

CHANNEL 142

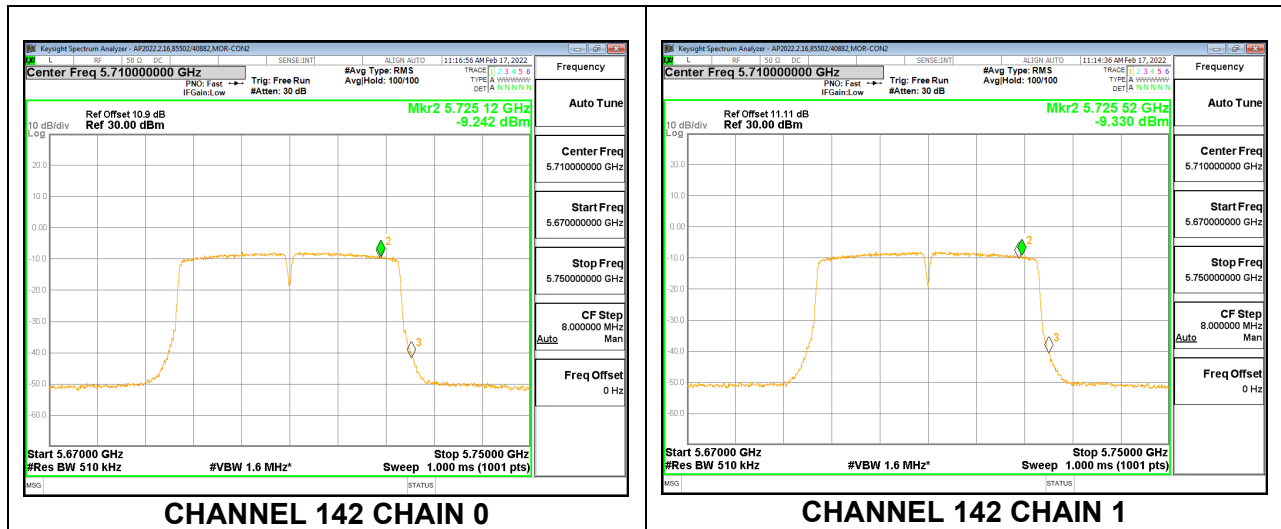

9.3.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

Test Engineer:	85502/40882
Test Date:	2022-02-15

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 500KHz)
Mid	5755	-5.66	-3.01	30.00	30.00
138	5690	-5.66	-3.01	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5755	10.49	9.30	12.95	30.00	-17.05
138	5690	10.42	10.00	13.23	30.00	-16.77



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500KHz)	Chain 1 Meas PSD (dBm/ 500KHz)	Total Corr'd PSD (dBm/ 500KHz)	PSD Limit (dBm/ 500KHz)	PSD Margin (dB)
Mid	5755	-10.67	-11.46	-8.03	30.00	-38.03
138	5690	-12.86	-13.09	-9.96	30.00	-39.96

MID CHANNEL

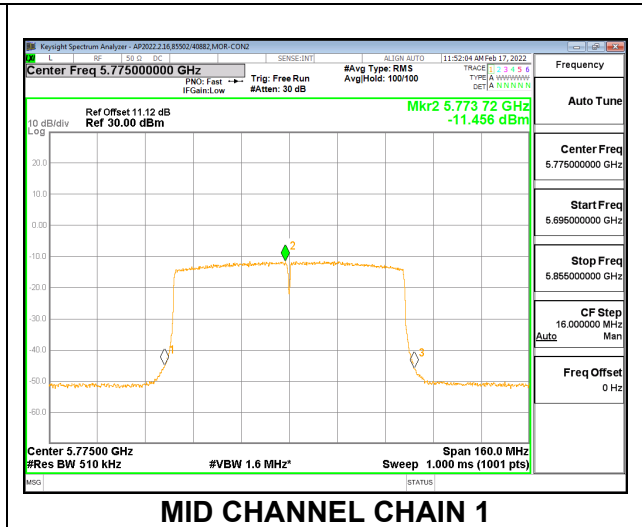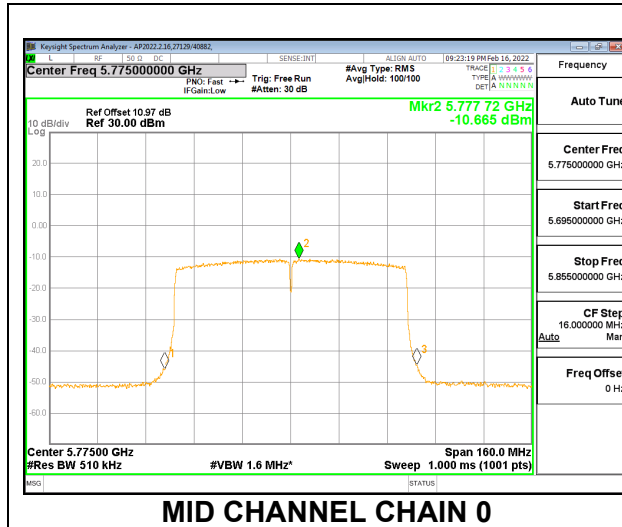

CHANNEL 138

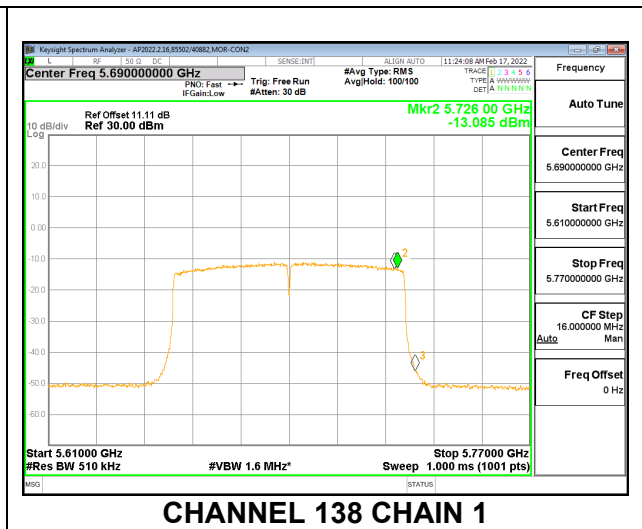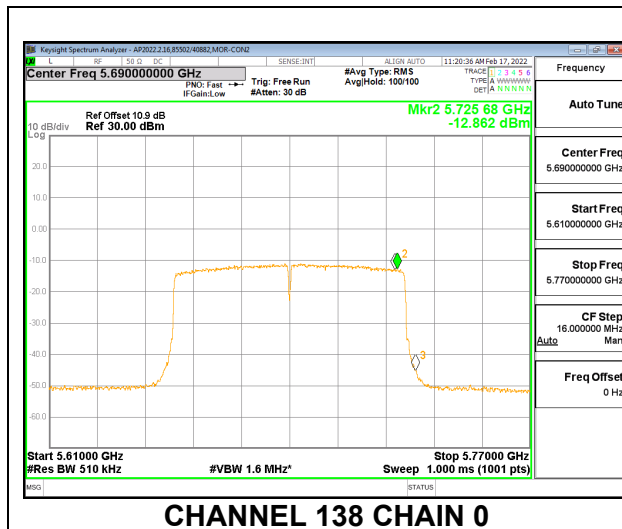

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands

FCC §15.407(b)(4) -Un-Restricted bands

After January 01, 2019 for Outside of the Restricted Bands Emissions

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The Spectrum was investigated at the bandedges while the EUT was set at the lowest and highest channels per band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

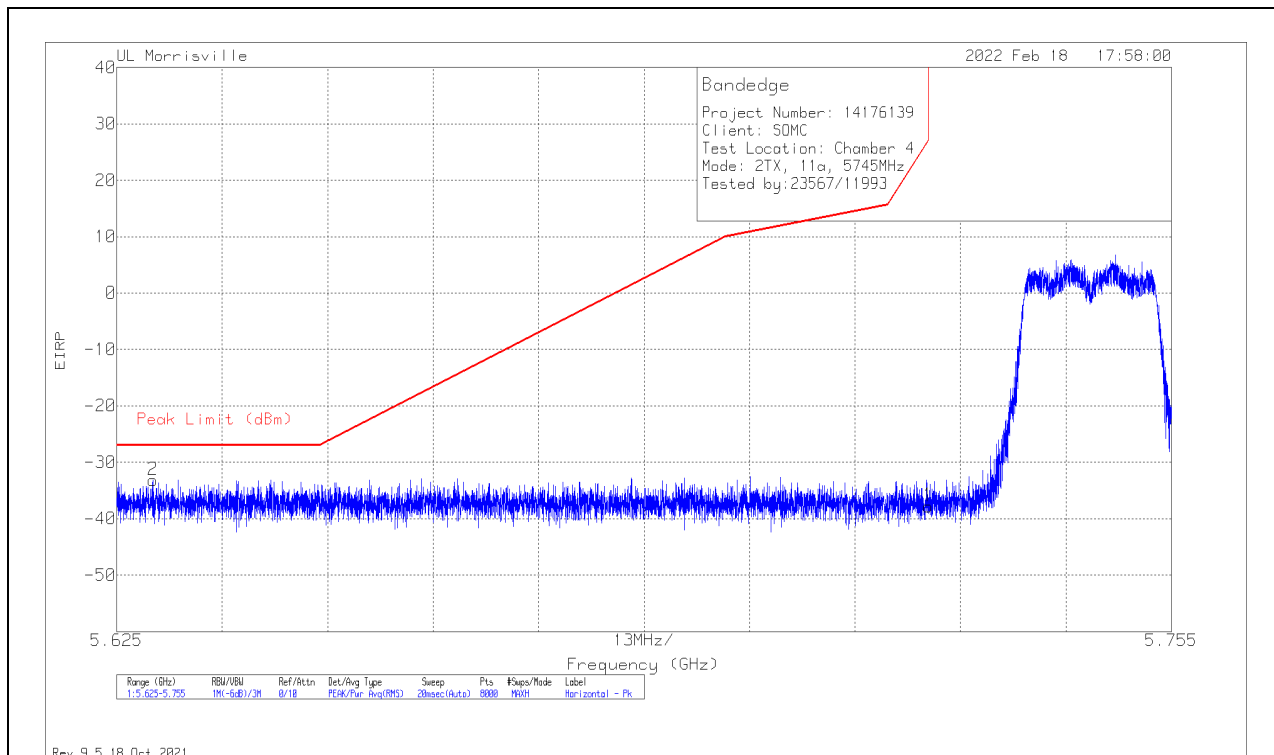

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62945	-69.84	Pk	34.4	-9.5	11.8	-33.14	-27	-6.14	69	143	H
1	5.725	-74.67	Pk	34.5	-9.4	11.8	-37.77	27	-64.77	69	143	H

Pk - Peak detector

VERTICAL RESULT

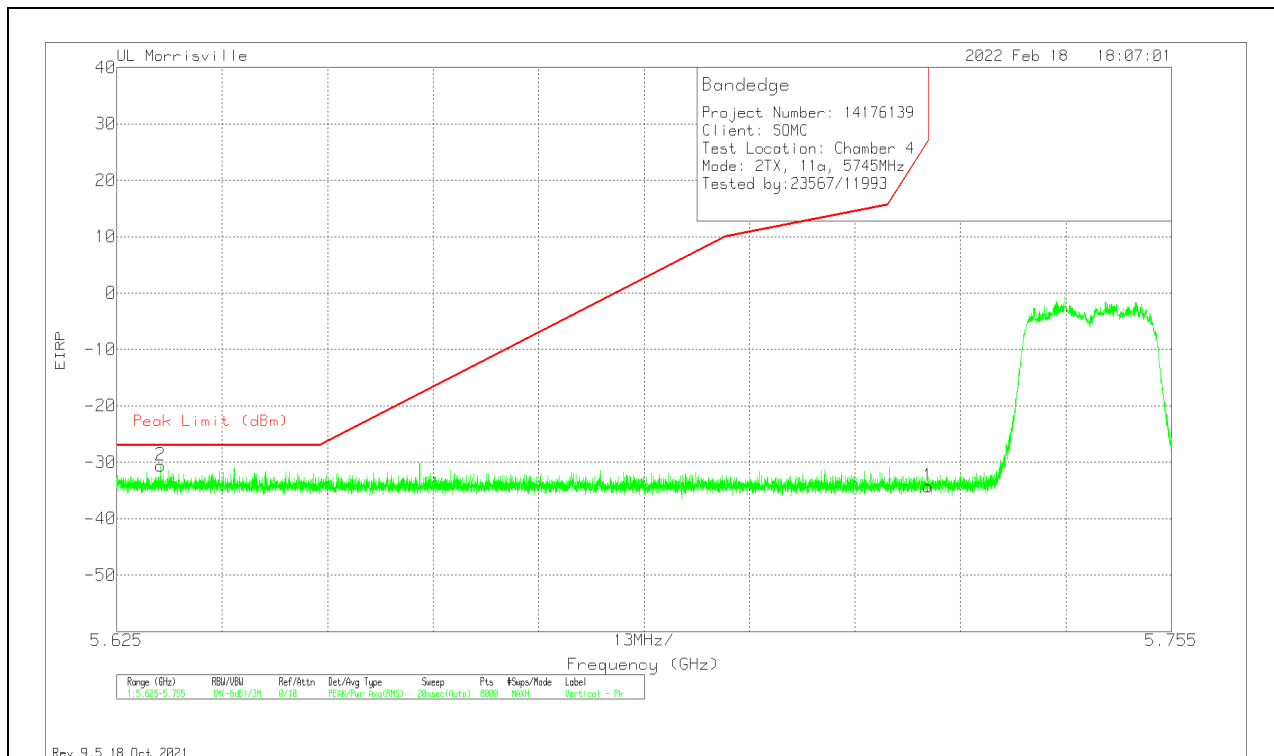


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63036	-67.25	Pk	34.4	-9.5	11.8	-30.55	-27	-3.55	32	358	V
1	5.725	-71.12	Pk	34.5	-9.4	11.8	-34.22	27	-61.22	32	358	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

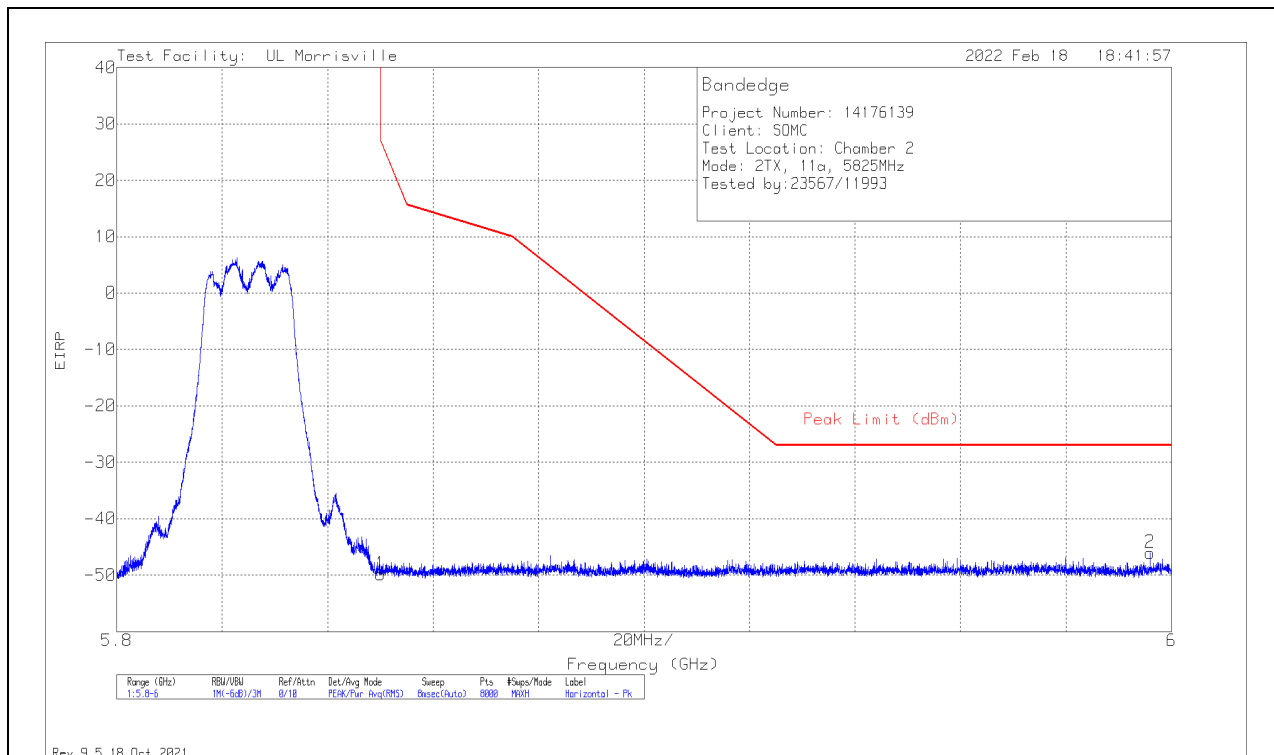

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-74.09	Pk	35.2	-22.8	11.8	-49.89	26.99	-76.88	78	119	H
2	5.99597	-70.43	Pk	35.3	-22.7	11.8	-46.03	-27	-19.03	78	119	H

Pk - Peak detector

VERTICAL RESULT

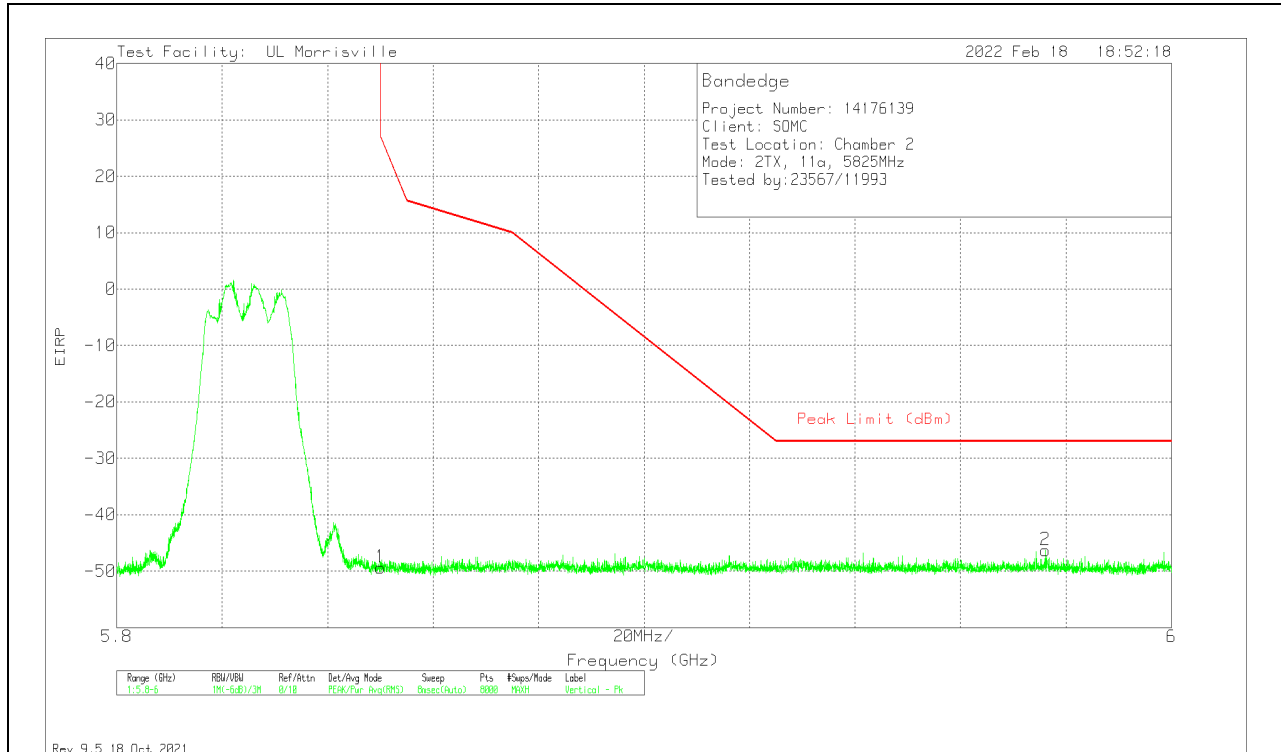

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-73.61	Pk	35.2	-22.8	11.8	-49.41	26.99	-76.4	208	310	V
2	5.97607	-70.97	Pk	35.3	-22.4	11.8	-46.27	-27	-19.27	208	310	V


Pk - Peak detector

10.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

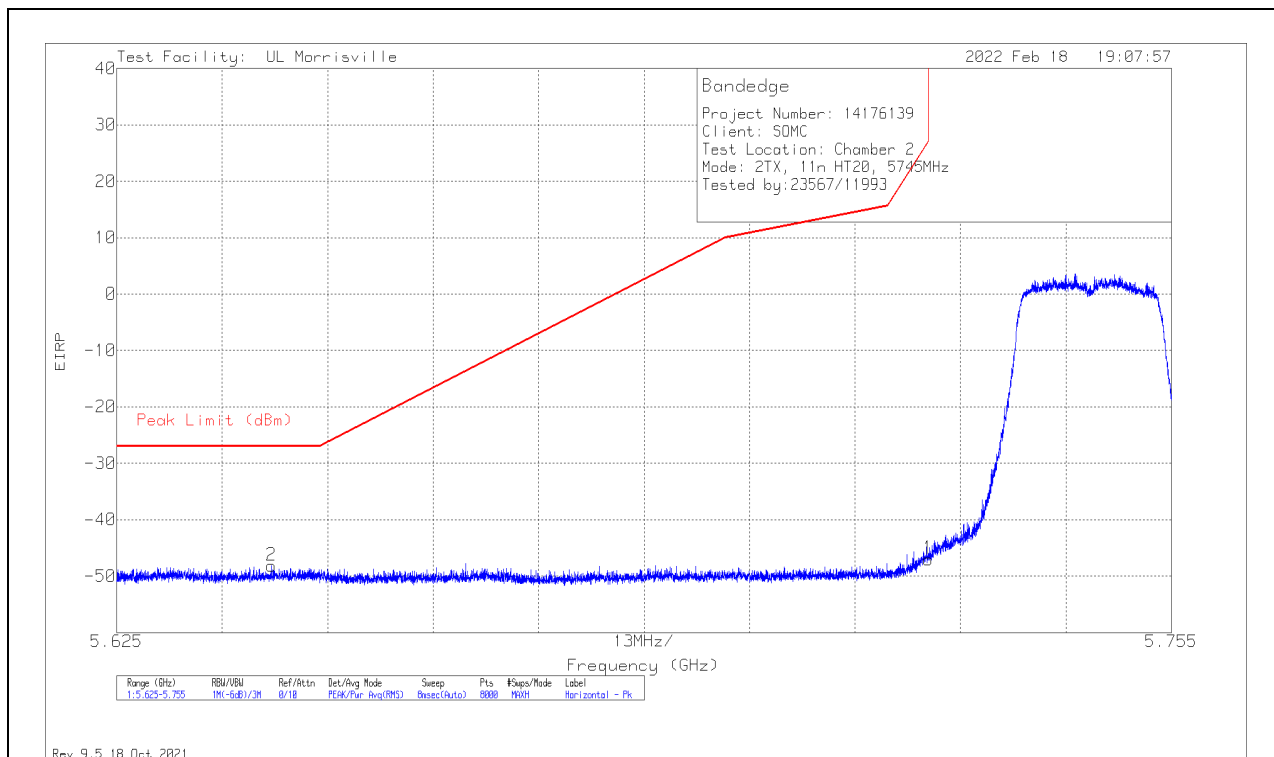

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64406	-71.85	Pk	34.7	-22.8	11.8	-48.15	-27	-21.15	94	149	H
1	5.725	-70.98	Pk	34.8	-22.6	11.8	-46.98	27	-73.98	94	149	H

Pk - Peak detector

VERTICAL RESULT

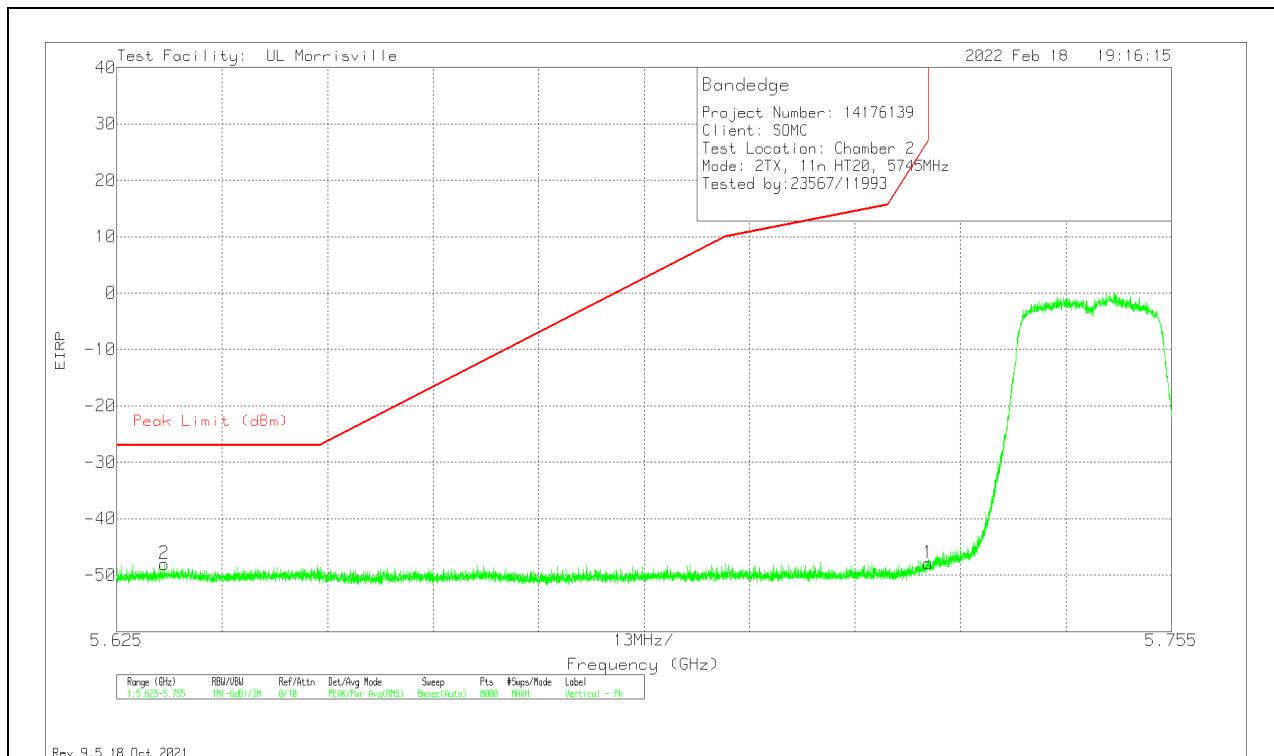


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63087	-71.68	Pk	34.7	-22.8	11.8	-47.98	-27	-20.98	21	201	V
1	5.725	-71.87	Pk	34.8	-22.6	11.8	-47.87	27	-74.87	21	201	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

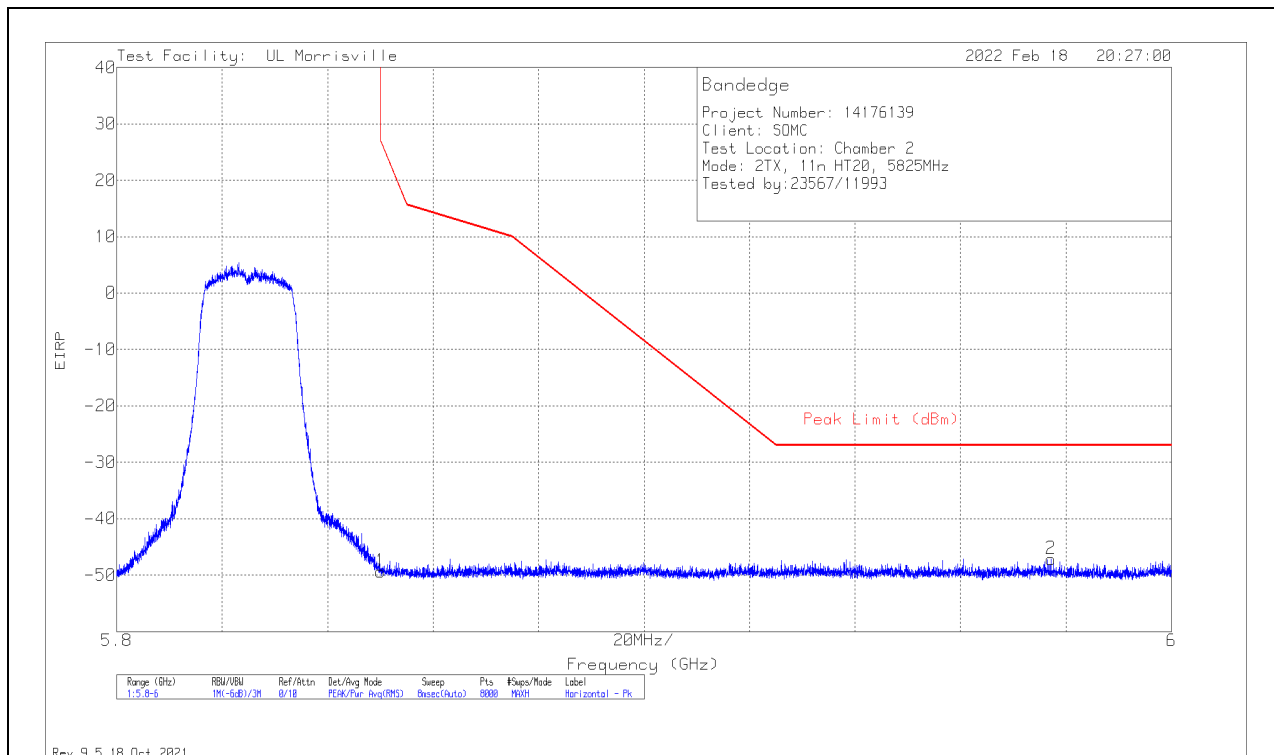

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-73.54	Pk	35.2	-22.8	11.8	-49.34	26.99	-76.33	64	186	H
2	5.9772	-71.87	Pk	35.3	-22.4	11.8	-47.17	-27	-20.17	64	186	H

Pk - Peak detector

VERTICAL RESULT

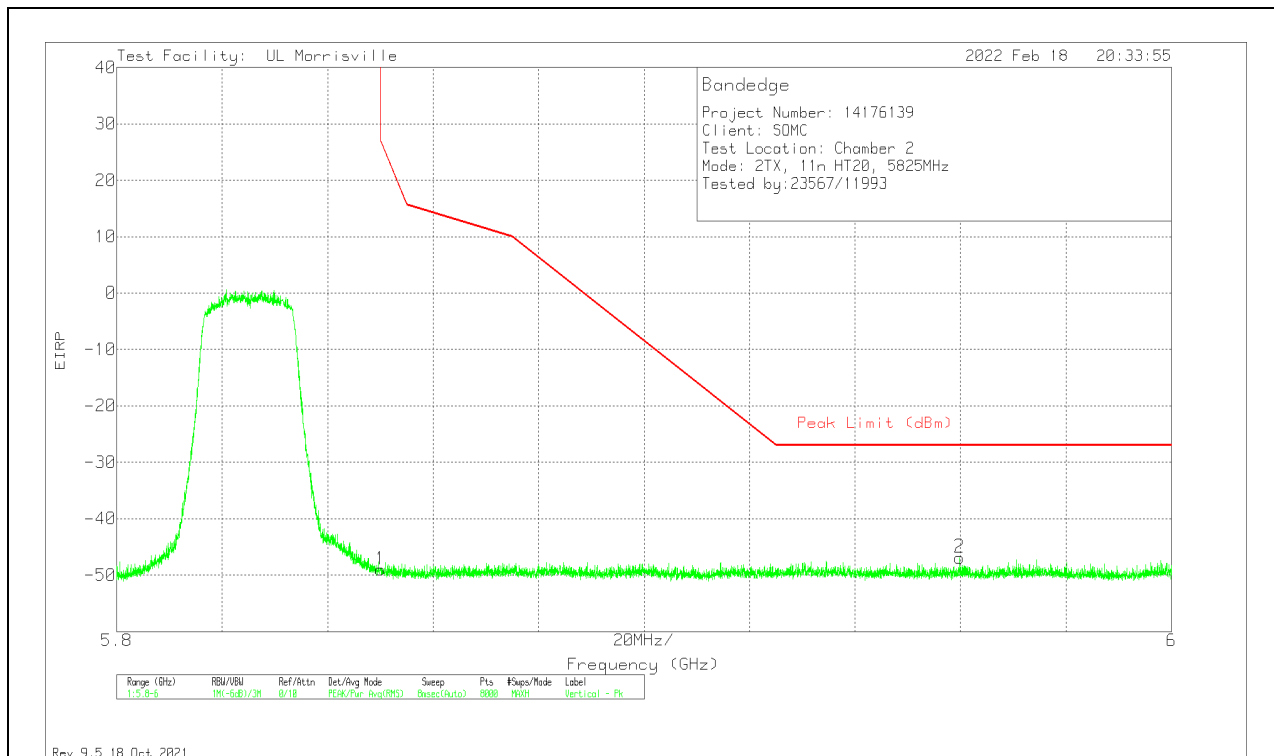

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-73.22	Pk	35.2	-22.8	11.8	-49.02	26.99	-76.01	213	294	V
2	5.95987	-71.36	Pk	35.2	-22.5	11.8	-46.86	-27	-19.86	213	294	V


Pk - Peak detector

10.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

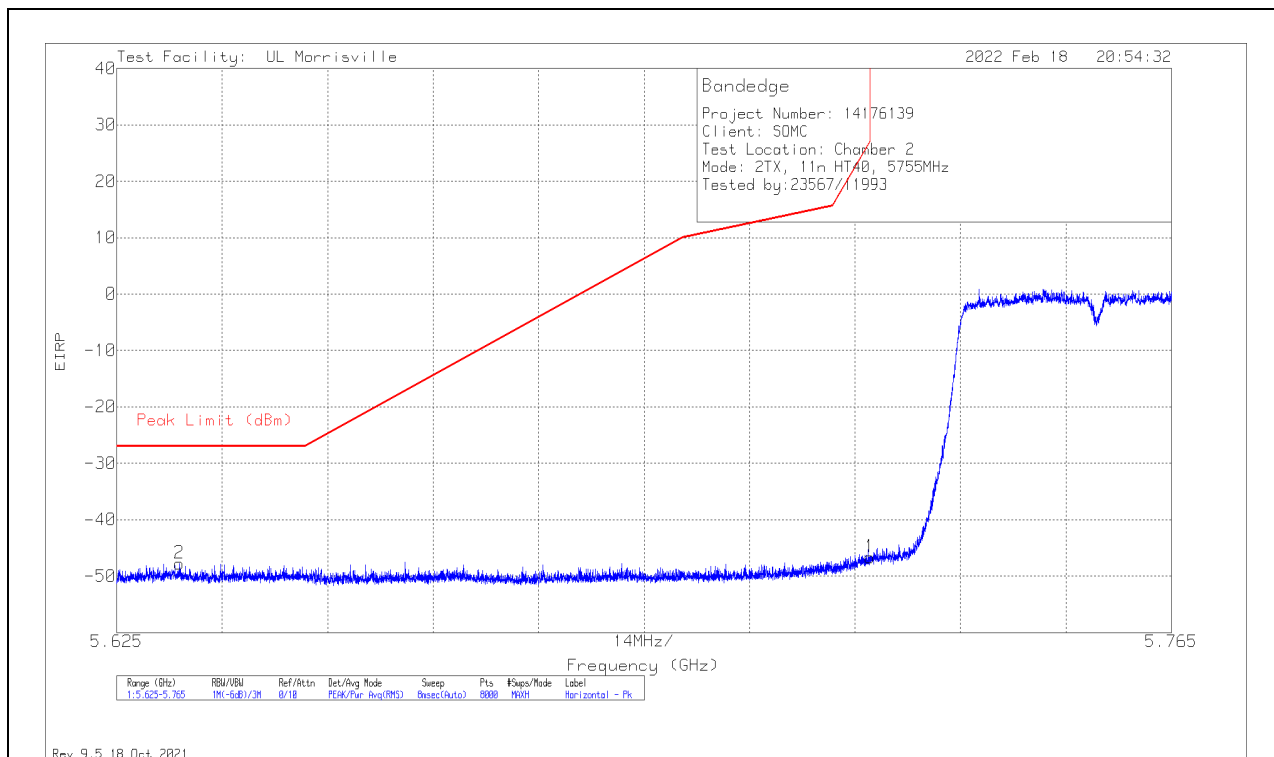

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63335	-71.63	Pk	34.7	-22.7	11.8	-47.83	-27	-20.83	78	147	H
1	5.72499	-70.71	Pk	34.8	-22.6	11.8	-46.71	26.97	-73.68	78	147	H

Pk - Peak detector

VERTICAL RESULT

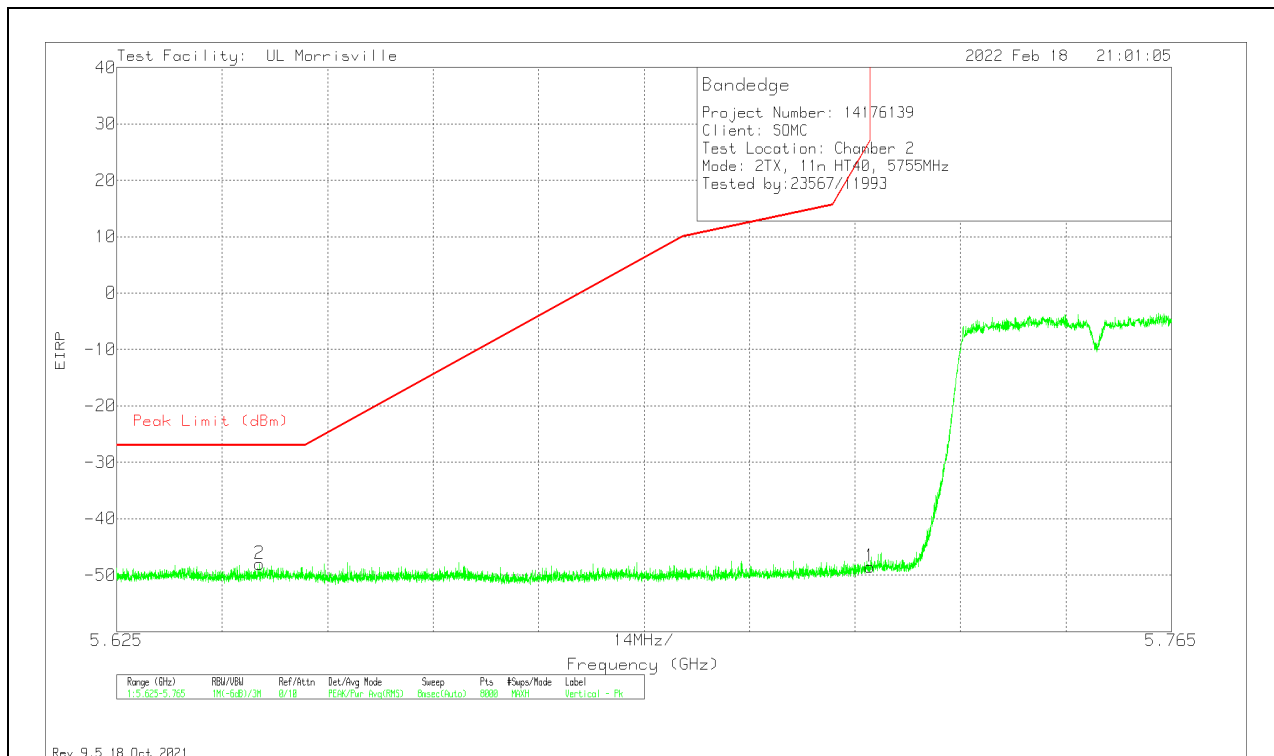


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64394	-71.7	Pk	34.7	-22.8	11.8	-48	-27	-21	212	275	V
1	5.72499	-72.47	Pk	34.8	-22.6	11.8	-48.47	26.97	-75.44	212	275	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

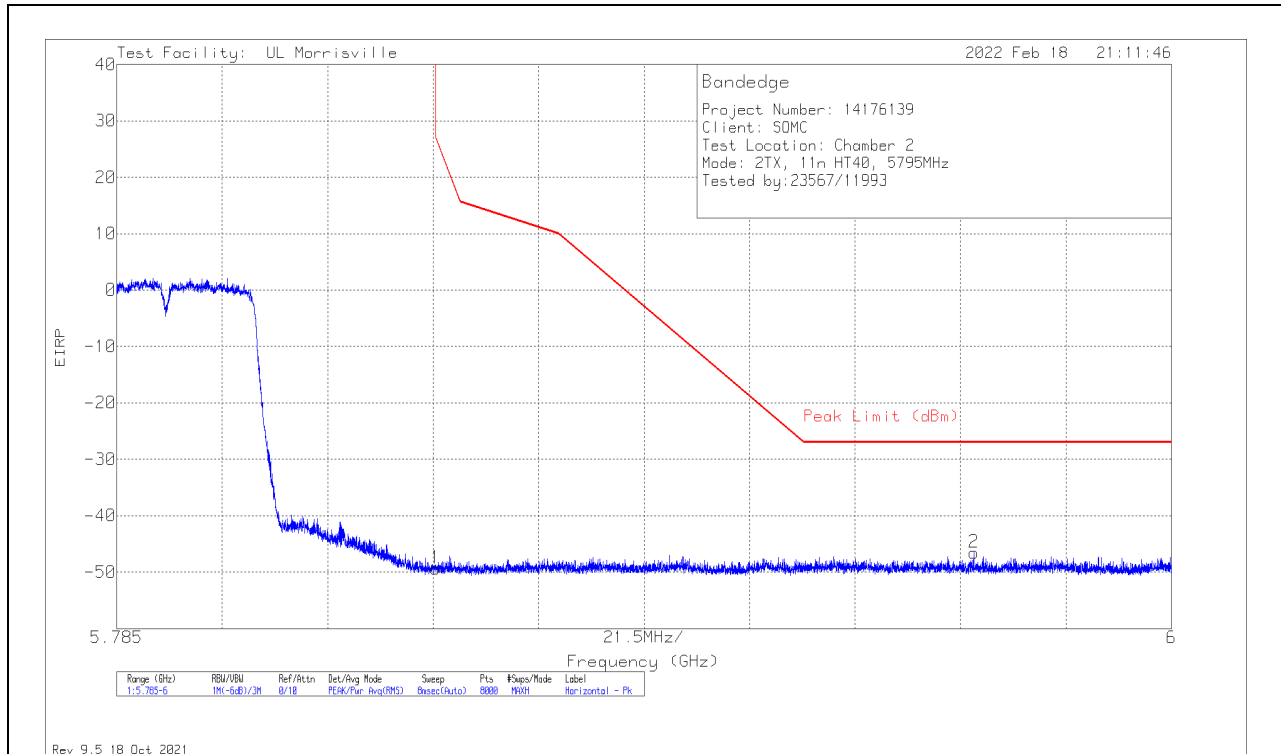

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-73.53	Pk	35.2	-22.8	11.8	-49.33	26.96	-76.29	75	101	H
2	5.95971	-71.04	Pk	35.2	-22.5	11.8	-46.54	-27	-19.54	75	101	H

Pk - Peak detector

VERTICAL RESULT

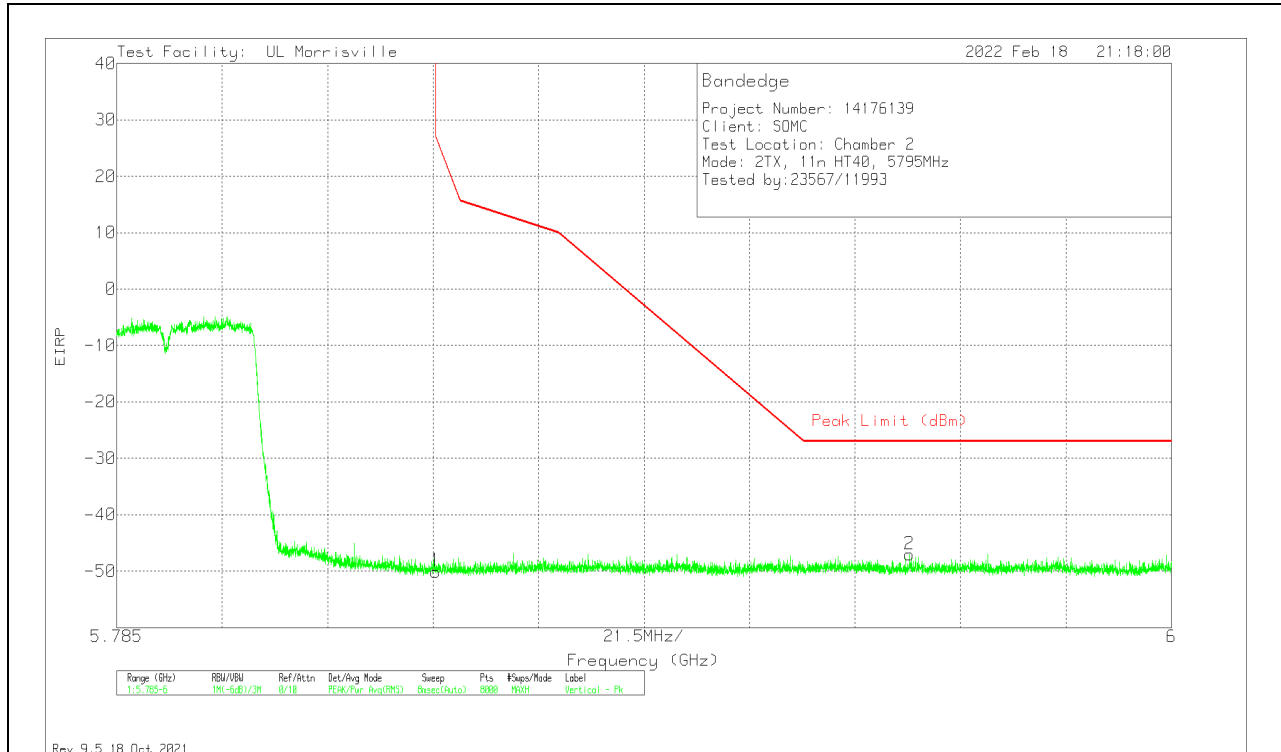

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-74.25	Pk	35.2	-22.8	11.8	-50.05	26.96	-77.01	19	374	V
2	5.94662	-71.66	Pk	35.2	-22.4	11.8	-47.06	-27	-20.06	19	374	V


Pk - Peak detector

10.1.4. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

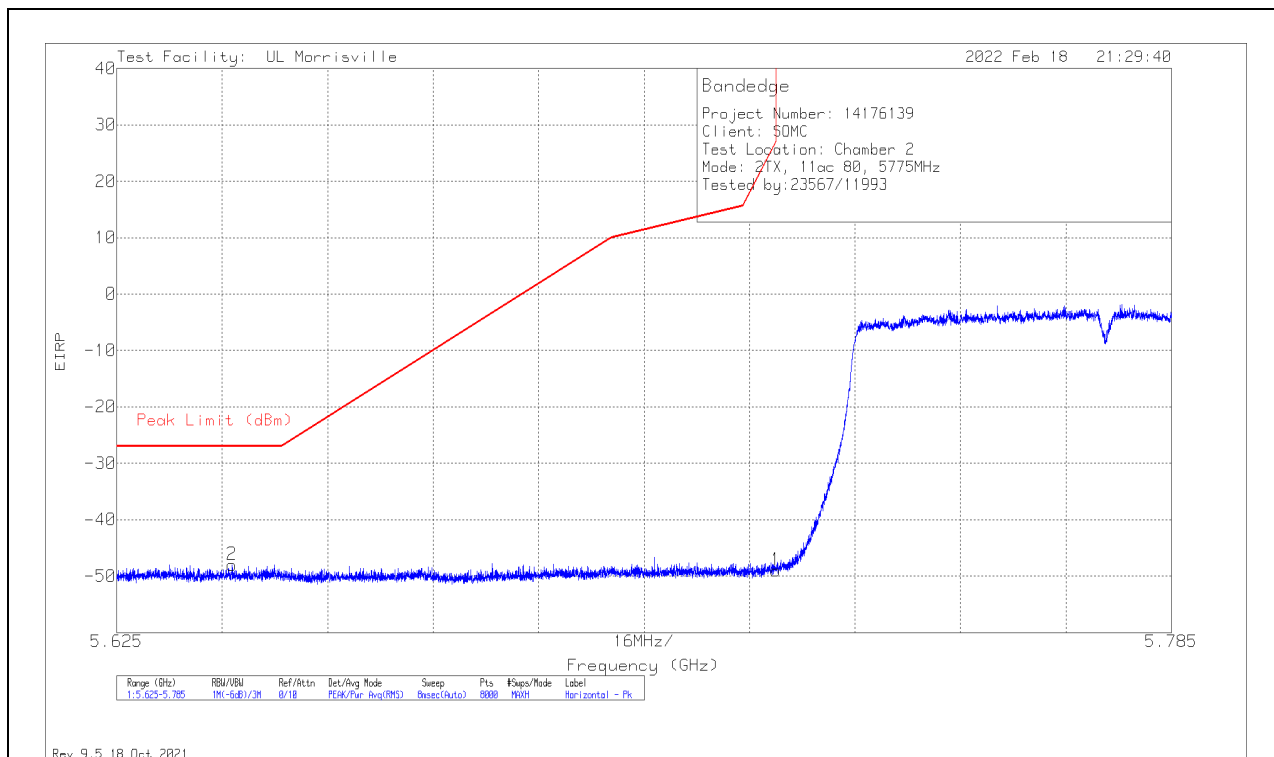

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6425	-71.68	Pk	34.7	-22.8	11.8	-47.98	-27	-20.98	81	295	H
1	5.725	-73.02	Pk	34.8	-22.6	11.8	-49.02	26.99	-76.01	81	295	H

Pk - Peak detector

VERTICAL RESULT

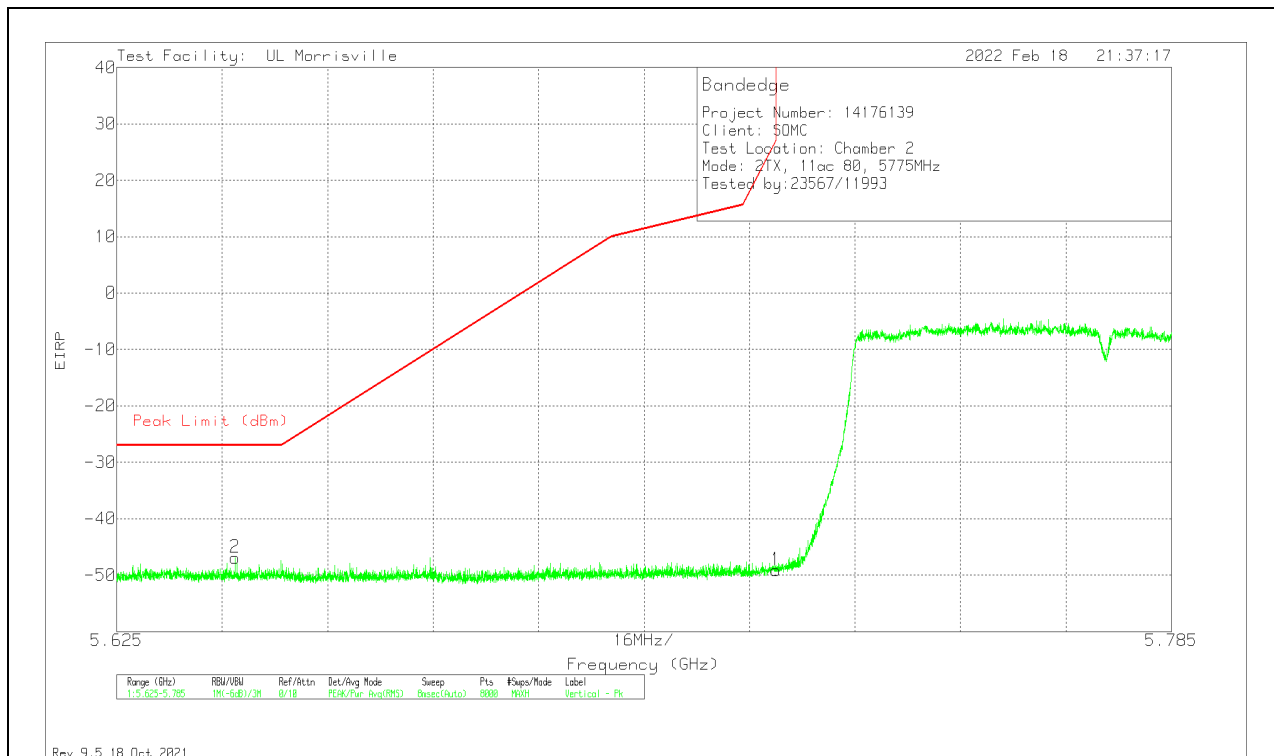


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64296	-70.57	Pk	34.7	-22.8	11.8	-46.87	-27	-19.87	38	302	V
1	5.725	-73.18	Pk	34.8	-22.6	11.8	-49.18	26.99	-76.17	38	302	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

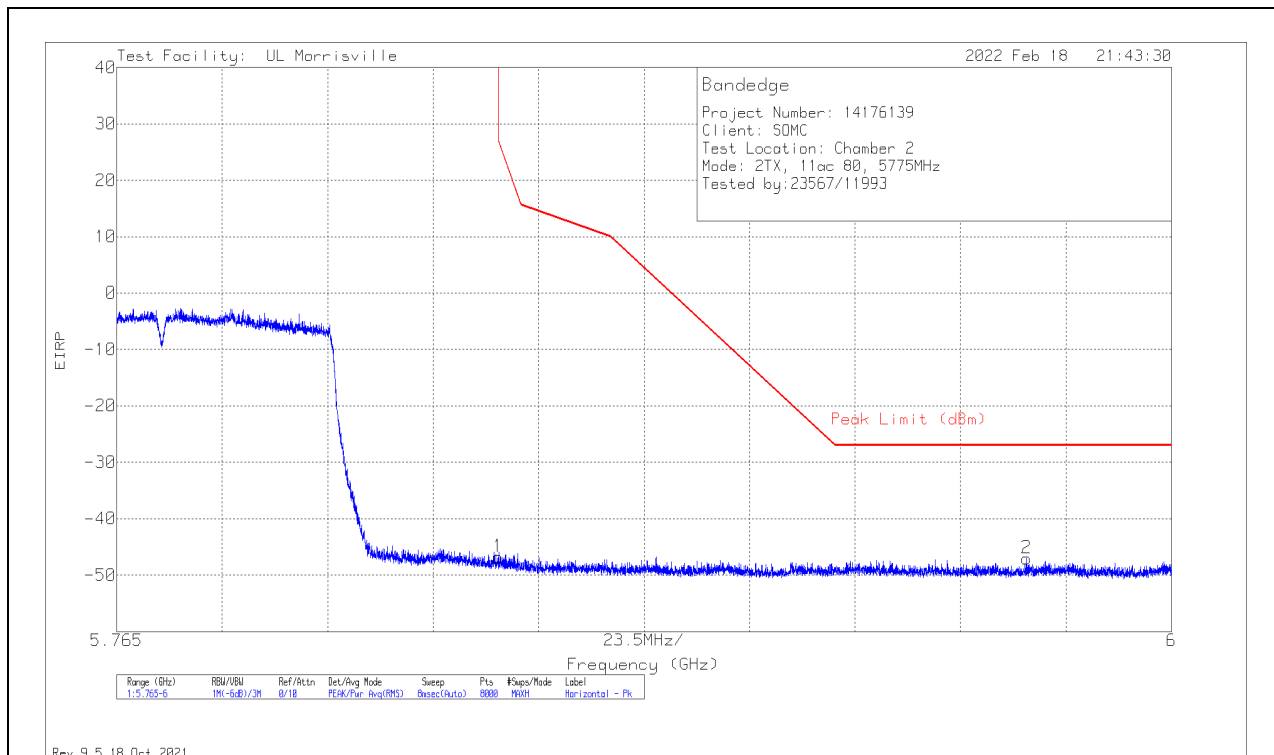

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-70.94	Pk	35.2	-22.8	11.8	-46.74	26.95	-73.69	99	284	H
2	5.96769	-71.52	Pk	35.3	-22.6	11.8	-47.02	-27	-20.02	99	284	H

Pk - Peak detector

VERTICAL RESULT

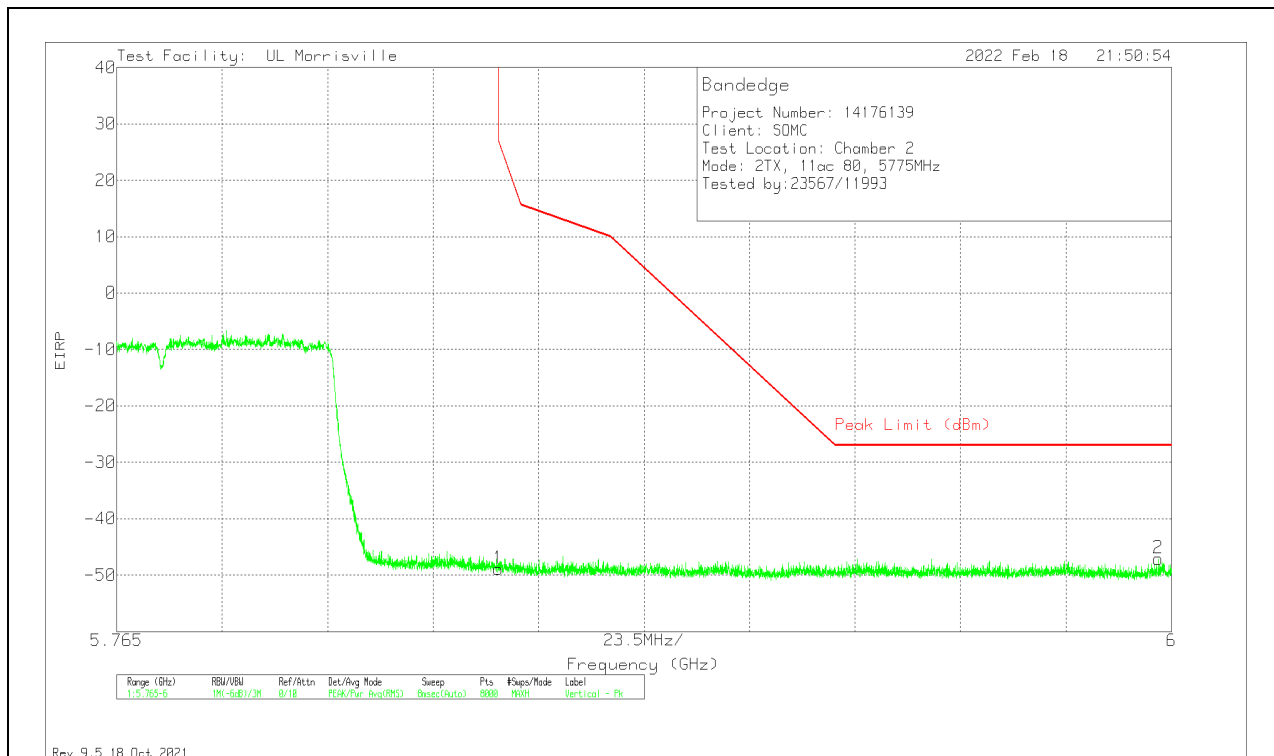

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-73.11	Pk	35.2	-22.8	11.8	-48.91	26.95	-75.86	202	280	V
2	5.99706	-71.7	Pk	35.3	-22.5	11.8	-47.1	-27	-20.1	202	280	V

Pk - Peak detector

11. SETUP PHOTOS

Please refer to R14176139-EP2 for setup photos

END OF TEST REPORT