

BLE_2M

Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 40.794$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn393; Calibrated: 2023/4/13
- Probe: EX3DV4 - SN7350; ConvF(7.71, 7.71, 7.71) @ 2402 MHz; Calibrated: 2022/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1897

Gaming Mouse/Rear Face_0cm/BLE_2M Ch0/Area Scan (8x13x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0283 W/kg

Gaming Mouse/Rear Face_0cm/BLE_2M Ch0/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.425 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.0316 W/kg

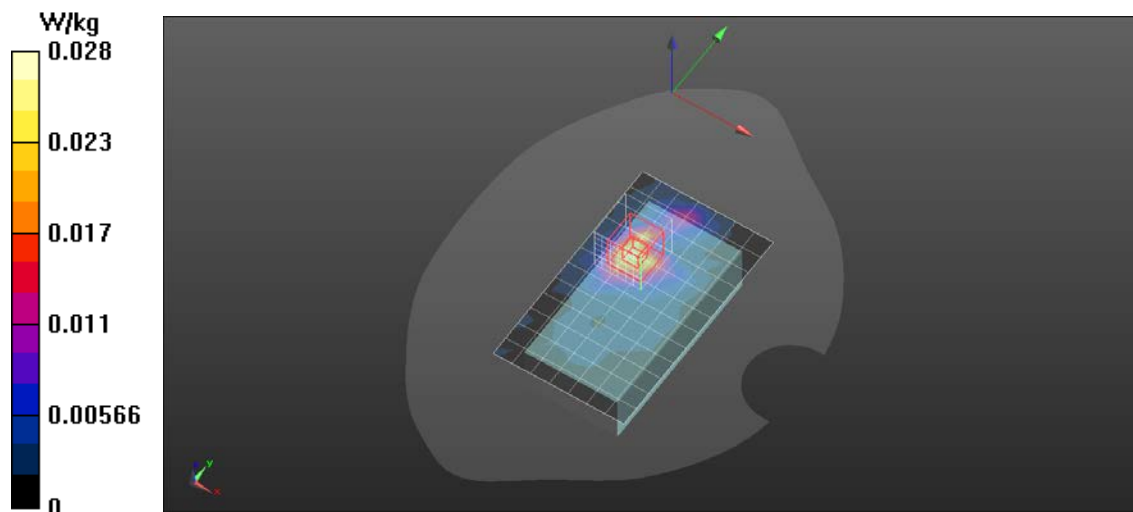

2.4G_SRD

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 40.683$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn393; Calibrated: 2023/4/13
- Probe: EX3DV4 - SN7350; ConvF(7.71, 7.71, 7.71) @ 2480 MHz; Calibrated: 2022/12/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1897

Gaming Mouse/Rear Face_0cm/2.4G SRD Ch78/Area Scan (8x13x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0236 W/kg

Gaming Mouse/Rear Face_0cm/2.4G SRD Ch78/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.083 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00617 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 0.0273 W/kg

