



中国认可
国际互认
检测
TESTING
CNAS L0446



Page 1 of 37

Test Report

Verified code: 664085

Report No.: E20210916762301-4

Customer: OnePlus Technology (Shenzhen) Co., Ltd.

Address: 18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North,
Futian District, Shenzhen, Guangdong, China

Sample Name: Watch

Sample Model: W301GB

Receive Sample Date: Sep.18,2021

Test Date: Sep.19,2021 ~ Oct.26,2021

Reference Document: IEEE Std. 1528:2013
47 CFR FCC Part 2.1093:2013
IEEE Std. C95.1:2019

Test Result: Pass

Prepared By: Wang Zhicheng

Reviewed By: Jiang Tao

Approved By: Xiao Liang

GUANGZHOU GRG METROLOGY & TEST CO., LTD

Issued Date: 2021-11-30

GUANGZHOU GRG METROLOGY & TEST CO., LTD

Address: No.163 Xipingyun Road, Huangpu Avenue, Tianhe District, Guangzhou (510656)

Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



REVISION HISTORY

Report No.	Revisions	Effect Page	Revised By
E20200904990101-7-G2	Initial Issue	ALL	Xie Fang
E20210916762301-4	Updated	ALL	Yu Shanshan

Rev.01: E20210916762301-4

1.The hardware update is as follows: a.GPS 0.8V Power supply materials (buck changed from TPS62088YFP to SGM6033-ADJXG/TR) and the change of external resistance and capacitance material; b.The revision distinguishes PCB board ID device (resistance value) changes.All test data, EUT internal and external photos (model W301GB), test photos are all updated, and the rest remain unchanged.

2.The other information about product, please refer to initial report: E20200904990101-7-G2 (issue date: 2021-03-31)and this report.

Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

Table of Contents

1.	GENERAL INFORMATION	6
2.	GENERAL INFORMATION OF EUT.....	7
2.1	STATEMENT OF COMPLIANCE	7
2.2	GENERAL DESCRIPTION	8
2.3	LABORATORY ENVIRONMENT	9
3.	LABORATORY AND ACCREDITATIONS	10
3.1	LABORATORY.....	10
3.2	ACCREDITATIONS	10
3.3	MEASUREMENT UNCERTAINTY	10
4.	SAR MEASUREMENTS SYSTEM.....	11
4.1	DEFINITION OF SPECIFIC ABSORPTION RATE (SAR)	11
4.2	SAR SYSTEM	12
4.3	E-FIELD PROBE.....	13
4.4	DATA ACQUISITION ELECTRONICS (DAE)	14
4.5	ROBOT	15
4.6	MEASUREMENT SERVER	16
4.7	PHANTOM	17
4.8	DEVICE HOLDER	18
4.9	DATA STORAGE AND EVALUATION.....	19
5.	TEST EQUIPMENT LIST.....	21
6.	SYSTEM VERIFICATION PROCEDURE	22
6.1	TISSUE VERIFICATION	22
6.2	SYSTEM CHECK PROCEDURE.....	23
7.	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	25
7.1	SAR MEASUREMENT VARIABILITY	25
7.2	MEASUREMENT UNCERTAINTY	25
8.	EUT TESTING POSITION	26
8.1	BODY WORN POSITION	26
9.	MEASUREMENT PROCEDURES.....	27
9.1	SPATIAL PEAK SAR EVALUATION.....	27
9.2	POWER REFERENCE MEASUREMENT	27
9.3	AREA SCAN PROCEDURES.....	28
9.4	ZOOM SCAN PROCEDURES.....	29
9.5	VOLUME SCAN PROCEDURES	30
9.6	POWER DRIFT MONITORING.....	30
10.	CONDUCTED POWER	31
11.	SAR TEST RESULTS SUMMARY.....	32
12.	SIMULTANEOUS TRANSMISSION ANALYSIS.....	33
	APPENDIX A. SYSTEM CHECKING SCANS	34
	APPENDIX B. MEASUREMENT SCANS	35
	APPENDIX C. RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S).....	37
	APPENDIX D: PHOTOGRAPH OF SET UP	37

APPENDIX E: PHOTOGRAPH OF THE EUT 37

----- The following blanks -----

1. GENERAL INFORMATION

Applicant	OnePlus Technology (Shenzhen) Co., Ltd.
Address	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China
Manufacturer	OnePlus Technology (Shenzhen) Co., Ltd.
Address	18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China
Factory	Longcheer Electronic (HuiZhou) Co., Ltd.
Address	Building 1, No.28 (west) Hechang Six Road, Zhongkai High-Tech Zone, Huizhou, Guangdong, China.
Standard(s)	<p>IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p>47 CFR FCC Part 2.1093: 2013 Radio frequency radiation exposure evaluation: portable devices</p> <p>ANSI Std C95.1-2019 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz - 300 GHz.</p> <p>KDB 447498 D01 v06 General RF Exposure Guidance</p> <p>KDB 865664 D01 v01r04 SAR measurement 100 MHz to 6 GHz</p> <p>KDB 865664 D02 v01r02 RF Exposure Reporting</p>

2. GENERAL INFORMATION OF EUT

2.1 STATEMENT OF COMPLIANCE

FrequencyBand	Model	Test Position	Highest Reported SAR(W/Kg)	Mass Average (g)	SAR Test Limit (W/Kg)
Bluetooth	W301GB	Front Face	0.087	1	1.6
		Rear Face	0.118	10	4
Test Result		PASS			

Note:

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for localized Head, Neck and Trunk 1g SAR, 4.0 W/Kg for localized Limbs 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and IEC 62209-2:2019.

----- The following blanks -----

2.2 GENERAL DESCRIPTION

Equipment	Watch		
Brand Name	ONEPLUS		
Model Name	W301GB		
Series Model	/		
Model Difference	/		
Sample No.	E20210916762301-0002		
FCC ID	2ABZ2-W301GB		
Device Type	Portable device		
HW Version	LTAM281		
SW Version	W301GB_11_A.01		
Frequency Range	Band	TX (MHz)	RX (MHz)
	Bluetooth	2402-2480	
Device class	Class B		
Type of Modulation:	BR+EDR: GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps,8DPSK for 3Mbps BT-LE: GFSK for 1&2 Mbps		
Antenna Specification:	Internal antenna with 1dBi gain (Max)		
Test Channels (low-mid-high):	0-39-78 (BR+EDR) 0-19-39 (BT-LE)		
Operating Mode:	Maximum continuous output		
Other Information			
Power Supply:	DC3.87V power supplied by battery DC5V power supplied by adapter		
Battery Specification:	Rechargeable Li-ion Battery/XE202 Limited Charge Voltage:4.45Vdc Rated Capacity: 402mAh/1.56Wh Nominal Voltage:3.87Vdc Typical Capacity: 410mAh/1.59Wh		
Sample submitting way:	<input checked="" type="checkbox"/> Provided by customer <input type="checkbox"/> Sampling		
Note:	/		

2.3 LABORATORY ENVIRONMENT

Temperature	Min. = 18 °C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

----- The following blanks -----

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests and measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.	
Add.:	No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District Shenzhen, 518110, People's Republic of China.
P.C.:	518000
Tel :	0755-61180008
Fax:	0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA A2LA(Certificate #2861.01)

China CNAS(L0446)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,

<http://www.grgtest.com>

3.3 MEASUREMENT UNCERTAINTY

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

4. SAR MEASUREMENTS SYSTEM

4.1 DEFINITION OF SPECIFIC ABSORPTION RATE (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg). SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 SAR SYSTEM

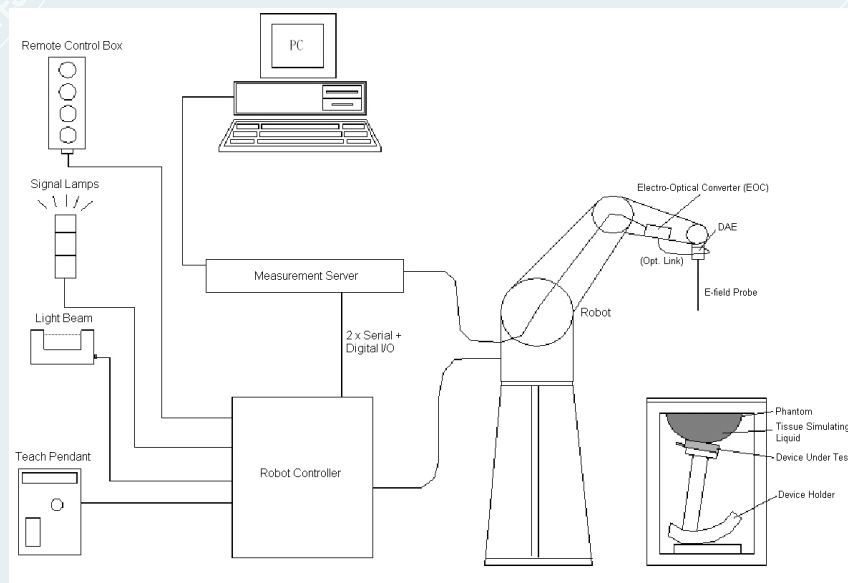

DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Components are described in details in the following sub-sections.

4.3 E-FIELD PROBE

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm	

Photo of ES3DV3

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.4 DATA ACQUISITION ELECTRONICS (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω m; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.5 ROBOT

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

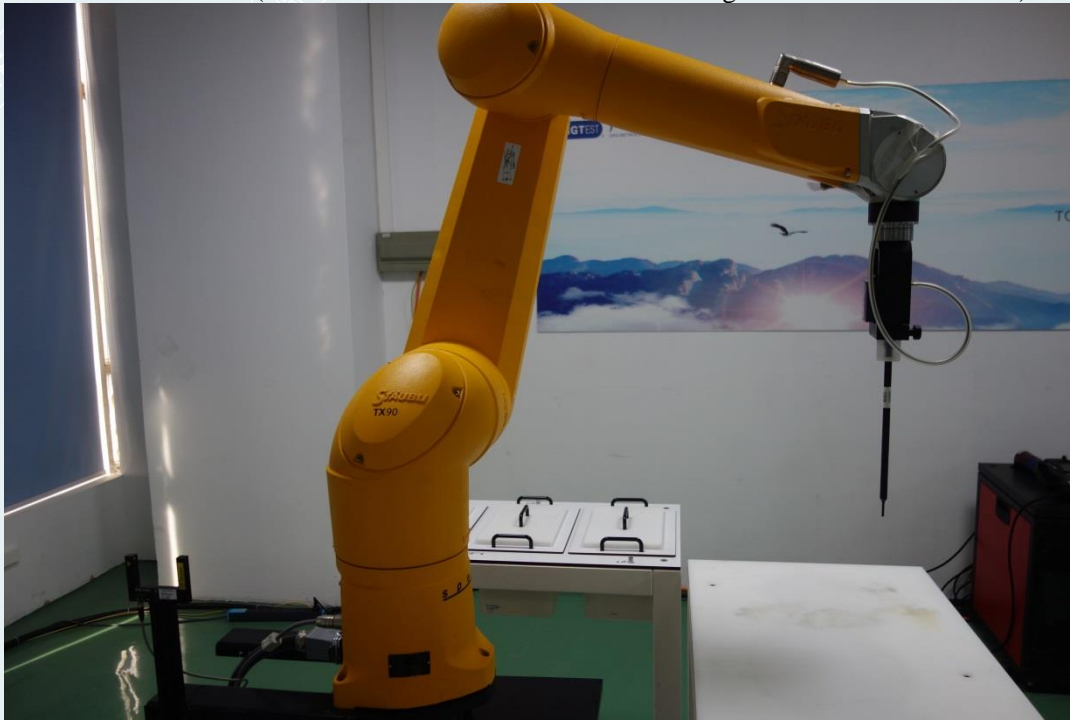


Photo of DASY5

4.6 MEASUREMENT SERVER

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chip disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.




Photo of Server for DASY5

----- The following blanks -----

4.7 PHANTOM

<SAM Twin Phantom>

Shell Thickness	2 \pm 0.2 mm; Center ear point: 6 \pm 0.2 mm	 <p>Photo of SAM Phantom</p>
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

----- The following blanks -----

4.8 DEVICE HOLDER

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.9 DATA STORAGE AND EVALUATION

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}_i}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i , ($i = x, y, z$), $\mu V/(V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. TEST EQUIPMENT LIST

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHz Dipole	SPEAG	D2450V2	903	2021-04-14	2023-04-13
Dosimetric E-Field Probe	SPEAG	ES3DV3	SN 3308	2021-04-19	2022-04-18
Data Acquisition Electronics	SPEAG	DAE4	SN 796	2021-04-21	2022-04-20
ENA Series Network Analyzer	R&S	ZNB8	1311.6010K44-104068-ZQ	2020-11-22	2021-11-21
DAK	SPEAG	DAK-3.5	1056	N/A	N/A
Twin SAM Phantom1	SPEAG	QD000P40CD	1743	N/A	N/A
SAM Twin Phantom2	SPEAG	QD000P40CD	1745	N/A	N/A
2mm Triple Flat Phantom	SPEAG	QD000P51CA	1134/3	N/A	N/A
Power Meter	Anritsu	ML2495A	1204003	2021-03-22	2022-03-21
Power Sensor	Anritsu	MA2411B	1126150	2021-03-22	2022-03-21
Spectrum Analyzer	Keysight	N9010A	MY55370330	2020-12-16	2021-12-15
Signal generator	R&S	SMA100A	100434	2021-09-05	2022-09-04

Remark:

1. "N/A" denotes no model name, serial No. or calibrationspecified.
2. *Thesetestequipments havebeenrecalibratedbetweenthe testperiods. Allthesetestequipments were within the valid period when the tests wereperformed.
3. Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in AppendixC.
 - a) There is no physical damage on thedipole;
 - b) System check with specific dipole is within 10% of calibratedvalue;
 - c) The most recent return-loss result , measured at least annually, deviates by no more than 20% from the previousmeasurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured atleast annually is within 5Ω from the previousmeasurement.

6. SYSTEM VERIFICATION PROCEDURE

6.1 TISSUE VERIFICATION

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:

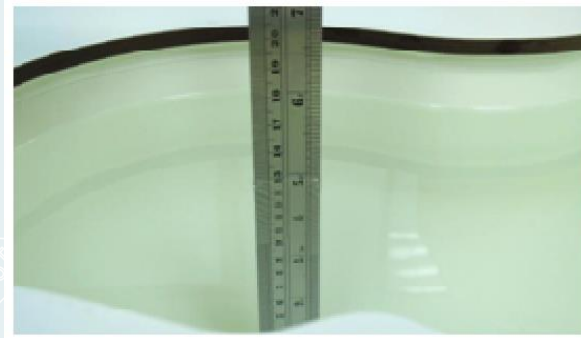


Photo of 2450HSL Liquid Height for Head SAR

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

The following table shows the measuring results for simulating liquid.

Tissue Type	Measured Frequency (MHz)	Target Value ($\pm 10\%$)		Measured Value		Tissue temperature ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/M})$	ϵ_r	$\sigma(\text{S/M})$		
2450 HSL	2450	39.20 (35.28~43.12)	1.80 (1.62~1.98)	39.54	1.81	20.3	2021-10-25

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

6.2 SYSTEM CHECK PROCEDURE


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

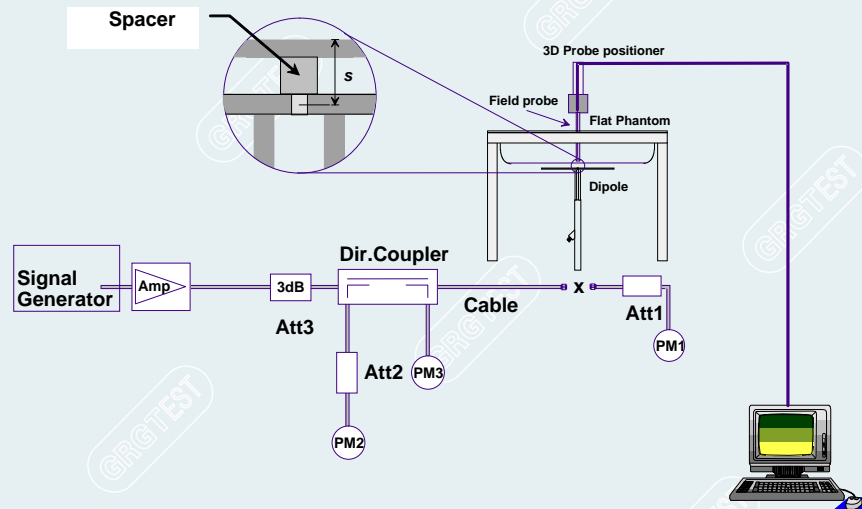

System Setup for System Evaluation

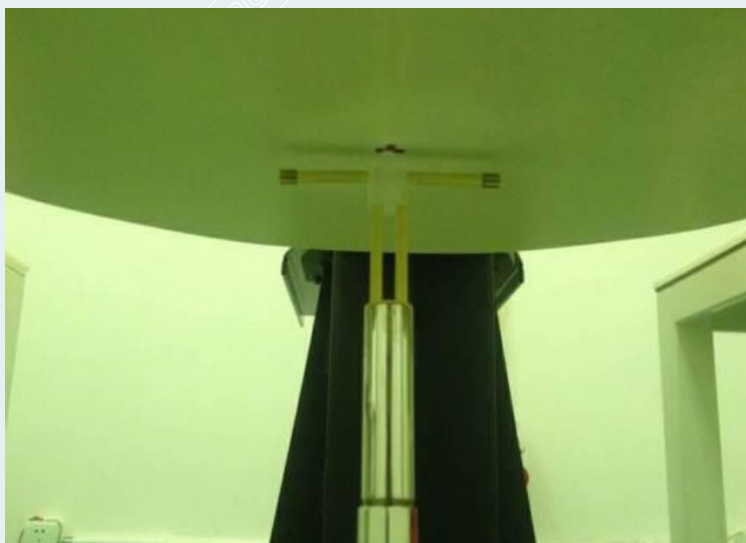


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Dipole	TissueType	TargetValue(W/Kg) ($\pm 10\%$) (Normalized to 1W)		MeasuredValue (W/Kg)(1W)		Tissuetemperature($^{\circ}\text{C}$)	MeasuredDate
		1g	10g	1g	10g		
D2450V2	2450 HSL	52.20 (46.98~57.42)	23.60 (21.24~25.96)	50.4	23.1	20.3	2021-10-25

Target and Measurement SAR after Normalized

7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

7.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Chapter 12.

7.2 MEASUREMENT UNCERTAINTY


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/Kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

8. EUT TESTING POSITION

8.1 BODY WORN POSITION

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

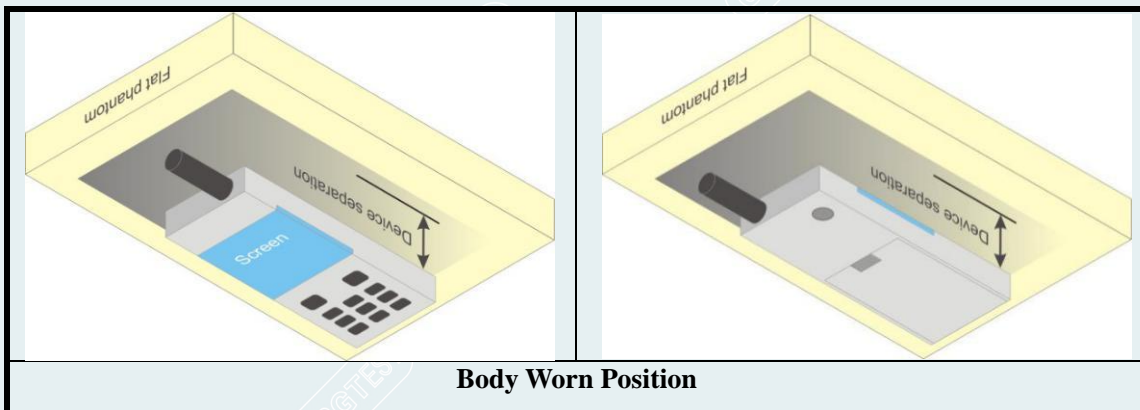

9. MEASUREMENT PROCEDURES

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 SPATIAL PEAK SAR EVALUATION

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 POWER REFERENCE MEASUREMENT

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 AREA SCAN PROCEDURES

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 ZOOM SCAN PROCEDURES

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 VOLUME SCAN PROCEDURES

The volumetric scan is used for assessing overlapping SAR distributions for antenna transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in stand-alone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antenna transmitting simultaneously in different frequency bands, the volumetric scan is measured separately in each frequency band. In order to sum correctly to compute the aggregate SAR, the EUT remains in the same test position for all measurements and all volumetric scans use the same spatial resolution and grid spacing. When all volumetric scans were completed, the software, SEMCAD post-processor can combine and subsequently superpose these measurement data to calculate the multi-band SAR.

9.6 POWER DRIFT MONITORING

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field data at specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than ± 0.2 dB, the SAR will be retested.

----- The following blanks -----

10. CONDUCTED POWER

<Bluetooth Conducted Average Power>

Mode	Channel	Frequency (MHz)	Conducted Average Power (dBm)
GFSK	00	2402	3.25
	39	2441	3.29
	78	2480	4.07
$\pi/4$ DQPSK	00	2402	-3.42
	39	2441	-2.46
	78	2480	-3.15
8DPSK	00	2402	-4.13
	39	2441	-3.85
	78	2480	-3.88
BT-LE 1M	00	2402	9.42
	19	2440	9.71
	39	2480	9.92
BT-LE 2M	00	2402	6.91
	19	2440	7.12
	39	2480	7.11

Note:

- Per KDB 447498 D01Chapter 4.3.1, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$$

$$\leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz}$$
Power and distance are rounded to the nearest mW and mm before calculation
The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Result	exclusion thresholds
9.92	0	2.48	3.09	3

- Per KDB 447498 D01Chapter 4.3.1, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 3.09 which is > 3 , so SAR test is required.
- Per KDB 447498 D01Chapter 4.3.2b), When an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg, for test separation distances } \leq 50 \text{ mm;}$$
where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.
0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distance is > 50 mm.

11. SAR TEST RESULTS SUMMARY

General Note:

- Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

$$\text{Scaling Factor} = \text{tune-up limit power (mW)} / \text{EUT RF power (mW)}, \text{ where tune-up limit is the maximum rated power among all production units.}$$

$$\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Scaling Factor}$$
- Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported $\text{SAR} \leq 0.8 \text{ W/kg}$, other channels SAR testing are not necessary
- Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45 \text{ W/Kg}$, only one repeated measurement is required.

Band	Mode	Test Position	Gap (mm)	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)	Plot No.
Bluetooth	BLE-1M	Front Face	5	2402	9.42	10.00	1.14	0.04	0.0759	0.087	#1
Bluetooth	BLE-1M	Front Face	5	2441	9.71	10.00	1.07	-0.10	0.0742	0.079	
Bluetooth	BLE-1M	Front Face	5	2480	9.92	10.00	1.02	0.07	0.0695	0.071	
Band	Mode	Test Position	Gap (mm)	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)	Plot No.
Bluetooth	BLE-1M	Rear Face	0	2402	9.42	10.00	1.14	0.08	0.103	0.118	#2
Bluetooth	BLE-1M	Rear Face	0	2441	9.71	10.00	1.07	-0.02	0.106	0.113	
Bluetooth	BLE-1M	Rear Face	0	2480	9.92	10.00	1.02	0.13	0.0955	0.097	

12. SIMULTANEOUS TRANSMISSION ANALYSIS

N/A.

----- The following blanks -----

APPENDIX A. SYSTEM CHECKING SCANS

2450MHz Head SystemCheck

2021-10-25

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3308; ConvF(4.82, 4.82, 4.82); Calibrated: 2021/4/19;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn796; Calibrated: 2021/4/21
- Phantom: Front Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.8.8(1442); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 64.9 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 189.3 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 99.2 W/kg

SAR(1 g) = 50.4 W/kg; SAR(10 g) = 23.1 W/kg

Maximum value of SAR (measured) = 65.2 W/kg

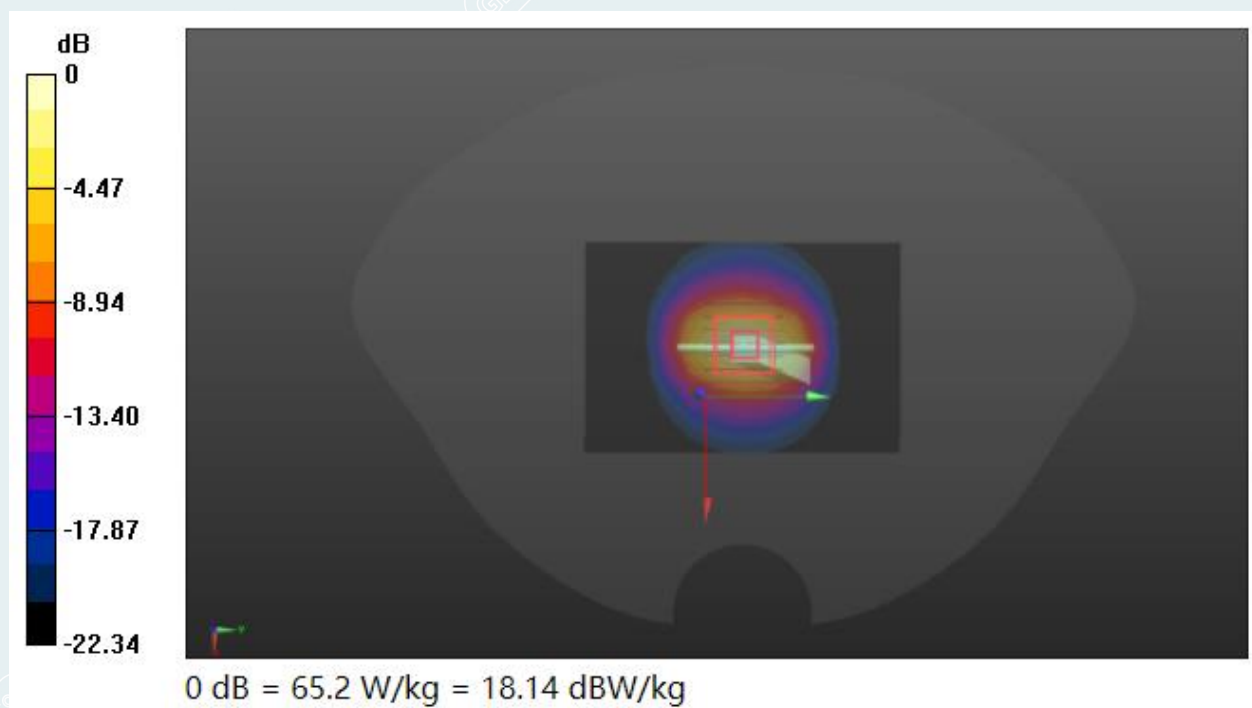

APPENDIX B. MEASUREMENT SCANS

2021-10-25

BT_Front Face_Ch0 #1

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.887$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.82, 4.82, 4.82); Calibrated: 2021/4/19;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -3.0, 32.0$
- Electronics: DAE4 Sn796; Calibrated: 2021/4/21
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Body/Front Face Low/Area Scan (7x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0885 W/kg


Body/Front Face Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.478 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.040 W/kg.

Maximum value of SAR (measured) = 0.0905 W/kg

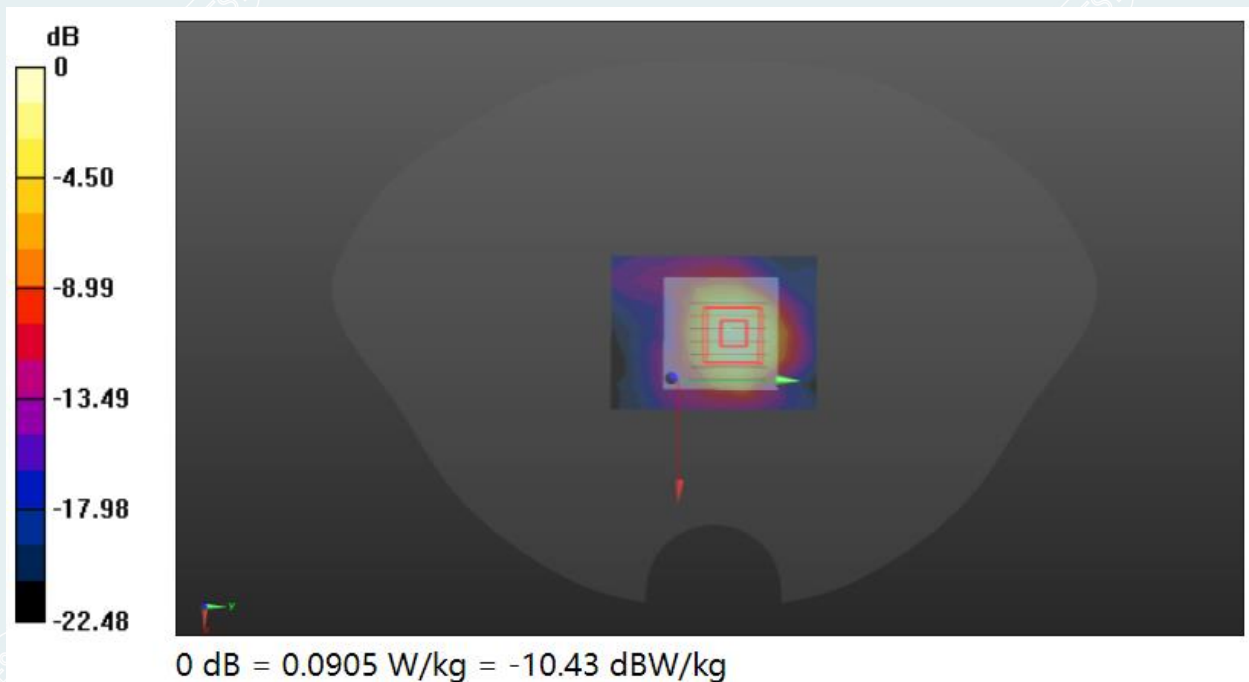

2021-10-25

BT_Rear Face_Ch0#2

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.887$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7514; ConvF(4.82, 4.82, 4.82); Calibrated: 2021/4/19;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -3.0, 32.0$
- Electronics: DAE4 Sn796; Calibrated: 2021/4/21
- Phantom: Left Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD;
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Body/Rear Face Low/Area Scan (7x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.113 W/kg


Body/Rear Face Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.487 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

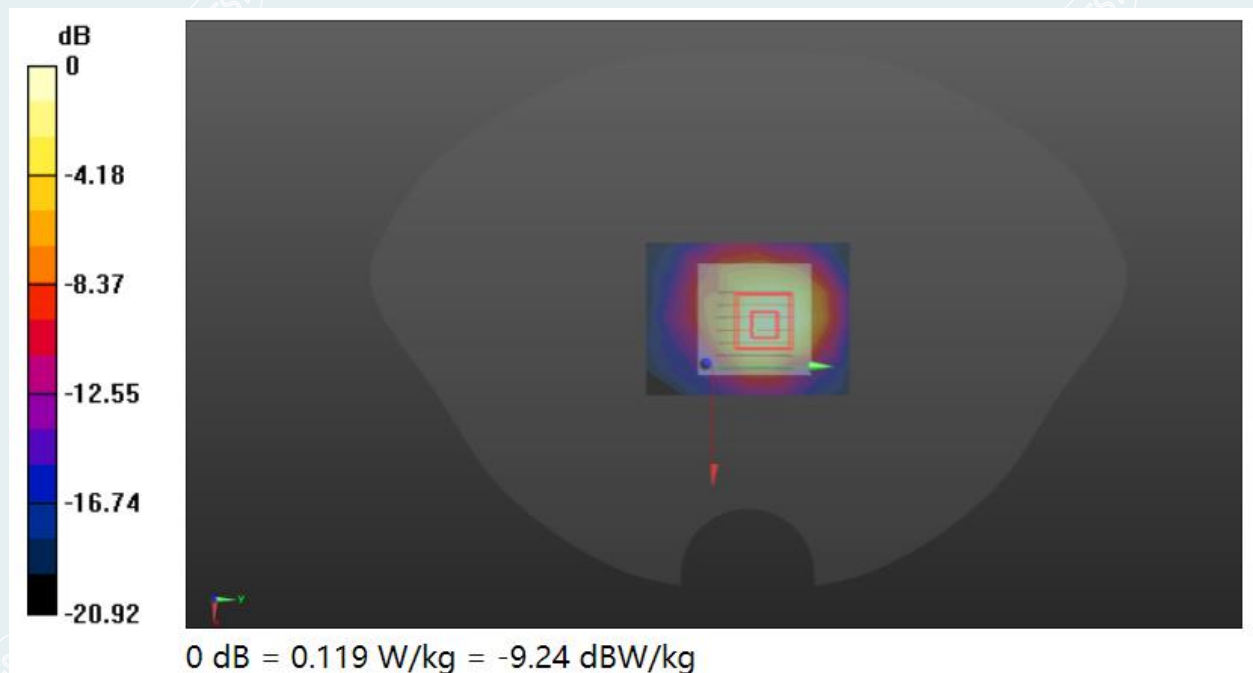

APPENDIX C. RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

Please refer to the attached document Calibration reports.

APPENDIX D: PHOTOGRAPH OF SET UP

Please refer to the attached document Test setup photo.

APPENDIX E: PHOTOGRAPH OF THE EUT

Please refer to the attached document EUT Photo.

----- End of Report -----