



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 95 AND IC RSS-210 (i8)
FRS/GMRS TRANSCEIVER
TEST REPORT**

APPLICANT	COBRA ELECTRONICS CORPORATION
	6500 WEST CORTLAND STREET CHICAGOIL 60707 USA
FCC ID	BBO0131B
IC	906A-0131B
MODEL NUMBER	CX102A, CX112, CX116A, CX131A, CXT145C, CXT145 SP, CXT195
PRODUCT DESCRIPTION	FRS/GMRS TRANSCEIVER with W/X
FCC STANDARD APPLIED	47 CFR § 95 Personal Radio Service Subpart A – General Mobile Radio Service (GMRS) Subpart B – Family Radio Service (FRS)
IC STANDARD APPLIED	IC Standard RSS-210 (i8), Annex 6
DATE SAMPLE RECEIVED	8/1/2014
DATE TESTED	8/18-19/2014
TESTED BY	Cory Leverett
APPROVED BY	Sid Sanders
TIMCO REPORT NO.	1353AUT14TestReport.docx
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

Table of Contents

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST PROCEDURES:.....	5
TEST PROCEDURES:.....	6
TEST PROCEDURES:.....	7
TEST REPORT SUMMARY.....	8
RF POWER OUTPUT	9
MODULATION CHARACTERISTICS.....	10
EMISSION DESIGNATOR AND FREQUENCIES.....	13
OCCUPIED BANDWIDTH	14
FRS OCCUPIED BANDWIDTH MASK B	15
FCC 20dB Bandwidth	15
IC 99% Power Bandwidth.....	16
GMRS OCCUPIED BANDWIDTH MASK B	17
FCC 20dB Bandwidth	17
IC 99% Power Bandwidth.....	18
FIELD STRENGTH OF SPURIOUS EMISSIONS	19
Test Data (GMRS):	19
FREQUENCY STABILITY	21
EMC EQUIPMENT LIST.....	22

Table of Contents

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report
☐ not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Cory Leverett
Engineering Project Manager

A handwritten signature in black ink is written over a circular purple stamp. The stamp contains the text "TIMCO ENGINEERING, INC." around the perimeter.

Date: 8/19/2014

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

GENERAL INFORMATION

EUT Specification

EUT Description	FRS/GMRS TRANSCEIVER with W/X band
EUT Application	Portable short range communications
FCC ID	BBO0131B
IC	906A-0131B
Model Number	CX102A, CX112, CX116A, CX131A, CXT145, CXT145C, CXT145 SP, CXT195
Serial Number	N/A
Operating Frequency	GMRS: 462.5500-462.7250 MHz FRS: 462.5625-467.7125 MHz
Test Frequencies	GMRS: 462.5625 MHz FRS: 467.7250 MHz
No. of Channels	22
Type of Emission	10K5F3E
EUT Power Source	<input type="checkbox"/> 110–120Vac/50–60Hz (Optional AC power Adapter)
	<input type="checkbox"/> DC Power 13.8V
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable
Antenna	Fixed
Test Conditions	The temperature was 26°C with a relative humidity of 50-60%.
Modification to the EUT	None
Test Exercise	The EUT was placed in continuous transmit mode of operation
Applicable Standards	ANSI/TIA 603-D:2004, FCC CFR 47 Part 25
Test Facility	Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA.


[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx


TEST PROCEDURES:

General: The test procedures used are detailed in **ANSI/TIA 603-D:2004**.

Power Output: RF power was conducted per ANSI/TIA 603-C: 2004 using the substitution method

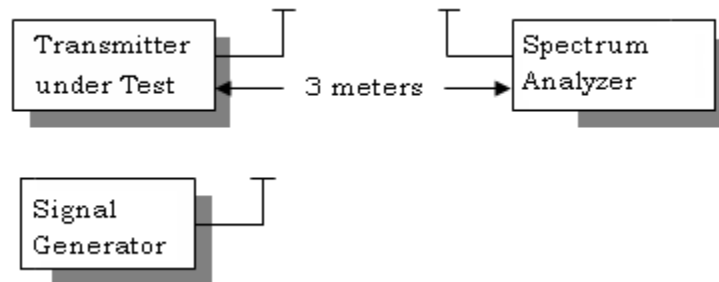

Bandwidth: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

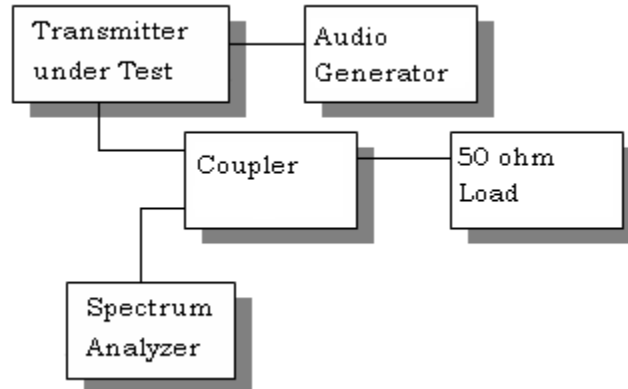


Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

TEST PROCEDURES:

Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

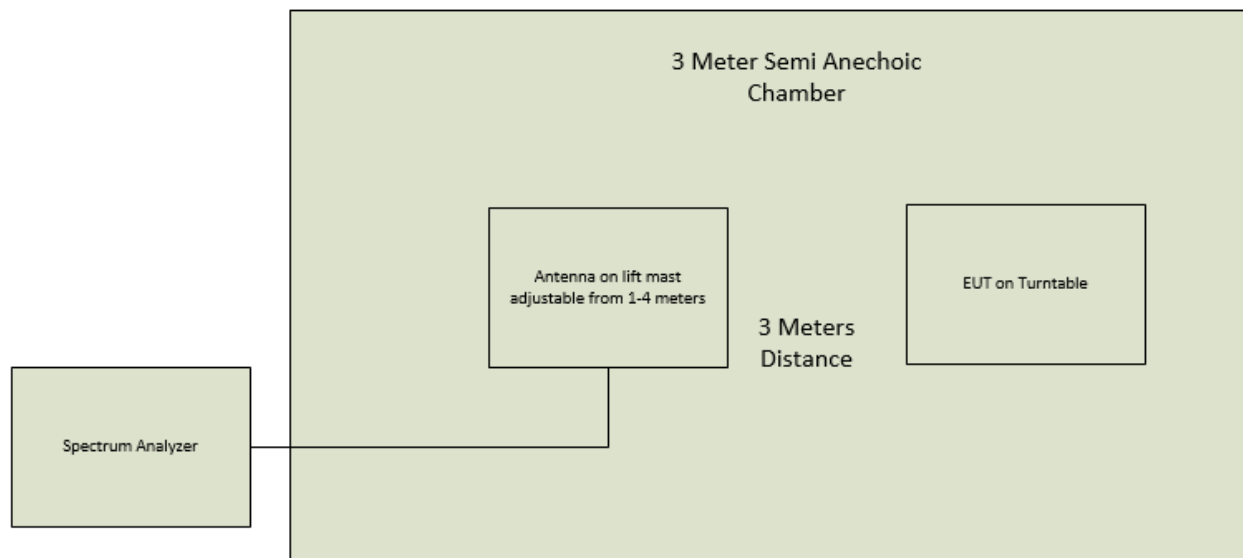


Frequency Stability: The EUT was placed into a temperature chamber. After a reference frequency is measured at room temperature, The EUT frequency is measured at the required extreme temperatures after a 20 minute soak time at each said temperature. The EUT antenna output port was connected to a frequency counter for the frequency measurement of an unmodulated CW signal. The voltage was also varied + and – 15% with a variable DC power supply and the frequency measured and compared to the reference frequency.

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

TEST PROCEDURES:

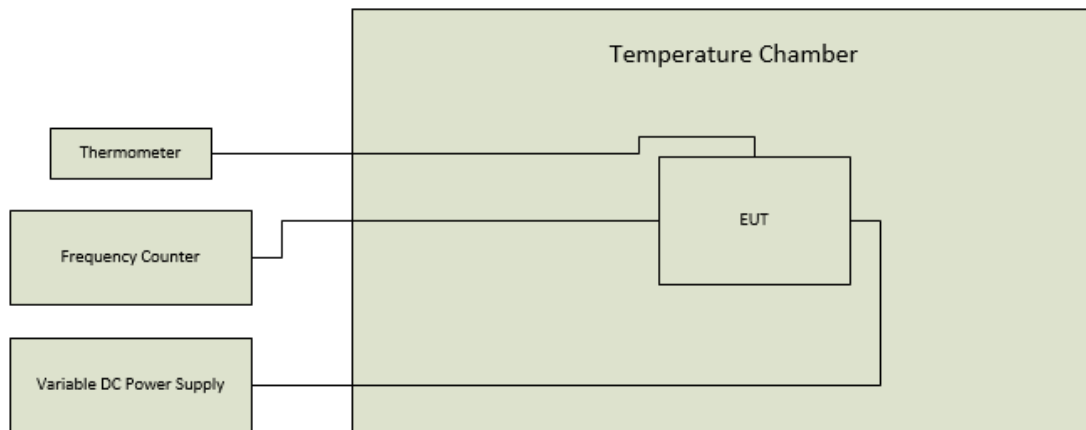

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
Part 2.1033(c)(6)(7), Part 2.1046(a), PART 95 Subpart A, Part 95 Subpart B, RSS-210	RF Power Output	Pass
Part 2.1033(a) (b)	Modulation Characteristics	Pass
2.1049(c), 95.635(b)(1)(3)(7)	Emission Mask and Occupied Bandwidths	Pass
2.1051	Antenna Conducted Emissions	Pass
2.1053, 95.635(b)(7), IC RSS-210	Field Strength Spurious Emissions	Pass
Part 2.1055 Part 95.621(b), IC RSS-210	Frequency Stability	Pass

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

RF POWER OUTPUT

Rule Part No.: [FCC Part 2.1033\(c\)\(6\)\(7\)](#), [FCC Part 2.1046\(a\)](#), [FCC PART 95 Subpart A](#), [FCC Part 95 Subpart B](#), IC [RSS-210](#)

Requirements: Power output shall not exceed 0.50 Watts effective radiated power for the FRS channels. There can be no provisions for increasing the power or varying the power. No GMRS channel, under any condition of modulation, shall exceed:

1. 50W Carrier power (average TP during one modulated RF cycle) when transmitting emissions type A1D, F1D, G1D, A3E, F3E, or G3E.
2. 50W peak envelope TP when transmitting emission type H1D, J1D, R1D, H3E, J3E, or R3E.

Method of Measurement: RF power is measured as ERP as the antenna is permanently attached. The substitution method was used. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Data:

Output power

GMRS	0.5W
FRS	0.5W

Rule Part No.: 2.1033 (C)(8) DC Input into the final amplifier

Power Input = 1.8 Watts

DC Power Consumption

Vdc = 4.5 volts

Ic = .41 amps

Results: Pass

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION

FCC ID: BBO0131B

IC: 906A-0131B

Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

MODULATION CHARACTERISTICS


[Part 2.1033\(a\) \(b\)](#)

Requirements:

Method of Measurement:

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004. The audio frequency response curve is shown below. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured.

AUDIO FREQUENCY RESPONSE PLOT

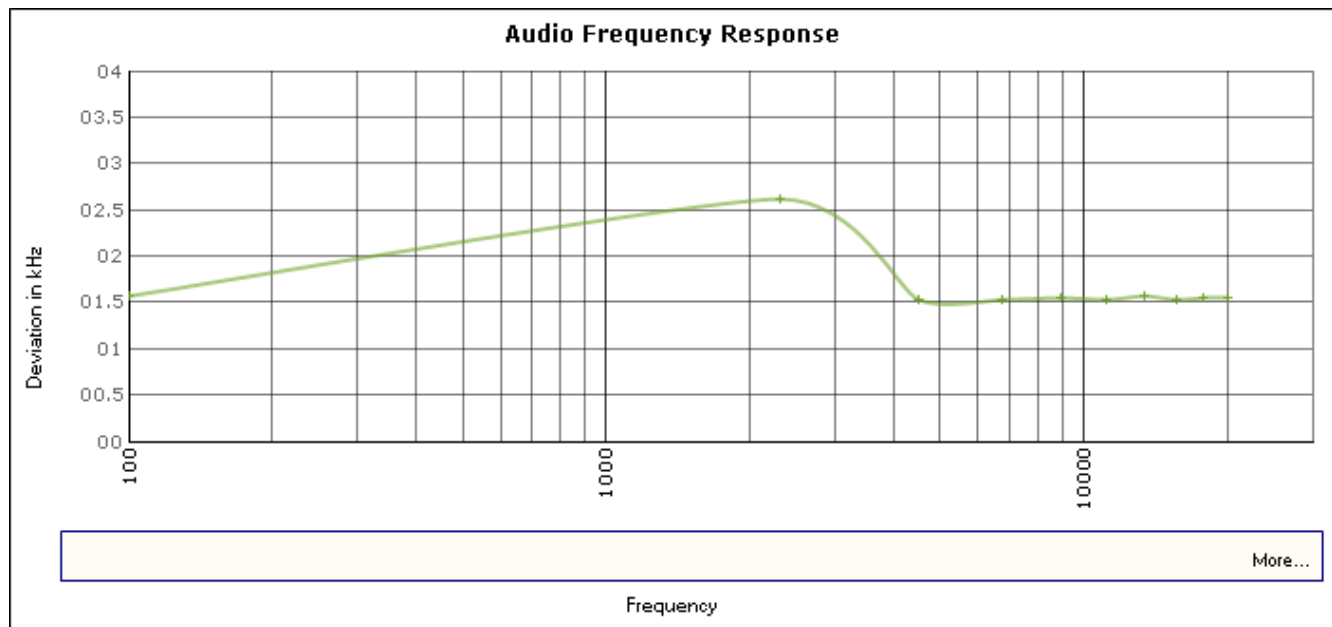


[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See the plot below..

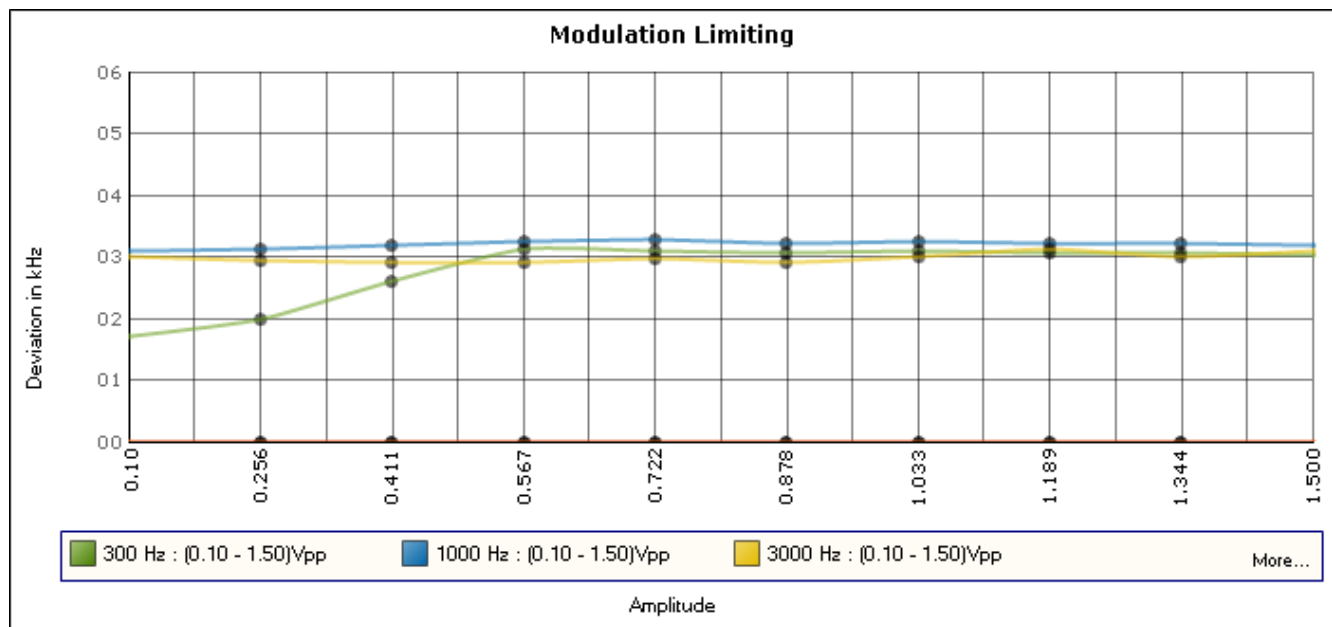

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

Post Limiter Filter

Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing overmodulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least $60 \log_{10} (f/3)$ dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

Results: PASS

This test is not applicable to the EUT because it has an output power of less than 2.5W, and complies with rule part 95.631

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

EMISSION DESIGNATOR AND FREQUENCIES

[2.1033\(c\) \(4\)](#) Type of Emission: 10K5F3E
[95.631](#)

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.25K \\ B_n &= 2(3000) + 2(2250) = 10.5K \end{aligned}$$

GMRS Authorized Bandwidth 20.0 kHz

[2.1033\(c\) \(5\)](#) GMRS Allowed Channel frequencies (MHz):
[95.621 \(a\)](#)

- | | |
|--------------|--------------|
| 1. 462.5500 | 13. 462.7000 |
| 2. 462.5625 | 14. 462.7125 |
| 3. 462.5750 | 15. 462.7250 |
| 4. 462.5875 | |
| 5. 462.6000 | |
| 6. 462.6125 | |
| 7. 462.6250 | |
| 8. 462.6375 | |
| 9. 462.6500 | |
| 10. 462.6625 | |
| 11. 462.6750 | |
| 12. 462.6875 | |

FRS Authorized Bandwidth 12.5 kHz

[2.1033\(c\) \(5\)](#) FRS Allowed Channel frequencies (MHz):
[95.626 \(a\)](#)

- | | |
|-------------|------------------|
| 1. 462.5625 | 8. 467.5625 |
| 2. 462.5875 | 9. 467.5875 |
| 3. 462.6125 | 10. 467.6125 |
| 4. 462.6375 | 11. 467.6375 |
| 5. 462.6625 | 12. 467.6625 |
| 6. 462.6875 | 13. 467.6875 |
| 7. 462.7125 | 14. 467.7125 MHz |

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

OCCUPIED BANDWIDTH

[Part 2.1049\(c\)](#) EMISSION BANDWIDTH:
[95.635\(b\)\(1\)\(3\)\(7\)](#)

At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least $43 + \log_{10}(TP)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See the following plot.


Test procedure: ANSI/TIA-603-C: 2004 paragraph 2.2.11.

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
FCC ID: BBO0131B
IC: 906A-0131B
Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

FRS OCCUPIED BANDWIDTH MASK B

FCC 20dB Bandwidth

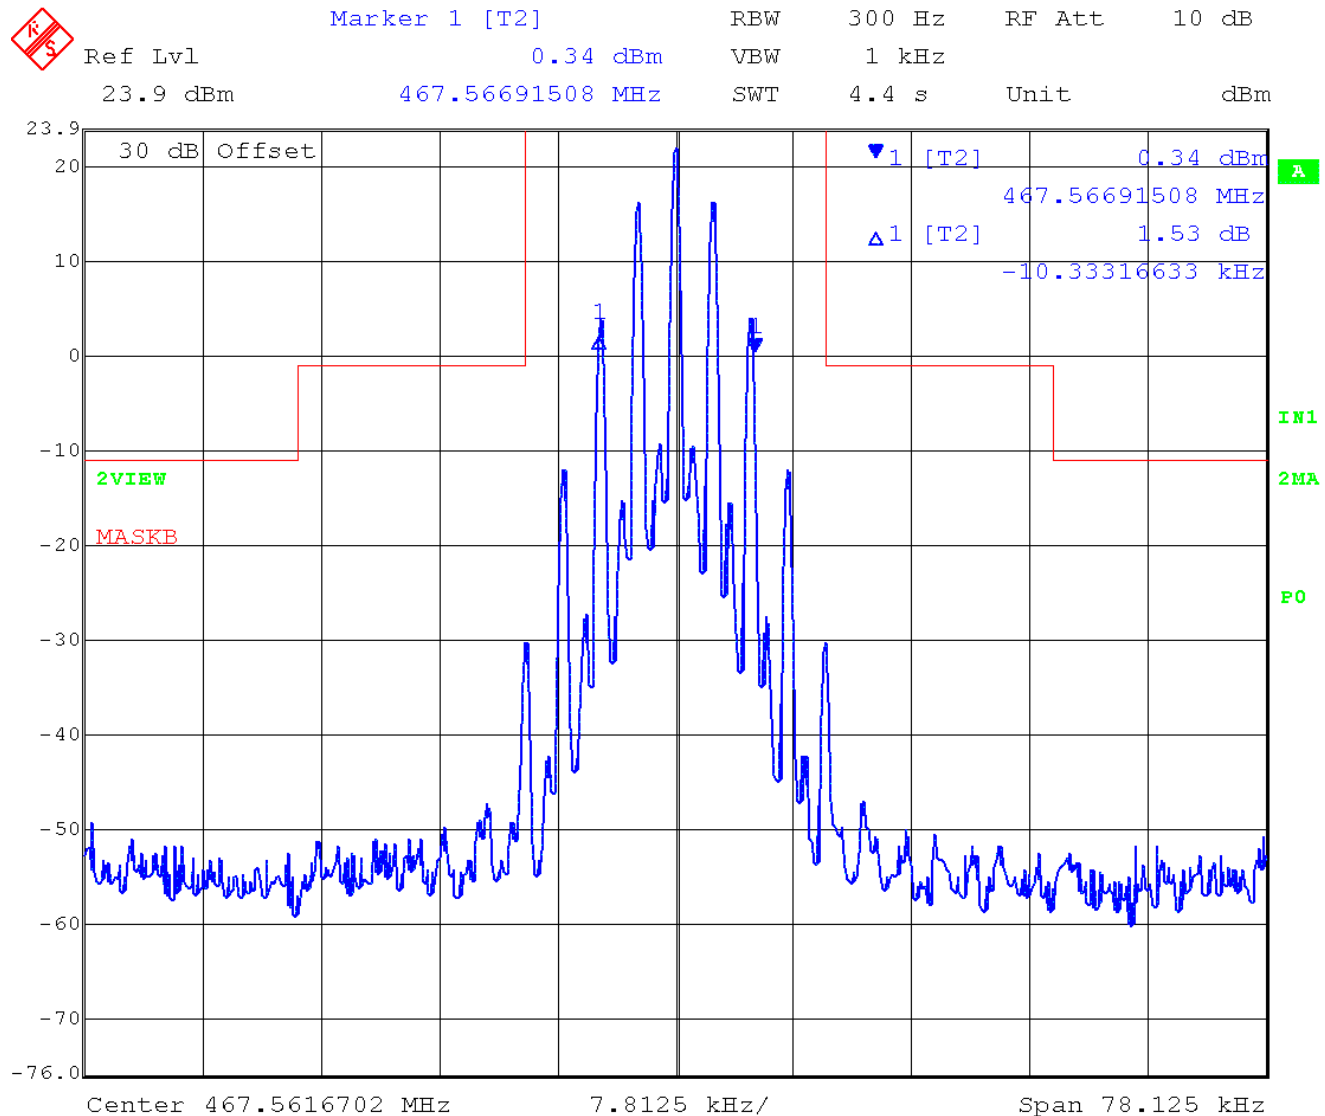

Date: 19.AUG.2014 08:46:42

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

IC 99% Power Bandwidth



Marker 1 [T2]

RBW 300 Hz RF Att 10 dB

Ref Lvl 21.73 dBm

VBW 1 kHz


23.9 dBm

467.56174850 MHz

SWT 4.4 s

Unit

dBm

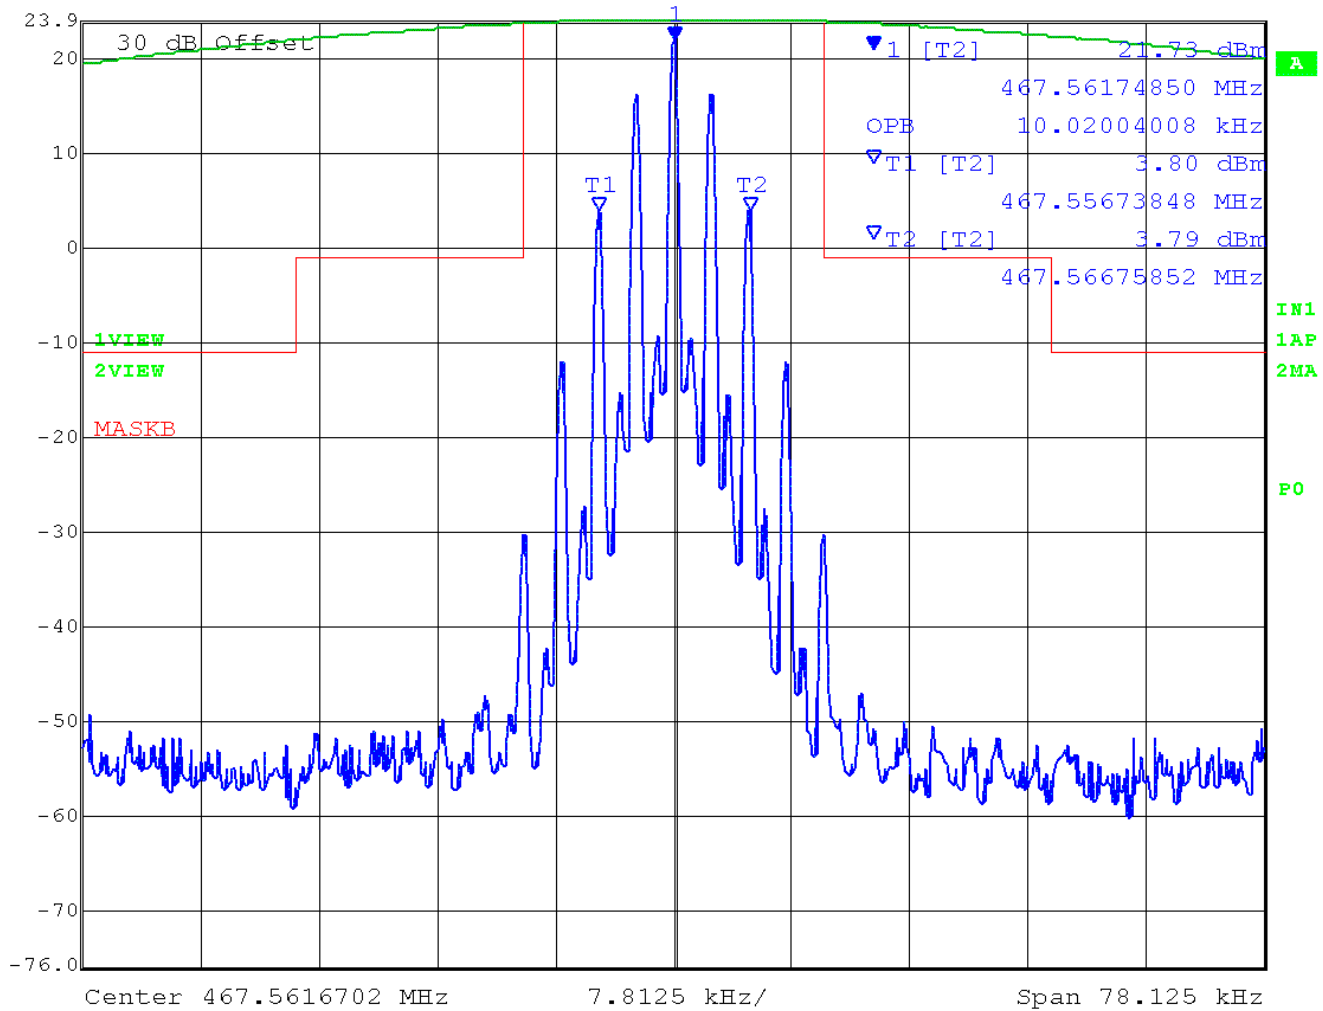

Date: 19.AUG.2014 08:41:39

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION


FCC ID: BBO0131B

IC: 906A-0131B

Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

GMRS OCCUPIED BANDWIDTH MASK B

FCC 20dB Bandwidth

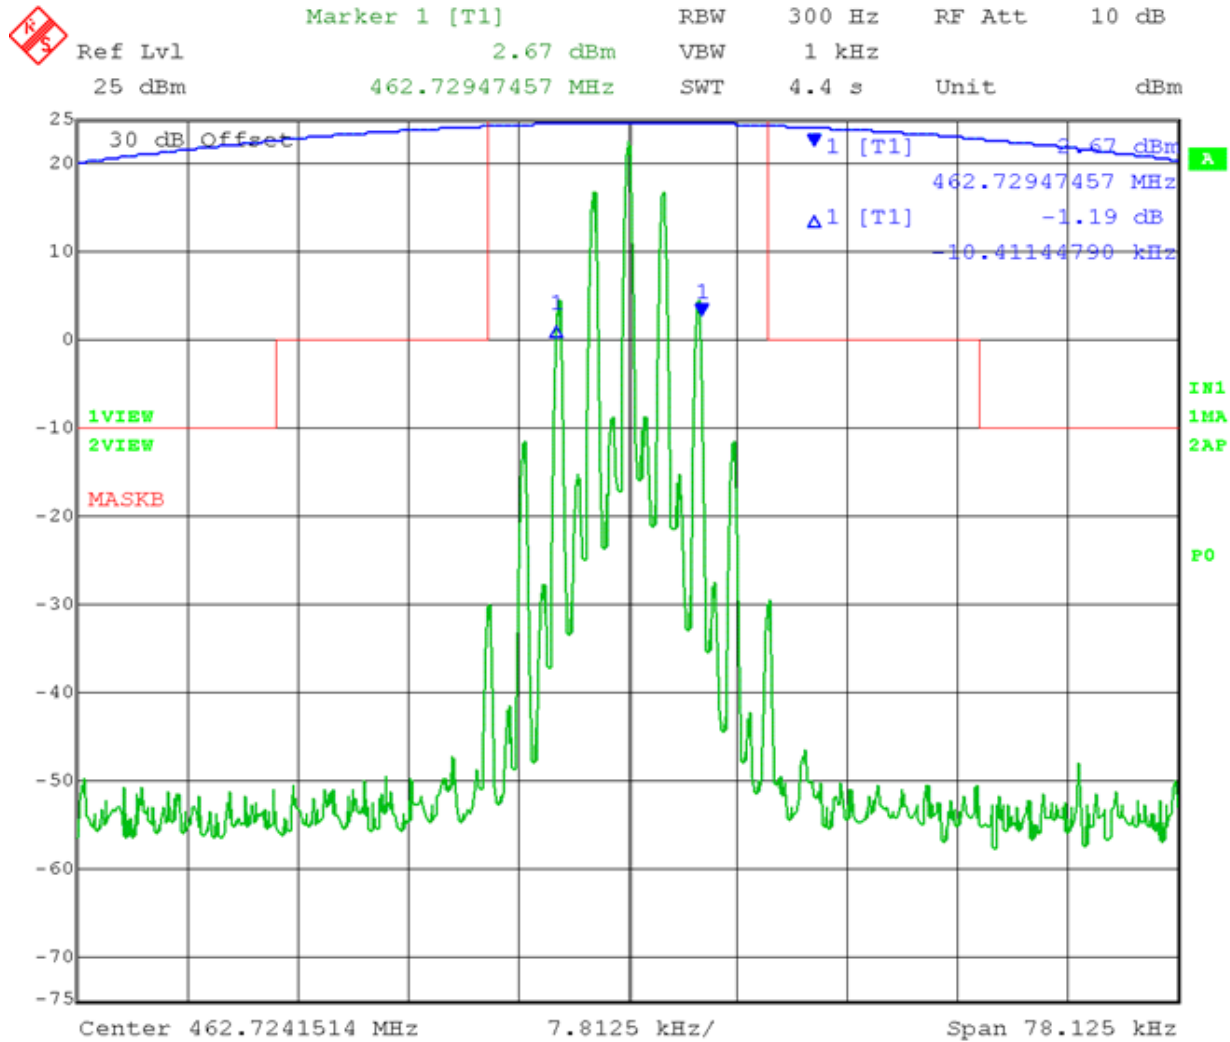

Date: 19.AUG.2014 08:54:09


[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

IC 99% Power Bandwidth



Marker 1 [T1] RBW 300 Hz RF Att 10 dB
 Ref Lvl 22.36 dBm VBW 1 kHz
 25 dBm 462.72430799 MHz SWT 4.4 s Unit dBm

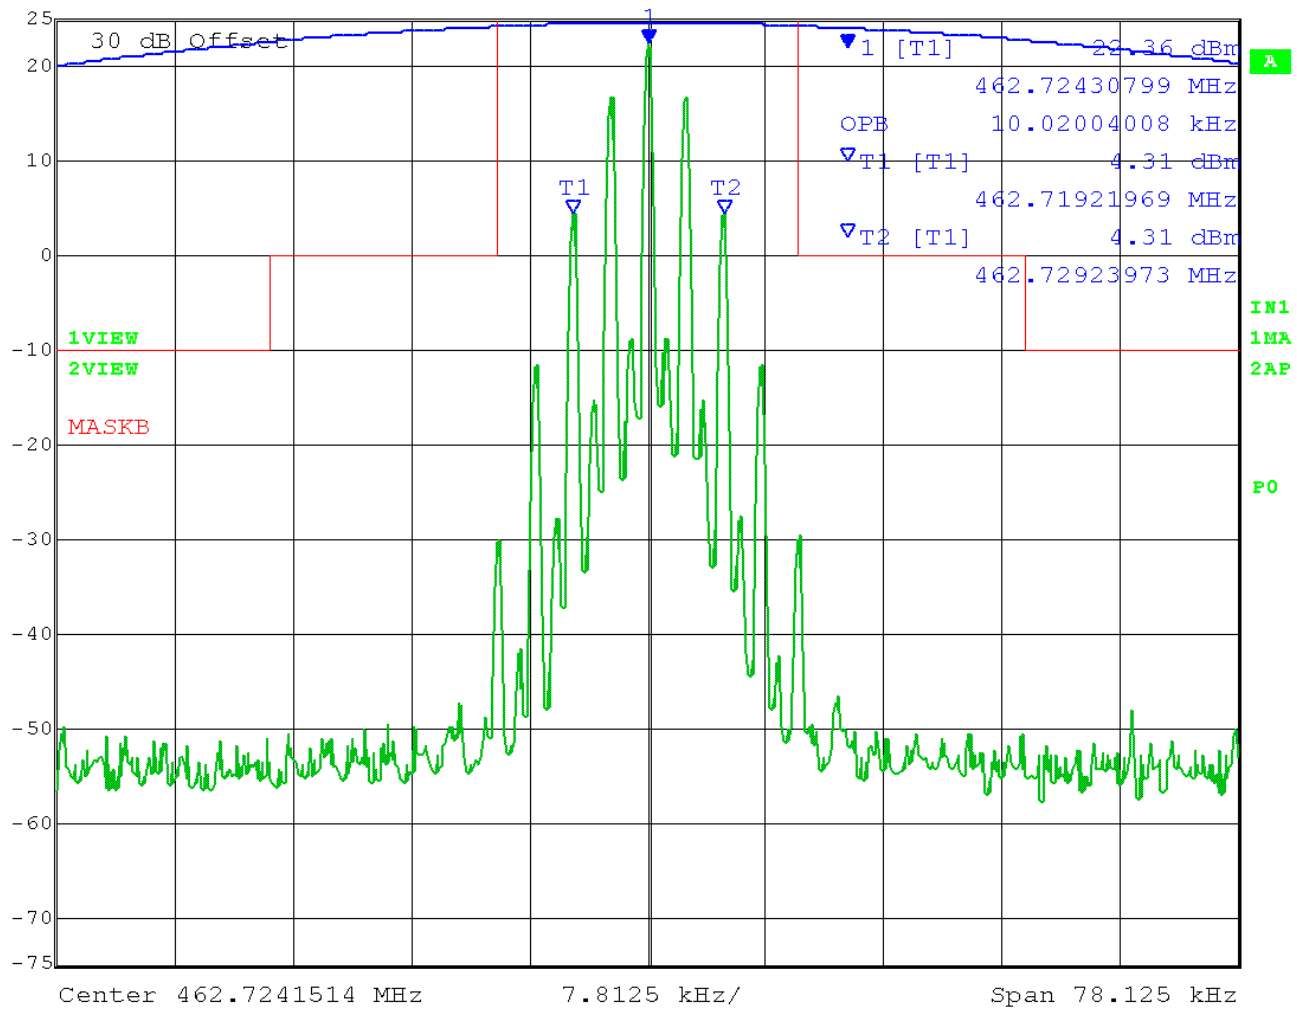

Date: 19.AUG.2014 08:58:52

Table of Contents

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C\COBRA\1353AUT14\1353AUT14TestReport.docx

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: [FCC Part 2.1053](#), [95.635\(b\)\(7\)](#), [IC RSS-210](#)

Requirements: GMRS: $43 + 10\log(.5) = 40$ dB

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Only the worst case for each antenna polarity is shown.

Test Data (GMRS):

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dBc	Bandwidth - BW - kHz
462.72	Fixed	27.00	0.50	40.00	12.5
Emission Frequency (MHz)	Ant. Polarity		Below Carrier (dBc)	Margin	
925.45	V		75.20	35.20	
1,388.18	H		64.46	24.46	
1,850.90	H		56.08	16.08	
2,313.63	V		66.07	26.07	
2,776.35	V		69.45	29.45	
3,239.08	H		72.65	32.65	
3,701.80	H		62.55	22.55	
4,164.53	H		56.13	16.13	

NE = No emission found **NF** = Only the noise floor was present

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

Rule Parts. No.: [FCC Part 2.1053](#), [95.635\(b\)\(7\)](#), [IC RSS-210](#)

Requirements: FRS: $43 + 10\log(.5) = 40$ dB

Test Data (FRS):

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dBc	Bandwidth - BW - kHz
467.56	Fixed	27.00	0.50	40.00	20
Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)		Margin	
935.12	H	76.40		36.40	
1,402.69	H	59.49		19.49	
1,870.25	H	53.83		13.83	
2,337.81	V	66.32		26.32	
2,805.37	V	67.35		27.35	
3,272.93	H	66.28		26.28	
3,740.50	H	58.37		18.37	
4,208.06	H	60.52		20.52	
4,675.62	H	55.10		15.10	

NE = No emission found NF = Only the noise floor was present

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

FREQUENCY STABILITY

Rule Parts. No.: [FCC Part 2.1055](#) [Part 95.621\(b\)](#), [IC RSS-210](#)

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worst case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50° C.

Method of Measurements: ANSI/TIA 603-D:2004

Test Data:

Temperature	Frequency MHz	Cycles	PPM
25°C (reference)	462.724747		
-30°C	462.725635	-888	1.92
-20°C	462.725417	-670	1.45
-10°C	462.725596	-849	1.83
0°C	462.725584	-837	1.81
10°C	462.725459	-712	1.54
20°C	462.724977	-230	0.5
30°C	462.724542	205	-0.44
40°C	462.724433	314	-0.68
50°C	462.725034	-287	0.62
Battery Voltage	Frequency	Cycles	PPM
-15%	462.724742	5	-0.010
15%	462.724736	11	-0.020

Note: This EUT meets the frequency stability requirement for a FRS: +/- 2.5ppm over temp range of -20 degrees C to +50 degrees C. It also meets the GMRS frequency stability requirements: +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Coaxial Cable - Chamber 3 cable set	SemiFlex	NA	Chamber 3PC Set	1/13/14	1/13/16
Antenna-Active Loop	ETS-Lindgren	6502	00062529	10/09/2013	10/09/2015
Antenna: Biconnical	Eaton	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic	Eaton	96005	1243	05/31/13	05/31/15
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/05/2012	10/05/2014
EMI Test *Receiver*	Rhode & Schwarz	ESU 40	100320	03/21/15	03/21/17
Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	06/26/13	06/26/15
LISN	Electro-Metrics	FCC-25/2	2512	06/05/13	06/05/15
Modulation Analyzer	HP	8901A	3050A05856	09/26/14	09/26/14
Function Generator	SRS	DS340	25200	08/28/13	08/28/15

* EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

Applicant: COBRA ELECTRONICS CORPORATION
 FCC ID: BBO0131B
 IC: 906A-0131B
 Report: C:\COBRA\1353AUT14\1353AUT14TestReport.docx