



NSI/IEEE Std. C95.1-1992

in accordance with the requirements of
FCC Report and Order: ET Docket 93-62



FCC TEST REPORT

For

Notebook Computer

Trade Name: TOSHIBA

Model:

**Satellite P30W-B; Satellite Click 2 Pro P30W-B;
Satellite Click 2 Pro P35W-B; dynabook P53**

Issued to

**Quanta Computer Inc.
No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang,
Taoyuan Hsien, Taiwan, R.O.C.**

Issued by

Compliance Certification Services Inc.

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891,
Taiwan. (R.O.C.)**

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: 2014/04/30



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2014/04/30	Initial Issue	ALL	Scott Hsu



Table Of Contents

1	Certificate of Compliance (SAR Evaluation)	5
2	Description of Equipment Under Test	6
3	Requirements for Compliance Testing Defined	7
3.1	Requirements for Compliance Testing Defined by the FCC	7
4	Dosimetric Assessment System	8
4.1	Measurement System Diagram	9
4.2	System Components	10
5	Evaluation Procedures	13
6	SAR Measurement Procedures	15
6.1	Normal SAR Test Procedure	15
7	Device Under Test	17
7.1	Band Interface	17
7.2	Simultaneous Transmission	18
8	Summary of SAR Test Exclusion Configurations	19
8.1	Standalone SAR Test Exclusion Calculations	19
8.1.1	SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User	20
8.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User	22
8.2	Required Test Configuration	24
8.2.1	For WiFi and Bluetooth	25
9	Measurement Uncertainty	27
10	Exposure Limit	28
11	Tissue Dielectric Properties	29
11.1	Test Liquid Confirmation	29
11.2	Typical Composition of Ingredients for Liquid Tissue Phantoms	30
11.3	Simulating Liquids Parameter Check Results	31
12	System Performance Check	36
12.1	System Performance Check Results	37
13	RF Output Power Measurement	39
13.1	Wi-Fi (2.4 GHz Band)	39
13.2	Wi-Fi (5 GHz Band)	40
13.3	Bluetooth	46
14	SAR Measurements Results	47
14.1	Test of SIMYA Ant(Ant 1)	47
14.2	Test of Tonda Ant(Ant 2)	50
14.3	Summary of Highest SAR Values for Ant 1	53



14.4	Summary of Highest SAR Values for Ant 2.....	53
15	Simultaneous Transmission SAR Analysis.....	54
15.1	Estimated SAR for Simultaneous Transmission SAR Analysis.....	55
15.1.1	Estimated SAR for Wi-Fi and Bluetooth.....	56
15.2	Sum of the SAR for Simultaneous Transmission Analysis	57
15.2.1	Sum of the SAR for Ant 1 Wi-Fi & Bluetooth	57
15.2.2	Sum of the SAR for Ant 2 Wi-Fi & Bluetooth	58
16	Equipment List & Calibration Status	59
17	Facilities	60
18	Reference	60
19	Attachments.....	61



1 Certificate of Compliance (SAR Evaluation)

Applicant: Quanta Computer Inc.
No. 188, Wen Hwa 2nd RD., Kuei Shan Hsiang,
Taoyuan Hsien, Taiwan, R.O.C.

Equipment Under Test: Notebook Computer

Trade Name: TOSHIBA

Model Number: Satellite P30W-B, Satellite Click 2 Pro P30W-B, Satellite Click 2 Pro P35W-B, dynabook P53

Date of Test: April 01~ April 10, 2014

Device Category: PORTABLE DEVICES

Exposure Category: GENERAL POPULATION/UNCONTROLLED EXPOSURE

Applicable Standards	
FCC	● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03 ● KDB 447498 D01 General RF Exposure Guidance v05r02 ● KDB 616217 D04 SAR for laptop and tablets v01r01 ● KDB 248227 D01 SAR measurement for 802.11 a b g v01r02
Limit	
1.6W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Alex Wu
Section Manager
Compliance Certification Services Inc.

Tested by:

Scott Hsu
SAR Engineer
Compliance Certification Services Inc.



2 Description of Equipment Under Test

Product		Notebook Computer			
Trade Name		TOSHIBA			
Model Number		Satellite P30W-B; Satellite Click 2 Pro P30W-B; Satellite Click 2 Pro P35W-B; dynabook P53			
Transmitters		Wi-Fi & Bluetooth			
Modulation Technique		802.11a: Orthogonal Frequency Division Multiplexing (OFDM)			
		802.11b: Direct Sequence Spread Spectrum(DSSS)			
		802.11g: Orthogonal Frequency Division Multiplexing (OFDM)			
		802.11n: Orthogonal Frequency Division Multiplexing (OFDM)			
		802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)			
Antenna Specification		Ant 1	Brand name	SIMYA	
			Type	PIFA	
		Ant 2	Brand name	TONGDA Corporation	
			Type	PIFA	
Antenna	FCC Rule Parts	Frequency Range		Highest Reported 1-g SAR	
SIMYA	15.247	2412 - 2462 MHz		0.319 W/kg (Edge4 Position)	
		5725 - 5850 MHz		0.311 W/kg (Edge2 Position)	
	15.407	5150 - 5250 MHz		0.347 W/kg (Rear Position)	
		5250 - 5350 MHz		0.390 W/kg (Edge1 Position)	
		5500 - 5700 MHz		0.237 W/kg (Edge2 Position)	
TONGDA Corporation	15.247	2412 - 2462 MHz		0.336 W/kg (Edge4 Position)	
		5725 - 5850 MHz		0.947 W/kg (Edge1 Position)	
	15.407	5150 - 5250 MHz		0.624 W/kg (Edge2 Position)	
		5250 - 5350 MHz		0.511 W/kg (Edge4 Position)	
		5500 - 5700 MHz		0.598 W/kg (Edge1 Position)	
Rechargeable Li-polymer Battery–alternate		Tablet: Brand: TOSHIBA Model: PA5190U-1BRS Rating: 11.1V,41Wh Keyboard: Brand:TOSHIBA Model:PA5191U-1BRS Rating: 11.1V,27Wh			

Remark: The sample selected for test was prototype that approximated to production product and was provided by manufacturer



3 Requirements for Compliance Testing Defined

3.1 Requirements for Compliance Testing Defined by the FCC


The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992 [6].



4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY4/DAST5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN: 3554 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2003.

4.1 Measurement System Diagram

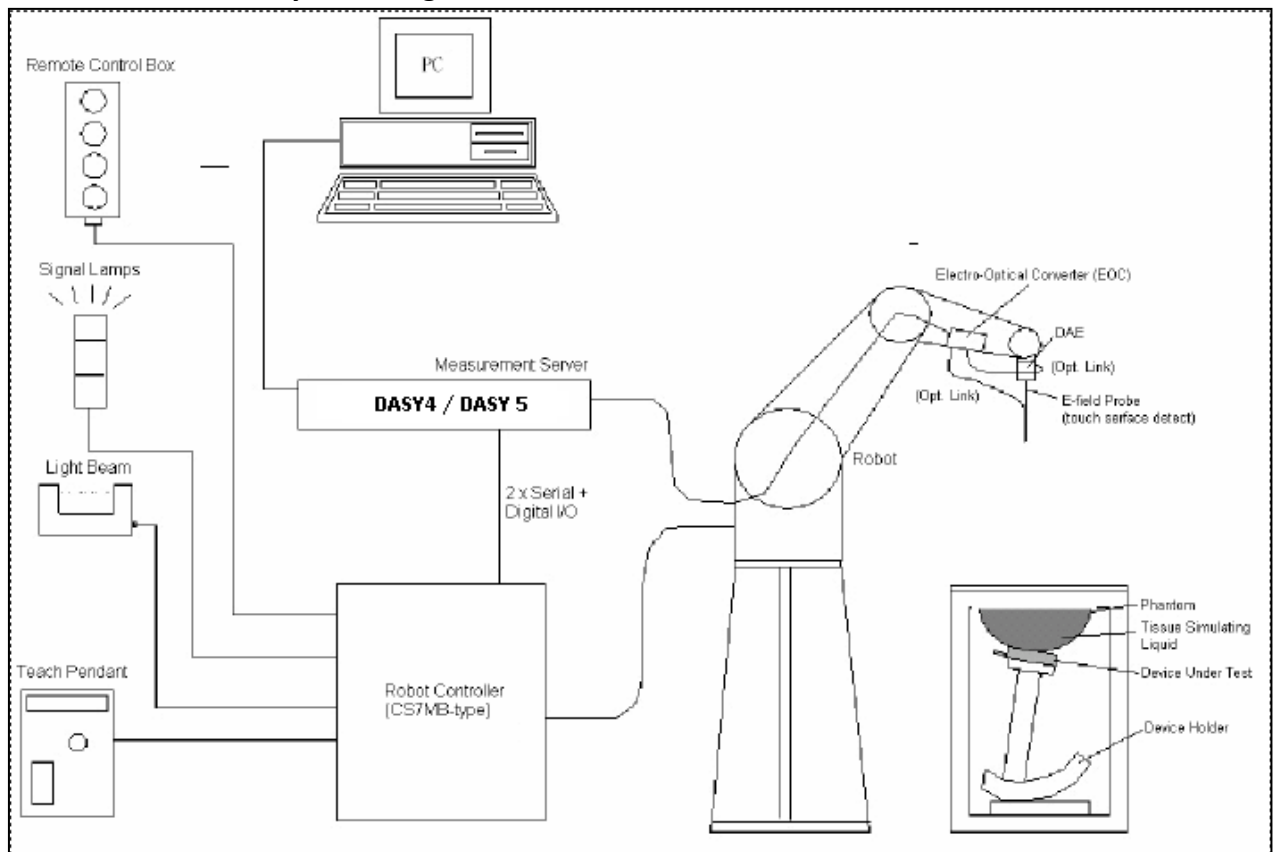

The DASY4/DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4/DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.



4.2 System Components

DASY4/DASY5 Measurement Server



The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements

- Construction:** Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
- Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.
Conversion Factors (CF) for HSL 900 and HSL 1800
CF-Calibration for other liquids and frequencies upon request.
- Frequency:** 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
- Directivity:** ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in HSL (rotation normal to probe axis)
- Dynamic Range:** 10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
(noise: typically < 1 μ W/g)



REV. 00



Dimensions: Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Interior of probe


SAM Phantom (V4.0)

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm

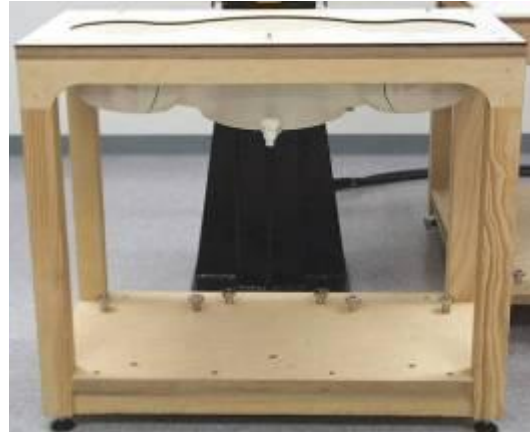

SAM Phantom (ELI4)

Construction: Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%)

Filling Volume: Approx. 25 liters

Dimensions: Major ellipse axis: 600 mm

Minor axis: 400 mm 500mm





Device Holder for SAM Twin Phantom

Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).



System Validation Kits for SAM Phantom (V4.0)

Construction: Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm



System Validation Kits for ELI4 phantom

Construction: Symmetrical dipole with I/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 2450, 5200, 5300, 5600, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

Dimensions: D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





5 Evaluation Procedures

Data Evaluation

The DASY4/DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	U_i	= Input signal of channel i	(i = x, y, z)
	cf	= Crest factor of exciting field	(DASY parameter)
	dcp_i	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	V_i	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$ for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
a_{ij}	= Sensor sensitivity factors for H-field probes
f	= Carrier frequency (GHz)
E_i	= Electric field strength of channel i in V/m
H_i	= Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

SAR	= local specific absorption rate in W/kg
E_{tot}	= total field strength in V/m
σ	= conductivity in [mho/m] or [Siemens/m]
ρ	= equivalent tissue density in g/cm ³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

P_{pwe}	= Equivalent power density of a plane wave in mW/cm ²
E_{tot}	= total electric field strength in V/m
H_{tot}	= total magnetic field strength in A/m



6 SAR Measurement Procedures

6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency ≤ 2 GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



- Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1) The zoom scan volume was set to 5x5x7 points at frequency ≤ 2 GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2 GHz to 4 GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4 GHz to 6 GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm	3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points losest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Maximum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

- Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

- Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.



7 Device Under Test

7.1 Band Interface

Tx Frequency Bands	802.11a/b/g/n/ac: 2412 - 2462 MHz 5180 – 5825 MHz
Mode	802.11 a/b/g/n HT20/HT40/ac

**7.2 Simultaneous Transmission**

No.	Conditions	Body SAR	Hotspot
1	WiFi 2.4GHz_Main Ant + Bluetooth	☒	☐
2	WiFi 2.4GHz_Aux Ant + Bluetooth	☒	☐
3	WiFi 5GHz_Main Ant + Bluetooth	☒	☐
4	WiFi 5GHz_Aux Ant + Bluetooth	☒	☐

Note(s):

The Bluetooth transmitter does simultaneously transmit with the WiFi transmitter. When the BT is turned on, it transmits on Chain 0 and the WiFi transmits on Chain 1.

☒: The Product can simultaneously transmit

☐: The Product can't simultaneously transmit



8 Summary of SAR Test Exclusion Configurations

8.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

**8.1.1 SAR Exclusion Calculations for Wi-Fi Antenna < 50mm from the User**

According to KDB 447498 v05 r01 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	15	32	3.0	4.0	4.0	297.0	203.0		10.0	10.0	10.0	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11g	2437	15	32	3.0	4.0	4.0	297.0	203.0		10.0	10.0	10.0	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2437	15	32	3.0	4.0	4.0	297.0	203.0		10.0	10.0	10.0	>50mm	>50mm	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	15	32	3.0	4.0	4.0	297.0	203.0		10.0	10.0	10.0	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11a	5180	13.5	22	3.0	4.0	4.0	297.0	203.0		10.0	10.0	10.0	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	13	20	3.0	4.0	4.0	297.0	203.0		9.2	9.2	9.2	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5500	13.5	22	3.0	4.0	4.0	297.0	203.0		10.3	10.3	10.3	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		10.5	10.5	10.5	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	12.5	18	3.0	4.0	4.0	297.0	203.0		8.2	8.2	8.2	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5260	12.5	18	3.0	4.0	4.0	297.0	203.0		8.3	8.3	8.3	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5520	13.5	22	3.0	4.0	4.0	297.0	203.0		10.3	10.3	10.3	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		10.5	10.5	10.5	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	13.5	22	3.0	4.0	4.0	297.0	203.0		10.1	10.1	10.1	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5310	10	10	3.0	4.0	4.0	297.0	203.0		4.6	4.6	4.6	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5500	13.5	22	3.0	4.0	4.0	297.0	203.0		10.3	10.3	10.3	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		10.5	10.5	10.5	>50mm	>50mm	N/A
Wi-Fi Main	5.2GHz	802.11 ac	5210	9.5	9	3.0	4.0	4.0	297.0	203.0		4.1	4.1	4.1	>50mm	>50mm	N/A
Wi-Fi Main	5.3GHz		5290	11.5	14	3.0	4.0	4.0	297.0	203.0		6.4	6.4	6.4	>50mm	>50mm	N/A
Wi-Fi Main	5.5GHz		5610	13.5	22	3.0	4.0	4.0	297.0	203.0		10.4	10.4	10.4	>50mm	>50mm	N/A
Wi-Fi Main	5.8GHz		5775	13.5	22	3.0	4.0	4.0	297.0	203.0		10.6	10.6	10.6	>50mm	>50mm	N/A



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Aux	2.4GHz	802.11b	2437	15	32	3.0	4.0	297.0	203.0	4.0		10.0	10.0	>50mm	>50mm	10.0	N/A
Wi-Fi Aux	2.4GHz	802.11g	2437	14	25	3.0	4.0	297.0	203.0	4.0		7.8	7.8	>50mm	>50mm	7.8	N/A
Wi-Fi Aux	2.4GHz	802.11n HT20	2437	15	32	3.0	4.0	297.0	203.0	4.0		10.0	10.0	>50mm	>50mm	10.0	N/A
Wi-Fi Aux	2.4GHz	802.11n HT40	2437	15	32	3.0	4.0	297.0	203.0	4.0		10.0	10.0	>50mm	>50mm	10.0	N/A
Wi-Fi Aux	5.2GHz	802.11a	5200	13.5	22	3.0	4.0	297.0	203.0	4.0		10.0	10.0	>50mm	>50mm	10.0	N/A
Wi-Fi Aux	5.3GHz		5260	13	20	3.0	4.0	297.0	203.0	4.0		9.2	9.2	>50mm	>50mm	9.2	N/A
Wi-Fi Aux	5.5GHz		5500	13.5	22	3.0	4.0	297.0	203.0	4.0		10.3	10.3	>50mm	>50mm	10.3	N/A
Wi-Fi Aux	5.8GHz		5745	13.5	22	3.0	4.0	297.0	203.0	4.0		10.5	10.5	>50mm	>50mm	10.5	N/A
Wi-Fi Aux	5.2GHz	802.11n HT20	5200	12.5	18	3.0	4.0	297.0	203.0	4.0		8.2	8.2	>50mm	>50mm	8.2	N/A
Wi-Fi Aux	5.3GHz		5260	12.5	18	3.0	4.0	297.0	203.0	4.0		8.3	8.3	>50mm	>50mm	8.3	N/A
Wi-Fi Aux	5.5GHz		5520	13.5	22	3.0	4.0	297.0	203.0	4.0		10.3	10.3	>50mm	>50mm	10.3	N/A
Wi-Fi Aux	5.8GHz		5745	13.5	22	3.0	4.0	297.0	203.0	4.0		10.5	10.5	>50mm	>50mm	10.5	N/A
Wi-Fi Aux	5.2GHz	802.11n HT40	5230	12.5	18	3.0	4.0	297.0	203.0	4.0		8.2	8.2	>50mm	>50mm	8.2	N/A
Wi-Fi Aux	5.3GHz		5310	10	10	3.0	4.0	297.0	203.0	4.0		4.6	4.6	>50mm	>50mm	4.6	N/A
Wi-Fi Aux	5.5GHz		5550	13.5	22	3.0	4.0	297.0	203.0	4.0		10.4	10.4	>50mm	>50mm	10.4	N/A
Wi-Fi Aux	5.8GHz		5755	13.5	22	3.0	4.0	297.0	203.0	4.0		10.6	10.6	>50mm	>50mm	10.6	N/A
Wi-Fi Aux	5.2GHz	802.11 ac	5210	9.5	9	3.0	4.0	297.0	203.0	4.0		4.1	4.1	>50mm	>50mm	4.1	N/A
Wi-Fi Aux	5.3GHz		5290	11.5	14	3.0	4.0	297.0	203.0	4.0		6.4	6.4	>50mm	>50mm	6.4	N/A
Wi-Fi Aux	5.5GHz		5610	13.5	22	3.0	4.0	297.0	203.0	4.0		10.4	10.4	>50mm	>50mm	10.4	N/A
Wi-Fi Aux	5.8GHz		5775	13.5	22	3.0	4.0	297.0	203.0	4.0		10.6	10.6	>50mm	>50mm	10.6	N/A

**8.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User**

According to KDB 447498 v05 r01, if the calculated Power threshold is less than the output power then SAR testing is required.


Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	2.4GHz	802.11b	2437	15	32	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2566.1	1626.1	N/A
Wi-Fi Main	2.4GHz	802.11g	2437	15	32	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2566.1	1626.1	N/A
Wi-Fi Main	2.4GHz	802.11n HT20	2437	15	32	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2566.1	1626.1	N/A
Wi-Fi Main	2.4GHz	802.11n HT40	2437	15	32	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2566.1	1626.1	N/A
Wi-Fi Main	5.2GHz	802.11a	5180	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.9	1595.9	N/A
Wi-Fi Main	5.3GHz		5260	13	20	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.4	1595.4	N/A
Wi-Fi Main	5.5GHz		5500	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2534.0	1594.0	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2532.6	1592.6	N/A
Wi-Fi Main	5.2GHz	802.11n HT20	5200	12.5	18	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.8	1595.8	N/A
Wi-Fi Main	5.3GHz		5260	12.5	18	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.4	1595.4	N/A
Wi-Fi Main	5.5GHz		5520	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2533.8	1593.8	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2532.6	1592.6	N/A
Wi-Fi Main	5.2GHz	802.11n HT40	5230	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.6	1595.6	N/A
Wi-Fi Main	5.3GHz		5310	10	10	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.1	1595.1	N/A
Wi-Fi Main	5.5GHz		5500	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2534.0	1594.0	N/A
Wi-Fi Main	5.8GHz		5745	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2532.6	1592.6	N/A
Wi-Fi Main	5.2GHz	802.11ac	5210	9.5	9	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.7	1595.7	N/A
Wi-Fi Main	5.3GHz		5290	11.5	14	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2535.2	1595.2	N/A
Wi-Fi Main	5.5GHz		5610	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2533.3	1593.3	N/A
Wi-Fi Main	5.8GHz		5775	13.5	22	3.0	4.0	4.0	297.0	203.0		<50mm	<50mm	<50mm	2532.4	1592.4	N/A



Antenna	Band	Mode	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
				dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Aux	2.4GHz	802.11b	2437	15	32	3.0	4.0	297	203	4.0		<50mm	<50mm	2566.1	1626.1	<50mm	N/A
Wi-Fi Aux	2.4GHz	802.11g	2437	14	25	3.0	4.0	297	203	4.0		<50mm	<50mm	2566.1	1626.1	<50mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT20	2437	15	32	3.0	4.0	297	203	4.0		<50mm	<50mm	2566.1	1626.1	<50mm	N/A
Wi-Fi Aux	2.4GHz	802.11n HT40	2437	15	32	3.0	4.0	297	203	4.0		<50mm	<50mm	2566.1	1626.1	<50mm	N/A
Wi-Fi Aux	5.2GHz	802.11a	5200	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.8	1595.8	<50mm	N/A
Wi-Fi Aux	5.3GHz		5260	13	20	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.4	1595.4	<50mm	N/A
Wi-Fi Aux	5.5GHz		5500	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2534.0	1594.0	<50mm	N/A
Wi-Fi Aux	5.8GHz		5745	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2532.6	1592.6	<50mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT20	5200	12.5	18	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.8	1595.8	<50mm	N/A
Wi-Fi Aux	5.3GHz		5260	12.5	18	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.4	1595.4	<50mm	N/A
Wi-Fi Aux	5.5GHz		5520	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2533.8	1593.8	<50mm	N/A
Wi-Fi Aux	5.8GHz		5745	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2532.6	1592.6	<50mm	N/A
Wi-Fi Aux	5.2GHz	802.11n HT40	5230	12.5	18	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.6	1595.6	<50mm	N/A
Wi-Fi Aux	5.3GHz		5310	10	10	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.1	1595.1	<50mm	N/A
Wi-Fi Aux	5.5GHz		5550	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2533.7	1593.7	<50mm	N/A
Wi-Fi Aux	5.8GHz		5755	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2532.5	1592.5	<50mm	N/A
Wi-Fi Aux	5.2GHz	802.11ac	5210	9.5	9	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.7	1595.7	<50mm	N/A
Wi-Fi Aux	5.3GHz		5290	11.5	14	3.0	4.0	297	203	4.0		<50mm	<50mm	2535.2	1595.2	<50mm	N/A
Wi-Fi Aux	5.5GHz		5610	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2533.3	1593.3	<50mm	N/A
Wi-Fi Aux	5.8GHz		5775	13.5	22	3.0	4.0	297	203	4.0		<50mm	<50mm	2532.4	1592.4	<50mm	N/A



8.2 Required Test Configuration

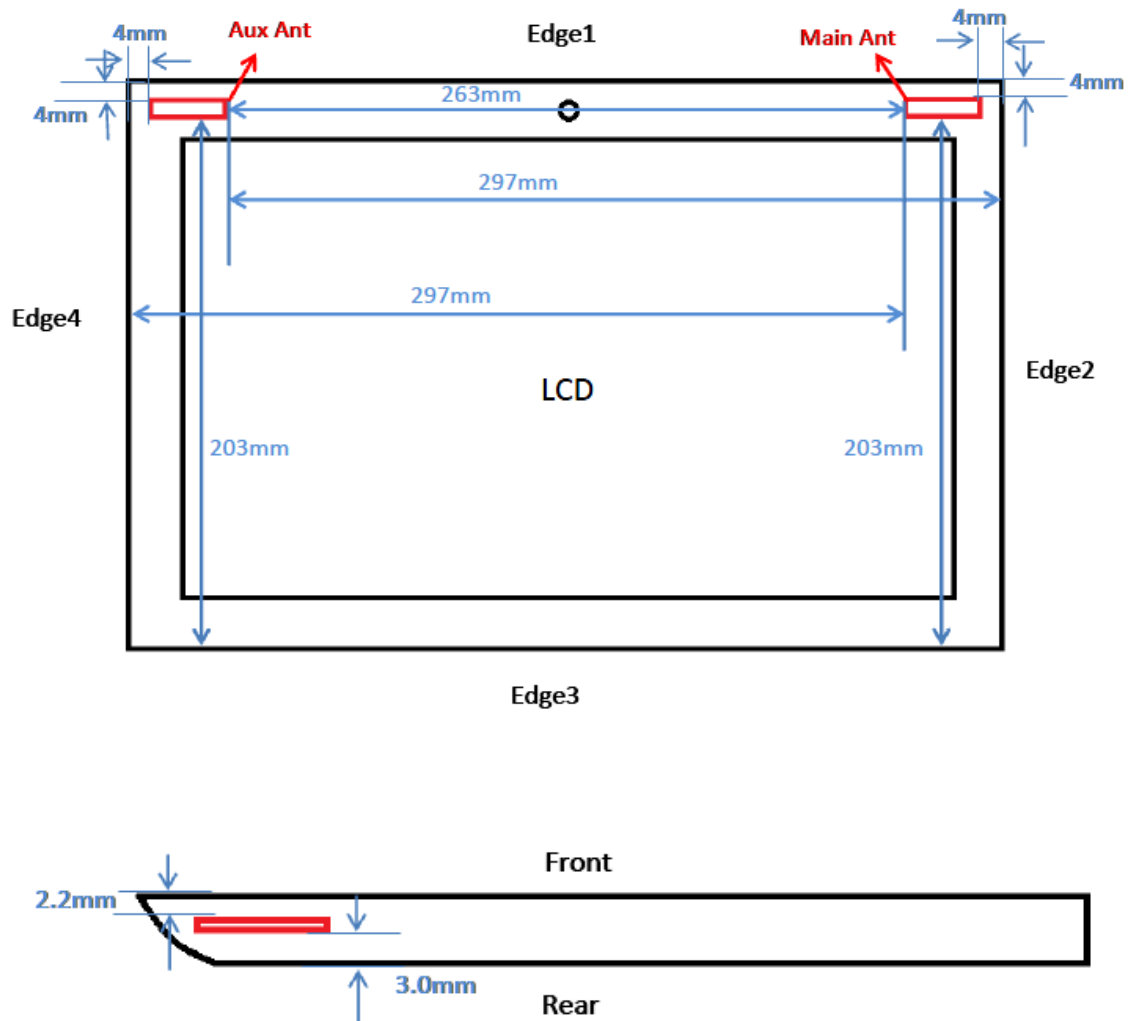

Separation Distance (mm)	Wi-Fi Antenna (Main)	Wi-Fi Antenna (Aux)
Top-Edge (Edge1)	4	4
Right-Edge (Edge2)	4	297
Bottom-Edge (Edge3)	203	203
Left-Edge (Edge4)	297	4
Rear Surface	3	3

**8.2.1 For WiFi and Bluetooth**

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
WiFi Main 802.11 b	YES	YES	YES	No	No
WiFi Main 802.11 g	YES	YES	YES	No	No
WiFi Main 802.11 n HT20	YES	YES	YES	No	No
WiFi Main 802.11 a_5.2GHz	YES	YES	YES	No	No
WiFi Main 802.11 a_5.3GHz	YES	YES	YES	No	No
WiFi Main 802.11 a_5.5GHz	YES	YES	YES	No	No
WiFi Main 802.11 a_5.8GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT20_5.2GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT20_5.3GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT20_5.5GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT20_5.8GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT40_5.2GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT40_5.3GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT40_5.5GHz	YES	YES	YES	No	No
WiFi Main 802.11 n HT40_5.8GHz	YES	YES	YES	No	No
WiFi Main 802.11 ac_5.2GHz	YES	YES	YES	No	No
WiFi Main 802.11 ac_5.3GHz	YES	YES	YES	No	No
WiFi Main 802.11 ac_5.5GHz	YES	YES	YES	No	No
WiFi Main 802.11 ac_5.8GHz	YES	YES	YES	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
WiFi Aux 802.11 b	YES	YES	No	No	YES
WiFi Aux 802.11 g	YES	YES	No	No	YES
WiFiAux 802.11 n HT20	YES	YES	No	No	YES
WiFi Aux 802.11 a_5.2GHz	YES	YES	No	No	YES
WiFi Aux 802.11 a_5.3GHz	YES	YES	No	No	YES
WiFi Aux 802.11 a_5.5GHz	YES	YES	No	No	YES
WiFi Aux 802.11 a_5.8GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT20_5.2GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT20_5.3GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT20_5.5GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT20_5.8GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT40_5.2GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT40_5.3GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT40_5.5GHz	YES	YES	No	No	YES
WiFi Aux 802.11 n HT40_5.8GHz	YES	YES	No	No	YES
WiFi Aux 802.11 ac_5.2GHz	YES	YES	No	No	YES
WiFi Aux 802.11 ac_5.3GHz	YES	YES	No	No	YES
WiFi Aux 802.11 ac_5.5GHz	YES	YES	No	No	YES
WiFi Aux 802.11 ac_5.8GHz	YES	YES	No	No	YES

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.



9 Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	c_i (1g)	Std. Unc.(1-g)	v_i or v_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.90	Normal	1	1	5.9	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
Hemispherical isotropy	9.60	Rectangular	$\sqrt{3}$	0	0.0	∞
Boundary Effect	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Linearity	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	0.30	Normal	1	1	0.3	∞
Response Time	0.00	Rectangular	$\sqrt{3}$	1	0.0	∞
Integration Time	0.00	Rectangular	$\sqrt{3}$	1	0.0	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.7	∞
Algorithms for Max. SAR Evaluation	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Dipole						
Dipole Axis to Liquid Distance	2.00	Normal	$\sqrt{3}$	1	1.2	∞
Input power and SAR drift meas.	4.70	Normal	$\sqrt{3}$	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	4.00	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	4.06	Normal	1	0.64	2.6	∞
Liquid Permittivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	2.23	Normal	1	0.6	1.3	∞
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	∞
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	∞
Combined Standard Uncertainty					9.44	611
Coverage Factor for 95%		$k_p=2$			18.87%	
Expanded Uncertainty		$k=2$			1.50dB	

Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram

Uncertainty Component	Uncertainty	Prob.	Div.	c_i (1g)	Std. Unc.(1-g)	v_i or v_{eff}
Measurement System						
Probe Calibration ($k=1$)	5.90	Normal	1	1	5.9	∞
Axial Isotropy	4.70	Rectangular	$\sqrt{3}$	1	2.7	∞
Hemispherical isotropy	9.60	Rectangular	$\sqrt{3}$	0	0.0	∞
Boundary Effect	0.90	Rectangular	$\sqrt{3}$	1	0.5	∞
Linearity	3.45	Rectangular	$\sqrt{3}$	1	2.0	∞
System Detection Limit	1.00	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	1.00	Normal	$\sqrt{3}$	1	1.0	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	0.5	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1.5	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1.7	∞
Algorithms for Max. SAR Evaluation	3.90	Rectangular	$\sqrt{3}$	1	2.3	∞
Dipole						
Dipole Axis to Liquid Distance	2.00	Normal	$\sqrt{3}$	1	1.2	∞
Input power and SAR drift meas.	4.70	Normal	$\sqrt{3}$	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	4.00	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	-4.22	Normal	1	0.64	-2.7	∞
Liquid Permittivity - deviation from target values	5.00	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	-4.83	Normal	1	0.6	-2.9	∞
Temp. Unc. - Conductivity	1.70	Rectangular	$\sqrt{3}$	0.78	0.77	∞
Temp. Unc. - Permittivity	0.30	Rectangular	$\sqrt{3}$	0.23	0.04	∞
Combined Standard Uncertainty					10.04	611
Coverage Factor for 95%		$k_p=2$			20.09%	
Expanded Uncertainty		$k=2$			1.59dB	



10 Exposure Limit

(A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



11 Tissue Dielectric Properties

11.1 Test Liquid Confirmation

Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below. 5% may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2003 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2003 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2003

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00



11.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2



11.3 Simulating Liquids Parameter Check Results

Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2014/4/1	Body 2450	2412	52.87	13.72	1.84	52.75	1.91	0.22%	-3.95%	± 5
		2437	52.76	13.81	1.87	52.72	1.94	0.09%	-3.47%	± 5
		2442	52.75	13.83	1.88	52.71	1.94	0.08%	-3.44%	± 5
		2462	52.70	13.91	1.90	52.68	1.97	0.02%	-3.30%	± 5
		2472	52.67	13.95	1.92	52.67	1.98	0.00%	-3.30%	± 5
2014/4/3	Body 5000	5180	48.06	17.69	5.09	49.02	5.28	-1.96%	-3.53%	± 5
		5200	48.00	17.69	5.11	49.00	5.30	-2.04%	-3.55%	± 5
		5220	47.97	17.71	5.14	48.98	5.32	-2.07%	-3.51%	± 5
		5240	47.93	17.72	5.16	48.96	5.35	-2.10%	-3.52%	± 5
		5260	47.91	17.75	5.19	48.94	5.37	-2.10%	-3.46%	± 5
		5280	47.89	17.76	5.21	48.92	5.40	-2.10%	-3.47%	± 5
		5300	47.86	17.74	5.22	48.90	5.42	-2.14%	-3.61%	± 5
		5320	47.81	17.77	5.25	48.86	5.44	-2.16%	-3.48%	± 5
		5500	47.57	17.87	5.46	48.60	5.65	-2.13%	-3.36%	± 5
		5520	47.53	17.87	5.48	48.58	5.67	-2.16%	-3.44%	± 5
		5540	47.49	17.89	5.51	48.56	5.70	-2.20%	-3.35%	± 5
		5560	47.46	17.89	5.53	48.54	5.72	-2.23%	-3.40%	± 5
		5580	47.42	17.91	5.55	48.52	5.75	-2.26%	-3.35%	± 5
		5600	47.41	17.94	5.58	48.50	5.77	-2.25%	-3.29%	± 5
		5620	47.40	17.92	5.60	48.46	5.79	-2.19%	-3.38%	± 5
		5640	47.35	17.94	5.62	48.42	5.81	-2.21%	-3.31%	± 5
		5660	47.32	17.94	5.64	48.38	5.84	-2.19%	-3.32%	± 5
		5680	47.27	17.95	5.66	48.34	5.86	-2.22%	-3.32%	± 5
		5700	47.23	17.97	5.69	48.30	5.88	-2.22%	-3.22%	± 5
		5745	47.19	18.00	5.75	48.26	5.93	-2.21%	-3.17%	± 5
		5765	47.19	18.02	5.77	48.24	5.96	-2.17%	-3.15%	± 5
		5785	47.15	18.01	5.79	48.22	5.98	-2.21%	-3.26%	± 5
		5805	47.10	18.02	5.81	48.19	6.01	-2.26%	-3.23%	± 5
		5825	47.07	18.03	5.83	48.15	6.03	-2.24%	-3.23%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2014/4/7	Body 5000	5180	47.64	18.31	5.27	49.02	5.28	-2.82%	-0.13%	± 5
		5200	47.60	18.32	5.29	49.00	5.30	-2.86%	-0.13%	± 5
		5220	47.57	18.34	5.32	48.98	5.32	-2.88%	-0.10%	± 5
		5240	47.53	18.35	5.34	48.96	5.35	-2.92%	-0.14%	± 5
		5260	47.47	18.37	5.37	48.94	5.37	-3.00%	-0.09%	± 5
		5280	47.44	18.39	5.39	48.92	5.40	-3.03%	-0.03%	± 5
		5300	47.41	18.39	5.41	48.90	5.42	-3.04%	-0.10%	± 5
		5320	47.37	18.42	5.44	48.86	5.44	-3.05%	0.05%	± 5
		5500	47.14	18.63	5.69	48.60	5.65	-3.01%	0.74%	± 5
		5520	47.09	18.62	5.71	48.58	5.67	-3.06%	0.65%	± 5
		5540	47.05	18.65	5.74	48.56	5.70	-3.10%	0.72%	± 5
		5560	47.02	18.64	5.76	48.54	5.72	-3.14%	0.64%	± 5
		5580	46.97	18.67	5.79	48.52	5.75	-3.20%	0.71%	± 5
		5600	46.94	18.71	5.82	48.50	5.77	-3.22%	0.88%	± 5
		5620	46.93	18.71	5.84	48.46	5.79	-3.16%	0.86%	± 5
		5640	46.88	18.73	5.87	48.42	5.81	-3.19%	0.94%	± 5
		5660	46.86	18.74	5.89	48.38	5.84	-3.15%	0.99%	± 5
		5680	46.82	18.76	5.92	48.34	5.86	-3.15%	1.07%	± 5
		5700	46.78	18.81	5.96	48.30	5.88	-3.15%	1.32%	± 5
		5745	46.75	18.85	6.02	48.26	5.93	-3.12%	1.40%	± 5
		5765	46.71	18.86	6.04	48.24	5.96	-3.16%	1.37%	± 5
		5785	46.66	18.86	6.06	48.22	5.98	-3.23%	1.31%	± 5
		5805	46.64	18.90	6.10	48.19	6.01	-3.22%	1.50%	± 5
		5825	46.62	18.93	6.13	48.15	6.03	-3.19%	1.58%	± 5
2014/4/8	Body 5000	5180	47.17	18.61	5.35	49.02	5.28	-3.78%	1.50%	± 5
		5200	47.13	18.62	5.38	49.00	5.30	-3.82%	1.50%	± 5
		5220	47.10	18.63	5.40	48.98	5.32	-3.85%	1.48%	± 5
		5240	47.05	18.63	5.42	48.96	5.35	-3.89%	1.41%	± 5
		5260	47.01	18.65	5.45	48.94	5.37	-3.95%	1.45%	± 5
		5280	46.97	18.67	5.48	48.92	5.40	-3.98%	1.50%	± 5
		5300	46.95	18.67	5.50	48.90	5.42	-3.99%	1.44%	± 5
		5320	46.91	18.71	5.53	48.86	5.44	-3.99%	1.59%	± 5
		5500	46.60	18.81	5.75	48.60	5.65	-4.12%	1.71%	± 5
		5520	46.55	18.81	5.77	48.58	5.67	-4.18%	1.67%	± 5
		5540	46.52	18.84	5.80	48.56	5.70	-4.20%	1.78%	± 5
		5560	46.50	18.84	5.82	48.54	5.72	-4.21%	1.73%	± 5
		5580	46.45	18.85	5.84	48.52	5.75	-4.26%	1.70%	± 5
		5600	46.41	18.87	5.87	48.50	5.77	-4.31%	1.73%	± 5
		5620	46.39	18.87	5.89	48.46	5.79	-4.27%	1.69%	± 5
		5640	46.34	18.89	5.92	48.42	5.81	-4.30%	1.83%	± 5
		5660	46.31	18.91	5.95	48.38	5.84	-4.27%	1.88%	± 5
		5680	46.27	18.91	5.97	48.34	5.86	-4.28%	1.88%	± 5
		5700	46.23	18.94	6.00	48.30	5.88	-4.28%	1.98%	± 5
		5745	46.15	18.96	6.05	48.26	5.93	-4.35%	1.97%	± 5
		5765	46.14	18.98	6.08	48.24	5.96	-4.34%	2.04%	± 5
		5785	46.10	18.98	6.10	48.22	5.98	-4.38%	1.96%	± 5
		5805	46.06	19.00	6.13	48.19	6.01	-4.42%	2.00%	± 5
		5825	46.04	19.01	6.15	48.15	6.03	-4.39%	2.04%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2014/4/9	Body 5000	5180	46.92	18.75	5.40	49.02	5.28	-4.28%	2.28%	± 5
		5200	46.87	18.76	5.42	49.00	5.30	-4.35%	2.27%	± 5
		5220	46.84	18.79	5.45	48.98	5.32	-4.37%	2.34%	± 5
		5240	46.80	18.80	5.47	48.96	5.35	-4.41%	2.34%	± 5
		5260	46.77	18.82	5.50	48.94	5.37	-4.44%	2.40%	± 5
		5280	46.74	18.84	5.53	48.92	5.40	-4.45%	2.41%	± 5
		5300	46.71	18.82	5.54	48.90	5.42	-4.48%	2.26%	± 5
		5320	46.67	18.86	5.57	48.86	5.44	-4.49%	2.41%	± 5
		5500	46.38	18.98	5.80	48.60	5.65	-4.58%	2.65%	± 5
		5520	46.33	18.97	5.82	48.58	5.67	-4.63%	2.55%	± 5
		5540	46.30	19.00	5.85	48.56	5.70	-4.66%	2.63%	± 5
		5560	46.26	19.01	5.87	48.54	5.72	-4.69%	2.61%	± 5
		5580	46.23	19.03	5.90	48.52	5.75	-4.71%	2.66%	± 5
		5600	46.21	19.05	5.93	48.50	5.77	-4.73%	2.73%	± 5
		5620	46.19	19.04	5.95	48.46	5.79	-4.69%	2.66%	± 5
		5640	46.13	19.06	5.97	48.42	5.81	-4.72%	2.72%	± 5
		5660	46.11	19.08	6.00	48.38	5.84	-4.69%	2.80%	± 5
		5680	46.08	19.09	6.02	48.34	5.86	-4.68%	2.84%	± 5
		5700	46.04	19.12	6.06	48.30	5.88	-4.68%	2.98%	± 5
		5745	45.96	19.13	6.10	48.26	5.93	-4.75%	2.87%	± 5
		5765	45.93	19.15	6.13	48.24	5.96	-4.78%	2.94%	± 5
		5785	45.89	19.16	6.16	48.22	5.98	-4.81%	2.94%	± 5
		5805	45.86	19.19	6.19	48.19	6.01	-4.83%	3.05%	± 5
		5825	45.85	19.20	6.21	48.15	6.03	-4.78%	3.06%	± 5
2014/4/10	Body 5000	5180	48.59	17.71	5.10	49.02	5.28	-0.87%	-3.40%	± 5
		5200	48.45	17.74	5.13	49.00	5.30	-1.12%	-3.30%	± 5
		5220	48.44	17.87	5.18	48.98	5.32	-1.10%	-2.67%	± 5
		5240	48.52	17.95	5.23	48.96	5.35	-0.91%	-2.27%	± 5
		5260	48.57	17.94	5.24	48.94	5.37	-0.76%	-2.40%	± 5
		5280	48.52	17.85	5.24	48.92	5.40	-0.81%	-2.95%	± 5
		5300	48.39	17.78	5.24	48.90	5.42	-1.05%	-3.41%	± 5
		5320	48.28	17.86	5.28	48.86	5.44	-1.20%	-2.99%	± 5
		5500	48.21	18.04	5.51	48.60	5.65	-0.80%	-2.43%	± 5
		5520	48.09	17.97	5.51	48.58	5.67	-1.01%	-2.87%	± 5
		5540	47.98	18.03	5.55	48.56	5.70	-1.19%	-2.64%	± 5
		5560	47.96	18.10	5.59	48.54	5.72	-1.19%	-2.28%	± 5
		5580	48.01	18.17	5.63	48.52	5.75	-1.06%	-1.96%	± 5
		5600	48.04	18.17	5.65	48.50	5.77	-0.94%	-2.02%	± 5
		5620	48.01	18.09	5.65	48.46	5.79	-0.93%	-2.46%	± 5
		5640	47.89	18.08	5.67	48.42	5.81	-1.10%	-2.55%	± 5
		5660	47.83	18.13	5.70	48.38	5.84	-1.14%	-2.29%	± 5
		5680	47.82	18.20	5.74	48.34	5.86	-1.07%	-1.96%	± 5
		5700	47.86	18.25	5.78	48.30	5.88	-0.92%	-1.73%	± 5
		5745	47.75	18.18	5.80	48.26	5.93	-1.04%	-2.21%	± 5
		5765	47.69	18.21	5.83	48.24	5.96	-1.12%	-2.09%	± 5
		5785	47.68	18.26	5.87	48.22	5.98	-1.11%	-1.92%	± 5
		5805	47.69	18.30	5.90	48.19	6.01	-1.04%	-1.72%	± 5
		5825	47.69	18.29	5.92	48.15	6.03	-0.96%	-1.82%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	
2014/4/11	Body 2450	2412	53.93	14.47	1.94	52.75	1.91	2.23%	1.33%	± 5
		2437	53.89	14.60	1.98	52.72	1.94	2.22%	2.05%	± 5
		2442	53.88	14.62	1.98	52.71	1.94	2.23%	2.11%	± 5
		2462	53.85	14.71	2.01	52.68	1.97	2.21%	2.27%	± 5
		2472	53.82	14.74	2.02	52.67	1.98	2.17%	2.18%	± 5
2014/4/12	Body 2450	2412	53.63	14.69	1.97	52.75	1.91	1.67%	2.86%	± 5
		2437	53.61	14.86	2.01	52.72	1.94	1.69%	3.81%	± 5
		2442	53.61	14.87	2.02	52.71	1.94	1.71%	3.89%	± 5
		2462	53.62	14.97	2.05	52.68	1.97	1.78%	4.06%	± 5
		2472	53.60	14.99	2.06	52.67	1.98	1.76%	3.94%	± 5
2014/4/14	Body 5000	5180	48.28	17.57	5.06	49.02	5.28	-1.52%	-4.16%	± 5
		5200	48.14	17.60	5.08	49.00	5.30	-1.75%	-4.06%	± 5
		5220	48.12	17.74	5.14	48.98	5.32	-1.76%	-3.39%	± 5
		5240	48.18	17.83	5.19	48.96	5.35	-1.59%	-2.96%	± 5
		5260	48.23	17.80	5.20	48.94	5.37	-1.45%	-3.16%	± 5
		5280	48.19	17.70	5.19	48.92	5.40	-1.49%	-3.78%	± 5
		5300	48.07	17.63	5.19	48.90	5.42	-1.70%	-4.22%	± 5
		5320	47.97	17.72	5.24	48.86	5.44	-1.83%	-3.74%	± 5
		5500	47.88	17.85	5.45	48.60	5.65	-1.47%	-3.47%	± 5
		5520	47.74	17.79	5.46	48.58	5.67	-1.72%	-3.84%	± 5
		5540	47.66	17.88	5.50	48.56	5.70	-1.86%	-3.43%	± 5
		5560	47.68	17.97	5.55	48.54	5.72	-1.77%	-2.97%	± 5
		5580	47.75	18.02	5.59	48.52	5.75	-1.60%	-2.77%	± 5
		5600	47.76	17.98	5.59	48.50	5.77	-1.53%	-3.04%	± 5
		5620	47.68	17.89	5.59	48.46	5.79	-1.62%	-3.56%	± 5
		5640	47.54	17.90	5.61	48.42	5.81	-1.83%	-3.51%	± 5
		5660	47.51	18.00	5.66	48.38	5.84	-1.80%	-3.04%	± 5
		5680	47.56	18.07	5.70	48.34	5.86	-1.62%	-2.64%	± 5
		5700	47.61	18.08	5.73	48.30	5.88	-1.43%	-2.62%	± 5
		5745	47.41	17.98	5.74	48.26	5.93	-1.74%	-3.27%	± 5
		5765	47.36	18.05	5.78	48.24	5.96	-1.82%	-2.95%	± 5
		5785	47.39	18.13	5.83	48.22	5.98	-1.72%	-2.62%	± 5
		5805	47.44	18.16	5.86	48.19	6.01	-1.55%	-2.49%	± 5
		5825	47.44	18.12	5.86	48.15	6.03	-1.47%	-2.76%	± 5



Date	Band	Freq(MHz)	Measured			Standard		Δ		Limit
			e' (ϵ_r)	e''	σ	e' (ϵ_r)	σ	e' (ϵ_r)	σ	± 5
2014/4/16	Body 5000	5180	49.46	17.96	5.17	49.02	5.28	0.89%	-2.04%	± 5
		5200	49.42	17.95	5.19	49.00	5.30	0.87%	-2.15%	± 5
		5220	49.40	17.99	5.22	48.98	5.32	0.86%	-1.99%	± 5
		5240	49.42	18.01	5.24	48.96	5.35	0.94%	-1.94%	± 5
		5260	49.39	18.02	5.27	48.94	5.37	0.92%	-1.97%	± 5
		5280	49.36	18.01	5.28	48.92	5.40	0.89%	-2.08%	± 5
		5300	49.32	18.00	5.30	48.90	5.42	0.86%	-2.23%	± 5
		5320	49.29	18.02	5.32	48.86	5.44	0.89%	-2.15%	± 5
		5500	49.08	18.18	5.55	48.60	5.65	0.99%	-1.71%	± 5
		5520	49.05	18.14	5.56	48.58	5.67	0.96%	-1.98%	± 5
		5540	49.00	18.14	5.58	48.56	5.70	0.91%	-2.00%	± 5
		5560	48.97	18.19	5.62	48.54	5.72	0.89%	-1.82%	± 5
		5580	48.96	18.24	5.65	48.52	5.75	0.91%	-1.60%	± 5
		5600	48.96	18.25	5.68	48.50	5.77	0.94%	-1.60%	± 5
		5620	48.92	18.21	5.68	48.46	5.79	0.96%	-1.85%	± 5
		5640	48.86	18.20	5.70	48.42	5.81	0.91%	-1.91%	± 5
		5660	48.84	18.25	5.74	48.38	5.84	0.94%	-1.66%	± 5
		5680	48.83	18.31	5.78	48.34	5.86	1.02%	-1.35%	± 5
		5700	48.84	18.36	5.81	48.30	5.88	1.12%	-1.13%	± 5
		5745	48.73	18.28	5.83	48.26	5.93	0.98%	-1.68%	± 5
		5765	48.68	18.32	5.87	48.24	5.96	0.93%	-1.50%	± 5
		5785	48.68	18.40	5.91	48.22	5.98	0.97%	-1.15%	± 5
		5805	48.70	18.44	5.95	48.19	6.01	1.06%	-0.96%	± 5
		5825	48.19	17.87	5.78	48.15	6.03	0.08%	-4.08%	± 5
2014/4/17	Body 5000	5180	49.07	17.68	5.09	49.02	5.28	0.11%	-3.54%	± 5
		5200	49.07	17.67	5.10	49.00	5.30	0.14%	-3.70%	± 5
		5220	49.07	17.64	5.12	48.98	5.32	0.18%	-3.91%	± 5
		5240	49.04	17.69	5.15	48.96	5.35	0.16%	-3.72%	± 5
		5260	49.00	17.76	5.19	48.94	5.37	0.13%	-3.37%	± 5
		5280	48.97	17.79	5.22	48.92	5.40	0.11%	-3.27%	± 5
		5300	48.94	17.76	5.23	48.90	5.42	0.08%	-3.51%	± 5
		5320	48.91	17.72	5.24	48.86	5.44	0.11%	-3.76%	± 5
		5500	48.69	17.98	5.49	48.60	5.65	0.18%	-2.75%	± 5
		5520	48.67	17.93	5.50	48.58	5.67	0.18%	-3.10%	± 5
		5540	48.62	17.87	5.50	48.56	5.70	0.13%	-3.46%	± 5
		5560	48.54	17.90	5.53	48.54	5.72	0.00%	-3.35%	± 5
		5580	48.50	18.01	5.58	48.52	5.75	-0.04%	-2.82%	± 5
		5600	48.50	18.07	5.62	48.50	5.77	0.01%	-2.55%	± 5
		5620	48.51	18.04	5.63	48.46	5.79	0.11%	-2.76%	± 5
		5640	48.49	17.99	5.64	48.42	5.81	0.15%	-3.05%	± 5
		5660	48.44	17.97	5.65	48.38	5.84	0.13%	-3.16%	± 5
		5680	48.38	18.06	5.70	48.34	5.86	0.09%	-2.70%	± 5
		5700	48.37	18.15	5.75	48.30	5.88	0.14%	-2.24%	± 5
		5745	48.33	18.06	5.77	48.26	5.93	0.16%	-2.84%	± 5
		5765	48.29	18.06	5.78	48.24	5.96	0.11%	-2.93%	± 5
		5785	48.25	18.16	5.84	48.22	5.98	0.07%	-2.43%	± 5
		5805	48.25	18.26	5.89	48.19	6.01	0.12%	-1.97%	± 5
		5825	48.25	18.23	5.90	48.15	6.03	0.20%	-2.15%	± 5



12 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4/DASY5 system with an E-field probe EX3DV4 SN: 3554 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ($dx=dy=5\text{ mm}$, $dz=5\text{ mm}$).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was $100\text{ mW}\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	728	2013/05/02	2450	1g	53.5	51.1
				10g	25.0	23.9
D5GHzV2	1004	2013/11/28	5200	1g	79.9	75.4
				10g	22.8	21.0
D5GHzV2	1004	2013/11/28	5300	1g	85.0	77.6
				10g	24.3	21.7
D5GHzV2	1004	2013/11/28	5600	1g	84.1	81.6
				10g	23.9	22.5
D5GHzV2	1004	2013/11/28	5800	1g	80.1	75.7
				10g	22.7	20.8



12.1 System Performance Check Results

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2014/4/1	D2450V2	728	Body	1g SAR:	51.10	51.50	0.78	± 5
				10g SAR:	23.90	24.40	2.09	± 5
2014/4/3	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	74.20	-1.59	± 5
				10g SAR:	21.00	20.90	-0.48	± 5
2014/4/3	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	75.30	-2.96	± 5
				10g SAR:	21.70	21.20	-2.30	± 5
2014/4/3	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	79.30	-2.82	± 5
				10g SAR:	22.50	22.30	-0.89	± 5
2014/4/3	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	75.80	0.13	± 5
				10g SAR:	20.80	21.40	2.88	± 5
2014/4/7	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	76.80	1.86	± 5
				10g SAR:	21.00	21.60	2.86	± 5
2014/4/7	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	78.10	0.64	± 5
				10g SAR:	21.70	21.90	0.92	± 5
2014/4/7	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	82.80	1.47	± 5
				10g SAR:	22.50	23.20	3.11	± 5
2014/4/7	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	75.50	-0.26	± 5
				10g SAR:	20.80	21.60	3.85	± 5
2014/4/8	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	78.10	3.58	± 5
				10g SAR:	21.00	21.90	4.29	± 5
2014/4/8	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	79.30	2.19	± 5
				10g SAR:	21.70	22.30	2.76	± 5
2014/4/8	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	83.40	2.21	± 5
				10g SAR:	22.50	23.40	4.00	± 5
2014/4/8	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	76.40	0.92	± 5
				10g SAR:	20.80	21.80	4.81	± 5
2014/4/9	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	74.90	-0.66	± 5
				10g SAR:	21.00	21.00	0.00	± 5
2014/4/9	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	79.90	2.96	± 5
				10g SAR:	21.70	22.40	3.23	± 5
2014/4/9	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	77.70	-4.78	± 5
				10g SAR:	22.50	21.60	-4.00	± 5
2014/4/9	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	76.60	1.19	± 5
				10g SAR:	20.80	21.60	3.85	± 5
2014/4/10	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	74.40	-1.33	± 5
				10g SAR:	21.00	20.90	-0.48	± 5
2014/4/10	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	75.50	-2.71	± 5
				10g SAR:	21.70	21.20	-2.30	± 5
2014/4/10	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	80.40	-1.47	± 5
				10g SAR:	22.50	22.60	0.44	± 5
2014/4/10	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	77.00	1.72	± 5
				10g SAR:	20.80	21.70	4.33	± 5



Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2014/4/11	D2450V2	728	Body	1g SAR:	51.10	50.40	-1.37	± 5
				10g SAR:	23.90	23.80	-0.42	± 5
2014/4/12	D2450V2	728	Body	1g SAR:	51.10	51.30	0.39	± 5
				10g SAR:	23.90	24.30	1.67	± 5
2014/4/14	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	73.80	-2.12	± 5
				10g SAR:	21.00	20.70	-1.43	± 5
2014/4/14	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	74.90	-3.48	± 5
				10g SAR:	21.70	21.00	-3.23	± 5
2014/4/14	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	79.50	-2.57	± 5
				10g SAR:	22.50	22.30	-0.89	± 5
2014/4/14	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	76.40	0.92	± 5
				10g SAR:	20.80	21.50	3.37	± 5
2014/4/16	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	75.30	-0.13	± 5
				10g SAR:	21.00	21.20	0.95	± 5
2014/4/16	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	76.40	-1.55	± 5
				10g SAR:	21.70	21.50	-0.92	± 5
2014/4/16	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	80.70	-1.10	± 5
				10g SAR:	22.50	22.70	0.89	± 5
2014/4/16	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	76.10	0.53	± 5
				10g SAR:	20.80	21.70	4.33	± 5
2014/4/17	D5GHzV2 (5.2GHz)	1004	Body	1g SAR:	75.40	74.10	-1.72	± 5
				10g SAR:	21.00	20.80	-0.95	± 5
2014/4/17	D5GHzV2 (5.3GHz)	1004	Body	1g SAR:	77.60	75.40	-2.84	± 5
				10g SAR:	21.70	21.20	-2.30	± 5
2014/4/17	D5GHzV2 (5.6GHz)	1004	Body	1g SAR:	81.60	79.90	-2.08	± 5
				10g SAR:	22.50	22.40	-0.44	± 5
2014/4/17	D5GHzV2 (5.8GHz)	1004	Body	1g SAR:	75.70	76.70	1.32	± 5
				10g SAR:	20.80	21.60	3.85	± 5



13 RF Output Power Measurement

13.1 Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels	
				802.11b	802.11g
802.11 b/g	2.4	2412	1 [#]	✓	▽
		2437	6	✓	▽
		2462	11 [#]	✓	▽

Notes

✓ = "default test channels"

▽ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements

the highest output channels closest to each of these channels should be tested.

The indicated Wi-Fi target powers in the following table are absolute maximums.

Output power table

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
2.4	802.11b	1	1	2412	13.5			±1.5	15.0	14.8		
			6	2437	13.5			±1.5	15.0	15.0		
			11	2462	13.5			±1.5	15.0	15.0		
	802.11b	1	1	2412		12.5		±1.5	14.0		13.9	
			6	2437		12.5		±1.5	14.0		14.0	
			11	2462		12.5		±1.5	14.0		13.9	
	802.11g	6	1	2412	11.5			±1.5	13.0	12.8		
			6	2437	13.5			±1.5	15.0	15.0		
			11	2462	11.5			±1.5	13.0	13.0		
	802.11g	6	1	2412		10.5		±1.5	12.0		11.8	
			6	2437		13.5		±1.5	15.0		15.0	
			11	2462		12.0		±1.5	13.5		13.4	
	802.11n HT20	MCS0	1	2412	11.5			±1.5	13.0	12.9		
			6	2437	13.5			±1.5	15.0	15.0		
			11	2462	11.5			±1.5	13.0	12.8		
	802.11n HT20	MCS0	1	2412		10.5		±1.5	12.0		11.9	
			6	2437		13.5		±1.5	15.0		15.0	
			11	2462		12.0		±1.5	13.5		13.5	
	802.11n HT20	MCS0	1	2412	6.5	6.5	9.5	±1.5	11.0	7.8	7.9	10.9
			6	2437	9.0	9.0	12.0	±1.5	13.5	10.4	10.5	13.5
			11	2462	6.0	6.0	9.0	±1.5	10.5	7.4	7.4	10.4
	802.11n HT40	MCS0	3	2412	10.5			±1.5	12.0	11.9		
			6	2437	13.5			±1.5	15.0	15.0		
			9	2462	11.5			±1.5	13.0	12.9		
	802.11n HT40	MCS0	3	2412		8.5		±1.5	10.0		9.8	
			6	2437		12.5		±1.5	14.0		13.8	
			9	2462		11.0		±1.5	12.5		12.4	
	802.11n HT40	MCS0	3	2412	4.0	4.0	7.0	±1.5	8.5	5.4	5.5	8.5
			6	2437	8.0	8.0	11.0	±1.5	12.5	9.4	9.3	12.4
			9	2462	7.5	7.5	10.5	±1.5	12.0	8.8	8.8	11.8

Note(s):

SAR is not required for 802.11g/HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels per KDB 248227 D01

**13.2 Wi-Fi (5 GHz Band)**

Required Test Channels per KDB 248227 D01

Mode	Band (GHz)	Freq. (MHz)	Ch #	Default Test Channels			
				§15.247		UNII	
802.11a	UNII	5180	36			✓	
		5200	40				*
		5220	44				*
		5240	48			✓	
		5260	52			✓	
		5280	56				*
		5300	60				*
		5320	64			✓	
		5500	100				*
		5520	104			✓	
		5540	108				*
		5560	112				*
		5580	116			✓	
		5600	120				*
		5620	124			✓	
		5640	128				*
		5660	132				*
		5680	136			✓	
		5700	140				*
	UNII or §15.247	5745	149	✓		✓	
		5765	153		*		*
		5785	157	✓			*
		5805	161		*	✓	
	§15.247	5825	165	✓			

Notes

✓ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

The indicated Wi-Fi target powers in the following table are absolute maximums



Wi-Fi 5.2GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.2	802.11a	6	36	5180	12.0			±1.5	13.5	13.4		
			40	5200	12.0			±1.5	13.5	13.4		
			44	5220	12.0			±1.5	13.5	13.5		
			48	5240	12.0			±1.5	13.5	13.4		
	802.11a	6	36	5180		11.0		±1.5	12.5		12.5	
			40	5200		12.0		±1.5	13.5		13.4	
			44	5220		12.0		±1.5	13.5		13.5	
			48	5240		12.0		±1.5	13.5		13.4	
	802.11n (HT20)	MCS0	36	5180	12.0			±1.5	13.5	13.3		
			40	5200	12.0			±1.5	13.5	13.4		
			44	5220	12.0			±1.5	13.5	13.5		
			48	5240	12.0			±1.5	13.5	13.4		
			36	5180		12.0		±1.5	13.5		13.4	
			40	5200		12.0		±1.5	13.5		13.4	
			44	5220		12.0		±1.5	13.5		13.5	
			48	5240		12.0		±1.5	13.5		13.3	
		MCS8	36	5180	7.5	7.5	10.5	±1.5	12.0	8.8	8.9	11.9
			40	5200	8.0	8.0	11.0	±1.5	12.5	9.4	9.4	12.4
			44	5220	8.0	8.0	11.0	±1.5	12.5	9.4	9.5	12.5
			48	5240	8.0	8.0	11.0	±1.5	12.5	9.3	9.4	12.4
		MCS0	38	5190	9.5			±1.5	11.0	10.8		
			46	5230	12.0			±1.5	13.5	13.4		
			38	5190		9.0		±1.5	10.5		10.5	
			46	5230		12.0		±1.5	13.5		13.4	
		MCS8	38	5190	3.5	3.5	6.5	±1.5	8.0	4.9	5.0	8.0
			46	5230	8.0	8.0	11.0	±1.5	12.5	9.4	9.5	12.5
	802.11ac	VTH0	42	5210	8.0			±1.5	9.5	9.5		
			42	5210		8.0		±1.5	9.5		9.5	
		VTH8	42	5210	3.5	3.5	6.5	±1.5	8.0	4.9	5.0	8.0

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



Wi-Fi 5.3GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.3	802.11a	6	52	5260	12.0			±1.5	13.5	13.4		
			56	5280	12.0			±1.5	13.5	13.4		
			60	5300	12.0			±1.5	13.5	13.5		
			64	5320	12.0			±1.5	13.5	13.3		
	802.11a	6	52	5260		12.0		±1.5	13.5		13.4	
			56	5280		12.0		±1.5	13.5		13.4	
			60	5300		12.0		±1.5	13.5		13.5	
			64	5320		12.0		±1.5	13.5		13.3	
	802.11n (HT20)	MCS0	52	5260	12.0			±1.5	13.5	13.4		
			56	5280	12.0			±1.5	13.5	13.4		
			60	5300	12.0			±1.5	13.5	13.5		
			64	5320	12.0			±1.5	13.5	13.4		
			52	5260		12.0		±1.5	13.5		13.4	
			56	5280		12.0		±1.5	13.5		13.5	
			60	5300		12.0		±1.5	13.5		13.5	
			64	5320		12.0		±1.5	13.5		13.5	
		MCS8	52	5260	8.5	8.5	11.5	±1.5	13.0	9.8	9.9	12.9
			56	5280	8.5	8.5	11.5	±1.5	13.0	9.8	9.8	12.8
			60	5300	8.5	8.5	11.5	±1.5	13.0	9.9	10.0	13.0
			64	5320	8.0	8.0	11.0	±1.5	12.5	9.8	10.0	12.9
	802.11n (HT40)	MCS0	54	5270	9.5			±1.5	11.0	11.0		
			62	5310	11.0			±1.5	12.5	12.4		
			54	5270		9.0		±1.5	10.5		10.5	
			62	5310		11.0		±1.5	12.5		12.4	
		MCS8	54	5270	4.5	4.5	7.5	±1.5	9.0	6.0	6.0	9.0
			62	5310	6.0	6.0	9.0	±1.5	10.5	7.5	7.5	10.5
	802.11ac	VTH0	58	5290	9.5			±1.5	11.0	11.0		
			58	5290		10.0		±1.5	11.5		11.5	
		VTH8	58	5290	4.5	4.5	7.5	±1.5	9.0	6.0	6.0	9.0

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



Wi-Fi 5.5GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11a	6	100	5500	12.0			±1.5	13.5	13.4		
			104	5520	12.0			±1.5	13.5	13.5		
			108	5540	12.0			±1.5	13.5	13.4		
			112	5560	12.0			±1.5	13.5	13.5		
			116	5580	12.0			±1.5	13.5	13.4		
			120	5600	12.0			±1.5	13.5	13.4		
			124	562	12.0			±1.5	13.5	13.3		
			128	5640	12.0			±1.5	13.5	13.4		
			132	5660	12.0			±1.5	13.5	13.5		
			136	5680	12.0			±1.5	13.5	13.5		
			140	5700	11.0			±1.5	12.5	12.5		
	802.11a	6	100	5500		12.0		±1.5	13.5		13.4	
			104	5520		12.0		±1.5	13.5		13.5	
			108	5540		12.0		±1.5	13.5		13.4	
			112	5560		12.0		±1.5	13.5		13.5	
			116	5580		12.0		±1.5	13.5		13.4	
			120	5600		12.0		±1.5	13.5		13.4	
			124	5620		12.0		±1.5	13.5		13.4	
			128	5640		12.0		±1.5	13.5		13.4	
			132	5660		12.0		±1.5	13.5		13.5	
			136	5680		12.0		±1.5	13.5		13.5	
			140	5700		11.0		±1.5	12.5		12.5	
	802.11n (HT20)	MCS0	100	5500	12.0			±1.5	13.5	13.4		
			104	5520	12.0			±1.5	13.5	13.5		
			108	5540	12.0			±1.5	13.5	13.4		
			112	5560	12.0			±1.5	13.5	13.5		
			116	5580	12.0			±1.5	13.5	13.4		
			120	5600	12.0			±1.5	13.5	13.4		
			124	5620	12.0			±1.5	13.5	13.3		
			128	5640	12.0			±1.5	13.5	13.4		
			132	5660	12.0			±1.5	13.5	13.5		
			136	5680	12.0			±1.5	13.5	13.5		
			140	5700	11.0			±1.5	12.5	12.5		
			100	5500		12.0		±1.5	13.5		13.4	
			104	5520		12.0		±1.5	13.5		13.5	
			108	5540		12.0		±1.5	13.5		13.4	
			112	5560		12.0		±1.5	13.5		13.5	
			116	5580		12.0		±1.5	13.5		13.4	
			120	5600		12.0		±1.5	13.5		13.4	
			124	5620		12.0		±1.5	13.5		13.4	
			128	5640		12.0		±1.5	13.5		13.4	
			132	5660		12.0		±1.5	13.5		13.5	
			136	5680		12.0		±1.5	13.5		13.5	
			140	5700		11.0		±1.5	12.5		12.5	



Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.5	802.11n (HT20)	MCS8	100	5500	6.0	6.0	9.0	±1.5	10.5	7.4	7.5	10.5
			104	5520	9.0	9.0	12.0	±1.5	13.5	10.5	10.4	13.5
			108	5540	9.0	9.0	12.0	±1.5	13.5	10.5	10.4	13.5
			112	5560	9.0	9.0	12.0	±1.5	13.5	10.4	10.3	13.4
			116	5580	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4
			120	5600	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4
			124	5620	9.0	9.0	12.0	±1.5	13.5	10.4	10.3	13.4
			128	5640	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4
			132	5660	9.0	9.0	12.0	±1.5	13.5	10.5	10.5	13.5
			136	5680	9.0	9.0	12.0	±1.5	13.5	10.5	10.4	13.5
			140	5700	6.0	6.0	9.0	±1.5	10.5	7.4	7.5	10.5
	802.11n (HT40)	MCS0	102	5510	9.0			±1.5	10.5	10.4		
			118	5550	12.0			±1.5	13.5	13.5		
			134	5670	12.0			±1.5	13.5	13.5		
			102	5510		9.5		±1.5	11.0		10.9	
			118	5550		12.0		±1.5	13.5		13.5	
			134	5670		12.0		±1.5	13.5		13.5	
	802.11n (HT40)	MCS8	102	5510	3.5	3.5	6.5	±1.5	8.0	5.0	5.0	8.0
			118	5550	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4
			134	5670	8.5	8.5	11.5	±1.5	13.0	10.0	10.0	13.0
	802.11ac	VTH0	106	5530	7.0			±1.5	8.5	8.5		
			122	5610	12.0			±1.5	13.5	13.5		
			138	5690	12.0			±1.5	13.5	13.4		
			106	5530		7.0		±1.5	8.5		8.5	
			122	5610		12.0		±1.5	13.5		13.5	
			138	5690		12.0		±1.5	13.5		13.5	
		VTH8	106	5530	2.0	2.0	5.0	±1.5	6.5	3.5	3.5	6.5
			122	5610	9.0	9.0	12.0	±1.5	13.5	10.4	10.5	13.5
			138	5690	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



Wi-Fi 5.8GHz Band:

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Avg. Pwr (dBm)		
					Main	Aux	Total			Main	Aux	Total
5.8	802.11a	6	149	5745	12.0			±1.5	13.5	13.3		
			153	5765	12.0			±1.5	13.5	13.4		
			157	5785	12.0			±1.5	13.5	13.5		
			161	5805	12.0			±1.5	13.5	13.4		
			165	5825	12.0			±1.5	13.5	13.3		
	802.11a	6	149	5745		12.0		±1.5	13.5		13.4	
			153	5765		12.0		±1.5	13.5		13.4	
			157	5785		12.0		±1.5	13.5		13.5	
			161	5805		12.0		±1.5	13.5		13.4	
			165	5825		12.0		±1.5	13.5		13.4	
	802.11n (HT20)	MCS0	149	5745	12.0			±1.5	13.5		13.4	
			153	5765	12.0			±1.5	13.5		13.4	
			157	5785	12.0			±1.5	13.5		13.5	
			161	5805	12.0			±1.5	13.5		13.4	
			165	5825	12.0			±1.5	13.5		13.4	
			149	5745		12.0		±1.5	13.5		13.4	
			153	5765		12.0		±1.5	13.5		13.5	
			157	5785		12.0		±1.5	13.5		13.5	
			161	5805		12.0		±1.5	13.5		13.5	
			165	5825		12.0		±1.5	13.5		13.4	
		MCS8	149	5745	9.0	9.0	12.0	±1.5	13.5	10.4	10.5	13.5
			153	5765	9.0	9.0	12.0	±1.5	13.5	10.5	10.5	13.5
			157	5785	9.0	9.0	12.0	±1.5	13.5	10.4	10.5	13.5
			161	5805	9.0	9.0	12.0	±1.5	13.5	10.5	10.5	13.5
			165	5825	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4
	802.11n (HT40)	MCS0	151	5755	12.0			±1.5	13.5	13.5		
			159	5795	12.0			±1.5	13.5	13.4		
			151	5755		12.0		±1.5	13.5		13.5	
			159	5795		12.0		±1.5	13.5		13.4	
		MCS8	151	5755	9.0	9.0	12.0	±1.5	13.5	10.5	10.4	13.5
			159	5795	9.0	9.0	12.0	±1.5	13.5	10.5	10.4	13.5
	802.11ac	VTH0	155	5775	12.0			±1.5	13.5	13.5		
			155	5775		12.0		±1.5	13.5		13.5	
		VTH8	155	5775	9.0	9.0	12.0	±1.5	13.5	10.4	10.4	13.4

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels per KDB 248227 D01



13.3 Bluetooth

Output power table

Band (GHz)	Mode	Ch #	Freq. (MHz)	Target Pwr (dBm)			Tune-up Tolerance (dBm)	Maximum Tune-up Pwr (dBm)	Measured Avg. Pwr (dBm)		
				Main	Aux	Total			Main	Aux	Total
Bluetooth	DH5	0	2402	3.0			± 1.5	4.5	3.8		
		39	2441	3.0			± 1.5	4.5	4.4		
		78	2480	3.0			± 1.5	4.5	4.5		
Bluetooth	3DH5	0	2402	-1.5			± 1.5	0.0	-2.8		
		39	2441	-1.5			± 1.5	0.0	-2.0		
		78	2480	-1.5			± 1.5	0.0	-1.6		
Bluetooth	BLE	0	2402	1.5			± 1.5	3.0	2.0		
		19	2440	1.5			± 1.5	3.0	2.7		
		39	2480	1.5			± 1.5	3.0	2.9		



14 SAR Measurements Results

14.1 Test of SIMYA Ant(Ant 1)

Wi-Fi (2.4GHz Band):

Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
2.4GHz	802.11b	Rear	6	2437	0	0	15.0	15.0	0.164	0.164	
			6	2437	1	0	14.0	14.0	0.182	0.182	
		Edge1	6	2437	0	0	15.0	15.0	0.104	0.104	
			6	2437	1	0	14.0	14.0	0.163	0.163	
		Edge2	6	2437	0	0	15.0	15.0	0.217	0.217	
		Edge4	6	2437	1	0	14.0	14.0	0.319	0.319	
		Tilted	6	2437	0	0	15.0	15.0	0.302	0.302	
			6	2437	1	0	14.0	14.0	0.198	0.198	



Wi-Fi (5 GHz Band):

Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)
							Tune up limit	Measured		
5 GHz	802.11a	Rear	44	5220	0	0	13.5	13.5	0.347	0.347
			60	5300	0	0	13.5	13.5	0.284	0.284
			112	5560	0	0	13.5	13.5	0.153	0.153
			132	5660	0	0	13.5	13.5	0.221	0.221
			157	5785	0	0	13.5	13.5	0.106	0.106
			44	5220	1	0	13.5	13.5	0.197	0.197
			60	5300	1	0	13.5	13.5	0.216	0.216
			112	5560	1	0	13.5	13.5	0.122	0.122
			132	5660	1	0	13.5	13.5	0.140	0.140
			157	5785	1	0	13.5	13.5	0.161	0.161
		Edge1	44	5220	0	0	13.5	13.5	0.168	0.168
			60	5300	0	0	13.5	13.5	0.125	0.125
			112	5560	0	0	13.5	13.5	0.124	0.124
			132	5660	0	0	13.5	13.5	0.232	0.232
			157	5785	0	0	13.5	13.5	0.217	0.217
			44	5220	1	0	13.5	13.5	0.253	0.253
			60	5300	1	0	13.5	13.5	0.390	0.390
			112	5560	1	0	13.5	13.5	0.159	0.159
			132	5660	1	0	13.5	13.5	0.180	0.180
			157	5785	1	0	13.5	13.5	0.140	0.140
		Edge2	44	5220	0	0	13.5	13.5	0.275	0.275
			60	5300	0	0	13.5	13.5	0.260	0.260
			112	5560	0	0	13.5	13.5	0.237	0.237
			132	5660	0	0	13.5	13.5	0.268	0.268
			157	5785	0	0	13.5	13.5	0.311	0.311
		Edge4	44	5220	1	0	13.5	13.5	0.318	0.318
			60	5300	1	0	13.5	13.5	0.346	0.346
			112	5560	1	0	13.5	13.5	0.175	0.175
			132	5660	1	0	13.5	13.5	0.143	0.143
			157	5785	1	0	13.5	13.5	0.097	0.097
		Tilted	44	5220	0	0	13.5	13.5	0.074	0.074
			60	5300	0	0	13.5	13.5	0.116	0.116
			112	5560	0	0	13.5	13.5	0.106	0.106
			132	5660	0	0	13.5	13.5	0.260	0.260
			157	5785	0	0	13.5	13.5	0.136	0.136
			44	5220	1	0	13.5	13.5	0.089	0.089
			60	5300	1	0	13.5	13.5	0.142	0.142
			112	5560	1	0	13.5	13.5	0.121	0.121
			132	5660	1	0	13.5	13.5	0.063	0.063
			157	5785	1	0	13.5	13.5	0.154	0.154



Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
5 GHz	802.11ac	Rear	42	5210	0	0	9.5	9.5	0.019	0.019	
			58	5290	0	0	11.0	11.0	0.136	0.136	
			122	5610	0	0	13.5	13.5	0.279	0.279	
			155	5775	0	0	13.5	13.5	0.283	0.283	
			42	5210	1	0	9.5	9.5	0.174	0.174	
			58	5290	1	0	11.5	11.5	0.153	0.153	
			122	5610	1	0	13.5	13.5	0.173	0.173	
			155	5775	1	0	13.5	13.5	0.150	0.150	
		Edge1	42	5210	0	0	9.5	9.5	0.018	0.018	
			58	5290	0	0	11.0	11.0	0.046	0.046	
			122	5610	0	0	13.5	13.5	0.086	0.086	
			155	5775	0	0	13.5	13.5	0.117	0.117	
			42	5210	1	0	9.5	9.5	0.058	0.058	
			58	5290	1	0	11.5	11.5	0.117	0.117	
			122	5610	1	0	13.5	13.5	0.104	0.104	
			155	5775	1	0	13.5	13.5	0.083	0.083	
		Edge2	42	5210	0	0	9.5	9.5	0.080	0.080	
			58	5290	0	0	11.0	11.0	0.088	0.088	
			122	5610	0	0	13.5	13.5	0.183	0.183	
			155	5775	0	0	13.5	13.5	0.459	0.459	
		Edge4	42	5210	1	0	9.5	9.5	0.139	0.139	
			58	5290	1	0	11.5	11.5	0.175	0.175	
			122	5610	1	0	13.5	13.5	0.063	0.063	
			155	5775	1	0	13.5	13.5	0.027	0.027	
		Tilted	42	5210	0	0	9.5	9.5	0.056	0.056	
			58	5290	0	0	11.0	11.0	0.086	0.086	
			122	5610	0	0	13.5	13.5	0.075	0.075	
			155	5775	0	0	13.5	13.5	0.061	0.061	
			42	5210	1	0	9.5	9.5	0.067	0.067	
			58	5290	1	0	11.5	11.5	0.096	0.096	
			122	5610	1	0	13.5	13.5	0.063	0.063	
			155	5775	1	0	13.5	13.5	0.038	0.038	

**14.2 Test of Tonda Ant(Ant 2)****Wi-Fi (2.4GHz Band):**

Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
2.4GHz	802.11b	Rear	6	2437	0	0	15.0	15.0	0.205	0.205	
			6	2437	1	0	14.0	14.0	0.195	0.195	
		Edge1	6	2437	0	0	15.0	15.0	0.113	0.113	
			6	2437	1	0	14.0	14.0	0.155	0.155	
		Edge2	6	2437	0	0	15.0	15.0	0.285	0.285	
		Edge4	6	2437	1	0	14.0	14.0	0.336	0.336	
		Tilted	6	2437	0	0	15.0	15.0	0.237	0.237	
			6	2437	1	0	14.0	14.0	0.182	0.182	



Wi-Fi (5 GHz Band):

Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
5 GHz	802.11a	Rear	44	5220	0	0	13.5	13.5	0.164	0.164	
			60	5300	0	0	13.5	13.5	0.255	0.255	
			112	5560	0	0	13.5	13.5	0.370	0.370	
			132	5660	0	0	13.5	13.5	0.451	0.451	
			157	5785	0	0	13.5	13.5	0.316	0.316	
			44	5220	1	0	13.5	13.5	0.229	0.229	
			60	5300	1	0	13.5	13.5	0.182	0.182	
			112	5560	1	0	13.5	13.5	0.497	0.497	
			132	5660	1	0	13.5	13.5	0.314	0.314	
			157	5785	1	0	13.5	13.5	0.602	0.602	
		Edge1	44	5220	0	0	13.5	13.5	0.300	0.300	
			60	5300	0	0	13.5	13.5	0.231	0.231	
			100	5500	0	0	13.5	13.5	0.374	0.374	
			112	5560	0	0	13.5	13.5	0.176	0.176	
			132	5660	0	0	13.5	13.5	0.598	0.598	
			136	5680	0	0	13.5	13.5	0.590	0.590	
			157	5785	0	0	13.5	13.5	0.902	0.902	
			157	5785	0	0	13.5	13.5	0.947	0.947	1
			44	5220	1	0	13.5	13.5	0.198	0.198	
			60	5300	1	0	13.5	13.5	0.147	0.147	
			112	5560	1	0	13.5	13.5	0.160	0.160	
			132	5660	1	0	13.5	13.5	0.180	0.180	
			157	5785	1	0	13.5	13.5	0.053	0.053	
		Edge2	44	5660	0	0	13.5	13.5	0.624	0.624	
			60	5660	0	0	13.5	13.5	0.502	0.502	
			112	5660	0	0	13.5	13.5	0.450	0.450	
			132	5660	0	0	13.5	13.5	0.182	0.182	
			157	5660	0	0	13.5	13.5	0.276	0.276	
		Edge4	44	5660	1	0	13.5	13.5	0.287	0.287	
			60	5660	1	0	13.5	13.5	0.511	0.511	
			112	5660	1	0	13.5	13.5	0.245	0.245	
			132	5660	1	0	13.5	13.5	0.200	0.200	
			157	5660	1	0	13.5	13.5	0.116	0.116	

Note(s):

- 1 Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR values are < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01)
- 1.1 Original SAR = 0.902/kg, therefore two times repeat SAR is required.
- 1.2 Repeat SAR = 0.947/kg < 1.45 W/kg
- 1.3 SAR variation= 4.9 % $< 20\%$



Band	Mode	Test Position	Channel	Freq. (MHz)	Chain	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note
							Tune up limit	Measured			
5 GHz	802.11a	Tilted	44	5220	0	0	13.5	13.5	0.167	0.167	
			60	5300	0	0	13.5	13.5	0.163	0.163	
			112	5560	0	0	13.5	13.5	0.256	0.256	
			132	5660	0	0	13.5	13.5	0.136	0.136	
			157	5785	0	0	13.5	13.5	0.230	0.230	
			44	5220	1	0	13.5	13.5	0.346	0.346	
			60	5300	1	0	13.5	13.5	0.283	0.283	
			112	5560	1	0	13.5	13.5	0.129	0.129	
			132	5660	1	0	13.5	13.5	0.144	0.144	
			157	5785	1	0	13.5	13.5	0.056	0.056	
	802.11ac	Rear	42	5210	0	0	9.5	9.5	0.285	0.285	
			58	5290	0	0	11.0	11.0	0.192	0.192	
			122	5610	0	0	13.5	13.5	0.061	0.061	
			155	5775	0	0	13.5	13.5	0.152	0.152	
			42	5210	1	0	9.5	9.5	0.046	0.046	
			58	5290	1	0	11.5	11.5	0.042	0.042	
			122	5610	1	0	13.5	13.5	0.032	0.032	
			155	5775	1	0	13.5	13.5	0.105	0.105	
		Edge1	42	5210	0	0	9.5	9.5	0.114	0.114	
			58	5290	0	0	11.0	11.0	0.181	0.181	
			122	5610	0	0	13.5	13.5	0.585	0.585	
			155	5775	0	0	13.5	13.5	0.750	0.750	
			42	5210	1	0	9.5	9.5	0.117	0.117	
			58	5290	1	0	11.5	11.5	0.099	0.099	
			122	5610	1	0	13.5	13.5	0.110	0.110	
			155	5775	1	0	13.5	13.5	0.082	0.082	
		Edge2	42	5210	0	0	9.5	9.5	0.166	0.166	
			58	5290	0	0	11.0	11.0	0.255	0.255	
			122	5610	0	0	13.5	13.5	0.262	0.262	
			155	5775	0	0	13.5	13.5	0.254	0.254	
		Edge4	42	5210	1	0	9.5	9.5	0.238	0.238	
			58	5290	1	0	11.5	11.5	0.303	0.303	
			122	5610	1	0	13.5	13.5	0.180	0.180	
			155	5775	1	0	13.5	13.5	0.120	0.120	
		Tilted	42	5210	0	0	9.5	9.5	0.083	0.083	
			58	5290	0	0	11.0	11.0	0.074	0.074	
			122	5610	0	0	13.5	13.5	0.150	0.150	
			155	5775	0	0	13.5	13.5	0.173	0.173	
			42	5210	1	0	9.5	9.5	0.149	0.149	
			58	5290	1	0	11.5	11.5	0.233	0.233	
			122	5610	1	0	13.5	13.5	0.098	0.098	
			155	5775	1	0	13.5	13.5	0.057	0.057	



14.3 Summary of Highest SAR Values for Ant 1

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
WiFi 2.4 GHz	Edge4	802.11b	0.319
WiFi 5.2 GHz	Rear	802.11a	0.347
WiFi 5.3 GHz	Edge1	802.11a	0.390
WiFi 5.5 GHz	Edge2	802.11a	0.237
WiFi 5.8 GHz	Edge2	802.11a	0.311

14.4 Summary of Highest SAR Values for Ant 2

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
WiFi 2.4 GHz	Edge4	802.11b	0.336
WiFi 5.2 GHz	Edge2	802.11a	0.624
WiFi 5.3 GHz	Edge4	802.11a	0.511
WiFi 5.5 GHz	Edge1	802.11a	0.598
WiFi 5.8 GHz	Edge1	802.11a	0.947



15 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the KDB 447498 D01) 4.3.2)3). Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i < 0.04$$



15.1 Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg

**15.1.1 Estimated SAR for Wi-Fi and Bluetooth**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Estimated 1-g SAR (W/Kg)					
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Front	Rear	Edge1	Edge2	Edge3	Edge4	Front
Wi-Fi Main	Bluetooth	2480	4.5	3	3.0	4.0	4.0	297.0	203.0		0.126	0.126	0.126	0.400	0.400	N/A
Wi-Fi Aux	2.4GHz	2437	15	32	3.0	4.0	297.0	203.0	4.0		Measured	Measured	0.400	0.400	Measured	N/A
Wi-Fi Aux	5.2GHz	2437	13.5	22	3.0	4.0	297.0	203.0	4.0		Measured	Measured	0.400	0.400	Measured	N/A
Wi-Fi Aux	5.3GHz	2437	13.5	22	3.0	4.0	297.0	203.0	4.0		Measured	Measured	0.400	0.400	Measured	N/A
Wi-Fi Aux	5.5GHz	2437	13.5	22	3.0	4.0	297.0	203.0	4.0		Measured	Measured	0.400	0.400	Measured	N/A
Wi-Fi Aux	5.8GHz	2437	13.5	22	3.0	4.0	297.0	203.0	4.0		Measured	Measured	0.400	0.400	Measured	N/A

**15.2 Sum of the SAR for Simultaneous Transmission Analysis****15.2.1 Sum of the SAR for Ant 1 Wi-Fi & Bluetooth**

Band	Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)
		Bluetooth	WiFi Aux	
2.4GHz	Rear	0.126	0.182	0.308
	Edge 1	0.126	0.163	0.289
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.319	0.445
	Tilted	0.126	0.198	0.324
5.2GHz	Rear	0.126	0.197	0.323
	Edge 1	0.126	0.253	0.379
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.318	0.444
	Tilted	0.126	0.089	0.215
5.3GHz	Rear	0.126	0.216	0.342
	Edge 1	0.126	0.390	0.516
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.346	0.472
	Tilted	0.126	0.142	0.268
5.5GHz	Rear	0.126	0.140	0.266
	Edge 1	0.126	0.180	0.306
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.175	0.301
	Tilted	0.126	0.121	0.247
5.8GHz	Rear	0.126	0.161	0.287
	Edge 1	0.126	0.140	0.266
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.097	0.223
	Tilted	0.126	0.154	0.280

Note(s):

As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required.

**15.2.2 Sum of the SAR for Ant 2 Wi-Fi & Bluetooth**

Band	Test Position	Simultaneous Transmission Scenario		Σ 1-g SAR (W/kg)
		Bluetooth	WiFi Aux	
2.4GHz	Rear	0.126	0.195	0.321
	Edge 1	0.126	0.155	0.281
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.336	0.462
	Tilted	0.126	0.182	0.308
5.2GHz	Rear	0.126	0.229	0.355
	Edge 1	0.126	0.198	0.324
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.287	0.413
	Tilted	0.126	0.346	0.472
5.3GHz	Rear	0.126	0.182	0.308
	Edge 1	0.126	0.147	0.273
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.511	0.637
	Tilted	0.126	0.283	0.409
5.5GHz	Rear	0.126	0.497	0.623
	Edge 1	0.126	0.180	0.306
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.245	0.371
	Tilted	0.126	0.144	0.270
5.8GHz	Rear	0.126	0.602	0.728
	Edge 1	0.126	0.053	0.179
	Edge 2	0.126	0.400	0.526
	Edge 4	0.126	0.116	0.242
	Tilted	0.126	0.056	0.182

Note(s):

As the Sum of the SAR is not greater than 1.6W/Kg, so SPLSR is not required.



16 Equipment List & Calibration Status

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
S-Parameter Network Analyzer	Agilent	E8358A	MY46213916	1	2014/6/3
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	4416	GB41291611	1	2014/9/10
Power Sensor	Agilent	8481H	MY41091956	1	2014/9/11
Data Acquisition Electronics (DAE)	SPEAG	DAE4	558	1	2014/7/24
Dosimetric E-Field Probe	SPEAG	EX3DV4	3554	1	2014/9/25
2450 MHz System Validation Dipole	SPEAG	D2450V2	728	1	2014/5/1
5GHz System Validation Dipole	SPEAG	D5GHzV2	1004	1	2014/11/27
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A



17 Facilities

All measurement facilities used to collect the measurement data are located at

- ☐ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- ☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

18 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



19 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR test plots for Wi-Fi 2.4GHz Band_Ant1
3	SAR test plots for Wi-Fi 5 GHz Band_Ant1
4	SAR test plots for Wi-Fi 2.4GHz Band_Ant2
5	SAR test plots for Wi-Fi 5 GHz Band_Ant2
6	SAR_Probe_EX3DV4_sn3554
7	SAR_DAE4_sn558
8	SAR_Dipole_D2450v2_sn728
9	SAR_Dipole_D5GHzv2_sn1004
10	T140326L07-SF PHOTOS

END OF REPORT