

InterLab®

FCC Measurement/Technical Report on

WLAN transceiver
INARI5-WLAN-1

FCC ID: 2ABVH-INARI51
IC: 11875A-INARI51

Report Reference: MDE_AAVAM_1408_FCCd_rev2

Test Laboratory:

7Layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

Table of Contents

0	Applied Standards and Test Summary	3
0.1	Technical Report Summary	3
0.2	FCC and IC Correlation Table	4
0.3	Measurement Summary	5
	Revision History	7
1	Administrative Data	8
1.1	Testing Laboratory	8
1.2	Project Data	8
1.3	Applicant Data	8
1.4	Manufacturer Data	8
2	Test object Data	9
2.1	General EUT Description	9
2.2	EUT Main components	10
2.3	Ancillary Equipment	10
2.4	Auxiliary Equipment	11
2.5	EUT Setups	11
2.6	Operating Modes	12
2.7	Special software used for testing	12
2.8	Product labelling	12
3	Test Results	13
3.1	Conducted emissions (AC power line)	13
3.2	Occupied bandwidth	16
3.3	Peak power output	20
3.4	Spurious RF conducted emissions	23
3.5	Spurious radiated emissions	31
3.6	Band edge compliance	36
3.7	Power density	42
4	Test Equipment	45
5	Photo Report	56
6	Setup Drawings	56

0 Applied Standards and Test Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, 558074 D01 DTS Meas Guidance v03r02, 2014-06-05" and are compliant to the new revision "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, 558074 D01 DTS Meas Guidance v03r03, 2015-06-09".

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.3 Measurement Summary.

0.2 FCC and IC Correlation Table

Correlation of measurement requirements for DTS devices (e.g. WLAN 2.4/5 GHz) equipment

The following tables show the correlation of measurement requirements for DTS (e.g. WLAN) equipment and Information Technology Equipment (ITE) from FCC and IC standards.

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-210 Issue 8: A8.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3 RSS Gen Issue 4: 5 / 7 *)

*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

0.3 Measurement Summary

FCC Part 15, Subpart C

§ 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.10

2013

OP-Mode

Setup

Port

Final Result

op-mode 2g

Setup_04

AC port

Passed

FCC Part 15, Subpart C

§ 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31 / section 8 of KDB 558074

10-1-13 Edition / v03r02

OP-Mode

Setup

Port

Final Result

op-mode 1b

Setup_01

Temp.ant.connector

Passed

op-mode 1g

Setup_01

Temp.ant.connector

Passed

op-mode 1n

Setup_01

Temp.ant.connector

Passed

op-mode 2b

Setup_01

Temp.ant.connector

Passed

op-mode 2g

Setup_01

Temp.ant.connector

Passed

op-mode 2n

Setup_01

Temp.ant.connector

Passed

op-mode 3b

Setup_01

Temp.ant.connector

Passed

op-mode 3g

Setup_01

Temp.ant.connector

Passed

op-mode 3n

Setup_01

Temp.ant.connector

Passed

op-mode 1n+

Setup_01

Temp.ant.connector

Passed

op-mode 2n+

Setup_01

Temp.ant.connector

Passed

op-mode 3n+

Setup_01

Temp.ant.connector

Passed

FCC Part 15, Subpart C

§ 15.247 (b) (1)

Peak power output

The measurement was performed according to FCC § 15.31 / section 9 of KDB 558074

10-1-13 Edition / v03r02

OP-Mode

Setup

Port

Final Result

op-mode 1b

Setup_01

Temp.ant.connector

Passed

op-mode 1g

Setup_01

Temp.ant.connector

Passed

op-mode 1n2

Setup_01

Temp.ant.connector

Passed

op-mode 2b

Setup_01

Temp.ant.connector

Passed

op-mode 2g

Setup_01

Temp.ant.connector

Passed

op-mode 2n2

Setup_01

Temp.ant.connector

Passed

op-mode 3b

Setup_01

Temp.ant.connector

Passed

op-mode 3g

Setup_01

Temp.ant.connector

Passed

op-mode 3n2

Setup_01

Temp.ant.connector

Passed

op-mode 1n+2

Setup_01

Temp.ant.connector

Passed

op-mode 2n+2

Setup_01

Temp.ant.connector

Passed

op-mode 3n+2

Setup_01

Temp.ant.connector

Passed

FCC Part 15, Subpart C

§ 15.247 (d), § 15.35 (b), § 15.207

Spurious conducted emissions

The measurement was performed according to ANSI C63.10

2013

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed
op-mode 1n+	Setup_01	Temp.ant.connector	Passed
op-mode 2n+	Setup_01	Temp.ant.connector	Passed
op-mode 3n+	Setup_01	Temp.ant.connector	Passed

FCC Part 15, Subpart C

§ 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions

The measurement was performed according to ANSI C63.10

2013

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Enclosure	Passed
op-mode 2b	Setup_02	Enclosure	Passed
op-mode 3b	Setup_02	Enclosure	Passed
op-mode 1g	Setup_02	Enclosure	Passed
op-mode 2g	Setup_02	Enclosure	Passed
op-mode 3g	Setup_02	Enclosure	Passed

FCC Part 15, Subpart C

§ 15.247 (d)

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.10 / section 13 of KDB 558074

10-1-13 Edition / 2013 / v03r02

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n	Setup_01	Temp.ant.connector	Passed
op-mode 1n+	Setup_01	Temp.ant.connector	Passed
op-mode 3n+	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Enclosure	Passed
op-mode 3g	Setup_02	Enclosure	Passed
op-mode 3n	Setup_02	Enclosure	Passed
op-mode 3n+	Setup_02	Enclosure	Passed
op-mode 3n2	Setup_03	Enclosure	Passed
op-mode 3n+2	Setup_03	Enclosure	Passed

FCC Part 15, Subpart C

§ 15.247 (e)

Power density

The measurement was performed according to FCC § 15.31 / section 10 of KDB 558074

10-1-13 Edition / v03r02

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Temp.ant.connector	Passed
op-mode 1g	Setup_01	Temp.ant.connector	Passed
op-mode 1n2	Setup_01	Temp.ant.connector	Passed
op-mode 2b	Setup_01	Temp.ant.connector	Passed
op-mode 2g	Setup_01	Temp.ant.connector	Passed
op-mode 2n2	Setup_01	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Temp.ant.connector	Passed
op-mode 3g	Setup_01	Temp.ant.connector	Passed
op-mode 3n2	Setup_01	Temp.ant.connector	Passed
op-mode 1n+2	Setup_01	Temp.ant.connector	Passed
op-mode 2n+2	Setup_01	Temp.ant.connector	Passed
op-mode 3n+2	Setup_01	Temp.ant.connector	Passed

Responsible for
Accreditation Scope: _____

Responsible
for Test Report: _____

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2015-07-15	--	invalid
rev1	2015-08-10	Changed ANSI Reference, KDB Reference, corrected table 99% BW and testcase description, corrected measured range spurious emissions, deleted limit not belonging to spurious emissions testcase, added ch1 and 6 to spurious emissions radiated testcase table, added tested WLAN mode to plot AC mains conducted emissions, corrected channel number and/or frequency in some result tables.	invalid
rev2	2015-08-18	Changed header of section 3.2.4	valid

1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

This facility has been fully described in a report submitted to the IC and accepted under the registration number: Site# 3699A-1

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-08-22

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Date of Test(s): 2015-01-07 to 2015-02-15
Date of Report: 2015-08-18

1.3 Applicant Data

Company Name: Aava Mobile Oy
Address: Nahkatehtaankatu 2
90130 Oulu
Finland
Contact Person: Mr. Antti Aho

1.4 Manufacturer Data

Company Name: Please see applicant data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test:	IEEE 802.11a/b/g/n WLAN transceiver
Type Designation:	Tablet computer
Kind of Device:	INARI5
(optional)	
Voltage Type:	DC
Voltage Level:	DC 3.8 V
Tested Modulation Type:	DBPSK; OFDM:BPSK; OFDM:64-QAM

General product description:

The product is a tablet computer with various transmitters.

Specific product description for the EUT:

The EUT supports dual band WLAN (802.11 2.4 GHz b/g/n and 5 GHz a/n) and Bluetooth as well as Bluetooth low energy with one joint antenna connector for WLAN and Bluetooth and an additional antenna for WLAN only allowing MIMO transmission. In IEEE 802.11n mode it supports 20 MHz and 40 MHz bandwidth channels (both with MCS7 and 15), providing 65 Mbit/s, and 135 Mbit/s transfer data rates in SISO mode as well as 130 Mbit/s and 270 Mbit/s in MIMO respectively.

The object of this test report is the WLAN transceiver, consequently switched on the IEEE 802.11 b/g/n modes, working in the 2.4 band. In IEEE 802.11n mode, it was tested with 20 MHz and 40 MHz channel bandwidth.

The EUT provides the following ports:

Ports

Enclosure
DC and Data port (USB)
Headset port (3.5mm jack)
System port
Temperature probe port

The main components of the EUT are listed and described in Chapter 2.2

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1004006ac01)	WLAN transceiver	INARI5-WLAN-1	EB44900066	Preproduction	Android 4.4
Remark: EUT A is equipped with a temporary antenna connector.					
EUT B (Code: DE1004006aa01)	WLAN transceiver	INARI5-WLAN-1	EB44900043	Preproduction	Android 4.4
Remark: EUT B is equipped with a two dual-band integral antennas with the following antenna gain at 2.4 – 2.5 GHz frequency range: Antenna 1: -1.25 dBi, Antenna 2: -2.25 dBi.					
EUT C (Code: DE1004006ab01)	WLAN transceiver	INARI5-WLAN-1	EB44900054	Preproduction	Android 4.4
Remark: EUT B is equipped with a two dual-band integral antennas with the following antenna gain at 2.4 – 2.5 GHz frequency range: Antenna 1: -1.25 dBi, Antenna 2: -2.25 dBi.					
EUT D (Code: DE1004006ad01)	WLAN transceiver	INARI5-WLAN-1	EB44900002	Preproduction	Android 4.4
Remark: EUT B is equipped with a two dual-band integral antennas with the following antenna gain at 2.4 – 2.5 GHz frequency range: Antenna 1: -1.25 dBi, Antenna 2: -2.25 dBi.					

NOTE: The short description used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment, which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
-	-	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment, which is used temporarily to enable operational and control features especially used for the tests of the EUT, which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
AUX1	Headset	–	–	–	–
AUX2	USB Cable	AmphenolUSB SHIELDED HIGH SPEED CABLE	–	Rev 2.0	–
AUX3aa	Back panel for AAVAM INARI5	AAVAM IN02051002.0	GA44900044	–	–
AUX4ab	Back panel for AAVAM INARI5	AAVAM IN02051002.0	GA44900030	–	–
AUX5ad	Back panel for AAVAM INARI5	AAVAM IN02051002.0	GA44900048	–	–
AUX6	AC/DC converter with USB port	DELTA ELECTRONICS, INC. AC/DC ADAPTER ADP-10BW C	053W41T00KM	Rev. 00	–

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
Setup_01	EUT A	setup for conducted radio measurements
Setup_02	EUT B + AUX1 to AUX3	setup for radiated measurements
Setup_03	EUT C + AUX1 to AUX2 + AUX4	setup for radiated measurements
Setup_04	EUT C + AUX1 to AUX2 +AUX5 to AUX6	setup for conducted emissions (AC power line) measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

2.6.1 Test Channels

Band			
2.4 GHz ISM 2400 - 2483.5 MHz			
20 MHz Test Channels:	Bottom	Middle	Top
Channel:	1	6	11
Frequency [MHz]	2412	2437	2462

40 MHz Test Channels:	Bottom	Middle	Top
Channel:	3	6	11
Frequency [MHz]	2422	2437	2462

2.6.2 Datarates

Data rate / frequency	2412	2437	2462
b-mode, 1Mbit/s	1b	2b	3b
g-mode, 6 Mbit/s	1g	2g	3g
n-Mode, 20 MHz, 65 Mbit/s (MCS7)	1n	2n	3n
n-Mode, 40 MHz, 135 Mbit/s (MCS7)	1n+	2n+	3n+
n-mode, 20 MHz, MIMO, 130 Mbit/s (MCS15)	1n2	2n2	3n2
n-mode, 40 MHz, MIMO, 270 Mbit/s (MCS15)	1n+2	2n+2	3n+2

2.7 Special software used for testing

For testing Bluetooth the ADB tool was used, the WLAN adapter was set into a special testmode that could be set using a laptop and a batch file provided by the applicant.

2.8 Product labelling

2.8.1 FCC ID label

Please refer to the documentation of the applicant.

2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

3 Test Results

3.1 Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.10

3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: $\text{Limit (dB}\mu\text{V)} = 20 \log (\text{Limit } (\mu\text{V})/1\mu\text{V})$.

3.1.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1007 hPa
 Humidity: 30 %

Power line	Frequency MHz	Measured value QP dBμV	Measured value AV dBμV	QP Limit dBμV	AV Limit dBμV	Margin QP dB	Margin AV dB
N	0.185	55.4	–	64	–	8.6	–
L	–	–	–	–	–	–	–

Remark: The chosen operating mode is selected as representative mode to generate “worst-case” conditions, i.e. high power consumption.


3.1.4 Measurement Plot (showing the highest value, "worst case")

AC MAINS CONDUCTED

EUT: (DE1004006ad01)
 Manufacturer: AAVAM
 Operating Condition: WLAN 6 Mbit/s Ch. 6, NFC on, video recording
 Test Site: 7 layers Ratingen
 Operator: URO
 Test Specification: ANSI C63.10; FCC 15.107 / 15.207
 Comment: 120 V / 60 Hz ; AC/DC adapter
 Start of Test: 15.02.2015 / 21:19:36

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

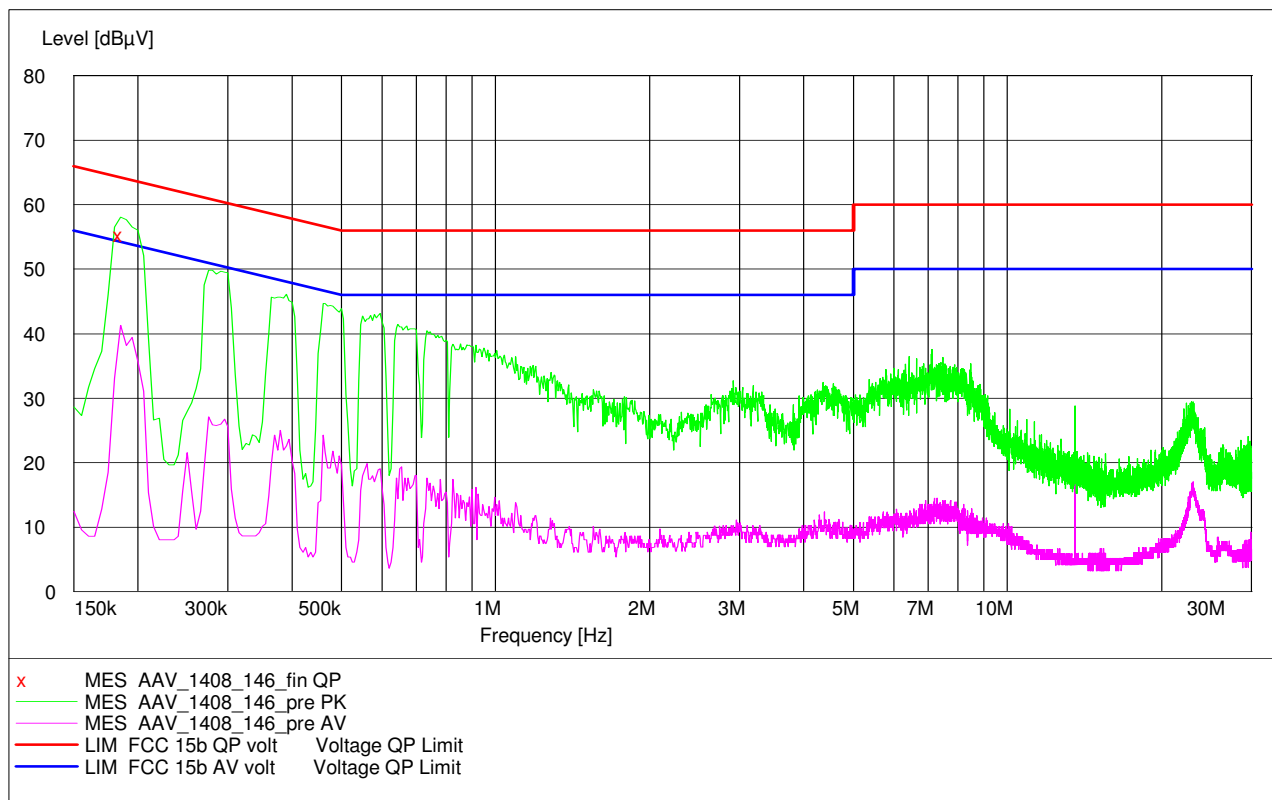

MEASUREMENT RESULT: "AAV_1408_146_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.185000	55.40	10.1	64	8.8	N	GND

3.2 Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Detector: Peak / Sample (6 dB bandwidth / 99% bandwidth)

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

3.2.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 34 %

3.2.3.1 6 dB bandwidth

WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	8.124	0.5	7.6
	6	2437	8.604	0.5	8.1
	11	2462	8.604	0.5	8.1

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	15.516	0.5	15.0
	6	2437	15.996	0.5	15.5
	11	2462	15.216	0.5	14.7

WLAN n-Mode; 20 MHz; 65 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	15.636	0.5	15.1
	6	2437	16.356	0.5	15.9
	11	2462	16.476	0.5	16.0

WLAN n-Mode; 40 MHz; 135 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	3	2422	36.273	0.5	35.8
	6	2437	36.573	0.5	36.1
	11	2462	36.273	0.5	35.8

3.2.3.2 99% bandwidth



WLAN b-Mode; 20 MHz; 1 Mbit/s			
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	11.138
	6	2437	11.138
	11	2462	11.218

WLAN g-Mode; 20 MHz; 6 Mbit/s			
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	16.987
	6	2437	16.987
	11	2462	16.987

WLAN n-Mode; 20 MHz; 65 Mbit/s			
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.628
	6	2437	17.628
	11	2462	17.628

WLAN n-Mode; 40 MHz; 135 Mbit/s			
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	3	2422	36.458
	6	2437	36.538
	11	2462	36.458

3.2.4 Measurement Plot (showing the smallest value, "worst case")

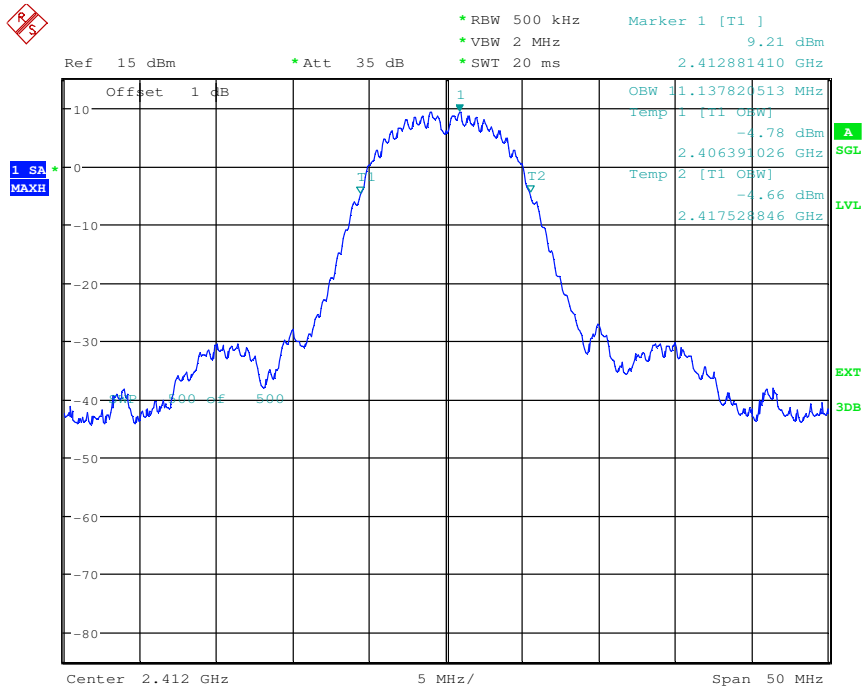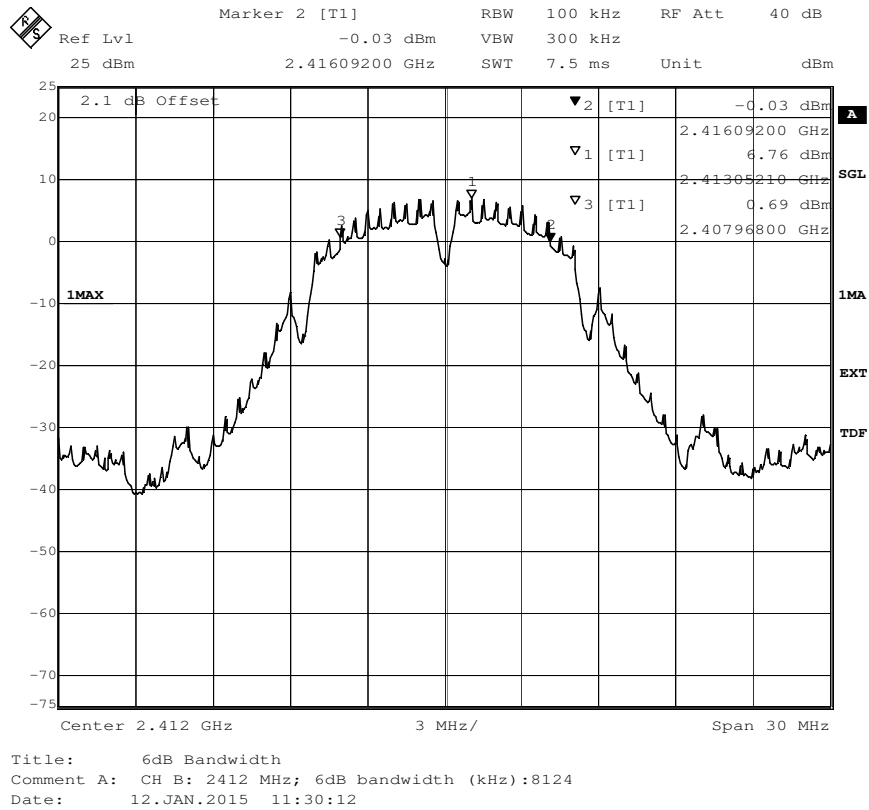

Date: 16.JAN.2015 13:25:42

99% Bandwidth b mode Ch. 1

3.3 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz band: 1 watt.

=> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: $\text{Limit (dBm)} = 10 \log (\text{Limit (W)}/1\text{mW})$

3.3.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 36 %

The antenna gain is excluded in the table.


WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	18.7	30.0	11.3
	6	2437	18.5	30.0	11.5
	11	2462	18.2	30.0	11.8

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	23.3	30.0	6.7
	6	2437	23.4	30.0	6.6
	11	2462	22.9	30.0	7.1

WLAN n-Mode; 20 MHz; 130 Mbit/s						TX1	TX2
Band	Ch. No.	Freq. [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	ANT1	ANT2
2.4 GHz ISM	1	2412	24.1	30.0	5.9	21.7	20.4
	6	2437	24.0	30.0	6.0	21.5	20.4
	11	2462	24.0	30.0	6.0	21.3	20.6

WLAN n-Mode; 40 MHz; 270 Mbit/s						TX1	TX2
Band	Ch. No.	Freq. [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	Ant 1	Ant 2
2.4 GHz ISM	3	2422	22.4	30.0	7.6	19.41	19.35
	6	2437	22.3	30.0	7.7	19.24	19.25
	11	2462	22.1	30.0	7.9	19.26	18.95

3.3.4 Measurement Plot (showing the highest value single antenna, "worst case")

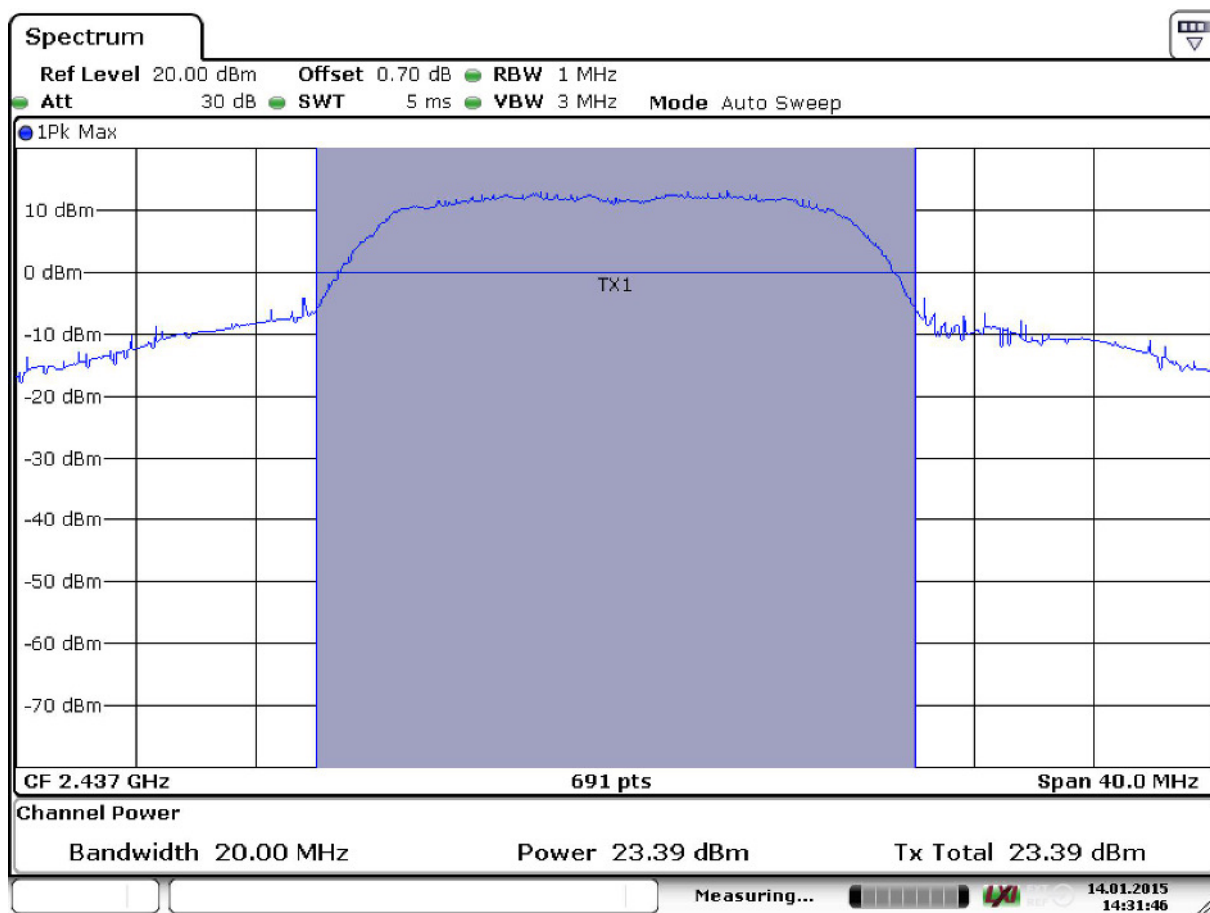

Date: 14.JAN.2015 14:31:46

3.4 Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.4.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- | | |
|-------------------------------|----------------|
| - Detector: | Peak-Maxhold |
| - Frequency range: | 30 – 25000 MHz |
| - Resolution Bandwidth (RBW): | 100 kHz |
| - Video Bandwidth (VBW): | 300 kHz |
| - Sweep Time: | 330 s |

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 36 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	6.5	-13.5	-
6	2437	-	-	PEAK	100	6.8	-13.3	-
11	2462	-	-	PEAK	100	6.4	-13.6	-


WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	4.0	-16.0	-
6	2437	-	-	PEAK	100	3.4	-16.6	-
11	2462	-	-	PEAK	100	3.6	-16.4	-

WLAN n-Mode; 20 MHz; 65 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	-	-	PEAK	100	9.8	-10.2	-
6	2437	-	-	PEAK	100	1.5	-18.5	-
11	2462	-	-	PEAK	100	1.5	-18.5	-


WLAN n-Mode; 40 MHz; 135 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	-	-	PEAK	100	-4.0	-24.0	-
6	2437	-	-	PEAK	100	-5.0	-25.0	-
11	2462	-	-	PEAK	100	-4.8	-24.8	-

Note: No (further) spurious emissions in the range 20 dB below the limit found.


3.4.4 Measurement Plots

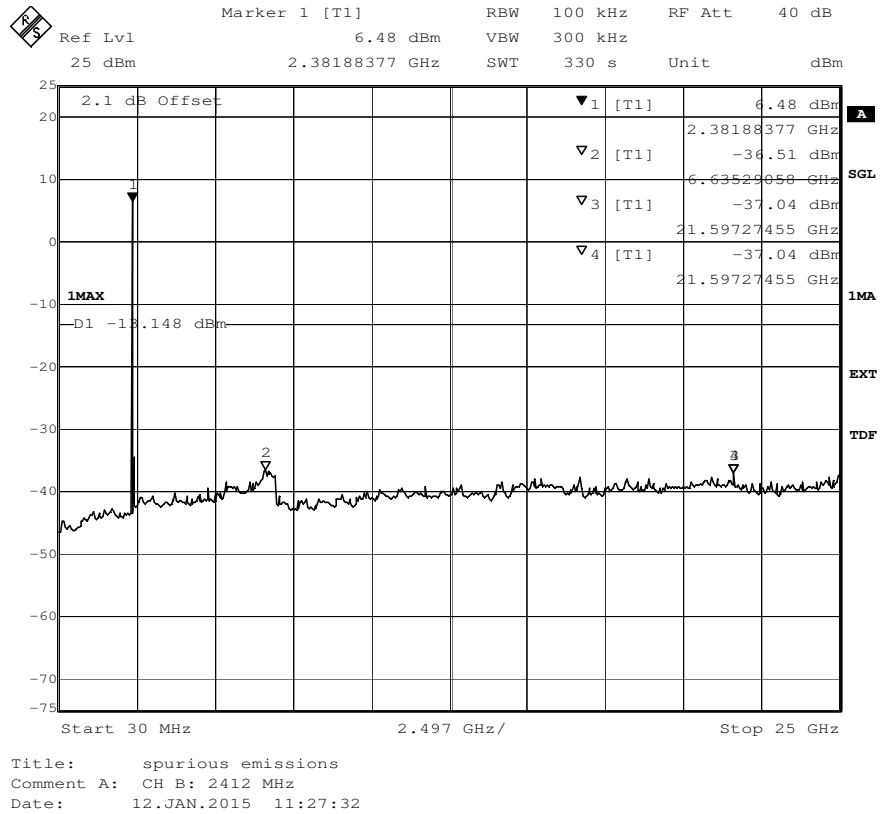

WLAN mode b, Ch. 1

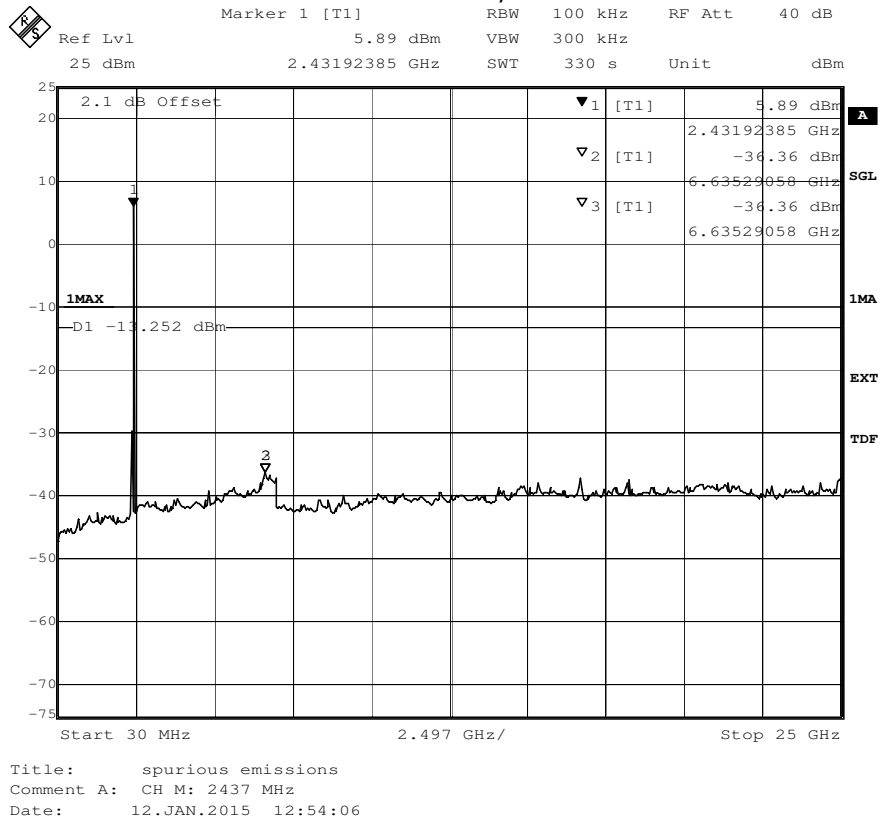


WLAN mode b, Ch. 6

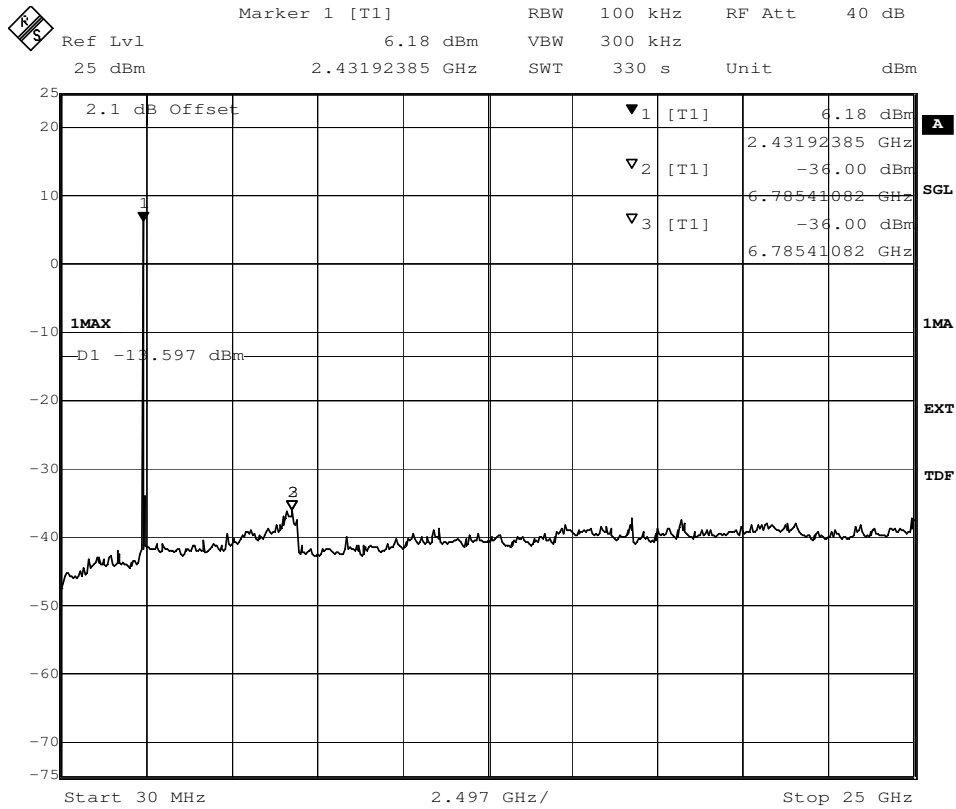


Title: spurious emissions
Comment A: CH T: 2462 MHz
Date: 12.JAN.2015 13:33:57

WLAN mode b, Ch. 11

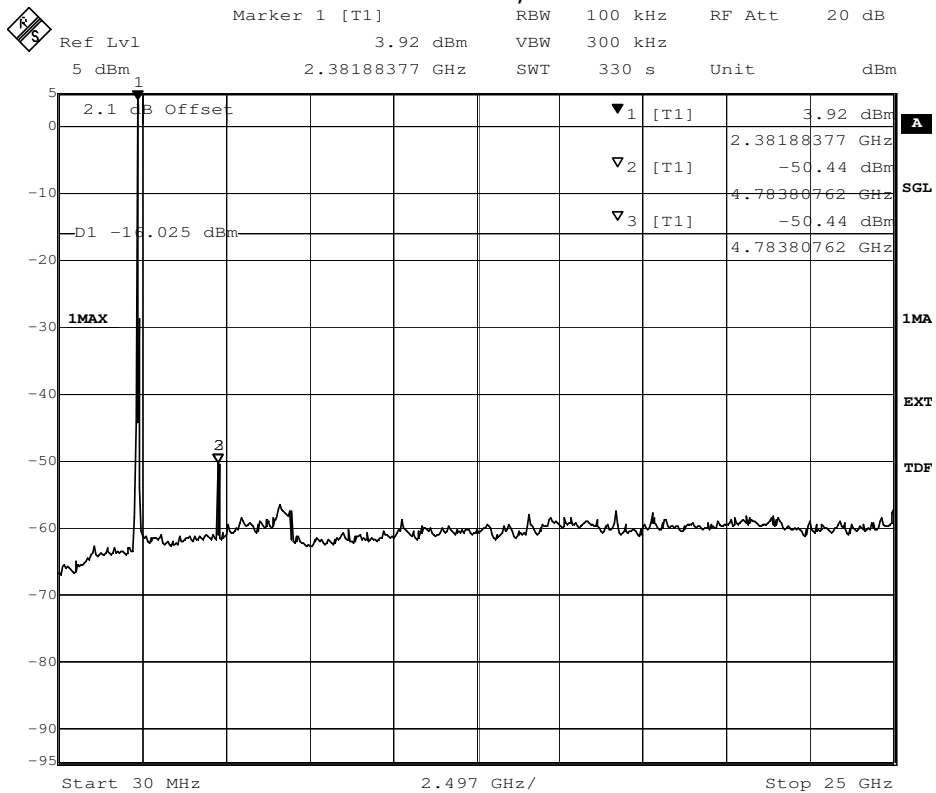


Title: spurious emissions
Comment A: CH B: 2412 MHz
Date: 12.JAN.2015 14:10:05

WLAN mode g, Ch. 1

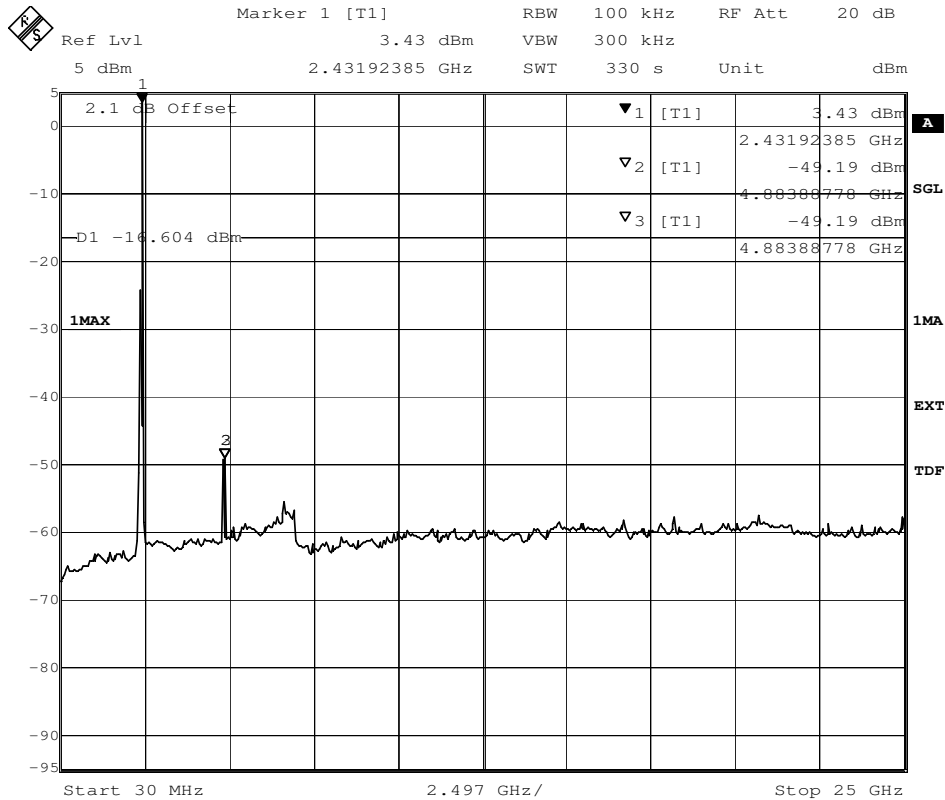


Title: spurious emissions
Comment A: CH M: 2437 MHz
Date: 12.JAN.2015 14:41:25

WLAN mode g, Ch. 6

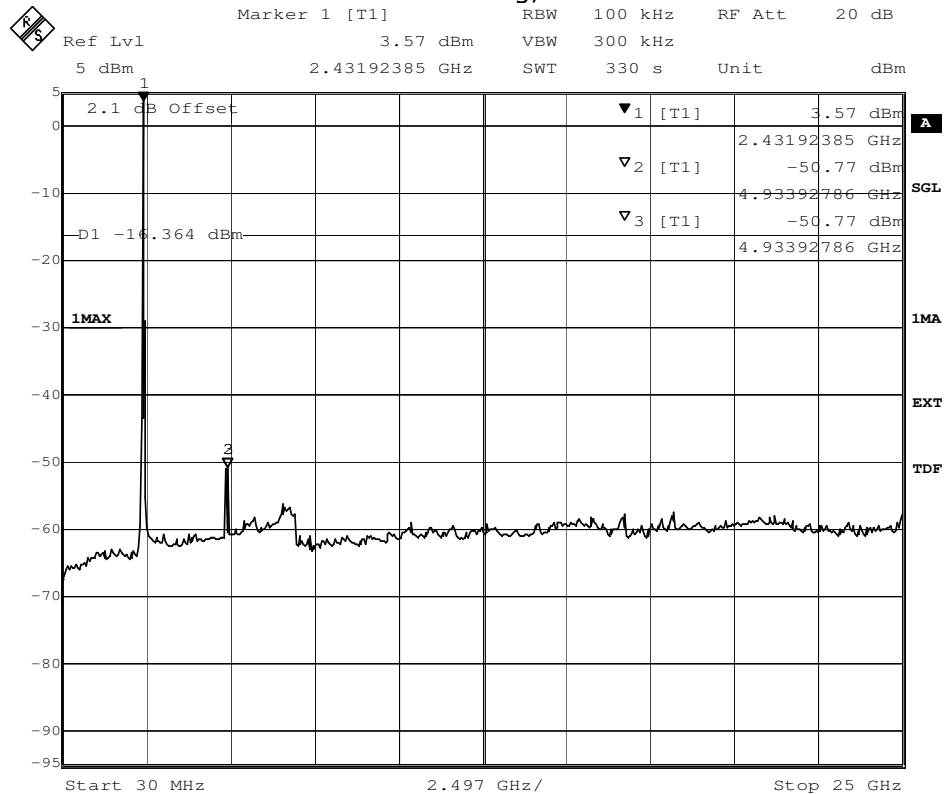


Title: spurious emissions
Comment A: CH T: 2462 MHz
Date: 12.JAN.2015 15:12:47

WLAN mode g, Ch. 11

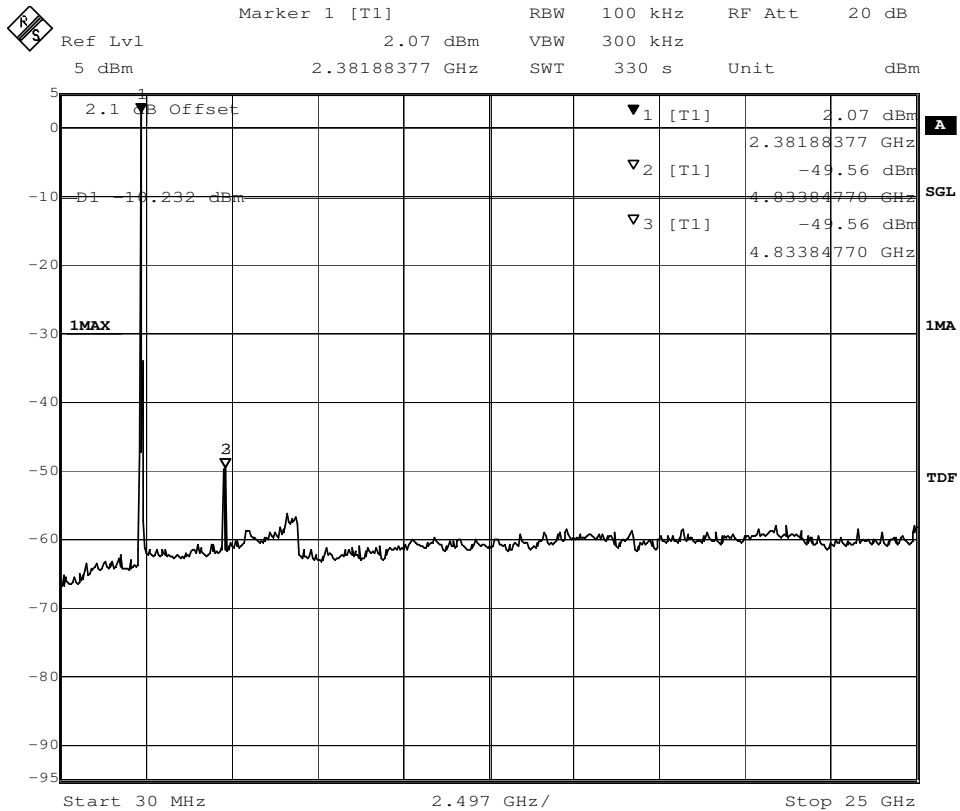


Title: spurious emissions
Comment A: CH B: 2412 MHz
Date: 13.JAN.2015 13:26:44

WLAN mode n 20 MHz, Ch. 1

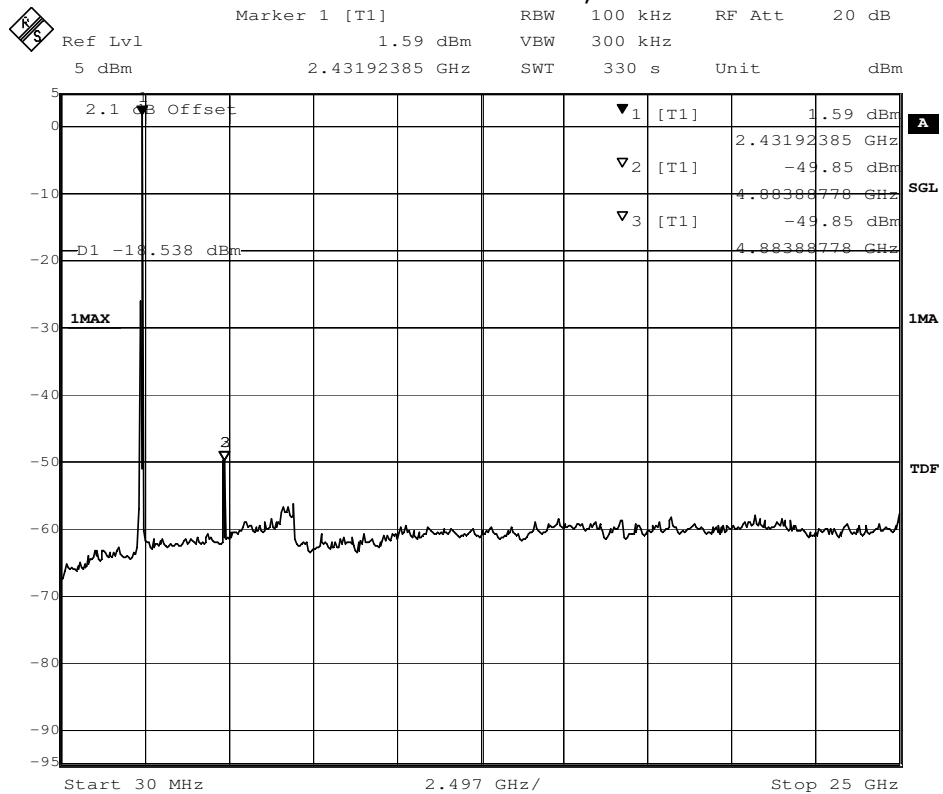


Title: spurious emissions
Comment A: CH M: 2437 MHz
Date: 13.JAN.2015 14:04:41

WLAN mode n 20 MHz, Ch. 6

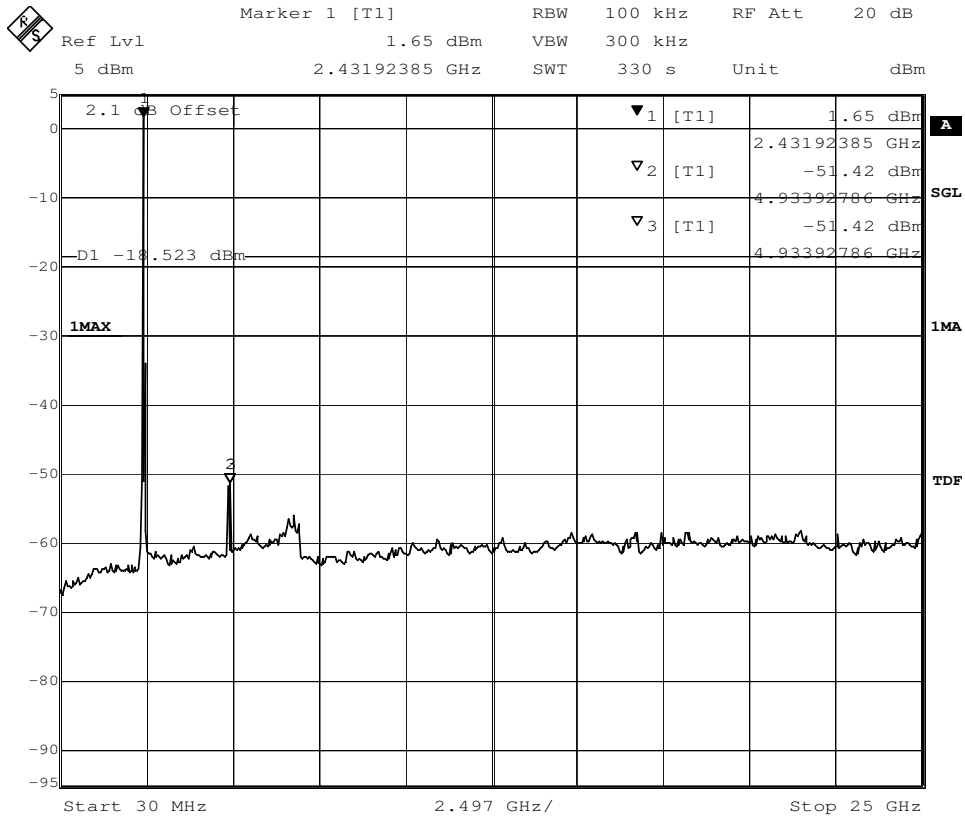


Title: spurious emissions
Comment A: CH T: 2462 MHz
Date: 13.JAN.2015 14:38:50

WLAN mode n 20 MHz, Ch. 11

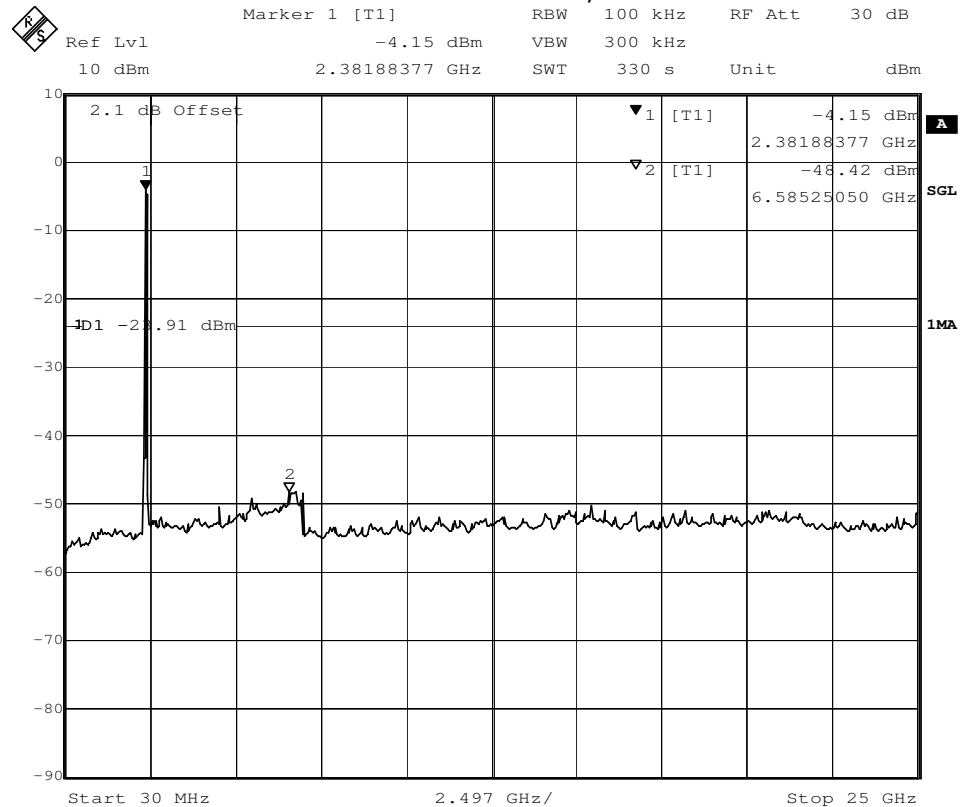


Date: 14.JAN.2015 09:05:08

WLAN mode n 40 MHz, Ch. 3

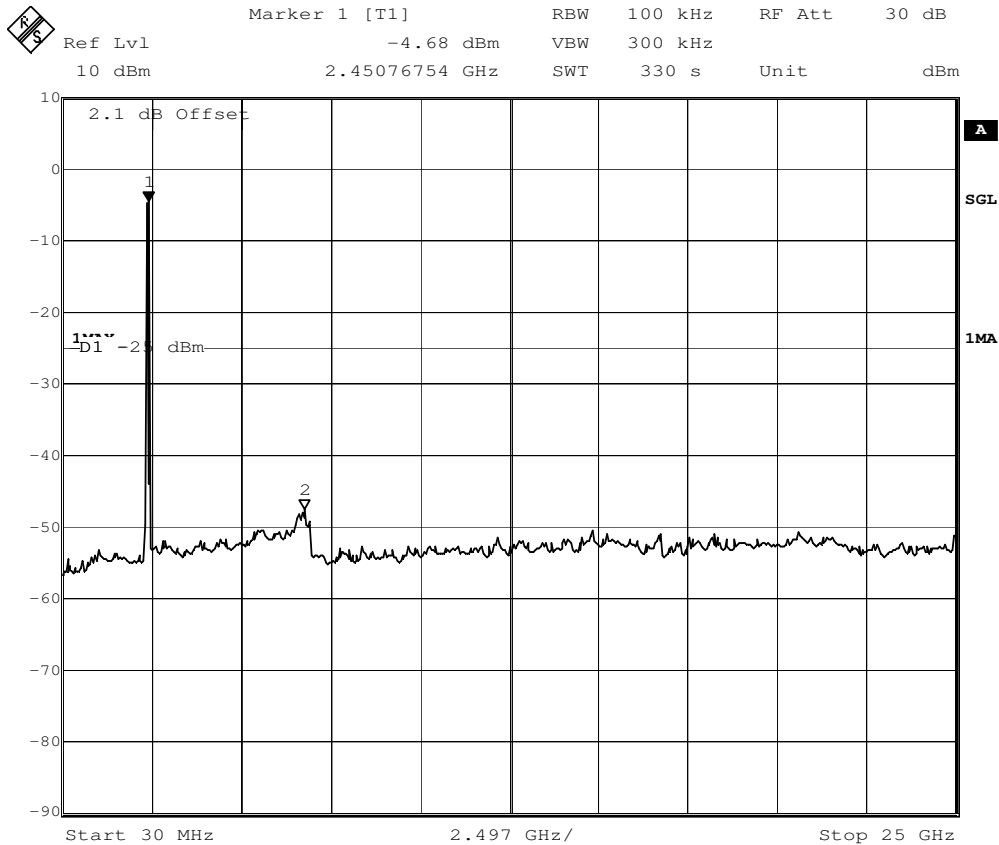

Date: 14.JAN.2015 09:32:30

WLAN mode n 40 MHz, Ch. 6

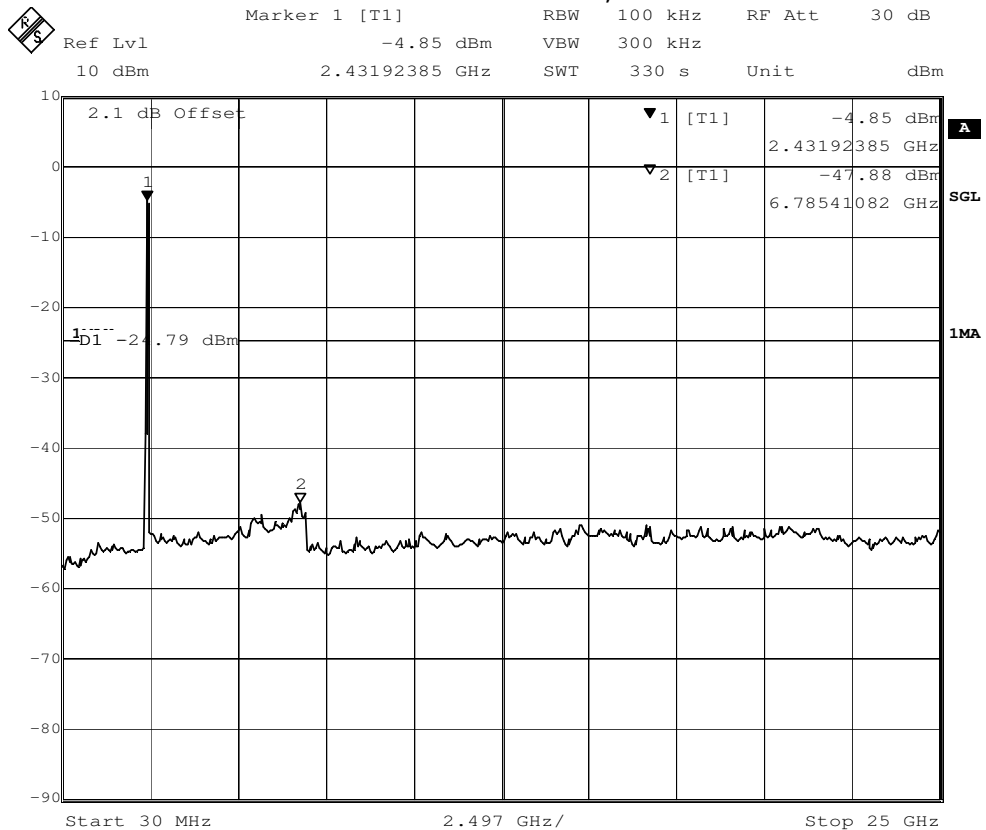

Date: 14.JAN.2015 10:01:15

WLAN mode n 40 MHz, Ch. 11

3.5 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10

3.5.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step, the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 22.5^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 25 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 22.5^{\circ}$ around the determined value
- Height variation range: ± 25 cm around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact, that in this frequency range a double-ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

3.5.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Calculated Limits(dBμV/m @10m)	Limits(dBμV/m @10m)
0.009 – 0.49	2400/F(kHz)	300 → 10	(48.5 – 13.8) + 59.1 dB	107.6 – 72.9
0.49 – 1.705	24000/F(kHz)	30 → 10	(33.8 – 23.0) + 19.1 dB	52.9 – 42.1
1.705 – 30	30	30 → 10	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

3.5.3 Test Protocol

Temperature: 21–23 °C
 Air Pressure: 1001–1016 hPa
 Humidity: 31–35 %

WLAN b-Mode; 20 MHz; 1 Mbit/s				Applied duty cycle correction (AV) [dB]: 0.5				
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
1	2412	-	-	-	-	-	>20	-
6	2437	-	-	-	-	-	>20	-
11	2462	2483.5	55.0	PEAK	1000	74.0	19.0	RB
11	2462	2483.5	48.5	AV	1000	54.0	5.5	RB

Note: No (further) spurious emissions in the range 20 dB below the limit found.

WLAN g-Mode; 20 MHz; 6 Mbit/s				Applied duty cycle correction (AV) [dB]: 2.7				
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
1	2412	2390.0	69.0	PEAK	1000	74.0	5.0	RB
1	2412	2390.0	48.9	AV	1000	54.0	5.1	RB
6	2437	2389.0	55.7	PEAK	1000	74.0	18.3	RB
6	2437	2389.0	40.2	AV	1000	54.0	13.8	RB
6	2437	2486.5	61.3	PEAK	1000	74.0	12.7	RB
6	2437	2486.5	41.2	AV	1000	54.0	12.8	RB
11	2462	2483.5	71.7	PEAK	1000	74.0	2.3	RB
11	2462	2483.5	49.9	AV	1000	54.0	4.1	RB

Note: No (further) spurious emissions in the range 20 dB below the limit found.
 The measurement was performed from 1 GHz up to 8 GHz because at pre-measurements no significant spurious emissions have been found outside this frequency range.

3.6 Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.10–2013, FCC §15.31

3.6.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower and higher band edge by a conducted measurement. For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room.

For the lower band edge the EUT is set to transmit as follows:

For a WLAN transmitter working in the 2.4 GHz band on lowest channel:

CH1 = 2412 MHz / CH3 = 2422 MHz for a channel bandwidth of 20 / 40 MHz.

The lower band edge is 2400 MHz for 2.4 GHz band transmitter.

For the higher band edge the EUT is set to transmit as follows:

For a WLAN transmitter working in the 2.4 GHz band on highest channel:

CH11 = 2462 MHz / CH11 = 2462 MHz for a channel bandwidth of 20 / 40 MHz.

The higher band edge is 2483.5 MHz for a 2.4 GHz band transmitter.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW / VBW = 100 / 300 kHz

2. Showing compliance of the higher band edge falls in to restricted bands by a radiated measurement.

The radiated emissions measurements are performed in a typical installation configuration inside the fully anechoic chamber using a horn antenna at 1 m distance.

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

3.6.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be “at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power...”

For the radiated measurement of the higher band edge connected to a restricted band the limit is “specified in Section 15.209(a)”.

3.6.3 Test Protocol

3.6.3.1 Conducted measurement, lower and higher band edge

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 36 %


WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBμV/m]	Margin to Limit [dB]
1	2412	2400.0	-29.8	PEAK	100	6.5	-13.5	16.3
11	2462	2483.5	-41.2	PEAK	100	6.4	-13.6	27.6

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-28.8	PEAK	100	4.0	-16.0	12.7
11	2462	2483.5	-37.4	PEAK	100	3.6	-16.4	21.0

WLAN n-Mode; 20 MHz; 65 Mbit/s								
Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-37.3	PEAK	100	9.8	-10.2	27.1
11	2462	2483.5	-43.6	PEAK	100	1.5	-18.5	25.1

WLAN n-Mode; 40 MHz; 135 Mbit/s								
Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	2400.0	-28.7	PEAK	100	-3.9	-23.9	4.8
11	2462	2483.5	-35.5	PEAK	100	-4.8	-24.8	10.7

3.6.3.2 Measurement Plot (showing the highest value, "worst case")

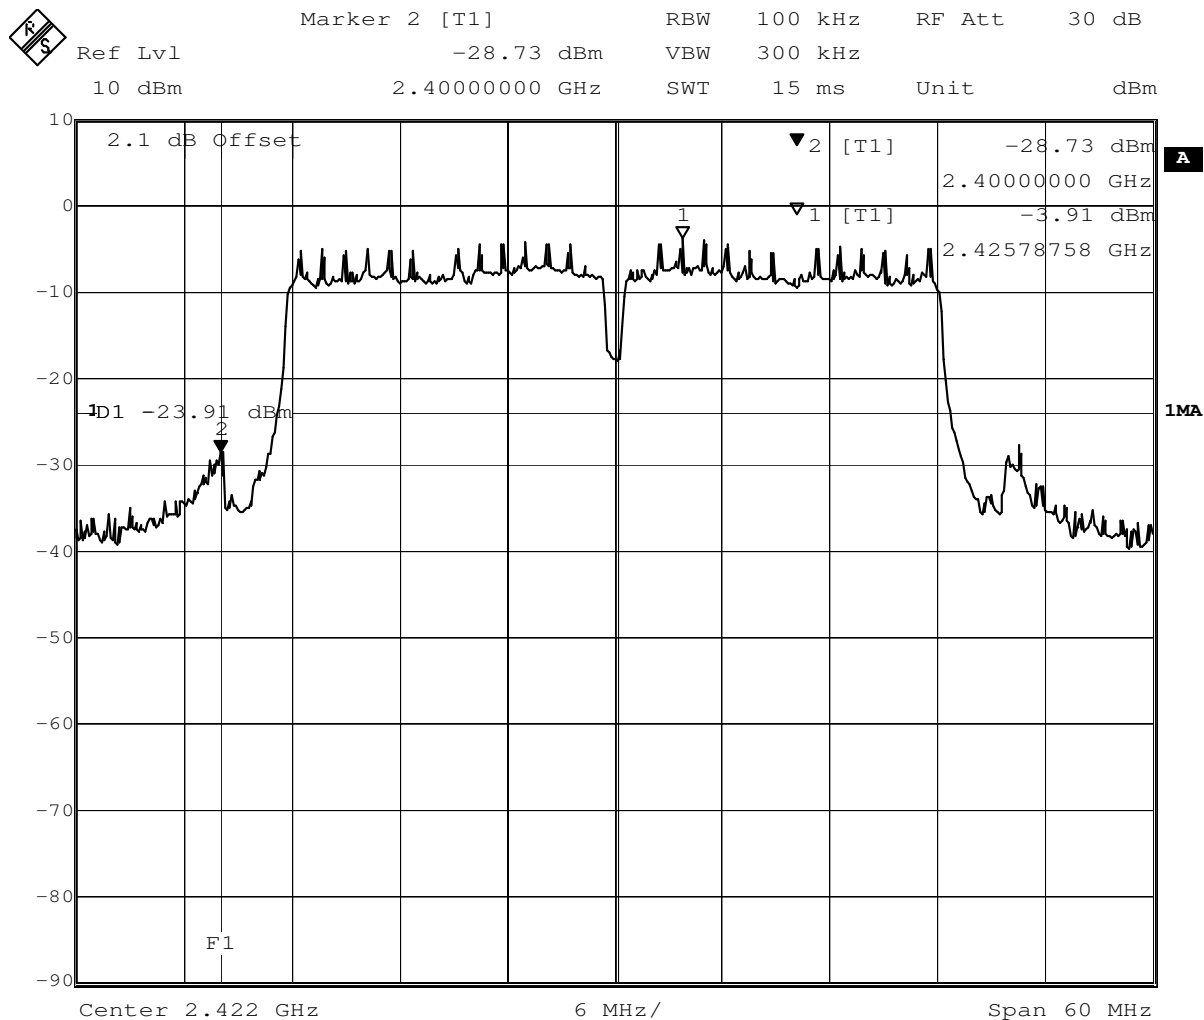

Date: 14.JAN.2015 08:47:57
WLAN mode n, 40 MHz, low channel

Radiated measurement, higher band edge

Temperature: 21 - 22 °C
Air Pressure: 1005 - 1011 hPa
Humidity: 31 - 36 %

WLAN b-mode; 20 MHz; 1 Mbit/s				Applied duty cycle correction (AV) [dB]: 0.5				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	55.0	PEAK	1000	74.0	19.0	BE
11	2462	2483.5	48.5	AV	1000	54.0	5.5	BE

WLAN g-Mode; 20 MHz; 6 Mbit/s				Applied duty cycle correction (AV) [dB]: 2.7				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	71.7	PEAK	1000	74.0	2.3	BE
11	2462	2483.5	49.9	AV	1000	54.0	4.1	BE


WLAN n-Mode; 20 MHz; 13 Mbit/s				Applied duty cycle correction (AV) [dB]: 5.9				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	68.9	PEAK	1000	74.0	5.1	BE
11	2462	2483.5	48.4	AV	1000	54.0	5.6	BE

WLAN n-Mode; 40 MHz; 130 Mbit/s				Applied duty cycle correction (AV) [dB]: 5.9				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	65.1	PEAK	1000	74.0	8.9	BE
11	2462	2483.5	44.6	AV	1000	54.0	9.4	BE

WLAN n-Mode; 20 MHz; 130 Mbit/s				Applied duty cycle correction (AV) [dB]: 5.9				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	64.9	PEAK	1000	74.0	9.1	BE
11	2462	2483.5	45.6	AV	1000	54.0	8.4	BE

WLAN n-Mode; 40 MHz; 270 Mbit/s				Applied duty cycle correction (AV) [dB]: 5.9				
Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	64.6	PEAK	1000	74.0	9.4	BE
11	2462	2483.5	45.1	AV	1000	54.0	8.9	BE

3.6.3.3 Measurement Plot (showing the highest value, "worst case")

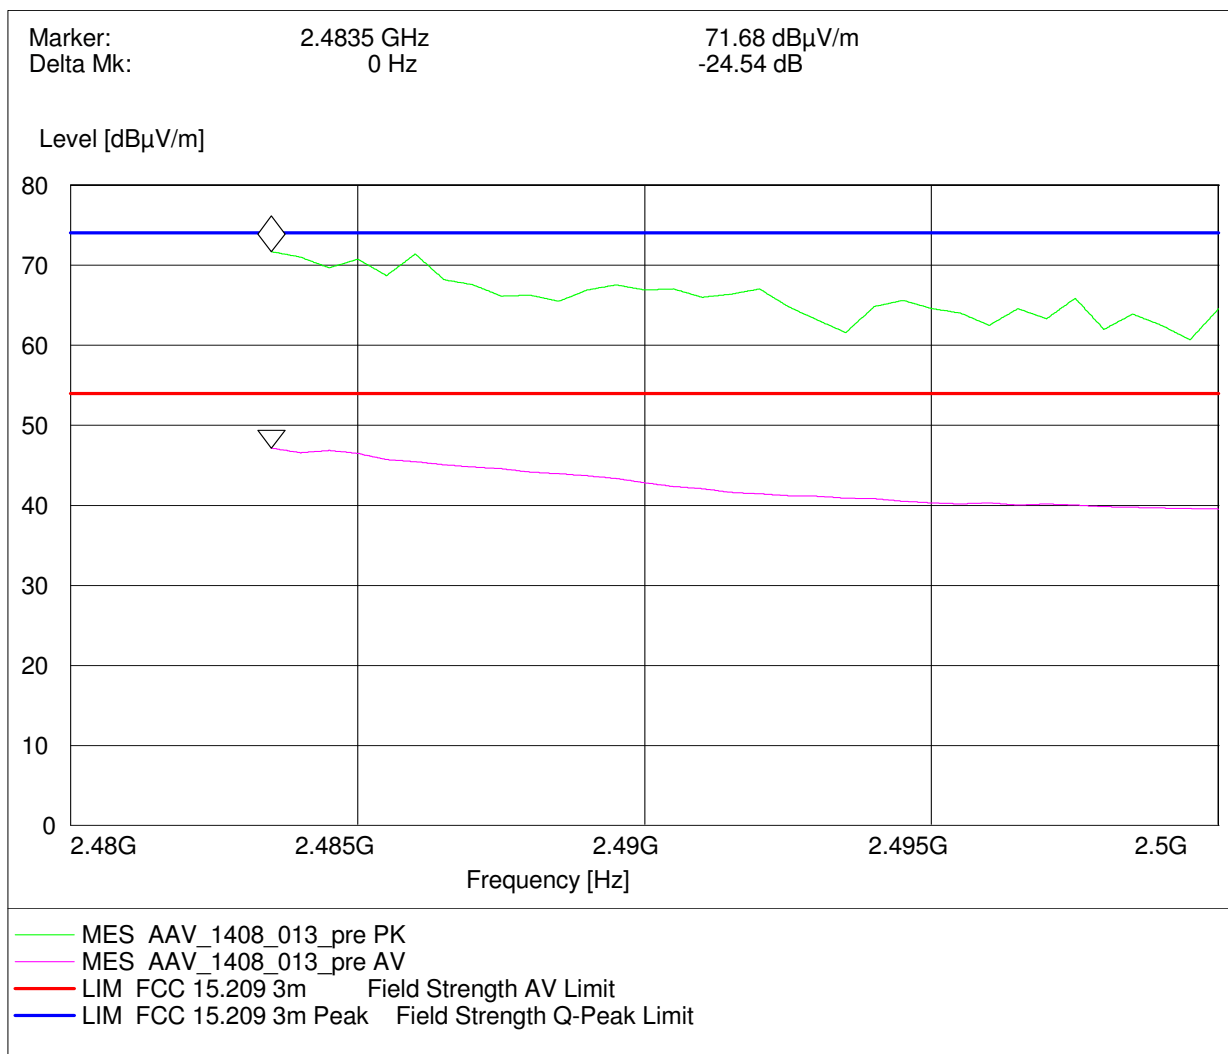

3.7 Power density

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.7.1 Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.
Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

3.7.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1018 hPa
Humidity: 34 %


WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-6.9	8.0	14.9
	6	2437	-6.2	8.0	14.2
	11	2462	-6.4	8.0	14.4

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-4.5	8.0	12.5
	6	2437	-9.7	8.0	17.7
	11	2462	-10.1	8.0	18.1

WLAN n-Mode; 20 MHz; 130 Mbit/s					
Band	Ch. No.	Freq. [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-12.3	8.0	20.3
	6	2437	-12.3	8.0	20.3
	11	2462	-12.6	8.0	20.6

WLAN n-Mode; 40 MHz; 270 Mbit/s					
Band	Ch. No.	Freq. [MHz]	Peak Power [dBm]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	3	2422	-17.6	8.0	25.6
	6	2437	-17.8	8.0	25.8
	11	2462	-18.1	8.0	26.1

3.7.4 Measurement Plot (showing the highest value, "worst case")

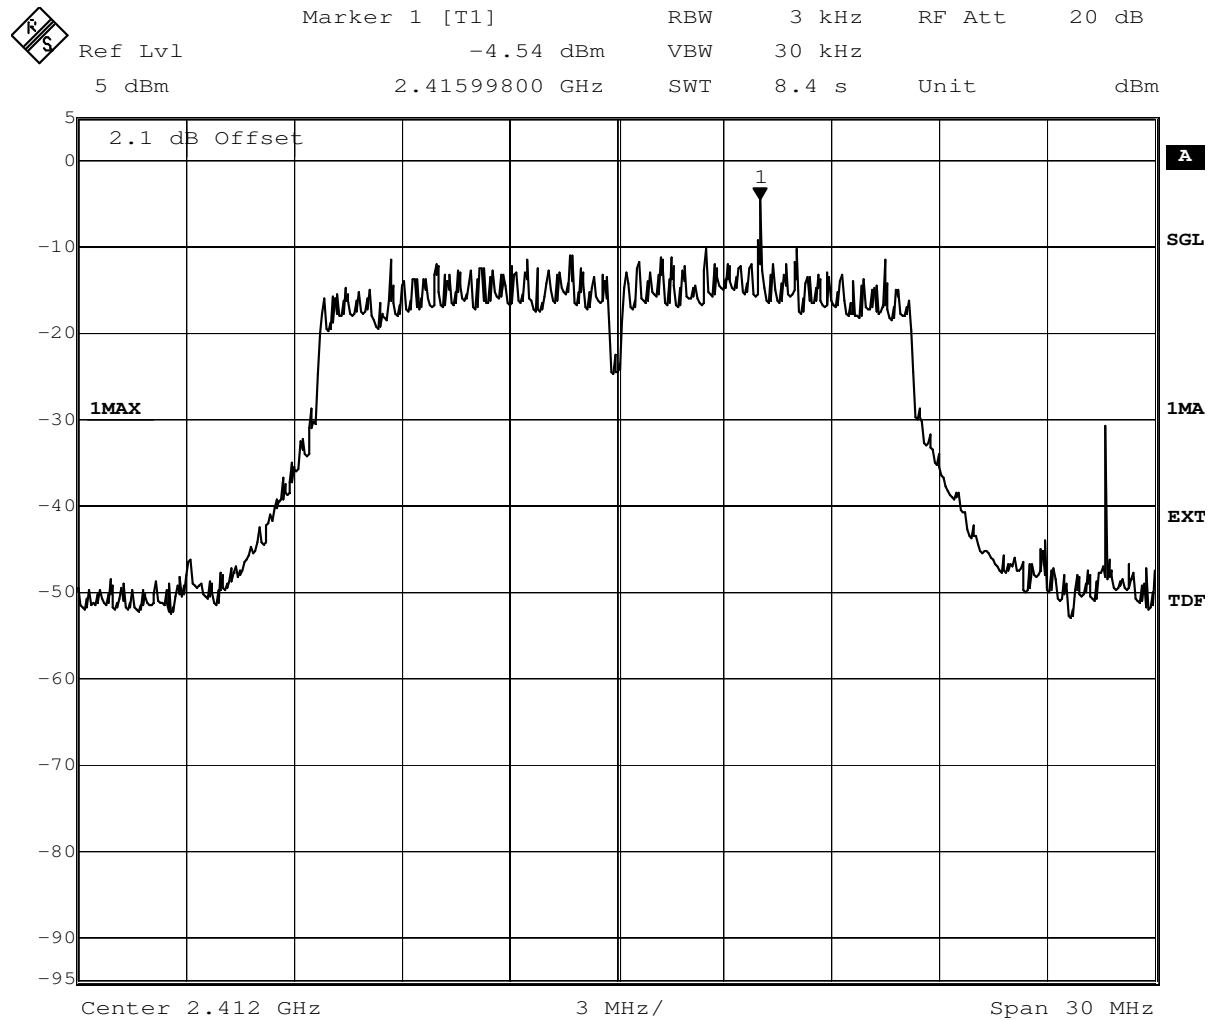

Title: Power Density
Comment A: CH B: 2412 MHz;
Date: 12.JAN.2015 14:26:47

WLAN mode g low channel

4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31

Single Devices for Auxiliary Equipment for Conducted emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer	
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2014/06/18	2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck		
Biconical dipole	VUBA 9117 <i>Calibration Details</i>	9117-108	Schwarzbeck	<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2012/05/18	2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2012/06/26	2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170	BBHA9170262			
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2012/12/18	2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	DKD Calibration			2014/11/27	2017/11/27
Standard Gain / Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH		

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2, Lab 3
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power DividerWA1515 SMA		A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Customized calibration	2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard	2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard	2012/06/13 2015/06/12
		DKD calibration	2014/11/24 2017/11/23
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
		<i>Calibration Details</i>	<i>Last Execution</i> <i>Next Exec.</i>
		Standard calibration	2014/07/29 2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID:

Lab 1, Lab 2, Lab 3

Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standart calibration		2015/01/21	2018/01/19
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2014/01/27	2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	DKD calibration		2014/12/02	2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	HW/SW Status		Date of Start	Date of End
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16	
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	DKD calibration		2014/12/03	2017/12/02
	HW/SW Status		Date of Start	Date of End
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02	
	SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2014/05/13 2015/05/12
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2014/05/13 2015/05/12
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
Standard Calibration			2014/06/24 2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
Standard Calibration			2014/01/07 2016/01/31
HW/SW Status			Date of Start Date of End
Firmware-Update 4.34.4 from 3.45 during calibration			2009/12/03

Test Equipment Multimeter 12

Lab ID: Lab 4, Lab 5
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/12/04 2015/12/03

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 3
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power DividerWA1515 SMA		A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger FA210A0010003030 Micro Coax FA210A0010003030 SMA/SMA 1,0m		54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/03 2015/07/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/12/02 2017/12/01
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12 2015/02/11

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 4
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer		
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.		
Bluetooth Signalling Unit CBT CBT		100302	Rohde & Schwarz GmbH & Co.KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/29	2015/08/28	
Power Meter NRVD	NRVD	832025/059			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/29	2015/08/28	
Power Sensor NRV Z1 A	PROBE	832279/013			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/28	2015/08/27	
Power Supply	NGSM 32/10	2725			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2013/06/20	2015/06/19	
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/29	2015/08/28	
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG		
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2013/06/21	2016/06/20	

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 4, Lab 5
Description: Shielded Room 4m x 6m

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2, Lab 3
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 03

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 7482

Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 03 (Environ)	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/01/07 2015/02/24

Test Equipment T/H Logger 15

Lab ID: Lab 4, Lab 5
Description: Lufft Opus10
Serial Number: 13985

Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 15 (Environ)		13985	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/01/07 2015/02/24

Test Equipment Temperature Chamber 01

Lab ID: Lab 4, Lab 5
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/12 2016/03/11

Test Equipment Temperature Chamber 05

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber VT4002
Type: Vötsch
Serial Number: see single devices

Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/11 2016/03/10

Test Equipment WLAN RF Test Solution

Lab ID: Lab 5
Manufacturer: 7 layers AG
Description: Regulatory WLAN RF Tests
Type: WLAN RF
Serial Number: 001


Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer		
Arbitrary Waveform Generator	TGA12101	284482			
Power Meter NRVD	NRVD	832025/059			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/29	2015/08/28	
Power Sensor NRV Z1 A	PROBE	832279/013			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/28	2015/08/27	
Power Supply	NGSM 32/10	2725			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2013/06/20	2015/06/19	
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/08/29	2015/08/28	
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG		
Spectrum Analyser	FSU26	100136	Rohde & Schwarz GmbH & Co.KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2014/01/06	2015/02/01	
	Standard Calibration		2015/02/02	2016/02/01	
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>	
	FSU FW Update to v4.61 SP3, K5 v4.60 and K73 v4.61		2011/12/05		
Spectrum Analyser	FSU3	200046	Rohde & Schwarz GmbH & Co.KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2014/07/01	2015/06/30	
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>	
	Firmware Version 4.51 SP1		2011/12/07		
	Option FS-K72 4.50 SP1				
	Option FS-K73 4.50 SP1				
TOCT Switching Unit	Switching Unit	040107	7 layers, Inc.		
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017			
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard calibration		2013/06/21	2016/06/20	

5 Photo Report

Please refer to external report.

6 Setup Drawings

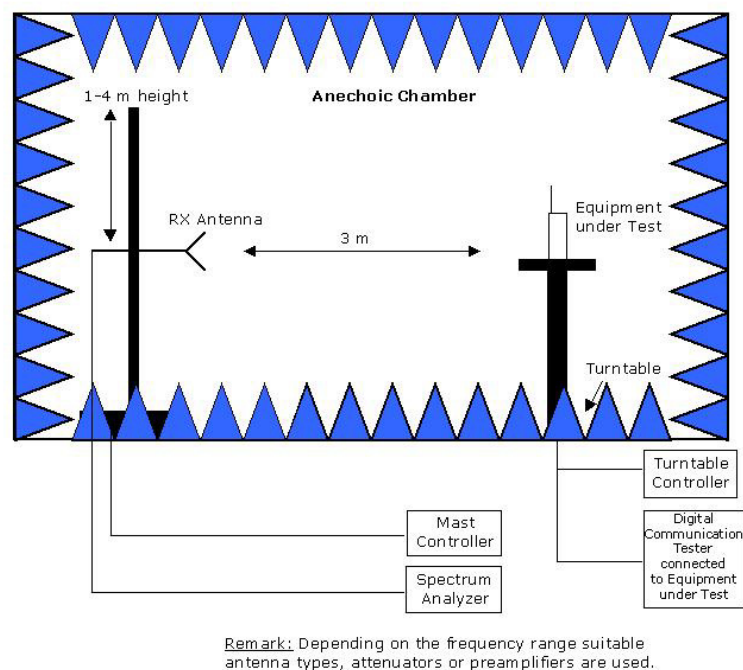

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.