

FCC SAR TEST REPORT

APPLICANT : Zebra Technologies Corporation
EQUIPMENT : Tablet
BRAND NAME : Zebra
MODEL NAME : ET40AA
FCC ID : UZ7ET40AA
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
5. Proximity Sensor Triggering Test.....	7
6. RF Exposure Limits.....	14
6.1 Uncontrolled Environment.....	14
6.2 Controlled Environment.....	14
7. Specific Absorption Rate (SAR).....	15
7.1 Introduction	15
7.2 SAR Definition.....	15
8. System Description and Setup	16
8.1 E-Field Probe	17
8.2 Data Acquisition Electronics (DAE)	17
8.3 Phantom.....	18
8.4 Device Holder.....	19
9. Measurement Procedures	20
9.1 Spatial Peak SAR Evaluation.....	20
9.2 Power Reference Measurement.....	21
9.3 Area Scan	21
9.4 Zoom Scan.....	22
9.5 Volume Scan Procedures.....	22
9.6 Power Drift Monitoring.....	22
10. Test Equipment List.....	23
11. System Verification	24
11.1 Tissue Simulating Liquids.....	24
11.2 Tissue Verification	25
11.3 System Performance Check Results.....	26
12. RF Exposure Positions	27
12.1 SAR Testing for Tablet.....	27
13. Conducted RF Output Power (Unit: dBm).....	28
14. Antenna Location	73
15. SAR Test Results	75
15.1 Body SAR	76
15.2 Repeated SAR Measurement	78
16. Simultaneous Transmission Analysis.....	79
16.1 Body Exposure Conditions.....	79
16.2 SPLSR Evaluation and Analysis.....	80
17. Uncertainty Assessment	82
18. References.....	83
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA222245	Rev. 01	Initial issue of report	May 18, 2022
FA222245	Rev. 02	Updated the sensor distance of Antenna 6	Jun. 07, 2022

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Zebra Technologies Corporation, Tablet, ET40AA**, are as follows.

Highest Standalone 1g SAR Summary				
Equipment Class	Frequency Band		Body (Separation 0mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	1.25	1.25
NII		5GHz WLAN	1.35	1.59
DTS	Bluetooth	Bluetooth	<0.10	1.59
Date of Testing:		2022/4/11 ~ 2022/4/12 and 2022/5/24 ~ 2022/5/30		

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR07-KS	CN1257	314309

Applicant	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

Manufacturer	
Company Name	Zebra Technologies Corporation
Address	1 Zebra Plaza, Holtsville, NY 11742

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Tablet
Brand Name	Zebra
Model Name	ET40AA
FCC ID	UZ7ET40AA
S/N	220275247E0013
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	WLAN 2.4GHz 802.11b/g/n/ac HT20/VHT20 WLAN 2.4GHz 802.11ax HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 WLAN 5GHz 802.11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	EV2-1
SW Version	ET40-userdebug 11 11-07-10.00-RG-U00-PRD-GSE MX3 release-keys
MFD	28JAN22
EUT Stage	Identical Prototype
Remark: - This device has no voice function. 802.11n-HT40 is not supported in 2.4GHz WLAN. - This device has NFC operations, the NFC antenna is integrated into the device for this model, therefore, all SAR test were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the antenna can be found in the operational description. According to FCC KDB publication 447498 D01v06, transmitters are consider to be operating simultaneously when there is overlapping transmission, with the exception of transmission during network hand-offs with maximum hand-off duration less than 30 seconds. - For WLAN ANT6 The device employs proximity sensors that detect the presence of the user's body also a finger or hand near the bottom face, edge 4 of the device, reduced power will be active for all WLAN bands. (P-sensor can't work at detecting presence of the user's body at other edges of the device.) - For WLAN ANT7 The device employs proximity sensors that detect the presence of the user's body also a finger or hand near the bottom face, edge 1 of the device, reduced power will be active for all WLAN bands. (P-sensor can't work at detecting presence of the user's body at other edges of the device.)	


Specification of Accessory				
Battery	Brand Name	Zebra	Model Number	BT-000455

Supported Unit Used in Test Configuration and System				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency 5850MHz and lowest 2450MHz frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the Bottom Face, Edge 1/4 of the device are utilized to determine when the device comes in proximity of the user's body at the Bottom Face or Edge 1/4 side of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, WLAN 2.4GHz / WLAN 5.2GHz / WLAN 5.3GHz / WLAN 5.5GHz / WLAN 5.8GHz reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the Bottom Face and Edge 4 side for ANT6 and Bottom Face and Edge 1 side for ANT7 of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

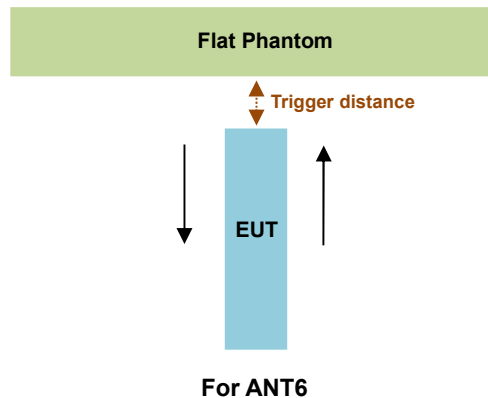

Proximity Sensor Triggering Distance (mm)				
Position	Bottom Face		Edge 4	
	Moving away	Moving towards	Moving away	Moving towards
Minimum	15	15	15	15

For ANT7

Proximity Sensor Triggering Distance (mm)				
Position	Bottom Face		Edge 1	
	Moving away	Moving towards	Moving away	Moving towards
Minimum	16	15	17	15

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.


Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at 15mm for Edge 4 and 15mm for Edge 1 separation for WLAN bands.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

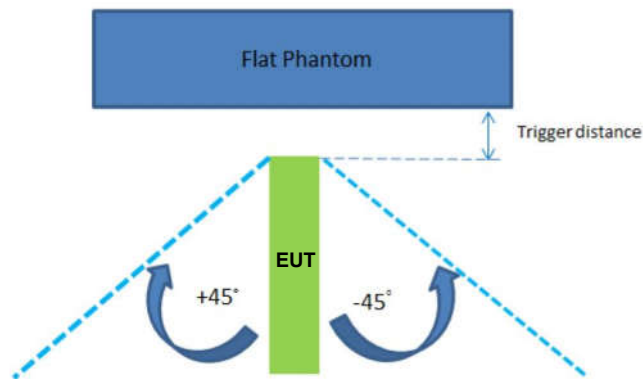
For ANT6

The Sensor Trigger Distance (mm)	
Position	Edge 4
Minimum	15

For ANT7

The Sensor Trigger Distance (mm)	
Position	Edge 1
Minimum	15

Proximity sensor power reduction

For ANT6

Exposure Position / wireless mode	Bottom Face ⁽¹⁾	Edge 1	Edge 2	Edge 3	Edge 4 ⁽¹⁾
WLAN 2.4GHz	1.5dB	0dB	0dB	0dB	1.5dB
WLAN 5.2GHz	7.5dB	0dB	0dB	0dB	7.5dB
WLAN 5.3GHz	8.5dB	0dB	0dB	0dB	8.5dB
WLAN 5.5GHz	9.0dB	0dB	0dB	0dB	9.0dB
WLAN 5.8GHz	10.0dB	0dB	0dB	0dB	10.0dB

For ANT7

Exposure Position / wireless mode	Bottom Face ⁽¹⁾	Edge 1 ⁽¹⁾	Edge 2	Edge 3	Edge 4
WLAN 2.4GHz	3.5dB	3.5dB	0dB	0dB	0dB
WLAN 5.2GHz	7.5dB	7.5dB	0dB	0dB	0dB
WLAN 5.3GHz	8.0dB	8.0dB	0dB	0dB	0dB
WLAN 5.5GHz	8.0dB	8.0dB	0dB	0dB	0dB
WLAN 5.8GHz	9.0dB	9.0dB	0dB	0dB	0dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - For ANT6
 - Bottom Face: 14 mm
 - Edge 4: 14 mm
 - For ANT7
 - Bottom Face: 14 mm
 - Edge 1: 14 mm



Power Measurement during Sensor Trigger distance testing



For ANT6



Band/Mode	Measured power reduction (dBm)		Reduction Levels
	w/o power back-off	w/ power back-off	(dB)
WLAN 2.4GHz	21.50	20.00	1.5
WLAN 5.2GHz	21.00	13.50	7.5
WLAN 5.3GHz	21.00	12.50	8.5
WLAN 5.5GHz	21.00	12.00	9.0
WLAN 5.8GHz	21.50	11.50	10.0



For ANT7

Band/Mode	Measured power reduction (dBm)		Reduction Levels
	w/o power back-off	w/ power back-off	(dB)
WLAN 2.4GHz	21.50	18.00	3.5
WLAN 5.2GHz	21.50	14.00	7.5
WLAN 5.3GHz	21.00	13.00	8.0
WLAN 5.5GHz	21.00	13.00	8.0
WLAN 5.8GHz	21.50	12.50	9.0

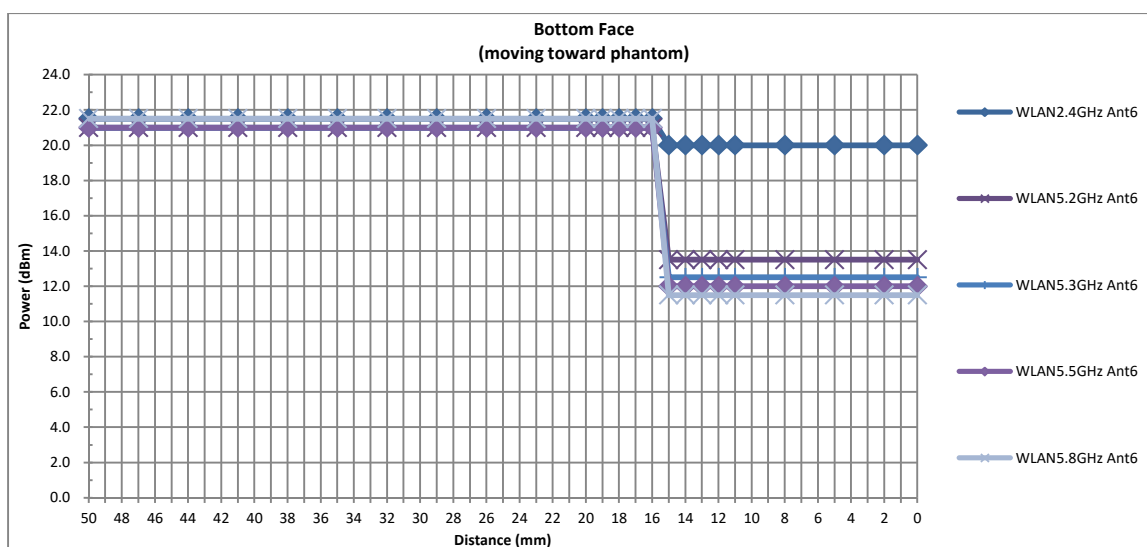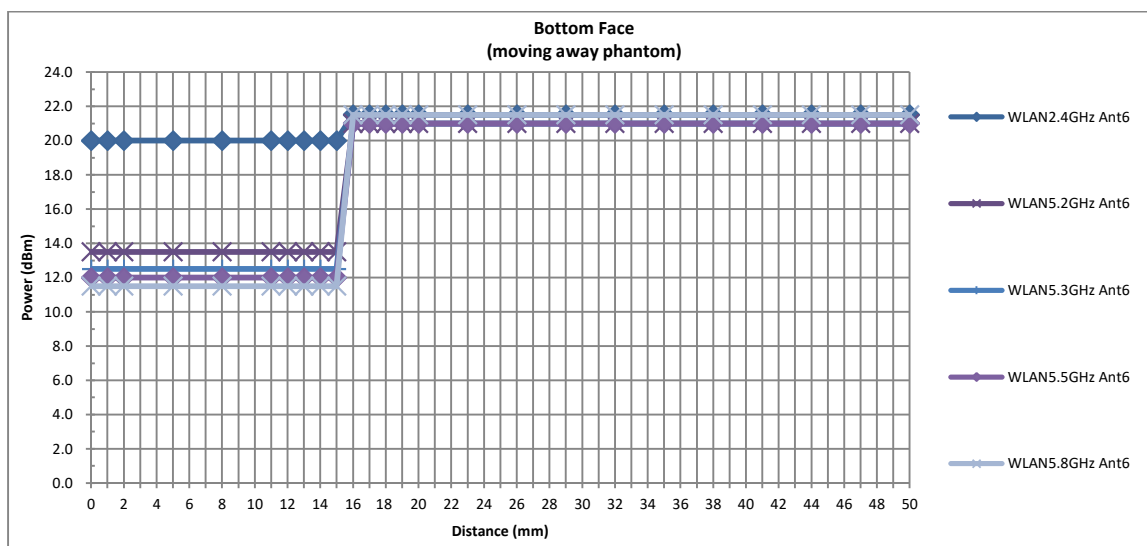

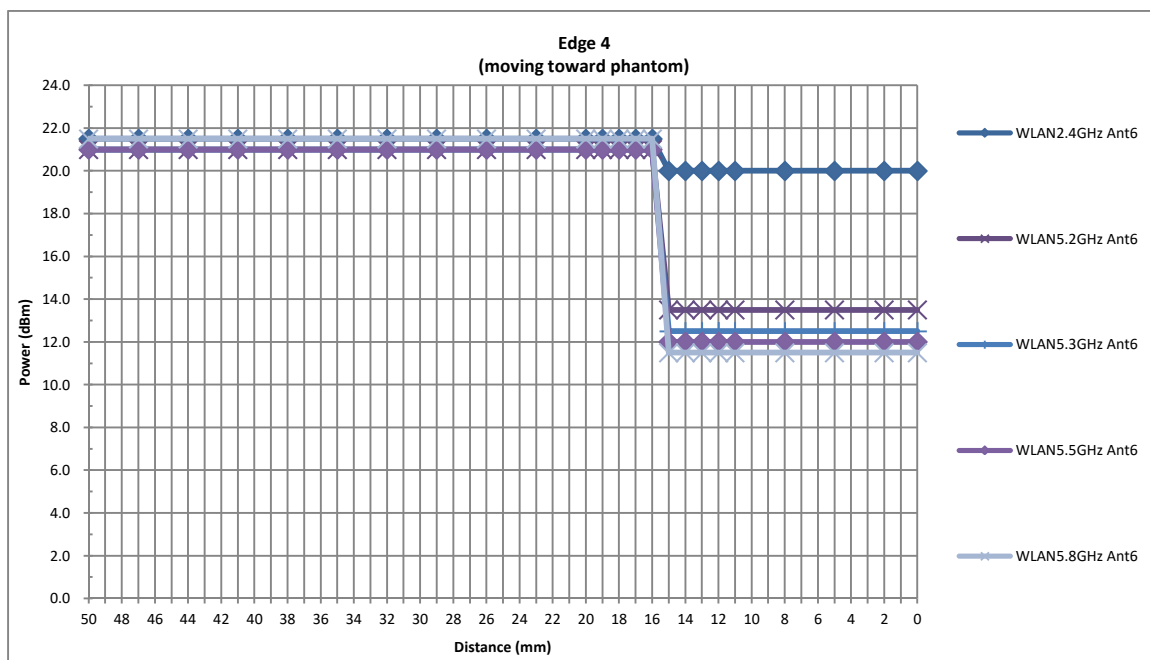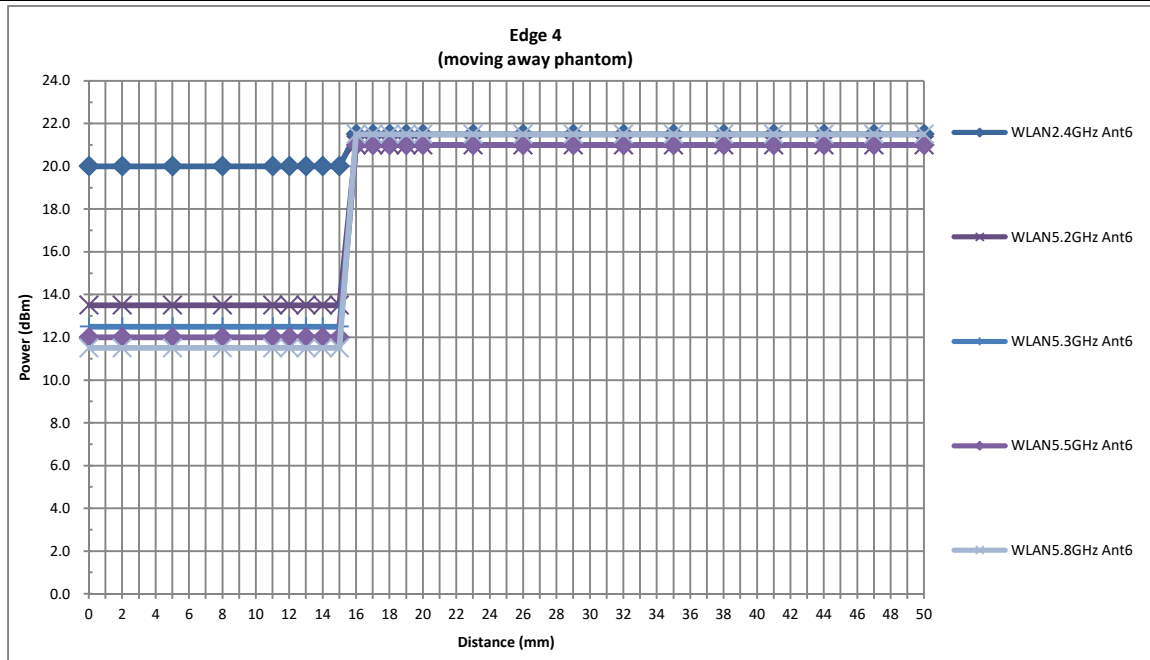

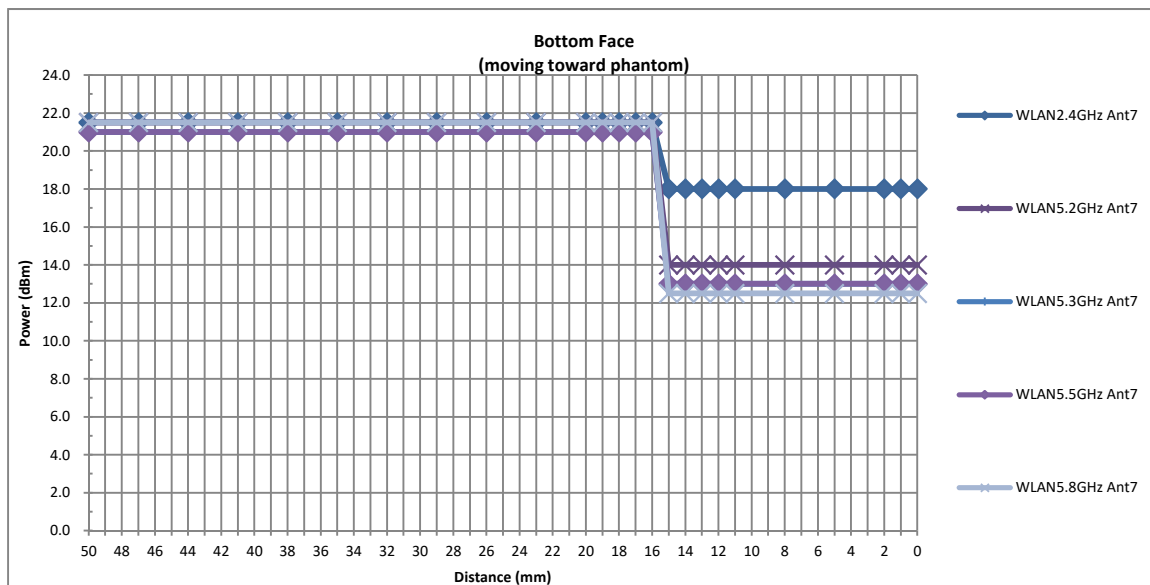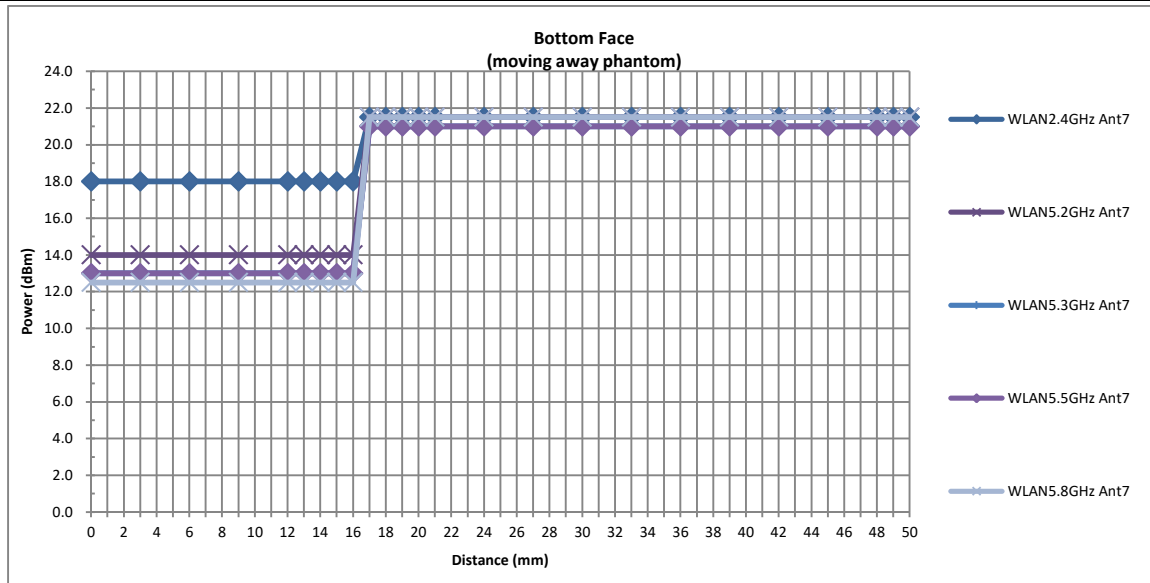

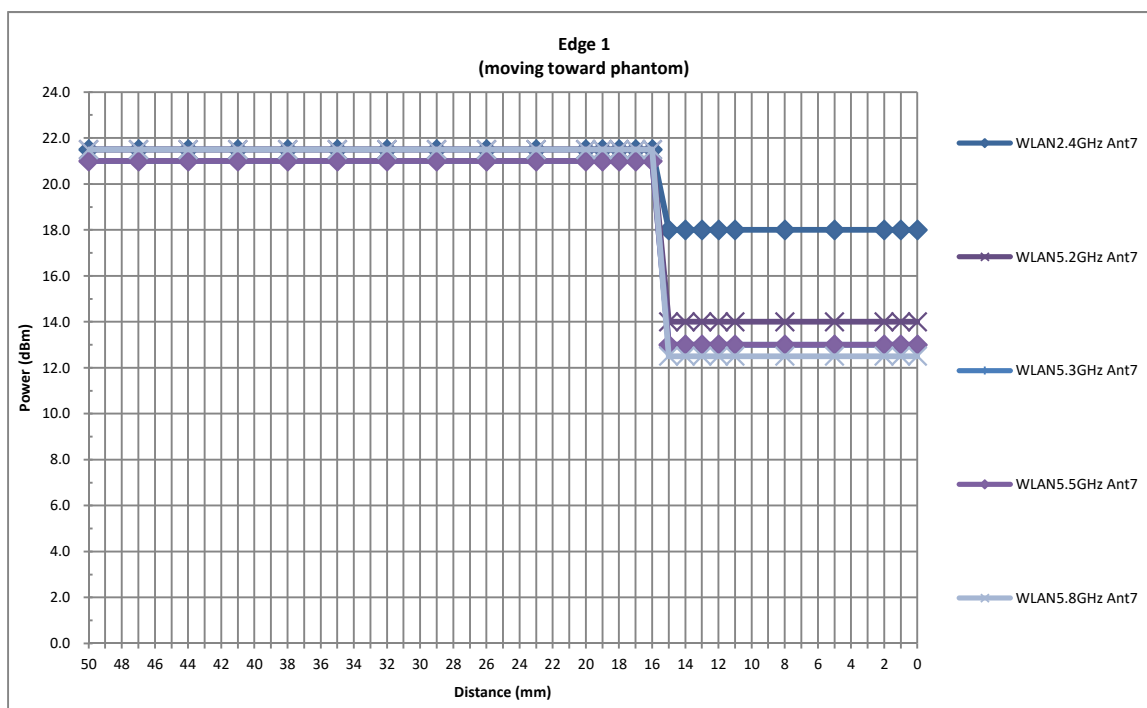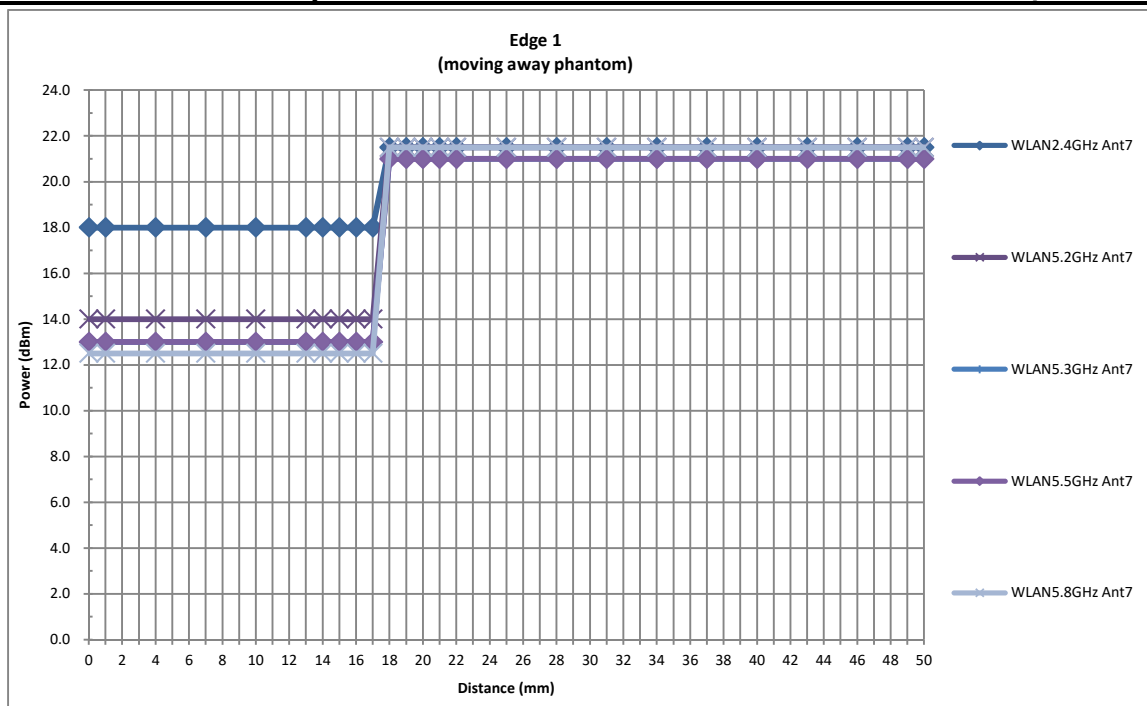

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

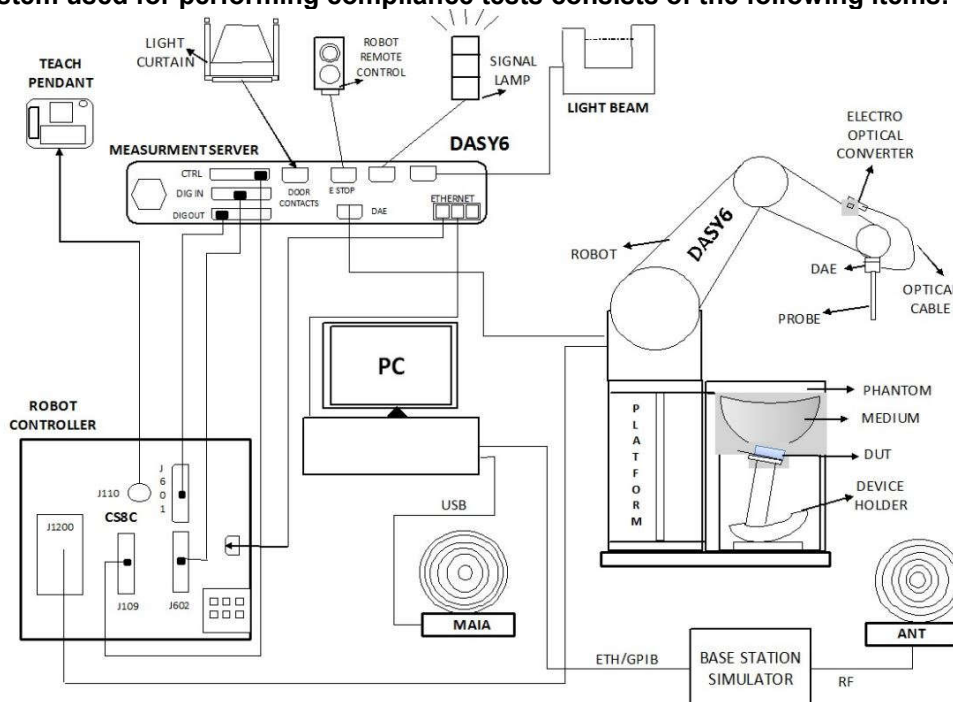

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	924	2020/9/2	2023/9/1
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2022/9/22
SPEAG	Data Acquisition Electronics	DAE4	1303	2021/6/18	2022/6/17
SPEAG	Data Acquisition Electronics	DAE4	1649	2022/3/30	2023/3/29
SPEAG	Dosimetric E-Field Probe	EX3DV4	7706	2022/1/20	2023/1/19
SPEAG	Dosimetric E-Field Probe	EX3DV4	3887	2021/10/22	2022/10/21
SPEAG	ELI4 Phantom	ELI 5.0	TP-2135	NCR	NCR
SPEAG	ELI4 Phantom	ELI 8.0	TP-2151	NCR	NCR
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/1/6	2023/1/5
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2021/7/31	2022/7/30
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2021/6/9	2022/6/8
Anritsu	Vector Signal Generator	MG3710A	6201682672	2022/1/6	2023/1/5
Rohde & Schwarz	Power Meter	NRVD	102081	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2021/8/12	2022/8/11
R&S	CBT BLUETOOTH TESTER	CBT	100641	2022/1/5	2023/1/4
EXA	Spectrum Analyzer	FSV7	101631	2021/10/14	2022/10/13
FLUKE	DIGITAC THERMOMETER	51II	97240029	2021/10/23	2022/10/22
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1.



Fig 11.1 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Head	22.7	1.809	38.523	1.80	39.20	0.50	-1.73	±5	2022/4/11
5250	Head	22.8	4.566	35.977	4.71	35.90	-3.06	0.21	±5	2022/4/11
5600	Head	22.9	4.965	35.441	5.07	35.50	-2.07	-0.17	±5	2022/4/12
5750	Head	22.9	5.130	35.252	5.22	35.40	-1.72	-0.42	±5	2022/4/12
2450	Head	22.6	1.880	40.900	1.80	39.20	4.44	4.34	±5	2022/5/24
5250	Head	22.7	4.600	35.900	4.71	35.90	-2.34	0.00	±5	2022/5/26
5600	Head	22.8	5.000	35.400	5.07	35.50	-1.38	-0.28	±5	2022/5/28
5750	Head	22.9	5.130	35.300	5.22	35.40	-1.72	-0.28	±5	2022/5/30

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2022/4/11	2450	Head	50	924	7706	1303	2.500	51.40	50	-2.72
2022/4/11	5250	Head	50	1113	7706	1303	3.780	80.50	75.6	-6.09
2022/4/12	5600	Head	50	1113	7706	1303	3.990	83.40	79.8	-4.32
2022/4/12	5750	Head	50	1113	7706	1303	4.220	80.00	84.4	5.50
2022/5/24	2450	Head	50	924	3887	1649	2.600	51.40	52	1.17
2022/5/26	5250	Head	50	1113	3887	1649	3.820	80.50	76.4	-5.09
2022/5/28	5600	Head	50	1113	3887	1649	4.370	83.40	87.4	4.80
2022/5/30	5750	Head	50	1113	3887	1649	3.950	80.00	79	-1.25

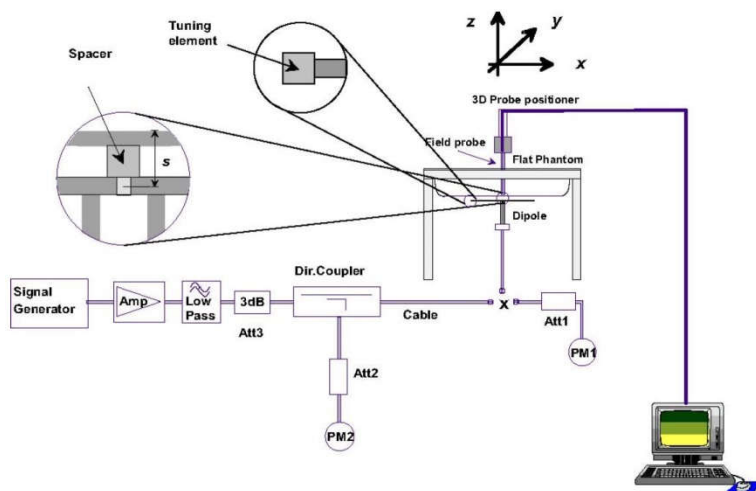


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



12. RF Exposure Positions

12.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

<EUT Setup Photos>

Please refer to the test setup photos.

13. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. 802.11ax supports full tone size and partial tone size, after verification for the partial tone power level is far less than full tone power level, so we chose full tone power to be measured in this report.
6. The 2.4GHz/5GHz WLAN can transmit in SISO/MIMO antenna mode. TX Beamforming mode is only supported in 2.4GHz WLAN 802.11ax and 5GHz WLAN 802.11n/ax.
7. Due to the single antenna RF power in WLAN SISO & MIMO (CDD) mode is larger than or very close to the single antenna RF power in Beamforming mode, so beamforming mode only measured full conducted power.

Full Power
<2.4GHz WLAN>

Ant 6						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	21.50	21.50	99.30
		6	2437	21.40	21.50	
		11	2462	20.30	21.50	
	802.11g 6Mbps	1	2412	16.90	18.00	95.40
		2	2417	17.90	19.00	
		6	2437	20.80	21.00	
		9	2452	19.30	20.00	
		10	2457	15.50	16.50	
		11	2462	13.60	14.50	
	802.11n-HT20 MCS0	1	2412	15.50	16.50	97.50
		2	2417	18.40	19.00	
		6	2437	18.80	19.00	
		9	2452	17.70	18.50	
		10	2457	15.10	16.00	
		11	2462	12.90	14.50	
	802.11ac-VHT20 MCS0	1	2412	15.50	16.50	97.50
		2	2417	18.40	19.00	
		6	2437	18.80	19.00	
		9	2452	17.70	18.50	
		10	2457	15.10	16.00	
		11	2462	12.90	14.50	
	802.11ax-HE20 MCS0	1	2412	15.60	16.50	97.50
		2	2417	18.50	19.00	
		6	2437	18.90	19.00	
		9	2452	17.80	18.50	
		10	2457	15.20	16.00	
		11	2462	13.00	14.50	

Ant 7						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	20.50	21.50	99.30
		6	2437	20.40	21.50	
		11	2462	19.30	20.50	
	802.11g 6Mbps	1	2412	16.50	17.50	95.40
		2	2417	17.70	19.00	
		6	2437	20.20	21.00	
		9	2452	18.50	19.50	
		10	2457	14.90	16.50	
		11	2462	13.50	14.50	
	802.11n-HT20 MCS0	1	2412	14.80	16.00	97.50
		2	2417	18.10	19.00	
		6	2437	18.50	19.00	
		9	2452	17.00	18.00	
		10	2457	14.60	15.50	
		11	2462	13.30	14.50	
	802.11ac-VHT20 MCS0	1	2412	14.80	16.00	97.50
		2	2417	18.10	19.00	
		6	2437	18.50	19.00	
		9	2452	17.00	18.00	
		10	2457	14.60	15.50	
		11	2462	13.30	14.50	
	802.11ax-HE20 MCS0	1	2412	14.90	16.00	97.50
		2	2417	18.20	19.00	
		6	2437	18.60	19.00	
		9	2452	17.10	18.00	
		10	2457	14.70	15.50	
		11	2462	13.40	14.50	

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	24.04	24.50	99.30
		6	2437	23.94	24.50	
		11	2462	22.84	24.00	
	802.11g 6Mbps	1	2412	19.71	20.50	95.40
		2	2417	20.81	22.00	
		6	2437	23.52	24.00	
		9	2452	21.93	22.50	
		10	2457	18.22	19.50	
		11	2462	16.56	17.50	
	802.11n-HT20 MCS0	1	2412	18.17	19.00	97.50
		2	2417	21.26	22.00	
		6	2437	21.66	22.00	
		9	2452	20.37	21.00	
		10	2457	17.87	18.50	
		11	2462	16.11	17.50	
	802.11ac-VHT20 MCS0	1	2412	18.17	19.00	97.50
		2	2417	21.26	22.00	
		6	2437	21.66	22.00	
		9	2452	20.37	21.00	
		10	2457	17.87	18.50	
		11	2462	16.11	17.50	
	802.11ax-HE20 MCS0	1	2412	18.27	19.00	97.50
		2	2417	21.36	22.00	
		6	2437	21.76	22.00	
		9	2452	20.47	21.00	
		10	2457	17.97	18.50	
		11	2462	16.21	17.50	

<5GHz WLAN>

Ant 6						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	19.20	21.00	93.51
		40	5200	19.10	20.50	
		44	5220	19.10	21.00	
		48	5240	19.20	21.00	
	802.11n-HT20 MCS0	36	5180	19.10	21.00	93.06
		40	5200	19.20	20.50	
		44	5220	19.40	21.00	
		48	5240	19.00	20.50	
	802.11n-HT40 MCS0	38	5190	16.10	17.50	86.84
		46	5230	20.40	20.50	
	802.11ac-VHT20 MCS0	36	5180	19.10	20.50	93.06
		40	5200	19.20	21.00	
		44	5220	19.40	21.00	
		48	5240	19.00	20.50	
	802.11ac-VHT40 MCS0	38	5190	16.10	17.50	86.84
		46	5230	20.40	20.50	
	802.11ac-VHT80 MCS0	42	5210	15.30	17.00	92.19
	802.11ax-HE20 MCS0	36	5180	19.20	21.00	97.51
		40	5200	19.40	21.00	
		44	5220	19.50	21.00	
		48	5240	19.10	21.00	
	802.11ax-HE40 MCS0	38	5190	16.20	17.50	95.19
		46	5230	20.50	20.50	
	802.11ax-HE80 MCS0	42	5210	15.40	17.00	90.74

Ant 7						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	19.10	21.00	93.51
		40	5200	19.10	21.00	
		44	5220	19.10	21.00	
		48	5240	19.20	21.00	
	802.11n-HT20 MCS0	36	5180	19.10	21.00	93.06
		40	5200	19.10	20.50	
		44	5220	19.60	21.50	
		48	5240	19.10	21.00	
	802.11n-HT40 MCS0	38	5190	15.80	17.50	86.84
		46	5230	20.30	20.50	
	802.11ac-VHT20 MCS0	36	5180	19.10	20.50	93.06
		40	5200	19.10	21.00	
		44	5220	19.60	21.50	
		48	5240	19.10	20.50	
	802.11ac-VHT40 MCS0	38	5190	15.80	17.50	86.84
		46	5230	20.30	20.50	
	802.11ac-VHT80 MCS0	42	5210	15.00	16.50	92.19
	802.11ax-HE20 MCS0	36	5180	19.20	21.00	97.51
		40	5200	19.60	21.00	
		44	5220	19.70	21.50	
		48	5240	19.20	21.00	
	802.11ax-HE40 MCS0	38	5190	15.90	17.50	95.19
		46	5230	20.40	20.50	
	802.11ax-HE80 MCS0	42	5210	15.10	16.50	90.74

Ant 6+7						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	22.16	24.00	93.51
		40	5200	22.11	23.50	
		44	5220	22.11	24.00	
		48	5240	22.21	24.00	
	802.11n-HT20 MCS0	36	5180	22.11	24.00	93.06
		40	5200	22.16	23.50	
		44	5220	22.51	24.00	
		48	5240	22.06	23.50	
	802.11n-HT40 MCS0	38	5190	18.96	20.50	86.84
		46	5230	23.36	23.50	
	802.11ac-VHT20 MCS0	36	5180	22.11	23.50	93.06
		40	5200	22.16	24.00	
		44	5220	22.51	24.00	
		48	5240	22.06	23.50	
	802.11ac-VHT40 MCS0	38	5190	18.96	20.50	86.84
		46	5230	23.36	23.50	
	802.11ac-VHT80 MCS0	42	5210	18.16	19.50	92.19
	802.11ax-HE20 MCS0	36	5180	22.21	24.00	97.51
		40	5200	22.51	24.00	
		44	5220	22.61	24.00	
		48	5240	22.16	24.00	
	802.11ax-HE40 MCS0	38	5190	19.06	20.50	95.19
		46	5230	23.46	23.50	
	802.11ax-HE80 MCS0	42	5210	18.26	19.50	90.74

Ant 6						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	19.20	21.00	93.51
		56	5280	19.20	21.00	
		60	5300	19.20	21.00	
		64	5320	19.20	21.00	
	802.11n-HT20 MCS0	52	5260	18.80	20.50	93.06
		56	5280	18.70	20.50	
		60	5300	18.70	20.50	
		64	5320	18.80	20.50	
	802.11n-HT40 MCS0	54	5270	20.30	20.50	86.84
		62	5310	17.70	19.50	
	802.11ac-VHT20 MCS0	52	5260	18.80	20.50	93.06
		56	5280	18.70	20.50	
		60	5300	18.70	20.50	
		64	5320	18.80	20.50	
	802.11ac-VHT40 MCS0	54	5270	20.30	20.50	86.84
		62	5310	17.70	19.50	
	802.11ac-VHT80 MCS0	58	5290	16.90	18.50	92.19
	802.11ax-HE20 MCS0	52	5260	18.90	20.50	97.51
		56	5280	18.80	20.50	
		60	5300	18.80	20.50	
		64	5320	18.90	20.50	
	802.11ax-HE40 MCS0	54	5270	20.40	20.50	95.19
		62	5310	17.80	19.50	
	802.11ax-HE80 MCS0	58	5290	17.00	18.50	90.74

Ant 7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	19.10	21.00	93.51
		56	5280	19.20	21.00	
		60	5300	19.20	21.00	
		64	5320	19.00	21.00	
	802.11n-HT20 MCS0	52	5260	18.30	20.00	93.06
		56	5280	18.20	20.00	
		60	5300	18.40	20.00	
		64	5320	18.20	20.00	
	802.11n-HT40 MCS0	54	5270	19.70	20.50	86.84
		62	5310	17.30	19.00	
	802.11ac-VHT20 MCS0	52	5260	18.30	20.00	93.06
		56	5280	18.20	20.00	
		60	5300	18.40	20.00	
		64	5320	18.20	20.00	
	802.11ac-VHT40 MCS0	54	5270	19.70	20.50	86.84
		62	5310	17.30	19.00	
	802.11ac-VHT80 MCS0	58	5290	16.40	18.00	92.19
	802.11ax-HE20 MCS0	52	5260	18.40	20.00	97.51
		56	5280	18.40	20.00	
		60	5300	18.50	20.00	
		64	5320	18.30	20.00	
	802.11ax-HE40 MCS0	54	5270	19.80	20.50	95.19
		62	5310	17.40	19.00	
	802.11ax-HE80 MCS0	58	5290	16.50	18.00	90.74

Ant 6+7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	22.16	24.00	93.51
		56	5280	22.21	24.00	
		60	5300	22.21	24.00	
		64	5320	22.11	24.00	
	802.11n-HT20 MCS0	52	5260	21.57	23.00	93.06
		56	5280	21.46	23.00	
		60	5300	21.56	23.00	
		64	5320	21.52	23.00	
	802.11n-HT40 MCS0	54	5270	23.02	23.50	86.84
		62	5310	20.51	22.00	
	802.11ac-VHT20 MCS0	52	5260	21.57	23.00	93.06
		56	5280	21.46	23.00	
		60	5300	21.56	23.00	
		64	5320	21.52	23.00	
	802.11ac-VHT40 MCS0	54	5270	23.02	23.50	86.84
		62	5310	20.51	22.00	
	802.11ac-VHT80 MCS0	58	5290	19.67	21.00	92.19
	802.11ax-HE20 MCS0	52	5260	21.67	23.00	97.51
		56	5280	21.61	23.00	
		60	5300	21.66	23.00	
		64	5320	21.62	23.00	
	802.11ax-HE40 MCS0	54	5270	23.12	23.50	95.19
		62	5310	20.61	22.00	
	802.11ax-HE80 MCS0	58	5290	19.77	21.00	90.74

Ant 6						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	19.50	21.00	93.51
		116	5580	19.40	21.00	
		124	5620	19.30	21.00	
		132	5660	19.30	21.00	
		140	5700	19.00	20.50	
		144	5720	19.50	21.00	
	802.11n-HT20 MCS0	100	5500	19.10	21.00	93.06
		116	5580	18.90	20.50	
		124	5620	19.00	20.50	
		132	5660	19.00	20.50	
		140	5700	17.30	19.00	
		144	5720	18.80	20.50	
	802.11n-HT40 MCS0	102	5510	17.90	19.50	86.84
		110	5550	20.40	20.50	
		126	5630	20.30	20.50	
		134	5670	19.30	20.00	
		142	5710	20.40	20.50	
		144	5720	18.80	20.50	
	802.11ac-VHT20 MCS0	100	5500	19.10	20.50	93.06
		116	5580	18.90	20.50	
		124	5620	19.00	20.50	
		132	5660	19.00	20.50	
		140	5700	17.30	19.00	
		144	5720	18.80	20.50	
	802.11ac-VHT40 MCS0	102	5510	17.90	19.50	86.84
		110	5550	20.40	20.50	
		126	5630	20.30	20.50	
		134	5710	19.30	20.50	
		142	5710	20.40	20.50	
		144	5720	18.80	20.50	
	802.11ac-VHT80 MCS0	106	5530	17.20	19.00	92.19
		122	5610	20.20	20.50	
		138	5690	20.00	20.50	
		144	5720	18.90	20.50	
	802.11ax-HE20 MCS0	100	5500	19.20	21.00	97.51
		116	5580	19.00	20.50	
		124	5620	19.00	20.50	
		132	5660	19.00	20.50	
		140	5700	17.40	19.00	
		144	5720	18.90	20.50	
	802.11ax-HE40 MCS0	102	5510	18.00	19.50	95.19
		110	5550	20.50	20.50	
		126	5630	20.50	20.50	
		134	5670	19.40	20.50	
		142	5710	20.50	20.50	
	802.11ax-HE80 MCS0	106	5530	17.30	19.00	90.74
		122	5610	20.30	20.50	
		138	5690	20.10	20.50	

Ant 7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	19.10	21.00	93.51
		116	5580	19.30	21.00	
		124	5620	19.20	21.00	
		132	5660	19.20	21.00	
		140	5700	18.50	20.00	
		144	5720	19.10	21.00	
	802.11n-HT20 MCS0	100	5500	18.30	20.00	93.06
		116	5580	18.30	20.00	
		124	5620	18.20	20.00	
		132	5660	18.20	20.00	
		140	5700	17.10	18.50	
		144	5720	18.40	20.00	
	802.11n-HT40 MCS0	102	5510	17.20	18.50	86.84
		110	5550	19.60	20.50	
		126	5630	19.50	20.50	
		134	5670	19.20	20.00	
		142	5710	19.90	20.50	
	802.11ac-VHT20 MCS0	100	5500	18.30	20.00	93.06
		116	5580	18.30	20.00	
		124	5620	18.40	20.00	
		132	5660	18.40	20.00	
		140	5700	17.10	19.00	
		144	5720	18.40	20.00	
	802.11ac-VHT40 MCS0	102	5510	17.20	19.00	86.84
		110	5550	19.60	20.50	
		126	5630	19.50	20.50	
		134	5710	19.20	20.50	
		142	5710	19.90	20.50	
	802.11ac-VHT80 MCS0	106	5530	16.70	18.50	92.19
		122	5610	19.80	20.50	
		138	5690	19.80	20.50	
	802.11ax-HE20 MCS0	100	5500	18.40	20.00	97.51
		116	5580	18.40	20.00	
		124	5620	18.30	20.00	
		132	5660	18.20	20.00	
		140	5700	17.20	19.00	
		144	5720	18.50	20.00	
	802.11ax-HE40 MCS0	102	5510	17.30	19.00	95.19
		110	5550	19.70	20.50	
		126	5630	19.60	20.50	
		134	5670	19.30	20.50	
		142	5710	20.00	20.50	
	802.11ax-HE80 MCS0	106	5530	16.80	18.50	90.74
		122	5610	19.90	20.50	
		138	5690	19.90	20.50	

Ant 6+7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	22.31	24.00	93.51
		116	5580	22.36	24.00	
		124	5620	22.26	24.00	
		132	5660	22.26	24.00	
		140	5700	21.77	23.00	
		144	5720	22.31	24.00	
	802.11n-HT20 MCS0	100	5500	21.73	23.50	93.06
		116	5580	21.62	23.00	
		124	5620	21.62	23.00	
		132	5660	21.62	23.00	
		140	5700	20.21	21.50	
		144	5720	21.61	23.00	
	802.11n-HT40 MCS0	102	5510	20.57	22.00	86.84
		110	5550	23.03	23.50	
		126	5630	22.92	23.50	
		134	5670	22.26	23.00	
		142	5710	23.17	23.50	
	802.11ac-VHT20 MCS0	100	5500	21.73	23.00	93.06
		116	5580	21.62	23.00	
		124	5620	21.72	23.00	
		132	5660	21.72	23.00	
		140	5700	20.21	22.00	
		144	5720	21.61	23.00	
	802.11ac-VHT40 MCS0	102	5510	20.57	22.00	86.84
		110	5550	23.03	23.50	
		126	5630	22.92	23.50	
		134	5710	22.26	23.50	
		142	5710	23.17	23.50	
	802.11ac-VHT80 MCS0	106	5530	19.97	21.50	92.19
		122	5610	23.01	23.50	
		138	5690	22.91	23.50	
	802.11ax-HE20 MCS0	100	5500	21.83	23.50	97.51
		116	5580	21.72	23.00	
		124	5620	21.67	23.00	
		132	5660	21.62	23.00	
		140	5700	20.31	22.00	
		144	5720	21.71	23.00	
	802.11ax-HE40 MCS0	102	5510	20.67	22.00	95.19
		110	5550	23.13	23.50	
		126	5630	23.07	23.50	
		134	5670	22.36	23.50	
		142	5710	23.27	23.50	
	802.11ax-HE80 MCS0	106	5530	20.07	21.50	90.74
		122	5610	23.11	23.50	
		138	5690	23.01	23.50	

Ant 6						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	21.10	21.50	93.51
		157	5785	21.20	21.50	
		165	5825	21.20	21.50	
	802.11n-HT20 MCS0	149	5745	21.00	21.50	93.06
		157	5785	21.10	21.50	
		165	5825	21.00	21.50	
	802.11n-HT40 MCS0	151	5755	20.40	20.50	86.84
		159	5795	20.40	20.50	
	802.11ac-VHT20 MCS0	149	5745	21.00	21.50	93.06
		157	5785	21.10	21.50	
		165	5825	21.00	21.50	
	802.11ac-VHT40 MCS0	151	5755	20.40	20.50	86.84
		159	5795	20.40	20.50	
	802.11ac-VHT80 MCS0	155	5775	20.30	20.50	92.19
	802.11ax-HE20 MCS0	149	5745	21.10	21.50	97.51
		157	5785	21.20	21.50	
		165	5825	21.10	21.50	
	802.11ax-HE40 MCS0	151	5755	20.50	20.50	95.19
		159	5795	20.50	20.50	
	802.11ax-HE80 MCS0	155	5775	20.40	20.50	90.74

Ant 7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	20.80	21.50	93.51
		157	5785	20.70	21.50	
		165	5825	20.50	21.50	
	802.11n-HT20 MCS0	149	5745	20.60	21.50	93.06
		157	5785	20.50	21.50	
		165	5825	20.30	21.50	
	802.11n-HT40 MCS0	151	5755	19.60	20.50	86.84
		159	5795	19.50	20.50	
	802.11ac-VHT20 MCS0	149	5745	20.60	21.50	93.06
		157	5785	20.50	21.50	
		165	5825	20.30	21.50	
	802.11ac-VHT40 MCS0	151	5755	19.60	20.50	86.84
		159	5795	19.50	20.50	
	802.11ac-VHT80 MCS0	155	5775	19.30	20.50	92.19
	802.11ax-HE20 MCS0	149	5745	20.70	21.50	97.51
		157	5785	20.60	21.50	
		165	5825	20.40	21.50	
	802.11ax-HE40 MCS0	151	5755	19.70	20.50	95.19
		159	5795	19.60	20.50	
	802.11ax-HE80 MCS0	155	5775	19.40	20.50	90.74

Ant 6+7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	23.96	24.50	93.51
		157	5785	23.97	24.50	
		165	5825	23.87	24.50	
	802.11n-HT20 MCS0	149	5745	23.81	24.50	93.06
		157	5785	23.82	24.50	
		165	5825	23.67	24.50	
	802.11n-HT40 MCS0	151	5755	23.03	23.50	86.84
		159	5795	22.98	23.50	
	802.11ac-VHT20 MCS0	149	5745	23.81	24.50	93.06
		157	5785	23.82	24.50	
		165	5825	23.67	24.50	
	802.11ac-VHT40 MCS0	151	5755	23.03	23.50	86.84
		159	5795	22.98	23.50	
	802.11ac-VHT80 MCS0	155	5775	22.84	23.50	92.19
	802.11ax-HE20 MCS0	149	5745	23.91	24.50	97.51
		157	5785	23.92	24.50	
		165	5825	23.77	24.50	
	802.11ax-HE40 MCS0	151	5755	23.13	23.50	95.19
		159	5795	23.08	23.50	
	802.11ax-HE80 MCS0	155	5775	22.94	23.50	90.74

Sensor on
<2.4GHz WLAN>

Ant 6						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	19.60	20.00	99.30
		6	2437	19.70	20.00	
		11	2462	19.90	20.00	
	802.11g 6Mbps	1	2412	16.90	18.00	95.40
		2	2417	17.90	19.00	
		6	2437	19.70	20.00	
		9	2452	19.30	20.00	
		10	2457	15.50	16.50	
		11	2462	13.60	14.50	
	802.11n-HT20 MCS0	1	2412	Not Required	16.50	97.50
		2	2417		19.00	
		6	2437		19.00	
		9	2452		18.50	
		10	2457		16.00	
		11	2462		14.50	
	802.11ac-VHT20 MCS0	1	2412		16.50	97.50
		2	2417		19.00	
		6	2437		19.00	
		9	2452		18.50	
		10	2457		16.00	
		11	2462		14.50	
	802.11ax-HE20 MCS0	1	2412		16.50	97.50
		2	2417		19.00	
		6	2437		19.00	
		9	2452		18.50	
		10	2457		16.00	
		11	2462		14.50	

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.90	18.00	99.30
		6	2437	17.80	18.00	
		11	2462	17.70	18.00	
	802.11g 6Mbps	1	2412	16.50	17.50	95.40
		2	2417	17.17	18.00	
		6	2437	17.40	18.00	
		9	2452	17.30	18.00	
		10	2457	14.90	16.50	
		11	2462	13.50	14.50	
	802.11n-HT20 MCS0	1	2412	Not Required	16.00	97.50
		2	2417		18.00	
		6	2437		18.00	
		9	2452		18.00	
		10	2457		15.50	
		11	2462		14.50	
	802.11ac-VHT20 MCS0	1	2412		16.00	97.50
		2	2417		18.00	
		6	2437		18.00	
		9	2452		18.00	
		10	2457		15.50	
		11	2462		14.50	
	802.11ax-HE20 MCS0	1	2412		16.00	97.50
		2	2417		18.00	
		6	2437		18.00	
		9	2452		18.00	
		10	2457		15.50	
		11	2462		14.50	

Ant 6+7						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	21.84	22.00	99.30
		6	2437	21.86	22.00	
		11	2462	21.95	22.00	
	802.11g 6Mbps	1	2412	19.71	20.50	95.40
		2	2417	20.53	22.00	
		6	2437	21.71	22.00	
		9	2452	21.42	22.00	
		10	2457	18.22	19.50	
		11	2462	16.56	17.50	
	802.11n-HT20 MCS0	1	2412	Not Required	19.00	97.50
		2	2417		21.50	
		6	2437		21.50	
		9	2452		21.00	
		10	2457		18.50	
		11	2462		17.50	
	802.11ac-VHT20 MCS0	1	2412		19.00	97.50
		2	2417		21.50	
		6	2437		21.50	
		9	2452		21.00	
		10	2457		18.50	
		11	2462		17.50	
	802.11ax-HE20 MCS0	1	2412		19.00	97.50
		2	2417		21.50	
		6	2437		21.50	
		9	2452		21.00	
		10	2457		18.50	
		11	2462		17.50	

<5GHz WLAN>

Ant 6						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	Not Required	13.50	93.51
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11n-HT20 MCS0	36	5180	Not Required	13.50	93.06
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11n-HT40 MCS0	38	5190	12.10	13.50	86.84
		46	5230	13.40	13.50	
	802.11ac-VHT20 MCS0	36	5180	Not Required	13.50	93.06
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11ac-VHT40 MCS0	38	5190	Not Required	13.50	86.84
		46	5230		13.50	
	802.11ac-VHT80 MCS0	42	5210	13.20	13.50	92.19
	802.11ax-HE20 MCS0	36	5180	Not Required	13.50	97.51
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11ax-HE40 MCS0	38	5190	Not Required	13.50	95.19
		46	5230		13.50	
	802.11ax-HE80 MCS0	42	5210	Not Required	13.50	90.74

Ant 7						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	Not Required	14.00	93.51
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11n-HT20 MCS0	36	5180	Not Required	14.00	93.06
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11n-HT40 MCS0	38	5190	12.50	14.00	86.84
		46	5230	13.60	14.00	
	802.11ac-VHT20 MCS0	36	5180	Not Required	14.00	93.06
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11ac-VHT40 MCS0	38	5190	Not Required	14.00	86.84
		46	5230		14.00	
	802.11ac-VHT80 MCS0	42	5210	13.80	14.00	92.19
	802.11ax-HE20 MCS0	36	5180	Not Required	14.00	97.51
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11ax-HE40 MCS0	38	5190	Not Required	14.00	95.19
		46	5230		14.00	
	802.11ax-HE80 MCS0	42	5210	Not Required	14.00	90.74

Ant 6+7						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	Not Required	17.00	93.51
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11n-HT20 MCS0	36	5180	Not Required	17.00	93.06
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11n-HT40 MCS0	38	5190	15.31	17.00	86.84
		46	5230	16.51	17.00	
	802.11ac-VHT20 MCS0	36	5180	Not Required	17.00	93.06
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11ac-VHT40 MCS0	38	5190	Not Required	17.00	86.84
		46	5230		17.00	
	802.11ac-VHT80 MCS0	42	5210	16.52	17.00	92.19
	802.11ax-HE20 MCS0	36	5180	Not Required	17.00	97.51
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11ax-HE40 MCS0	38	5190	Not Required	17.00	95.19
		46	5230		17.00	
	802.11ax-HE80 MCS0	42	5210	Not Required	17.00	90.74

Ant 6						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	Not Required	12.50	93.51
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11n-HT20 MCS0	52	5260	Not Required	12.50	93.06
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11n-HT40 MCS0	54	5270	12.40	12.50	86.84
		62	5310	10.80	12.50	
	802.11ac-VHT20 MCS0	52	5260	Not Required	12.50	93.06
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11ac-VHT40 MCS0	54	5270	Not Required	12.50	86.84
		62	5310		12.50	
	802.11ac-VHT80 MCS0	58	5290	12.30	12.50	92.19
	802.11ax-HE20 MCS0	52	5260	Not Required	12.50	97.51
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11ax-HE40 MCS0	54	5270	Not Required	12.50	95.19
		62	5310		12.50	
	802.11ax-HE80 MCS0	58	5290	Not Required	12.50	90.74

Ant 7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	Not Required	13.00	93.51
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11n-HT20 MCS0	52	5260	Not Required	13.00	93.06
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11n-HT40 MCS0	54	5270	12.40	13.00	86.84
		62	5310	11.50	13.00	
	802.11ac-VHT20 MCS0	52	5260	Not Required	13.00	93.06
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11ac-VHT40 MCS0	54	5270	Not Required	13.00	86.84
		62	5310		13.00	
	802.11ac-VHT80 MCS0	58	5290	12.40	13.00	92.19
	802.11ax-HE20 MCS0	52	5260	Not Required	13.00	97.51
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11ax-HE40 MCS0	54	5270	Not Required	13.00	95.19
		62	5310		13.00	
	802.11ax-HE80 MCS0	58	5290	Not Required	13.00	90.74

Ant 6+7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	Not Required	16.00	93.51
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11n-HT20 MCS0	52	5260	Not Required	16.00	93.06
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11n-HT40 MCS0	54	5270	15.41	16.00	86.84
		62	5310	14.17	16.00	
	802.11ac-VHT20 MCS0	52	5260	Not Required	16.00	93.06
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11ac-VHT40 MCS0	54	5270	Not Required	16.00	86.84
		62	5310		16.00	
	802.11ac-VHT80 MCS0	58	5290	15.36	16.00	92.19
	802.11ax-HE20 MCS0	52	5260	Not Required	16.00	97.51
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11ax-HE40 MCS0	54	5270	Not Required	16.00	95.19
		62	5310		16.00	
	802.11ax-HE80 MCS0	58	5290	Not Required	16.00	90.74

Ant 6						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	Not Required	12.00	93.51
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11n-HT20 MCS0	100	5500	Not Required	12.00	93.06
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11n-HT40 MCS0	102	5510	11.40	12.00	86.84
		110	5550	11.60	12.00	
		126	5630	11.40	12.00	
		134	5670	11.30	12.00	
		142	5710	11.40	12.00	
	802.11ac-VHT20 MCS0	100	5500	Not Required	12.00	93.06
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11ac-VHT40 MCS0	102	5510	Not Required	12.00	86.84
		110	5550		12.00	
		126	5630		12.00	
		134	5710		12.00	
		142	5710		12.00	
	802.11ac-VHT80 MCS0	106	5530	11.90	12.00	92.19
		122	5610	11.90	12.00	
		138	5690	11.80	12.00	
	802.11ax-HE20 MCS0	100	5500	Not Required	12.00	97.51
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11ax-HE40 MCS0	102	5510	Not Required	12.00	95.19
		110	5550		12.00	
		126	5630		12.00	
		134	5670		12.00	
		142	5710		12.00	
	802.11ax-HE80 MCS0	106	5530	Not Required	12.00	90.74
		122	5610		12.00	
		138	5690		12.00	

Ant 7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	Not Required	13.00	93.51
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11n-HT20 MCS0	100	5500	Not Required	13.00	93.06
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11n-HT40 MCS0	102	5510	12.30	13.00	86.84
		110	5550	12.30	13.00	
		126	5630	11.80	13.00	
		134	5670	12.20	13.00	
		142	5710	11.90	13.00	
	802.11ac-VHT20 MCS0	100	5500	Not Required	13.00	93.06
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11ac-VHT40 MCS0	102	5510	Not Required	13.00	86.84
		110	5550		13.00	
		126	5630		13.00	
		134	5710		13.00	
		142	5710		13.00	
	802.11ac-VHT80 MCS0	106	5530	12.30	13.00	92.19
		122	5610	12.40	13.00	
		138	5690	12.40	13.00	
	802.11ax-HE20 MCS0	100	5500	Not Required	13.00	97.51
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11ax-HE40 MCS0	102	5510	Not Required	13.00	95.19
		110	5550		13.00	
		126	5630		13.00	
		134	5670		13.00	
		142	5710		13.00	
	802.11ax-HE80 MCS0	106	5530	Not Required	13.00	90.74
		122	5610		13.00	
		138	5690		13.00	

Ant 6+7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	Not Required	15.50	93.51
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11n-HT20 MCS0	100	5500	Not Required	15.50	93.06
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11n-HT40 MCS0	102	5510	14.88	15.50	86.84
		110	5550	14.97	15.50	
		126	5630	14.61	15.50	
		134	5670	14.78	15.50	
		142	5710	14.67	15.50	
	802.11ac-VHT20 MCS0	100	5500	Not Required	15.50	93.06
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11ac-VHT40 MCS0	102	5510	Not Required	15.50	86.84
		110	5550		15.50	
		126	5630		15.50	
		134	5710		15.50	
		142	5710		15.50	
	802.11ac-VHT80 MCS0	106	5530	15.11	15.50	92.19
		122	5610	15.17	15.50	
		138	5690	15.12	15.50	
	802.11ax-HE20 MCS0	100	5500	Not Required	15.50	97.51
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11ax-HE40 MCS0	102	5510	Not Required	15.50	95.19
		110	5550		15.50	
		126	5630		15.50	
		134	5670		15.50	
		142	5710		15.50	
	802.11ax-HE80 MCS0	106	5530	Not Required	15.50	90.74
		122	5610		15.50	
		138	5690		15.50	

Ant 6						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	Not Required	11.50	93.51
		157	5785		11.50	
		165	5825		11.50	
	802.11n-HT20 MCS0	149	5745		11.50	93.06
		157	5785		11.50	
		165	5825		11.50	
	802.11n-HT40 MCS0	151	5755	11.30	11.50	86.84
		159	5795	11.20	11.50	
	802.11ac-VHT20 MCS0	149	5745	Not Required	11.50	93.06
		157	5785		11.50	
		165	5825		11.50	
	802.11ac-VHT40 MCS0	151	5755		11.50	86.84
		159	5795		11.50	
	802.11ac-VHT80 MCS0	155	5775	10.90	11.50	92.19
	802.11ax-HE20 MCS0	149	5745	Not Required	11.50	97.51
		157	5785		11.50	
		165	5825		11.50	
	802.11ax-HE40 MCS0	151	5755		11.50	95.19
		159	5795		11.50	
	802.11ax-HE80 MCS0	155	5775		11.50	90.74

Ant 7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	Not Required	12.50	93.51
		157	5785		12.50	
		165	5825		12.50	
	802.11n-HT20 MCS0	149	5745		12.50	93.06
		157	5785		12.50	
		165	5825		12.50	
	802.11n-HT40 MCS0	151	5755	11.70	12.50	86.84
		159	5795	11.60	12.50	
	802.11ac-VHT20 MCS0	149	5745	Not Required	12.50	93.06
		157	5785		12.50	
		165	5825		12.50	
	802.11ac-VHT40 MCS0	151	5755		12.50	86.84
		159	5795		12.50	
	802.11ac-VHT80 MCS0	155	5775	12.00	12.50	92.19
	802.11ax-HE20 MCS0	149	5745	Not Required	12.50	97.51
		157	5785		12.50	
		165	5825		12.50	
	802.11ax-HE40 MCS0	151	5755		12.50	95.19
		159	5795		12.50	
	802.11ax-HE80 MCS0	155	5775		12.50	90.74

Ant 6+7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	Not Required	15.00	93.51
		157	5785		15.00	
		165	5825		15.00	
	802.11n-HT20 MCS0	149	5745	Not Required	15.00	93.06
		157	5785		15.00	
		165	5825		15.00	
	802.11n-HT40 MCS0	151	5755	14.51	15.00	86.84
		159	5795	14.41	15.00	
	802.11ac-VHT20 MCS0	149	5745	Not Required	15.00	93.06
		157	5785		15.00	
		165	5825		15.00	
	802.11ac-VHT40 MCS0	151	5755	Not Required	15.00	86.84
		159	5795		15.00	
	802.11ac-VHT80 MCS0	155	5775	14.50	15.00	92.19
	802.11ax-HE20 MCS0	149	5745	Not Required	15.00	97.51
		157	5785		15.00	
		165	5825		15.00	
	802.11ax-HE40 MCS0	151	5755	Not Required	15.00	95.19
		159	5795		15.00	
	802.11ax-HE80 MCS0	155	5775	Not Required	15.00	90.74

Beamforming mode
Full Power
<2.4GHz WLAN>

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	15.60	16.50	97.50
		2	2417	18.70	19.00	
		6	2437	18.90	19.00	
		9	2452	17.80	18.50	
		10	2457	13.90	15.00	
		11	2462	13.00	14.50	

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	14.90	16.00	97.50
		2	2417	18.50	19.00	
		6	2437	18.60	19.00	
		9	2452	17.50	18.00	
		10	2457	14.40	15.50	
		11	2462	13.40	14.50	

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	18.27	19.00	97.50
		2	2417	21.61	22.00	
		6	2437	21.76	22.00	
		9	2452	20.66	21.00	
		10	2457	17.17	18.00	
		11	2462	16.21	17.50	

<5GHz WLAN>

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	17.40	19.00	93.06
		40	5200	17.30	19.00	
		44	5220	17.40	19.00	
		48	5240	17.30	19.00	
	802.11n-HT40 MCS0	38	5190	16.00	17.50	86.84
		46	5230	20.40	20.50	
	802.11ax-HE20 MCS0	36	5180	17.50	19.00	97.51
		40	5200	17.50	19.00	
		44	5220	17.50	19.00	
		48	5240	17.40	19.00	
	802.11ax-HE40 MCS0	38	5190	16.10	17.50	95.19
		46	5230	20.50	20.50	
	802.11ax-HE80 MCS0	42	5210	16.10	17.00	90.74

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	17.30	19.00	93.06
		40	5200	17.30	19.00	
		44	5220	17.20	19.00	
		48	5240	17.50	19.00	
	802.11n-HT40 MCS0	38	5190	15.70	17.50	86.84
		46	5230	20.10	20.50	
	802.11ax-HE20 MCS0	36	5180	17.40	19.00	97.51
		40	5200	17.30	19.00	
		44	5220	17.30	19.00	
		48	5240	17.60	19.00	
	802.11ax-HE40 MCS0	38	5190	15.80	17.50	95.19
		46	5230	20.20	20.50	
	802.11ax-HE80 MCS0	42	5210	15.90	16.50	90.74

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	20.36	22.00	93.06
		40	5200	20.36	22.00	
		44	5220	20.31	22.00	
		48	5240	20.41	22.00	
	802.11n-HT40 MCS0	38	5190	18.86	20.50	86.84
		46	5230	23.26	23.50	
	802.11ax-HE20 MCS0	36	5180	20.46	22.00	97.51
		40	5200	20.41	22.00	
		44	5220	20.41	22.00	
		48	5240	20.51	22.00	
	802.11ax-HE40 MCS0	38	5190	18.96	20.50	95.19
		46	5230	23.36	23.50	
	802.11ax-HE80 MCS0	42	5210	19.01	19.50	90.74

Ant 6						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	52	5260	17.70	19.50	93.06
		56	5280	18.00	19.50	
		60	5300	18.20	19.50	
		64	5320	17.70	19.50	
	802.11n-HT40 MCS0	54	5270	20.40	20.50	86.84
		62	5310	16.90	18.50	
	802.11ax-HE20 MCS0	52	5260	17.80	19.50	97.51
		56	5280	18.00	19.50	
		60	5300	18.30	19.50	
		64	5320	17.80	19.50	
	802.11ax-HE40 MCS0	54	5270	20.50	20.50	95.19
		62	5310	17.00	18.50	
	802.11ax-HE80 MCS0	58	5290	16.60	18.00	90.74

Ant 7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	52	5260	17.40	19.00	93.06
		56	5280	17.60	19.00	
		60	5300	17.80	19.50	
		64	5320	17.20	19.00	
	802.11n-HT40 MCS0	54	5270	20.10	20.50	86.84
		62	5310	16.50	18.50	
	802.11ax-HE20 MCS0	52	5260	17.50	19.00	97.51
		56	5280	17.80	19.00	
		60	5300	17.90	19.00	
		64	5320	17.30	19.00	
	802.11ax-HE40 MCS0	54	5270	20.20	20.50	95.19
		62	5310	16.60	18.50	
	802.11ax-HE80 MCS0	58	5290	16.20	18.00	90.74

Ant 6+7						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	52	5260	20.56	22.00	93.06
		56	5280	20.91	22.00	
		60	5300	21.01	22.00	
		64	5320	20.47	22.00	
	802.11n-HT40 MCS0	54	5270	23.26	23.50	86.84
		62	5310	19.71	21.50	
	802.11ax-HE20 MCS0	52	5260	20.66	22.00	97.51
		56	5280	21.06	22.00	
		60	5300	21.11	22.00	
		64	5320	20.57	22.00	
	802.11ax-HE40 MCS0	54	5270	23.36	23.50	95.19
		62	5310	19.81	21.50	
	802.11ax-HE80 MCS0	58	5290	19.41	21.00	90.74

Ant 6						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	17.90	19.00	93.06
		116	5580	17.80	19.00	
		124	5620	17.70	19.00	
		132	5660	17.70	19.00	
		140	5700	17.50	19.00	
		144	5720	17.70	19.00	
	802.11n-HT40 MCS0	102	5510	17.90	19.50	86.84
		110	5550	20.40	20.50	
		126	5630	20.30	20.50	
		134	5670	19.20	20.00	
		142	5710	20.40	20.50	
	802.11ax-HE20 MCS0	100	5500	18.00	19.00	97.51
		116	5580	17.90	19.00	
		124	5620	17.70	19.00	
		132	5660	17.70	19.00	
		140	5700	17.60	19.00	
		144	5720	17.80	19.00	
	802.11ax-HE40 MCS0	102	5510	18.00	19.50	95.19
		110	5550	20.50	20.50	
		126	5630	20.30	20.50	
		134	5670	19.30	20.50	
		142	5710	20.50	20.50	
	802.11ax-HE80 MCS0	106	5530	17.30	19.00	90.74
		122	5610	20.20	20.50	
		138	5690	20.10	20.50	

Ant 7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	17.40	19.00	93.06
		116	5580	17.50	19.00	
		124	5620	17.50	19.00	
		132	5660	17.20	19.00	
		140	5700	17.40	19.00	
		144	5720	17.40	19.00	
	802.11n-HT40 MCS0	102	5510	17.00	18.50	86.84
		110	5550	19.60	20.50	
		126	5630	19.40	20.50	
		134	5670	19.00	20.00	
		142	5710	19.90	20.50	
	802.11ax-HE20 MCS0	100	5500	17.50	19.00	97.51
		116	5580	17.60	19.00	
		124	5620	17.50	19.00	
		132	5660	17.50	19.00	
		140	5700	17.50	19.00	
		144	5720	17.50	19.00	
	802.11ax-HE40 MCS0	102	5510	17.10	19.00	95.19
		110	5550	19.70	20.50	
		126	5630	19.50	20.50	
		134	5670	19.10	20.50	
		142	5710	20.00	20.50	
	802.11ax-HE80 MCS0	106	5530	16.90	18.50	90.74
		122	5610	19.30	20.50	
		138	5690	19.30	20.50	

Ant 6+7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	20.67	22.00	93.06
		116	5580	20.66	22.00	
		124	5620	20.66	22.00	
		132	5660	20.51	22.00	
		140	5700	20.46	22.00	
		144	5720	20.56	22.00	
	802.11n-HT40 MCS0	102	5510	20.48	21.50	86.84
		110	5550	23.03	23.50	
		126	5630	22.92	23.50	
		134	5670	22.11	23.00	
		142	5710	23.17	23.50	
	802.11ax-HE20 MCS0	100	5500	20.77	22.00	97.51
		116	5580	20.76	22.00	
		124	5620	20.66	22.00	
		132	5660	20.66	22.00	
		140	5700	20.56	22.00	
		144	5720	20.66	22.00	
	802.11ax-HE40 MCS0	102	5510	20.58	22.00	95.19
		110	5550	23.13	23.50	
		126	5630	23.02	23.50	
		134	5670	22.21	23.50	
		142	5710	23.27	23.50	
	802.11ax-HE80 MCS0	106	5530	20.11	21.50	90.74
		122	5610	22.78	23.50	
		138	5690	22.73	23.50	

Ant 6						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	149	5745	21.00	21.50	93.06
		157	5785	21.10	21.50	
		165	5825	21.10	21.50	
	802.11n-HT40 MCS0	151	5755	20.30	20.50	86.84
		159	5795	20.20	20.50	
		149	5745	21.10	21.50	
	802.11ax-HE20 MCS0	157	5785	21.20	21.50	97.51
		165	5825	21.20	21.50	
		151	5755	20.40	20.50	
	802.11ax-HE40 MCS0	159	5795	20.30	20.50	95.19
		155	5775	20.30	20.50	
	802.11ax-HE80 MCS0	155	5775	20.30	20.50	90.74

Ant 7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	149	5745	20.40	21.50	93.06
		157	5785	20.30	21.50	
		165	5825	20.10	21.50	
	802.11n-HT40 MCS0	151	5755	19.30	20.50	86.84
		159	5795	19.30	20.50	
	802.11ax-HE20 MCS0	149	5745	20.50	21.50	97.51
		157	5785	20.40	21.50	
		165	5825	20.20	21.50	
	802.11ax-HE40 MCS0	151	5755	19.40	20.50	95.19
		159	5795	19.40	20.50	
	802.11ax-HE80 MCS0	155	5775	19.30	20.50	90.74

Ant 6+7						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	149	5745	23.72	24.50	93.06
		157	5785	23.73	24.50	
		165	5825	23.64	24.50	
	802.11n-HT40 MCS0	151	5755	22.84	23.50	86.84
		159	5795	22.78	23.50	
	802.11ax-HE20 MCS0	149	5745	23.82	24.50	97.51
		157	5785	23.83	24.50	
		165	5825	23.74	24.50	
	802.11ax-HE40 MCS0	151	5755	22.94	23.50	95.19
		159	5795	22.88	23.50	
	802.11ax-HE80 MCS0	155	5775	22.84	23.50	90.74

Sensor on

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	15.60	16.50	97.50
		2	2417	18.70	19.00	
		6	2437	18.90	19.00	
		9	2452	17.80	18.50	
		10	2457	13.90	15.00	
		11	2462	13.00	14.50	

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	14.90	16.00	97.50
		2	2417	17.50	18.00	
		6	2437	17.59	18.00	
		9	2452	17.50	18.00	
		10	2457	14.40	15.50	
		11	2462	13.40	14.50	

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ax-HE20 MCS0	1	2412	18.27	19.00	97.50
		2	2417	21.15	21.50	
		6	2437	21.30	21.50	
		9	2452	20.66	21.00	
		10	2457	17.17	18.00	
		11	2462	16.21	17.50	

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	Not Required	13.50	93.06
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11n-HT40 MCS0	38	5190		13.50	86.84
		46	5230		13.50	
	802.11ax-HE20 MCS0	36	5180		13.50	97.51
		40	5200		13.50	
		44	5220		13.50	
		48	5240		13.50	
	802.11ax-HE40 MCS0	38	5190		13.50	95.19
		46	5230		13.50	
	802.11ax-HE80 MCS0	42	5210	12.08	13.50	90.74

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	Not Required	14.00	93.06
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11n-HT40 MCS0	38	5190		14.00	86.84
		46	5230		14.00	
	802.11ax-HE20 MCS0	36	5180		14.00	97.51
		40	5200		14.00	
		44	5220		14.00	
		48	5240		14.00	
	802.11ax-HE40 MCS0	38	5190		14.00	95.19
		46	5230		14.00	
	802.11ax-HE80 MCS0	42	5210	12.41	14.00	90.74

5.2GHz WLAN				Ant 6+7		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11n-HT20 MCS0	36	5180	Not Required	17.00	93.06
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11n-HT40 MCS0	38	5190		17.00	86.84
		46	5230		17.00	
	802.11ax-HE20 MCS0	36	5180		17.00	97.51
		40	5200		17.00	
		44	5220		17.00	
		48	5240		17.00	
	802.11ax-HE40 MCS0	38	5190		17.00	95.19
		46	5230		17.00	
	802.11ax-HE80 MCS0	42	5210	16.03	17.00	90.74

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11n-HT20 MCS0	52	5260	Not Required	12.50	93.06
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11n-HT40 MCS0	54	5270		12.50	86.84
		62	5310		12.50	
	802.11ax-HE20 MCS0	52	5260		12.50	97.51
		56	5280		12.50	
		60	5300		12.50	
		64	5320		12.50	
	802.11ax-HE40 MCS0	54	5270		12.50	95.19
		62	5310		12.50	
	802.11ax-HE80 MCS0	58	5290	11.07	12.50	90.74

Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11n-HT20 MCS0	52	5260	Not Required	13.00	93.06
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11n-HT40 MCS0	54	5270		13.00	86.84
		62	5310		13.00	
	802.11ax-HE20 MCS0	52	5260		13.00	97.51
		56	5280		13.00	
		60	5300		13.00	
		64	5320		13.00	
	802.11ax-HE40 MCS0	54	5270		13.00	95.19
		62	5310		13.00	
	802.11ax-HE80 MCS0	58	5290	11.17	13.00	90.74

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11n-HT20 MCS0	52	5260	Not Required	16.00	93.06
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11n-HT40 MCS0	54	5270		16.00	86.84
		62	5310		16.00	
	802.11ax-HE20 MCS0	52	5260		16.00	97.51
		56	5280		16.00	
		60	5300		16.00	
		64	5320		16.00	
	802.11ax-HE40 MCS0	54	5270		16.00	95.19
		62	5310		16.00	
	802.11ax-HE80 MCS0	58	5290	14.38	16.00	90.74

Ant 6						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	Not Required	12.00	93.06
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11n-HT40 MCS0	102	5510		12.00	86.84
		110	5550		12.00	
		134	5670		12.00	
		142	5710		12.00	
	802.11ax-HE20 MCS0	100	5500		12.00	97.51
		116	5580		12.00	
		124	5620		12.00	
		132	5660		12.00	
		140	5700		12.00	
		144	5720		12.00	
	802.11ax-HE40 MCS0	102	5510		12.00	95.19
		110	5550		12.00	
		126	5630		12.00	
		134	5670		12.00	
		142	5710		12.00	
	802.11ax-HE80 MCS0	106	5530	10.28	12.00	90.74
		122	5610	10.68	12.00	
		138	5690	10.62	12.00	

Ant 7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	Not Required	13.00	93.06
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11n-HT40 MCS0	102	5510		13.00	86.84
		110	5550		13.00	
		134	5670		13.00	
		142	5710		13.00	
	802.11ax-HE20 MCS0	100	5500		13.00	97.51
		116	5580		13.00	
		124	5620		13.00	
		132	5660		13.00	
		140	5700		13.00	
		144	5720		13.00	
	802.11ax-HE40 MCS0	102	5510		13.00	95.19
		110	5550		13.00	
		126	5630		13.00	
		134	5670		13.00	
		142	5710		13.00	
	802.11ax-HE80 MCS0	106	5530	11.89	13.00	90.74
		122	5610	11.82	13.00	
		138	5690	11.79	13.00	

Ant 6+7						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11n-HT20 MCS0	100	5500	Not Required	15.50	93.06
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11n-HT40 MCS0	102	5510		15.50	86.84
		110	5550		15.50	
		134	5670		15.50	
		142	5710		15.50	
	802.11ax-HE20 MCS0	100	5500		15.50	97.51
		116	5580		15.50	
		124	5620		15.50	
		132	5660		15.50	
		140	5700		15.50	
		144	5720		15.50	
	802.11ax-HE40 MCS0	102	5510		15.50	95.19
		110	5550		15.50	
		126	5630		15.50	
		134	5670		15.50	
		142	5710		15.50	
	802.11ax-HE80 MCS0	106	5530	13.62	15.50	90.74
		122	5610	15.29	15.50	
		138	5690	15.26	15.50	

Ant 6						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11n-HT20 MCS0	149	5745	Not Required	11.50	93.06
		157	5785		11.50	
		165	5825		11.50	
	802.11n-HT40 MCS0	151	5755		11.50	86.84
		159	5795		11.50	
	802.11ax-HE20 MCS0	149	5745		11.50	97.51
		157	5785		11.50	
		165	5825		11.50	
	802.11ax-HE40 MCS0	151	5755		11.50	95.19
		159	5795		11.50	
	802.11ax-HE80 MCS0	155	5775	10.28	11.50	90.74


Ant 7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11n-HT20 MCS0	149	5745	Not Required	12.50	93.06
		157	5785		12.50	
		165	5825		12.50	
	802.11n-HT40 MCS0	151	5755		12.50	86.84
		159	5795		12.50	
	802.11ax-HE20 MCS0	149	5745		12.50	97.51
		157	5785		12.50	
		165	5825		12.50	
	802.11ax-HE40 MCS0	151	5755		12.50	95.19
		159	5795		12.50	
	802.11ax-HE80 MCS0	155	5775	10.78	12.50	90.74

Ant 6+7						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11n-HT20 MCS0	149	5745	Not Required	15.00	93.06
		157	5785		15.00	
		165	5825		15.00	
	802.11n-HT40 MCS0	151	5755		15.00	86.84
		159	5795		15.00	
	802.11ax-HE20 MCS0	149	5745		15.00	97.51
		157	5785		15.00	
		165	5825		15.00	
	802.11ax-HE40 MCS0	151	5755		15.00	95.19
		159	5795		15.00	
	802.11ax-HE80 MCS0	155	5775	13.82	15.00	90.74

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 60.18 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

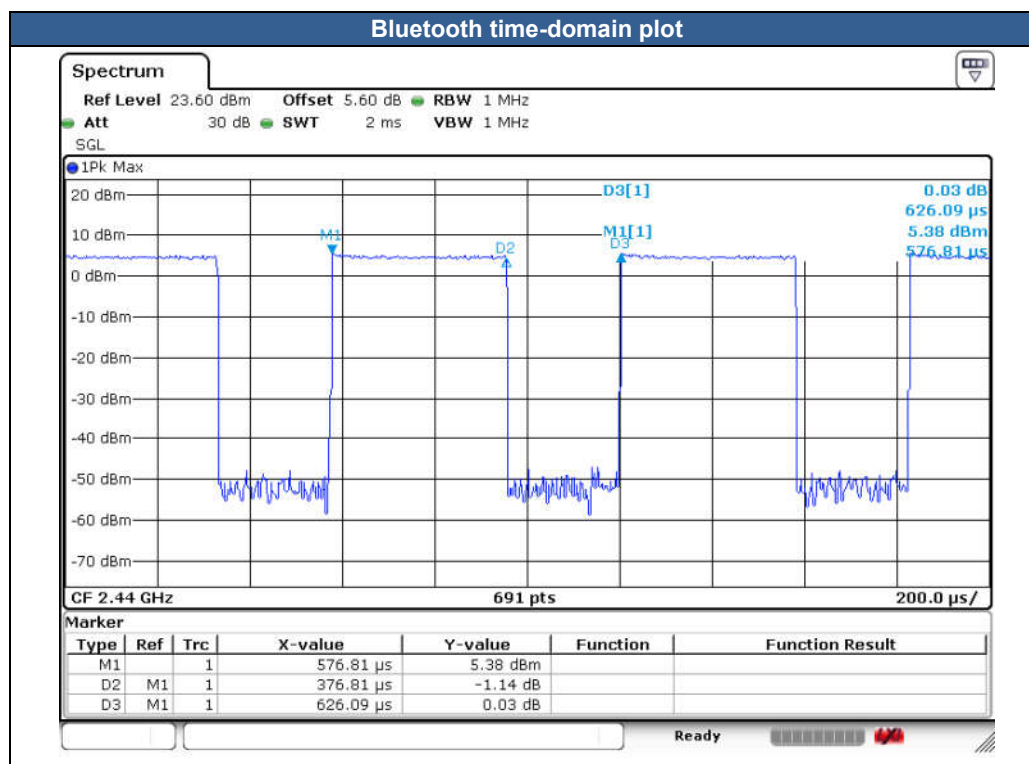

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	2.63	3.01	3.08
	CH 39	2441	3.34	3.34	3.44
	CH 78	2480	3.35	3.23	3.40
Tune-up Limit			4	4	4

Mode	Channel	Frequency (MHz)	Average power (dBm)
LE 1M	CH 00	2402	5.40
	CH 19	2440	5.50
	CH 39	2480	5.40
Tune-up Limit			6

Mode	Channel	Frequency (MHz)	Average power (dBm)
LE 2M	CH 00	2402	5.70
	CH 19	2440	5.70
	CH 39	2480	5.70
Tune-up Limit			6



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

<SAR test exclusion table>
General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT	2.4GHz WLAN ANT 6	2.4GHz WLAN ANT 7	5GHz WLAN ANT 6	5GHz WLAN ANT 7
	Calculated Frequency	2480MHz	2462MHz	2462MHz	5825MHz	5825MHz
	Maximum power (dBm)	6	21.5	21.5	21.5	21.5
	Maximum rated power(mW)	3.98	141.25	141.25	141.25	141.25
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	1.3	44.3	44.3	68.2	68.2
	Testing required?	No	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	177.51	177.51	5.0	177.51	5.0
	exclusion threshold	1370.0	1371.0	44.3	1337.0	68.2
	Testing required?	No	No	Yes	No	Yes
Edge 2	Separation distance(mm)	122.3	122.3	86.88	122.3	86.88
	exclusion threshold	818.0	819.0	464.0	785.0	431.0
	Testing required?	No	No	No	No	No
Edge 3	Separation distance(mm)	18.35	18.35	209.9	18.35	209.9
	exclusion threshold	0.3	12.1	1695.0	18.6	1661.0
	Testing required?	No	Yes	No	Yes	No
Edge 4	Separation distance(mm)	5.0	5.0	16.4	5.0	16.4
	exclusion threshold	1.3	44.3	13.5	68.2	20.8
	Testing required?	No	Yes	Yes	Yes	Yes

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For WLAN ANT6 The device employs proximity sensors that detect the presence of the user's body also a finger or hand near the bottom face, edge 4 of the device, reduced power will be active for all WLAN bands. (P-sensor can't work at detecting presence of the user's body at other edges of the device.)
5. For WLAN ANT7 The device employs proximity sensors that detect the presence of the user's body also a finger or hand near the bottom face, edge 1 of the device, reduced power will be active for all WLAN bands. (P-sensor can't work at detecting presence of the user's body at other edges of the device.)
6. For distance SAR and non-distance SAR, always chose higher SAR to do co-located analysis.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
5. Based on WLAN 2.4GHz and Bluetooth share the same, so Bluetooth RF exposure evaluation chose the worst position of WLAN 2.4GHz to perform Bluetooth SAR test, and used this Bluetooth SAR value conservatively represent other position do co-located analysis with WWAN.
6. The 2.4GHz/5GHz WLAN can transmit in SISO/MIMO antenna mode. TX Beamforming mode is only supported in 2.4GHz WLAN 802.11ax and 5GHz WLAN 802.11n/ax.
7. Due to the single antenna RF power in WLAN SISO & MIMO (CDD) mode is larger than or very close to the single antenna RF power in Beamforming mode, so WLAN SISO & MIMO (CDD) mode SAR can represent beamforming mode SAR.

**15.1 Body SAR**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 6	Reduced	11	2462	19.90	20.00	1.023	99.3	1.007	0.01	1.11	1.144
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 6	Reduced	6	2437	19.70	20.00	1.072	99.3	1.007	-0.02	1.160	1.252
	WLAN2.4GHz	802.11g 6Mbps	Bottom face	0mm	Ant 6	Reduced	6	2437	19.70	20.00	1.072	95.4	1.048	0.01	1.030	1.157
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 6	Reduced	1	2412	19.60	20.00	1.096	99.3	1.007	0.01	1.05	1.159
	WLAN2.4GHz	802.11b 1Mbps	EDGE 3	0mm	Ant 6	Full Power	1	2412	21.50	21.50	1.000	99.3	1.007	0.03	0.505	0.509
	WLAN2.4GHz	802.11b 1Mbps	EDGE 4	0mm	Ant 6	Reduced	11	2462	19.90	20.00	1.023	99.3	1.007	0.07	0.602	0.620
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	14mm	Ant 6	Full Power	6	2437	21.40	21.50	1.023	99.3	1.007	-0.02	0.366	0.377
	WLAN2.4GHz	802.11b 1Mbps	EDGE 4	14mm	Ant 6	Full Power	11	2462	20.30	21.50	1.318	99.3	1.007	-0.01	0.086	0.114
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 7	Reduced	1	2412	17.90	18.00	1.023	99.3	1.007	-0.01	1.210	1.247
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 7	Reduced	6	2437	17.80	18.00	1.047	99.3	1.007	-0.09	0.964	1.016
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 7	Reduced	11	2462	17.70	18.00	1.072	99.3	1.007	0.01	1.120	1.209
	WLAN2.4GHz	802.11g 6Mbps	Bottom face	0mm	Ant 7	Reduced	6	2437	17.40	18.00	1.148	95.4	1.048	0.02	0.796	0.958
	WLAN2.4GHz	802.11b 1Mbps	EDGE 1	0mm	Ant 7	Reduced	1	2412	17.90	18.00	1.023	99.3	1.007	0.05	0.311	0.320
	WLAN2.4GHz	802.11b 1Mbps	EDGE 4	0mm	Ant 7	Full Power	1	2412	20.50	21.50	1.259	99.3	1.007	0.08	0.229	0.290
	WLAN2.4GHz	802.11b 1Mbps	Bottom face	14mm	Ant 7	Full Power	1	2412	20.50	21.50	1.259	99.3	1.007	0.06	0.123	0.156
	WLAN2.4GHz	802.11b 1Mbps	EDGE 1	14mm	Ant 7	Full Power	1	2412	20.50	21.50	1.259	99.3	1.007	-0.04	0.069	0.087
02	WLAN 5.2GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	42	5210	13.20	13.50	1.072	92.19	1.085	-0.03	0.987	1.147
	WLAN 5.2GHz	802.11a 6Mbps	EDGE 3	0mm	Ant 6	Full Power	36	5180	19.20	21.00	1.514	93.51	1.069	0.06	0.259	0.419
	WLAN 5.2GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	42	5210	13.20	13.50	1.072	92.19	1.085	-0.01	1.160	1.349
	WLAN 5.2GHz	802.11n-HT40 MCS0	EDGE 4	0mm	Ant 6	Reduced	46	5230	13.40	13.50	1.023	86.84	1.152	0.03	0.878	1.035
	WLAN 5.2GHz	802.11a 6Mbps	Bottom face	14mm	Ant 6	Full Power	36	5180	19.20	21.00	1.514	93.51	1.069	0.03	0.271	0.438
	WLAN 5.2GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	36	5180	19.20	21.00	1.514	93.51	1.069	0.02	0.306	0.495
	WLAN 5.2GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 7	Reduced	42	5210	13.80	14.00	1.047	92.19	1.085	-0.06	1.010	1.147
	WLAN 5.2GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	42	5210	13.80	14.00	1.047	92.19	1.085	0.01	1.080	1.227
	WLAN 5.2GHz	802.11n-HT40 MCS0	EDGE 1	0mm	Ant 7	Reduced	46	5230	13.60	14.00	1.096	86.84	1.152	0.05	0.740	0.935
	WLAN 5.2GHz	802.11n-HT20 MCS0	EDGE 4	0mm	Ant 7	Full Power	44	5220	19.60	21.50	1.549	93.06	1.075	-0.04	0.143	0.238
	WLAN 5.2GHz	802.11n-HT20 MCS0	Bottom face	14mm	Ant 7	Full Power	44	5220	19.60	21.50	1.549	93.06	1.075	0.03	0.139	0.231
	WLAN 5.2GHz	802.11n-HT20 MCS0	EDGE 1	14mm	Ant 7	Full Power	44	5220	19.60	21.50	1.549	93.06	1.075	-0.01	0.345	0.574
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	58	5290	12.30	12.50	1.047	92.19	1.085	0.01	1.040	1.182
	WLAN5.3GHz	802.11a 6Mbps	EDGE 3	0mm	Ant 6	Full Power	52	5260	19.20	21.00	1.514	93.51	1.069	0.01	0.438	0.709
	WLAN5.3GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	58	5290	12.30	12.50	1.047	92.19	1.085	0.11	0.502	0.570
	WLAN5.3GHz	802.11a 6Mbps	Bottom face	14mm	Ant 6	Full Power	52	5260	19.20	21.00	1.514	93.51	1.069	0.06	0.189	0.306
03	WLAN5.3GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	52	5260	19.20	21.00	1.514	93.51	1.069	0.01	0.333	0.539
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 7	Reduced	58	5290	12.40	13.00	1.148	92.19	1.085	-0.03	0.866	1.079
	WLAN5.3GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	58	5290	12.40	13.00	1.148	92.19	1.085	0.09	1.020	1.271
	WLAN5.3GHz	802.11n-HT40 MCS0	EDGE 1	0mm	Ant 7	Reduced	62	5310	11.50	13.00	1.413	86.84	1.152	0.05	0.546	0.888
	WLAN5.3GHz	802.11a 6Mbps	EDGE 4	0mm	Ant 7	Full Power	60	5300	19.20	21.00	1.514	93.51	1.069	0.11	0.121	0.196
	WLAN5.3GHz	802.11a 6Mbps	Bottom face	14mm	Ant 7	Full Power	60	5300	19.20	21.00	1.514	93.51	1.069	-0.04	0.211	0.341
	WLAN5.3GHz	802.11a 6Mbps	EDGE 1	14mm	Ant 7	Full Power	60	5300	19.20	21.00	1.514	93.51	1.069	0.02	0.131	0.212
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	122	5610	11.90	12.00	1.023	92.19	1.085	-0.09	1.010	1.121
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	106	5530	11.90	12.00	1.023	92.19	1.085	-0.01	0.863	0.958
	WLAN5.5GHz	802.11a 6Mbps	EDGE 3	0mm	Ant 6	Full Power	100	5500	19.50	21.00	1.413	93.51	1.069	0.01	0.466	0.704
	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	122	5610	11.90	12.00	1.023	92.19	1.085	0.09	1.110	1.232
	WLAN5.5GHz	802.11n-HT40 MCS0	EDGE 4	0mm	Ant 6	Reduced	110	5550	11.60	12.00	1.096	92.19	1.085	0.09	0.906	1.078
	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	106	5530	11.90	12.00	1.023	92.19	1.085	0.07	0.979	1.087
	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	138	5690	11.80	12.00	1.047	92.19	1.085	0.07	0.916	1.041
	WLAN5.5GHz	802.11a 6Mbps	Bottom face	14mm	Ant 6	Full Power	100	5500	19.50	21.00	1.413	93.51	1.069	0.01	0.448	0.676
	WLAN5.5GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	100	5500	19.50	21.00	1.413	93.51	1.069	0.02	0.548	0.827
	WLAN5.5GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	144	5720	19.50	21.00	1.413	93.51	1.069	0.02	0.425	0.642
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 7	Reduced	122	5610	12.40	13.00	1.148	92.19	1.085	-0.01	0.827	1.030
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 7	Reduced	138	5690	12.40	13.00	1.148	92.19	1.085	-0.01	0.655	0.816



FCC SAR Test Report

Report No. : FA222245

04	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	122	5610	12.40	13.00	1.148	92.19	1.085	-0.05	1.040	1.296
	WLAN5.5GHz	802.11n-HT40 MCS0	EDGE 1	0mm	Ant 7	Reduced	110	5550	12.30	13.00	1.175	92.19	1.085	0.04	0.878	1.119
	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	138	5690	12.40	13.00	1.148	92.19	1.085	0.04	0.834	1.039
	WLAN5.5GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	106	5530	12.30	13.00	1.175	92.19	1.085	-0.02	0.977	1.245
	WLAN5.5GHz	802.11a 6Mbps	EDGE 4	0mm	Ant 7	Full Power	116	5580	19.30	21.00	1.479	93.51	1.069	0.01	0.134	0.212
	WLAN5.5GHz	802.11a 6Mbps	Bottom face	14mm	Ant 7	Full Power	116	5580	19.30	21.00	1.479	93.51	1.069	-0.09	0.233	0.368
	WLAN5.5GHz	802.11a 6Mbps	EDGE 1	14mm	Ant 7	Full Power	116	5580	19.30	21.00	1.479	93.51	1.069	0.03	0.479	0.757
05	WLAN5.8GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	155	5775	10.90	11.50	1.148	92.19	1.085	0.01	0.987	1.230
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom face	0mm	Ant 6	Reduced	151	5755	11.30	11.50	1.047	86.84	1.152	-0.02	0.897	1.082
	WLAN5.8GHz	802.11a 6Mbps	EDGE 3	0mm	Ant 6	Full Power	157	5785	21.20	21.50	1.072	93.51	1.069	0.04	0.841	0.963
	WLAN5.8GHz	802.11a 6Mbps	EDGE 3	0mm	Ant 6	Full Power	165	5825	21.20	21.50	1.072	93.51	1.069	0.04	0.791	0.906
	WLAN5.8GHz	802.11ac-VHT80 MCS0	EDGE 4	0mm	Ant 6	Reduced	155	5775	10.90	11.50	1.148	92.19	1.085	0.02	0.708	0.882
	WLAN5.8GHz	802.11a 6Mbps	Bottom face	14mm	Ant 6	Full Power	157	5785	21.20	21.50	1.072	93.51	1.069	0.03	0.600	0.687
	WLAN5.8GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	157	5785	21.20	21.50	1.072	93.51	1.069	0.01	0.838	0.960
	WLAN5.8GHz	802.11a 6Mbps	EDGE 4	14mm	Ant 6	Full Power	165	5825	21.20	21.50	1.072	93.51	1.069	-0.02	0.814	0.932
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 7	Reduced	155	5775	12.00	12.50	1.122	92.19	1.085	0.08	0.522	0.635
	WLAN5.8GHz	802.11ac-VHT80 MCS0	EDGE 1	0mm	Ant 7	Reduced	155	5775	12.00	12.50	1.122	92.19	1.085	-0.01	0.954	1.161
	WLAN5.8GHz	802.11a 6Mbps	EDGE 4	0mm	Ant 7	Full Power	149	5745	20.80	21.50	1.175	93.51	1.069	0.07	0.191	0.240
	WLAN5.8GHz	802.11a 6Mbps	Bottom face	14mm	Ant 7	Full Power	149	5745	20.80	21.50	1.175	93.51	1.069	0.01	0.418	0.525
	WLAN5.8GHz	802.11a 6Mbps	EDGE 1	14mm	Ant 7	Full Power	149	5745	20.80	21.50	1.175	93.51	1.069	0.02	0.321	0.403
06	Bluetooth LE	1Mbps	Bottom face	0mm	Ant 6	Full Power	19	2402	5.50	6.00	1.122	60.18	1.662	-0.01	0.013	0.023

15.2 Repeated SAR Measurement

No.	Band	Modulation	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN 2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 7	Reduced	1	2412	17.90	18.00	1.023	99.3	1.007	-0.01	1.210	1	1.247
2nd	WLAN 2.4GHz	802.11b 1Mbps	Bottom face	0mm	Ant 7	Reduced	1	2412	17.90	18.00	1.023	99.3	1.007	0.06	1.110	1.090	1.144
1st	WLAN 5.2GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	Reduced	42	5210	13.20	13.50	1.072	92.19	1.085	-0.01	1.160	1	1.349
2nd	WLAN 5.2GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	Reduced	42	5210	13.20	13.50	1.072	92.19	1.085	0.08	1.010	1.149	1.174
1st	WLAN 5.5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	Reduced	122	5610	11.90	12.00	1.023	92.19	1.085	0.09	1.110	1	1.232
2nd	WLAN 5.5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	Ant 6	Reduced	122	5610	11.90	12.00	1.023	92.19	1.085	-0.05	1.010	1.099	1.121
1st	WLAN 5.8GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	155	5775	10.90	11.50	1.148	92.19	1.085	0.01	0.987	1	1.230
2nd	WLAN 5.8GHz	802.11ac-VHT80 MCS0	Bottom face	0mm	Ant 6	Reduced	155	5775	10.90	11.50	1.148	92.19	1.085	-0.03	0.968	1.020	1.206

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Wireless Tablet
		Body
1.	WLAN2.4GHz ANT6 + WLAN2.4GHz ANT7	Yes
2.	WLAN5GHz ANT6 + WLAN5GHz ANT7	Yes
3.	WLAN5GHz ANT6 + WLAN5GHz ANT7 + Bluetooth	Yes

General Note:

- The EUT has no voice function means data only.
- EUT will choose either 2.4GHz WLAN or 5GHz WLAN according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- Above table listed transmitting simultaneous state is supported only for this device.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 2.4GHz and Bluetooth can't transmit simultaneously.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg.
 - The SPLSR calculated results please refer to section 16.2.


16.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	1+2	3+4+5	Case No
	WLAN2.4GHz Ant 6	WLAN2.4GHz Ant 7	WLAN5GHz Ant 6	WLAN5GHz Ant 7	Bluetooth Ant 6	Summed	Summed	
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
Bottom Face	1.252	1.247	1.230	1.147	0.023	2.50	2.40	1&2
Edge 1		0.320		1.296		0.32	1.30	
Edge 3	0.509		0.963			0.51	0.96	
Edge 4	0.620	0.290	1.349	0.240		0.91	1.59	


16.2 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.

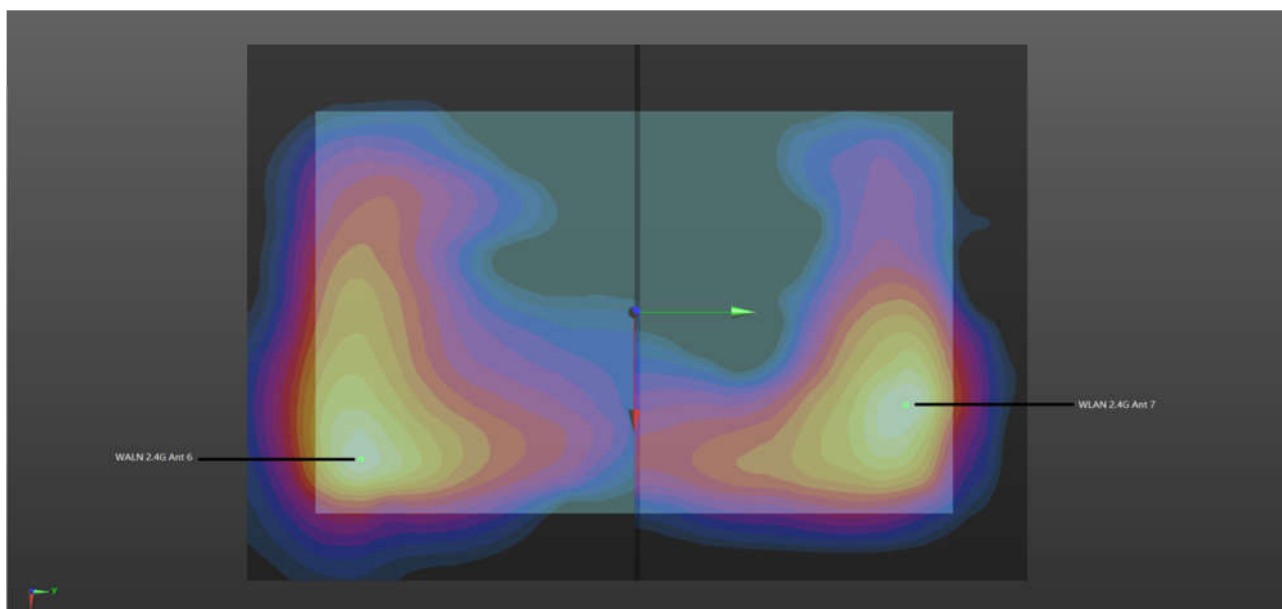

WLAN2.4GHz_Ant6 +WLAN2.4GHz_Ant7 Bottom Face (0mm)

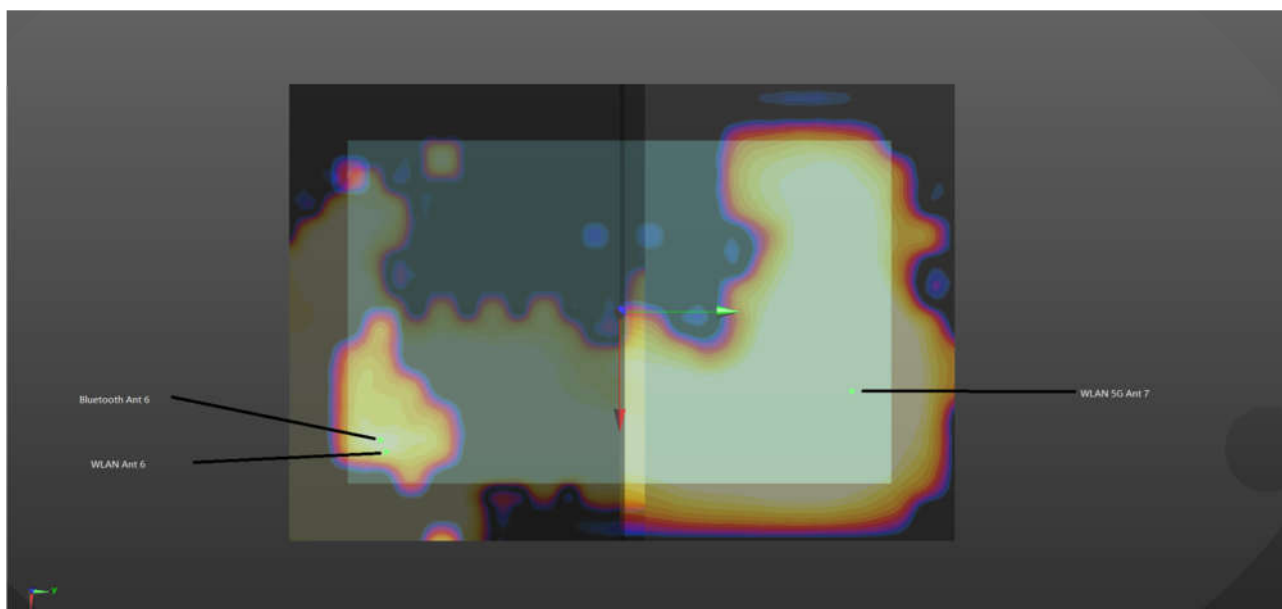

WLAN5GHz_Ant6+WLAN5GHz_Ant7+Bluetooth_Ant6 Bottom Face (0mm)



FCC SAR Test Report

Report No. : FA222245

Case 1	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
	WLAN2.4GHz Ant6	Bottom face	1.252	0	51.2	-94.6	0.21	187.2	2.50	0.02	Not required
	WLAN2.4GHz Ant7		1.247	0	28.2	91.2	0.61				
Case 2	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
	WLAN5GHz Ant6	Bottom face	1.23	0	54.2	-91.2	0.21	186.0	2.40	0.02	Not required
	Bluetooth Ant6		0.023	0							
	WLAN5GHz Ant7		1.147	0	29.6	93.2	0.65				

Test Engineer : Martin Li, Varus Wang, Light Wang

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015

-----THE END-----