

# **TEST REPORT**

**Report Number:** R14777340-E10

**Applicant :** Sony Corporation  
1-7-1 Konan Minato-ku  
Tokyo, 108-0075, Japan

**FCC ID :** PY7-76732V

**EUT Description :** GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**  
2023-07-06

**Prepared by:**  
UL LLC  
12 Laboratory Dr.  
Research Triangle Park, NC 27709 U.S.A.  
TEL: (919)549-1400



## REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2023-07-06	Initial Issue	Brian Kiewra

## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>2</b>
<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
4.1. METROLOGICAL TRACEABILITY .....	7
4.2. DECISION RULES.....	7
4.3. MEASUREMENT UNCERTAINTY.....	7
4.4. SAMPLE CALCULATION .....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM ELECTRIC FIELD STRENGTH.....	8
5.3. SOFTWARE AND FIRMWARE.....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. 20dB BANDWIDTH .....</b>	<b>12</b>
7.1. Type A (CE Mode) .....	13
7.2. Type B (CE Mode) .....	15
7.3. Type F (CE Mode) .....	17
7.4. Type V (CE Mode) .....	18
<b>8. RADIATED EMISSION TEST RESULTS.....</b>	<b>19</b>
8.1. LIMITS AND PROCEDURE .....	19
8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.009 - 30 MHz) .....	21
8.2.1. TYPE B (CE MODE).....	21
8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz .....	25
8.3.1. TYPE B (CE MODE).....	25
<b>9. FREQUENCY STABILITY .....</b>	<b>27</b>
9.1. TYPE B 106kbps .....	27
<b>10. AC MAINS LINE CONDUCTED EMISSIONS .....</b>	<b>28</b>

---

10.1.	TYPE B 106kbps (CE MODE) .....	29
10.1.1.	NORMAL OPERATION, 106kbps.....	29
10.1.2.	NORMAL OPERATION WITH ANTENNA PORT TERMINATED .....	31
11.	SETUP PHOTOS .....	33
	END OF TEST REPORT .....	33

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Sony Corporation  
1-7-1 Konan Minato-ku  
Tokyo, 108-0075, Japan

**EUT DESCRIPTION:** GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax,  
GPS, WPT & NFC

**SERIAL NUMBER:** QV77006YHJ, QV77006WHJ, QV770073HJ

**SAMPLE RECEIPT DATE:** 2023-05-26

**DATE TESTED:** 2023-06-01

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.


This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released  
For UL LLC By:

Prepared By:



Mike Antola  
Staff Engineer  
Consumer Technology Division  
UL LLC



Brian Kiewra  
Project Engineer  
Consumer Technology Division  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC 47 CFR Part 2, and FCC 47 CFR Part 15.

## 3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification # 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A		27265	

## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

### 4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U <sub>Lab</sub>
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. SAMPLE CALCULATION

#### **RADIATED EMISSIONS**

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

#### **MAINS CONDUCTED EMISSIONS**

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC. This test report covers NFC testing.

### **5.2. MAXIMUM ELECTRIC FIELD STRENGTH**

Testing was performed at a distance of 3m. The transmitter has a maximum peak radiated magnetic field strength as follows:

The maximum E-field reading at 30m is 21.06dBuV/m.

### **5.3. SOFTWARE AND FIRMWARE**

The software version used during testing was 2.46.

### **5.4. WORST-CASE CONFIGURATION AND MODE**

The fundamental of the EUT was investigated under three orthogonal orientations X (Flatbed), Y (Landscape), and Z (Portrait). The Z (Portrait) orientation was determined to be the worst-case orientation.

In addition, Type A, B, F, and V at each supported data rate and with and without a tag were investigated to determine the worst case based on the highest power and spurious emissions. Type B, 106Kbps without tag was determined to be the worst case and therefore was selected for all final tests.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Inspiron 15 3000	5KPQJP3	NA
AC Adaptor	Sony	XQZ-UC1	1821W34209742	NA
Headphones	Sony	MDR-EX15AP	NA	NA
NFC Tag	Hicarer	NTAG215	B091Z6NtN8	NA
USB-C Cable	Sony	XQZ-UB1	NA	NA

Note: Tag only used during investigation of worst-case modes.

### I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB-C	1	USB-C	Non-Shielded	<3m	Connected to power supply
2	3.5mm	1	AUX	Non-Shielded	<3m	Connected to headphones

### TEST SETUP

Test software on the EUT exercised the radio.

### SETUP DIAGRAM

Please refer to R14777340-EP10 for setup diagram.

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equipment ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
0.009-30MHz					
135144	Active Loop Antenna	ETS-Lindgren	6502	2023-01-17	2024-01-17
30-1000 MHz					
90629	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2023-01-06	2024-01-06
Gain-Loss Chains					
207638	Gain-loss string: 0.009-30MHz	Various	Various	2023-05-17	2024-05-17
207639	Gain-loss string: 25-1000MHz	Various	Various	2023-05-17	2024-05-17
Receiver & Software					
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2023-04-10	2024-04-10
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
21642	Environmental Meter	Fisher Scientific	15-077-963 (s/n 210701692)	2021-08-16	2023-08-16

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
SA0026	Spectrum Analyzer	Keysight Technologies	N9030A	2022-08-02	2023-08-02
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
76023 (EC0225)	Temp/Humid Chamber	Cincinnati Sub-Zero	ZPH-8-3.5-SCT/AC	2023-01-20	2024-01-20
MY61466084	DC Regulated Power Supply	Keysight Technologies	E3633A	NA	NA
SOFTEMI	Antenna Port Software	UL	Version 2022.8.16		
MM0167 (PRE0126458)	True RMS Multimeter	Agilent	U1232A	2021-08-17	2023-08-17

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2023-04-04	2024-04-04
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2022-08-01	2023-08-01
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2022-08-03	2023-08-03
52859	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2023-04-04	2024-04-04
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
CDECABLE001	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2022-09-12	2023-09-12

## 7. 20dB BANDWIDTH

### LIMITS

§15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1-5% of the 20dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

### RESULTS

#### Type A (CE Mode)

Mode Kbps	Frequency (MHz)	20dB Bandwidth (kHz)
848	13.56	173.1
424	13.56	912.0
212	13.56	866.9
106	13.56	433.8

#### Type B (CE Mode)

Mode Kbps	Frequency (MHz)	20dB Bandwidth (kHz)
848	13.56	26.46
424	13.56	7.782
212	13.56	7.772
106	13.56	7.791

#### Type F (CE Mode)


Mode Kbps	Frequency (MHz)	20dB Bandwidth (kHz)
424	13.56	26.36
212	13.56	26.37

#### Type V (CE Mode)


Mode Kbps	Frequency (MHz)	20dB Bandwidth (kHz)
26	13.56	33.59

## 7.1. Type A (CE Mode)


### 848kbps

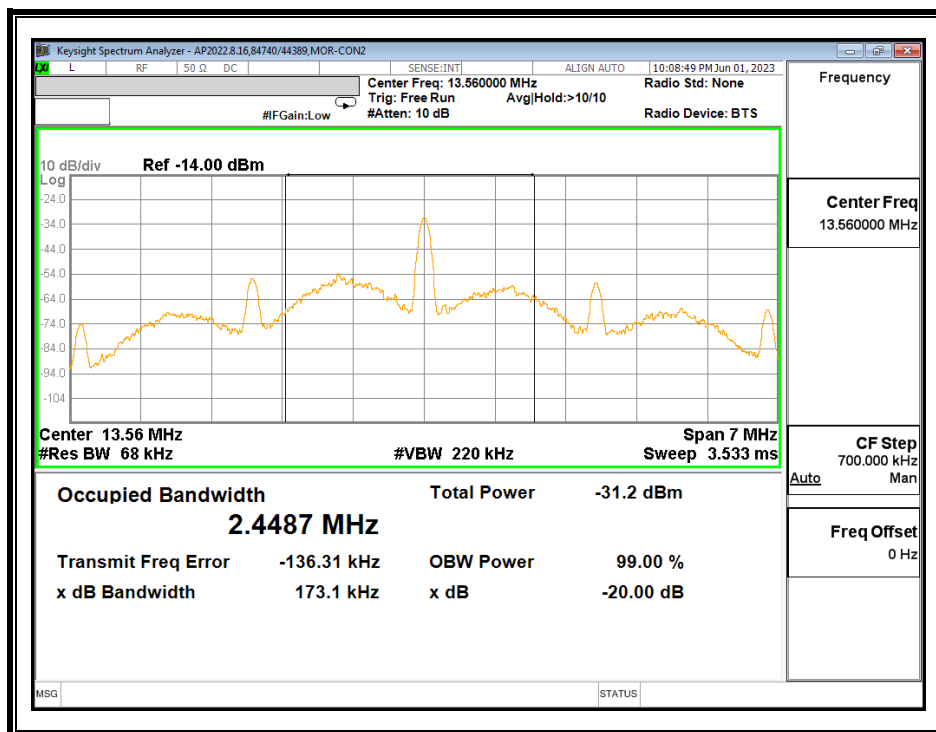


### 424kbps

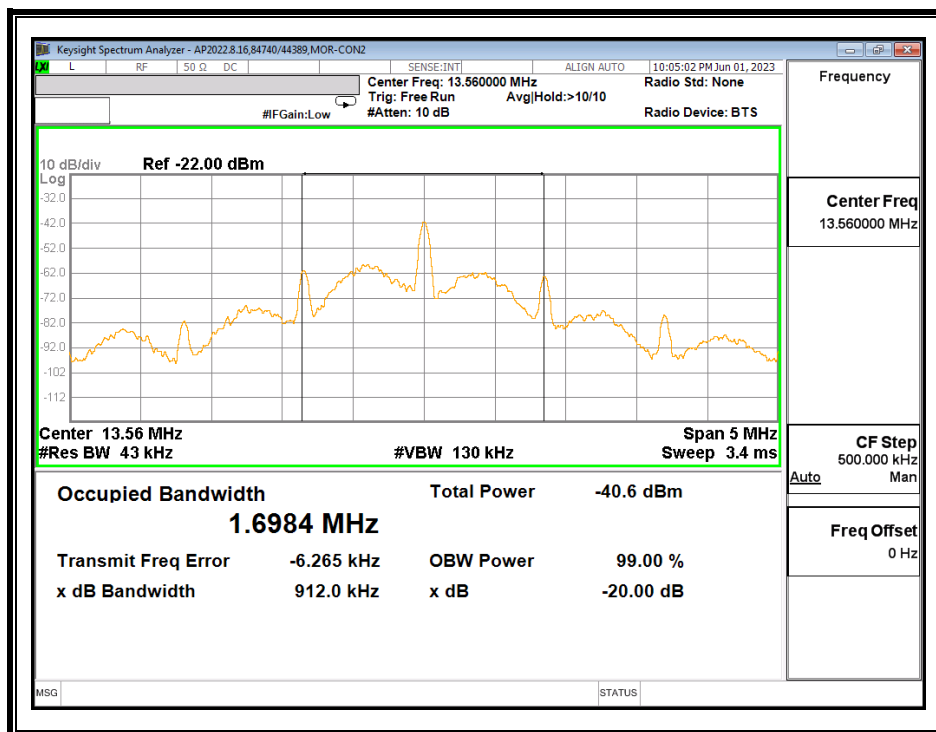

**212kbps**

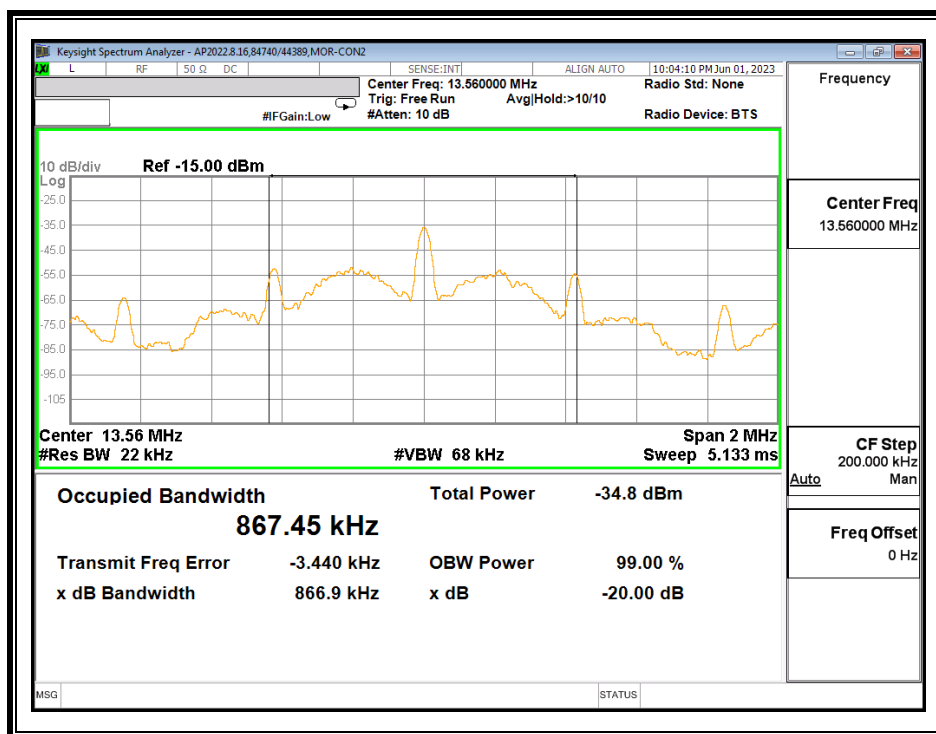


**106kbps**

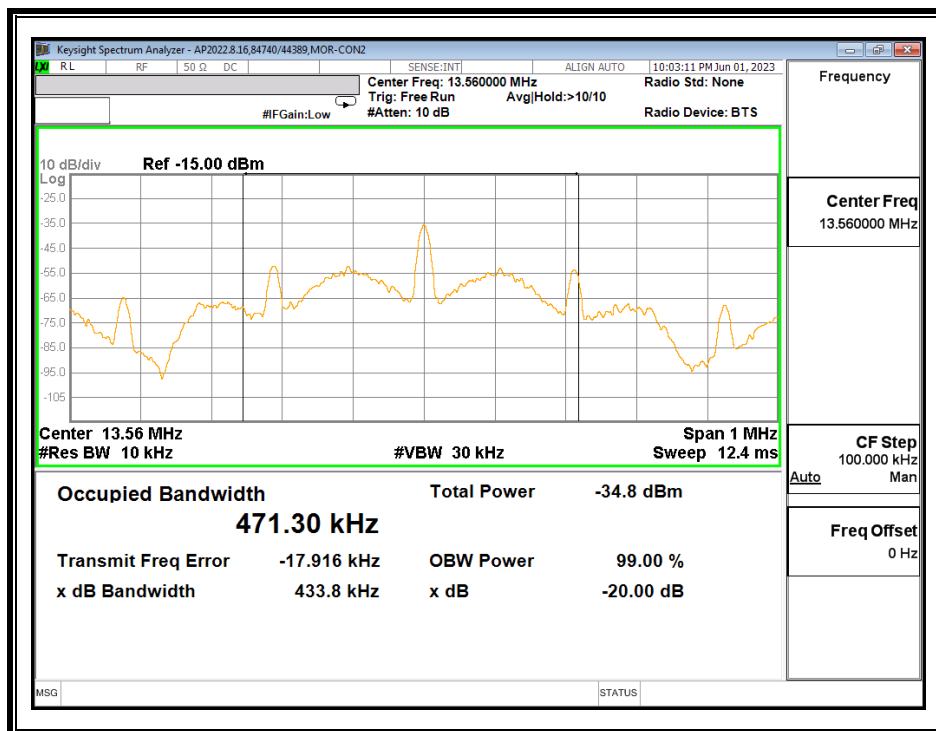


## 7.2. Type B (CE Mode)


### 848kbps

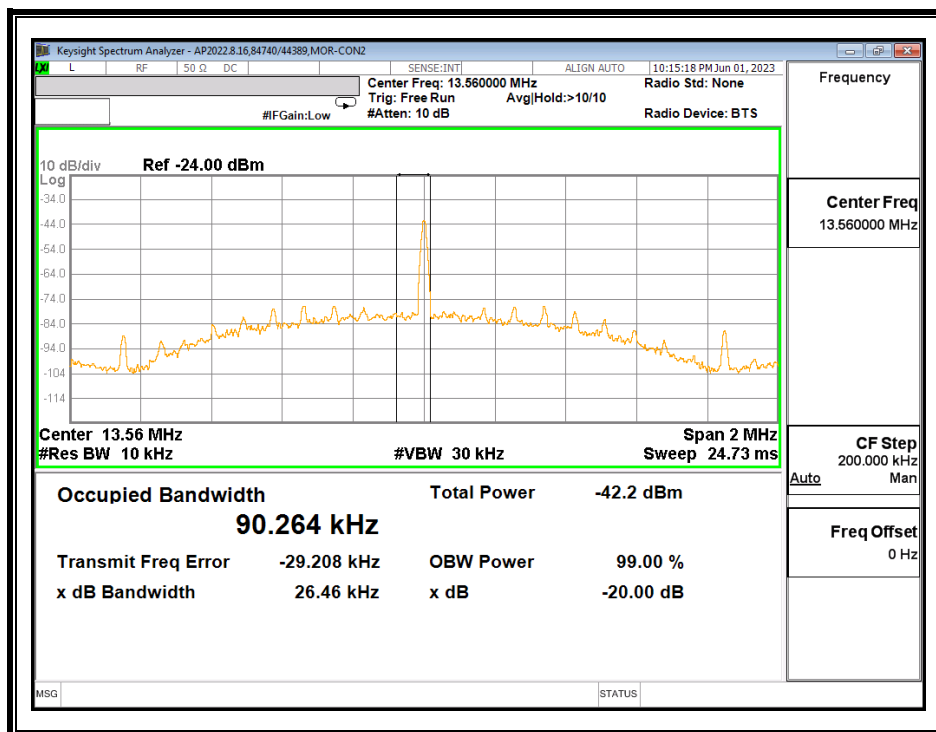


### 424kbps

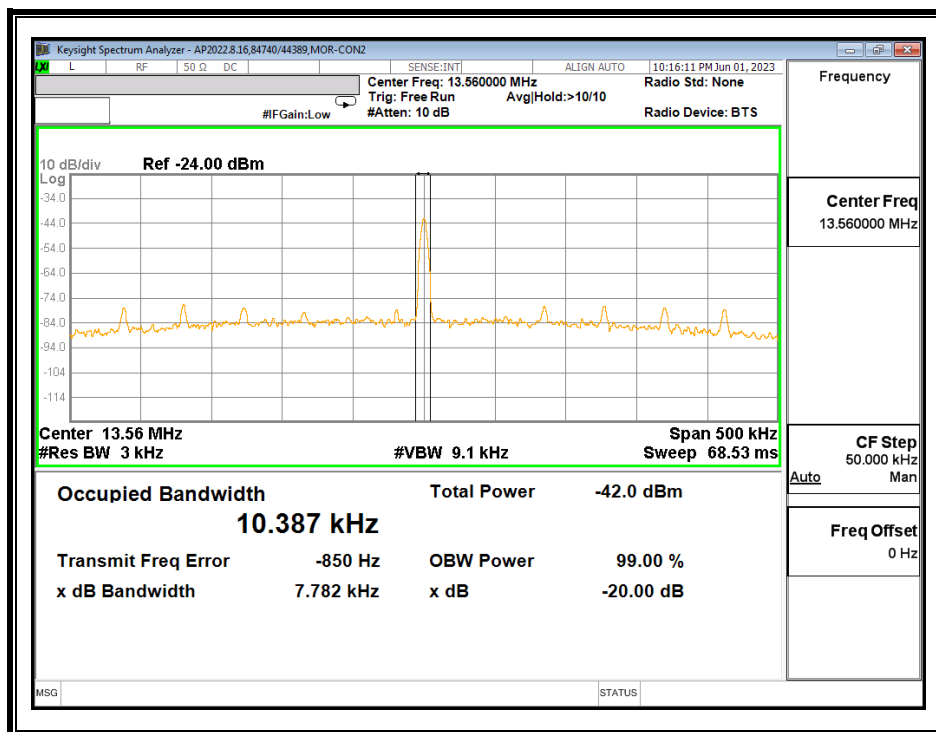

**212kbps**

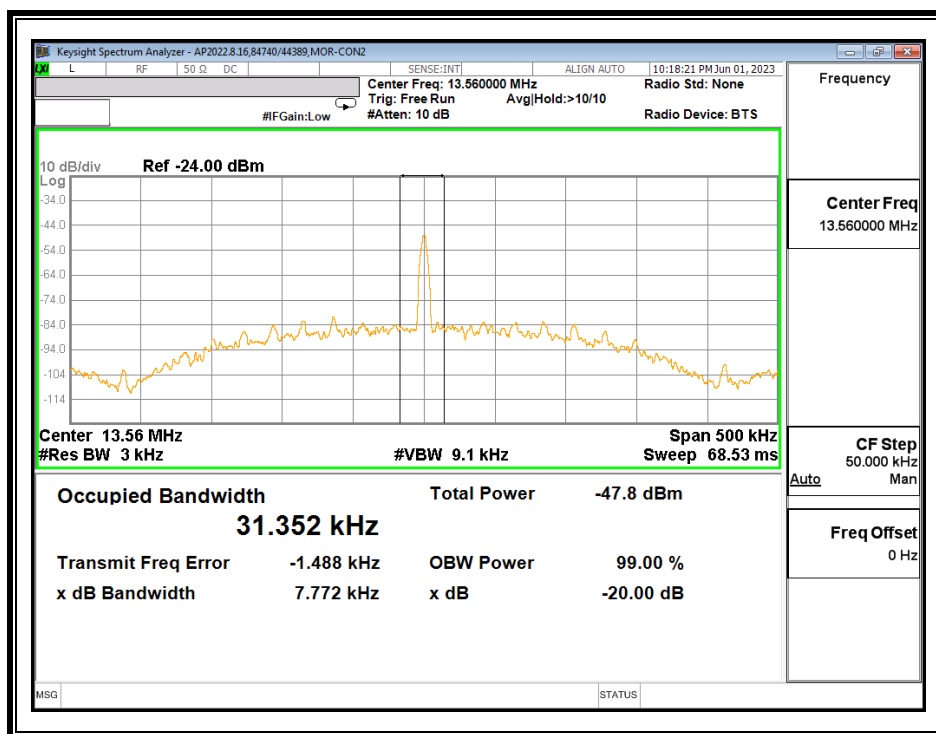


**106kbps**

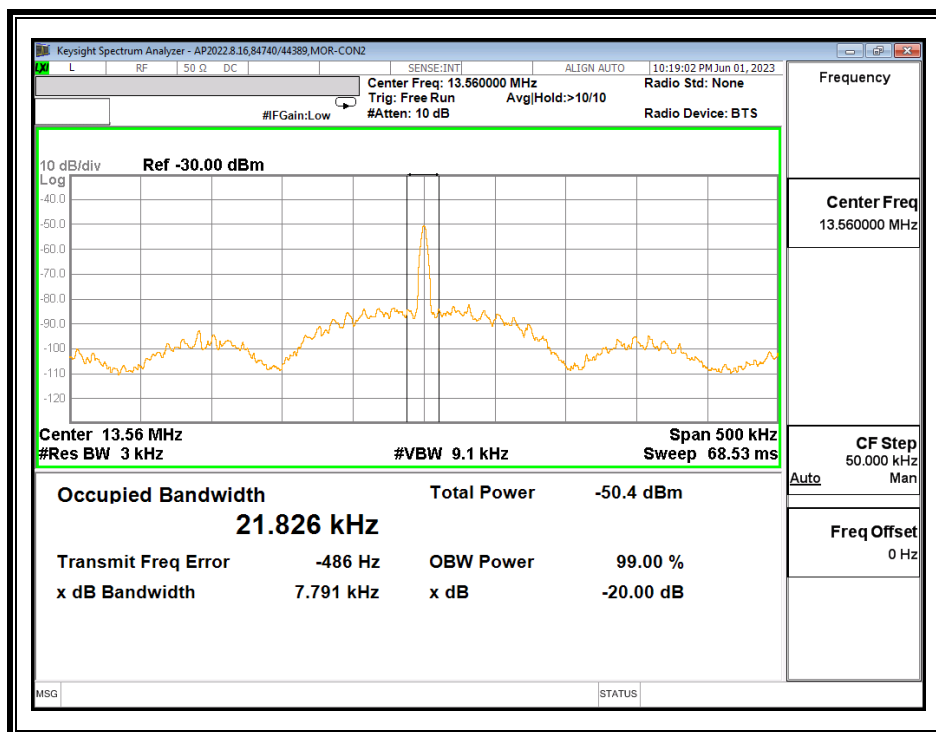




### 7.3. Type F (CE Mode)

#### 424kbps

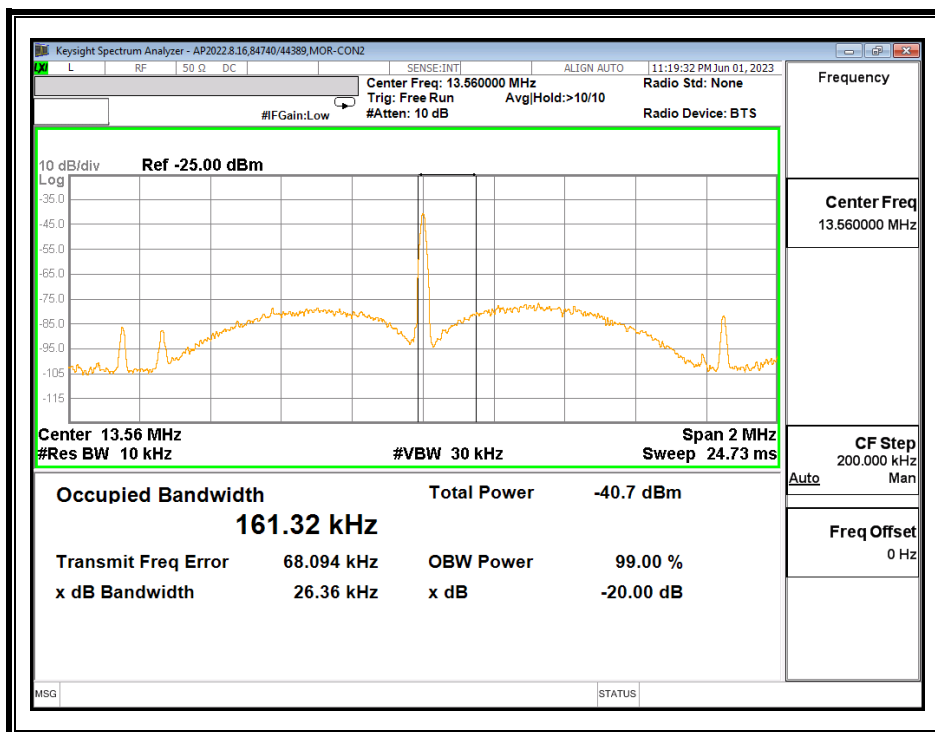


#### 212kbps

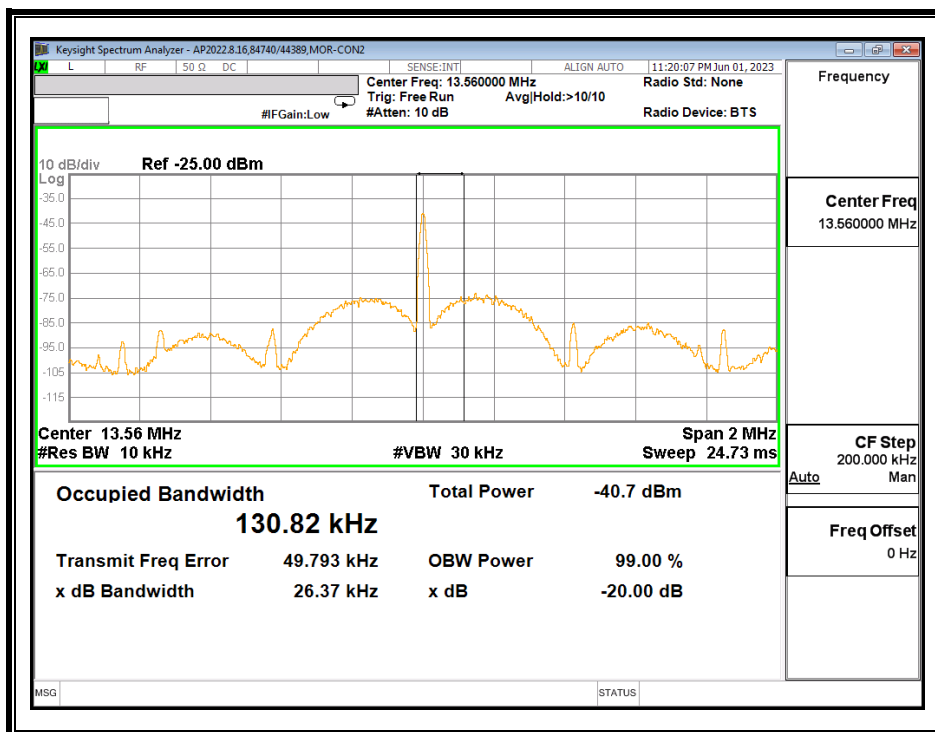

## 7.4. Type V (CE Mode)

26kbps

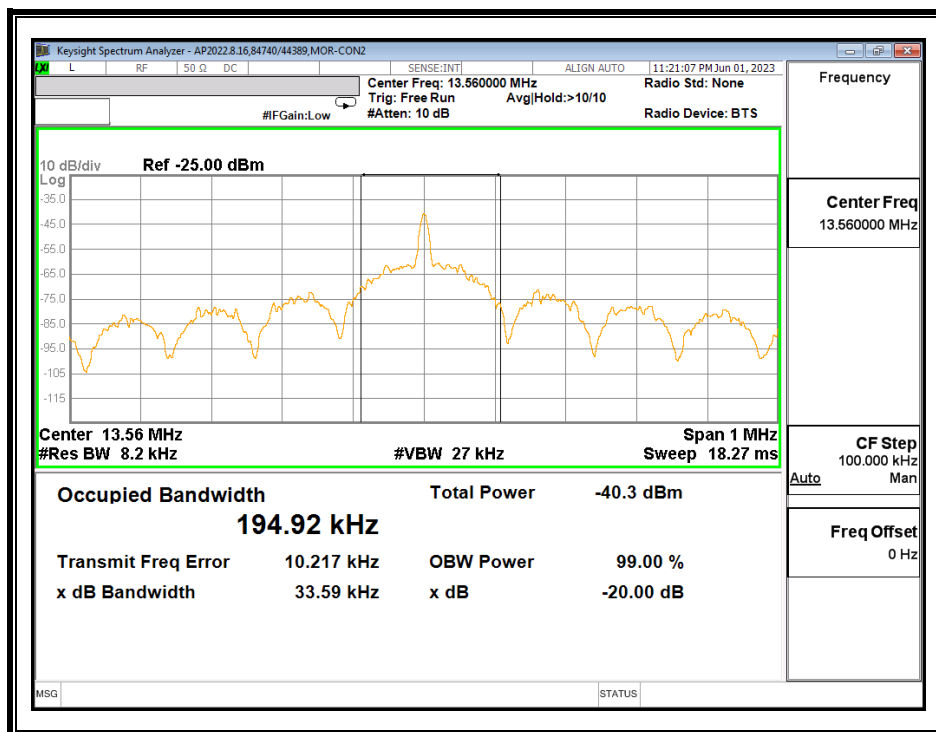

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (e) The provisions in §§ 15.31, 15.33, and 15.35, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

## **TEST PROCEDURE**

ANSI C63.10, 2013


The EUT is an intentional radiator that incorporates a digital device, the highest fundamental frequency generated or used in the device is 13.56 MHz; therefore, the frequency range was investigated from 0.15 MHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater.

## **RESULTS**

## 8.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.009 - 30 MHz)

### 8.2.1. TYPE B (CE MODE)


#### FUNDAMENTAL 106Kbps – Face On, 0 Deg

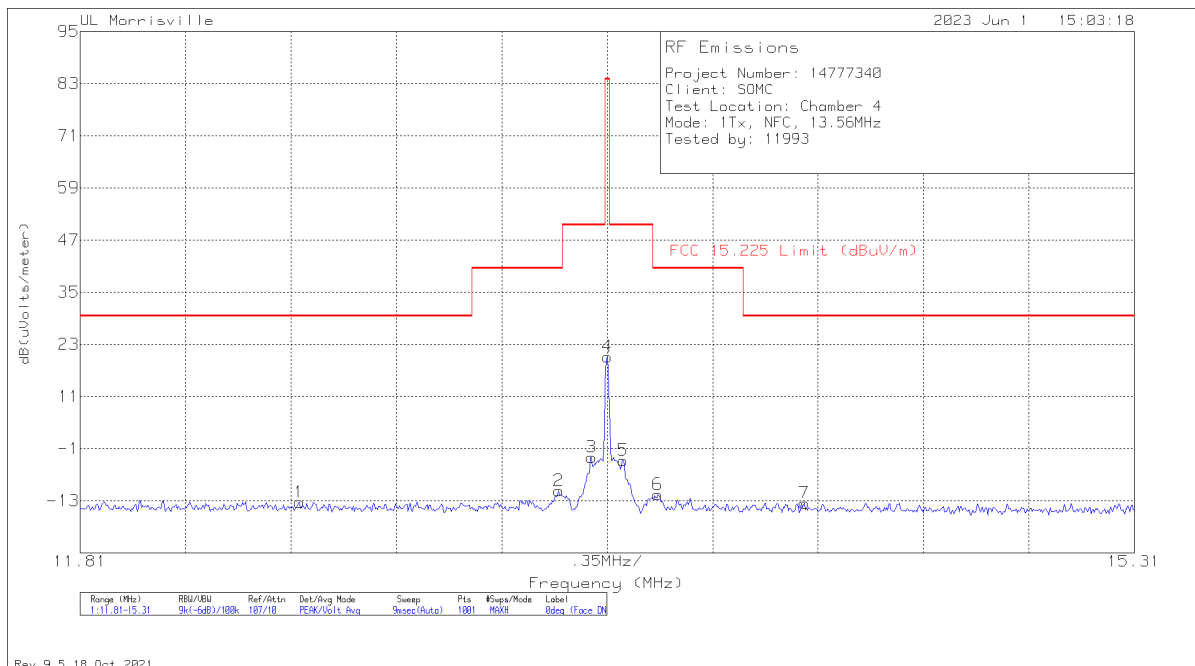

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	12.538	15.03	Pk	10.7	.9	-40	-13.37	29.5	-42.87	94	0 degs
2	13.399	17.8	Pk	10.6	.9	-40	-10.7	40.5	-51.2	94	0 degs
3	13.5075	25.53	Pk	10.6	.9	-40	-2.97	50.5	-53.47	94	0 degs
4	13.56	48.63	Pk	10.6	.9	-40	20.13	84	-63.87	94	0 degs
5	13.6125	24.77	Pk	10.6	.9	-40	-3.73	50.5	-54.23	94	0 degs
6	13.728	16.94	Pk	10.6	.9	-40	-11.56	40.5	-52.06	94	0 degs
7	14.2145	15.07	Pk	10.5	.9	-40	-13.53	29.5	-43.03	94	0 degs

Pk - Peak detector


**FUNDAMENTAL 106Kbps – Face Off, 90 Deg**

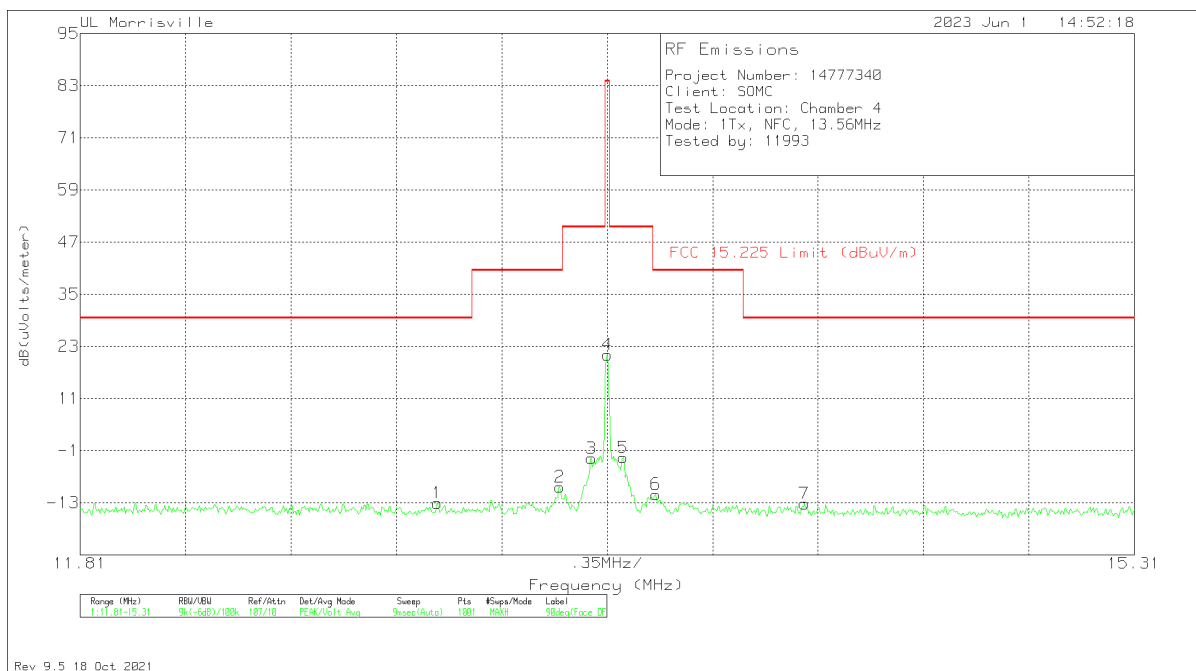

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	12.9965	15.43	Pk	10.6	.9	-40	-13.07	29.5	-42.57	188	90 degs
2	13.4025	19.1	Pk	10.6	.9	-40	-9.4	40.5	-49.9	188	90 degs
3	13.5075	25.72	Pk	10.6	.9	-40	-2.78	50.5	-53.28	188	90 degs
4	13.56	49.56	Pk	10.6	.9	-40	21.06	84	-62.94	188	90 degs
5	13.6125	25.89	Pk	10.6	.9	-40	-2.61	50.5	-53.11	188	90 degs
6	13.721	17.41	Pk	10.6	.9	-40	-11.09	40.5	-51.59	188	90 degs
7	14.2145	15.39	Pk	10.5	.9	-40	-13.21	29.5	-42.71	188	90 degs

Pk - Peak detector

# **FUNDAMENTAL106Kbps – Horizontal, Flat**

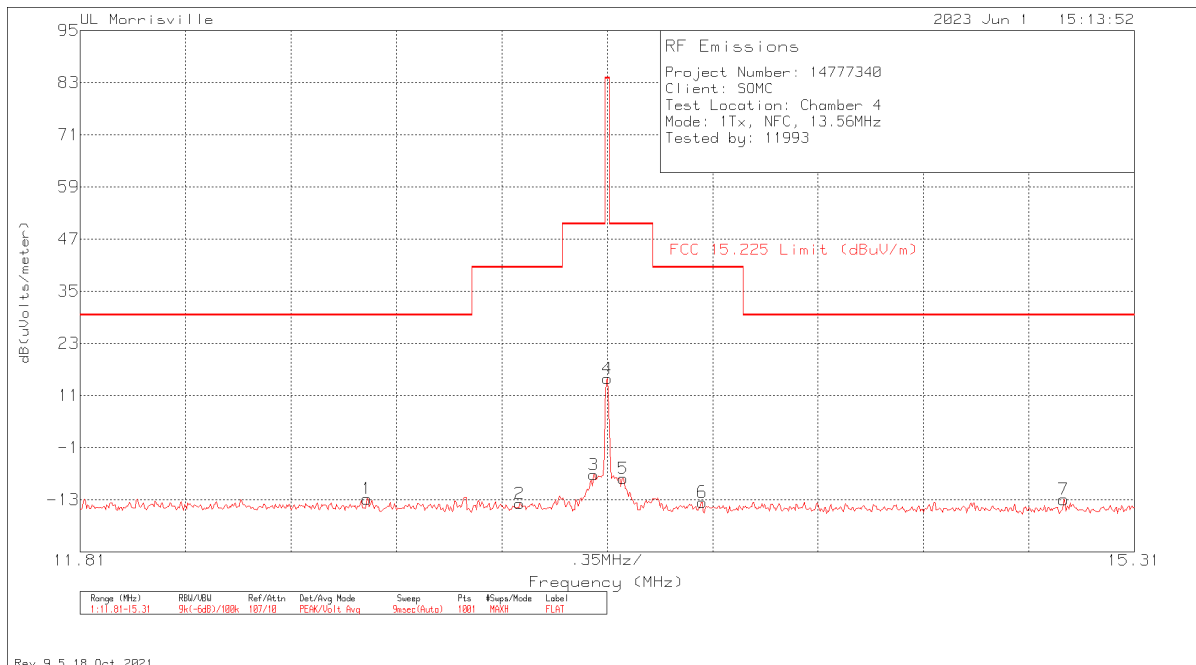


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
1	12.762	15.61	Pk	10.7	.9	-40	-12.79	29.5	-42.29	93	Flat
2	13.2695	14.59	Pk	10.6	.9	-40	-13.91	40.5	-54.41	93	Flat
3	13.5145	21.23	Pk	10.6	.9	-40	-7.27	50.5	-57.77	93	Flat
4	13.56	43.36	Pk	10.6	.9	-40	14.86	84	-69.14	93	Flat
5	13.6125	20.38	Pk	10.6	.9	-40	-8.12	50.5	-58.62	93	Flat
6	13.875	15.01	Pk	10.5	.9	-40	-13.59	40.5	-54.09	93	Flat
7	15.0755	15.76	Pk	10.4	.9	-40	-12.94	29.5	-42.44	93	Flat

Pk - Peak detector

# **SPURIOUS EMISSION 106Kbps**

Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were 40\*Log (test distance / specification distance).

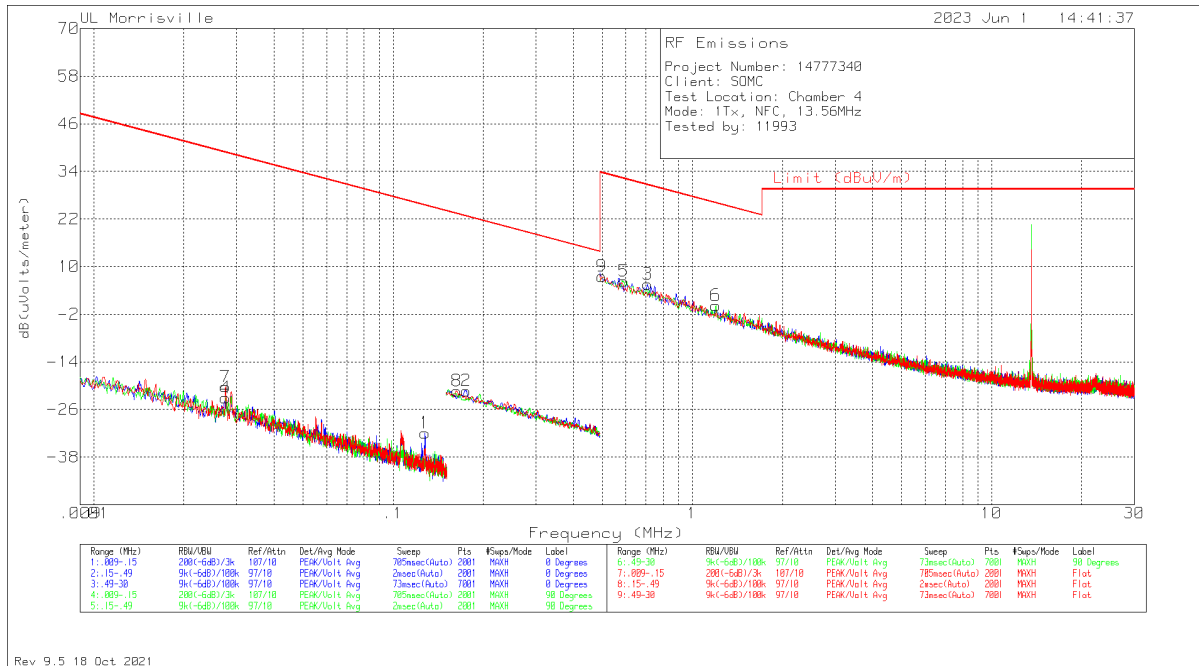

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	135144 (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
4	.02753	42.53	Pk	14.3	.1	-80	-23.07	38.81	38.81	-61.88	0-360	90 degs
7	.02753	45.36	Pk	14.3	.1	-80	-20.24	38.81	38.81	-59.05	0-360	Flat
1	.12785	35.77	Pk	12.2	.1	-80	-31.93	25.47	25.47	-57.4	0-360	0 degs
8	.16301	46.37	Pk	12.2	.1	-80	-21.33	23.36	23.36	-44.69	0-360	Flat
2	.1755	46.43	Pk	12.2	.1	-80	-21.27	22.72	22.72	-43.99	0-360	0 degs
9	.49843	35.15	Pk	12.2	.2	-40	7.55	33.65	33.65	-26.1	0-360	Flat
5	.59118	33.92	Pk	12.2	.2	-40	6.32	32.17	32.17	-25.85	0-360	90 degs
3	.70923	33.2	Pk	12.2	.2	-40	5.6	30.59	30.59	-24.99	0-360	0 degs
6	1.19829	27.82	Pk	12.2	.2	-40	.22	26.03	26.03	-25.81	0-360	90 degs



Pk - Peak detector



## 8.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

### 8.3.1. TYPE B (CE MODE)

#### SPURIOUS EMISSION 106Kbps

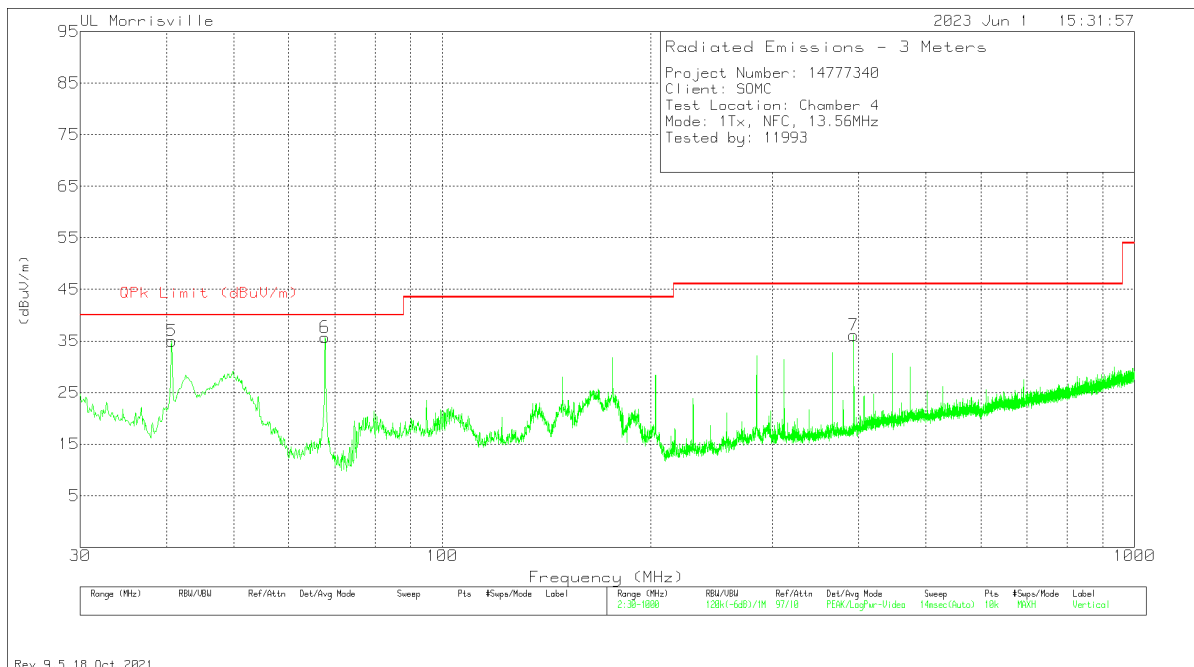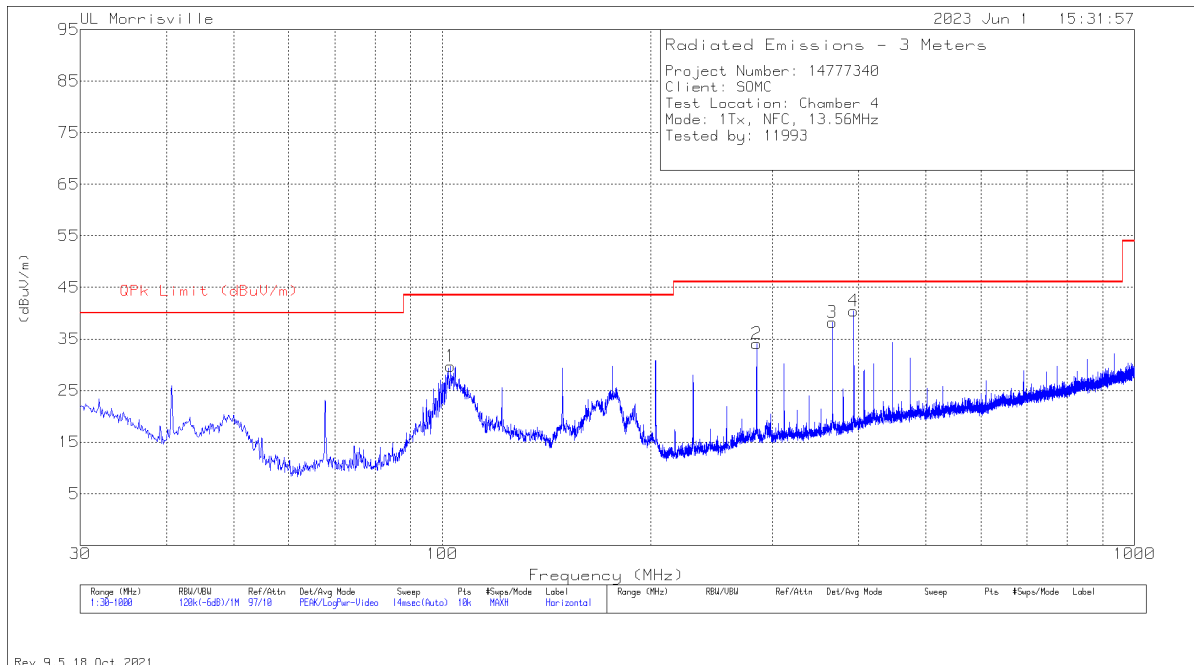

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90629 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	40.6686	46.23	Qp	19.2	-31.6	33.83	40	-6.17	7	102	V
6	67.7992	52.2	Qp	14.3	-31	35.5	40	-4.5	308	111	V
1	102.847	43.44	Pk	17.1	-30.8	29.74	43.52	-13.78	0-360	200	H
2	284.722	43.79	Pk	19.4	-29.1	34.09	46.02	-11.93	0-360	100	H
3	366.105	45.73	Pk	21	-28.5	38.23	46.02	-7.79	0-360	100	H
4	393.2386	47.03	Qp	21.3	-28.4	39.93	46.02	-6.09	78	102	H
7	393.265	43.21	Pk	21.3	-28.4	36.11	46.02	-9.91	0-360	100	V

Pk - Peak detector

Qp - Quasi-Peak detector

## 9. FREQUENCY STABILITY

### LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from the minimum to the maximum of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### TEST PROCEDURE

ANSI C63.10-2013 Clause 6.8

### RESULTS

No non-compliance noted.

#### 9.1. TYPE B 106kbps

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: $\pm 100$ ppm = 1.356 kHz										
Power Supply	Envir. Temp	Frequency Deviation Measured with Time Elapse								
(Vdc)	(°C)	Startup (MHz)	Delta (ppm)	@ 2 mins (MHz)	Delta (ppm)	@ 5 mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.89	50	13.5599370	1.401	13.5599366	1.429	13.5599366	1.429	13.5599368	1.420	$\pm 100$
3.89	40	13.5599408	1.125	13.5599413	1.088	13.5599419	1.042	13.5599420	1.032	$\pm 100$
3.89	30	13.5599520	0.295	13.5599550	0.074	13.5599585	-0.184	13.5599615	-0.406	$\pm 100$
3.89	20	<b>13.5599560</b>	<b>0.000</b>	<b>13.5599561</b>	<b>-0.009</b>	<b>13.5599561</b>	<b>-0.009</b>	<b>13.5599563</b>	<b>-0.018</b>	<b><math>\pm 100</math></b>
3.89	10	13.5600110	-4.056	13.5600185	-4.609	13.5600199	-4.711	13.5600225	-4.904	$\pm 100$
3.89	0	13.5600350	-5.826	13.5600416	-6.315	13.5600459	-6.628	13.5600501	-6.941	$\pm 100$
3.89	-10	13.5600696	-8.379	13.5600693	-8.353	13.5600698	-8.389	13.5600699	-8.398	$\pm 100$
3.89	-20	13.5600719	-8.545	13.5600715	-8.518	13.5600710	-8.481	13.5600703	-8.426	$\pm 100$
4.28	20	13.5600340	-5.752	13.5600215	-4.830	13.5600099	-3.973	13.5600015	-3.355	$\pm 100$
3.69	20	13.5600010	-3.319	13.5600006	-3.291	13.5599999	-3.236	13.5599990	-3.171	$\pm 100$

Tested by: 84740/44389

Test date: 2023-06-01

## 10. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

### TEST PROCEDURE

ANSI C63.10:2013  
FCC KDB 174176 D01 Line Conducted FAQ v01r01 Q5


### RESULTS

No non-compliance noted:

## 10.1. TYPE B 106kbps (CE MODE)

### 10.1.1. NORMAL OPERATION, 106kbps

#### LINE 1 RESULTS

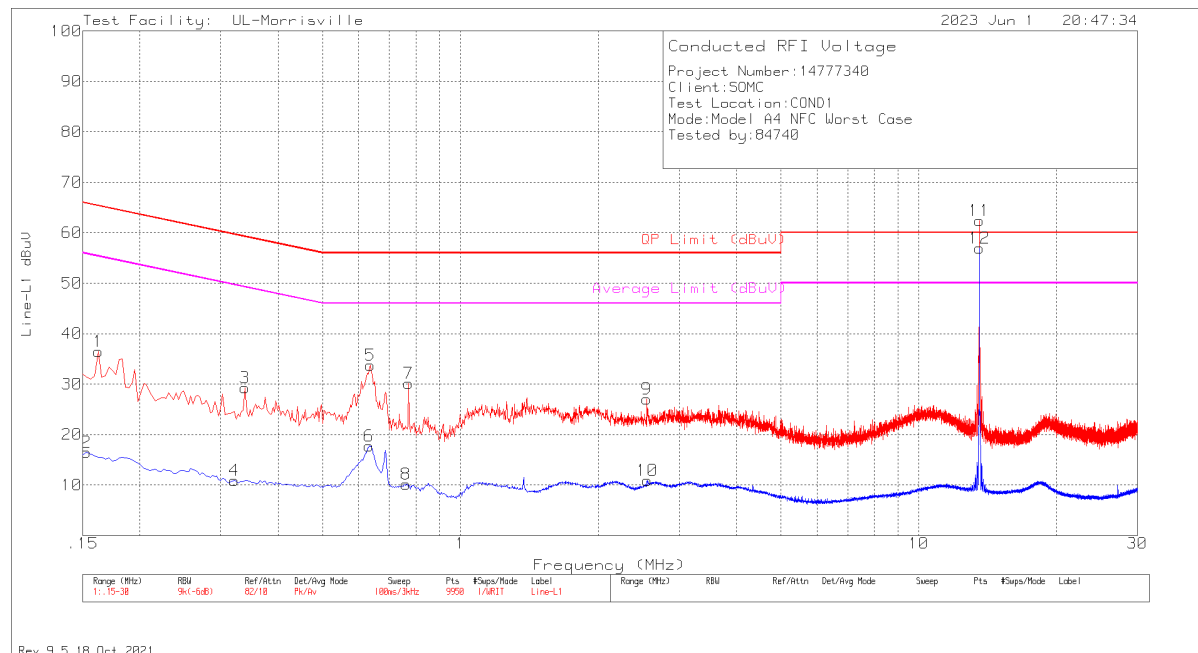

Range 1: Line-L1 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.162	26.47	Pk	.2	9.8	36.47	65.36	-28.89	-	-
2	.153	6.53	Av	.2	9.8	16.53	-	-	55.84	-39.31
3	.339	19.37	Pk	.1	9.8	29.27	59.23	-29.96	-	-
4	.321	1.03	Av	.1	9.8	10.93	-	-	49.68	-38.75
5	.636	23.97	Pk	0	9.8	33.77	56	-22.23	-	-
6	.633	7.92	Av	0	9.8	17.72	-	-	46	-28.28
7	.771	20.34	Pk	0	9.8	30.14	56	-25.86	-	-
8	.762	.36	Av	0	9.8	10.16	-	-	46	-35.84
9	2.553	17.2	Pk	0	9.8	27	56	-29	-	-
10	2.556	1.1	Av	0	9.8	10.9	-	-	46	-35.1
11	13.56	52.3	Pk	.1	10	62.4	60	2.4	-	-
12	13.56	46.83	Av	.1	10	56.93	-	-	50	6.93

Pk - Peak detector

Av - Average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data under the following section indicate that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

## LINE 2 RESULTS

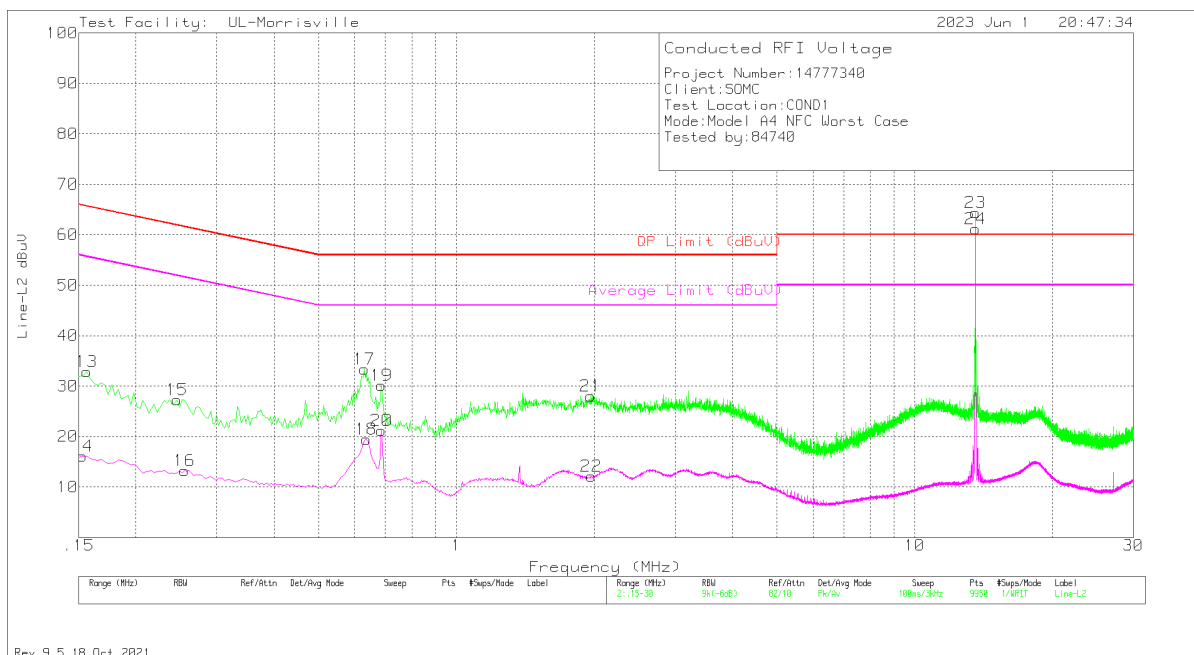

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.156	22.84	Pk	.2	9.8	32.84	65.67	-32.83	-	-
14	.153	6.16	Av	.2	9.8	16.16	-	-	55.84	-39.68
15	.246	17.42	Pk	.1	9.8	27.32	61.89	-34.57	-	-
16	.255	3.37	Av	.1	9.8	13.27	-	-	51.59	-38.32
17	.63	23.53	Pk	0	9.8	33.33	56	-22.67	-	-
18	.636	9.66	Av	0	9.8	19.46	-	-	46	-26.54
19	.687	20.35	Pk	0	9.8	30.15	56	-25.85	-	-
20	.687	11.34	Av	0	9.8	21.14	-	-	46	-24.86
21	1.965	18.17	Pk	0	9.8	27.97	56	-28.03	-	-
22	1.968	2.31	Av	0	9.8	12.11	-	-	46	-33.89
23	13.56	54.35	Pk	.1	10	64.45	60	4.45	-	-
24	13.56	51.07	Av	.1	10	61.17	-	-	50	11.17


Pk - Peak detector

Av - Average detection

Note: 13.56MHz is a fundamental frequency of the EUT. Data under the following section indicate that when the antenna terminal is terminated the fundamental amplitude is lowered below the limit line.

## 10.1.2. NORMAL OPERATION WITH ANTENNA PORT TERMINATED

### LINE 1 RESULTS

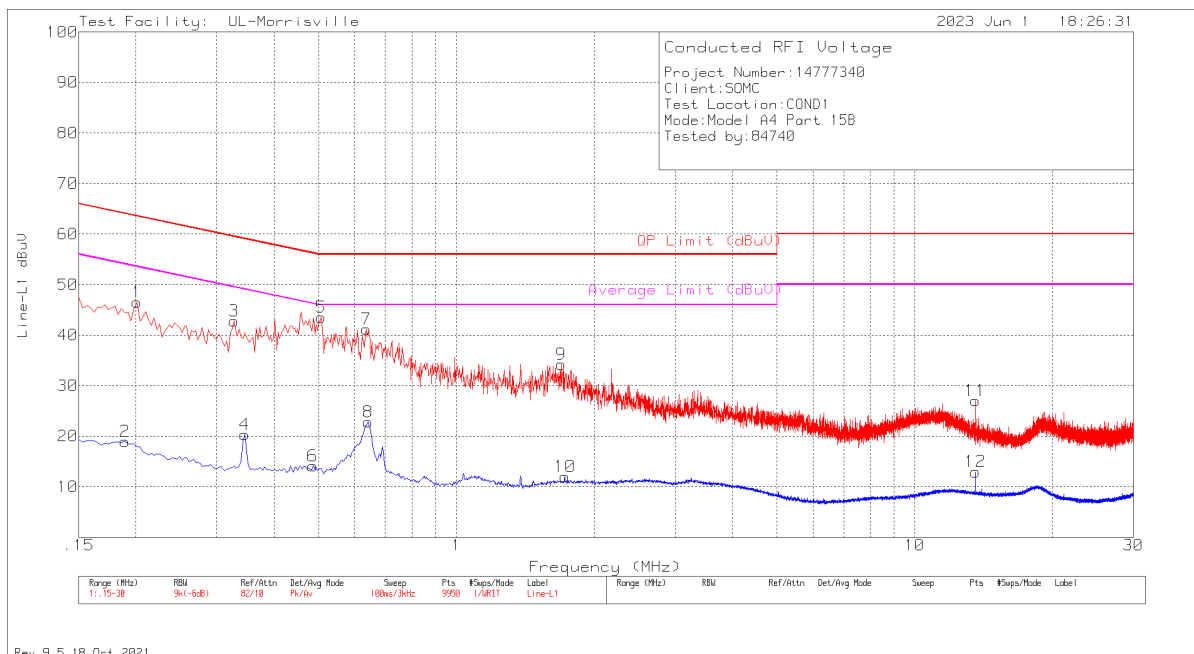


Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.201	36.57	Pk	.1	9.8	46.47	63.57	-17.1	-	-
2	.189	8.96	Av	.2	9.8	18.96	-	-	54.08	-35.12
3	.327	32.91	Pk	.1	9.8	42.81	59.53	-16.72	-	-
4	.345	10.38	Av	.1	9.8	20.28	-	-	49.08	-28.8
5	.507	33.74	Pk	0	9.8	43.54	56	-12.46	-	-
6	.486	4.32	Av	0	9.8	14.12	-	-	46.24	-32.12
7	.636	31.41	Pk	0	9.8	41.21	56	-14.79	-	-
8	.642	12.96	Av	0	9.8	22.76	-	-	46	-23.24
9	1.692	24.41	Pk	0	9.8	34.21	56	-21.79	-	-
10	1.725	2.23	Av	0	9.8	12.03	-	-	46	-33.97
11	13.56	16.89	Pk	.1	10	26.99	60	-33.01	-	-
12	13.56	2.84	Av	.1	10	12.94	-	-	50	-37.06

Pk - Peak detector

Av - Average detection

## LINE 2 RESULTS

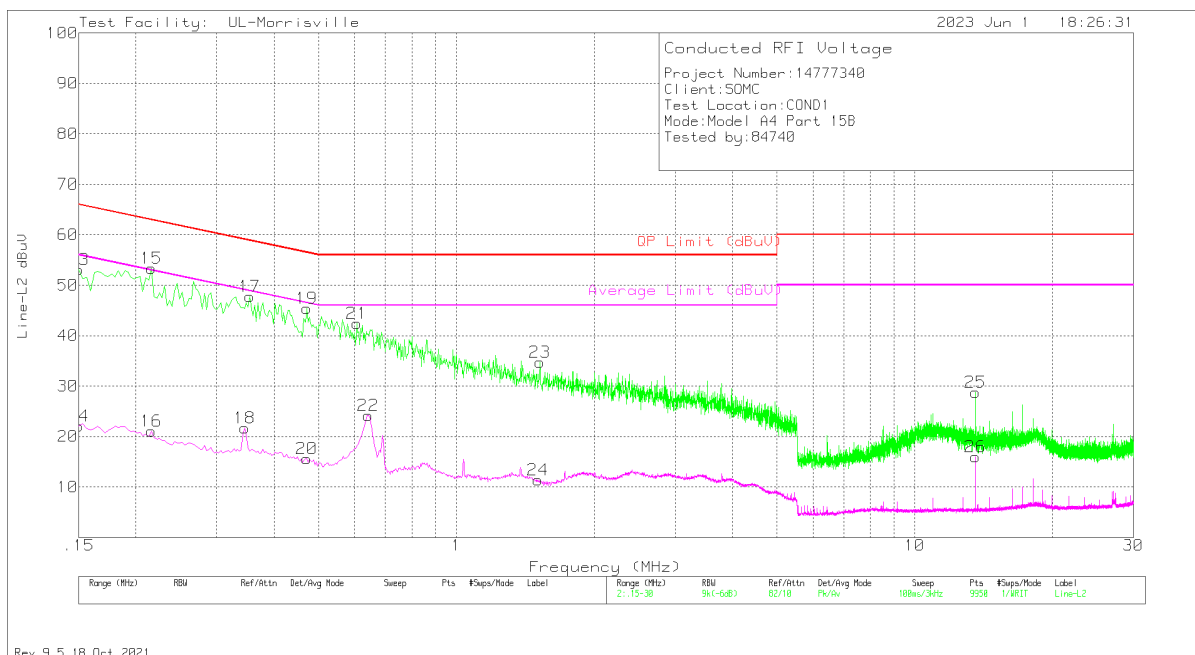

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.15	43.01	Pk	.3	9.8	53.11	66	-12.89	-	-
14	.15	12	Av	.3	9.8	22.1	-	-	56	-33.90
15	.216	43.47	Pk	.1	9.8	53.37	62.97	-9.60	-	-
16	.216	11.16	Av	.1	9.8	21.06	-	-	52.97	-31.91
17	.354	37.87	Pk	.1	9.8	47.77	58.87	-11.10	-	-
18	.345	11.76	Av	.1	9.8	21.66	-	-	49.08	-27.42
19	.471	35.59	Pk	0	9.8	45.39	56.5	-11.11	-	-
20	.471	5.77	Av	0	9.8	15.57	-	-	46.5	-30.93
21	.606	32.58	Pk	0	9.8	42.38	56	-13.62	-	-
22	.642	14.42	Av	0	9.8	24.22	-	-	46	-21.78
23	1.521	24.95	Pk	0	9.8	34.75	56	-21.25	-	-
24	1.506	1.62	Av	0	9.8	11.42	-	-	46	-34.58
25	13.56	18.65	Pk	.1	10	28.75	60	-31.25	-	-
26	13.56	5.9	Av	.1	10	16	-	-	50	-34.00

Pk - Peak detector

Av - Average detection



## 11. SETUP PHOTOS

Please refer to R14777340-EP10 for setup photos.

**END OF TEST REPORT**