



# FCC RADIO TEST REPORT

Applicant : Benq Corporation  
Address : 16 Jihu Road, Neihu, Taipei 114, Taiwan  
Equipment : BenQ Wireless Dongle  
Model No. : WDR02U  
Trade Name : BenQ  
FCC ID : JVPWDR02U

## I HEREBY CERTIFY THAT :

The sample was received on Jul. 25, 2018 and the testing was carried out on Nov. 01, 2018 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Tested by:

Mark Liao / Assistant Manager

Amos Zhang/ Engineer

Laboratory Accreditation:



Cerpass Technology Corporation Test Laboratory

TAF LAB Code:

1439



## CONTENTS

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. Summary of Test Procedure and Test Results</b>    | <b>5</b>  |
| 1.1 Applicable Standards                                | 5         |
| <b>2. Test Configuration of Equipment under Test</b>    | <b>6</b>  |
| 2.1 Feature of Equipment under Test                     | 6         |
| 2.2 Carrier Frequency of Channels                       | 6         |
| 2.3 Test Mode and Test Software                         | 7         |
| 2.4 Description of Test System                          | 7         |
| 2.5 General Information of Test                         | 8         |
| 2.6 Measurement Uncertainty                             | 8         |
| 2.7 Duty cycle                                          | 9         |
| <b>3. Test Equipment and Ancillaries Used for Tests</b> | <b>10</b> |
| <b>4. Antenna Requirements</b>                          | <b>11</b> |
| 4.1 Standard Applicable                                 | 11        |
| 4.2 Antenna Construction and Directional Gain           | 11        |
| <b>5. Test of AC Power Line Conducted Emission</b>      | <b>12</b> |
| 5.1 Test Limit                                          | 12        |
| 5.2 Test Procedures                                     | 12        |
| 5.3 Typical Test Setup                                  | 12        |
| 5.4 Test Result and Data                                | 13        |
| <b>6. Test of Spurious Emission (Radiated)</b>          | <b>15</b> |
| 6.1 Test Limit                                          | 15        |
| 6.2 Test Procedures                                     | 15        |
| 6.3 Typical Test Setup                                  | 16        |
| 6.4 Test Result and Data (9KHz ~ 30MHz)                 | 17        |
| 6.5 Test Result and Data (30MHz ~ 1GHz)                 | 17        |
| 6.6 Test Result and Data (1GHz ~ 25GHz)                 | 18        |
| 6.7 Restricted Bands of Operation                       | 30        |
| 6.8 Restrict Band Emission Measurement Data             | 31        |
| <b>7. Test of Spurious Emission (Conducted)</b>         | <b>35</b> |
| 7.1 Test Limit                                          | 35        |
| 7.2 Test Procedure                                      | 35        |
| 7.3 Test Setup Layout                                   | 35        |
| 7.4 Test Result and Data                                | 36        |
| <b>8. 6dB Bandwidth Measurement Data</b>                | <b>45</b> |
| 8.1 Test Limit                                          | 45        |
| 8.2 Test Procedures                                     | 45        |
| 8.3 Test Setup Layout                                   | 45        |
| 8.4 Test Result and Data                                | 45        |
| <b>9. Maximum Peak Output Power</b>                     | <b>51</b> |
| 9.1 Test Limit                                          | 51        |
| 9.2 Test Procedures                                     | 51        |
| 9.3 Test Setup Layout                                   | 51        |
| 9.4 Test Result and Data                                | 52        |
| <b>10. Power Spectral Density</b>                       | <b>53</b> |
| 10.1 Test Limit                                         | 53        |



10.2 Test Procedures ..... 53

10.3 Test Setup Layout..... 53

10.4 Test Result and Data ..... 54

## History of this test report

■ ORIGINAL

☐ Additional attachment as following record:

[illegible]



## 1. Summary of Test Procedure and Test Results

### 1.1 Applicable Standards

**ANSI C63.10: 2013**

**KDB 558074 D01 DTS Meas Guidance v03r05**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

| FCC Rule                                                                                              | Description of Test                | Result |
|-------------------------------------------------------------------------------------------------------|------------------------------------|--------|
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.203/15.247 (b)                                      | . Antenna Requirement              | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.207                                                 | . AC Power Line Conducted Emission | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.205/15.209;<br>Part2 section 2.1051, 2.1053, 2.1057 | . Spurious Emission(Radiated)      | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.247(d);<br>Part2 section 2.1051 and 2.1057          | . Spurious Emission(Conducted)     | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.247(a)(2);<br>Part2 section 2.1049                  | . 6dB Bandwidth                    | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.247(b);<br>Part2 section 2.1046                     | . Maximum Peak Output Power        | Pass   |
| FCC CFR Title 47 Part 15 Subpart C:<br>Section 15.247(e)                                              | . Power Spectral Density           | Pass   |



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

|                    |                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment          | BenQ Wireless Dongle                                                                                                                          |
| Model No.          | WDR02U                                                                                                                                        |
| Spreading          | 802.11b: CCK, DQPSK, DBPSK<br>802.11g: 64 QAM, 16 QAM, QPSK, BPSK<br>802.11n: BPSK, QPSK, 16QAM, 64QAM                                        |
| Frequency Range    | 802.11b/g/n(20MHz): 2412-2462MHz<br>802.11n(40MHz): 2422-2452MHz                                                                              |
| Number of Channels | 802.11b/g/n/ac (20MHz):11<br>802.11n/ac (40MHz): 7                                                                                            |
| Data Rate          | 802.11b: 1, 2, 5.5, 11Mbps<br>802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>802.11n: MCS0 – MCS15, HT20/40<br>802.11ac: MCS0 – MCS9, VHT 20/40 |

Note: for more details, please refer to the User's manual of the EUT.

### 2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20, 802.11ac VHT20 (2412MHz~2462MHz)

| Channel    | Frequency(MHz) | Channel    | Frequency(MHz) |
|------------|----------------|------------|----------------|
| <b>*01</b> | <b>2412</b>    | 07         | 2442           |
| 02         | 2417           | 08         | 2447           |
| 03         | 2422           | 09         | 2452           |
| 04         | 2427           | 10         | 2457           |
| 05         | 2432           | <b>*11</b> | <b>2462</b>    |
| <b>*06</b> | <b>2437</b>    | ---        | ---            |

802.11an HT40, 802.11ac VHT40 (2422-2452MHz)

| Channel    | Frequency(MHz) | Channel    | Frequency(MHz) |
|------------|----------------|------------|----------------|
| ---        | ---            | 07         | 2442           |
| ---        | ---            | 08         | 2447           |
| <b>*03</b> | <b>2422</b>    | <b>*09</b> | <b>2452</b>    |
| 04         | 2427           | ---        | ---            |
| 05         | 2432           | ---        | ---            |
| <b>*06</b> | <b>2437</b>    | ---        | ---            |

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included support units and EUT for the RF test.
- c. An executive program, "**MT7662UQA.exe**" which transmits and receives data through Wireless.
- d. The EUT had been tested under operating condition  
After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.  
EUT staying in continuous transmitting mode was programmed.
- e. Test modes:

Mode 1: IEEE 802.11b

Mode 2: IEEE 802.11g

Mode 3: IEEE 802.11ac VHT20

Mode 4: IEEE 802.11ac VHT40

Note: The EUT incorporates a MIMO function. the EUT provides two completed transmitters and two receivers.

| MODULATION MODE   | Tx Function |
|-------------------|-------------|
| 802.11b           | 2TX         |
| 802.11g           | 2TX         |
| IEEE 802.11n HT20 | 2TX         |
| IEEE 802.11n HT40 | 2TX         |

### 2.4 Description of Test System

| No | Device   | Manufacturer | Model No.  | Description |
|----|----------|--------------|------------|-------------|
| 1  | Notebook | SONY         | PCG-71811P | R33021      |

Use Cable:

| No. | Cable | Quantity | Description |
|-----|-------|----------|-------------|
|-----|-------|----------|-------------|



## 2.5 General Information of Test

|                               |           |                                                                                                                                                                                                                                                                                                                |
|-------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ☒                             | Test Site | <b>Cerpass Technology Corporation Test Laboratory</b><br>Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.)<br>Tel:+886-3-3226-888<br>Fax:+886-3-3226-881<br>Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C.<br>Tel: +886-2-2663-8582 |
|                               | FCC       | TW1079, TW1061, TW1439                                                                                                                                                                                                                                                                                         |
|                               | IC        | 4934E-1, 4934E-2                                                                                                                                                                                                                                                                                               |
|                               | VCCI      | T-2205 for Telecommunication Test<br>C-4663 for Conducted emission test<br>R-4399,R-4218 for Radiated emission test<br>G-10812, G-10813 for radiated disturbance above 1GHz                                                                                                                                    |
| Frequency Range Investigated: |           | Conducted: from 150kHz to 30 MHz<br>Radiation: from 30 MHz to 25000MHz                                                                                                                                                                                                                                         |
| Test Distance:                |           | The test distance of radiated emission from antenna to EUT is 3 M.                                                                                                                                                                                                                                             |

## 2.6 Measurement Uncertainty

| Measurement Item                         | Uncertainty |
|------------------------------------------|-------------|
| Radiated Spurious Emission(9KHz~30MHz)   | ±5.007dB    |
| Radiated Spurious Emission(30MHz~1GHz)   | ±5.157dB    |
| Radiated Spurious Emission(1GHz~18GHz)   | ±6.383dB    |
| Radiated Spurious Emission(18GHz~40GHz)  | ±6.648dB    |
| Conducted Spurious Emission              | ±1.253dB    |
| 6dB Bandwidth                            | ±6.89%      |
| Power Spectral Density                   | ±0.630dB    |
| 26 dB Occupied Bandwidth                 | ±6.10%      |
| Frequency Stability                      | ±375KHz     |
| Channel Frequencies Separation           | ±6.10%      |
| 20dB Bandwidth                           | ±6.12%      |
| Dwell Time                               | ±1.34%      |
| Peak Output Power(Conducted Power Meter) | ±0.86dB     |
| Temperature                              | ±1.2oC      |
| Humidity                                 | ±2.7%       |
| Channel Move Time                        | ±4.53%      |
| Channel Closing Transmission Time        | ±6.61%      |
| Threshold                                | ±0.631dB    |
| Non occupancy period                     | ±1.17%      |






## 2.7 Duty cycle


|           |               |
|-----------|---------------|
| Test Item | Duty cycle    |
| Test Date | Aug. 11, 2018 |

| Mode           | Frequency (MHz) | Measurement (%) |
|----------------|-----------------|-----------------|
| 802.11b        | 2412            | 100             |
| 802.11g        | 2412            | 100             |
| 802.11n(20MHz) | 2412            | 100             |
| 802.11n(40MHz) | 2412            | 100             |


Transmit at channel 1 by 802.11b

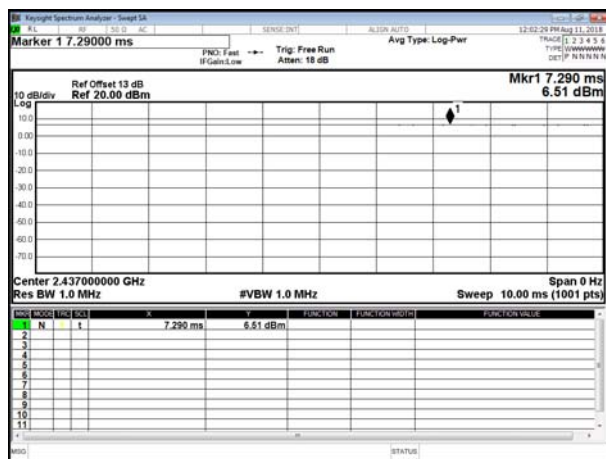


Transmit at channel 1 by 802.11g

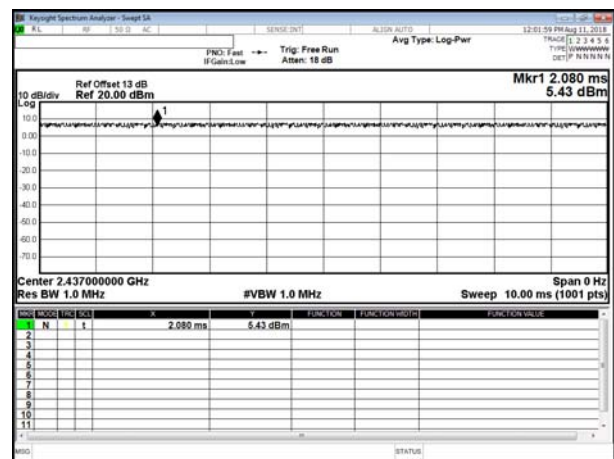

Transmit at channel 1 by 802.11n(20MHz)

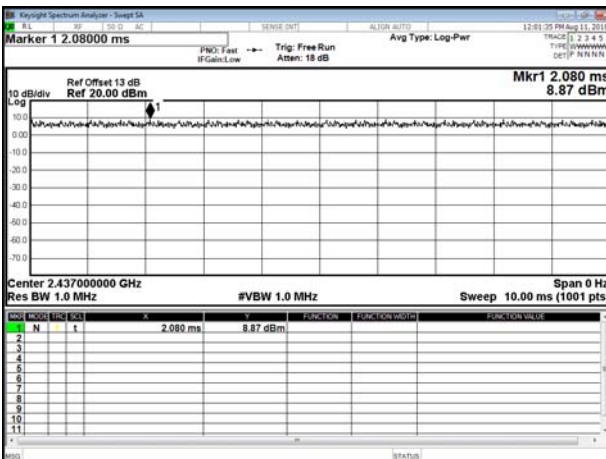

Transmit at channel 1 by 802.11n(20MHz)

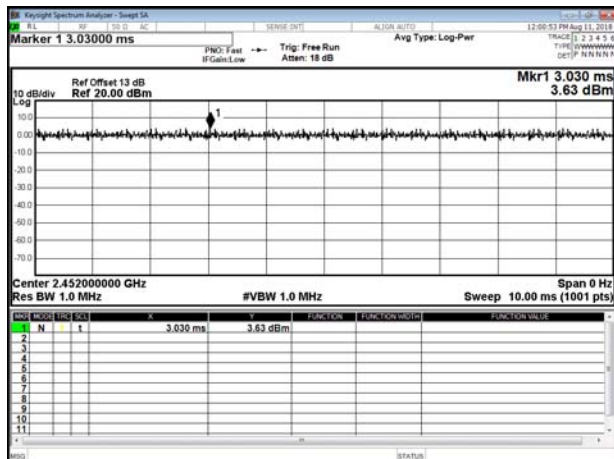



### 3. Test Equipment and Ancillaries Used for Tests

| Instrument                     | Manufacturer    | Model No                 | Serial No   | Calibration Date | Valid Date |
|--------------------------------|-----------------|--------------------------|-------------|------------------|------------|
| EMI Receiver                   | R&S             | ESCI3                    | 100443      | 2018/03/15       | 2019/03/14 |
| LISN                           | Schwarzbeck     | NSLK 8127                | 8127-568    | 2018/02/26       | 2019/02/25 |
| Pulse Limiter                  | R&S             | ESH3-Z2                  | 101934      | 2018/02/22       | 2019/02/21 |
| Bilog Antenna                  | Schwarzbeck     | VULB9168                 | 275         | 2018/09/17       | 2019/09/16 |
| Active Loop Antenna            | EMCO            | 6507                     | 40855       | 2018/05/22       | 2019/05/21 |
| Horn Antenna                   | EMCO            | 3115                     | 31589       | 2018/04/02       | 2019/04/01 |
| Horn Antenna                   | EMCO            | 3116                     | 31970       | 2018/03/23       | 2019/03/22 |
| Preamplifier                   | EM              | EM330                    | 60658       | 2018/09/08       | 2019/09/07 |
| Preamplifier                   | EMC INSTRUMENTS | EMC051845SE              | 980333      | 2018/09/18       | 2019/09/17 |
| Preamplifier                   | EMC INSTRUMENTS | EMC184045                | 980065      | 2017/11/10       | 2018/11/09 |
| MXG MW Analog Signal Generator | KEYSIGHT        | N5183A                   | MY50142931  | 2018/04/10       | 2019/04/09 |
| Spectrum Analyzer              | R&S             | FSP40                    | 100219      | 2018/07/03       | 2019/07/02 |
| BLUETOOTH TESTER               | R&S             | CBT                      | 101133      | 2018/04/02       | 2019/04/01 |
| Attenuator                     | KEYSIGHT        | 8491B                    | MY39250705  | 2018/09/04       | 2019/09/03 |
| Rotary Attenuator              | Agilent         | 8495B                    | MY42146680  | 2018/03/29       | 2019/03/28 |
| Temp & Humi chamber            | T-MACHINE       | TMJ-9712                 | T-12-040111 | 2018/08/30       | 2019/08/29 |
| Series Power Meter             | Anritsu         | ML2495A                  | 1224005     | 2018/03/23       | 2019/03/22 |
| Power Sensor                   | Anritsu         | MA2411B                  | 1207295     | 2018/03/23       | 2019/03/22 |
| Software                       | Farad           | Ez-EMC                   | ver.ct3a1   | N/A              | N/A        |
| Software                       | AUDIX           | E3                       | V8.2014-8-6 | N/A              | N/A        |
| Software                       | Keysight        | N7607B Signal Studio     | V3.0.0.0    | N/A              | N/A        |
| Software                       | Keysight        | Inservice MonitorUtility | N/A         | N/A              | N/A        |



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

| Antenna     | Peak Gain                                                   |
|-------------|-------------------------------------------------------------|
| PCB Antenna | WiFi; Antenna 1:2.0dBi; Antenna 2:2.0dBi<br>Bluetooth: 2dBi |



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


| Frequency (MHz) | Quasi Peak (dB $\mu$ V) | Average (dB $\mu$ V) |
|-----------------|-------------------------|----------------------|
| 0.15 – 0.5      | 66-56*                  | 56-46*               |
| 0.5 – 5.0       | 56                      | 46                   |
| 5.0 – 30.0      | 60                      | 50                   |

\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of Oct 2014 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


### 5.3 Typical Test Setup

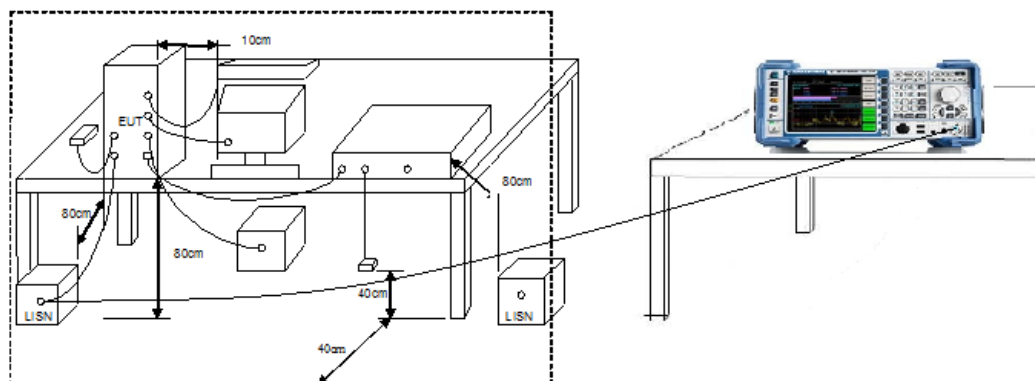



## 5.4 Test Result and Data

|                 |             |           |              |
|-----------------|-------------|-----------|--------------|
| Test Mode :     | Normal Link | Phase :   | Line         |
| Temperature :   | 20°C        | Humidity: | 51%          |
| Pressur(mbar) : | 1002        | Date:     | Aug.12, 2018 |

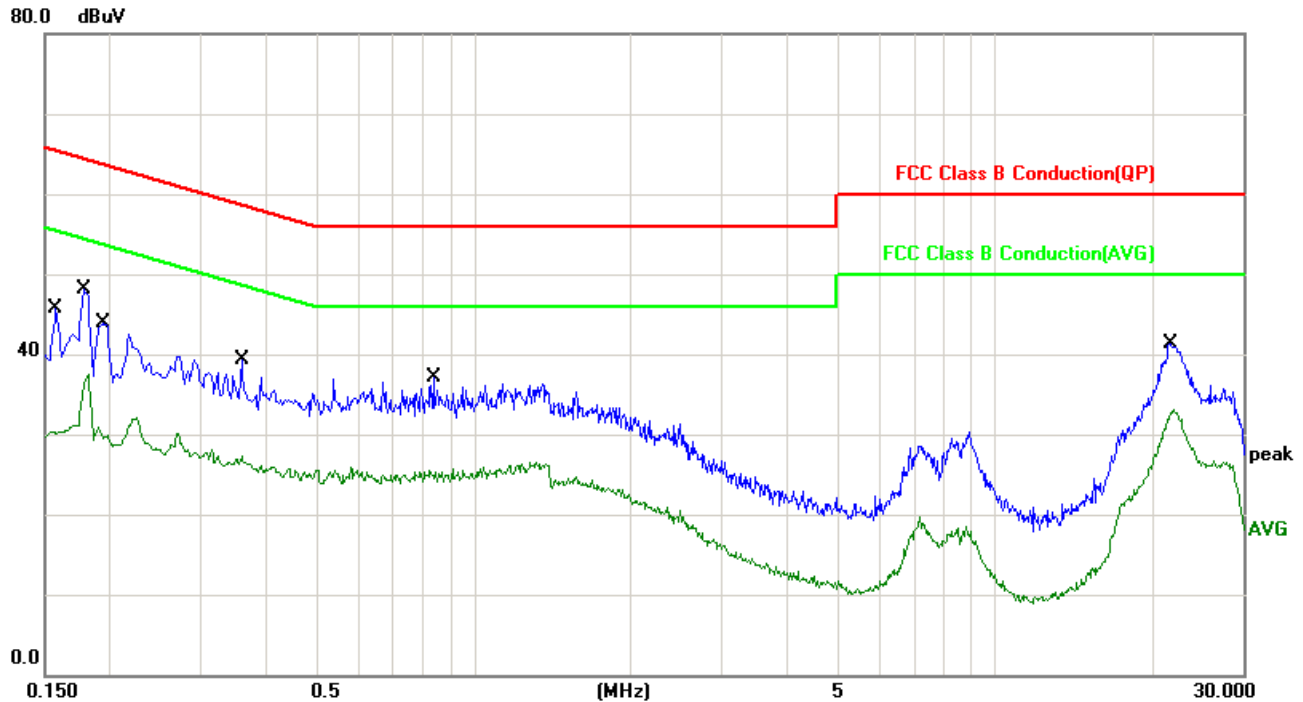


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|
| 1   | 0.1580          | 10.06       | 27.13          | 37.19        | 65.56        | -28.37      | QP       |
| 2   | 0.1580          | 10.06       | 19.63          | 29.69        | 55.56        | -25.87      | AVG      |
| 3   | 0.1780          | 10.06       | 35.02          | 45.08        | 64.57        | -19.49      | QP       |
| 4   | 0.1780          | 10.06       | 25.29          | 35.35        | 54.57        | -19.22      | AVG      |
| 5   | 0.1940          | 10.06       | 28.72          | 38.78        | 63.86        | -25.08      | QP       |
| 6   | 0.1940          | 10.06       | 19.66          | 29.72        | 53.86        | -24.14      | AVG      |
| 7   | 0.3580          | 9.97        | 21.77          | 31.74        | 58.77        | -27.03      | QP       |
| 8   | 0.3580          | 9.97        | 16.33          | 26.30        | 48.77        | -22.47      | AVG      |
| 9   | 0.8380          | 10.10       | 20.54          | 30.64        | 56.00        | -25.36      | QP       |
| 10  | 0.8380          | 10.10       | 14.68          | 24.78        | 46.00        | -21.22      | AVG      |
| 11  | 21.7500         | 10.58       | 25.87          | 36.45        | 60.00        | -23.55      | QP       |
| 12  | 21.7500         | 10.58       | 20.97          | 31.55        | 50.00        | -18.45      | AVG      |

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



|                 |             |            |              |
|-----------------|-------------|------------|--------------|
| Test Mode :     | Normal Link | Phase :    | Neutral      |
| Temperature :   | 20°C        | Humidity : | 51%          |
| Pressur(mbar) : | 1002        | Date :     | Aug.12, 2018 |

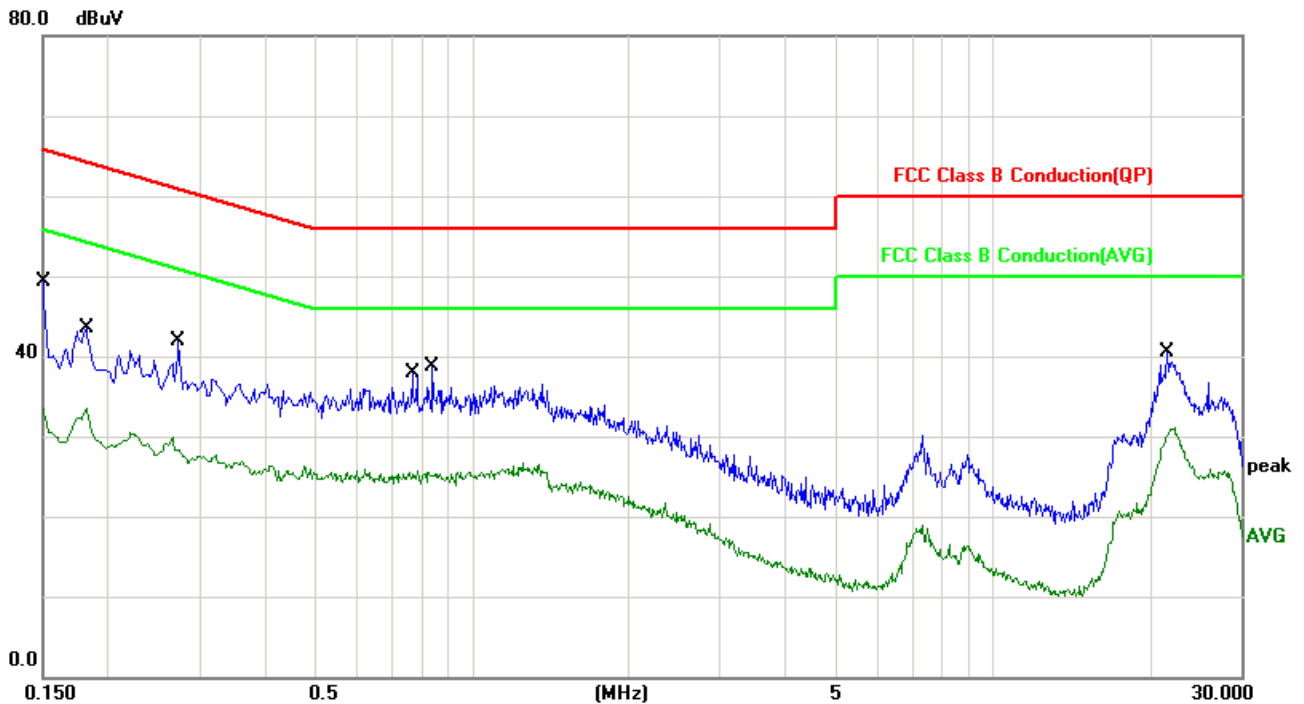

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|-------------|----------------|--------------|--------------|-------------|----------|
| 1   | 0.1500          | 10.06       | 37.28          | 47.34        | 65.99        | -18.65      | QP       |
| 2   | 0.1500          | 10.06       | 23.63          | 33.69        | 55.99        | -22.30      | AVG      |
| 3   | 0.1819          | 10.06       | 29.45          | 39.51        | 64.39        | -24.88      | QP       |
| 4   | 0.1819          | 10.06       | 22.35          | 32.41        | 54.39        | -21.98      | AVG      |
| 5   | 0.2740          | 10.02       | 24.42          | 34.44        | 60.99        | -26.55      | QP       |
| 6   | 0.2740          | 10.02       | 18.57          | 28.59        | 50.99        | -22.40      | AVG      |
| 7   | 0.7700          | 10.08       | 20.04          | 30.12        | 56.00        | -25.88      | QP       |
| 8   | 0.7700          | 10.08       | 14.71          | 24.79        | 46.00        | -21.21      | AVG      |
| 9   | 0.8420          | 10.10       | 21.15          | 31.25        | 56.00        | -24.75      | QP       |
| 10  | 0.8420          | 10.10       | 14.89          | 24.99        | 46.00        | -21.01      | AVG      |
| 11  | 21.6380         | 10.57       | 23.54          | 34.11        | 60.00        | -25.89      | QP       |
| 12  | 21.6380         | 10.57       | 18.44          | 29.01        | 50.00        | -20.99      | AVG      |

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| FREQUENCIES(MHz) | FIELD STRENGTH<br>(microvolts/meter) | MEASUREMENT<br>DISTANCE(meters) |
|------------------|--------------------------------------|---------------------------------|
| 0.009~0.490      | 2400/F(kHz)                          | 300                             |
| 0.490~1.705      | 24000/F(kHz)                         | 30                              |
| 1.705~30.0       | 30                                   | 30                              |
| 30~88            | 100                                  | 3                               |
| 88~216           | 150                                  | 3                               |
| 216~960          | 200                                  | 3                               |
| Above 960        | 500                                  | 3                               |


### 6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter for frequency below 1GHz and 1.5meter for frequency above 1GHz above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than AVG limit (that means the emission level in peak mode also complies with the limit in AVG mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in AVG mode again and reported.




### 6.3 Typical Test Setup


Below 30MHz Test Setup

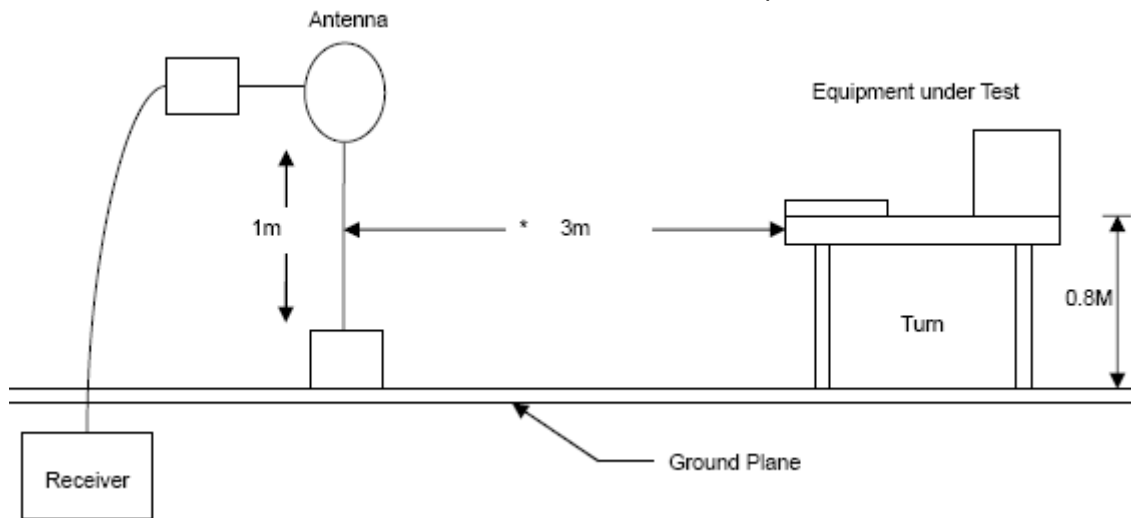

30M - 1GHz Test Setup

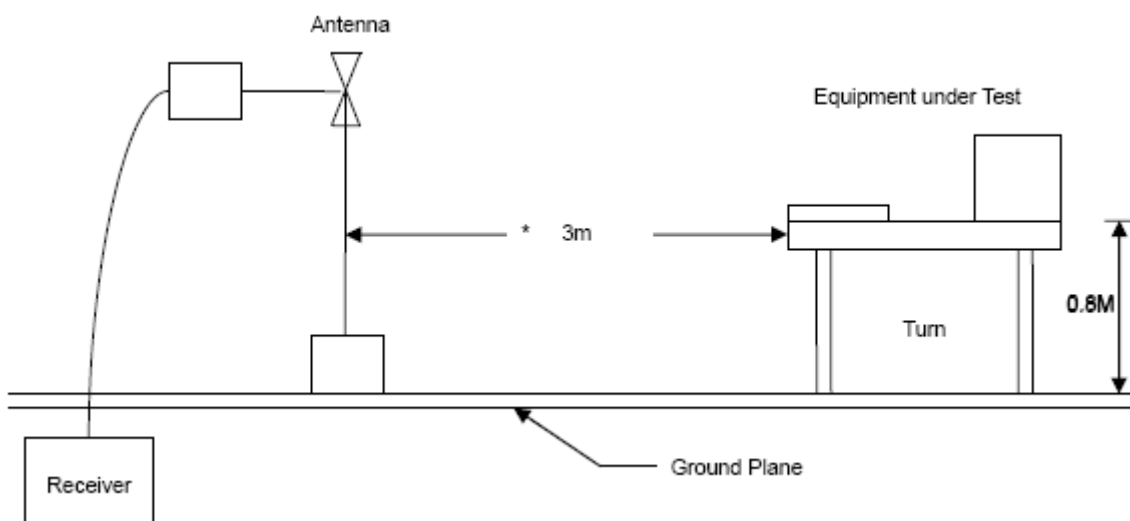

Above 1GHz Test Setup

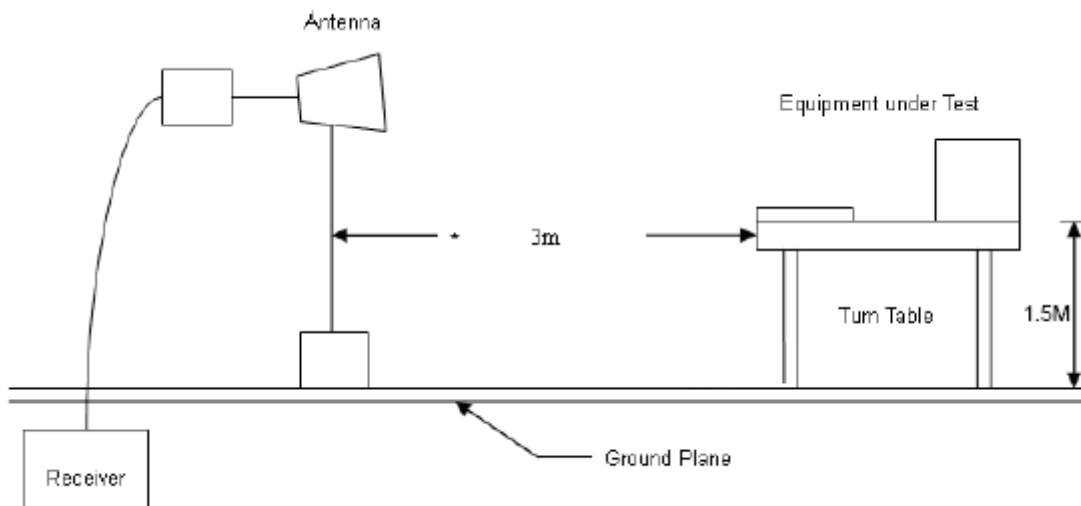





#### 6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.

#### 6.5 Test Result and Data (30MHz ~ 1GHz)

|           |   |               |                      |   |          |
|-----------|---|---------------|----------------------|---|----------|
| Power     | : | AC120V/60Hz   | Temperature          | : | 24 °C    |
| Test Mode | : | Normal Link   | Humidity             | : | 54 %     |
| Test date | : | Oct. 30, 2018 | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/QP) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 32.9099            | H              | -4.78                     | 36.07                      | 31.29                        | 40.00                | -8.71                  | peak                        |
| 95.9599            | H              | -10.21                    | 38.80                      | 28.59                        | 43.50                | -14.91                 | peak                        |
| 154.1598           | H              | -11.53                    | 36.01                      | 24.48                        | 43.50                | -19.02                 | peak                        |
| 209.4499           | H              | -9.50                     | 36.06                      | 26.56                        | 43.50                | -16.94                 | peak                        |
| 480.0799           | H              | -1.10                     | 25.99                      | 24.89                        | 46.00                | -21.11                 | peak                        |
| 960.2300           | H              | 3.17                      | 32.24                      | 35.41                        | 54.00                | -18.59                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 35.8200            | V              | -6.56                     | 35.56                      | 29.00                        | 40.00                | -11.00                 | peak                        |
| 71.7099            | V              | -14.83                    | 41.26                      | 26.43                        | 40.00                | -13.57                 | peak                        |
| 197.8100           | V              | -9.77                     | 34.14                      | 24.37                        | 43.50                | -19.13                 | peak                        |
| 239.5200           | V              | -9.06                     | 35.00                      | 25.94                        | 46.00                | -20.06                 | peak                        |
| 431.5799           | V              | -4.60                     | 27.69                      | 23.09                        | 46.00                | -22.91                 | peak                        |
| 960.2300           | V              | 3.17                      | 30.65                      | 33.82                        | 54.00                | -20.18                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

**6.6 Test Result and Data (1GHz ~ 25GHz)**

|            |   |                   |                      |   |          |
|------------|---|-------------------|----------------------|---|----------|
| Power      | : | AC120V/60Hz       | Temperature          | : | 24 °C    |
| Test Mode1 | : | 802.11b (2412MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018     | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1396.667           | H              | -2.55                     | 50.50                      | 47.95                        | 74.00                | -26.05                 | peak                        |
| 3720.000           | H              | 10.15                     | 31.69                      | 41.84                        | 74.00                | -32.16                 | peak                        |
| 4825.000           | H              | 14.27                     | 39.24                      | 53.51                        | 74.00                | -20.49                 | peak                        |
| 6128.333           | H              | 16.31                     | 30.82                      | 47.13                        | 74.00                | -26.87                 | peak                        |
| 7261.667           | H              | 19.10                     | 31.09                      | 50.19                        | 74.00                | -23.81                 | peak                        |
| 7743.333           | H              | 20.15                     | 32.21                      | 52.36                        | 74.00                | -21.64                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1765.000           | V              | -0.08                     | 47.44                      | 47.36                        | 74.00                | -26.64                 | peak                        |
| 3323.333           | V              | 8.47                      | 38.00                      | 46.47                        | 74.00                | -27.53                 | peak                        |
| 4343.333           | V              | 12.86                     | 31.31                      | 44.17                        | 74.00                | -29.83                 | peak                        |
| 4825.000           | V              | 14.27                     | 37.74                      | 52.01                        | 74.00                | -21.99                 | peak                        |
| 6156.667           | V              | 16.32                     | 30.70                      | 47.02                        | 74.00                | -26.98                 | peak                        |
| 7035.000           | V              | 18.22                     | 30.30                      | 48.52                        | 74.00                | -25.48                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |                     |                      |            |
|------------|---------------------|----------------------|------------|
| Power      | : AC 120V/60HZ      | Temperature          | : 24 °C    |
| Test Mode1 | : 802.11b (2437MHz) | Humidity             | : 54 %     |
| Test date  | : Oct. 30, 2018     | Atmospheric Pressure | : 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1340.000           | H              | -3.07                     | 49.01                      | 45.94                        | 74.00                | -28.06                 | peak                        |
| 1651.667           | H              | -0.74                     | 47.04                      | 46.30                        | 74.00                | -27.70                 | peak                        |
| 4881.667           | H              | 14.38                     | 38.21                      | 52.59                        | 74.00                | -21.41                 | peak                        |
| 6015.000           | H              | 16.27                     | 30.91                      | 47.18                        | 74.00                | -26.82                 | peak                        |
| 6468.333           | H              | 16.45                     | 29.09                      | 45.54                        | 74.00                | -28.46                 | peak                        |
| 7545.000           | H              | 20.05                     | 30.89                      | 50.94                        | 74.00                | -23.06                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1651.667           | V              | -0.74                     | 43.50                      | 42.76                        | 74.00                | -31.24                 | peak                        |
| 3521.667           | V              | 9.47                      | 32.74                      | 42.21                        | 74.00                | -31.79                 | peak                        |
| 4400.000           | V              | 13.15                     | 30.27                      | 43.42                        | 74.00                | -30.58                 | peak                        |
| 4881.667           | V              | 14.38                     | 37.15                      | 51.53                        | 74.00                | -22.47                 | peak                        |
| 6100.000           | V              | 16.30                     | 30.65                      | 46.95                        | 74.00                | -27.05                 | peak                        |
| 7375.000           | V              | 19.54                     | 28.49                      | 48.03                        | 74.00                | -25.97                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |                     |                      |            |
|------------|---------------------|----------------------|------------|
| Power      | : AC 120V/60HZ      | Temperature          | : 24 °C    |
| Test Mode1 | : 802.11b (2462MHz) | Humidity             | : 54 %     |
| Test date  | : Oct. 30, 2018     | Atmospheric Pressure | : 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1425.000           | H              | -2.29                     | 47.95                      | 45.66                        | 74.00                | -28.34                 | peak                        |
| 3295.000           | H              | 8.32                      | 33.93                      | 42.25                        | 74.00                | -31.75                 | peak                        |
| 4201.667           | H              | 12.14                     | 30.69                      | 42.83                        | 74.00                | -31.17                 | peak                        |
| 4938.333           | H              | 14.48                     | 38.92                      | 53.40                        | 74.00                | -20.60                 | peak                        |
| 6468.333           | H              | 16.45                     | 30.91                      | 47.36                        | 74.00                | -26.64                 | peak                        |
| 7488.333           | H              | 19.98                     | 32.35                      | 52.33                        | 74.00                | -21.67                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1368.333           | V              | -2.81                     | 50.85                      | 48.04                        | 74.00                | -25.96                 | peak                        |
| 1878.333           | V              | 0.57                      | 47.83                      | 48.40                        | 74.00                | -25.60                 | peak                        |
| 3408.333           | V              | 8.92                      | 35.00                      | 43.92                        | 74.00                | -30.08                 | peak                        |
| 4938.333           | V              | 14.48                     | 36.45                      | 50.93                        | 74.00                | -23.07                 | peak                        |
| 5788.333           | V              | 15.74                     | 30.79                      | 46.53                        | 74.00                | -27.47                 | peak                        |
| 7120.000           | V              | 18.55                     | 31.15                      | 49.70                        | 74.00                | -24.30                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                   |                      |   |          |
|------------|---|-------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ      | Temperature          | : | 24 °C    |
| Test Mode2 | : | 802.11g (2412MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018     | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1368.333           | H              | -2.81                     | 49.62                      | 46.81                        | 74.00                | -27.19                 | peak                        |
| 1850.000           | H              | 0.41                      | 46.82                      | 47.23                        | 74.00                | -26.77                 | peak                        |
| 2983.333           | H              | 6.66                      | 38.26                      | 44.92                        | 74.00                | -29.08                 | peak                        |
| 4825.000           | H              | 14.27                     | 37.66                      | 51.93                        | 74.00                | -22.07                 | peak                        |
| 6015.000           | H              | 16.27                     | 30.09                      | 46.36                        | 74.00                | -27.64                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1368.333           | V              | -2.81                     | 49.64                      | 46.83                        | 74.00                | -27.17                 | peak                        |
| 2813.333           | V              | 5.52                      | 39.87                      | 45.39                        | 74.00                | -28.61                 | peak                        |
| 4400.000           | V              | 13.15                     | 31.02                      | 44.17                        | 74.00                | -29.83                 | peak                        |
| 4825.000           | V              | 14.27                     | 36.33                      | 50.60                        | 74.00                | -23.40                 | peak                        |
| 6525.000           | V              | 16.54                     | 29.52                      | 46.06                        | 74.00                | -27.94                 | peak                        |
| 7375.000           | V              | 19.54                     | 28.16                      | 47.70                        | 74.00                | -26.30                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                   |                      |   |          |
|------------|---|-------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ      | Temperature          | : | 24 °C    |
| Test Mode2 | : | 802.11g (2437MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018     | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1680.000           | H              | -0.57                     | 49.30                      | 48.73                        | 74.00                | -25.27                 | peak                        |
| 3295.000           | H              | 8.32                      | 38.56                      | 46.88                        | 74.00                | -27.12                 | peak                        |
| 4881.667           | H              | 14.38                     | 38.69                      | 53.07                        | 74.00                | -20.93                 | peak                        |
| 5675.000           | H              | 15.45                     | 32.08                      | 47.53                        | 74.00                | -26.47                 | peak                        |
| 6553.333           | H              | 16.63                     | 32.85                      | 49.48                        | 74.00                | -24.52                 | peak                        |
| 7601.667           | H              | 20.08                     | 30.22                      | 50.30                        | 74.00                | -23.70                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1226.667           | V              | -4.10                     | 47.44                      | 43.34                        | 74.00                | -30.66                 | peak                        |
| 3833.333           | V              | 10.54                     | 31.67                      | 42.21                        | 74.00                | -31.79                 | peak                        |
| 4201.667           | V              | 12.14                     | 31.40                      | 43.54                        | 74.00                | -30.46                 | peak                        |
| 4881.667           | V              | 14.38                     | 36.64                      | 51.02                        | 74.00                | -22.98                 | peak                        |
| 6525.000           | V              | 16.54                     | 30.69                      | 47.23                        | 74.00                | -26.77                 | peak                        |
| 7346.667           | V              | 19.43                     | 29.24                      | 48.67                        | 74.00                | -25.33                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |                     |                      |            |
|------------|---------------------|----------------------|------------|
| Power      | : AC 120V/60HZ      | Temperature          | : 24 °C    |
| Test Mode2 | : 802.11g (2462MHz) | Humidity             | : 54 %     |
| Test date  | : Oct. 30, 2018     | Atmospheric Pressure | : 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1226.667           | H              | -4.10                     | 50.89                      | 46.79                        | 74.00                | -27.21                 | peak                        |
| 1708.333           | H              | -0.41                     | 46.13                      | 45.72                        | 74.00                | -28.28                 | peak                        |
| 4513.333           | H              | 13.69                     | 30.69                      | 44.38                        | 74.00                | -29.62                 | peak                        |
| 4910.000           | H              | 14.43                     | 38.14                      | 52.57                        | 74.00                | -21.43                 | peak                        |
| 5448.333           | H              | 14.98                     | 31.09                      | 46.07                        | 74.00                | -27.93                 | peak                        |
| 7261.667           | H              | 19.10                     | 29.74                      | 48.84                        | 74.00                | -25.16                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1453.333           | V              | -2.04                     | 48.22                      | 46.18                        | 74.00                | -27.82                 | peak                        |
| 1963.333           | V              | 1.06                      | 45.95                      | 47.01                        | 74.00                | -26.99                 | peak                        |
| 3946.667           | V              | 10.93                     | 33.43                      | 44.36                        | 74.00                | -29.64                 | peak                        |
| 4910.000           | V              | 14.43                     | 36.77                      | 51.20                        | 74.00                | -22.80                 | peak                        |
| 6128.333           | V              | 16.31                     | 30.48                      | 46.79                        | 74.00                | -27.21                 | peak                        |
| 7431.667           | V              | 19.76                     | 28.52                      | 48.28                        | 74.00                | -25.72                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode3 | : | 802.11ac VHT20<br>(2412MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1708.333           | H              | -0.41                     | 44.23                      | 43.82                        | 74.00                | -30.18                 | peak                        |
| 3578.333           | H              | 9.67                      | 35.67                      | 45.34                        | 74.00                | -28.66                 | peak                        |
| 4541.667           | H              | 13.74                     | 30.38                      | 44.12                        | 74.00                | -29.88                 | peak                        |
| 4825.000           | H              | 14.27                     | 37.47                      | 51.74                        | 74.00                | -22.26                 | peak                        |
| 6128.333           | H              | 16.31                     | 30.86                      | 47.17                        | 74.00                | -26.83                 | peak                        |
| 7148.333           | H              | 18.66                     | 30.41                      | 49.07                        | 74.00                | -24.93                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 2133.333           | V              | 1.84                      | 39.18                      | 41.02                        | 74.00                | -32.98                 | peak                        |
| 3493.333           | V              | 9.36                      | 32.90                      | 42.26                        | 74.00                | -31.74                 | peak                        |
| 4825.000           | V              | 14.27                     | 35.33                      | 49.60                        | 74.00                | -24.40                 | peak                        |
| 5278.333           | V              | 14.83                     | 29.90                      | 44.73                        | 74.00                | -29.27                 | peak                        |
| 6581.667           | V              | 16.72                     | 30.39                      | 47.11                        | 74.00                | -26.89                 | peak                        |
| 7431.667           | V              | 19.76                     | 29.25                      | 49.01                        | 74.00                | -24.99                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor





|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode3 | : | 802.11ac VHT20<br>(2437MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1793.333           | H              | 0.08                      | 46.38                      | 46.46                        | 74.00                | -27.54                 | peak                        |
| 3833.333           | H              | 10.54                     | 30.80                      | 41.34                        | 74.00                | -32.66                 | peak                        |
| 4881.667           | H              | 14.38                     | 37.19                      | 51.57                        | 74.00                | -22.43                 | peak                        |
| 5590.000           | H              | 15.24                     | 31.75                      | 46.99                        | 74.00                | -27.01                 | peak                        |
| 6695.000           | H              | 17.09                     | 30.98                      | 48.07                        | 74.00                | -25.93                 | peak                        |
| 7460.000           | H              | 19.87                     | 28.94                      | 48.81                        | 74.00                | -25.19                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1368.333           | V              | -2.81                     | 48.52                      | 45.71                        | 74.00                | -28.29                 | peak                        |
| 1821.667           | V              | 0.24                      | 45.10                      | 45.34                        | 74.00                | -28.66                 | peak                        |
| 3550.000           | V              | 9.57                      | 34.95                      | 44.52                        | 74.00                | -29.48                 | peak                        |
| 4881.667           | V              | 14.38                     | 36.14                      | 50.52                        | 74.00                | -23.48                 | peak                        |
| 5958.333           | V              | 16.16                     | 30.94                      | 47.10                        | 74.00                | -26.90                 | peak                        |
| 7261.667           | V              | 19.10                     | 30.50                      | 49.60                        | 74.00                | -24.40                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode4 | : | 802.11ac VHT20<br>(2462MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1708.333           | H              | -0.41                     | 45.63                      | 45.22                        | 74.00                | -28.78                 | peak                        |
| 4201.667           | H              | 12.14                     | 33.80                      | 45.94                        | 74.00                | -28.06                 | peak                        |
| 4910.000           | H              | 14.43                     | 39.24                      | 53.67                        | 74.00                | -20.33                 | peak                        |
| 5703.333           | H              | 15.52                     | 31.94                      | 47.46                        | 74.00                | -26.54                 | peak                        |
| 6298.333           | H              | 16.38                     | 32.13                      | 48.51                        | 74.00                | -25.49                 | peak                        |
| 7403.333           | H              | 19.65                     | 29.61                      | 49.26                        | 74.00                | -24.74                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1510.000           | V              | -1.55                     | 45.54                      | 43.99                        | 74.00                | -30.01                 | peak                        |
| 4003.333           | V              | 11.13                     | 34.21                      | 45.34                        | 74.00                | -28.66                 | peak                        |
| 4910.000           | V              | 14.43                     | 35.21                      | 49.64                        | 74.00                | -24.36                 | peak                        |
| 5618.333           | V              | 15.31                     | 31.51                      | 46.82                        | 74.00                | -27.18                 | peak                        |
| 6326.667           | V              | 16.39                     | 30.52                      | 46.91                        | 74.00                | -27.09                 | peak                        |
| 7346.667           | V              | 19.43                     | 29.95                      | 49.38                        | 74.00                | -24.62                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode4 | : | 802.11ac VHT40<br>(2422MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1425.000           | H              | -2.29                     | 51.53                      | 49.24                        | 74.00                | -24.76                 | peak                        |
| 3550.000           | H              | 9.57                      | 32.56                      | 42.13                        | 74.00                | -31.87                 | peak                        |
| 4853.333           | H              | 14.32                     | 36.71                      | 51.03                        | 74.00                | -22.97                 | peak                        |
| 5335.000           | H              | 14.88                     | 30.42                      | 45.30                        | 74.00                | -28.70                 | peak                        |
| 6553.333           | H              | 16.63                     | 29.40                      | 46.03                        | 74.00                | -27.97                 | peak                        |
| 7290.000           | H              | 19.21                     | 29.72                      | 48.93                        | 74.00                | -25.07                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1425.000           | V              | -2.29                     | 51.36                      | 49.07                        | 74.00                | -24.93                 | peak                        |
| 3408.333           | V              | 8.92                      | 33.33                      | 42.25                        | 74.00                | -31.75                 | peak                        |
| 4853.333           | V              | 14.32                     | 35.49                      | 49.81                        | 74.00                | -24.19                 | peak                        |
| 5646.667           | V              | 15.38                     | 31.89                      | 47.27                        | 74.00                | -26.73                 | peak                        |
| 6100.000           | V              | 16.30                     | 30.45                      | 46.75                        | 74.00                | -27.25                 | peak                        |
| 7120.000           | V              | 18.55                     | 30.60                      | 49.15                        | 74.00                | -24.85                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode4 | : | 802.11ac VHT40<br>(2437MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1453.333           | H              | -2.04                     | 49.58                      | 47.54                        | 74.00                | -26.46                 | peak                        |
| 3578.333           | H              | 9.67                      | 37.56                      | 47.23                        | 74.00                | -26.77                 | peak                        |
| 4428.333           | H              | 13.29                     | 30.88                      | 44.17                        | 74.00                | -29.83                 | peak                        |
| 4881.667           | H              | 14.38                     | 36.07                      | 50.45                        | 74.00                | -23.55                 | peak                        |
| 6015.000           | H              | 16.27                     | 32.40                      | 48.67                        | 74.00                | -25.33                 | peak                        |
| 7318.333           | H              | 19.32                     | 30.23                      | 49.55                        | 74.00                | -24.45                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1396.667           | V              | -2.55                     | 47.51                      | 44.96                        | 74.00                | -29.04                 | peak                        |
| 3465.000           | V              | 9.22                      | 34.15                      | 43.37                        | 74.00                | -30.63                 | peak                        |
| 4371.667           | V              | 13.01                     | 31.33                      | 44.34                        | 74.00                | -29.66                 | peak                        |
| 4995.000           | V              | 14.59                     | 33.24                      | 47.83                        | 74.00                | -26.17                 | peak                        |
| 5986.667           | V              | 16.23                     | 31.39                      | 47.62                        | 74.00                | -26.38                 | peak                        |
| 7290.000           | V              | 19.21                     | 30.04                      | 49.25                        | 74.00                | -24.75                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



|            |   |                             |                      |   |          |
|------------|---|-----------------------------|----------------------|---|----------|
| Power      | : | AC 120V/60HZ                | Temperature          | : | 24 °C    |
| Test Mode4 | : | 802.11ac VHT40<br>(2452MHz) | Humidity             | : | 54 %     |
| Test date  | : | Oct. 30, 2018               | Atmospheric Pressure | : | 1010 hpa |

| Frequency<br>(MHz) | AntPol.<br>H/V | Correct<br>Factor<br>(dB) | Reading<br>level<br>(dBuV) | Measure<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Safe<br>Margin<br>(dB) | Detector<br>mode<br>(PK/AV) |
|--------------------|----------------|---------------------------|----------------------------|------------------------------|----------------------|------------------------|-----------------------------|
| 1368.333           | H              | -2.81                     | 49.66                      | 46.85                        | 74.00                | -27.15                 | peak                        |
| 1793.333           | H              | 0.08                      | 46.85                      | 46.93                        | 74.00                | -27.07                 | peak                        |
| 4315.000           | H              | 12.72                     | 31.07                      | 43.79                        | 74.00                | -30.21                 | peak                        |
| 4910.000           | H              | 14.43                     | 35.84                      | 50.27                        | 74.00                | -23.73                 | peak                        |
| 6695.000           | H              | 17.09                     | 30.65                      | 47.74                        | 74.00                | -26.26                 | peak                        |
| 7233.333           | H              | 18.99                     | 30.36                      | 49.35                        | 74.00                | -24.65                 | peak                        |
|                    |                |                           |                            |                              |                      |                        |                             |
| 1170.000           | V              | -4.62                     | 52.91                      | 48.29                        | 74.00                | -25.71                 | peak                        |
| 1793.333           | V              | 0.08                      | 46.31                      | 46.39                        | 74.00                | -27.61                 | peak                        |
| 3776.667           | V              | 10.35                     | 34.86                      | 45.21                        | 74.00                | -28.79                 | peak                        |
| 4910.000           | V              | 14.43                     | 34.70                      | 49.13                        | 74.00                | -24.87                 | peak                        |
| 6440.000           | V              | 16.44                     | 30.90                      | 47.34                        | 74.00                | -26.66                 | peak                        |
| 7261.667           | V              | 19.10                     | 29.91                      | 49.01                        | 74.00                | -24.99                 | peak                        |

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



## 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz             |
|---------------------|-----------------------|-----------------|-----------------|
| 0.09000 – 0.11000   | 16.42000 – 16.42300   | 399.9 – 410.0   | 4.500 – 5.250   |
| 0.49500 – 0.505**   | 16.69475 – 16.69525   | 608.0 – 614.0   | 5.350 – 5.460   |
| 2.17350 – 2.19050   | 16.80425 – 16.80475   | 960.0 – 1240.0  | 7.250 – 7.750   |
| 4.12500 – 4.12800   | 25.50000 – 25.67000   | 1300.0 – 1427.0 | 8.025 – 8.500   |
| 4.17725 – 4.17775   | 37.50000 – 38.25000   | 1435.0 – 1626.5 | 9.000 – 9.200   |
| 4.20725 – 4.20775   | 73.00000 – 74.60000   | 1645.5 – 1646.5 | 9.300 – 9.500   |
| 6.21500 – 6.21800   | 74.80000 – 75.20000   | 1660.0 – 1710.0 | 10.600 – 12.700 |
| 6.26775 – 6.26825   | 108.00000 – 121.94000 | 1718.8 – 1722.2 | 13.250 – 13.400 |
| 6.31175 – 6.31225   | 123.00000 – 138.00000 | 2200.0 – 2300.0 | 14.470 – 14.500 |
| 8.29100 – 8.29400   | 149.90000 – 150.05000 | 2310.0 – 2390.0 | 15.350 – 16.200 |
| 8.36200 – 8.36600   | 156.52475 – 156.52525 | 2483.5 – 2500.0 | 17.700 – 21.400 |
| 8.37625 – 8.38675   | 156.70000 – 156.90000 | 2655.0 – 2900.0 | 22.010 – 23.120 |
| 8.41425 – 8.41475   | 162.01250 – 167.17000 | 3260.0 – 3267.0 | 23.600 – 24.000 |
| 12.29000 – 12.29300 | 167.72000 – 173.20000 | 3332.0 – 3339.0 | 31.200 – 31.800 |
| 12.51975 – 12.52025 | 240.00000 – 285.00000 | 3345.8 – 3358.0 | 36.430 – 36.500 |
| 12.57675 – 12.57725 | 322.00000 – 335.40000 | 3600.0 – 4400.0 | Above 38.6      |
| 13.36000 – 13.41000 |                       |                 |                 |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 6.8 Restrict Band Emission Measurement Data

Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11b

| Channel 1       |               |                |                | Fundamental Frequency: 2412 MHz |             |      |             |
|-----------------|---------------|----------------|----------------|---------------------------------|-------------|------|-------------|
| Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m)                  | Margin (dB) | Det. | Ant-Pol H/V |
| 2390.000        | 2.95          | 42.32          | 45.27          | 74.00                           | -28.73      | peak | H           |
| 2390.000        | 2.95          | 25.42          | 28.37          | 54.00                           | -25.63      | AVG  | H           |
| 2390.000        | 2.95          | 40.00          | 42.95          | 74.00                           | -31.05      | peak | V           |
| 2390.000        | 2.95          | 25.31          | 28.26          | 54.00                           | -25.74      | AVG  | V           |
| Channel 11      |               |                |                | Fundamental Frequency: 2462 MHz |             |      |             |
| 2483.500        | 3.35          | 43.17          | 46.52          | 74.00                           | -27.48      | peak | H           |
| 2483.500        | 3.35          | 26.41          | 29.76          | 54.00                           | -24.24      | AVG  | H           |
| 2483.500        | 3.35          | 41.03          | 44.38          | 74.00                           | -29.62      | peak | V           |
| 2483.500        | 3.35          | 25.31          | 28.66          | 54.00                           | -25.34      | AVG  | V           |

### Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11g

| Channel 1       |               |                |                | Fundamental Frequency: 2412 MHz |             |      |             |
|-----------------|---------------|----------------|----------------|---------------------------------|-------------|------|-------------|
| Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m)                  | Margin (dB) | Det. | Ant-Pol H/V |
| 2390.000        | 2.95          | 61.65          | 64.60          | 74.00                           | -9.40       | peak | H           |
| 2390.000        | 2.95          | 42.16          | 45.11          | 54.00                           | -8.89       | AVG  | H           |
| 2390.000        | 2.95          | 54.09          | 57.04          | 74.00                           | -16.96      | peak | V           |
| 2390.000        | 2.95          | 35.41          | 38.36          | 54.00                           | -15.64      | AVG  | V           |
| Channel 11      |               |                |                | Fundamental Frequency: 2462 MHz |             |      |             |
| 2483.500        | 3.35          | 63.71          | 67.06          | 74.00                           | -6.94       | peak | H           |
| 2483.500        | 3.35          | 45.15          | 48.50          | 54.00                           | -5.50       | AVG  | H           |
| 2483.500        | 3.35          | 57.62          | 60.97          | 74.00                           | -13.03      | peak | V           |
| 2483.500        | 3.35          | 39.43          | 42.78          | 54.00                           | -11.22      | AVG  | V           |

## Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.





Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11ac VHT20

| Channel 1       |               |                |                | Fundamental Frequency: 2412 MHz |             |      |             |
|-----------------|---------------|----------------|----------------|---------------------------------|-------------|------|-------------|
| Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m)                  | Margin (dB) | Det. | Ant-Pol H/V |
| 2390.000        | 2.95          | 67.28          | 70.23          | 74.00                           | -3.77       | peak | H           |
| 2390.000        | 2.95          | 47.61          | 50.56          | 54.00                           | -3.44       | AVG  | H           |
| 2390.000        | 2.95          | 54.96          | 57.91          | 74.00                           | -16.09      | peak | V           |
| 2390.000        | 2.95          | 45.31          | 48.26          | 54.00                           | -5.74       | AVG  | V           |
| Channel 11      |               |                |                | Fundamental Frequency: 2462 MHz |             |      |             |
| 2483.500        | 3.35          | 60.93          | 64.28          | 74.00                           | -9.72       | peak | H           |
| 2483.500        | 3.35          | 42.20          | 45.55          | 54.00                           | -8.45       | AVG  | H           |
| 2483.500        | 3.35          | 52.54          | 55.89          | 74.00                           | -18.11      | peak | V           |
| 2483.500        | 3.35          | 34.85          | 38.20          | 54.00                           | -15.80      | AVG  | V           |

## Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11ac VHT40

| Channel 3       |               |                |                | Fundamental Frequency: 2422 MHz |             |      |             |
|-----------------|---------------|----------------|----------------|---------------------------------|-------------|------|-------------|
| Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m)                  | Margin (dB) | Det. | Ant-Pol H/V |
| 2390.000        | 2.95          | 64.84          | 67.79          | 74.00                           | -6.21       | peak | H           |
| 2390.000        | 2.95          | 48.12          | 51.07          | 54.00                           | -2.93       | AVG  | H           |
| 2390.000        | 2.95          | 59.25          | 62.20          | 74.00                           | -11.80      | peak | V           |
| 2390.000        | 2.95          | 41.05          | 44.00          | 54.00                           | -10.00      | AVG  | V           |
| Channel 9       |               |                |                | Fundamental Frequency: 2452 MHz |             |      |             |
| 2483.500        | 3.35          | 67.82          | 71.17          | 74.00                           | -2.83       | peak | H           |
| 2483.500        | 3.35          | 48.12          | 51.47          | 54.00                           | -2.53       | AVG  | H           |
| 2483.500        | 3.35          | 65.17          | 68.52          | 74.00                           | -5.48       | peak | V           |
| 2483.500        | 3.35          | 45.62          | 48.97          | 54.00                           | -5.03       | AVG  | V           |

## Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



## 7. Test of Spurious Emission (Conducted)

### 7.1 Test Limit

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 7.2 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r05


#### 1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq 3 \times$  RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

#### 2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

### 7.3 Test Setup Layout





## 7.4 Test Result and Data

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1014 hPa

Humidity: 47%



| Modulation Standard | Frequency (MHz) | Test Result |
|---------------------|-----------------|-------------|
| 802.11b             | 2412            | Pass        |
|                     | 2437            | Pass        |
|                     | 2462            | Pass        |
| 802.11g             | 2412            | Pass        |
|                     | 2437            | Pass        |
|                     | 2462            | Pass        |
| 802.11n HT20        | 2412            | Pass        |
|                     | 2437            | Pass        |
|                     | 2462            | Pass        |
| 802.11n HT40        | 2422            | Pass        |
|                     | 2437            | Pass        |
|                     | 2452            | Pass        |

**Note:** Test plots refer to the following pages.



Antenna 1  
Modulation Type: 802.11b





## CH01

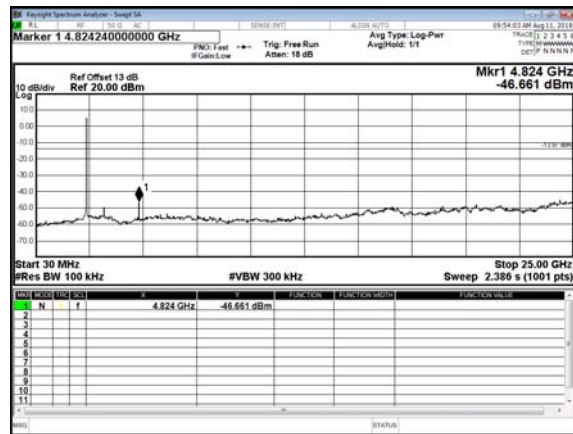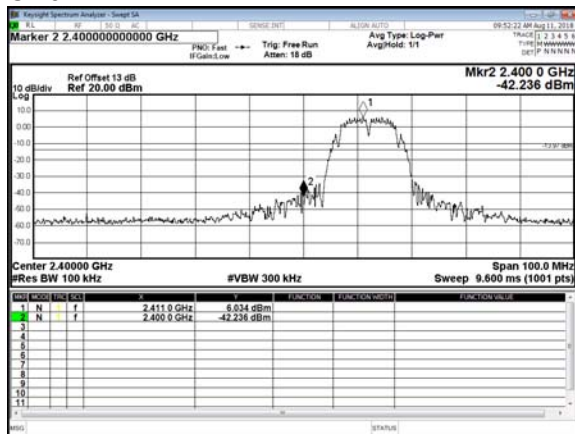

## CH06

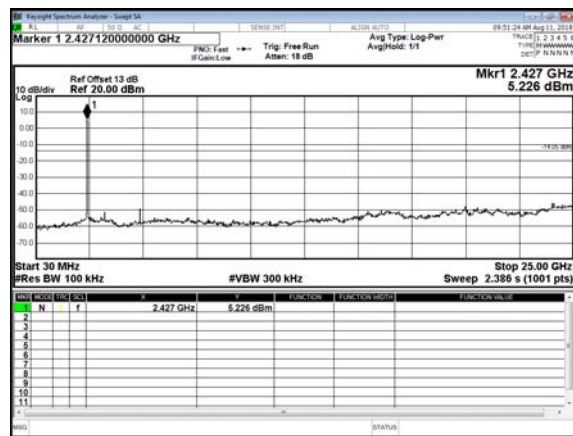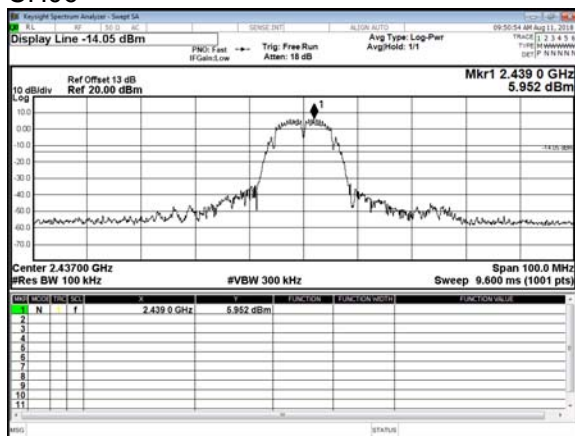



## CH11

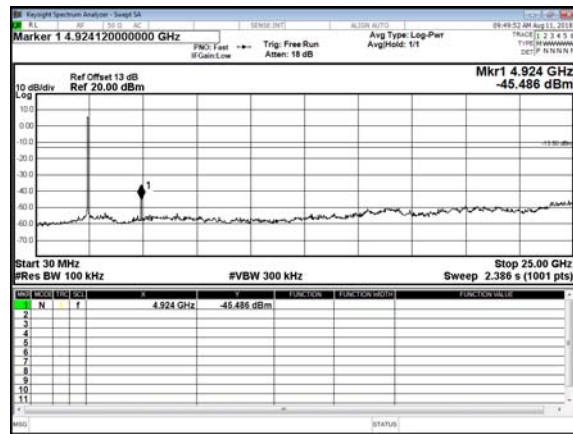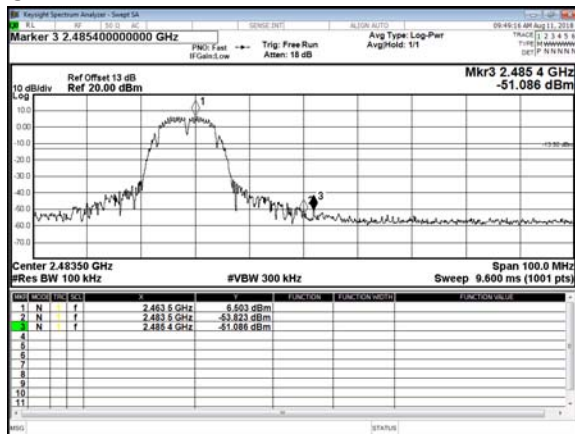



Modulation Type: 802.11g





## CH01

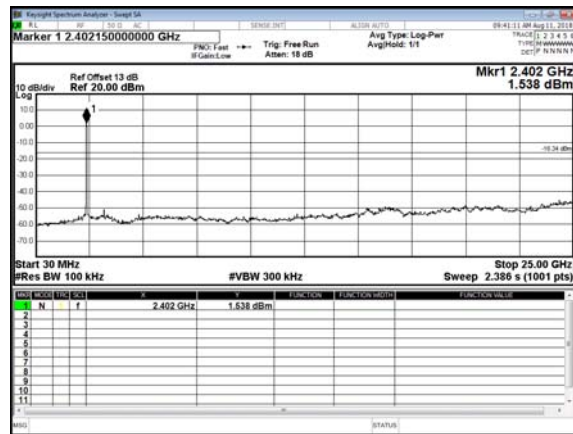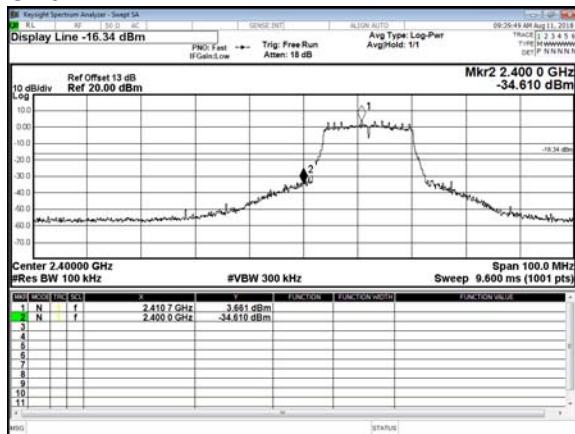

## CH06

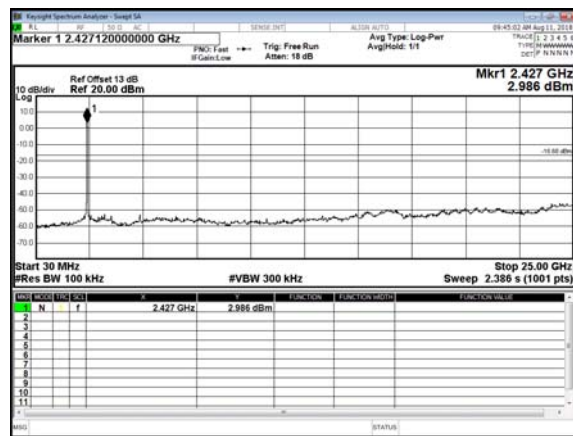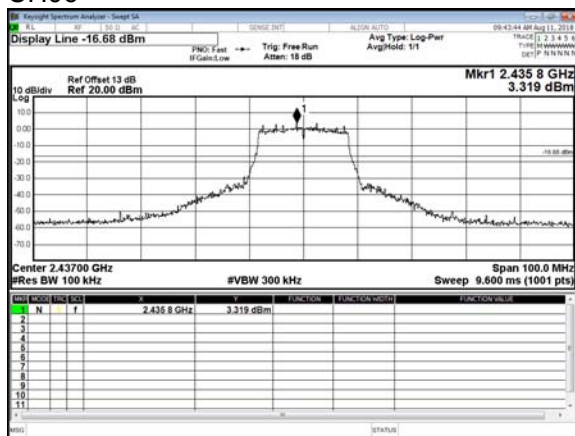



## CH11

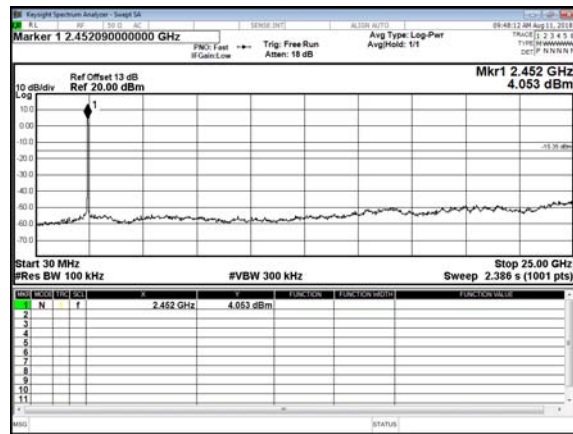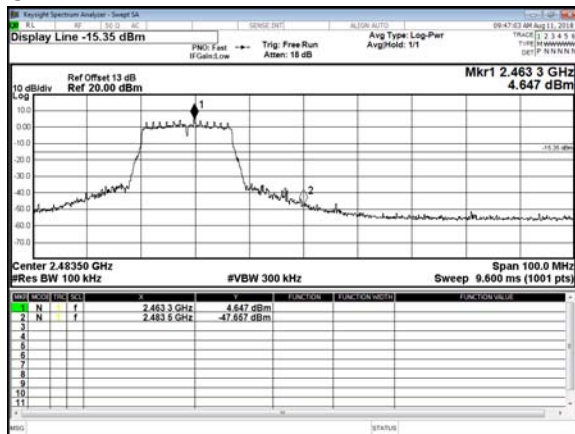



Modulation Type: 802.11ac VHT20





## CH01

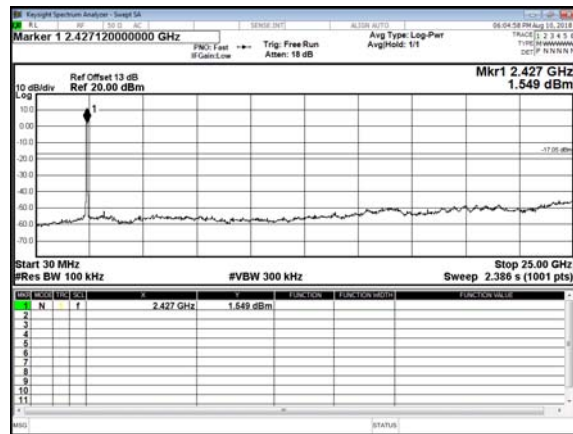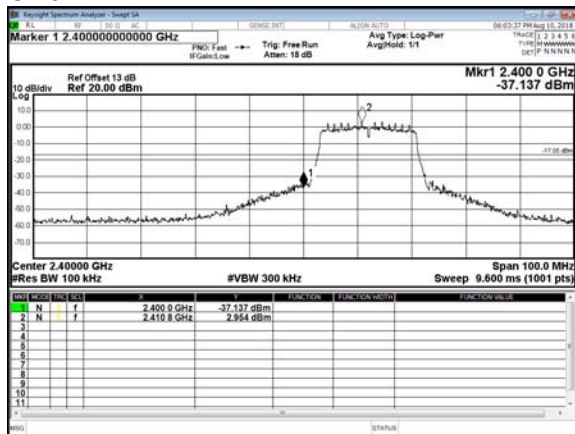

## CH06

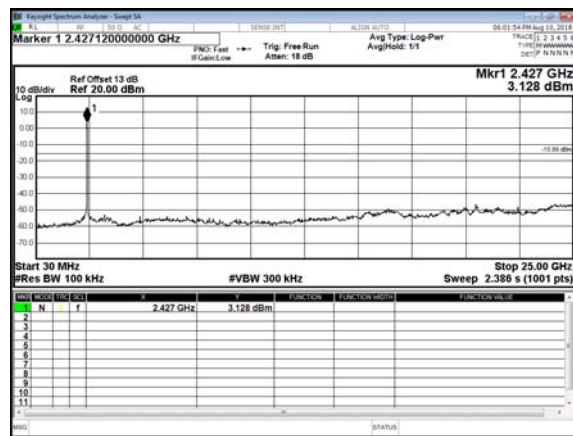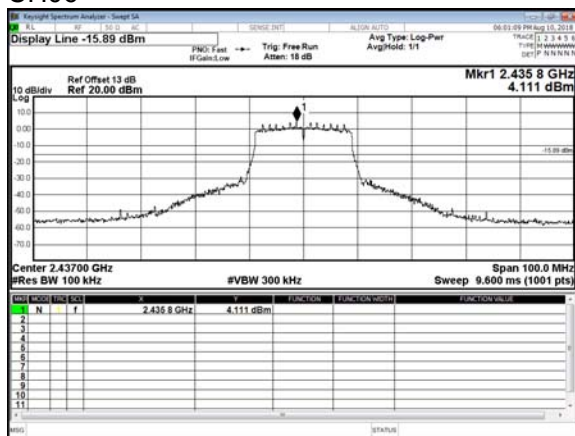

## CH11

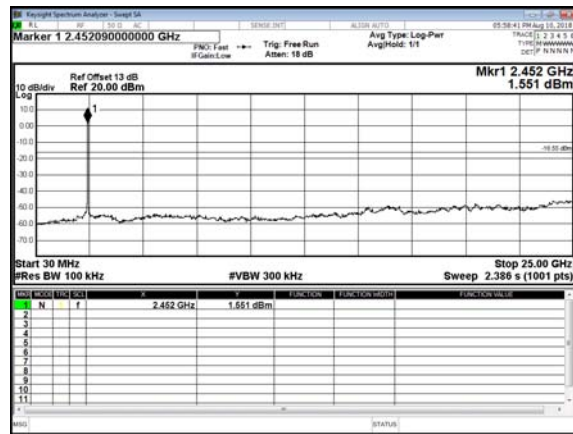
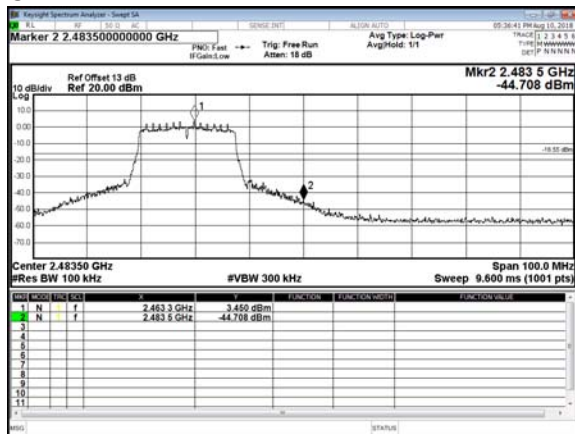


Modulation Type: 802.11ac VHT40









## CH03

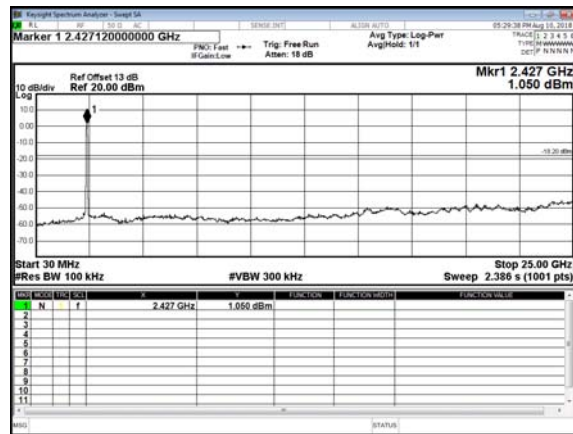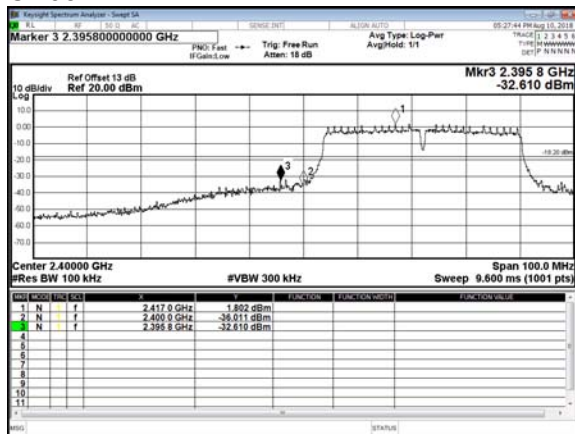

## CH06

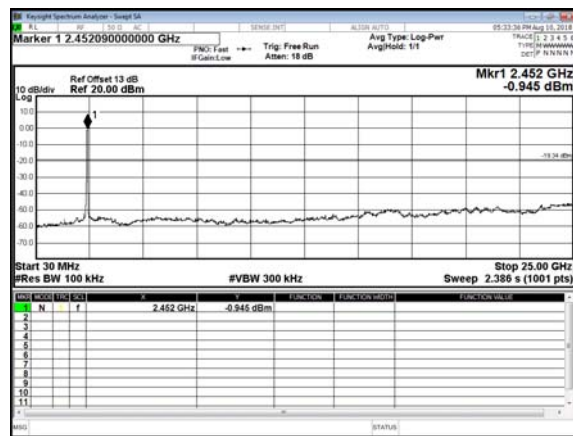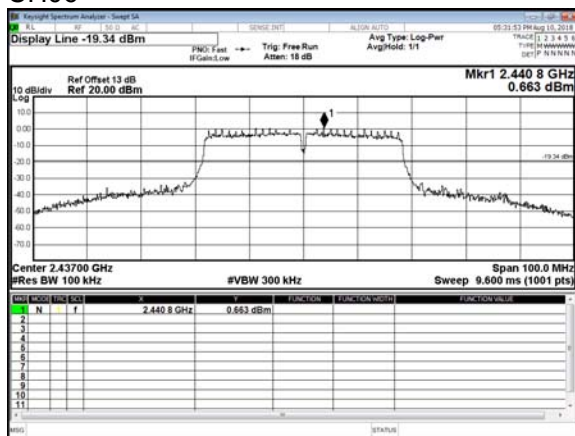

## CH09

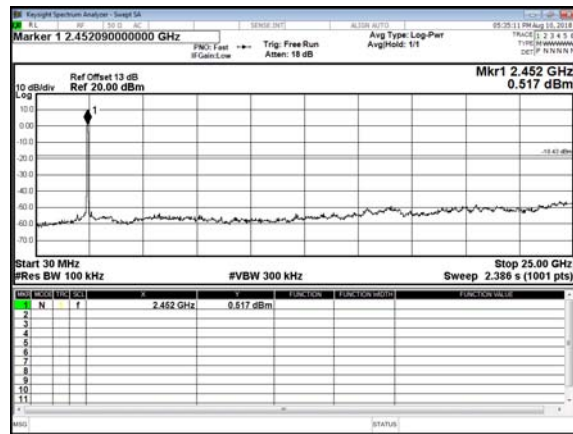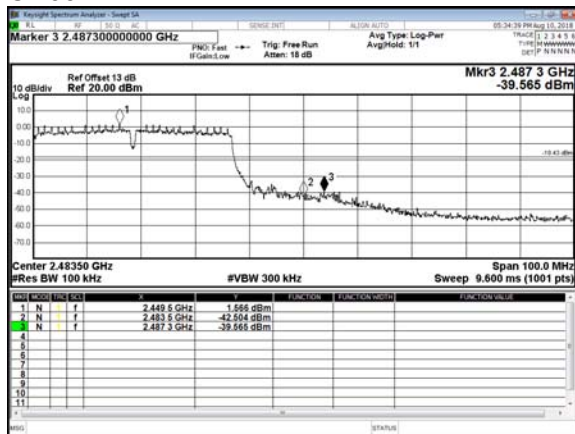


Antenna 2  
Modulation Type: 802.11b









## CH01

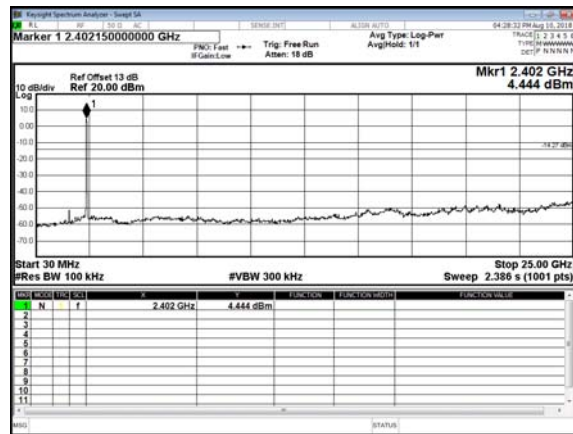

## CH06

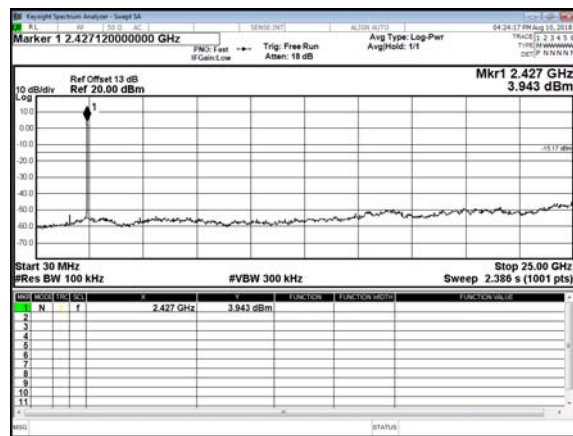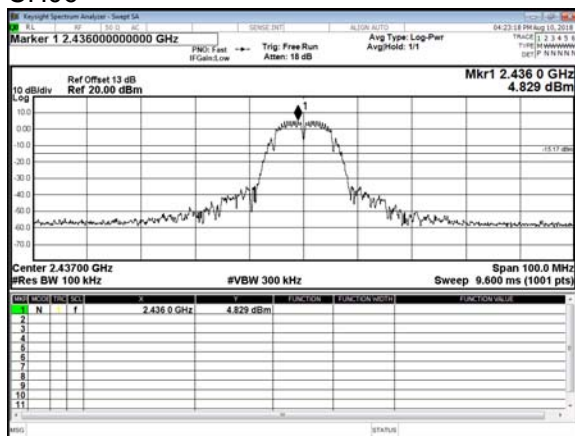


## CH11

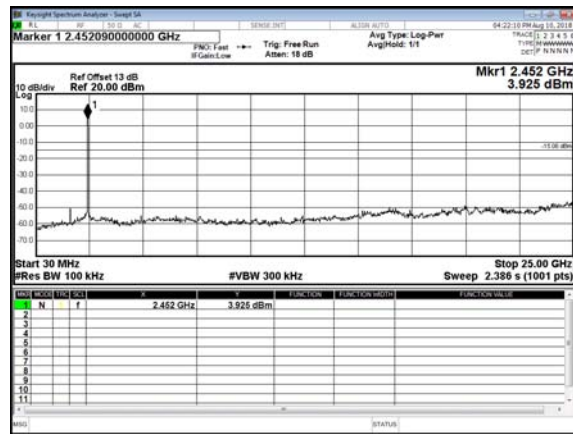
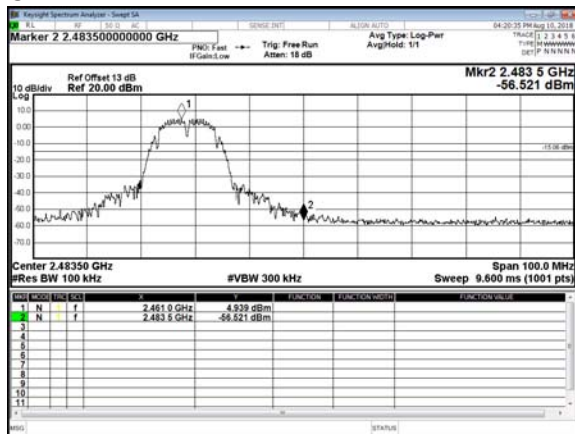






Modulation Type: 802.11g  
CH01

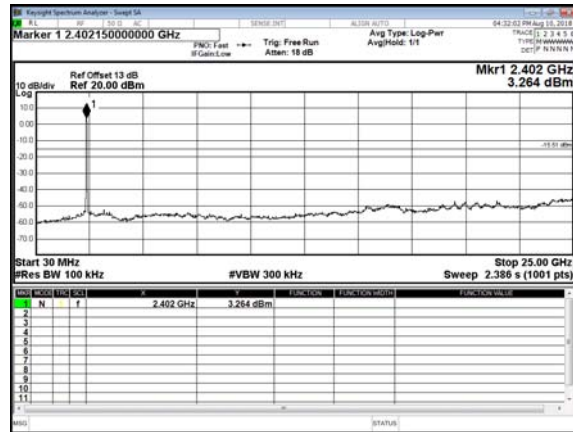

CH06

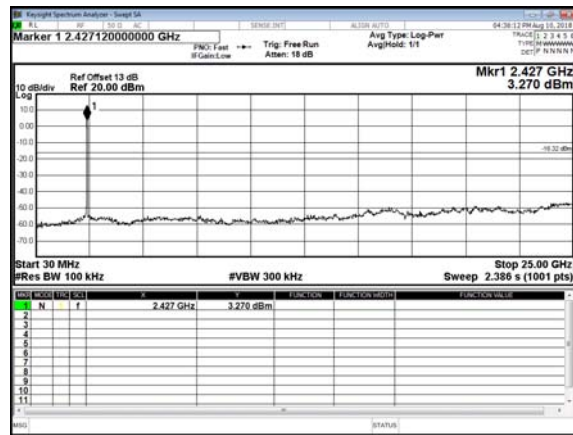
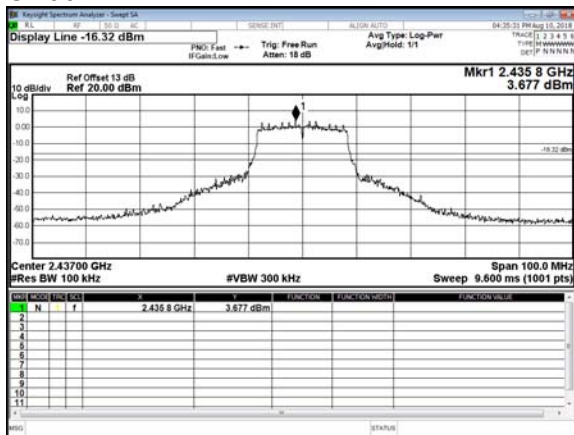


CH11

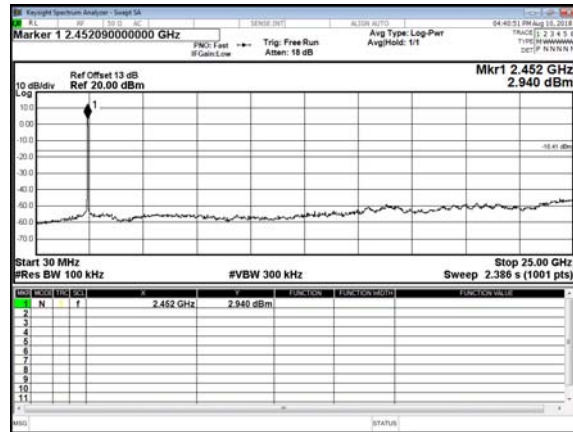
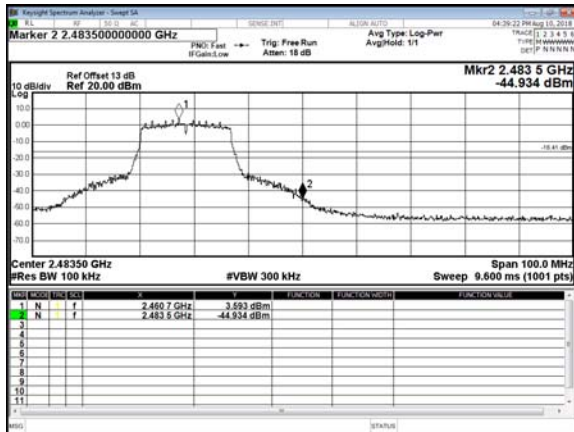






Modulation Type: 802.11ac VHT20  
CH01

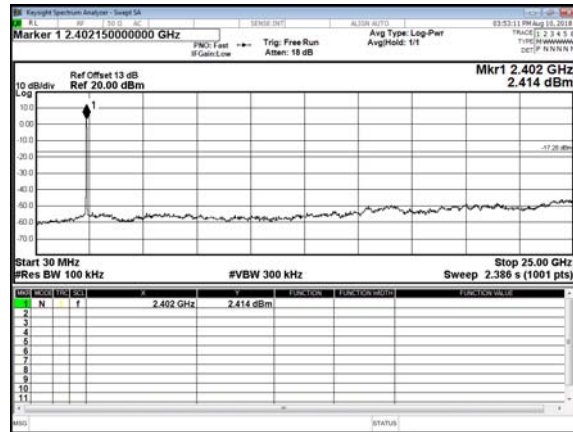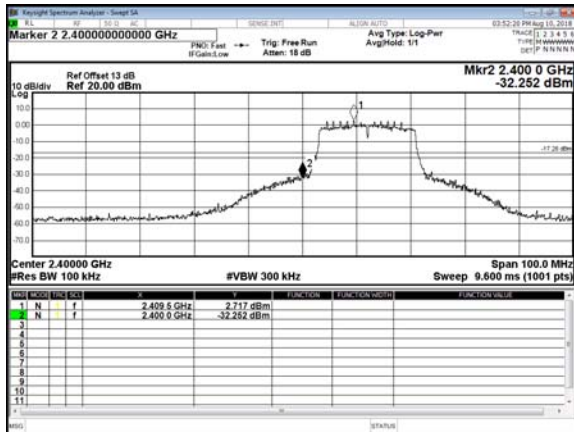

CH06

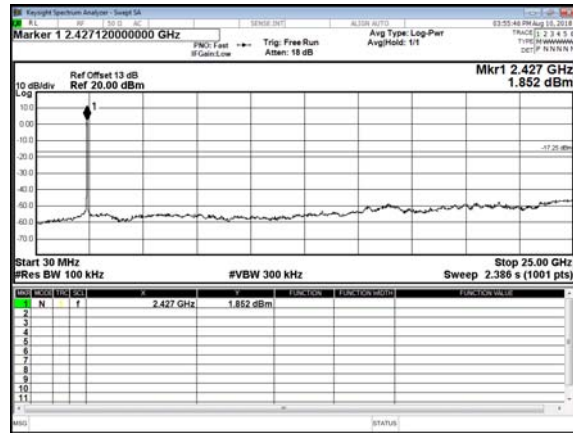
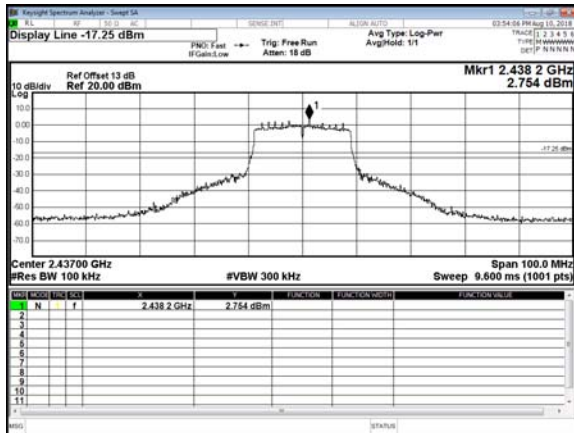


CH11

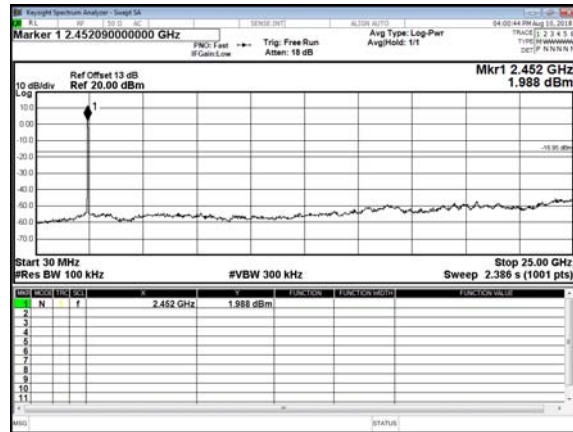
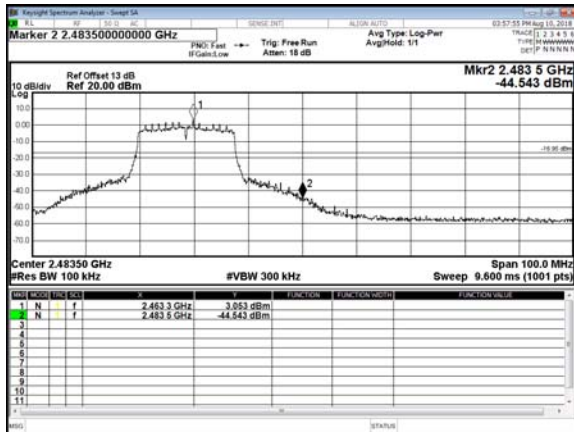






Modulation Type: 802.11ac VHT40  
CH03

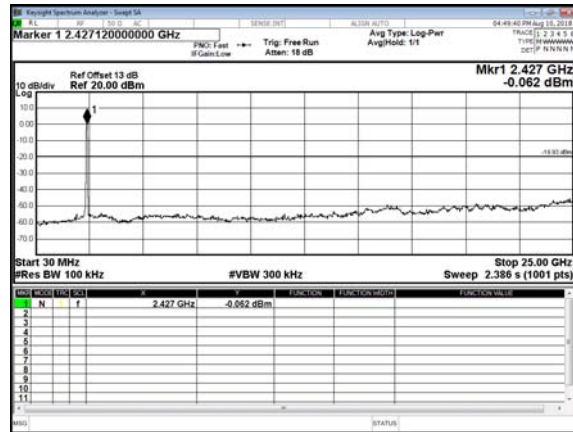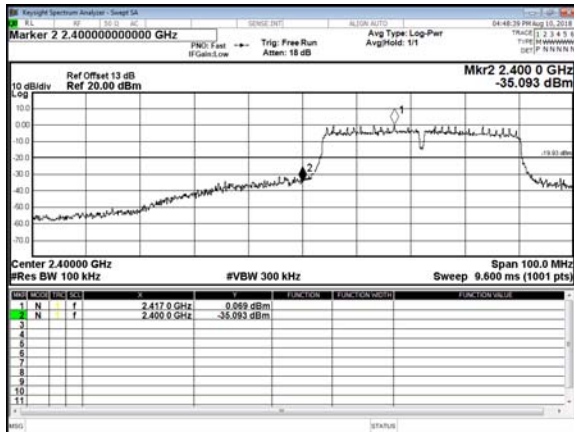

CH06

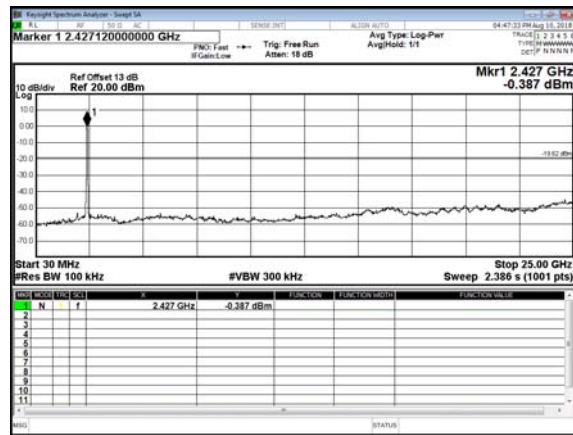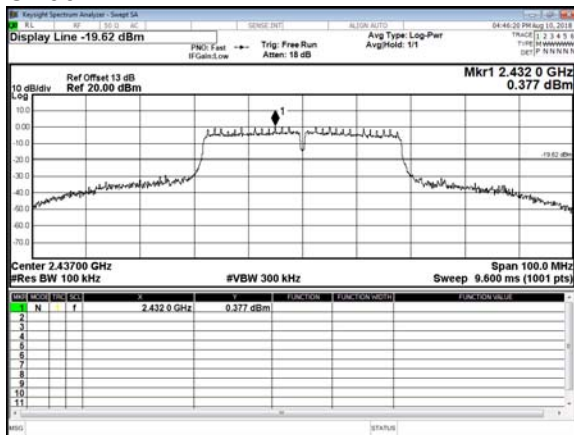

CH09

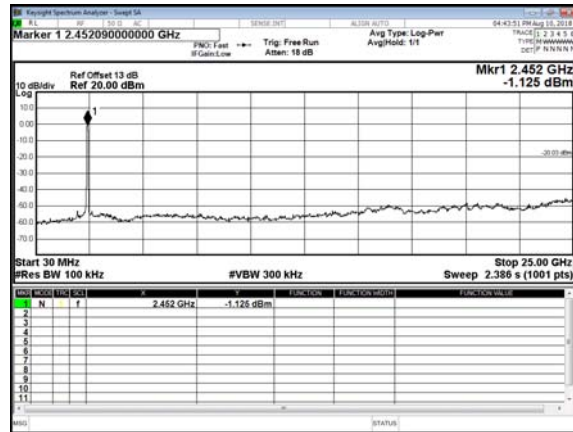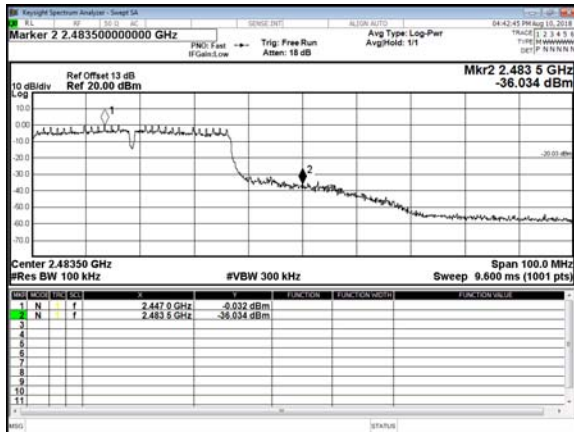





## 8. 6dB Bandwidth Measurement Data


### 8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- Set spectrum analyzer X dB to 6 dB.
- Set spectrum analyzer peak detector with maximum hold.

### 8.3 Test Setup Layout



### 8.4 Test Result and Data

Test Date: Aug.11, 2018

Temperature: 24°C

Atmospheric pressure: 1016 hPa

Humidity: 46%

Ant 1

| Modulation Type     | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------------------|---------|-----------------|---------------------|
| IEEE 802.11b        | 01      | 2412            | 9.63                |
|                     | 06      | 2437            | 9.82                |
|                     | 11      | 2462            | 10.08               |
| IEEE 802.11g        | 01      | 2412            | 16.32               |
|                     | 06      | 2437            | 16.06               |
|                     | 11      | 2462            | 16.06               |
| IEEE 802.11ac VHT20 | 01      | 2412            | 16.90               |
|                     | 06      | 2437            | 17.33               |
|                     | 11      | 2462            | 16.95               |
| IEEE 802.11ac VHT40 | 03      | 2422            | 35.39               |
|                     | 06      | 2437            | 35.20               |
|                     | 09      | 2452            | 35.20               |




Ant 2


| Modulation Type     | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------------------|---------|-----------------|---------------------|
| IEEE 802.11b        | 01      | 2412            | 10.06               |
|                     | 06      | 2437            | 10.10               |
|                     | 11      | 2462            | 10.10               |
| IEEE 802.11g        | 01      | 2412            | 16.33               |
|                     | 06      | 2437            | 15.55               |
|                     | 11      | 2462            | 16.18               |
| IEEE 802.11ac VHT20 | 01      | 2412            | 16.97               |
|                     | 06      | 2437            | 16.14               |
|                     | 11      | 2462            | 16.49               |
| IEEE 802.11ac VHT40 | 03      | 2422            | 35.51               |
|                     | 06      | 2437            | 35.52               |
|                     | 09      | 2452            | 35.19               |




Antenna 1  
Modulation Type: 802.11b  
CH01

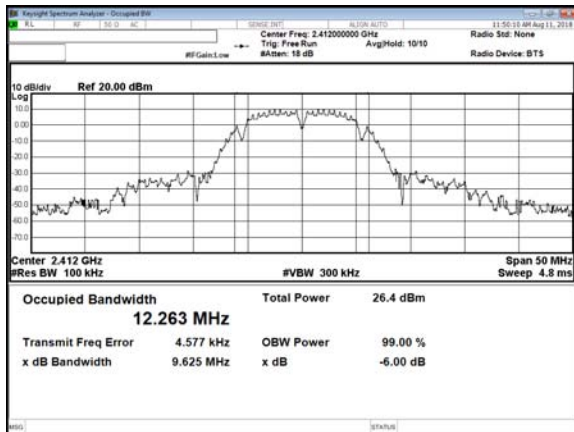


## CH06

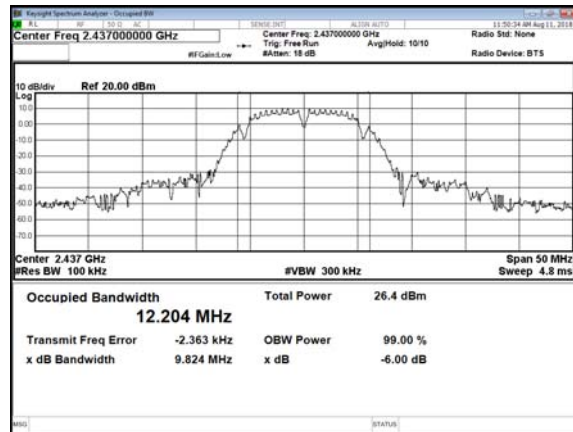


## CH11

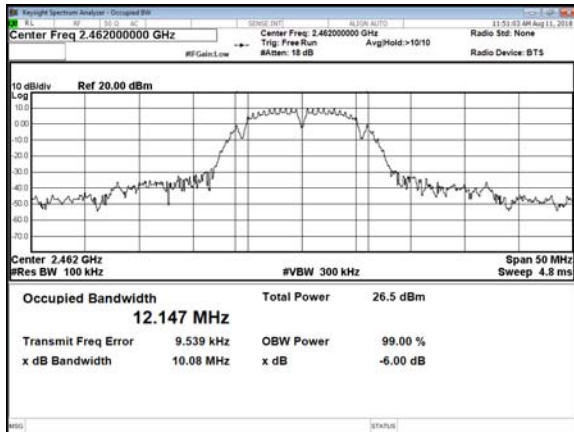


Modulation Type: 802.11g  
CH01

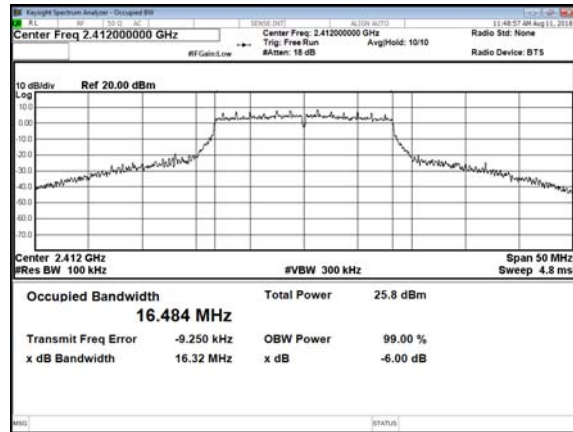


## CH06

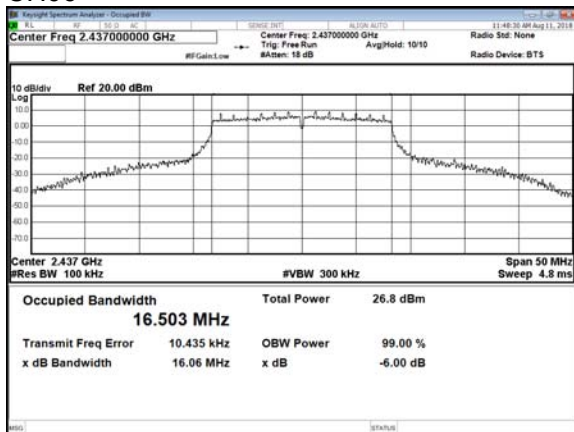


## CH11


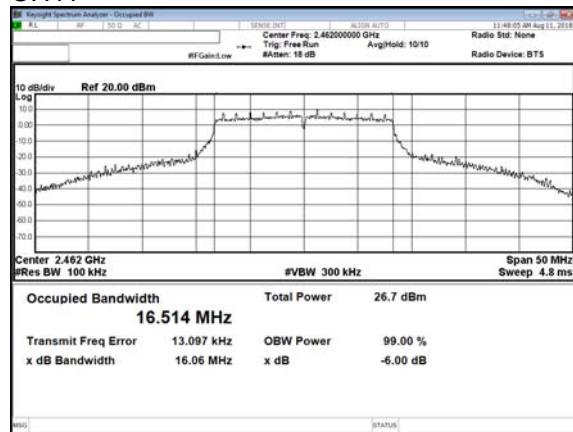


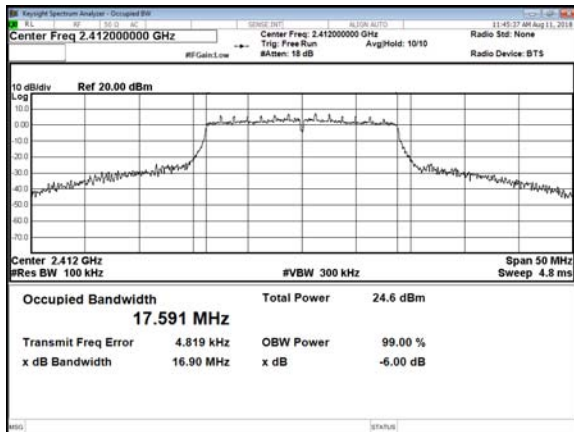Modulation Type: 802.11n HT20  
CH01


## CH06

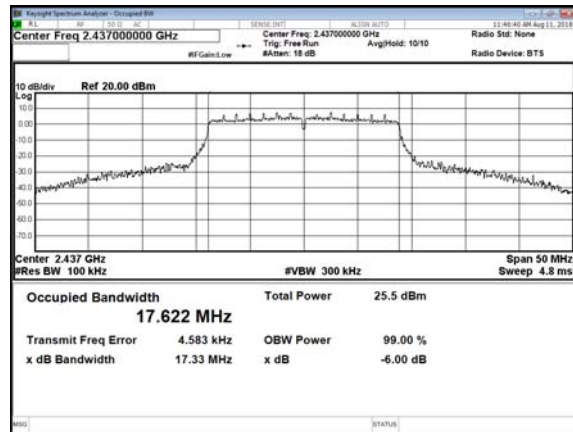


## CH11

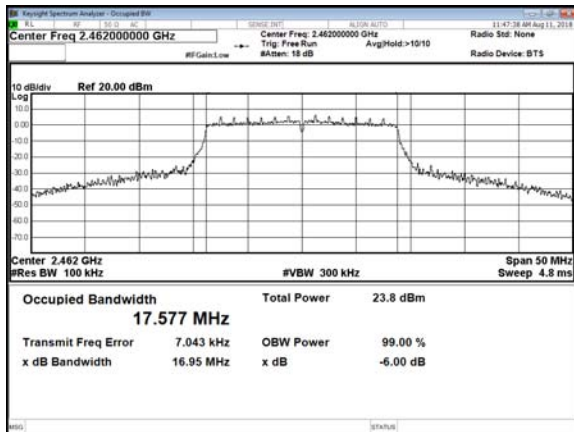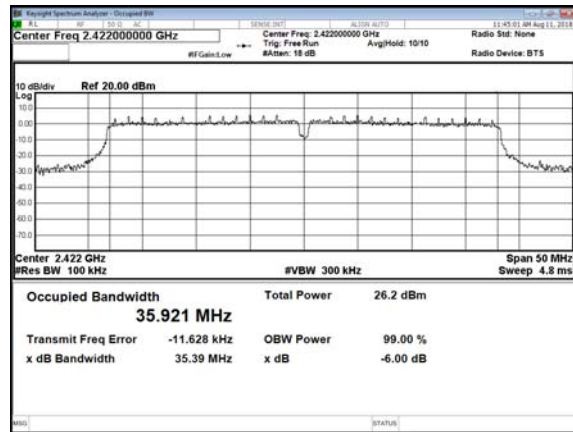Modulation Type: 802.11ac VHT40  
CH03

## CH06

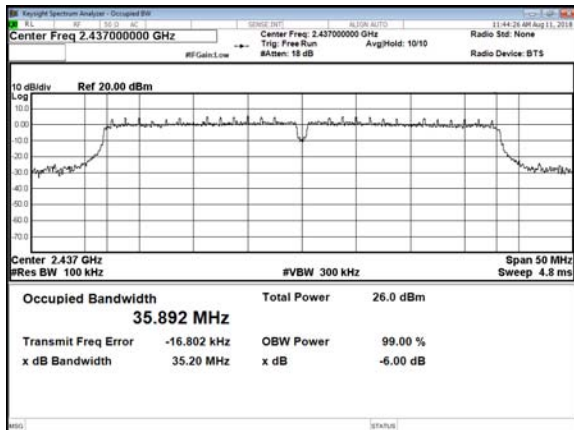


## CH09

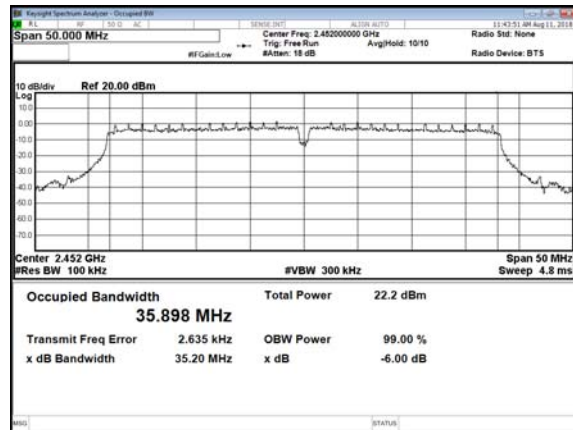







Antenna 2  
Modulation Type: 802.11b  
CH01

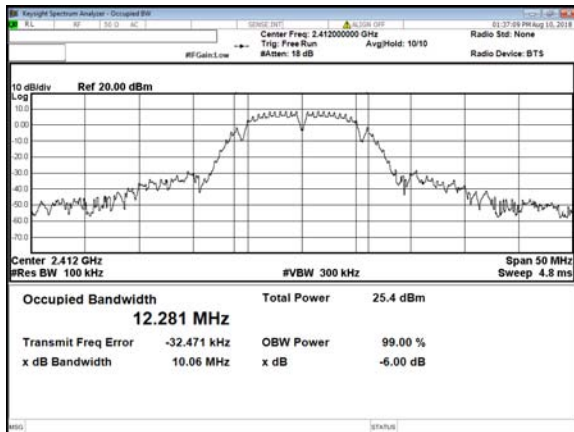


CH06

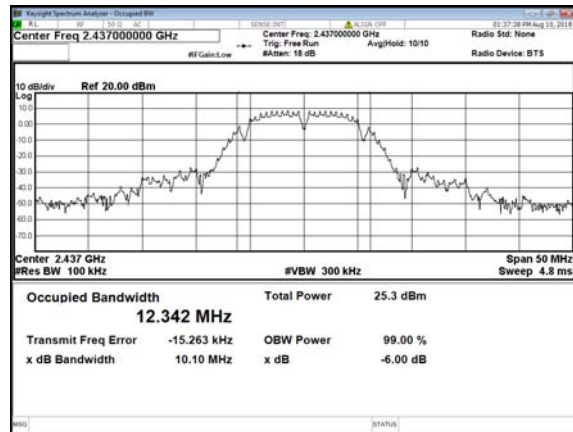


CH11

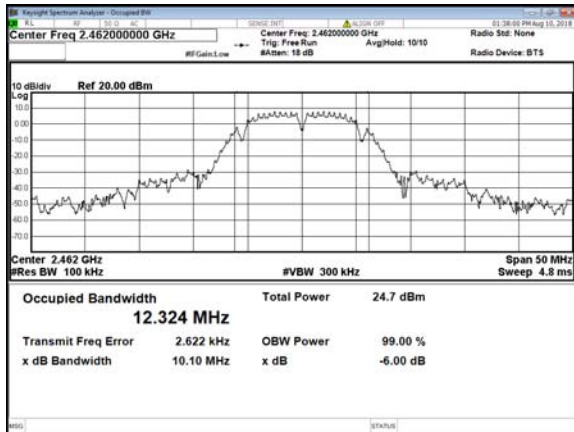


Modulation Type: 802.11g  
CH01

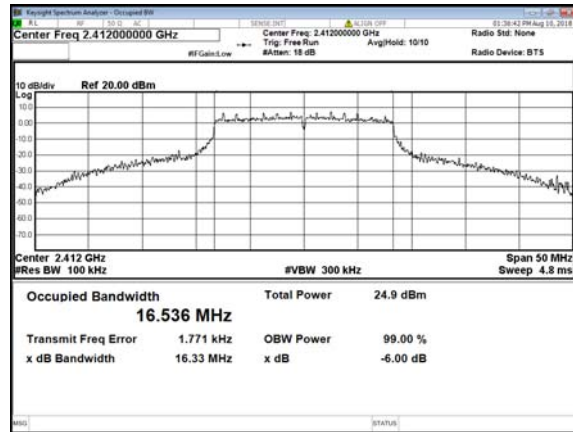


CH06

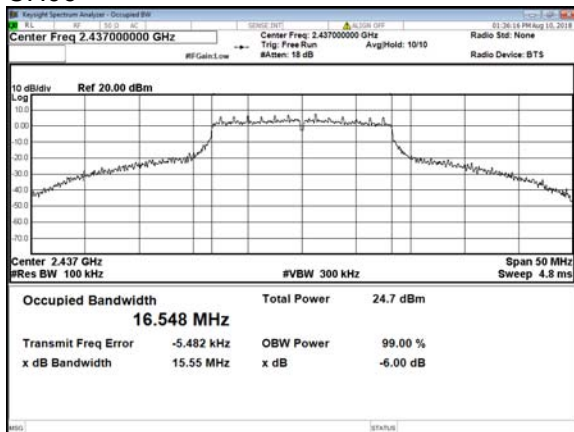


CH11


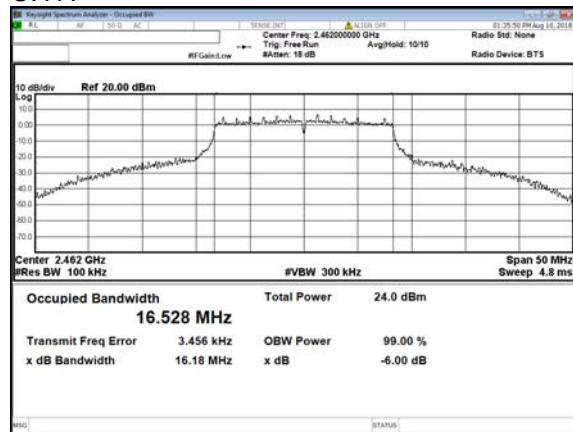


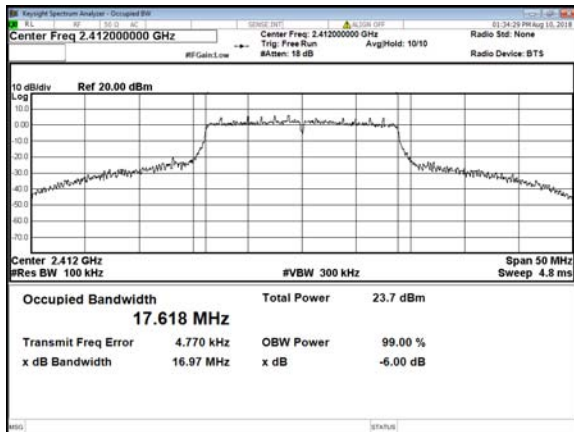Modulation Type: 802.11n HT20  
CH01


## CH06

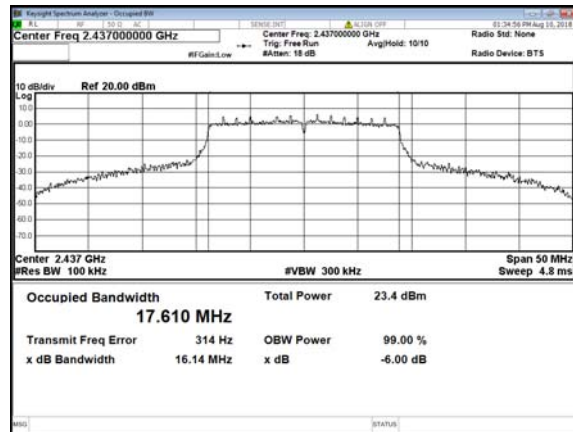


## CH11

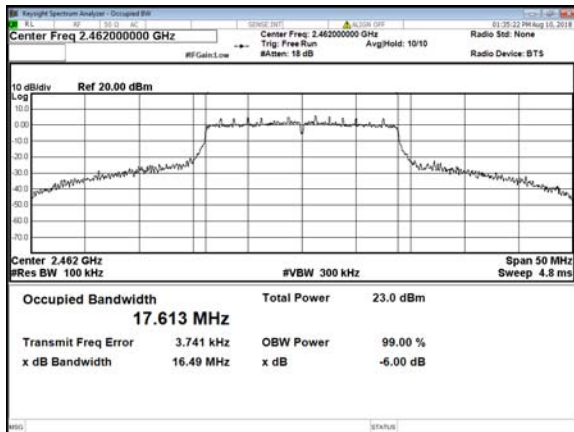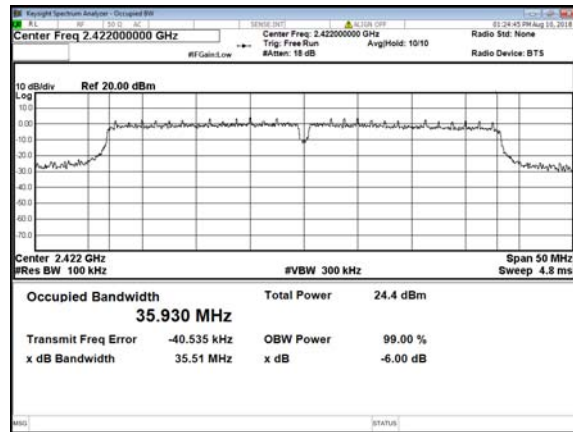Modulation Type: 802.11ac VHT40  
CH03

## CH06

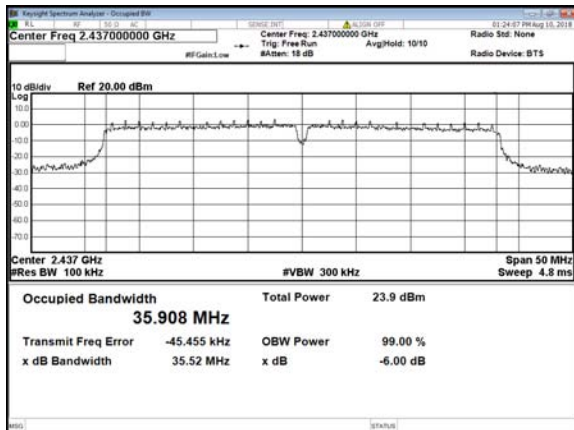

## CH09

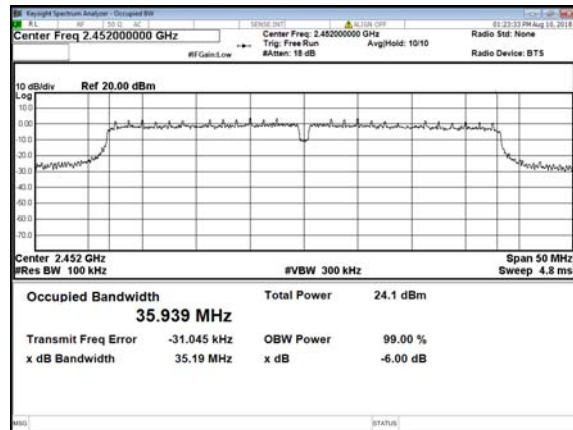



## 9. Maximum Peak Output Power

### 9.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

### 9.2 Test Procedures

Test procedure refers to KDB 558074 D01 DTS Meas Guidance v03r05 Peak power meter method.

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 9.3 Test Setup Layout

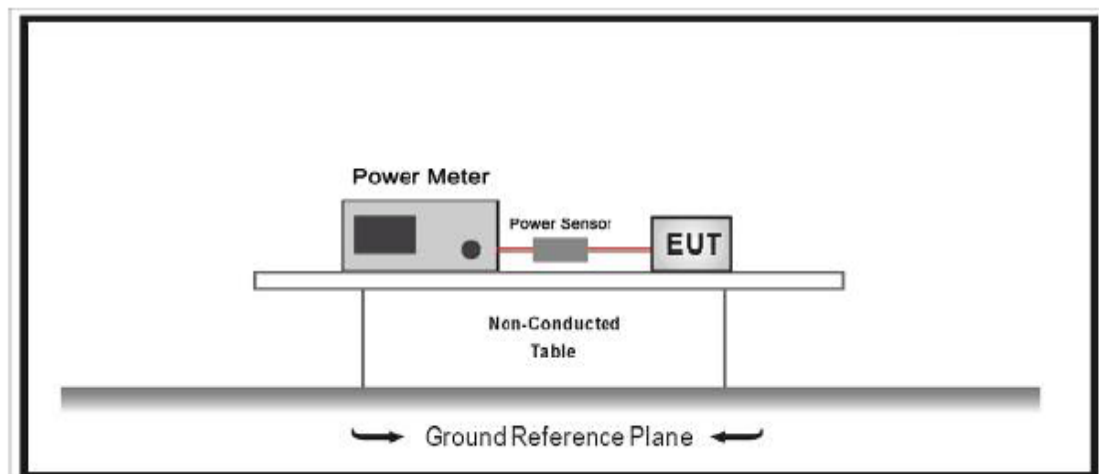

**9.4 Test Result and Data**

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1016 hPa

Humidity: 46%

Antenna A+B

| Modulation Type     | Frequency (MHz) | Peak Power (dBm) Chain 1 | Peak Power (dBm) Chain 2 | Peak Power (dBm) Chain 1+2 | Peak Power Output |
|---------------------|-----------------|--------------------------|--------------------------|----------------------------|-------------------|
|                     |                 |                          |                          |                            | mW                |
| IEEE 802.11b        | 2412            | 19.22                    | 18.31                    | 21.80                      | 151.36            |
|                     | 2437            | 19.06                    | 17.78                    | 21.48                      | 140.60            |
|                     | 2462            | 18.92                    | 16.98                    | 21.07                      | 127.94            |
| IEEE 802.11g        | 2412            | 24.54                    | 23.19                    | 26.93                      | 493.17            |
|                     | 2437            | 23.30                    | 23.36                    | 26.34                      | 430.53            |
|                     | 2462            | 24.50                    | 22.66                    | 26.69                      | 466.66            |
| IEEE 802.11ac VHT20 | 2412            | 22.86                    | 22.81                    | 25.85                      | 384.59            |
|                     | 2437            | 22.95                    | 21.69                    | 25.38                      | 345.14            |
|                     | 2462            | 22.76                    | 21.69                    | 25.27                      | 336.51            |
| IEEE 802.11ac VHT40 | 2422            | 23.57                    | 22.83                    | 26.23                      | 419.76            |
|                     | 2437            | 23.69                    | 22.33                    | 26.07                      | 404.58            |
|                     | 2452            | 24.29                    | 22.73                    | 26.59                      | 456.03            |



## 10. Power Spectral Density

### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.


### 10.2 Test Procedures

Test procedure refers to section 11.10.2 Method PKPSD (peak PSD).

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 10.3 Test Setup Layout





## 10.4 Test Result and Data

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1014 hPa


Humidity: 47%

### Antenna 1+2


| Modulation Type     | Frequency (MHz) | Power Spectral Density (dBm) |           |        |
|---------------------|-----------------|------------------------------|-----------|--------|
|                     |                 | Antenna 1                    | Antenna 2 | Total  |
| IEEE 802.11b        | 2412            | -8.767                       | -8.617    | -5.68  |
|                     | 2437            | -9.609                       | -10.008   | -6.79  |
|                     | 2462            | -9.16                        | -9.869    | -6.49  |
| IEEE 802.11g        | 2412            | -9.616                       | -10.009   | -6.80  |
|                     | 2437            | -8.723                       | -10.727   | -6.60  |
|                     | 2462            | -10.569                      | -10.901   | -7.72  |
| IEEE 802.11ac VHT20 | 2412            | -11.356                      | -11.567   | -8.45  |
|                     | 2437            | -11.526                      | -11.175   | -8.34  |
|                     | 2462            | -11.697                      | -8.857    | -7.04  |
| IEEE 802.11ac VHT40 | 2422            | -13.194                      | -14.876   | -10.94 |
|                     | 2437            | -13.918                      | -15.032   | -11.43 |
|                     | 2452            | -13.381                      | -14.948   | -11.08 |




Antenna 1  
Modulation Type: 802.11b  
CH01

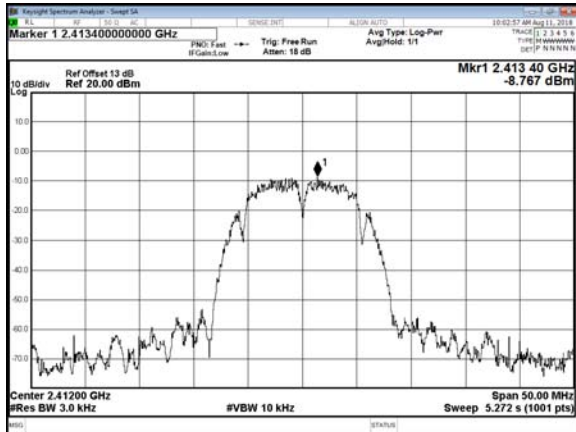


## CH06

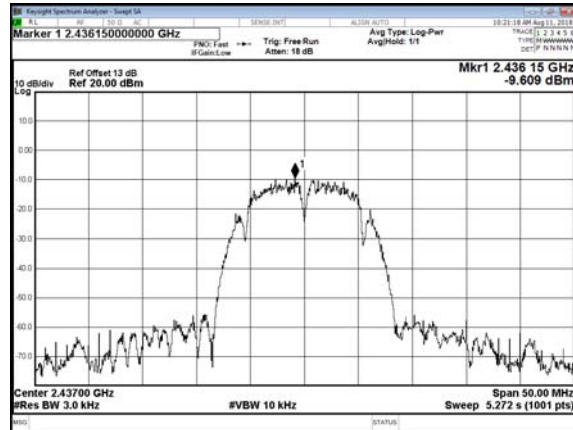


## CH11

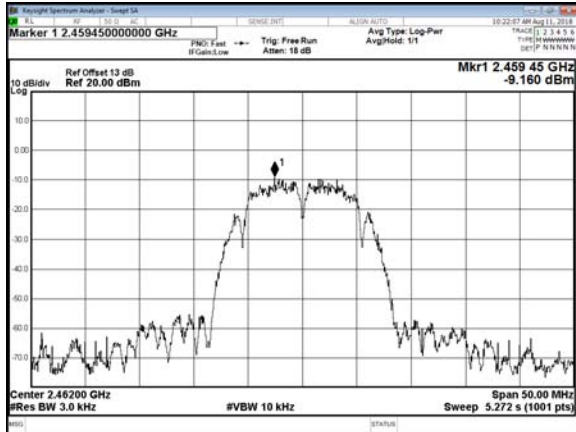


Modulation Type: 802.11g  
CH01

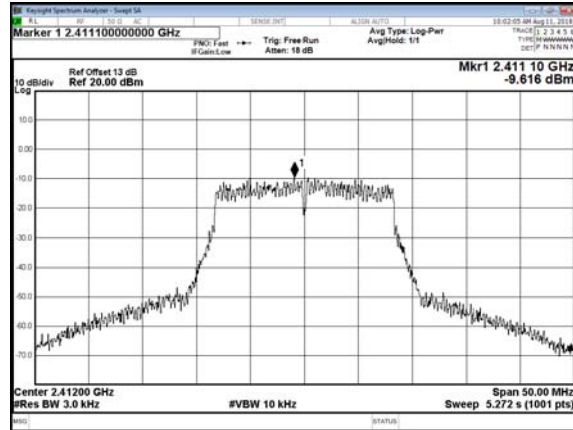


## CH06

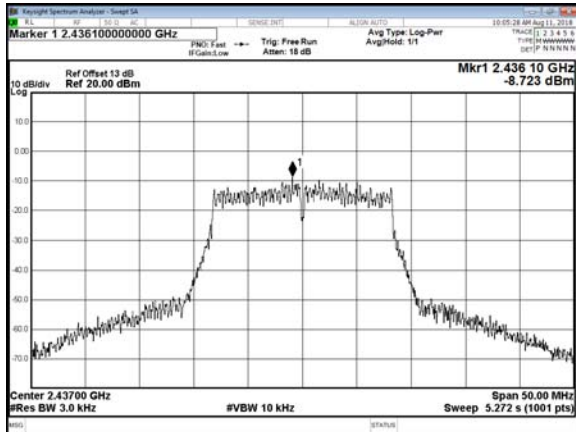


## CH11

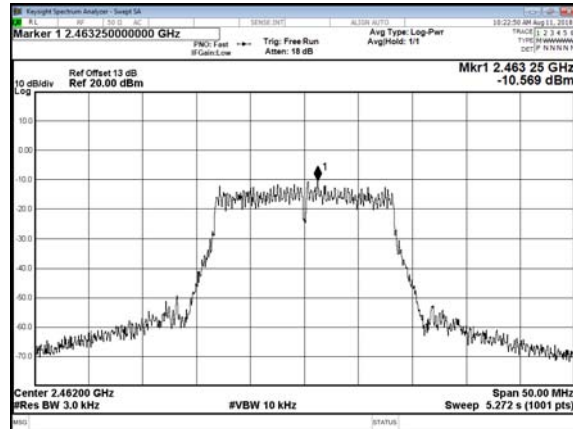


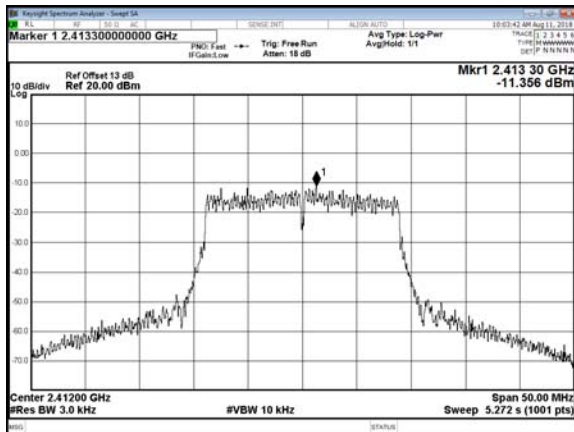


Modulation Type: 802.11n HT20  
CH01


## CH06

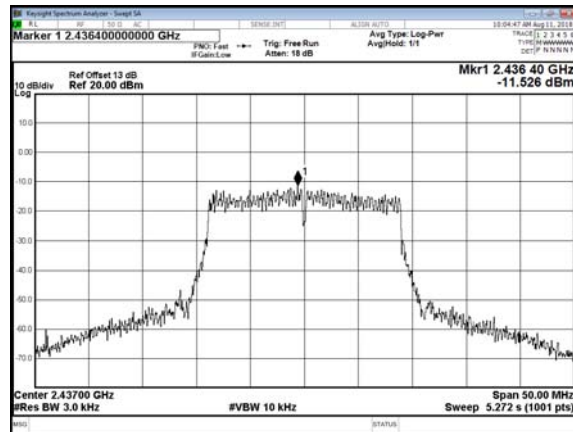


## CH11

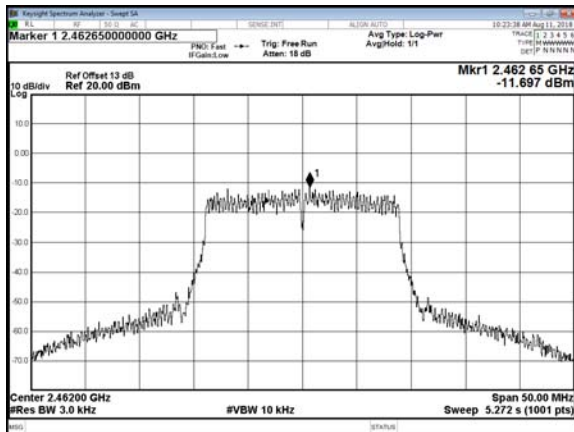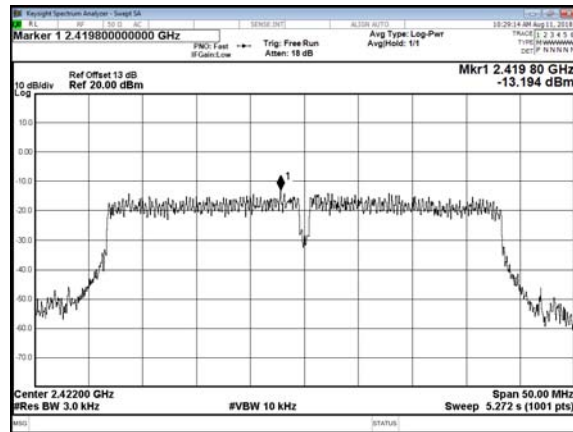Modulation Type: 802.11ac VHT40  
CH03

## CH06

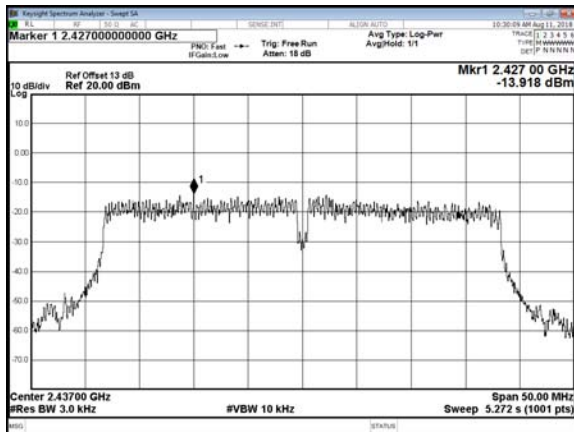


## CH09

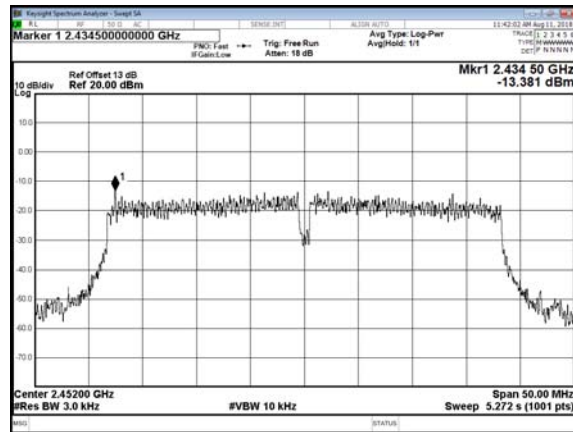






Antenna 2  
Modulation Type: 802.11b  
CH01

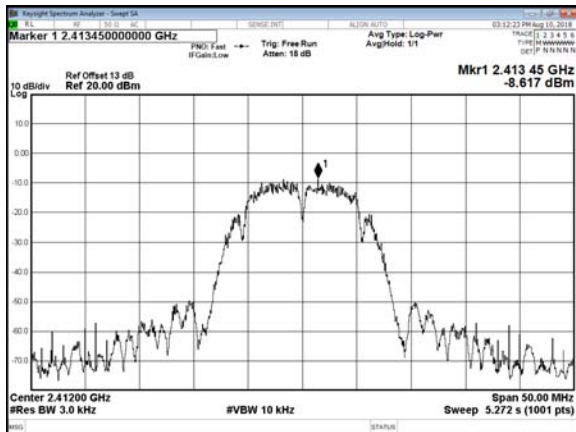


## CH06

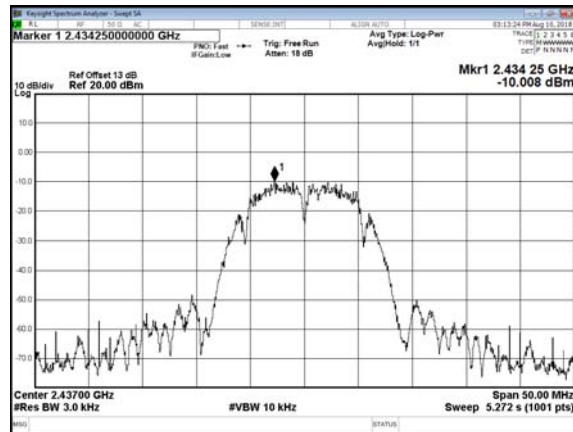


## CH11




Modulation Type: 802.11g  
CH01

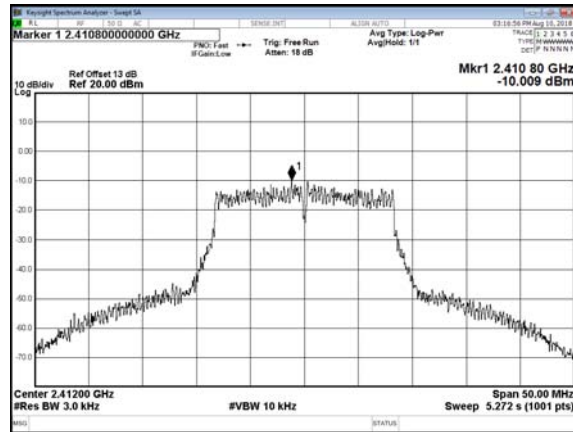


## CH06

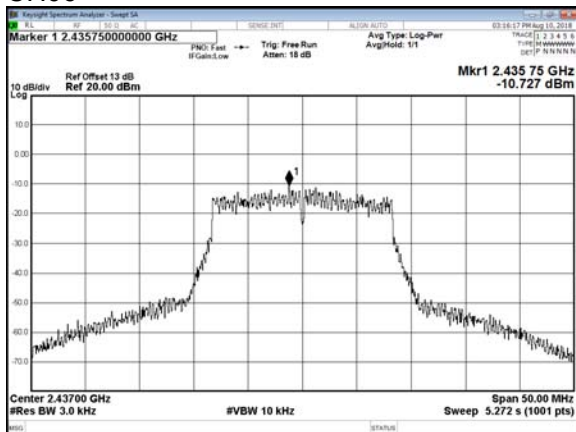


## CH11


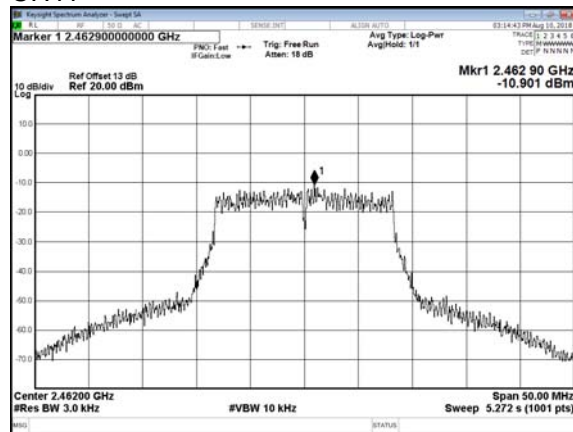


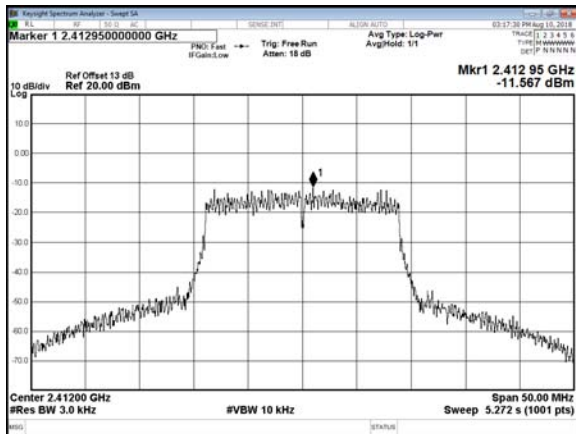Modulation Type: 802.11n HT20  
CH01


## CH06

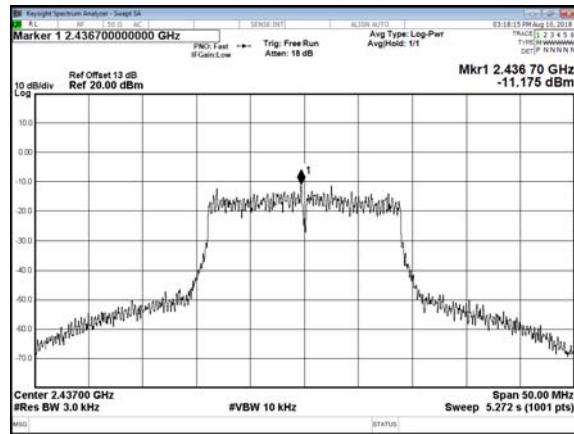


## CH11

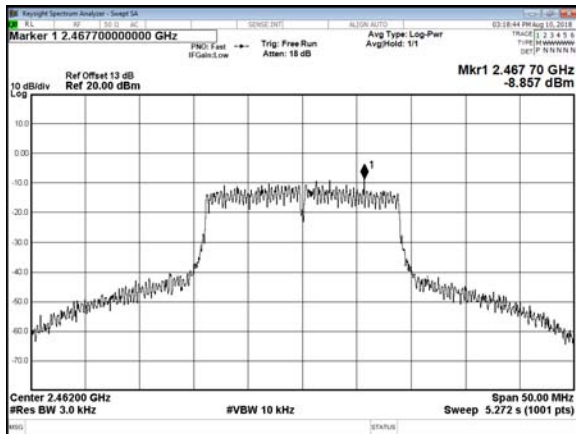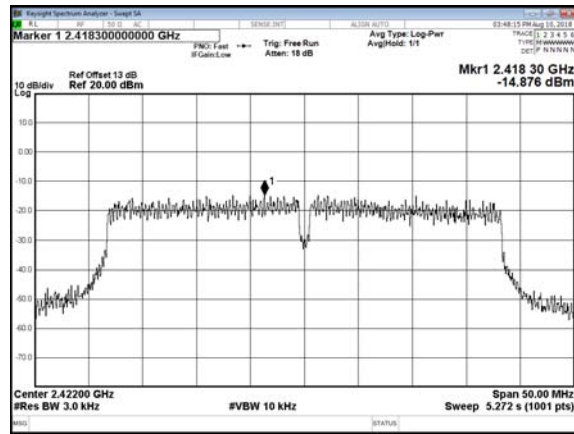Modulation Type: 802.11ac VHT40  
CH03

## CH06

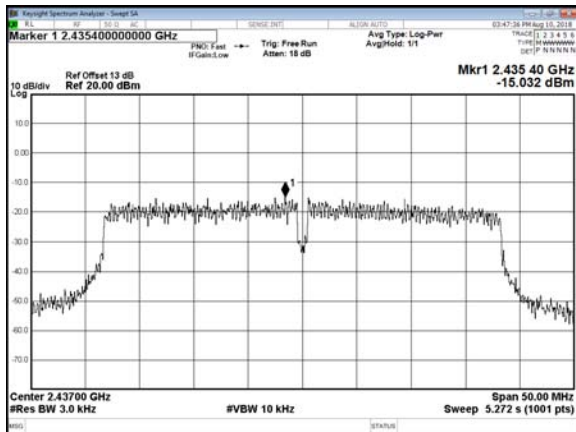

## CH09

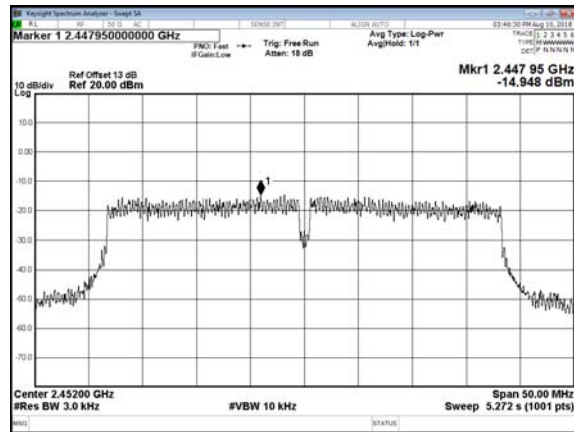

----- End of the report -----