

FCC Radio Test Report

FCC ID: 2ALCFXO-9267

FCC 47 CFR Part 15 Subpart C: 2016

RSS 247 Issue 1:2015

Product	:	Bluetooth Speaker
Trade Name	:	N/A
Model No.	:	XO-9267
Serise No.	:	N/A

Issued for

Dongguan Xing Yue Electronic co., Ltd

#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong,
China

Issued by

Shenzhen ATL Testing Technology Co., Ltd.

F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen,
China

Tel.: +86-0755-26909822 Fax.: +86-0755-61605504

Website: www.atllab.org

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen ATL Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen ATL Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

TEST RESULT CERTIFICATION

Product : Bluetooth Speaker
Applicant..... : Dongguan Xing Yue Electronic co., Ltd
Address : #98 LiWu Swan Industrial District, Qiao Tou Town,
Dong Guan City, Guang Dong, China
Manufacturer..... : Dongguan Xing Yue Electronic co., Ltd
Address : #98 LiWu Swan Industrial District, Qiao Tou Town,
Dong Guan City, Guang Dong, China
Model No. : XO-9267
Standards : FCC Part 15 Subpart C (15.247):2016
RSS 247 Issue 1: 2015
Test Method..... : ANSI C63.10: 2013
KDB 558074 D01 DTS Meas Guidance v03r05

The above equipment has been tested by Shenzhen ATL Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test..... :

Date of receipt of test item 2017-03-07

Date(s) of performance of test 2017-03-08 to 2017-03-14

Test Result..... : **Pass**

Testing by

:

Si feifei

(Si feifei)

Date

:

2017-03-09

Check by

:

Xie Lingling

(Xie Lingling)

Date

:

2017-03-13

Approved by

:

Xu Peng

(Xu Peng)

Date

:

2017-03-14

Table of Contents	Page
1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 DESCRIPTION OF TEST SETUP	10
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	11
2.5 EUT EXERCISE SOFTWARE	11
3 . CONDUCTED EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST INSTRUMENTS	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	14
RADIATED EMISSION MEASUREMENT	18
3.7 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)	18
3.8 TEST PROCEDURE	18
3.9 TEST SETUP	19
3.10 TEST INSTRUMENTS	20
3.11 EUT OPERATING CONDITIONS	20
3.12 TEST RESULTS	21
4 . MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	26
4.1 LIMITS	26
4.2 TEST PROCEDURE	26
4.3 TEST SETUP	26
4.4 TEST INSTRUMENTS	26
4.5 EUT OPERATING CONDITIONS	26
4.6 TEST RESULTS	26
5 . OCCUPIED BANDWIDTH MEASUREMENT	29
5.1 LIMITS	29
5.2 TEST PROCEDURE	29

Table of Contents	Page
5.3 TEST SETUP	29
5.4 TEST INSTRUMENTS	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULTS	29
6 . POWER SPECTRAL DENSITY	32
6.1 LIMITS	32
6.2 TEST PROCEDURE	32
6.3 TEST SETUP	32
6.4 TEST INSTRUMENTS	32
6.5 EUT OPERATING CONDITIONS	32
6.6 TEST RESULTS	32
7 . BAND EDGE AND OUT-OF-BAND EMISSION	35
7.1 LIMITS	35
7.2 TEST PROCEDURE	35
7.3 TEST SETUP	35
7.4 TEST INSTRUMENTS	36
7.5 EUT OPERATING CONDITIONS	36
7.6 TEST RESULTS	36
8 . ANTENNA REQUIREMENT	39
8.1 REQUIREMENT	39
8.2 ANTENNA CONNECTOR CONSTRUCTION	39

1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part 15 Subpart C (15.247)/RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	
15.205/ 15.209	RSS-GEN 7.2.2	Restricted Bands	PASS	
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	PASS	
15.247(b)	RSS 247 5.4 (4)	Peak Output Power	PASS	
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	PASS	
15.247(d)	RSS 247 5.5	Band Edge/Out-of-band Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The test results of this report relate only to the tested sample(s) identified in this report.

1.1 TEST FACILITY

Shenzhen ATL Testing Technology Co., Ltd.

Add. : F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

A. Conducted Emission :

The measurement uncertainty is evaluated as ± 3.2 dB.

B. Radiated Measurement :

The measurement uncertainty is evaluated as ± 3.7 dB.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Speaker
Model Name	XO-9267
Additional Model Number(s)	N/A
Model Difference	N/A
Frequency Range	Bluetooth 4.1(BLE): 2402~2480 MHz
Number of Channel:	40 Channels
Modulation Type	GFSK
RF Output Power	3.556 dBm
Antenna Type	PCB Antenna (Gain: 0 dBi)
Power Source	DC Voltage supplied from Host System by USB cable. DC power by Li-ion Battery.
Power Rating	DC 5.0V by USB cable. DC 3.7V by 400mAh Li-ion Battery.
Remark	More details EUT technical specifications, please refer to the User's Manual.

Note:

(1) This Test Report is FCC Part 15 Subpart C, 15.247 for BLE. And the Test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r05.

(2) Transmitting mode with antennas

Mode	TX Antenna (s)
BLE	1

(3) Channel List.

2.4 GHz Band				
Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2402~2480MHz	0	2402 MHz	20	2442 MHz
	1	2404 MHz	21	2444 MHz
	2	2406 MHz	22	2446 MHz
	3	2408 MHz	23	2448 MHz
	4	2410 MHz	24	2450 MHz
	5	2412 MHz	25	2452 MHz
	6	2414 MHz	26	2454 MHz
	7	2416MHz	27	2456 MHz
	8	2418 MHz	28	2458 MHz
	9	2420 MHz	29	2460 MHz
	10	2422 MHz	30	2462 MHz
	11	2424 MHz	31	2464 MHz
	12	2426 MHz	32	2466 MHz
	13	2428 MHz	33	2468 MHz
	14	2430 MHz	34	2470 MHz
	15	2432 MHz	35	2472 MHz
	16	2434MHz	36	2474 MHz
	17	2436 MHz	37	2476 MHz
	18	2438 MHz	38	2478 MHz
	19	2440 MHz	39	2480 MHz

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	BLE TX Mode

For Conducted Test	
Final Test Mode	Description
Mode 2	BLE TX Mode


For Radiated Test	
Final Test Mode	Description
Mode 1	BLE TX Mode

Note:


- (1) Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes as shown below.
- (2) BLE(GFSK) Mode:
Channel (2402/2442/2480 MHz) with 1Mbps data rate were chosen for full testing.
- (3) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2.3 DESCRIPTION OF TEST SETUP

Conducted Emission

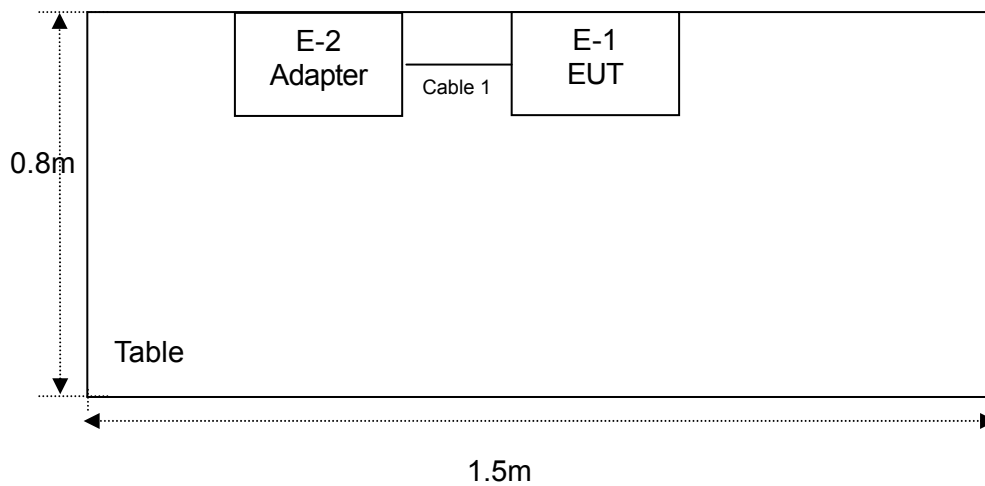

Radiated Emission

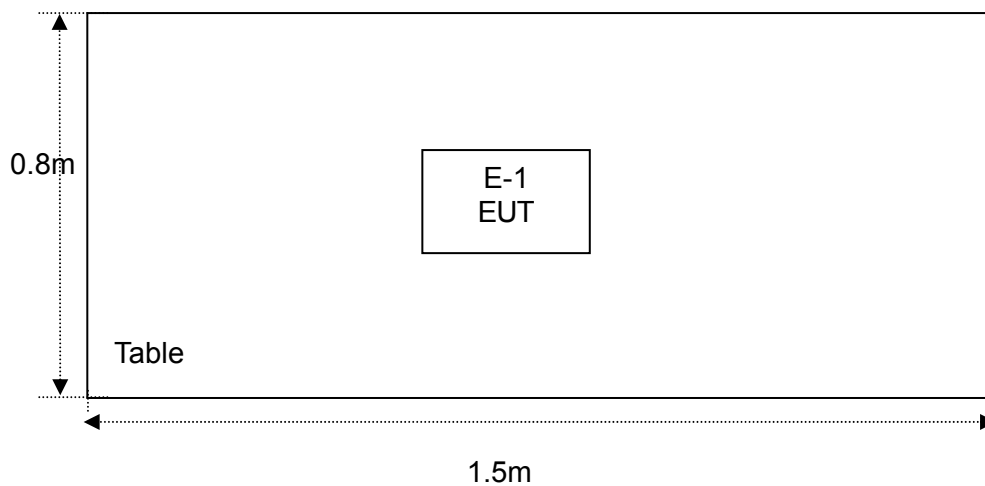

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	VOC/DOC	Note
E-1	Bluetooth Speaker	N/A	XO-9267	/	EUT
E-2	Adapter	N/A	KA1517-050200CNU	VOC	EUT

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	30cm	

Note:

- (1) The support equipment was authorized by Verification of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.5 EUT EXERCISE SOFTWARE

Power Parameters for Testing			
Test Software Version		BK3256 RF Test_V1.3.exe	
Mode	Frequency/ Parameters		
BLE(GFSK)	2402 MHz	2442 MHz	2480 MHz
	DEF	DEF	DEF

3. CONDUCTED EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Quasi-peak	Average
	dBuV	dBuV
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

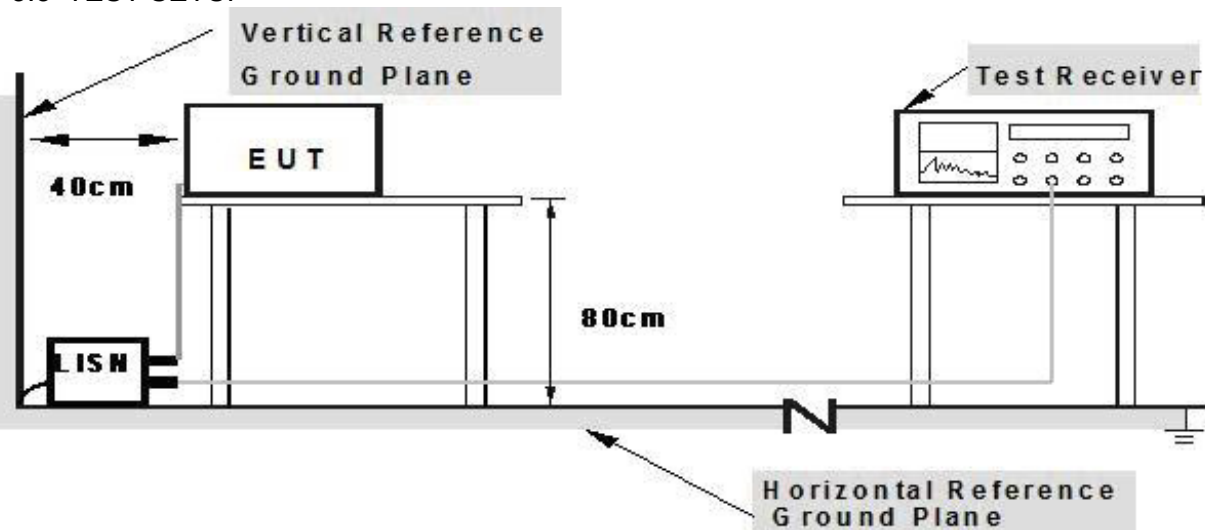

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST INSTRUMENTS


Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
LISN	R&S	NSLK81	8126466	Jul. 04, 2016	Jul. 03. 2017	1 year
LISN	R&S	NSLK81	8126487	Jul. 04, 2016	Jul. 03. 2017	1 year
50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C03	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	1166.595	Jul. 04, 2016	Jul. 03. 2017	1 year
Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 04, 2016	Jul. 03. 2017	1 year

3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Phase :	Line
Test Voltage :	AC 120V/ 60Hz		

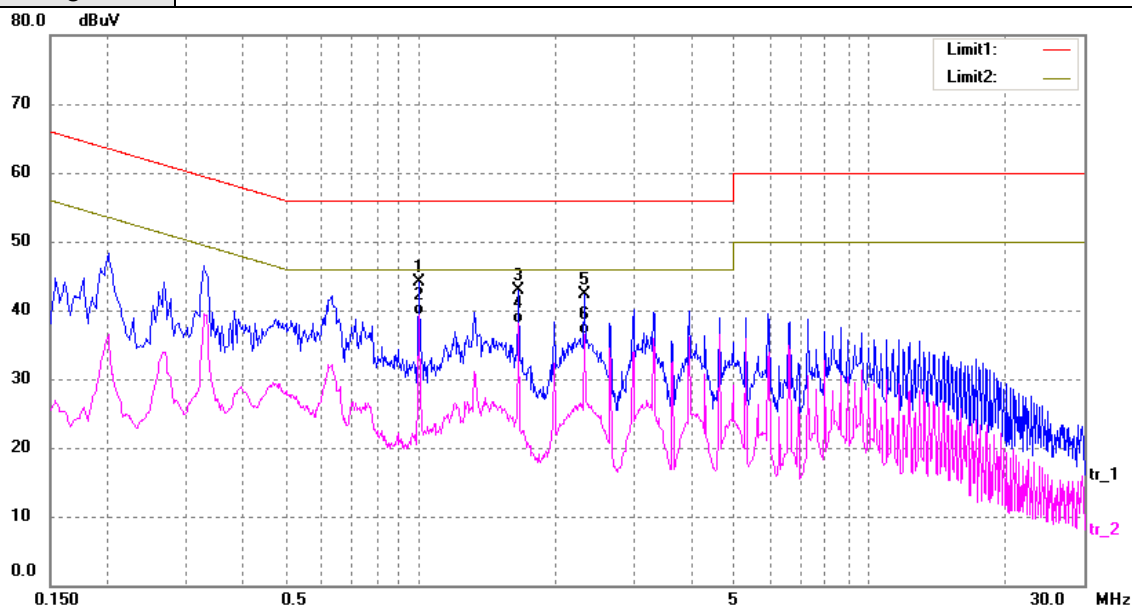


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.9940	34.46	9.68	44.14	56.00	-11.86	QP
2*	0.9940	29.57	9.68	39.25	46.00	-6.75	AVG
3	1.6540	33.19	9.77	42.96	56.00	-13.04	QP
4	1.6540	28.31	9.77	38.08	46.00	-7.92	AVG
5	2.3140	32.52	9.86	42.38	56.00	-13.62	QP
6	2.3140	26.61	9.86	36.47	46.00	-9.53	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Phase :	Neutral
Test Voltage :	AC 120V/ 60Hz		

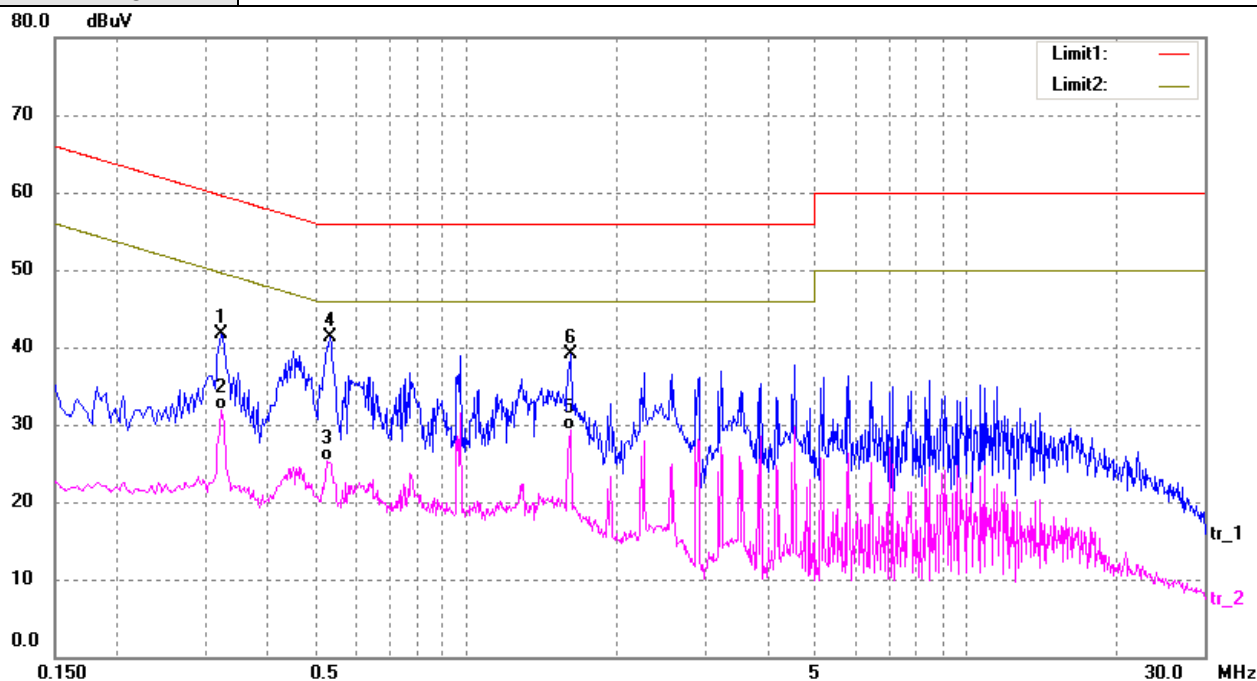


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3220	32.26	9.50	41.76	59.66	-17.90	QP
2	0.3220	22.34	9.50	31.84	49.66	-17.82	AVG
3*	0.5340	31.67	9.57	41.24	56.00	-14.76	QP
4	0.5340	15.74	9.57	25.31	46.00	-20.69	AVG
5	1.6180	29.42	9.77	39.19	56.00	-16.81	QP
6	1.6180	19.54	9.77	29.31	46.00	-16.69	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Phase :	Line
Test Voltage :	AC 240V/ 60Hz		

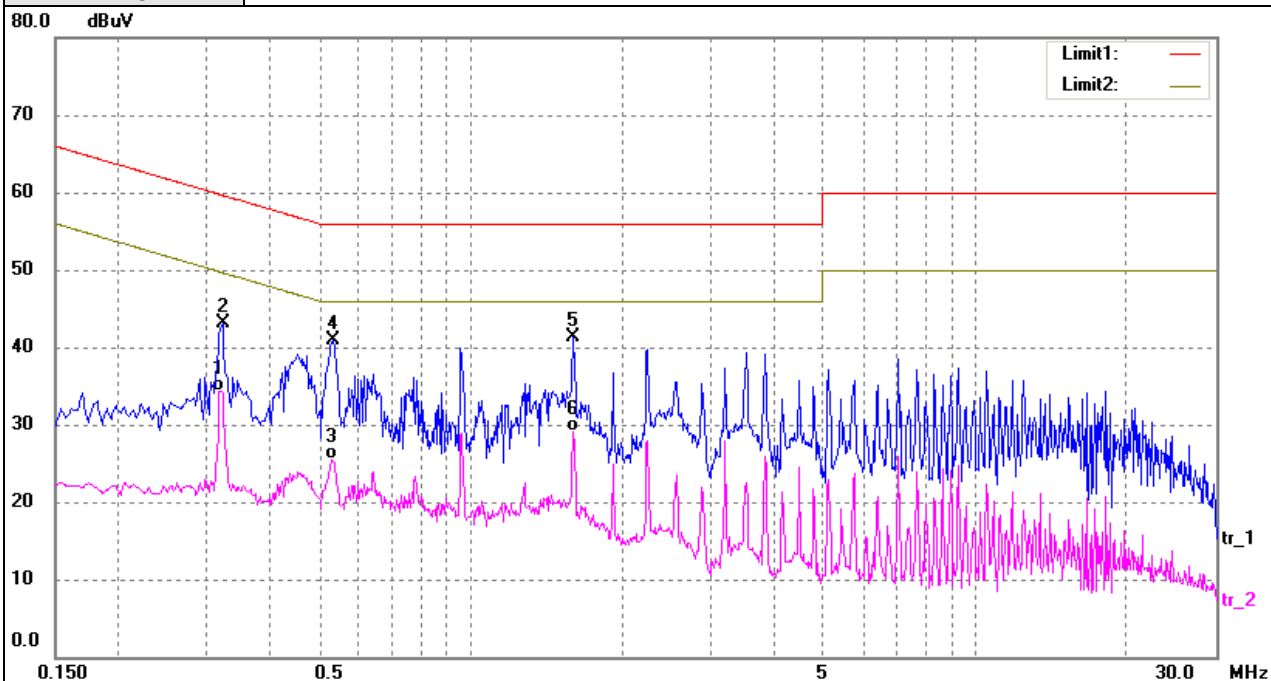


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	33.59	9.50	43.09	59.66	-16.57	QP
2	0.3180	24.77	9.50	34.27	49.76	-15.49	AVG
3	0.5340	31.28	9.57	40.85	56.00	-15.15	QP
4	0.5340	15.97	9.57	25.54	46.00	-20.46	AVG
5*	1.5980	31.53	9.76	41.29	56.00	-14.71	QP
6	1.5980	19.36	9.76	29.12	46.00	-16.88	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Phase :	Neutral
Test Voltage :	AC 240V/ 60Hz		

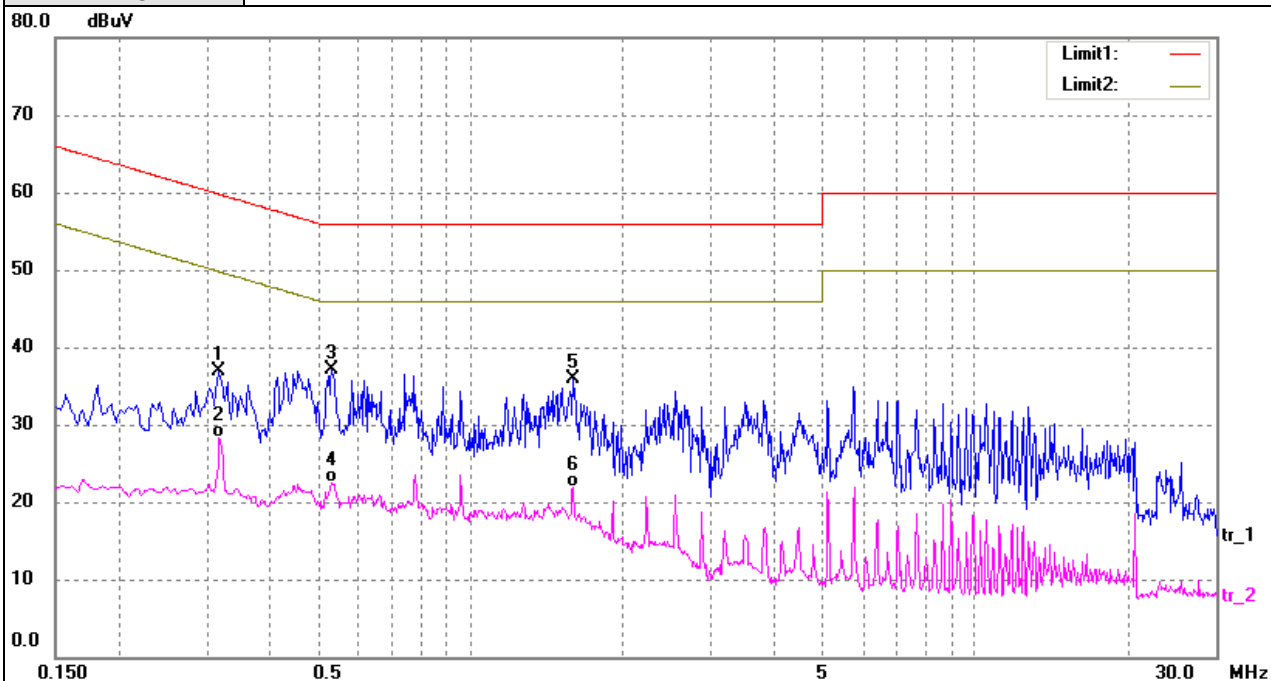

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3180	27.34	9.50	36.84	59.76	-22.92	QP
2	0.3180	18.71	9.50	28.21	49.76	-21.55	AVG
3*	0.5300	27.49	9.57	37.06	56.00	-18.94	QP
4	0.5300	12.84	9.57	22.41	46.00	-23.59	AVG
5	1.5940	26.19	9.76	35.95	56.00	-20.05	QP
6	1.5940	12.13	9.76	21.89	46.00	-24.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

RADIATED EMISSION MEASUREMENT

3.7 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)

20 dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and RSS-210 Section 2.2&A8.5, then the 15.209(a) and RSS-General limit in the table below has to be followed.

FREQUENCY (MHz)	Field Strength (uV/m at meter)	Measurement Distance (meters)
0.009 -0.490	2400/F(KHz)	300
0.490 -1.705	24000/F(KHz)	30
1.705 -30.0	30	30
30 -88	100	3
88 -216	150	3
216~960	200	3
Above 960	500	3

RADIATED EMISSION LIMITS (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency~ Stop Frequency	9kHz~150kHz/ RB 200Hz for QP
Start Frequency~ Stop Frequency	150kHz~30MHz/ RB 9kHz for QP
Start Frequency~ Stop Frequency	30MHz~1000MHz/ RB120kHz for QP

The following table is the setting of the spectrum

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB/ VB (emission in restricted band)	1MHz/ 3 MHz for Peak, 1MHz/ 10Hz for Average

3.8 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested.


And performed pretest to three orthogonal axis. The worst case emissions were reported.

3.9 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 30MHz

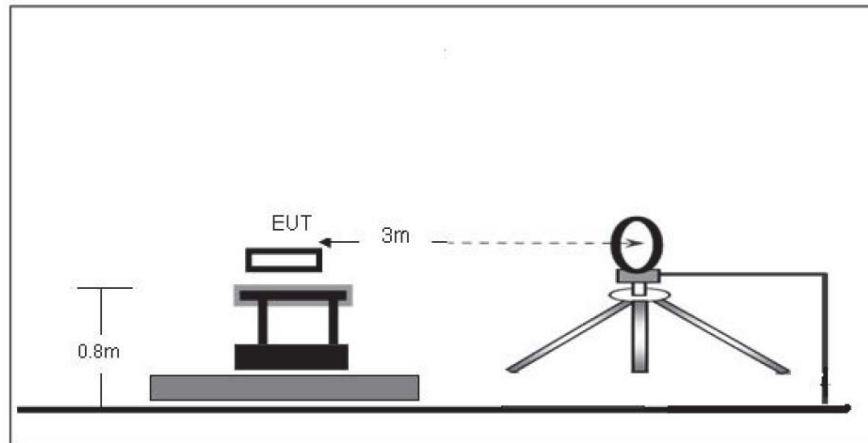

(B) Radiated Emission Test Set-Up Frequency Below 1 GHz

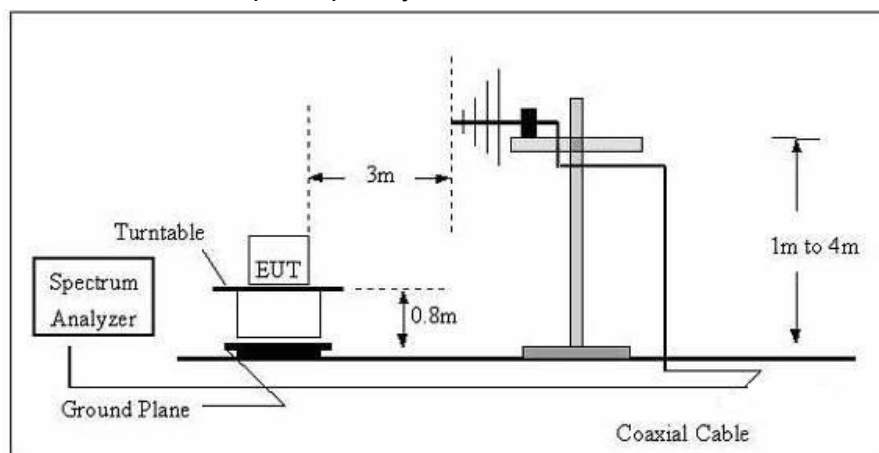

(C) Radiated Emission Test Set-Up Frequency Above 1GHz

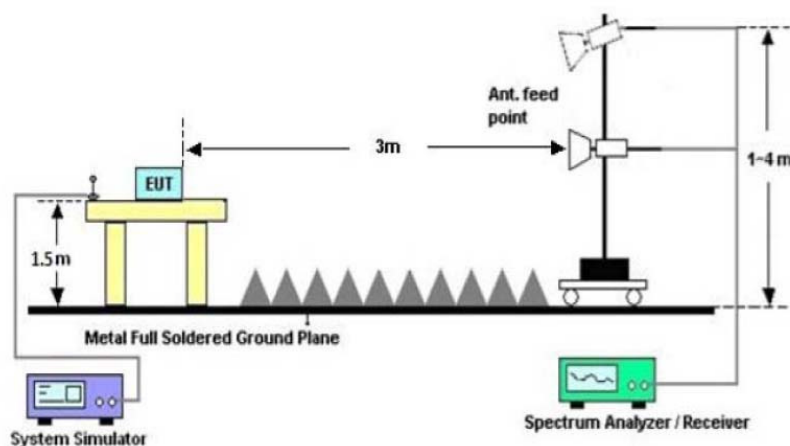

3.10 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 04, 2016	Jul. 03. 2017	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Horn Antenna	R&S	HF906	10029	Jul. 04, 2016	Jul. 03. 2017	1 year
Amplifier	EM	EM-30180	060538	Jul. 04, 2016	Jul. 03. 2017	1 year


3.11 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.12 TEST RESULTS

3.12.1 TEST RESULTS (Bellow 1GHz)

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Polarization :	Horizontal
Test Power :	AC 120V/ 60Hz		
Remark :	Only show the worse case.		

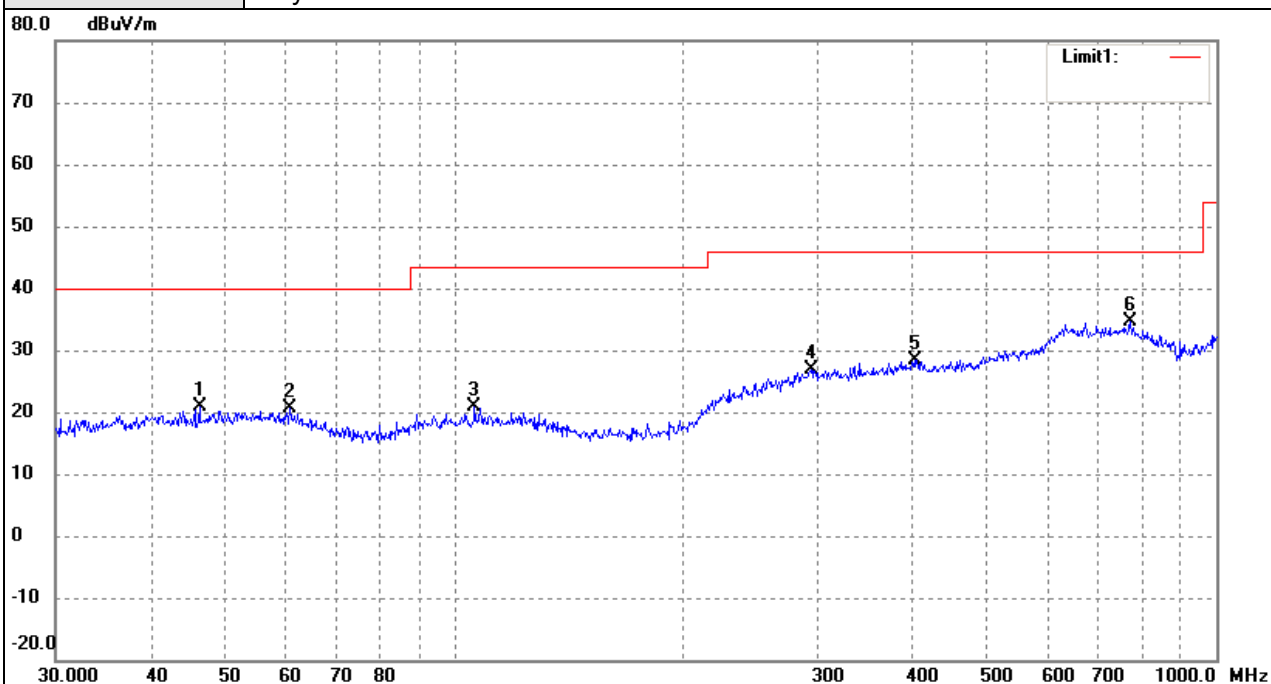


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.3402	16.02	4.96	20.98	40.00	-19.02	peak
2	60.9176	15.73	4.85	20.58	40.00	-19.42	peak
3	106.3850	15.87	4.89	20.76	43.50	-22.74	peak
4	294.1137	15.12	11.74	26.86	46.00	-19.14	peak
5	401.8385	15.74	12.61	28.35	46.00	-17.65	peak
6	771.4486	17.19	17.39	34.58	46.00	-11.42	peak

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	Bluetooth Speaker	Model Name. :	XO-9267
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2017-03-10
Test Mode :	BLE TX Mode (2402MHz)	Polarization :	Vertical
Test Power :	AC 120V/ 60Hz		
Remark :	Only show the worse case.		

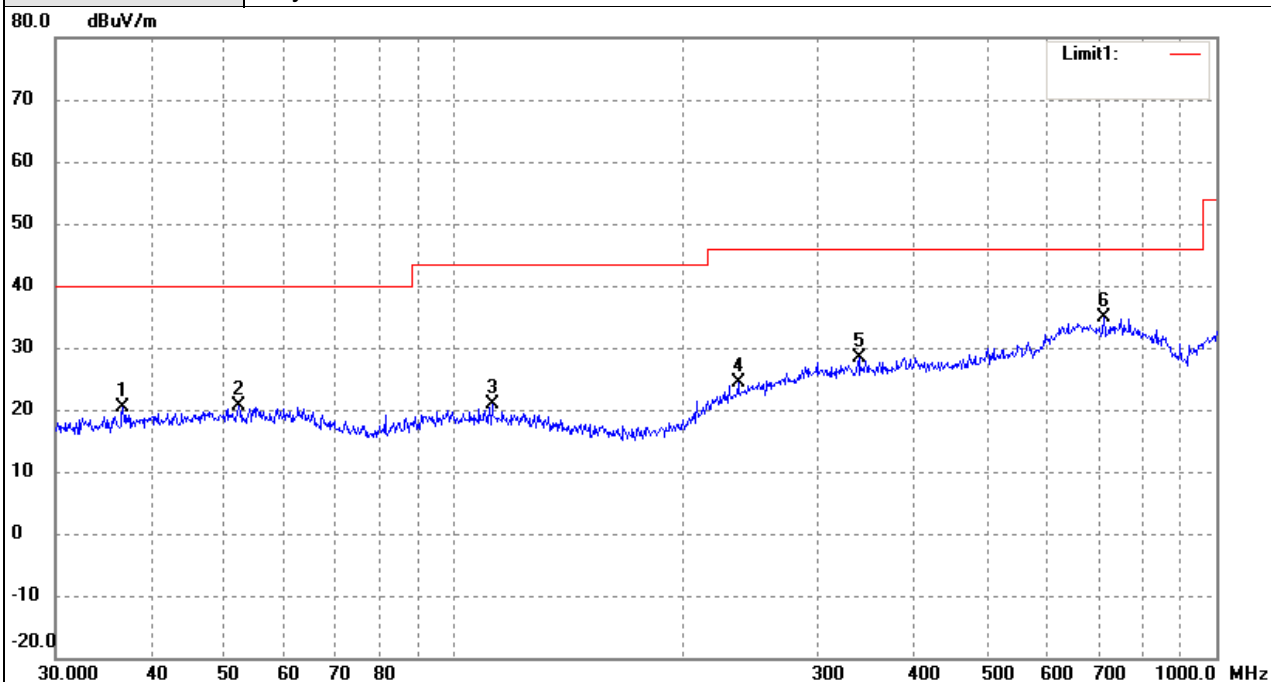

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7662	15.82	4.45	20.27	40.00	-19.73	peak
2	52.2079	15.51	5.04	20.55	40.00	-19.45	peak
3	112.1305	16.02	4.86	20.88	43.50	-22.62	peak
4	235.8164	15.70	8.66	24.36	46.00	-21.64	peak
5	339.5888	17.05	11.38	28.43	46.00	-17.57	peak
6	711.6734	17.30	17.55	34.85	46.00	-11.15	peak

Remark:

Factor = Antenna Factor + Cable Loss.

3.12.2 TEST RESULTS (Above 1GHz)

EUT :	Bluetooth Speaker			Model Name. :	XO-9267		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 3.7V			Pressure :	1010 hPa		
Test Mode :	BLE TX 2402MHz			Test Date :	2017-03-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4804	64.94	Peak	H	-3.59	61.35	74	-12.65
4804	50.83	Avg	H	-3.59	47.24	54	-6.76
7206	58.76	Peak	H	-0.52	58.24	74	-15.76
7206	46.40	Avg	H	-0.52	45.88	54	-8.12
---	---	Peak	H			74	
---	---	Avg	H			54	
4804	65.06	Peak	V	-3.59	61.47	74	-12.53
4804	51.28	Avg	V	-3.59	47.69	54	-6.31
7206	58.29	Peak	V	-0.52	57.77	74	-16.23
7206	45.95	Avg	V	-0.52	45.43	54	-8.57
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

EUT :	Bluetooth Speaker			Model Name. :	XO-9267		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 3.7V			Pressure :	1010 hPa		
Test Mode :	BLE TX 2442MHz			Test Date :	2017-03-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4884	64.46	Peak	H	-3.49	60.97	74	-13.03
4884	50.76	Avg	H	-3.49	47.27	54	-6.73
7326	58.48	Peak	H	-0.47	58.01	74	-15.99
7326	46.43	Avg	H	-0.47	45.96	54	-8.04
---	---	Peak	H			74	
---	---	Avg	H			54	
4884	64.53	Peak	V	-3.49	61.04	74	-12.96
4884	51.17	Avg	V	-3.49	47.68	54	-6.32
7326	57.54	Peak	V	-0.47	57.07	74	-16.93
7326	44.71	Avg	V	-0.47	44.24	54	-9.76
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

EUT :	Bluetooth Speaker			Model Name. :	XO-9267		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 3.7V			Pressure :	1010 hPa		
Test Mode :	BLE TX 2480MHz			Test Date :	2017-03-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4960	64.52	Peak	H	-3.41	61.11	74	-12.89
4960	50.49	Avg	H	-3.41	47.08	54	-6.92
7440	58.09	Peak	H	-0.42	57.67	74	-16.33
7440	46.31	Avg	H	-0.42	45.89	54	-8.11
---	---	Peak	H			74	
---	---	Avg	H			54	
4960	64.18	Peak	V	-3.41	60.77	74	-13.23
4960	50.93	Avg	V	-3.41	47.52	54	-6.48
7440	58.00	Peak	V	-0.42	57.58	74	-16.42
7440	45.67	Avg	V	-0.42	45.25	54	-8.75
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

4. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

4.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.4(4)	
Frequency Range (MHz)	2400~2483.5
Limits	30

4.2 TEST PROCEDURE

The measurement is according to section 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r05.

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

4.3 TEST SETUP

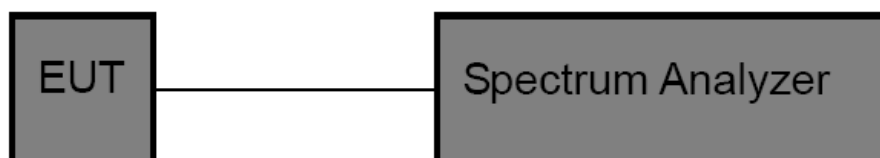

4.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


4.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


4.6 TEST RESULTS

BLE(GFSK) Mode		
Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
2402	3.015	<30
2442	3.556	
2480	3.431	


2402 MHz

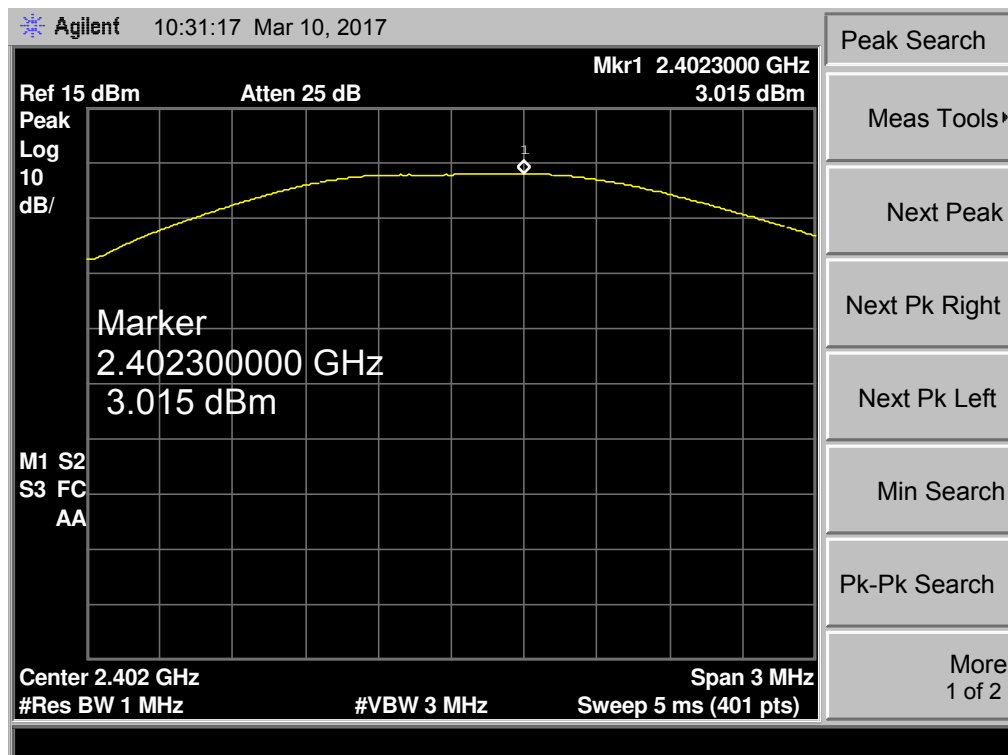

2442 MHz

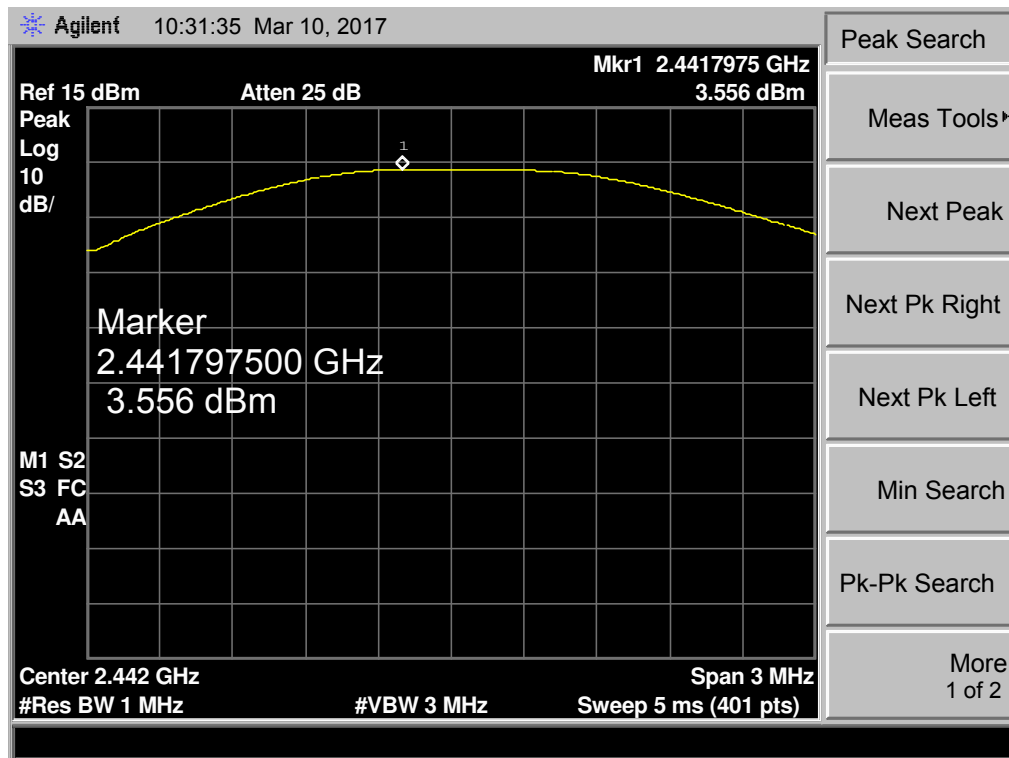

2480 MHz

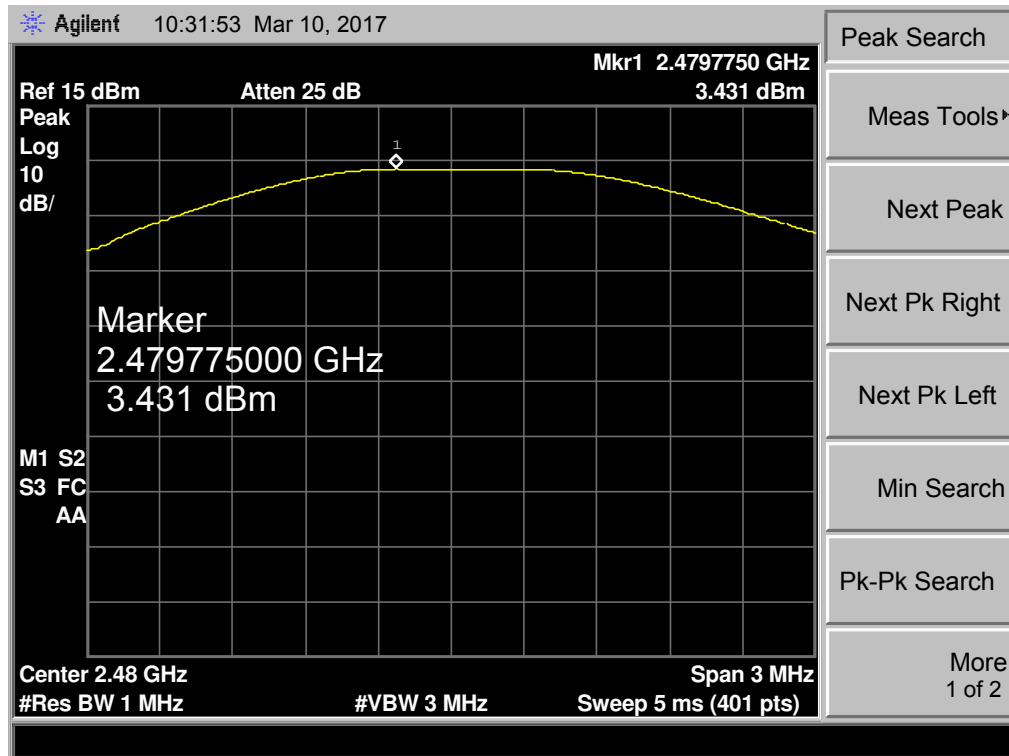

5. OCCUPIED BANDWIDTH MEASUREMENT

5.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.2(1)	
Frequency Range (MHz)	2400~2483.5
Limits	6 dB Bandwidth>500 KHz

5.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$\geq 3\text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 TEST SETUP

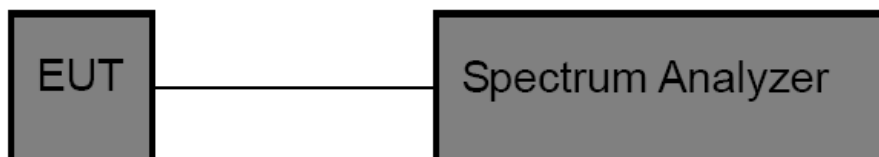

5.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


5.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


5.6 TEST RESULTS

BLE (GFSK) Mode			
Frequency (MHz)	6dB Bandwidth (KHz)	99% OBW (MHz)	Limit
2402	747.985	1.0509	>=500 kHz
2442	742.341	1.0562	
2480	734.339	1.0573	


2402 MHz

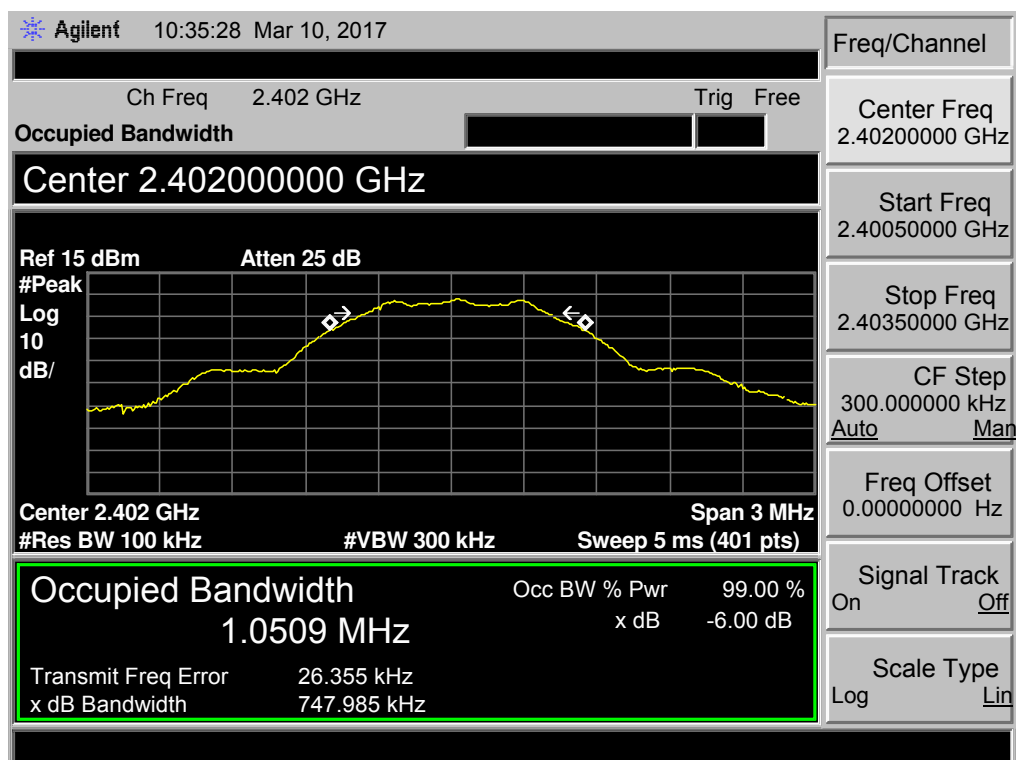

2442 MHz

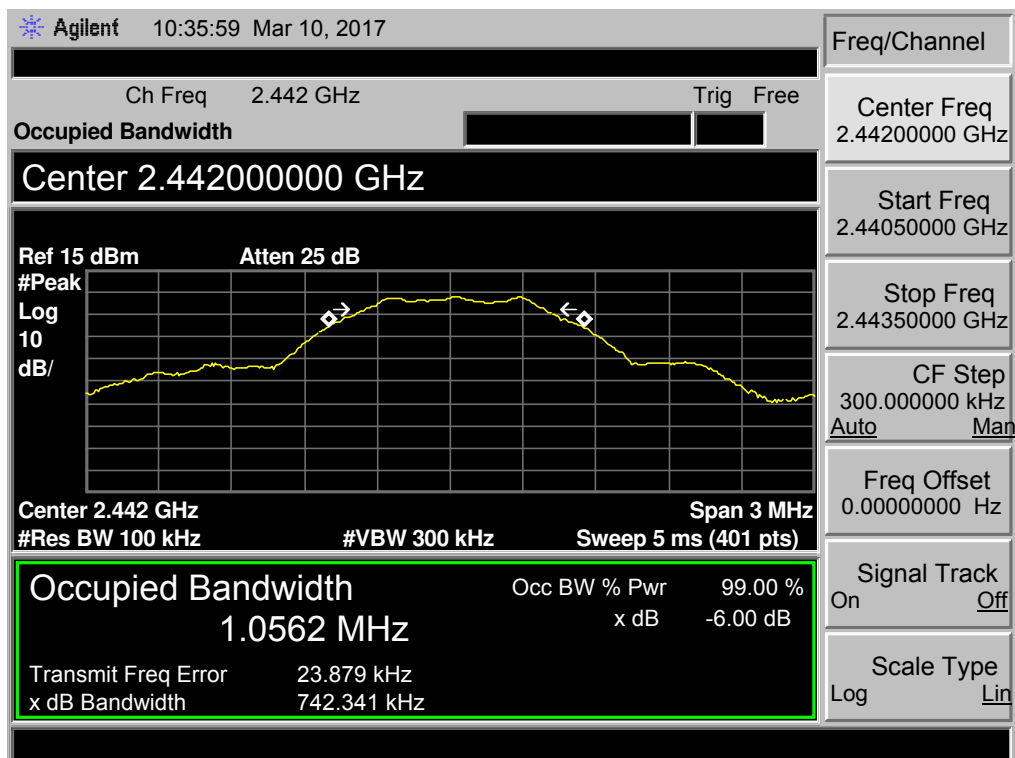

2480 MHz

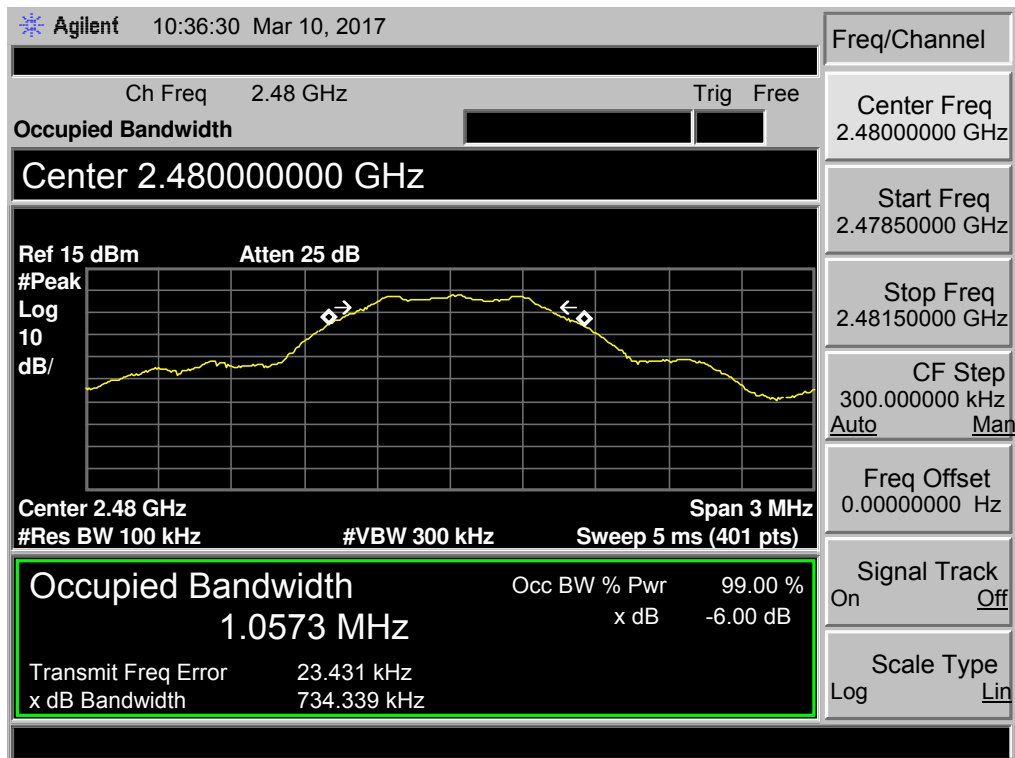

6. POWER SPECTRAL DENSITY

6.1 LIMITS


FCC Part 15.247, Subpart C/ RSS 247 Section 5.2(2)	
Frequency Range (MHz)	2400~2483.5
99% Occupied Bandwidth	8 dBm in any 3 kHz

6.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	Set the span to 1.5 times the DTS channel bandwidth
RBW	3 kHz
VBW	$\geq 3\text{RBW}$
Detector	Reak
Trace	Max Hold
Sweep Time	Auto

6.3 TEST SETUP

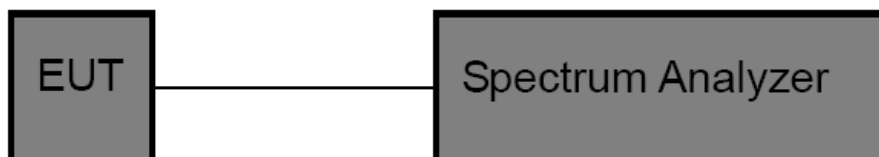

6.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2015	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


6.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


6.6 TEST RESULTS

BLE (GFSK) Mode			
Frequency (MHz)	Power Density (3 kHz/dBm)	Limit (dBm/3KHz)	Result
2402	-11.92	8	Pass
2442	-11.14		
2480	-11.13		


2402 MHz

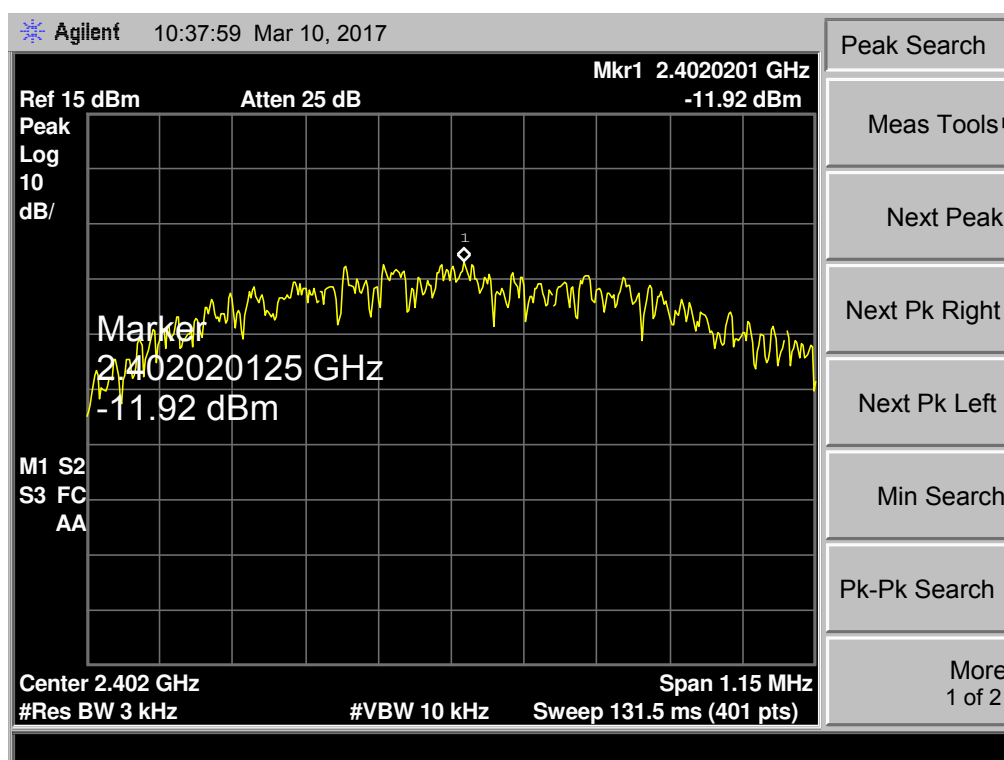

2442 MHz

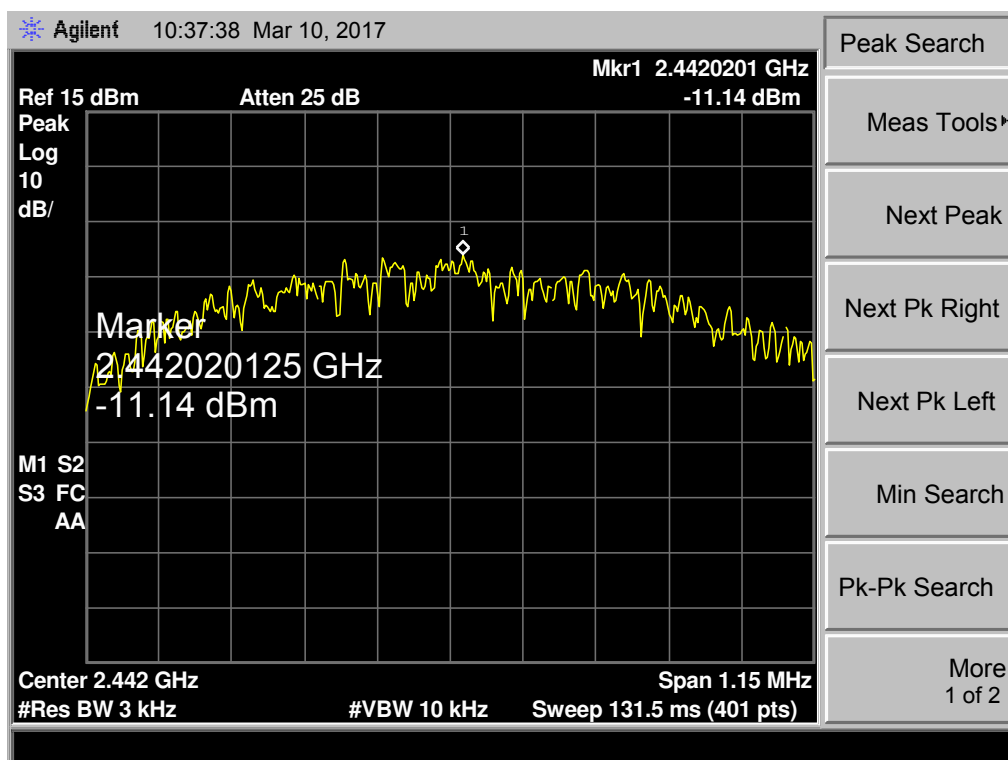

2480 MHz

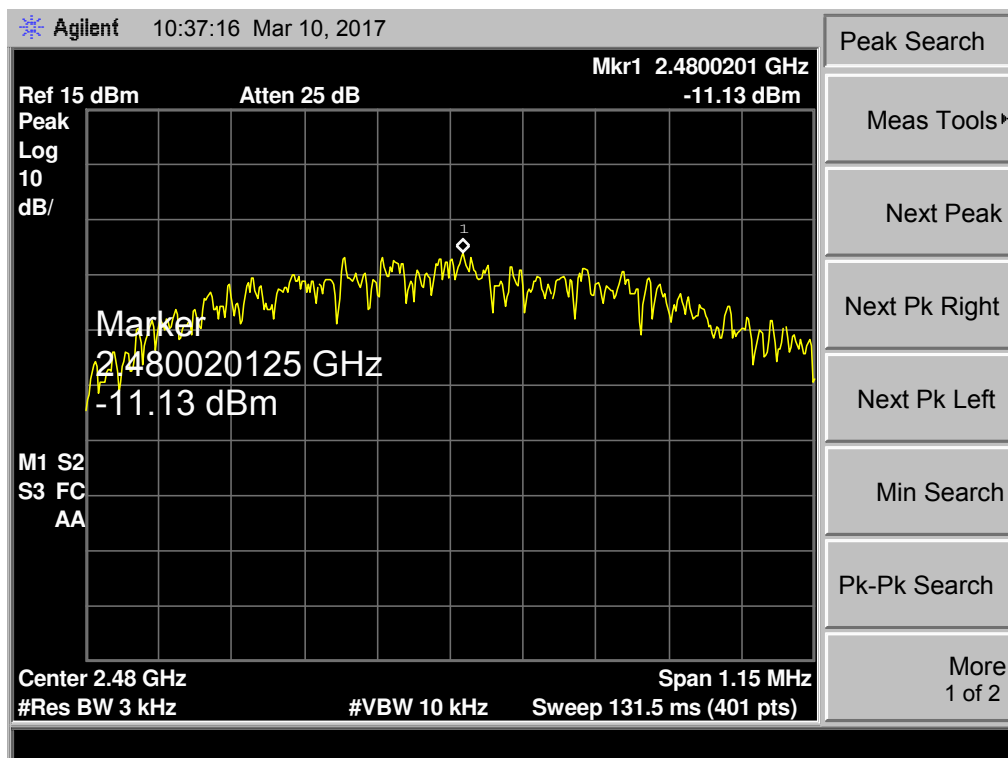

7. BAND EDGE AND OUT-OF-BAND EMISSION

7.1 LIMITS

FCC Part 15.247, Subpart C/ RSS 247 Section 5.5	
Frequency Range (MHz)	2400~2483.5
Limit	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the desired power, based on either an RF conducted measurement, provide the transmitter demonstrates compliance with the peak conducted power limits.


7.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.


- Set frequency range to capture low band-edge from 2310 MHz up to 2390 MHz, and for up band-edge from 2483.5 MHz up to 2500 MHz
- For low band-edge set the equipment transmit at the lowest channel, and for up band-edge set the equipment transmit at the highest channel
- Set the VBW ≥ 3 RBW (100kHz/ 300kHz) for conducted measurement
- For radiated measurements the RBW set to 1 MHz, and the VBW set to 1 MHz for peak measurements and 10 Hz for average measurement

7.3 TEST SETUP

(A) Radiated Emission Test Set-Up

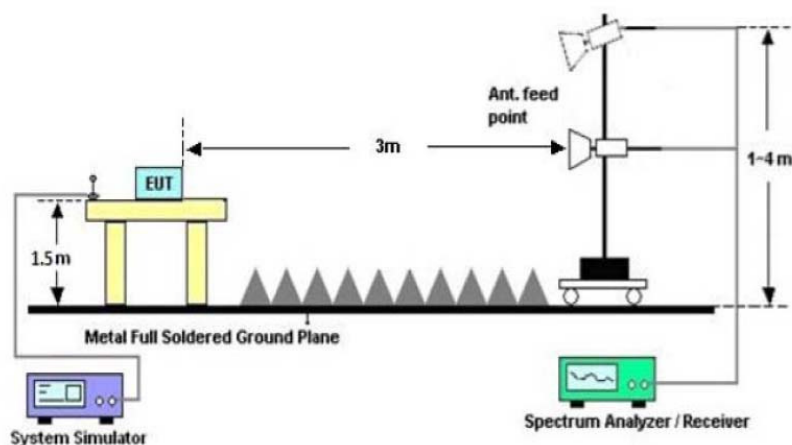

(B) Conducted Emission Test Setup

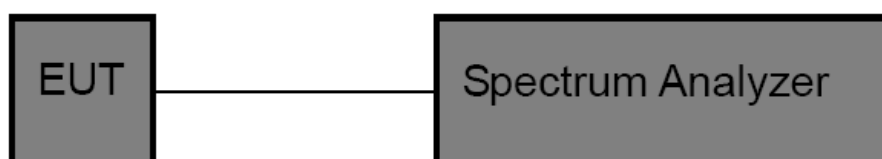

7.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Horn Antenna	R&S	HF906	10029	Jul. 04, 2016	Jul. 03. 2017	1 year
Amplifier	EM	EM-30180	060538	Jul. 04, 2016	Jul. 03. 2017	1 year

7.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

7.6 TEST RESULTS

Bandedge(Radiated Emission)

EUT :	Bluetooth Speaker			Model Name. :		XO-9267	
Temperature :	26 °C			Relative Humidity :		56%	
Test Power :	DC 3.7V			Pressure :		1010 hPa	
Test Mode :	BLE TX Mode			Test Date :		2017-03-10	
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
Low Channel- 2402MHz							
2390	51.36	Peak	H	-3.00	48.36	74	-25.64
2390	39.69	Avg	H	-3.00	36.69	54	-17.31
2402	94.57	Peak	H	-3.12	91.45	Fundamental Frequency	
2402	89.46	Avg	H	-3.12	86.34	Fundamental Frequency	
2390	51.24	Peak	V	-3.00	48.24	74	-25.76
2390	39.46	Avg	V	-3.00	36.46	54	-17.54
2402	92.39	Peak	V	-3.12	89.27	Fundamental Frequency	
2402	87.73	Avg	V	-3.12	84.61	Fundamental Frequency	
High Channel- 2480MHz							
2480	91.86	Peak	H	-2.50	89.36	Fundamental Frequency	
2480	86.79	Avg	H	-2.50	84.29	Fundamental Frequency	
2483.5	61.82	Peak	H	-2.50	59.32	74	-14.68
2483.5	52.18	Avg	H	-2.50	49.68	54	-4.32
2480	88.93	Peak	V	-2.50	86.43	Fundamental Frequency	
2480	84.35	Avg	V	-2.50	81.85	Fundamental Frequency	
2483.5	60.72	Peak	V	-2.50	58.22	74	-15.78
2483.5	51.07	Avg	V	-2.50	48.57	54	-5.43



Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

No report for the emission which more than 10 dB below the prescribed limit.

Bandedge(Conducted Emission)

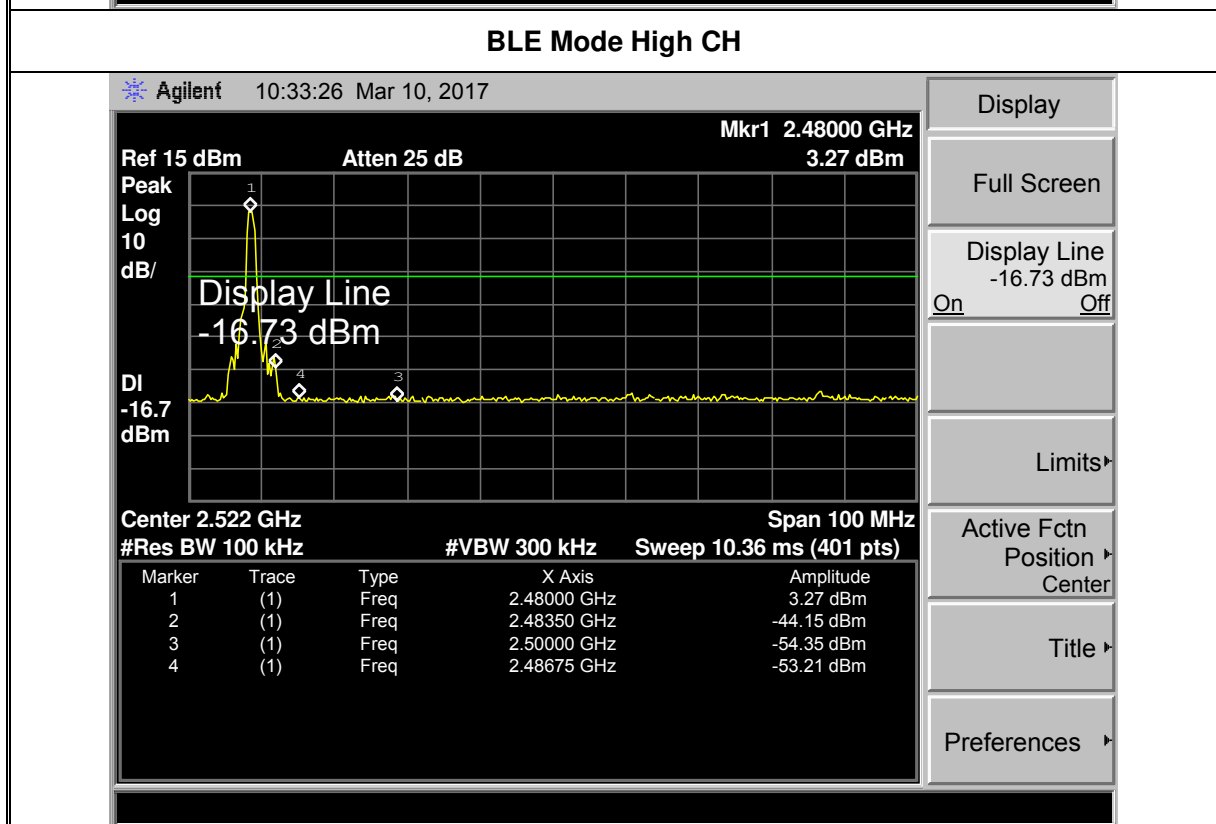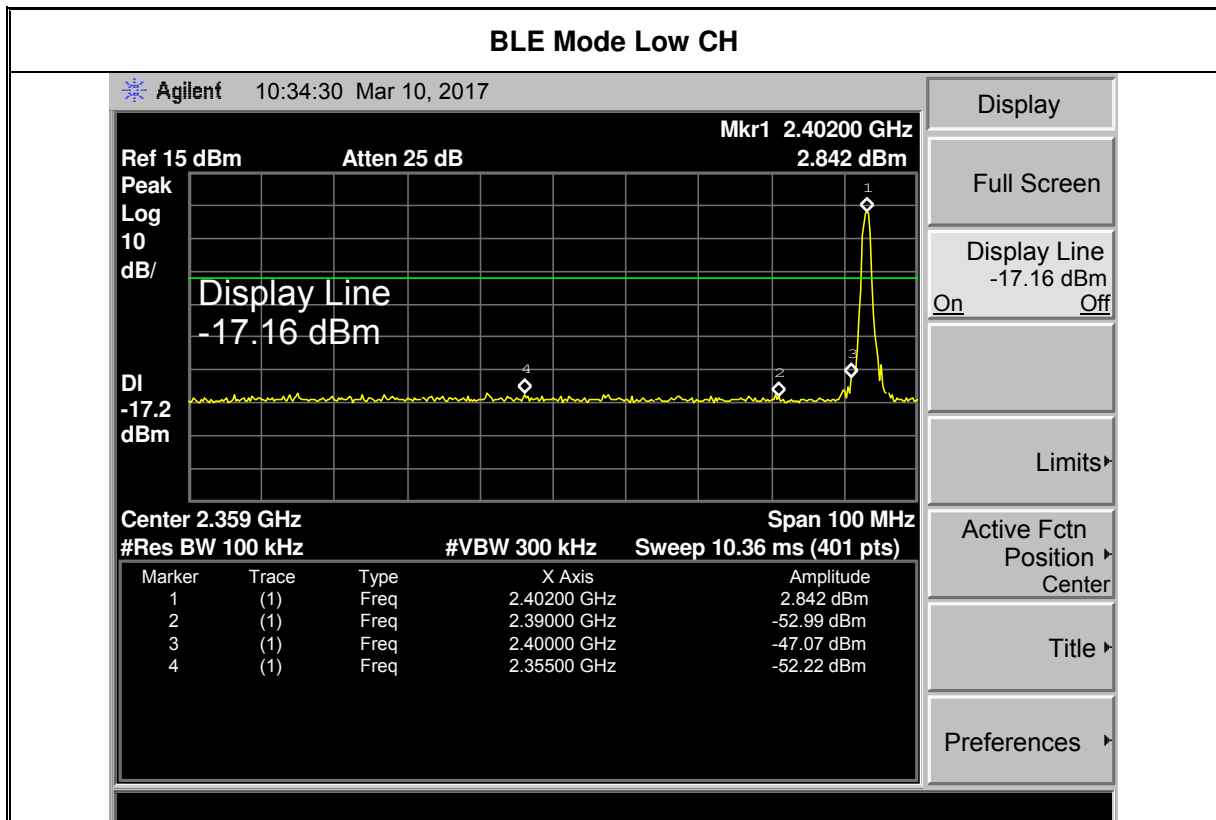

8. ANTENNA REQUIREMENT

8.1 REQUIREMENT

Antenna Requirement (15.203)	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
Antenna Requirement (15.247)	If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 ANTENNA CONNECTOR CONSTRUCTION

The EUT antenna is a PCB Antenna. And the maximum gain of this antenna is 0 dBi. It complies with the standard requirement.

-----END OF REPORT-----