


Report No.: ZR/2020/A001610

Page: 71 of 99

802.11N20 CH6 4.9.2.15

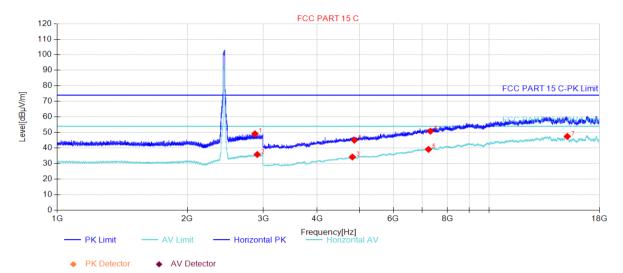

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2869.5870 | 49.15 | 6.88 | 74.00 | 24.85 | Horizontal | | | | |
| 2 | 2905.3905 | 35.82 | 6.97 | 54.00 | 18.18 | Horizontal | | | | |
| 3 | 4824.0000 | 34.19 | -10.56 | 54.00 | 19.81 | Horizontal | | | | |
| 4 | 4874.0000 | 45.00 | -10.40 | 74.00 | 29.00 | Horizontal | | | | |
| 5 | 7236.0000 | 39.12 | -2.59 | 54.00 | 14.88 | Horizontal | | | | |
| 6 | 7311.0000 | 50.81 | -2.57 | 74.00 | 23.19 | Horizontal | | | | |
| 7 | 15166.216 | 47.44 | 6.97 | 54.00 | 6.56 | Horizontal | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 72 of 99

802.11N20 CH6 4.9.2.16

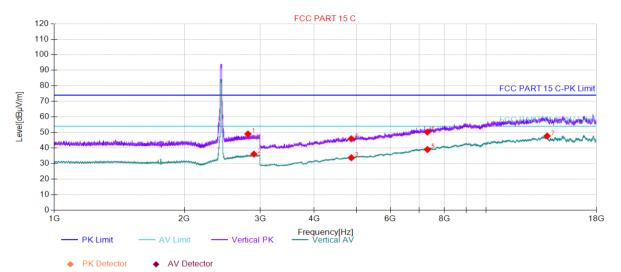

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2809.1809 | 49.04 | 6.75 | 74.00 | 24.96 | Vertical | | | | |
| 2 | 2899.3899 | 36.04 | 6.95 | 54.00 | 17.96 | Vertical | | | | |
| 3 | 4874.0000 | 33.69 | -10.40 | 54.00 | 20.31 | Vertical | | | | |
| 4 | 4874.0000 | 45.95 | -10.40 | 74.00 | 28.05 | Vertical | | | | |
| 5 | 7311.0000 | 39.02 | -2.57 | 54.00 | 14.98 | Vertical | | | | |
| 6 | 7311.0000 | 50.21 | -2.57 | 74.00 | 23.79 | Vertical | | | | |
| 7 | 13840.084 | 47.72 | 5.86 | 54.00 | 6.28 | Vertical | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 73 of 99

802.11N20 CH11 4.9.2.17

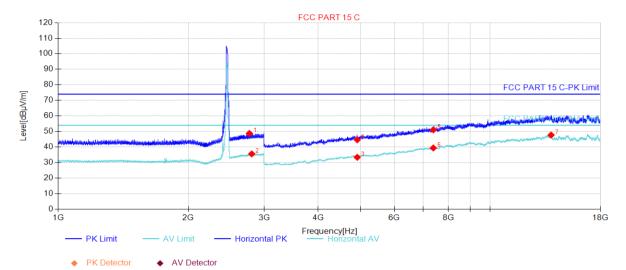

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2770.5771 | 48.70 | 6.43 | 74.00 | 25.30 | Horizontal | | | | |
| 2 | 2805.5806 | 35.54 | 6.74 | 54.00 | 18.46 | Horizontal | | | | |
| 3 | 4924.0000 | 33.35 | -10.22 | 54.00 | 20.65 | Horizontal | | | | |
| 4 | 4924.0000 | 44.65 | -10.22 | 74.00 | 29.35 | Horizontal | | | | |
| 5 | 7386.0000 | 51.02 | -2.06 | 74.00 | 22.98 | Horizontal | | | | |
| 6 | 7386.0000 | 39.37 | -2.06 | 54.00 | 14.63 | Horizontal | | | | |
| 7 | 13837.083 | 47.67 | 5.85 | 54.00 | 6.33 | Horizontal | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 74 of 99

802.11N20 CH11 4.9.2.18

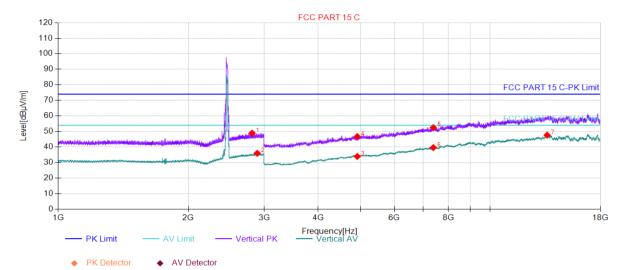

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2811.1811 | 48.92 | 6.75 | 74.00 | 25.08 | Vertical | | | | |
| 2 | 2888.7889 | 35.93 | 6.93 | 54.00 | 18.07 | Vertical | | | | |
| 3 | 4924.0000 | 33.91 | -10.22 | 54.00 | 20.09 | Vertical | | | | |
| 4 | 4924.0000 | 46.71 | -10.22 | 74.00 | 27.29 | Vertical | | | | |
| 5 | 7386.0000 | 52.47 | -2.06 | 74.00 | 21.53 | Vertical | | | | |
| 6 | 7386.0000 | 39.59 | -2.06 | 54.00 | 14.41 | Vertical | | | | |
| 7 | 13549.054 | 47.64 | 6.00 | 54.00 | 6.36 | Vertical | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 75 of 99

Secondly Supply:

Radiated Emission below 1GHz Charge + Transmitting 4.9.3.1

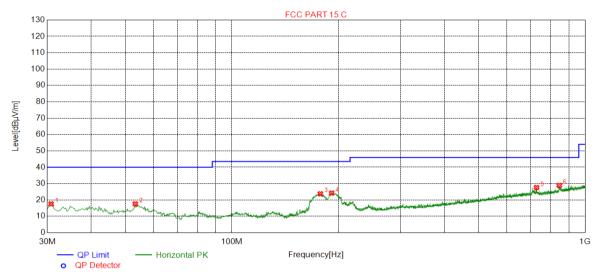

| Suspecto | Suspected List | | | | | | | | | |
|----------|----------------|-------------------|-------------------|----------------|------------|--|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | | |
| 1 | 30.7762 | 17.61 | 40.00 | 22.39 | Horizontal | | | | | |
| 2 | 53.2847 | 17.62 | 40.00 | 22.38 | Horizontal | | | | | |
| 3 | 178.0516 | 23.77 | 43.50 | 19.73 | Horizontal | | | | | |
| 4 | 191.6343 | 24.24 | 43.50 | 19.26 | Horizontal | | | | | |
| 5 | 728.7337 | 27.60 | 46.00 | 18.40 | Horizontal | | | | | |
| 6 | 845.1570 | 28.88 | 46.00 | 17.12 | Horizontal | | | | | |


Final Data List





Report No.: ZR/2020/A001610

Page: 76 of 99

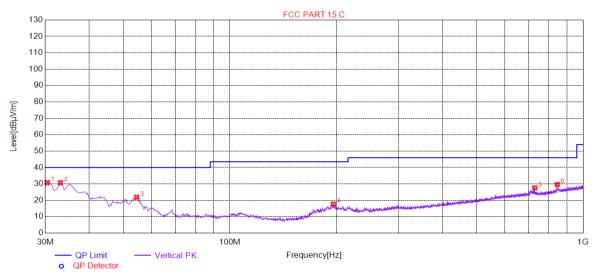

| Suspecto | Suspected List | | | | | | | | | |
|----------|----------------|-------------------|-------------------|----------------|----------|--|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | | |
| 1 | 30.3881 | 30.82 | 40.00 | 9.18 | Vertical | | | | | |
| 2 | 33.1046 | 30.73 | 40.00 | 9.27 | Vertical | | | | | |
| 3 | 54.4489 | 21.90 | 40.00 | 18.10 | Vertical | | | | | |
| 4 | 196.2913 | 17.71 | 43.50 | 25.79 | Vertical | | | | | |
| 5 | 729.5099 | 27.61 | 46.00 | 18.39 | Vertical | | | | | |
| 6 | 845.1570 | 29.62 | 46.00 | 16.38 | Vertical | | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 77 of 99

Transmitter emission above 1GHz 4.9.4 4.9.4.1 802.11B_Channel 6

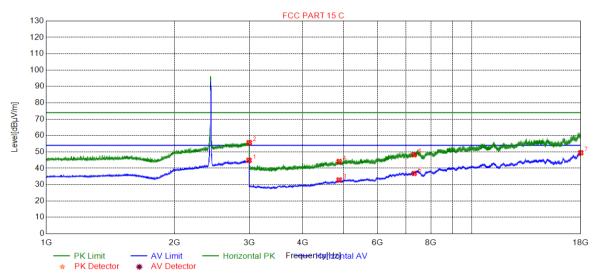

| Suspecte | Suspected List | | | | | | | | | |
|----------|----------------|-------------------|-------------------|----------------|------------|--|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | | |
| 1 | 2993.4984 | 44.87 | 54.00 | 9.13 | Horizontal | | | | | |
| 2 | 2997.4994 | 55.65 | 74.00 | 18.35 | Horizontal | | | | | |
| 3 | 4874.0000 | 32.86 | 54.00 | 21.14 | Horizontal | | | | | |
| 4 | 4874.0000 | 44.17 | 74.00 | 29.83 | Horizontal | | | | | |
| 5 | 7311.0000 | 36.84 | 54.00 | 17.16 | Horizontal | | | | | |
| 6 | 7311.0000 | 48.22 | 74.00 | 25.78 | Horizontal | | | | | |
| 7 | 17992.4996 | 49.47 | 54.00 | 4.53 | Horizontal | | | | | |

Final Data List






Report No.: ZR/2020/A001610

78 of 99 Page:

802.11B Channel 6 4.9.4.2

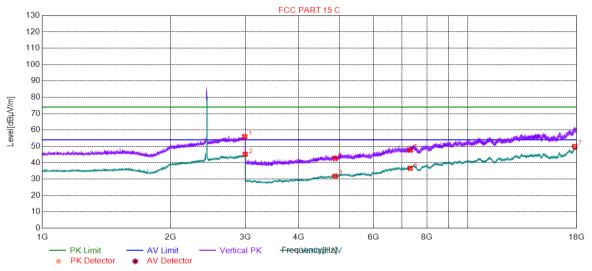

| Suspecto | Suspected List | | | | | | | | | |
|----------|----------------|-------------------|-------------------|----------------|----------|--|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | | |
| 1 | 2987.4969 | 56.00 | 74.00 | 18.00 | Vertical | | | | | |
| 2 | 2995.9990 | 45.16 | 54.00 | 8.84 | Vertical | | | | | |
| 3 | 4874.0000 | 31.81 | 54.00 | 22.19 | Vertical | | | | | |
| 4 | 4874.0000 | 42.62 | 74.00 | 31.38 | Vertical | | | | | |
| 5 | 7311.0000 | 47.71 | 74.00 | 26.29 | Vertical | | | | | |
| 6 | 7311.0000 | 36.65 | 54.00 | 17.35 | Vertical | | | | | |
| 7 | 17801.9901 | 49.94 | 54.00 | 4.06 | Vertical | | | | | |

Final Data List

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.






Report No.: ZR/2020/A001610

Page: 79 of 99

4.10 Radiated Spurious Emissions

| Test Requirement: | 47 CFR Part 15C Section 1 | 47 CFR Part 15C Section 15.209 and 15.205 | | | | | | |
|-------------------|---------------------------|-------------------------------------------|---------------|--|--|--|--|--|
| Test Method: | ANSI C63.10: 2013 Section | 11.12 | | | | | | |
| Test Site: | Measurement Distance: 3m | or 10m (Semi-Anechoic | Chamber) | | | | | |
| Limit: | Frequency | Remark | | | | | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak | | | | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak | | | | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak | | | | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak | | | | | |
| | Abovo 1CHz | 54.0 | Average Value | | | | | |
| | Above IGHZ | Above 1GHz 74.0 Peak Value | | | | | | |
| Test Setup: | | | | | | | | |






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz




Figure 3. Above 1 GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/A001610

80 of 99 Page:

| | - 3.go 3.000 | | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Test Procedure: | a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | |
| | b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | |
| | c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | |
| | d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | |
| | e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. | | | | |
| | f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | | |
| | g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel | | | | |
| | h. Test the EUT in the lowest channel , the Highest channel | | | | |
| | i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. | | | | |
| | j. Repeat above procedures until all frequencies measured was complete. | | | | |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates. Charge + Transmitting mode. | | | | |
| Final Test Mode: | Pretest the EUT at Charge + Transmitting mode. | | | | |
| | Through Pre-scan, find the | | | | |
| | 1Mbps of rate is the worst case of 802.11B; | | | | |
| | 6Mbps of rate is the worst case of 802.11G; | | | | |
| | 6.5Mbps of rate is the worst case of 802.11N(HT20); | | | | |
| | Only the worst case is recorded in the report. | | | | |
| Instruments Used: | Refer to section 5.10 for details | | | | |
| Test Results: | Pass | | | | |






Report No.: ZR/2020/A001610

Page: 81 of 99

Firstly Supply:

4.10.1 **Test Plots** 802.11B CH1 4.10.1.1

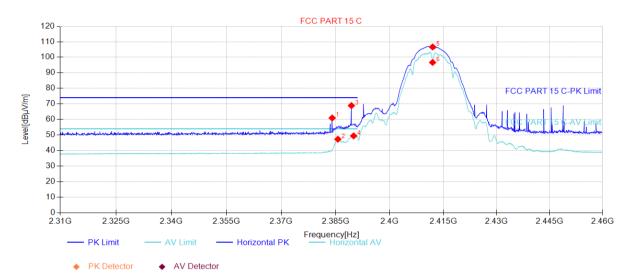

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2384.0620 | 60.94 | 4.28 | 74.00 | 13.06 | Horizontal | | | | |
| 2 | 2385.6378 | 47.28 | 4.29 | 54.00 | 6.72 | Horizontal | | | | |
| 3 | 2389.3897 | 68.91 | 4.31 | 74.00 | 5.09 | Horizontal | | | | |
| 4 | 2390.0000 | 49.42 | 4.31 | 54.00 | 4.58 | Horizontal | | | | |
| 5 | 2412.0000 | 106.67 | 4.37 | 0.00 | -106.67 | Horizontal | | | | |
| 6 | 2412.0000 | 96.69 | 4.37 | 0.00 | -96.69 | Horizontal | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 82 of 99

802.11B CH1 4.10.1.2

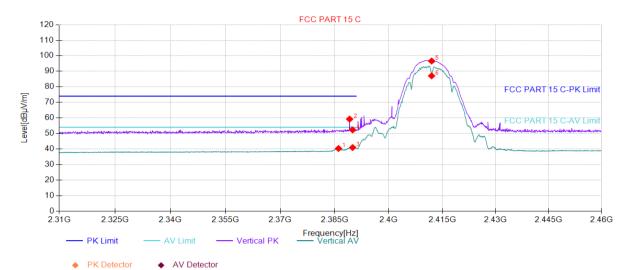

| Suspec | Suspected List | | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | | |
| 1 | 2386.0880 | 40.31 | 4.29 | 54.00 | 13.69 | Vertical | | | | |
| 2 | 2389.1646 | 59.23 | 4.30 | 74.00 | 14.77 | Vertical | | | | |
| 3 | 2390.0000 | 40.93 | 4.31 | 54.00 | 13.07 | Vertical | | | | |
| 4 | 2390.0000 | 52.28 | 4.31 | 74.00 | 21.72 | Vertical | | | | |
| 5 | 2412.0000 | 96.65 | 4.37 | 0.00 | -96.65 | Vertical | | | | |
| 6 | 2412.0000 | 87.07 | 4.37 | 0.00 | -87.07 | Vertical | | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 83 of 99

802.11B CH11 4.10.1.3

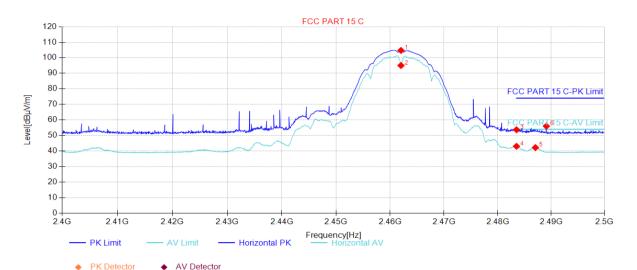

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2462.0000 | 104.74 | 4.44 | 0.00 | -104.74 | Horizontal | | |
| 2 | 2462.0000 | 95.03 | 4.44 | 0.00 | -95.03 | Horizontal | | |
| 3 | 2483.5000 | 53.67 | 4.47 | 74.00 | 20.33 | Horizontal | | |
| 4 | 2483.5000 | 43.03 | 4.47 | 54.00 | 10.97 | Horizontal | | |
| 5 | 2487.0435 | 42.18 | 4.47 | 54.00 | 11.82 | Horizontal | | |
| 6 | 2489.0945 | 55.98 | 4.47 | 74.00 | 18.02 | Horizontal | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 84 of 99

802.11B CH11 4.10.1.4

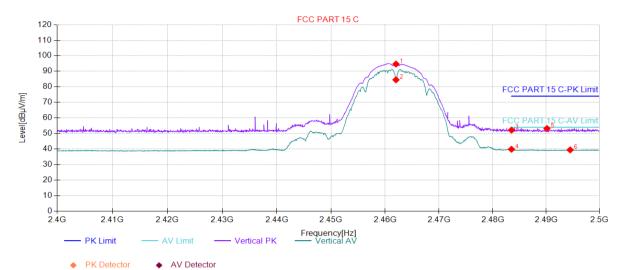

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2462.0000 | 94.67 | 4.44 | 0.00 | -94.67 | Vertical | | |
| 2 | 2462.0000 | 84.53 | 4.44 | 0.00 | -84.53 | Vertical | | |
| 3 | 2483.5000 | 52.15 | 4.47 | 74.00 | 21.85 | Vertical | | |
| 4 | 2483.5000 | 39.82 | 4.47 | 54.00 | 14.18 | Vertical | | |
| 5 | 2490.1451 | 53.19 | 4.48 | 74.00 | 20.81 | Vertical | | |
| 6 | 2494.4972 | 39.41 | 4.48 | 54.00 | 14.59 | Vertical | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 85 of 99

802.11G CH1 4.10.1.5

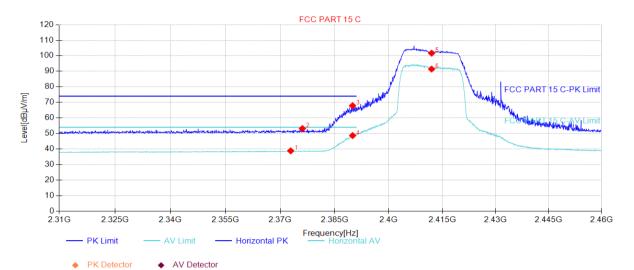

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2372.8814 | 38.79 | 4.23 | 54.00 | 15.21 | Horizontal | | |
| 2 | 2376.1081 | 53.14 | 4.25 | 74.00 | 20.86 | Horizontal | | |
| 3 | 2389.9900 | 67.86 | 4.31 | 74.00 | 6.14 | Horizontal | | |
| 4 | 2390.0000 | 48.62 | 4.31 | 54.00 | 5.38 | Horizontal | | |
| 5 | 2412.0000 | 101.67 | 4.37 | 0.00 | -101.67 | Horizontal | | |
| 6 | 2412.0000 | 91.46 | 4.37 | 0.00 | -91.46 | Horizontal | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 86 of 99

802.11G CH1 4.10.1.6

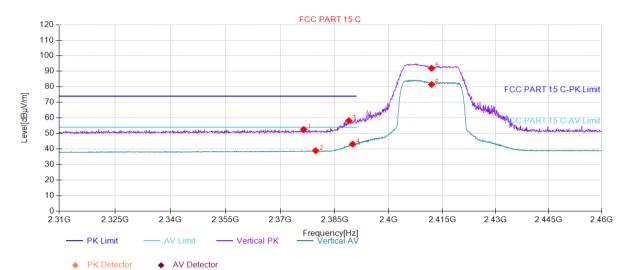

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2376.4832 | 52.57 | 4.25 | 74.00 | 21.43 | Vertical | | |
| 2 | 2379.7849 | 38.91 | 4.26 | 54.00 | 15.09 | Vertical | | |
| 3 | 2388.9395 | 58.24 | 4.30 | 74.00 | 15.76 | Vertical | | |
| 4 | 2390.0000 | 43.12 | 4.31 | 54.00 | 10.88 | Vertical | | |
| 5 | 2412.0000 | 91.95 | 4.37 | 0.00 | -91.95 | Vertical | | |
| 6 | 2412.0000 | 81.55 | 4.37 | 0.00 | -81.55 | Vertical | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 87 of 99

802.11G CH11 4.10.1.7

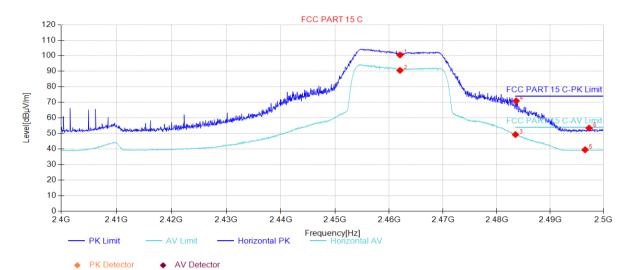

| Suspec | Suspected List | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | |
| 1 | 2462.0000 | 100.51 | 4.44 | 0.00 | -100.51 | Horizontal | | | |
| 2 | 2462.0000 | 90.60 | 4.44 | 0.00 | -90.60 | Horizontal | | | |
| 3 | 2483.5000 | 49.27 | 4.47 | 54.00 | 4.73 | Horizontal | | | |
| 4 | 2483.6418 | 70.97 | 4.47 | 74.00 | 3.03 | Horizontal | | | |
| 5 | 2496.5483 | 39.49 | 4.49 | 54.00 | 14.51 | Horizontal | | | |
| 6 | 2497.2986 | 53.43 | 4.49 | 74.00 | 20.57 | Horizontal | | | |

Final Data List




Member of the SGS Group (SGS SA)



Report No.: ZR/2020/A001610

Page: 88 of 99

802.11G CH11 4.10.1.8

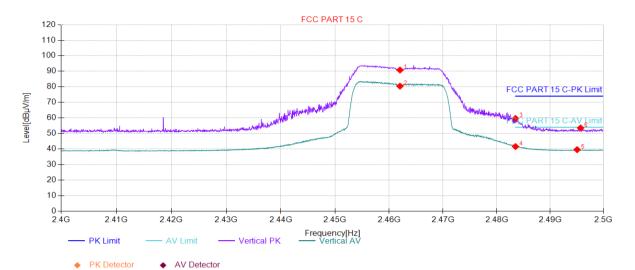

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2462.0000 | 90.84 | 4.44 | 0.00 | -90.84 | Vertical | | |
| 2 | 2462.0000 | 80.45 | 4.44 | 0.00 | -80.45 | Vertical | | |
| 3 | 2483.5000 | 59.66 | 4.47 | 74.00 | 14.34 | Vertical | | |
| 4 | 2483.5000 | 41.58 | 4.47 | 54.00 | 12.42 | Vertical | | |
| 5 | 2495.0475 | 39.57 | 4.48 | 54.00 | 14.43 | Vertical | | |
| 6 | 2495.6978 | 53.54 | 4.48 | 74.00 | 20.46 | Vertical | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 89 of 99

802.11N20 CH1 4.10.1.9

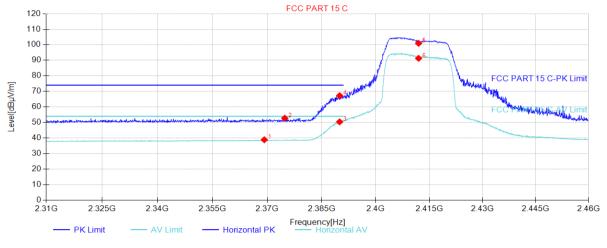

 PK Detector AV Detector

| Suspected List | | | | | | | |
|----------------|----------------|-------------------|----------------|-------------------|----------------|------------|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | |
| 1 | 2369.2046 | 38.85 | 4.22 | 54.00 | 15.15 | Horizontal | |
| 2 | 2374.8324 | 52.73 | 4.24 | 74.00 | 21.27 | Horizontal | |
| 3 | 2390.0000 | 50.39 | 4.31 | 54.00 | 3.61 | Horizontal | |
| 4 | 2390.0000 | 67.25 | 4.31 | 74.00 | 6.75 | Horizontal | |
| 5 | 2412.0000 | 100.95 | 4.37 | 0.00 | -100.95 | Horizontal | |
| 6 | 2412.0000 | 91.29 | 4.37 | 0.00 | -91.29 | Horizontal | |

Final Data List






Report No.: ZR/2020/A001610

Page: 90 of 99

802.11N20 CH1 4.10.1.10

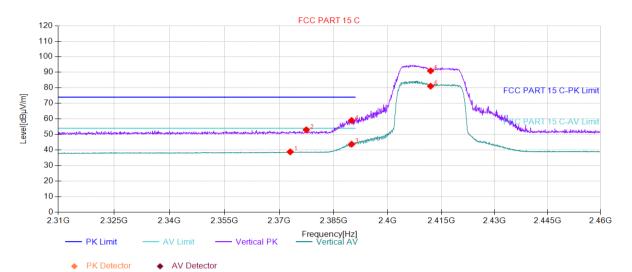

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2373.0315 | 38.79 | 4.23 | 54.00 | 15.21 | Vertical | | |
| 2 | 2377.4587 | 52.98 | 4.25 | 74.00 | 21.02 | Vertical | | |
| 3 | 2390.0000 | 43.72 | 4.31 | 54.00 | 10.28 | Vertical | | |
| 4 | 2390.0000 | 59.00 | 4.31 | 74.00 | 15.00 | Vertical | | |
| 5 | 2412.0000 | 90.95 | 4.37 | 0.00 | -90.95 | Vertical | | |
| 6 | 2412.0000 | 81.07 | 4.37 | 0.00 | -81.07 | Vertical | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 91 of 99

802.11N20 CH11 4.10.1.11

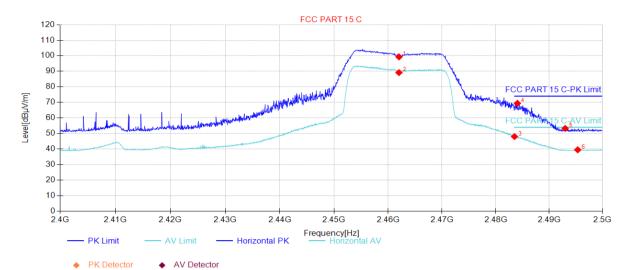

| Suspec | Suspected List | | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|------------|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | | |
| 1 | 2462.0000 | 99.30 | 4.44 | 0.00 | -99.30 | Horizontal | | | |
| 2 | 2462.0000 | 89.18 | 4.44 | 0.00 | -89.18 | Horizontal | | | |
| 3 | 2483.5000 | 48.00 | 4.47 | 54.00 | 6.00 | Horizontal | | | |
| 4 | 2484.0420 | 69.39 | 4.47 | 74.00 | 4.61 | Horizontal | | | |
| 5 | 2492.9965 | 53.24 | 4.48 | 74.00 | 20.76 | Horizontal | | | |
| 6 | 2495.3477 | 39.47 | 4.48 | 54.00 | 14.53 | Horizontal | | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 92 of 99

802.11N20 CH11 4.10.1.12

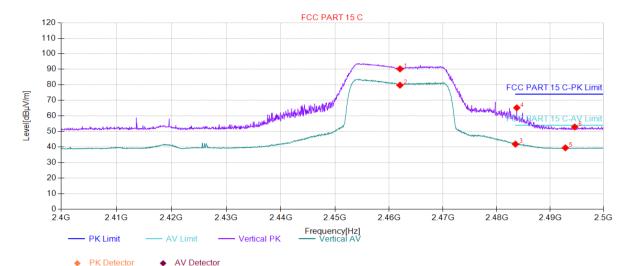

| Suspec | Suspected List | | | | | | | |
|--------|----------------|-------------------|----------------|-------------------|----------------|----------|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Polarity | | |
| 1 | 2462.0000 | 90.26 | 4.44 | 0.00 | -90.26 | Vertical | | |
| 2 | 2462.0000 | 79.78 | 4.44 | 0.00 | -79.78 | Vertical | | |
| 3 | 2483.5000 | 41.84 | 4.47 | 54.00 | 12.16 | Vertical | | |
| 4 | 2483.7419 | 65.23 | 4.47 | 74.00 | 8.77 | Vertical | | |
| 5 | 2492.8464 | 39.45 | 4.48 | 54.00 | 14.55 | Vertical | | |
| 6 | 2494.5973 | 52.90 | 4.48 | 74.00 | 21.10 | Vertical | | |

Final Data List






Report No.: ZR/2020/A001610

Page: 93 of 99

Secondly Supply:



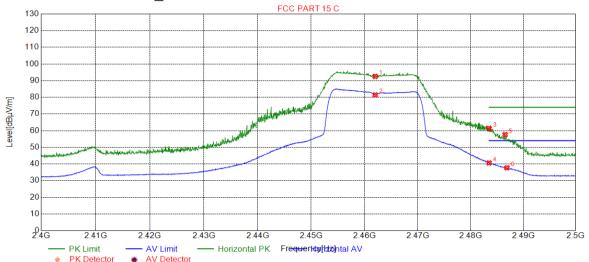

| Suspect | Suspected List | | | | | | | |
|---------|----------------|-------------------|-------------------|----------------|------------|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | |
| 1 | 2462.0000 | 92.57 | 0.00 | -92.57 | Horizontal | | | |
| 2 | 2462.0000 | 81.42 | 0.00 | -81.42 | Horizontal | | | |
| 3 | 2483.5000 | 61.33 | 74.00 | 12.67 | Horizontal | | | |
| 4 | 2483.5000 | 40.63 | 54.00 | 13.37 | Horizontal | | | |
| 5 | 2486.5433 | 57.65 | 74.00 | 16.35 | Horizontal | | | |
| 6 | 2486.8934 | 37.71 | 54.00 | 16.29 | Horizontal | | | |

Final Data List



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


Member of the SGS Group (SGS SA)



Report No.: ZR/2020/A001610

Page: 94 of 99

802.11G Channel 11 4.10.1.14

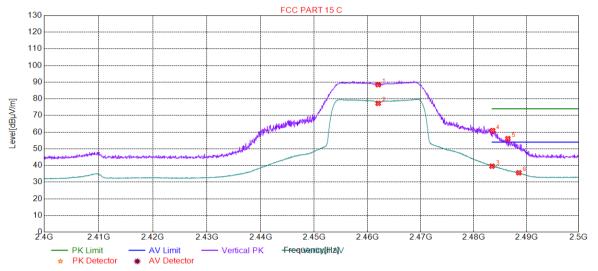

| Suspecte | Suspected List | | | | | | | |
|----------|----------------|-------------------|-------------------|----------------|----------|--|--|--|
| NO. | Freq. [MHz] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity | | | |
| 1 | 2462.0000 | 88.50 | 0.00 | -88.50 | Vertical | | | |
| 2 | 2462.0000 | 77.31 | 0.00 | -77.31 | Vertical | | | |
| 3 | 2483.5000 | 39.60 | 54.00 | 14.40 | Vertical | | | |
| 4 | 2483.5918 | 60.94 | 74.00 | 13.06 | Vertical | | | |
| 5 | 2486.4932 | 56.09 | 74.00 | 17.91 | Vertical | | | |
| 6 | 2488.5943 | 35.63 | 54.00 | 18.37 | Vertical | | | |

Final Data List

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor All Modes have been tested, but only the worst case data displayed in this report.





Report No.: ZR/2020/A001610

Page: 95 of 99

Measurement Uncertainty (95% confidence levels, k=2) 5

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Total RF power, conducted | ±0.75dB |
| 2 | RF power density, conducted | ±2.84dB |
| 3 | Spurious emissions, conducted | ±0.75dB |
| 4 | Radiated Spurious emission test | ±4.5dB (30MHz-1GHz) |
| 4 | | ±4.8dB (1GHz-25GHz) |
| 5 | Conduct emission test | ±3.12 dB (9KHz- 30MHz) |
| 6 | Temperature test | ±1°C |
| 7 | Humidity test | ±3% |
| 8 | DC and low frequency voltages | ±0.5% |





Report No.: ZR/2020/A001610

Page: 96 of 99

Equipment List

| Conducted Emission | | | | | |
|----------------------|--------------------------------------|--------------------|---------------|--------------|--------------|
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Duedate |
| rest Equipment | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| Shielding Room | ZhongYu Electron | GB-88 | SEM001-06 | 2020/5/10 | 2023/5/9 |
| LISN | Rohde & Schwarz | ENV216 | SEM007-01 | 2020/7/14 | 2021/7/14 |
| LISN | ETS-LINDGREN | Feb-16 | SEM007-02 | 2020/4/1 | 2021/3/31 |
| Measurement Software | AUDIX | e3 V5.4.1221d | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM024-01 | 2020/6/12 | 2021/6/11 |
| 2 Line ISN | Fischer Custom Communications Inc | FCC-TLISN-T2 02 | EMC0122 | 2020/2/11 | 2021/2/10 |
| EMI Test Receiver | Rohde & Schwarz | ESCI | SEM004-02 | 2020/3/2 | 2021/3/1 |

| RF conducted test | | | | | |
|---------------------|----------------------------|---------------------|---------------|--------------|--------------|
| Toot Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Duedate |
| Test Equipment | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| DC Power Supply | Agilent Technologie Inc | 66311B | W009-09 | 2020/7/15 | 2021/7/15 |
| Signal Analyzer | Rohde & Schwarz | FSV | W025-05 | 2020/1/3 | 2021/1/2 |
| Coaxial Cable | SGS | N/A | SEM031-01 | 2020/6/12 | 2021/6/11 |
| Attenuator | Weinschel Associates | WA41 | SEM021-09 | N/A | N/A |
| Signal Generator | KEYSIGHT | N5173B | SEM006-05 | 2020/7/14 | 2021/7/14 |
| Temperature Chamber | GIANT FORCE | ICT-150-40-CP AR | W027-03 | 2020/10/27 | 2021/10/27 |
| | | | | 2019/10/27 | 2020/10/27 |
| Power Meter | Rohde & Schwarz | NRVS | SEM014-02 | 2020/7/14 | 2021/7/14 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/A001610

97 of 99

| Page: 97 of 99 | | | | | | | |
|------------------------------------------|----------------------------|-----------------------|--------------|--------------|--------------|--|--|
| RE in Chamber | | | | | | | |
| Toot Equipment | Manufacturer | Model No. | Inventory No | Cal. date | Cal.Due date | | |
| Test Equipment | | | | (yyyy-mm-dd) | (yyyy-mm-dd) | | |
| 3m Semi-Anechoic Chamber | AUDIX | N/A | SEM001-02 | 2018/3/13 | 2021/3/12 | | |
| Measurement Software | AUDIX | e3V8.2014-6-2 | N/A | N/A | N/A | | |
| Coaxial Cable | SGS | N/A | SEM026-01 | 2020/6/12 | 2021/6/11 | | |
| EXA Signal Analyzer (10Hz-26.5GHz) | Agilent Technologie Inc | N9010A | SEM004-09 | 2020/3/12 | 2021/3/11 | | |
| BiConiLog Antenna (26- 3000MHz) | ETS-Lindgren | 3142C | SEM003-01 | 2020/6/27 | 2023/6/26 | | |
| Horn Antenna (0.8- 18GHz) | Rohde & Schwarz | HF907 | SEM003-07 | 2018/4/13 | 2021/4/12 | | |
| Pre-amplifier(0.1-1.3GHz | HP | 8447D | SEM005-02 | 2020/7/14 | 2021/7/14 | | |
| Low Noise Amplifier(100MHz- 18GHz) | Black Diamond Series | BDLNA-0118- 352810 | SEM005-05 | 2020/9/3 | 2021/9/2 | | |
| Horn Antenna (15- 40GHz) | Schwarzbeck | BBHA 9170 | SEM003-15 | 2020/10/17 | 2023/10/16 | | |
| Pre-amplifier(18-26GHz | Rohde & Schwarz | CH14-H052 | SEM005-17 | 2020/3/2 | 2021/3/1 | | |
| Band filter | N/A | N/A | SEM023-01 | N/A | N/A | | |
| | RE in Chamber | | | | | | |
| Toot Favrings and | Manufacturer | Model No. | Inventory No | Cal. date | Cal.Due date | | |
| Test Equipment | | | | (yyyy-mm-dd) | (yyyy-mm-dd) | | |
| 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEM001-01 | 2020/8/5 | 2023/8/4 | | |
| Measurement Software | AUDIX | e3 V8.2014-6- 27 | N/A | N/A | N/A | | |
| Coaxial Cable | SGS | N/A | SEM025-01 | 2020/6/12 | 2021/6/11 | | |
| MXE EMI Receiver (20Hz-8.4GHz) | Agilent Technologie | N9038A | SEM004-05 | 2020/7/14 | 2021/7/14 | | |
| BiConiLog Antenna (26 3000MHz) | ETS-LINDGREN | 3142C | SEM003-01 | 2020/6/27 | 2023/6/26 | | |
| Pre-amplifier (0.1- 1.3GHz) | Agilent Technologie | 8447D | SEM005-01 | 2020/3/2 | 2021/3/1 | | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/A001610

Page: 98 of 99

| RE in Chamber | | | | | | |
|---------------------------------------|-----------------|---------------------|--------------|---------------------------|----------------------------|--|
| Test Equipment | Manufacturer | Model No. | Inventory No | Cal. Date (yyyy mm-dd) | Cal. Due date (yyyy-mm-dd) | |
| 10m Semi-Anechoic Chamber | SAEMC | FSAC1018 | SEM001-03 | 2018/3/31 | 2021/3/30 | |
| EMI Test Receiver (9k- 7GHz) | Rohde & Schwarz | ESR | SEM004-03 | 2020/3/2 | 2021/3/1 | |
| Trilog-Broadband Antenna(25M-2GHz) | Schwarzbeck | VULB9168 | SEM003-18 | 2020/3/15 | 2022/3/14 | |
| Pre-amplifier (9k-1GHz) | Sonoma | 310N | SEM005-03 | 2020/3/12 | 2021/3/11 | |
| Loop Antenna (9kHz- 30MHz) | ETS-Lindgren | 6502 | SEM003-08 | 2020/8/22 | 2023/8/21 | |
| Measurement Software | AUDIX | e3 V8.2014-6- 27 | N/A | N/A | N/A | |
| Coaxial Cable | SGS | N/A | SEM029-01 | 2020/6/12 | 2021/6/11 | |





Report No.: ZR/2020/A001610

Page: 99 of 99

7 **Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of Set-Up for ZR/2020/A0016.

The End

