



APPROVAL SHEET

PATHFINDER2 CAN/AUS PR20C ANT Spec

No. 1: Appoval Item

No. 2: Dimension

No. 3: Electrical Specification

No. 4: V.S.W.R DATA

SM Rope & Wire Co., Ltd


SM Rope & Wire Co., Ltd.

Head Office : Life B/D#539, 237, Gurjungang-ro, Guro-gu, SEOUL, KOREA

Tel: +82-2-2677 – 1697, 070-7019-9835 Fax: +82-2-2677 – 1698

E-mail: smco@smcorps.co.kr, <http://www.smcorps.co.kr>

No. 1: Appoval Item

Model Name	PR20C(Pathfinder2 CAN/AUS) ANT
Model Photo	
Coating Rope	Galvanized Steel Air Cable
Inner Cable	Air Cable 7 x 7
Inner Dia(MM)	2.38(- 0 ~ + 0.10)
Coating Material	Nylon PA 6 Black
Outer Dia(MM)	4.15(+/- 0.1)
Length(MM)	370(+/- 10)
Terminel / Tube	JOR4-4(KS C2620) / Tube 5 x 25MM
Hall Dia(MM)	d1:3.0(+/-0.2) / d2: 4.4(+/-0.2)
Terminel & Conneter Photo :	  

SM Rope & Wire Co., Ltd.


Head Office : Life B/D#539, 237, Gurjungang-ro, Guro-gu, SEOUL, KOREA

Tel: +82-2-2677 - 1697, 070-7019-9835 Fax: +82-2-2677 - 1698


E-mail: smco@smcorps.co.kr, <http://www.smcorps.co.kr>

No. 2: Dimension

2-1). Terminal

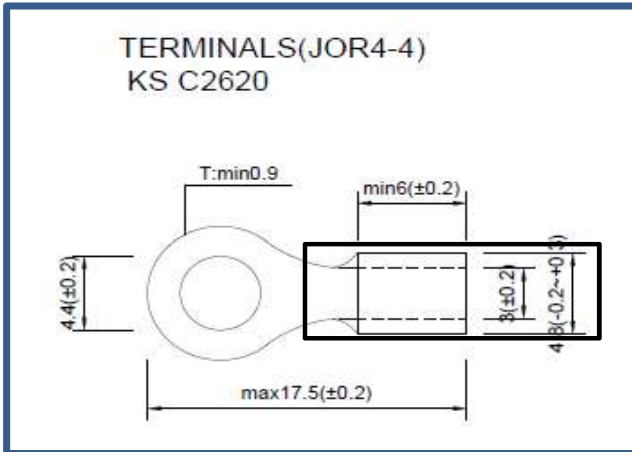


2-2). Inner Cable Construction

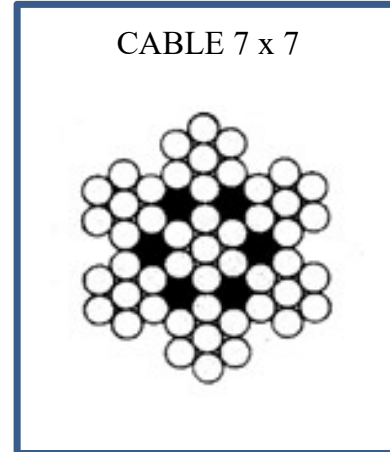

** TERMINAL 부의 수축튜브 5MM를 25MM로 절단후 수축

2-3). PR20C (Pathfinder2 CAN/AUS) ANT

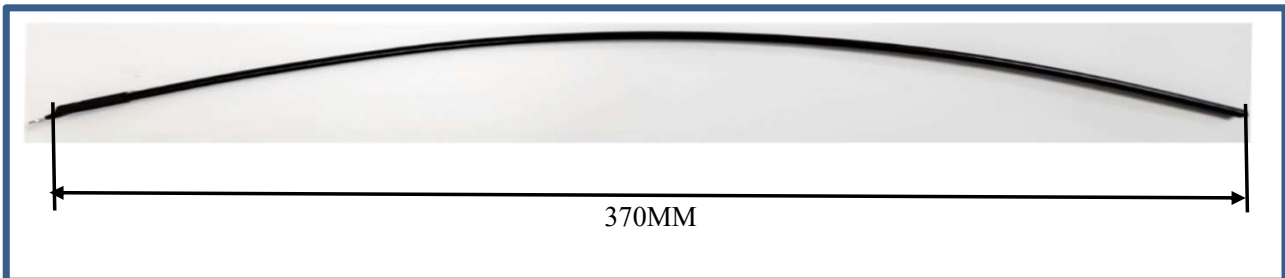

ITEM	Pathfinder2 CAN/AUS ANT
Demension	4.15mm * 370mm
Version	2023 - 02
	SM Rope & Wire Co.,Ltd

SM Rope & Wire Co., Ltd.

Head Office : Life B/D#539, 237, Gurjungang-ro, Guro-gu, SEOUL, KOREA

Tel: +82-2-2677 - 1697, 070-7019-9835 Fax: +82-2-2677 - 1698


E-mail: smco@smcorps.co.kr, <http://www.smcorps.co.kr>



No. 3: Electrical Specification

Electrical Specification	
Frequency Range	915MHz ~ 928MHz
V.S.W.R	1.55 : 1 Max
Gain(dBi)	0. $\pm$ 0.5
Radiation Patten	Omni-directional
Polarization	Vertical
Max Power(W)	5W Max
Impedance	50 Ω Normalizer

No. 4: V.S.W.R

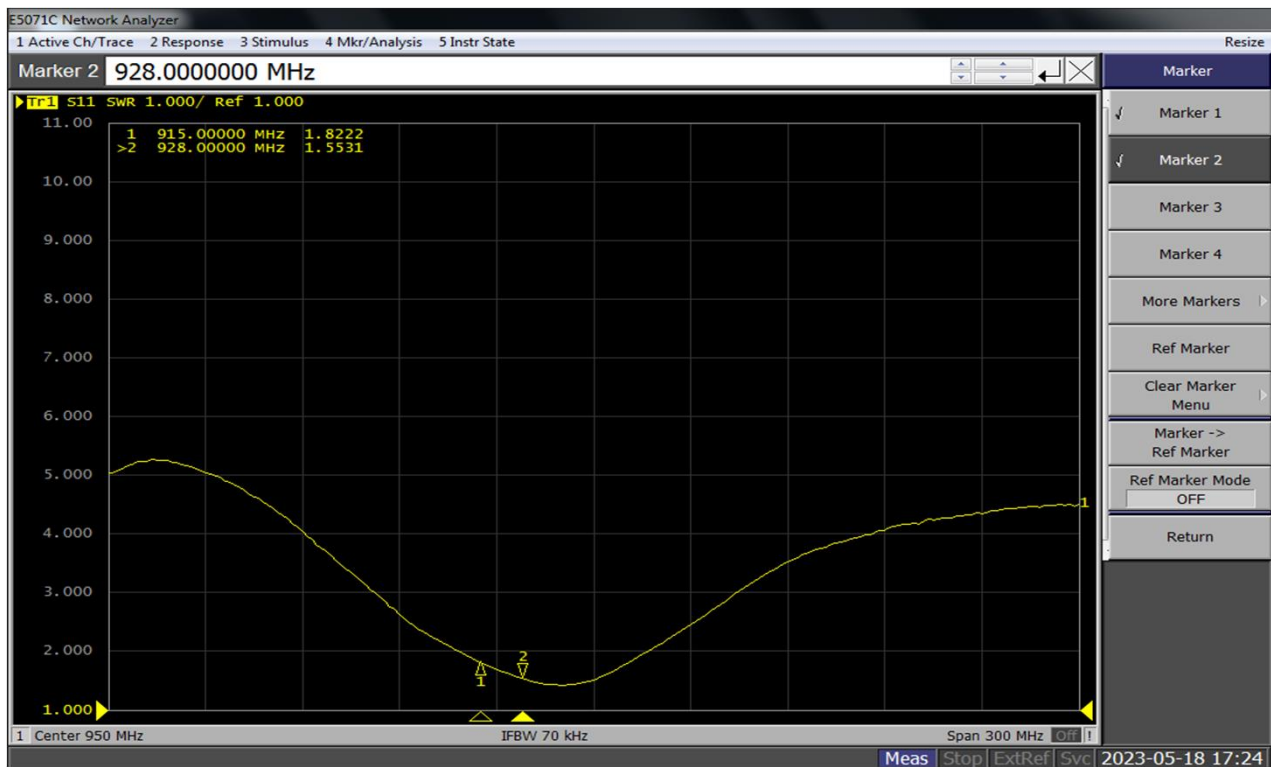

SM Rope & Wire Co., Ltd.

Head Office : Life B/D#539, 237, Gurljungang-ro, Guro-gu, SEOUL, KOREA

Tel: +82-2-2677 – 1697, 070-7019-9835 Fax: +82-2-2677 – 1698

E-mail: smco@smcorps.co.kr, <http://www.smcorps.co.kr>

Approval Specification

PM20C-BT ANT

Data : 2022. 2. 10

Version : 1.0

Table of Contents

1. Approval Check List	3
2. APPLICATION	4
2.1 Application	4
3. Antenna.....	5
3.1 Antenna Type	5
3.2 Electrical Performance Data.....	5
3.2.1 Electrical Specifications.....	5
3.2.2 VSWR/RL	5
3.2.3 Radiation Pattern	6
3.3 Antenna Drawing.....	7

1. Approval Check List

[illegible]

2. APPLICATION

2.1 Application

- This specification was described for the PM20C BT-ANT Specifications

3. Antenna

3.1 Antenna Type


- PCB Pattern Antenna

3.2 Electrical Performance Data


3.2.1 Electrical Specifications

No	Item		Spec	Remark
1	Frequency Range [GHz]		2.4 ~ 2.485	
2	VSWR		Max 2.5:1	
Radiation Gain	2.400 GHz	Peak Gain	-9. 31	
		Avg Gain	-14.403	
	2.440 GHz	Peak Gain	-7. 95	
		Avg Gain	-12.632	
	2.485 GHz	Peak Gain	-7. 57	
		Avg Gain	-12.663	

3.2.2 VSWR/RL

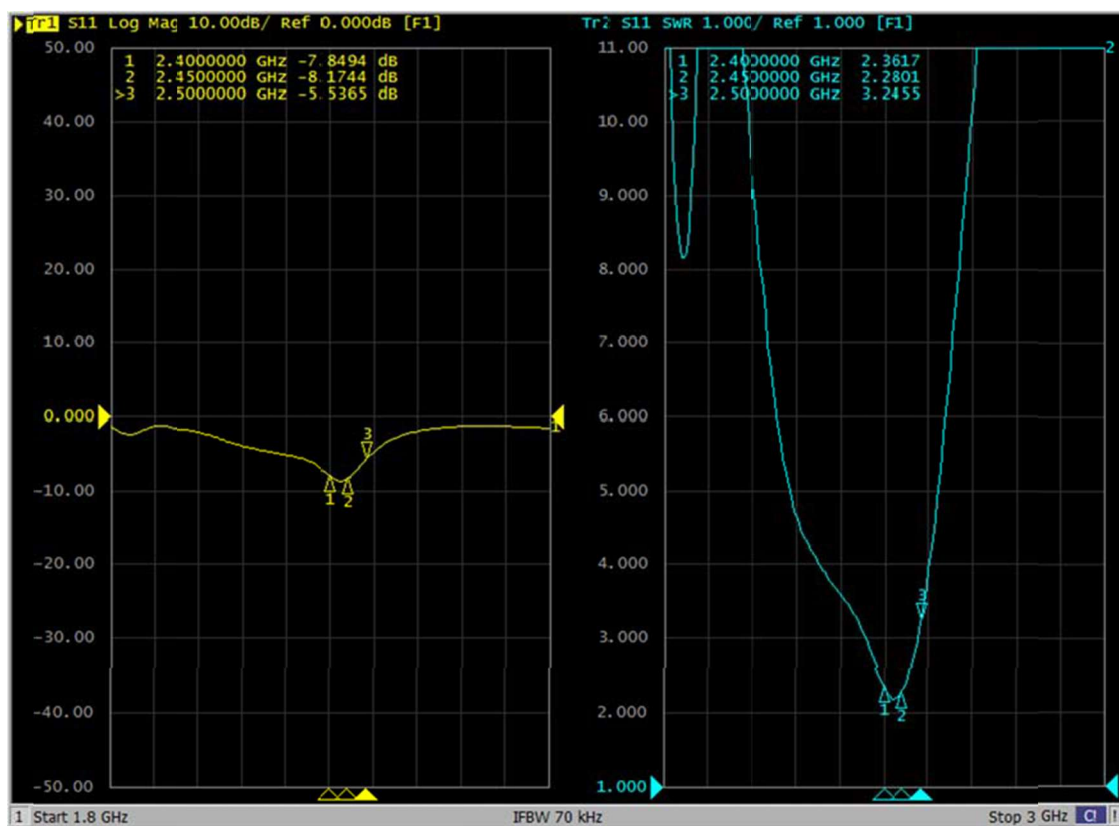

3.2.3 Radiation Pattern

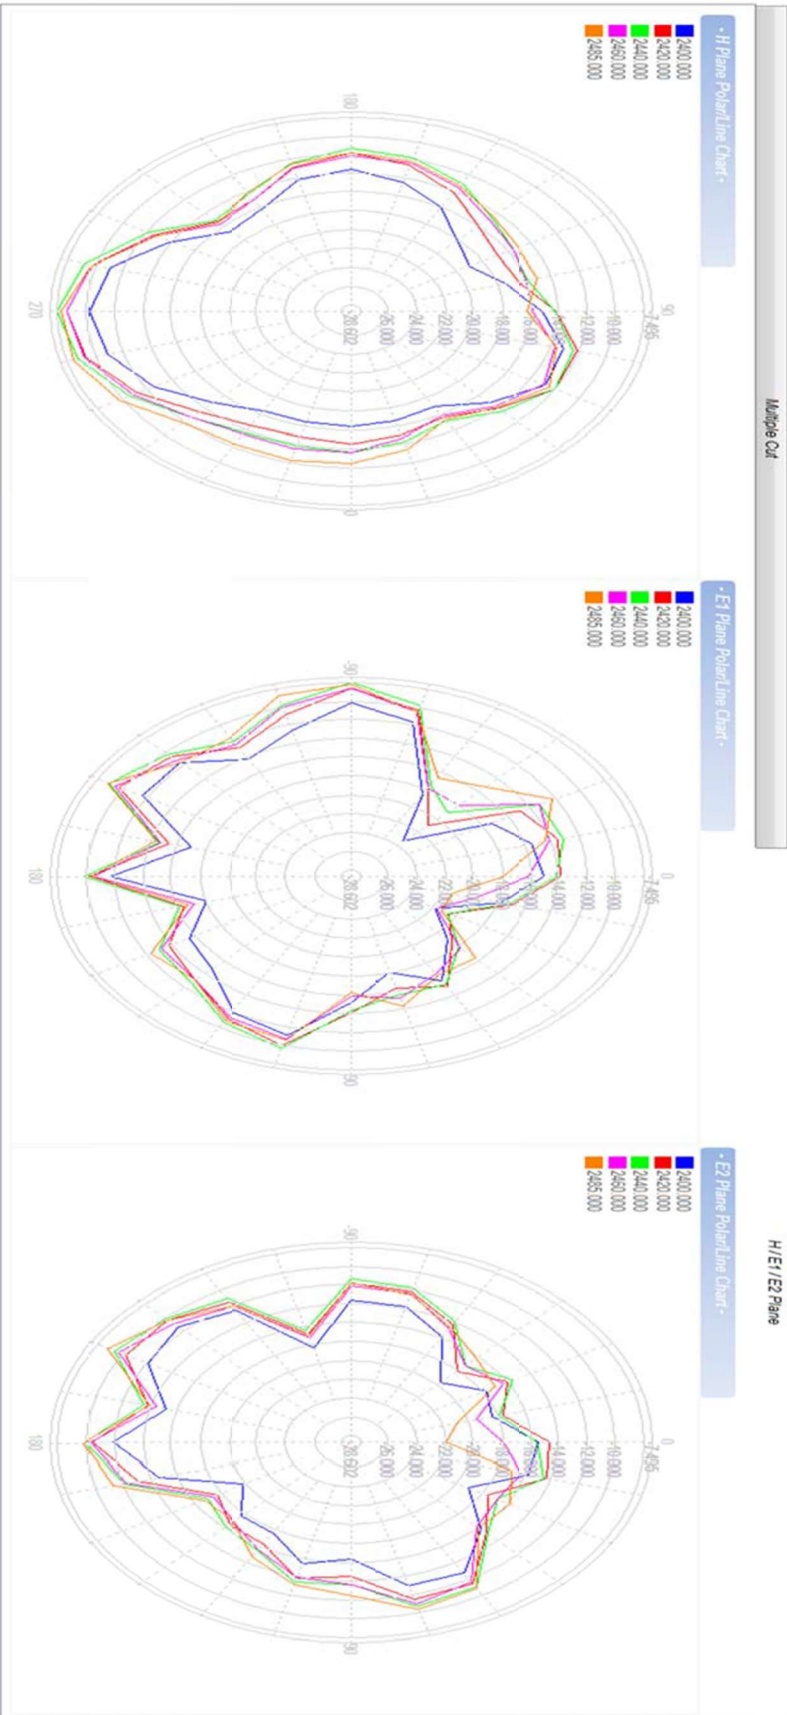[illegible]

3.3 Antenna Drawing

