

TEST REPORT

Applicant: Shenzhen Dangs Science and Technology Co., Ltd

Address of Applicant: 901,GDC Building,Keji Mid 3rd Road, Maling Community, Yuehai Sub-district,Nanshan, Shenzhen, China 518057

Manufacturer: Shenzhen Dangs Science and Technology Co., Ltd

Address of Manufacturer: 901,GDC Building,Keji Mid 3rd Road, Maling Community, Yuehai Sub-district,Nanshan, Shenzhen, China 518057

Factory: LENOVO(HUIYANG)ELECTRONIC INDUSTRIAL CO.,LTD

Address of Factory: LENOVO SCIENCE & TECHNOLOGY PARK,HUIYANG ECONOMIC DEVELOPMENT ZONE,HUIZHOU, GUANGDONG,CHINA

Equipment Under Test (EUT)

Product Name: Smart Projector

Model No.: DBX3 Pro, DBX*****, for internal coding and trading purpose, "*****" in model can respectively be 0-9, A-Z, +, -, /, () or blank.

FCC ID: 2AV2J-DBX3PRO

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: December 13, 2021

Date of Test: December 14-22, 2021

Date of report issue: December 23, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 23, 2021	Original

Prepared By:

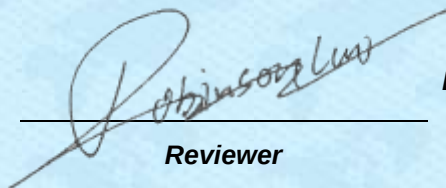


Date:

December 23, 2021

Project Engineer

Check By:



Date:

December 23, 2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY	7
5.4 TEST LOCATION.....	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 DEVIATION FROM STANDARDS	7
5.7 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT:	10
7.2 CONDUCTED EMISSIONS	11
7.3 EMISSION BANDWIDTH	14
7.4 PEAK TRANSMIT POWER	15
7.5 POWER SPECTRAL DENSITY	16
7.6 BAND EDGE.....	17
7.7 RADIATED EMISSION	25
7.8 FREQUENCY STABILITY	36
8 TEST SETUP PHOTO.....	37
9 EUT CONSTRUCTIONAL DETAILS	37

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	FCC part 15.203	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
99% Bandwidth	Report only	PASS
Emission Bandwidth	FCC part 15.407(a)	PASS
Peak Transmit Power	FCC part 15.407(a)(1)(2)	PASS
Power Spectral Density	FCC part 15.407(a) (1)(2)	PASS
Undesirable Emission	FCC part 15.407(b), 15.205/15.209	PASS
Radiated Emission	FCC part 15.205/15.209	PASS
Frequency Stability	FCC part 15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Smart Projector			
Model No.:	DBX3 Pro, DBX*****, for internal coding and trading purpose, “*****” in model can respectively be 0-9, A-Z, +, -, /, () or blank.			
Test Model No.:	DBX3 Pro			
Remark:All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for commercial purpose.				
Test sample(s) ID:	GTS202112000090-1			
Sample(s) Status:	Engineer sample			
S/N:	DZLX3P4213800169			
Hardware Version:	LU2_MB_V11			
Software Version:	2.2.4.0			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11a	5180-5240	4
		IEEE 802.11n/ac 20MHz	5180-5240	4
		IEEE 802.11n/ac 40MHz	5190-5230	2
		IEEE 802.11ac 80MHz	5210	1
	U-NII Band II-2A	IEEE 802.11a	5260-5320	4
		IEEE 802.11n/ac 20MHz	5260-5320	4
		IEEE 802.11n/ac 40MHz	5270-5310	2
		IEEE 802.11ac 80MHz	5290	1
	U-NII Band II-2C	IEEE 802.11a	5500-5700	11
		IEEE 802.11n/ac 20MHz	5500-5700	11
		IEEE 802.11n/ac 40MHz	5510-5670	5
		IEEE 802.11ac 80MHz	5530-5610	2
Modulation technology:	OFDM			
Antenna Type:	Integral Antenna			
Antenna gain:	ANT 1: 3.0dBi @Band I, 3.3dBi @Band II-2A, 4.1dBi @Band II-2C ANT 2: 3.4dBi @Band I, 2.7dBi @Band II-2A, 2.9dBi @Band II-2C			
Power supply:	ADAPTER MODEL: HKA180180A0-6B INPUT: AC 100-240V, 60/50Hz 2.5A OUTPUT: DC 18.0V/10A, 180W			

Channel list for 802.11a/n(HT20)/ac(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz
52	5260MHz	56	5280MHz	60	5300MHz	64	5320MHz
100	5500MHz	104	5520MHz	108	5540MHz	112	5560MHz
116	5580MHz	120	5600MHz	124	5620MHz	128	5640MHz
132	5660MHz	136	5680MHz	140	5700MHz		

Channel list for 802.11n(HT40)/ac(HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz	54	5270MHz	62	5310MHz
102	5510MHz	110	5550MHz	118	5590MHz	126	5630MHz
134	5670MHz						

Channel list for 802.11ac(HT80)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210MHz	58	5290MHz	106	5530MHz	122	5610MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..		
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
Mode	Data rate	Mode	Data rate
802.11a/n/ac(HT20)	6/6.5 Mbps	802.11ac(HT80)	29.3 Mbps
802.11n/ac(HT40)	13.5 Mbps		

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

● **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing .

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

None.

5.6 Deviation from Standards

None.

5.7 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 17 2021	Oct. 16 2022
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 17 2021	Oct. 16 2022
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 17 2021	Oct. 16 2022
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 24 2021	June. 23 2022
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 24 2021	June. 23 2022
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 24 2021	June. 23 2022
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 24 2021	June. 23 2022
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 24 2021	June. 23 2022
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	July. 09 2021	July. 08 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is integral antenna, reference to the appendix II for details	

7.2 Conducted Emissions

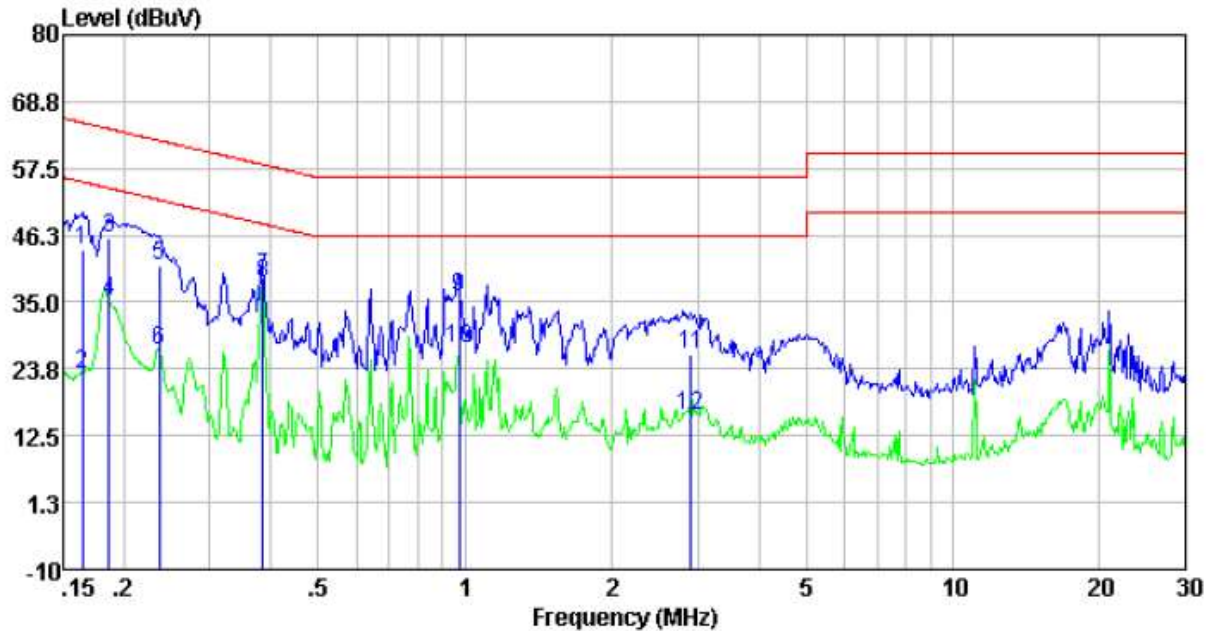
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test setup:	Reference Plane LISN 40cm AUX Equipment E.U.T 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:

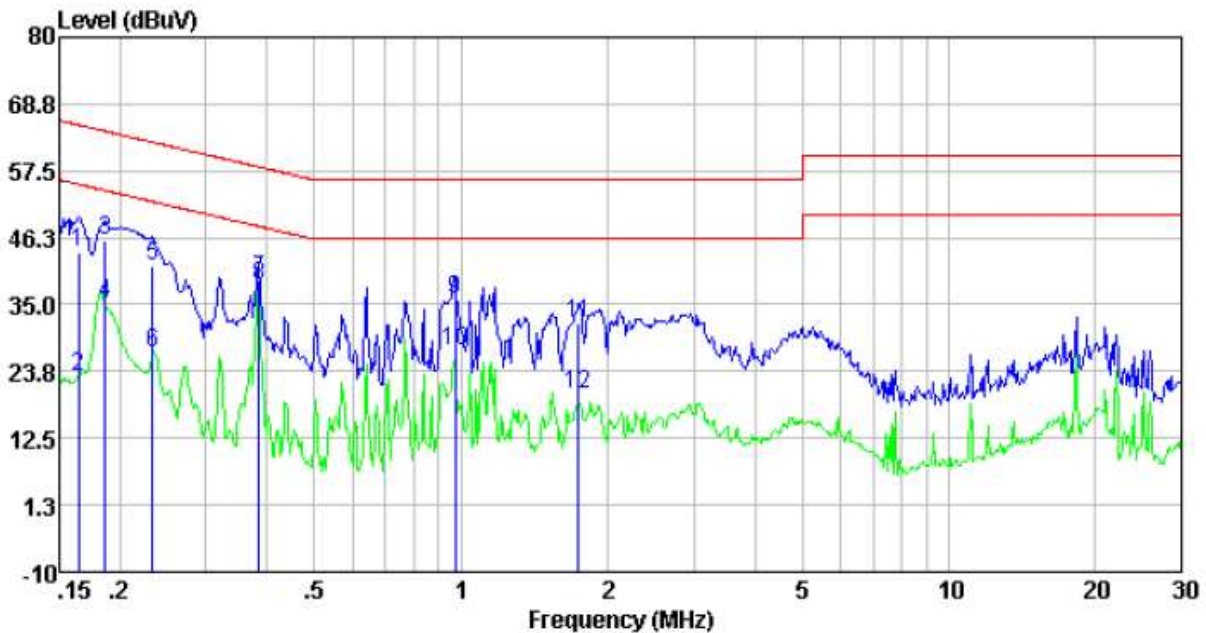
Pre-scan all test modes, found worst case at 802.11ac(VHT80) 5210MHz, and so only show the test result

Line:



Freq	Reading	LISN/ISM	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	33.53	10.40	0.01	43.94	65.25	-21.31	QP
0.16	12.62	10.40	0.01	23.03	55.25	-32.22	Average
0.19	35.29	10.40	0.01	45.70	64.20	-18.50	QP
0.19	24.65	10.40	0.01	35.06	54.20	-19.14	Average
0.24	30.84	10.40	0.01	41.25	62.22	-20.97	QP
0.24	16.30	10.40	0.01	26.71	52.22	-25.51	Average
0.39	28.74	10.36	0.01	39.11	58.17	-19.06	QP
0.39	27.64	10.36	0.01	38.01	48.17	-10.16	Average
0.97	25.56	10.20	0.03	35.79	56.00	-20.21	QP
0.97	16.92	10.20	0.03	27.15	46.00	-18.85	Average
2.90	15.90	10.20	0.05	26.15	56.00	-29.85	QP
2.90	5.80	10.20	0.05	16.05	46.00	-29.95	Average

Neutral:

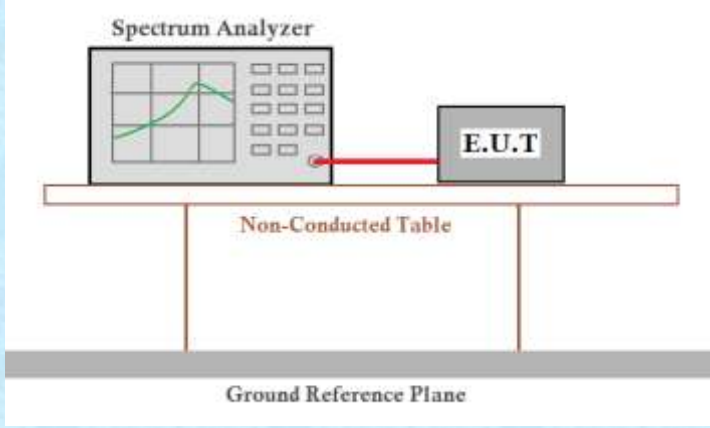


Freq	Reading level	LISN/ISN factor	Cable loss	Level	Limit level	Over limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	33.48	10.40	0.01	43.89	65.25	-21.36	QP
0.16	12.62	10.40	0.01	23.03	55.25	-32.22	Average
0.19	35.24	10.40	0.01	45.65	64.20	-18.55	QP
0.19	24.61	10.40	0.01	35.02	54.20	-19.18	Average
0.23	31.19	10.40	0.01	41.60	62.35	-20.75	QP
0.23	16.30	10.40	0.01	26.71	52.35	-25.64	Average
0.39	28.78	10.36	0.01	39.15	58.17	-19.02	QP
0.39	27.65	10.36	0.01	38.02	48.17	-10.15	Average
0.97	25.64	10.20	0.03	35.87	56.00	-20.13	QP
0.97	16.85	10.20	0.03	27.08	46.00	-18.92	Average
1.74	21.77	10.20	0.04	32.01	56.00	-23.99	QP
1.74	9.68	10.20	0.04	19.92	46.00	-26.08	Average

Notes:

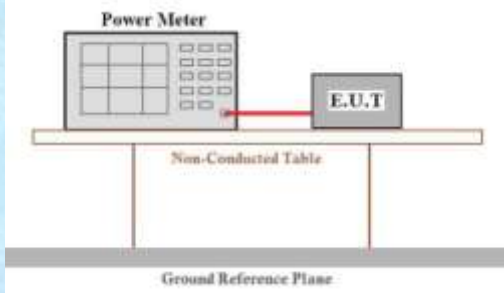
1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth

Test Requirement :	FCC Part15 E Section 15.407
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

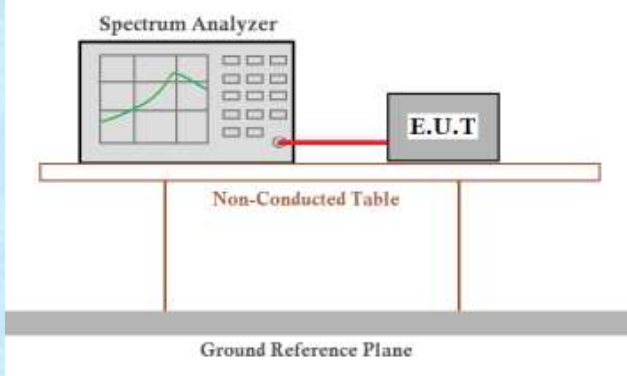
Measurement Data: The detailed test data see Appendix for WIFI 5G.

7.4 Peak Transmit Power

Test Requirement	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	≤1W(30dBm) for master device
		≤250Mw(23.98dBm) for client device
	5250-5350	≤250Mw(23.98dBm) for client device or 11dBm+10logB*
	5470-5725	≤250Mw(23.98dBm) for client device or 11dBm+10logB*
Remark: *Where B is the 26Db emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
IC Limit:	the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz	
Test setup:		
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding 10 log(1/x) where x is the duty cycle (e.g., 10log(1/0.25) if the duty cycle is 25 percent).	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix for WIFI 5G.

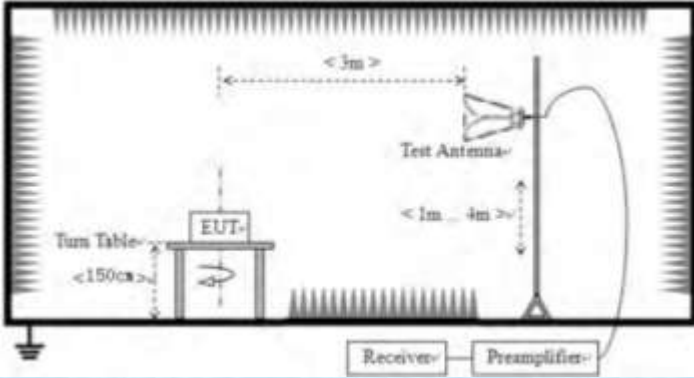
7.5 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm in 1MHz for master device
		≤11dBm in 1MHz for client device
	5250-5350	≤11dBm in 1MHz for client device
	5470-5725	≤11dBm in 1MHz for client device
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.		
IC Limit:	e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	
Test setup:		
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix for WIFI 5G.

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 5.205																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not																								

	have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	For radiated emissions above 1GHz 
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
4. According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$
For example, if $\text{EIRP} = -27\text{dBm}$
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

Measurement Data:

Worse case mode:		802.11a		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.92	-3.63	46.29	68.2	-21.91	peak	H
5150	45.72	-3.63	42.09	54	-11.91	AVG	H
5150	46.27	-3.63	42.64	68.2	-25.56	peak	V
5150	40.19	-3.63	36.56	54	-17.44	AVG	V

Worse case mode:		802.11a		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	46.37	-3.59	42.78	68.2	-25.42	peak	H
5350	45.44	-3.59	41.85	54	-12.15	AVG	H
5350	45.35	-3.59	41.76	68.2	-26.44	peak	V
5350	44.52	-3.59	40.93	54	-13.07	AVG	V

Worse case mode:		802.11a		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	49.06	-3.54	45.52	68.2	-22.68	peak	H
5460	45.87	-3.54	42.33	54	-11.67	AVG	H
5460	49.87	-3.54	46.33	68.2	-21.87	peak	V
5460	42.64	-3.54	39.1	54	-14.9	AVG	V

Worse case mode:		802.11a		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	49.57	-3.45	46.12	68.2	-22.08	peak	H
5725	40.81	-3.45	37.36	54	-16.64	AVG	H
5725	50.77	-3.45	47.32	68.2	-20.88	peak	V
5725	40.9	-3.45	37.45	54	-16.55	AVG	V

Worse case mode:		802.11n(HT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	47.06	-3.63	43.43	68.2	-24.77	peak	H
5150	43.24	-3.63	39.61	54	-14.39	AVG	H
5150	48.49	-3.63	44.86	68.2	-23.34	peak	V
5150	44.23	-3.63	40.6	54	-13.4	AVG	V

Worse case mode:		802.11n(HT20)		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	48.22	-3.59	44.63	68.2	-23.57	peak	H
5350	42.44	-3.59	38.85	54	-15.15	AVG	H
5350	49.86	-3.59	46.27	68.2	-21.93	peak	V
5350	41.35	-3.59	37.76	54	-16.24	AVG	V

Worse case mode:		802.11n(HT20)		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	46.34	-3.54	42.8	68.2	-25.4	peak	H
5460	45.85	-3.54	42.31	54	-11.69	AVG	H
5460	48.04	-3.54	44.5	68.2	-23.7	peak	V
5460	40.2	-3.54	36.66	54	-17.34	AVG	V

Worse case mode:		802.11n(HT20)		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	48.37	-3.45	44.92	68.2	-23.28	peak	H
5725	41.5	-3.45	38.05	54	-15.95	AVG	H
5725	46.56	-3.45	43.11	68.2	-25.09	peak	V
5725	42.36	-3.45	38.91	54	-15.09	AVG	V

Worse case mode:		802.11n(HT40)		Test Frequency:		5190MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	48.88	-3.63	45.25	68.2	-22.95	peak	H
5150	43.74	-3.63	40.11	54	-13.89	AVG	H
5150	49.51	-3.63	45.88	68.2	-22.32	peak	V
5150	42.03	-3.63	38.4	54	-15.6	AVG	V

Worse case mode:		802.11n(HT40)		Test Frequency:		5310MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	47.86	-3.59	44.27	68.2	-23.93	peak	H
5350	41.66	-3.59	38.07	54	-15.93	AVG	H
5350	48.92	-3.59	45.33	68.2	-22.87	peak	V
5350	45.99	-3.59	42.4	54	-11.6	AVG	V

Worse case mode:		802.11n(HT40)		Test Frequency:		5510MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	50.24	-3.54	46.7	68.2	-21.5	peak	H
5460	40.46	-3.54	36.92	54	-17.08	AVG	H
5460	48.4	-3.54	44.86	68.2	-23.34	peak	V
5460	41.26	-3.54	37.72	54	-16.28	AVG	V

Worse case mode:		802.11n(HT40)		Test Frequency:		5670MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	46.99	-3.45	43.54	68.2	-24.66	peak	H
5725	44.82	-3.45	41.37	54	-12.63	AVG	H
5725	50.86	-3.45	47.41	68.2	-20.79	peak	V
5725	40.66	-3.45	37.21	54	-16.79	AVG	V

Worse case mode:		802.11ac(HT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	48.33	-3.63	44.7	68.2	-23.5	peak	H
5150	43.09	-3.63	39.46	54	-14.54	AVG	H
5150	46.98	-3.63	43.35	68.2	-24.85	peak	V
5150	45.88	-3.63	42.25	54	-11.75	AVG	V

Worse case mode:		802.11ac(HT20)		Test Frequency:		5320MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	47.96	-3.59	44.37	68.2	-23.83	peak	H
5350	45.45	-3.59	41.86	54	-12.14	AVG	H
5350	46.21	-3.59	42.62	68.2	-25.58	peak	V
5350	44.73	-3.59	41.14	54	-12.86	AVG	V

Worse case mode:		802.11ac		Test Frequency:		5500MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	48.3	-3.54	44.76	68.2	-23.44	peak	H
5460	42.13	-3.54	38.59	54	-15.41	AVG	H
5460	47.97	-3.54	44.43	68.2	-23.77	peak	V
5460	41.76	-3.54	38.22	54	-15.78	AVG	V

Worse case mode:		802.11ac		Test Frequency:		5700MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	49.5	-3.45	46.05	68.2	-22.15	peak	H
5725	40.01	-3.45	36.56	54	-17.44	AVG	H
5725	48.33	-3.45	44.88	68.2	-23.32	peak	V
5725	41.23	-3.45	37.78	54	-16.22	AVG	V

Worse case mode:		802.11ac(VHT40)		Test Frequency:		5190MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.1	-3.63	45.47	68.2	-22.73	peak	H
5150	41.7	-3.63	38.07	54	-15.93	AVG	H
5150	47.92	-3.63	44.29	68.2	-23.91	peak	V
5150	44.8	-3.63	41.17	54	-12.83	AVG	V

Worse case mode:		802.11ac(VHT40)		Test Frequency:		5310MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	49.44	-3.59	45.85	68.2	-22.35	peak	H
5350	45.51	-3.59	41.92	54	-12.08	AVG	H
5350	49.76	-3.59	46.17	68.2	-22.03	peak	V
5350	42.08	-3.59	38.49	54	-15.51	AVG	V

Worse case mode:		802.11ac(VHT40)		Test Frequency:		5510MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	47.94	-3.54	44.4	68.2	-23.8	peak	H
5460	40.04	-3.54	36.5	54	-17.5	AVG	H
5460	49.34	-3.54	45.8	68.2	-22.4	peak	V
5460	45.49	-3.54	41.95	54	-12.05	AVG	V

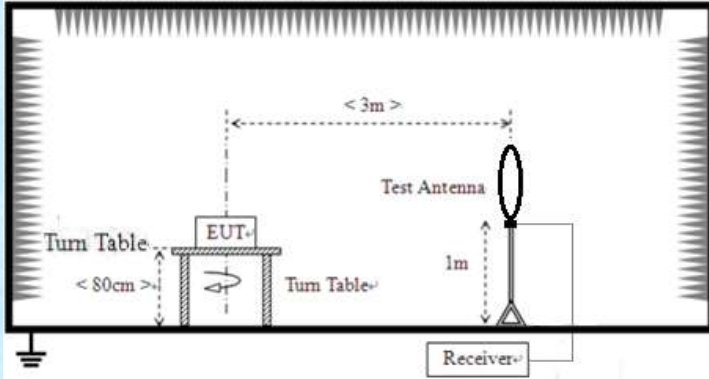
Worse case mode:		802.11ac(VHT40)		Test Frequency:		5670MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	46.8	-3.45	43.35	68.2	-24.85	peak	H
5725	45.55	-3.45	42.1	54	-11.9	AVG	H
5725	50.76	-3.45	47.31	68.2	-20.89	peak	V
5725	43.34	-3.45	39.89	54	-14.11	AVG	V

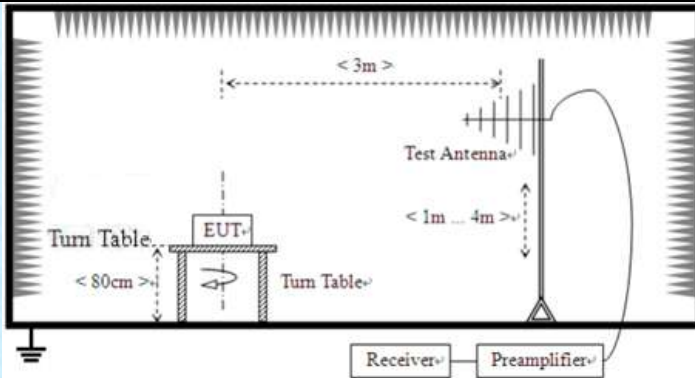
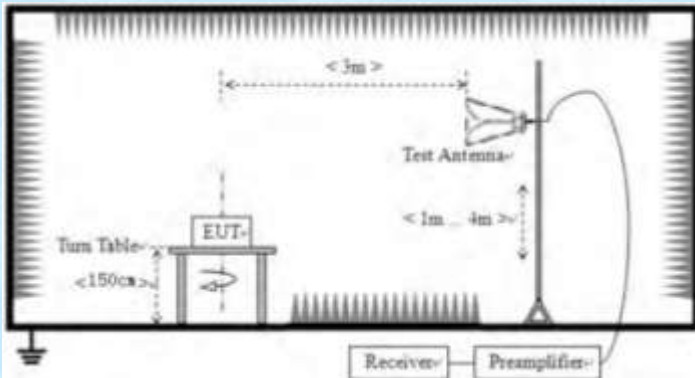
Worse case mode:		802.11ac(VHT80)		Test Frequency:		5210MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	47.57	-3.63	43.94	68.2	-24.26	peak	H
5150	41.77	-3.63	38.14	54	-15.86	AVG	H
5150	49.3	-3.63	45.67	68.2	-22.53	peak	V
5150	42.15	-3.63	38.52	54	-15.48	AVG	V
5350	48.45	-3.59	44.86	68.2	-23.34	peak	H
5350	40.98	-3.59	37.39	54	-16.61	AVG	H
5350	49.58	-3.59	45.99	68.2	-22.21	peak	V
5350	43.74	-3.59	40.15	54	-13.85	AVG	V

Worse case mode:		802.11ac(VHT80)		Test Frequency:		5610MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5460	49.73	-3.54	46.19	68.2	-22.01	peak	H
5460	42.61	-3.54	39.07	54	-14.93	AVG	H
5460	48.76	-3.54	45.22	68.2	-22.98	peak	V
5460	41.68	-3.54	38.14	54	-15.86	AVG	V
5725	47.3	-3.45	43.85	68.2	-24.35	peak	H
5725	43.45	-3.45	40	54	-14	AVG	H
5725	47.85	-3.45	44.4	68.2	-23.8	peak	V
5725	42.39	-3.45	38.94	54	-15.06	AVG	V

7.7 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205																												
Test Method :	ANSI C63.10: 2013																												
Test Frequency Range:	9kHz to 40GHz																												
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																								
AV		1MHz	3MHz	Average Value																									
FCC Limit:	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																												
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																												

	2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz

						
		For radiated emissions above 1GHz				
						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:

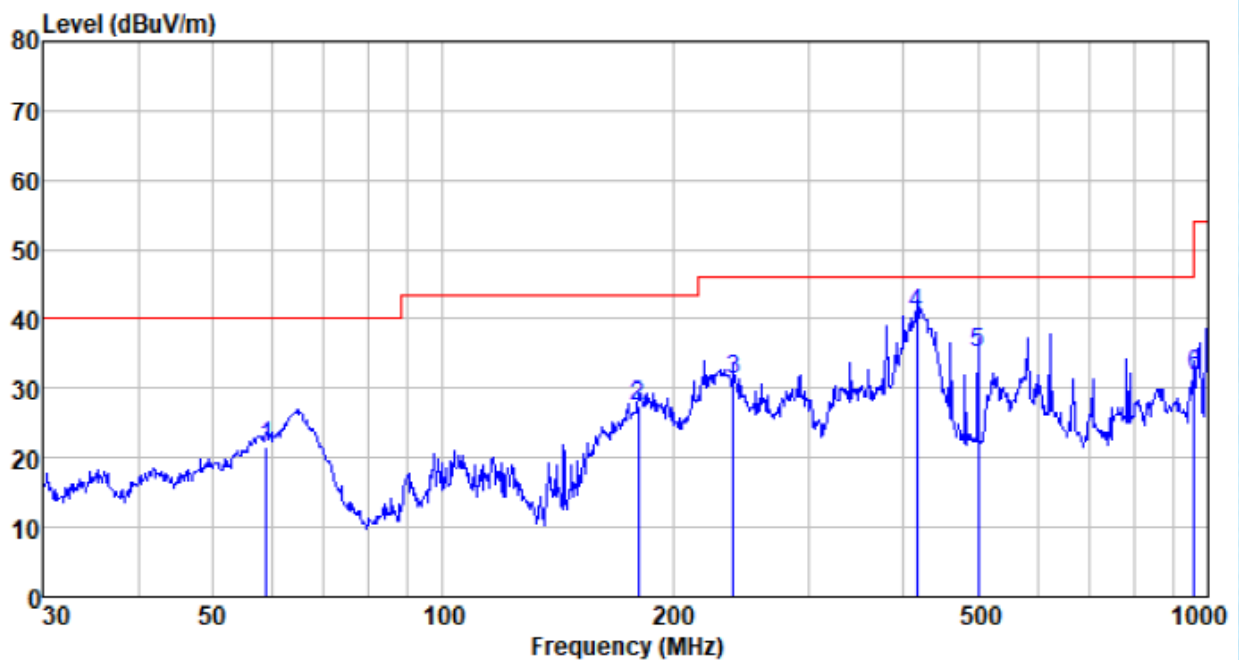
9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30MHz~ 1GHz

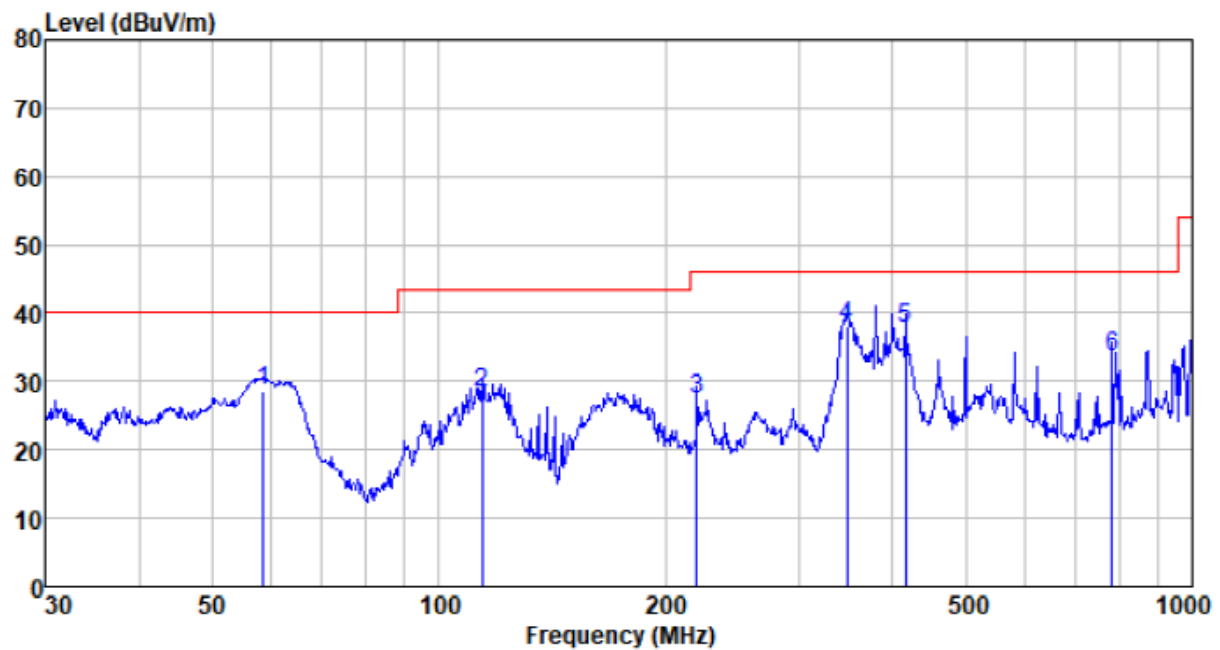
Pre-scan all test modes, found worst case at 802.11ac(HT20) 5200MHz, and so only show ANT 1 and the test result of 802.11ac(HT20) 5200MHz,

Horizontal:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
58.819	45.60	11.43	0.85	36.31	21.57	40.00	-18.43	QP
180.017	53.93	8.90	1.74	37.24	27.33	43.50	-16.17	QP
239.987	54.73	11.85	2.07	37.37	31.28	46.00	-14.72	QP
416.179	59.76	15.67	2.93	37.52	40.84	46.00	-5.16	QP
501.179	52.08	17.30	3.31	37.51	35.18	46.00	-10.82	QP
958.794	41.93	22.54	5.08	37.55	32.00	46.00	-14.00	QP

Vertical:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
58.407	52.60	11.45	0.85	36.30	28.60	40.00	-11.40	QP
114.114	53.40	10.43	1.31	36.84	28.30	43.50	-15.20	QP
219.845	51.57	11.13	1.96	37.35	27.31	46.00	-18.69	QP
348.027	58.36	14.48	2.61	37.47	37.98	46.00	-8.02	QP
416.179	56.64	15.67	2.93	37.52	37.72	46.00	-8.28	QP
782.345	45.81	21.09	4.40	37.62	33.68	46.00	-12.32	QP

Above 1GHz:

802.11ac(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	35.58	38.96	8.27	35.64	47.17	68.2	-21.03	Vertical
15540	33.78	38.4	10.57	35.35	47.4	68.2	-20.8	Vertical
10360	35.1	38.96	8.27	35.64	46.69	68.2	-21.51	Horizontal
15540	31.24	38.4	10.57	35.35	44.86	68.2	-23.34	Horizontal
10360	28.33	38.96	8.27	35.64	39.92	54	-14.08	Vertical
15540	26.75	38.4	10.57	35.35	40.37	54	-13.63	Vertical
10360	25.91	38.96	8.27	35.64	37.5	54	-16.5	Horizontal
15540	26.17	38.4	10.57	35.35	39.79	54	-14.21	Horizontal

802.11ac(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	35.77	39.01	8.29	35.67	47.4	68.2	-20.8	Vertical
15600	33.74	38.3	10.62	35.36	47.3	68.2	-20.9	Vertical
10400	35.46	39.01	8.29	35.67	47.09	68.2	-21.11	Horizontal
15600	29.58	38.3	10.62	35.36	43.14	68.2	-25.06	Horizontal
10400	29.05	39.01	8.29	35.67	40.68	54	-13.32	Vertical
15600	27.94	38.3	10.62	35.36	41.5	54	-12.5	Vertical
10400	24.62	39.01	8.29	35.67	36.25	54	-17.75	Horizontal
15600	25.14	38.3	10.62	35.36	38.7	54	-15.3	Horizontal

802.11ac(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	36.39	39.15	8.32	35.78	48.08	68.2	-20.12	Vertical
15720	32.94	38	10.72	35.37	46.29	68.2	-21.91	Vertical
10480	32.84	39.15	8.32	35.78	44.53	68.2	-23.67	Horizontal
15720	33.05	38	10.72	35.37	46.4	68.2	-21.8	Horizontal
10480	27.08	39.15	8.32	35.78	38.77	54	-15.23	Vertical
15720	24.72	38	10.72	35.37	38.07	54	-15.93	Vertical
10480	25.47	39.15	8.32	35.78	37.16	54	-16.84	Horizontal
15720	22.28	38	10.72	35.37	35.63	54	-18.37	Horizontal

802.11ac(HT20)					Test Frequency: 5260MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520	35.18	39.2	8.34	35.82	46.9	68.2	-21.3	Vertical
15780	34.09	37.9	10.77	35.38	47.38	68.2	-20.82	Vertical
10520	35.61	39.2	8.34	35.82	47.33	68.2	-20.87	Horizontal
15780	29.17	37.9	10.77	35.38	42.46	68.2	-25.74	Horizontal
10520	27.78	39.2	8.34	35.82	39.5	54	-14.5	Vertical
15780	25.45	37.9	10.77	35.38	38.74	54	-15.26	Vertical
10520	23.33	39.2	8.34	35.82	35.05	54	-18.95	Horizontal
15780	23.66	37.9	10.77	35.38	36.95	54	-17.05	Horizontal

802.11ac(HT20)					Test Frequency: 5300MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10600	36.58	39.22	8.37	35.93	48.24	68.2	-19.96	Vertical
15900	31.5	37.6	10.87	35.39	44.58	68.2	-23.62	Vertical
10600	32.56	39.22	8.37	35.93	44.22	68.2	-23.98	Horizontal
15900	33.57	37.6	10.87	35.39	46.65	68.2	-21.55	Horizontal
10600	29.8	39.22	8.37	35.93	41.46	54	-12.54	Vertical
15900	28.37	37.6	10.87	35.39	41.45	54	-12.55	Vertical
10600	27.38	39.22	8.37	35.93	39.04	54	-14.96	Horizontal
15900	22.31	37.6	10.87	35.39	35.39	54	-18.61	Horizontal

802.11ac(HT20)					Test Frequency: 5320MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640	33.66	39.22	8.38	35.96	45.3	68.2	-22.9	Vertical
15960	33.19	37.5	10.92	35.4	46.21	68.2	-21.99	Vertical
10640	32.89	39.22	8.38	35.96	44.53	68.2	-23.67	Horizontal
15960	29.1	37.5	10.92	35.4	42.12	68.2	-26.08	Horizontal
10640	28.25	39.22	8.38	35.96	39.89	54	-14.11	Vertical
15960	27.89	37.5	10.92	35.4	40.91	54	-13.09	Vertical
10640	24.5	39.22	8.38	35.96	36.14	54	-17.86	Horizontal
15960	25.73	37.5	10.92	35.4	38.75	54	-15.25	Horizontal

802.11ac(HT20)					Test Frequency: 5500MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000	33.99	39.3	8.53	36.4	45.42	68.2	-22.78	Vertical
16500	34.72	39.3	11.06	35.87	49.21	68.2	-18.99	Vertical
11000	32.59	39.3	8.53	36.4	44.02	68.2	-24.18	Horizontal
16500	33.01	39.3	11.06	35.87	47.5	68.2	-20.7	Horizontal
11000	26.71	39.3	8.53	36.4	38.14	54	-15.86	Vertical
16500	24.43	39.3	11.06	35.87	38.92	54	-15.08	Vertical
11000	24.93	39.3	8.53	36.4	36.36	54	-17.64	Horizontal
16500	22.17	39.3	11.06	35.87	36.66	54	-17.34	Horizontal

802.11ac(HT20)					Test Frequency: 5580MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160	36.35	39.33	8.6	36.37	47.91	68.2	-20.29	Vertical
16740	33.14	39.5	11.11	36.09	47.66	68.2	-20.54	Vertical
11160	33.16	39.33	8.6	36.37	44.72	68.2	-23.48	Horizontal
16740	33.36	39.5	11.11	36.09	47.88	68.2	-20.32	Horizontal
11160	29.14	39.33	8.6	36.37	40.7	54	-13.3	Vertical
16740	27.71	39.5	11.11	36.09	42.23	54	-11.77	Vertical
11160	23.67	39.33	8.6	36.37	35.23	54	-18.77	Horizontal
16740	26.35	39.5	11.11	36.09	40.87	54	-13.13	Horizontal

802.11ac(HT20)					Test Frequency: 5600MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11200	32.2	39.34	8.61	36.36	43.79	68.2	-24.41	Vertical
16800	32.81	39.54	11.13	36.13	47.35	68.2	-20.85	Vertical
11200	33.82	39.34	8.61	36.36	45.41	68.2	-22.79	Horizontal
16800	33.75	39.54	11.13	36.13	48.29	68.2	-19.91	Horizontal
11200	26.75	39.34	8.61	36.36	38.34	54	-15.66	Vertical
16800	27.09	39.54	11.13	36.13	41.63	54	-12.37	Vertical
11200	23.36	39.34	8.61	36.36	34.95	54	-19.05	Horizontal
16800	24.41	39.54	11.13	36.13	38.95	54	-15.05	Horizontal

802.11ac(HT20)					Test Frequency: 5700MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400	36.36	39.38	8.7	36.32	48.12	68.2	-20.08	Vertical
17100	32.84	40.22	11.26	36.29	48.03	68.2	-20.17	Vertical
11400	34.41	39.38	8.7	36.32	46.17	68.2	-22.03	Horizontal
17100	33.96	40.22	11.26	36.29	49.15	68.2	-19.05	Horizontal
11400	28	39.38	8.7	36.32	39.76	54	-14.24	Vertical
17100	25.3	40.22	11.26	36.29	40.49	54	-13.51	Vertical
11400	25.34	39.38	8.7	36.32	37.1	54	-16.9	Horizontal
17100	23.26	40.22	11.26	36.29	38.45	54	-15.55	Horizontal

802.11ac(HT40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	36.63	39.01	8.28	35.67	48.25	68.2	-19.95	Vertical
15570	32.29	38.3	10.6	35.36	45.83	68.2	-22.37	Vertical
10380	33.64	39.01	8.28	35.67	45.26	68.2	-22.94	Horizontal
15570	30.02	38.3	10.6	35.36	43.56	68.2	-24.64	Horizontal
10380	26.42	39.01	8.28	35.67	38.04	54	-15.96	Vertical
15570	25.92	38.3	10.6	35.36	39.46	54	-14.54	Vertical
10380	26.84	39.01	8.28	35.67	38.46	54	-15.54	Horizontal
15570	24.74	38.3	10.6	35.36	38.28	54	-15.72	Horizontal

802.11ac(HT40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	35.83	39.11	8.31	35.75	47.5	68.2	-20.7	Vertical
15690	32.65	38.1	10.7	35.37	46.08	68.2	-22.12	Vertical
10460	32.55	39.11	8.31	35.75	44.22	68.2	-23.98	Horizontal
15690	30.52	38.1	10.7	35.37	43.95	68.2	-24.25	Horizontal
10460	29.49	39.11	8.31	35.75	41.16	54	-12.84	Vertical
15690	28.64	38.1	10.7	35.37	42.07	54	-11.93	Vertical
10460	24.33	39.11	8.31	35.75	36	54	-18	Horizontal
15690	26.8	38.1	10.7	35.37	40.23	54	-13.77	Horizontal

802.11ac(HT40)					Test Frequency: 5270MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540	34.41	39.21	8.34	35.85	46.11	68.2	-22.09	Vertical
15810	32.5	37.8	10.79	35.38	45.71	68.2	-22.49	Vertical
10540	32.04	39.21	8.34	35.85	43.74	68.2	-24.46	Horizontal
15810	30.91	37.8	10.79	35.38	44.12	68.2	-24.08	Horizontal
10540	26.11	39.21	8.34	35.85	37.81	54	-16.19	Vertical
15810	28.56	37.8	10.79	35.38	41.77	54	-12.23	Vertical
10540	27.01	39.21	8.34	35.85	38.71	54	-15.29	Horizontal
15810	25.05	37.8	10.79	35.38	38.26	54	-15.74	Horizontal

802.11ac(HT40)					Test Frequency: 5310MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620	33.28	39.22	8.38	35.93	44.95	68.2	-23.25	Vertical
15930	30.33	37.5	10.89	35.4	43.32	68.2	-24.88	Vertical
10620	32.15	39.22	8.38	35.93	43.82	68.2	-24.38	Horizontal
15930	31.88	37.5	10.89	35.4	44.87	68.2	-23.33	Horizontal
10620	25.91	39.22	8.38	35.93	37.58	54	-16.42	Vertical
15930	26.48	37.5	10.89	35.4	39.47	54	-14.53	Vertical
10620	27.8	39.22	8.38	35.93	39.47	54	-14.53	Horizontal
15930	25.97	37.5	10.89	35.4	38.96	54	-15.04	Horizontal

802.11ac(HT40)					Test Frequency: 5510MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020	33.58	39.3	8.54	36.4	45.02	68.2	-23.18	Vertical
16530	34.07	39.34	11.07	35.91	48.57	68.2	-19.63	Vertical
11020	31.11	39.3	8.54	36.4	42.55	68.2	-25.65	Horizontal
16530	32.48	39.34	11.07	35.91	46.98	68.2	-21.22	Horizontal
11020	28.63	39.3	8.54	36.4	40.07	54	-13.93	Vertical
16530	27	39.34	11.07	35.91	41.5	54	-12.5	Vertical
11020	23.59	39.3	8.54	36.4	35.03	54	-18.97	Horizontal
16530	23.56	39.34	11.07	35.91	38.06	54	-15.94	Horizontal

802.11ac(HT40)					Test Frequency: 5550MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11100	32.08	39.32	8.57	36.38	43.59	68.2	-24.61	Vertical
16650	34.52	39.42	11.1	36	49.04	68.2	-19.16	Vertical
11100	34.26	39.32	8.57	36.38	45.77	68.2	-22.43	Horizontal
16650	32.16	39.42	11.1	36	46.68	68.2	-21.52	Horizontal
11100	29.26	39.32	8.57	36.38	40.77	54	-13.23	Vertical
16650	28.28	39.42	11.1	36	42.8	54	-11.2	Vertical
11100	25.09	39.32	8.57	36.38	36.6	54	-17.4	Horizontal
16650	24.74	39.42	11.1	36	39.26	54	-14.74	Horizontal

802.11ac(HT40)					Test Frequency: 5590MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11180	36.35	39.33	8.61	36.37	47.92	68.2	-20.28	Vertical
16770	32.14	39.54	11.12	36.13	46.67	68.2	-21.53	Vertical
11180	31.04	39.33	8.61	36.37	42.61	68.2	-25.59	Horizontal
16770	30.44	39.54	11.12	36.13	44.97	68.2	-23.23	Horizontal
11180	28.28	39.33	8.61	36.37	39.85	54	-14.15	Vertical
16770	27.58	39.54	11.12	36.13	42.11	54	-11.89	Vertical
11180	23.86	39.33	8.61	36.37	35.43	54	-18.57	Horizontal
16770	22.42	39.54	11.12	36.13	36.95	54	-17.05	Horizontal

802.11ac(HT40)					Test Frequency: 5670MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340	33.01	39.37	8.67	36.33	44.72	68.2	-23.48	Vertical
17010	30.36	39.7	11.18	36.3	44.94	68.2	-23.26	Vertical
11340	34.35	39.37	8.67	36.33	46.06	68.2	-22.14	Horizontal
17010	29.49	39.7	11.18	36.3	44.07	68.2	-24.13	Horizontal
11340	26.08	39.37	8.67	36.33	37.79	54	-16.21	Vertical
17010	24.77	39.7	11.18	36.3	39.35	54	-14.65	Vertical
11340	26.64	39.37	8.67	36.33	38.35	54	-15.65	Horizontal
17010	24.06	39.7	11.18	36.3	38.64	54	-15.36	Horizontal

802.11ac(HT80)					Test Frequency: 5210MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	36.51	39.06	8.29	35.71	48.15	68.2	-20.05	Vertical
15630	33.56	38.2	10.65	35.36	47.05	68.2	-21.15	Vertical
10420	34.72	39.06	8.29	35.71	46.36	68.2	-21.84	Horizontal
15630	33.66	38.2	10.65	35.36	47.15	68.2	-21.05	Horizontal
10420	29.24	39.06	8.29	35.71	40.88	54	-13.12	Vertical
15630	27.53	38.2	10.65	35.36	41.02	54	-12.98	Vertical
10420	25.17	39.06	8.29	35.71	36.81	54	-17.19	Horizontal
15630	26.8	38.2	10.65	35.36	40.29	54	-13.71	Horizontal

802.11ac(HT80)					Test Frequency: 5290MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10580	34.59	39.21	8.36	35.89	46.27	68.2	-21.93	Vertical
15870	30.21	37.7	10.85	35.39	43.37	68.2	-24.83	Vertical
10580	34.24	39.21	8.36	35.89	45.92	68.2	-22.28	Horizontal
15870	31.88	37.7	10.85	35.39	45.04	68.2	-23.16	Horizontal
10580	26.63	39.21	8.36	35.89	38.31	54	-15.69	Vertical
15870	27.05	37.7	10.85	35.39	40.21	54	-13.79	Vertical
10580	25.11	39.21	8.36	35.89	36.79	54	-17.21	Horizontal
15870	23.71	37.7	10.85	35.39	36.87	54	-17.13	Horizontal

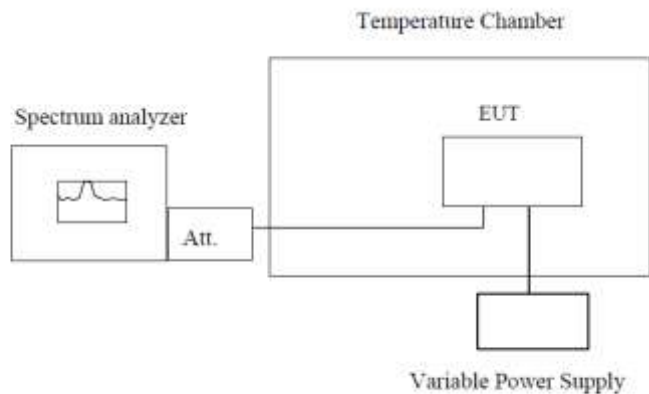
802.11ac(HT80)					Test Frequency: 5530MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11060	36.13	39.31	8.56	36.39	47.61	68.2	-20.59	Vertical
16590	30.21	39.38	11.08	35.96	44.71	68.2	-23.49	Vertical
11060	33.26	39.31	8.56	36.39	44.74	68.2	-23.46	Horizontal
16590	29.98	39.38	11.08	35.96	44.48	68.2	-23.72	Horizontal
11060	27.28	39.31	8.56	36.39	38.76	54	-15.24	Vertical
16590	28.41	39.38	11.08	35.96	42.91	54	-11.09	Vertical
11060	24.32	39.31	8.56	36.39	35.8	54	-18.2	Horizontal
16590	26.35	39.38	11.08	35.96	40.85	54	-13.15	Horizontal

802.11ac(HT80)					Test Frequency: 5610MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11220	33.91	39.34	8.62	36.36	45.51	68.2	-22.69	Vertical
16830	34.67	39.58	11.13	36.17	49.21	68.2	-18.99	Vertical
11220	33.43	39.34	8.62	36.36	45.03	68.2	-23.17	Horizontal
16830	33.59	39.58	11.13	36.17	48.13	68.2	-20.07	Horizontal
11220	26.2	39.34	8.62	36.36	37.8	54	-16.2	Vertical
16830	27.74	39.58	11.13	36.17	42.28	54	-11.72	Vertical
11220	26.86	39.34	8.62	36.36	38.46	54	-15.54	Horizontal
16830	23.88	39.58	11.13	36.17	38.42	54	-15.58	Horizontal

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamplifier Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. all were test, only the ANT 1 test result recorded in the report.

7.8 Frequency stability

Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055,
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 5G.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---