



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11570.521	31.79	15.07	46.86	54.00	-7.14	AVG
2	11570.840	45.16	15.07	60.23	74.00	-13.77	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.329	45.63	15.06	60.69	74.00	-13.31	peak
2 *	11570.523	32.18	15.07	47.25	54.00	-6.75	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11649.081	31.34	15.13	46.47	54.00	-7.53	AVG
2	11650.546	45.14	15.14	60.28	74.00	-13.72	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.627	45.69	15.14	60.83	74.00	-13.17	peak
2 *	11650.936	32.08	15.14	47.22	54.00	-6.78	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11489.600	41.16	15.00	56.16	74.00	-17.84	peak
2 *	11490.021	25.92	15.01	40.93	54.00	-13.07	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.435	27.86	15.00	42.86	54.00	-11.14	AVG
2	11490.702	41.88	15.01	56.89	74.00	-17.11	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11569.032	27.67	15.06	42.73	54.00	-11.27	AVG
2	11569.829	41.20	15.06	56.26	74.00	-17.74	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.027	43.43	15.06	58.49	74.00	-15.51	peak
2 *	11569.924	29.13	15.06	44.19	54.00	-9.81	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.426	40.99	15.13	56.12	74.00	-17.88	peak
2 *	11649.813	26.92	15.13	42.05	54.00	-11.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.268	28.26	15.13	43.39	54.00	-10.61	AVG
2	11649.687	42.09	15.13	57.22	74.00	-16.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11509.572	23.37	15.00	38.37	54.00	-15.63	AVG
2	11509.931	39.16	15.00	54.16	74.00	-19.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11509.889	24.46	15.00	39.46	54.00	-14.54	AVG
2	11510.771	38.65	15.01	53.66	74.00	-20.34	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11589.225	24.13	15.08	39.21	54.00	-14.79	AVG
2	11589.676	39.11	15.08	54.19	74.00	-19.81	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11589.874	25.93	15.08	41.01	54.00	-12.99	AVG
2	11590.628	41.61	15.09	56.70	74.00	-17.30	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.639	23.35	15.00	38.35	54.00	-15.65	AVG
2	11490.920	38.53	15.01	53.54	74.00	-20.46	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.063	23.01	14.99	38.00	54.00	-16.00	AVG
2	11489.833	39.11	15.00	54.11	74.00	-19.89	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11569.307	23.48	15.06	38.54	54.00	-15.46	AVG
2	11570.071	38.99	15.07	54.06	74.00	-19.94	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.827	39.71	15.06	54.77	74.00	-19.23	peak
2 *	11570.405	24.20	15.07	39.27	54.00	-14.73	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.534	37.80	15.13	52.93	74.00	-21.07	peak
2 *	11651.000	21.70	15.14	36.84	54.00	-17.16	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.597	23.47	15.13	38.60	54.00	-15.40	AVG
2	11650.781	39.76	15.14	54.90	74.00	-19.10	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11510.057	23.63	15.01	38.64	54.00	-15.36	AVG
2	11510.947	39.61	15.01	54.62	74.00	-19.38	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (VHT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.220	39.89	15.00	54.89	74.00	-19.11	peak
2 *	11510.922	24.71	15.01	39.72	54.00	-14.28	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac (VHT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11589.835	24.23	15.08	39.31	54.00	-14.69	AVG
2	11590.977	38.99	15.09	54.08	74.00	-19.92	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11589.017	26.18	15.08	41.26	54.00	-12.74	AVG
2	11589.759	41.19	15.08	56.27	74.00	-17.73	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11550.129	38.83	15.05	53.88	74.00	-20.12	peak
2 *	11550.569	22.53	15.05	37.58	54.00	-16.42	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11549.057	23.35	15.04	38.39	54.00	-15.61	AVG
2	11550.026	38.61	15.04	53.65	74.00	-20.35	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.171	25.36	15.00	40.36	54.00	-13.64	AVG
2	11489.915	39.73	15.00	54.73	74.00	-19.27	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.791	23.79	15.00	38.79	54.00	-15.21	AVG
2	11489.853	37.82	15.00	52.82	74.00	-21.18	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.857	39.85	15.06	54.91	74.00	-19.09	peak
2 *	11570.856	24.97	15.07	40.04	54.00	-13.96	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11569.748	23.81	15.06	38.87	54.00	-15.13	AVG
2	11570.577	38.60	15.07	53.67	74.00	-20.33	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11649.433	24.52	15.13	39.65	54.00	-14.35	AVG
2	11650.187	38.85	15.14	53.99	74.00	-20.01	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.759	38.17	15.13	53.30	74.00	-20.70	peak
2 *	11650.827	23.87	15.14	39.01	54.00	-14.99	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11509.500	23.99	15.00	38.99	54.00	-15.01	AVG
2	11510.367	38.97	15.01	53.98	74.00	-20.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11510.185	38.40	15.01	53.41	74.00	-20.59	peak
2 *	11510.875	23.38	15.01	38.39	54.00	-15.61	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11589.458	38.80	15.08	53.88	74.00	-20.12	peak
2 *	11589.626	24.17	15.08	39.25	54.00	-14.75	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11589.023	38.93	15.08	54.01	74.00	-19.99	peak
2 *	11590.087	23.73	15.09	38.82	54.00	-15.18	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11550.588	38.16	15.05	53.21	74.00	-20.79	peak
2 *	11550.995	23.88	15.05	38.93	54.00	-15.07	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11550.307	23.76	15.05	38.81	54.00	-15.19	AVG
2	11550.819	38.70	15.05	53.75	74.00	-20.25	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)/ RSS-247 6.2.1.2 & RSS-247 6.2.4.2


Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)


2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

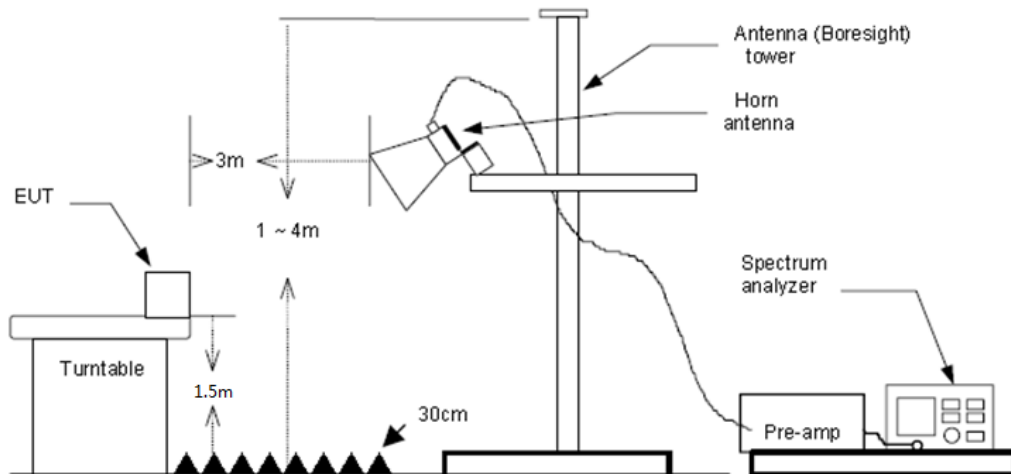

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:



RBW=1MHz, VBW=3MHz PEAK detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Appendix E: Duty Cycle

Test Mode

Please refer to the clause 2.4.


Test Results

Pre-scan all antenna, only show the test data for worse case antenna on the test report.

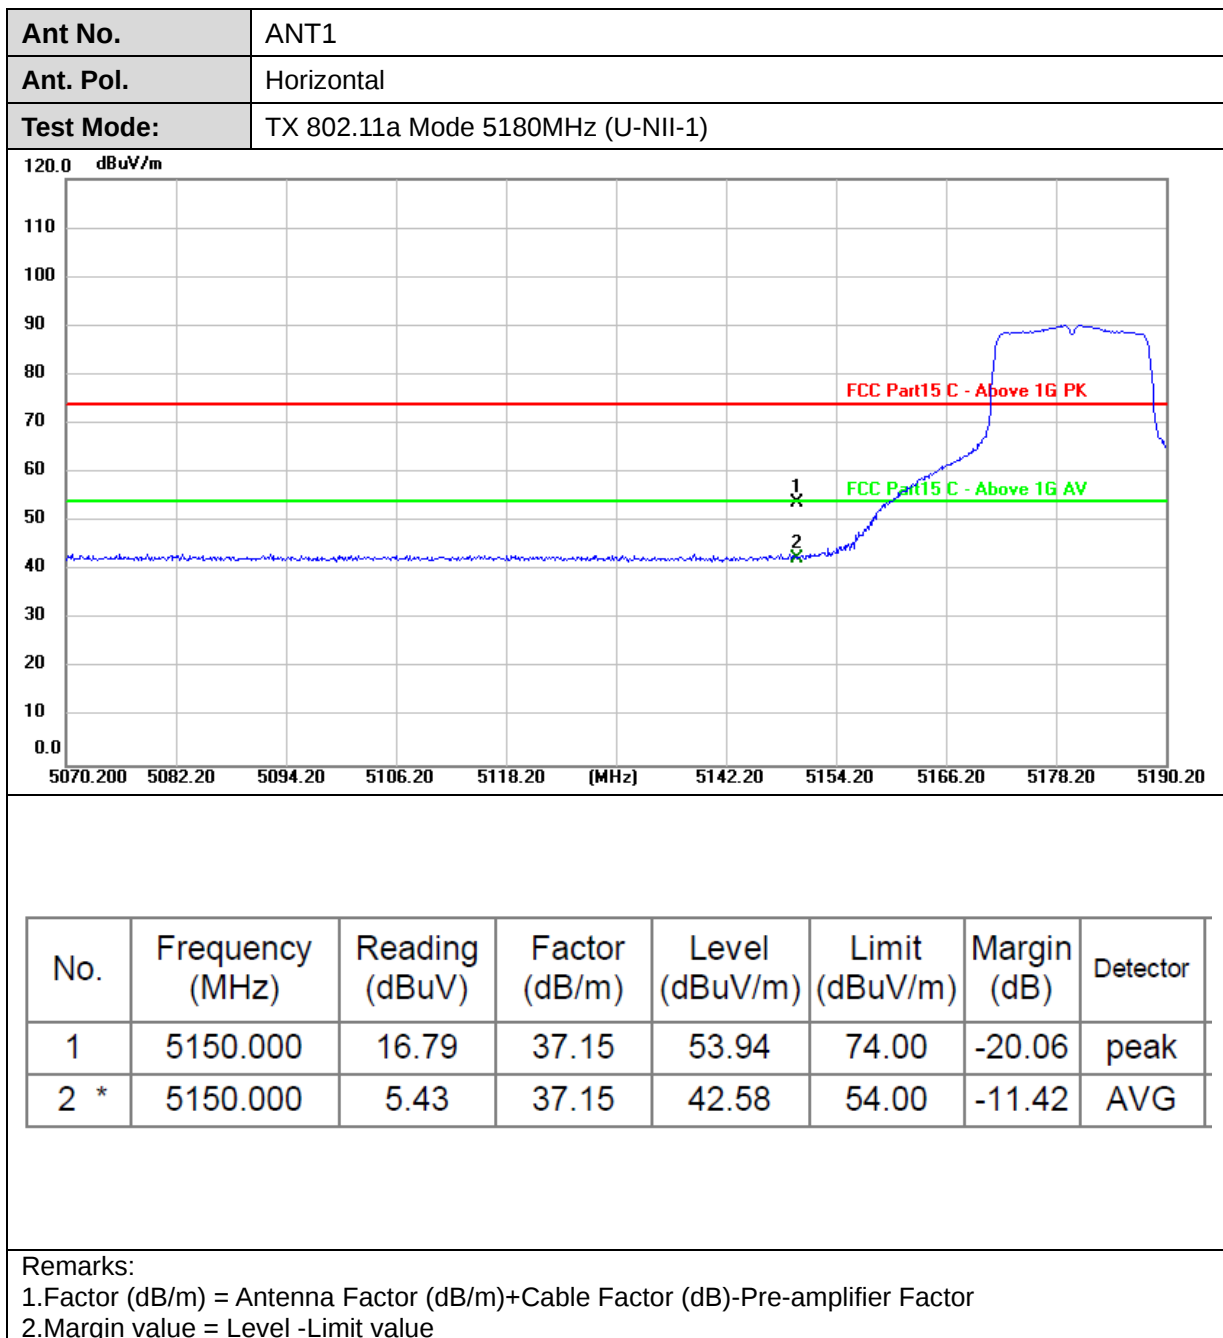




Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)

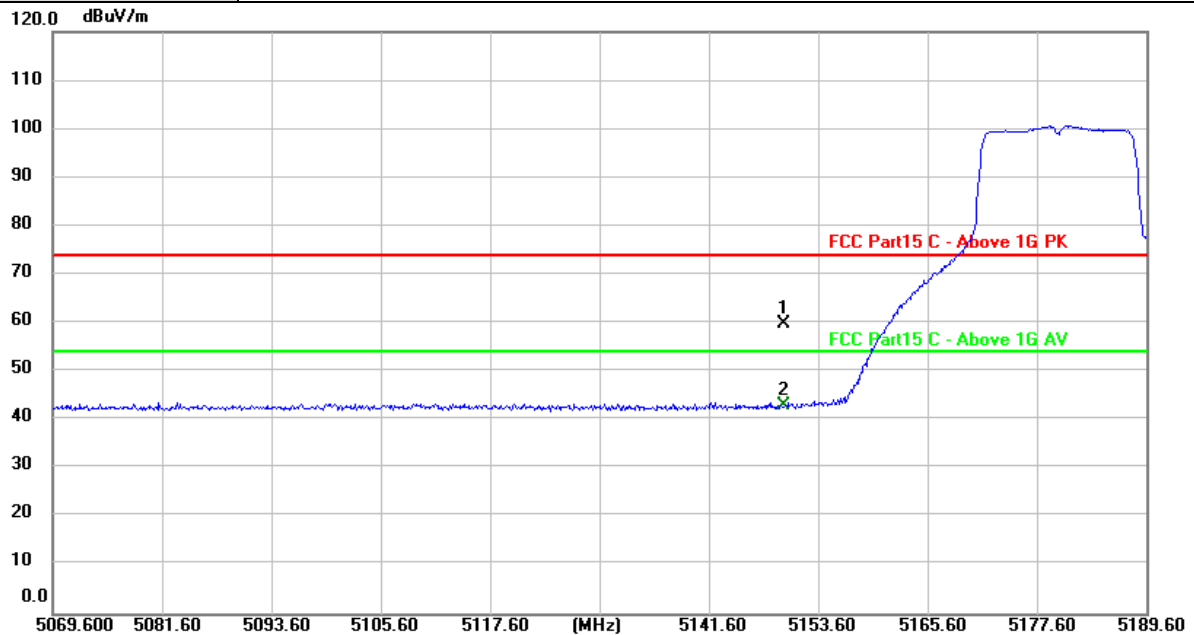


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	22.83	37.15	59.98	74.00	-14.02	peak
2 *	5150.000	5.91	37.15	43.06	54.00	-10.94	AVG

Remarks:


- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

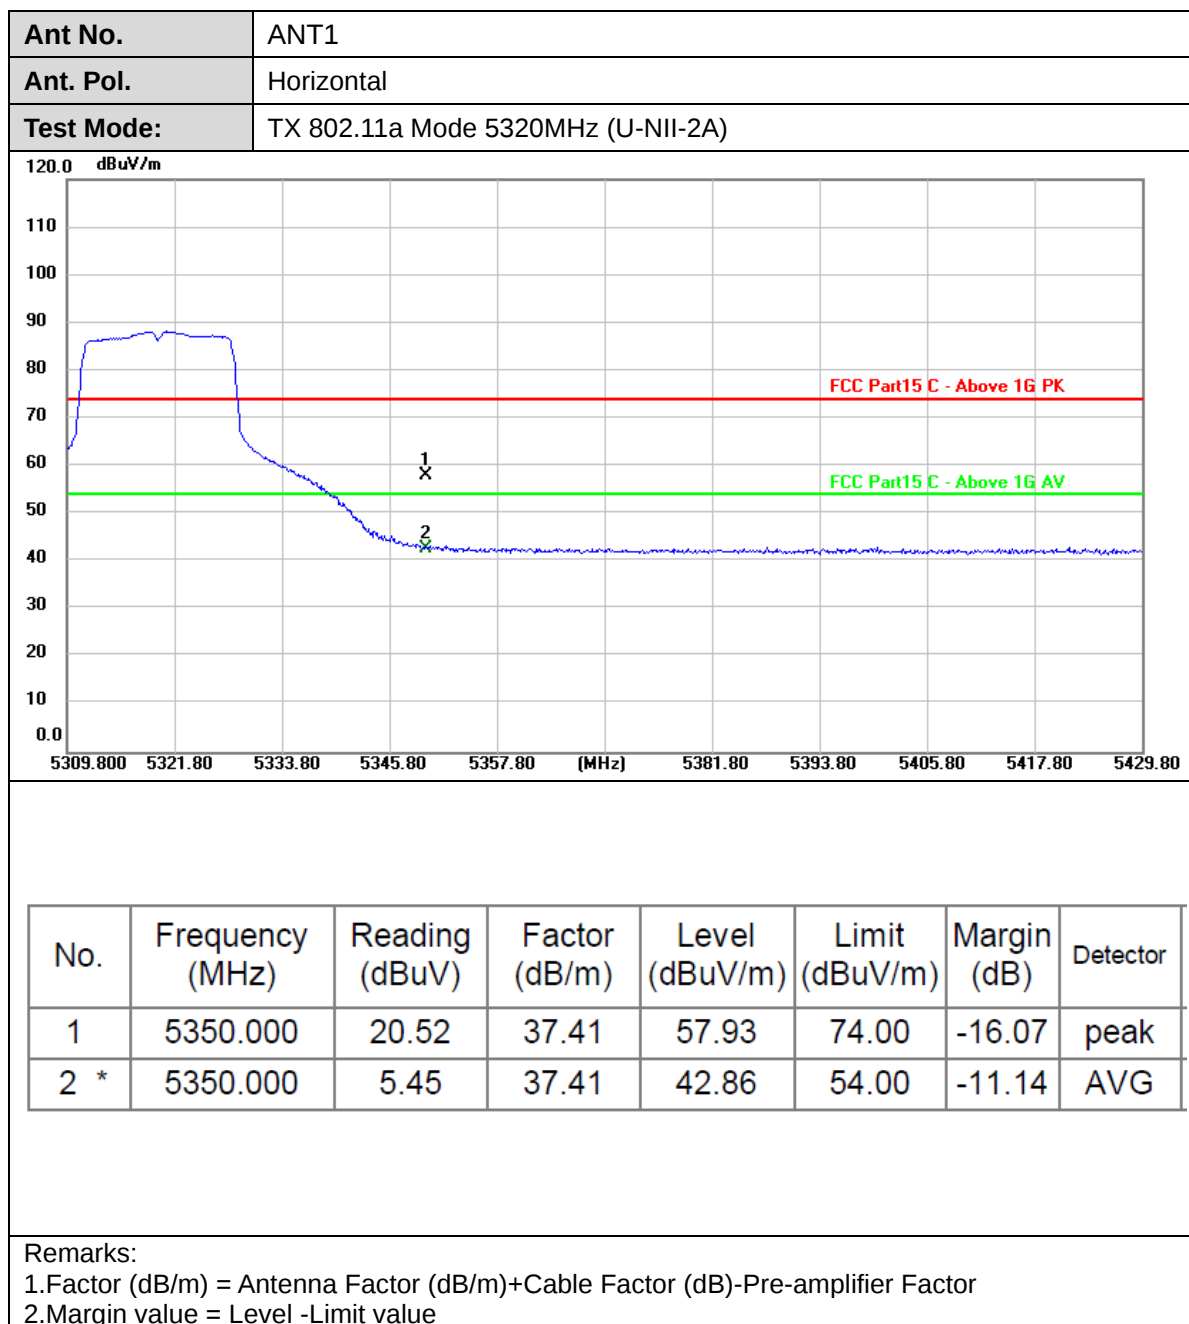

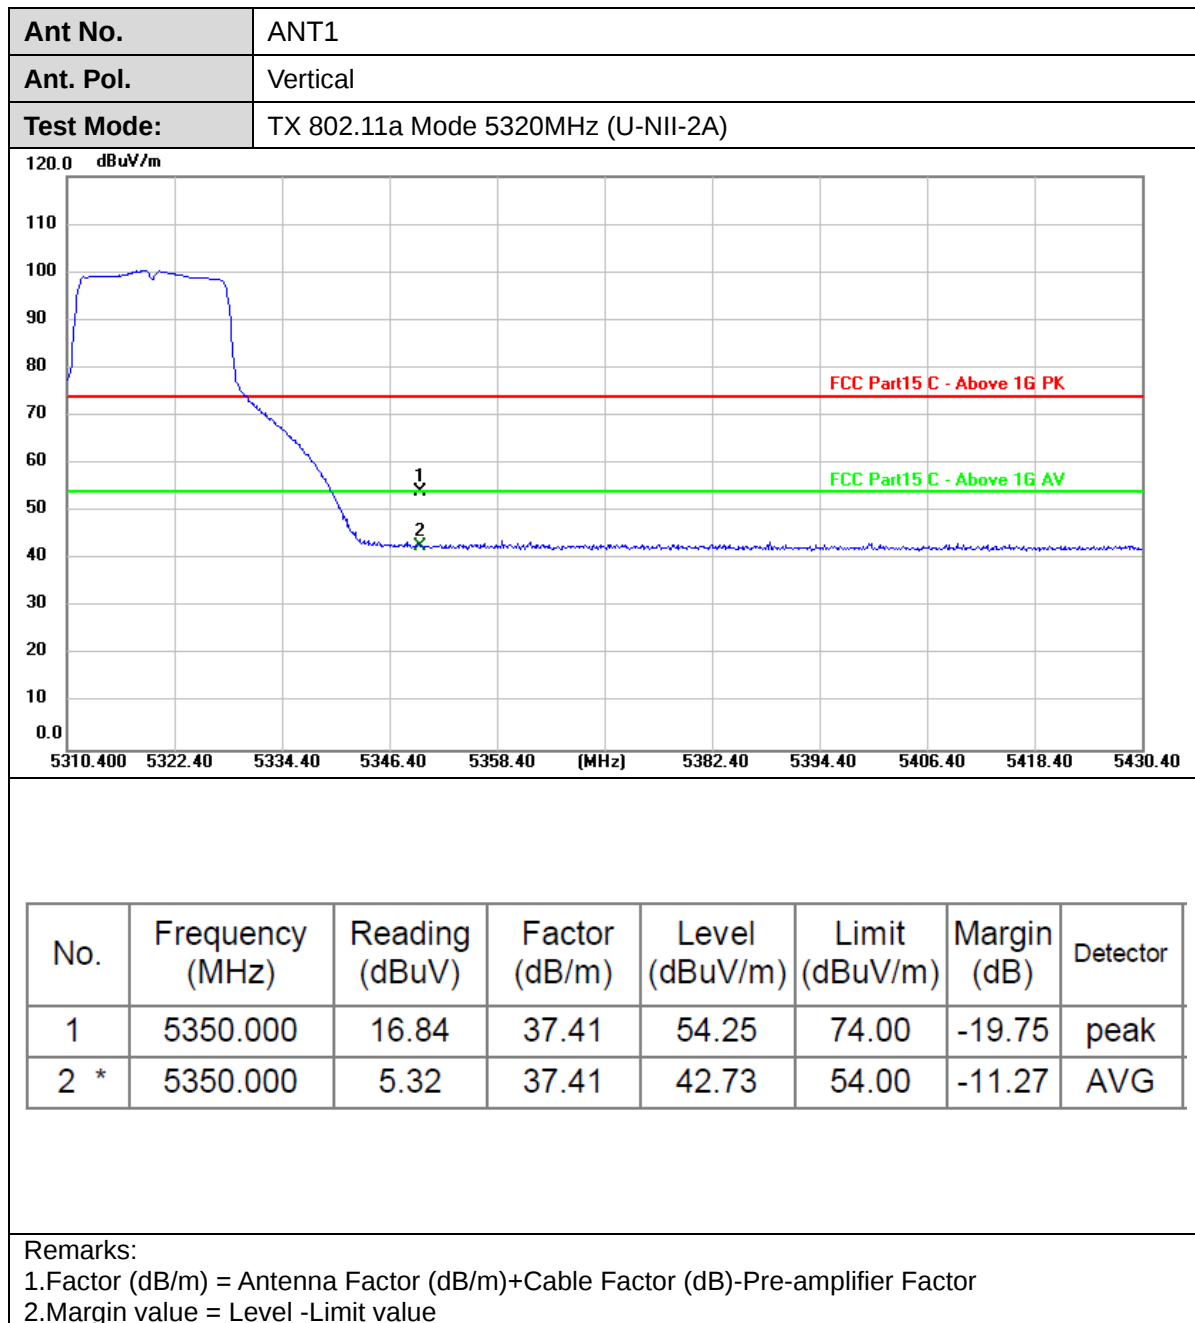



Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)

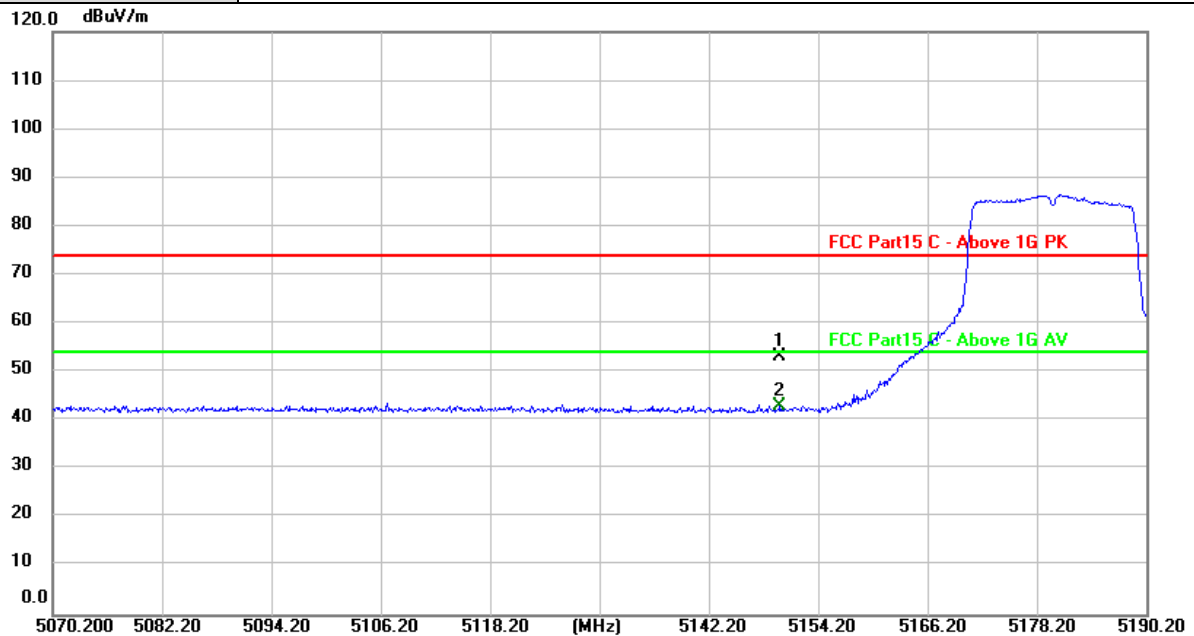


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	16.19	37.15	53.34	74.00	-20.66	peak
2 *	5150.000	5.97	37.15	43.12	54.00	-10.88	AVG

Remarks:


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

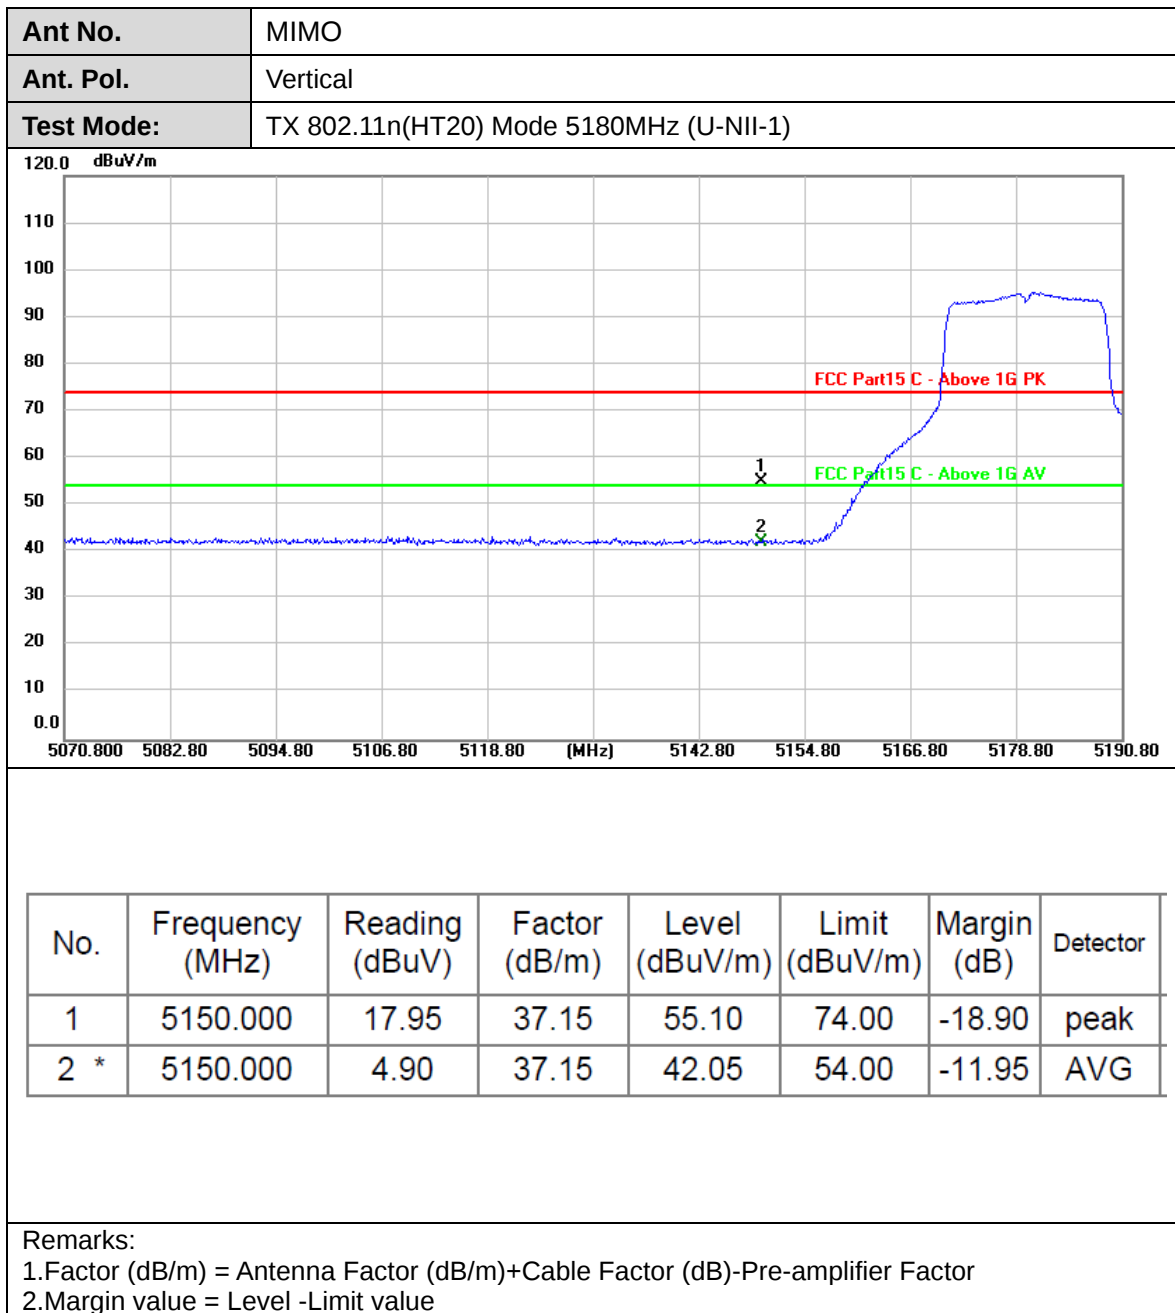



Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)

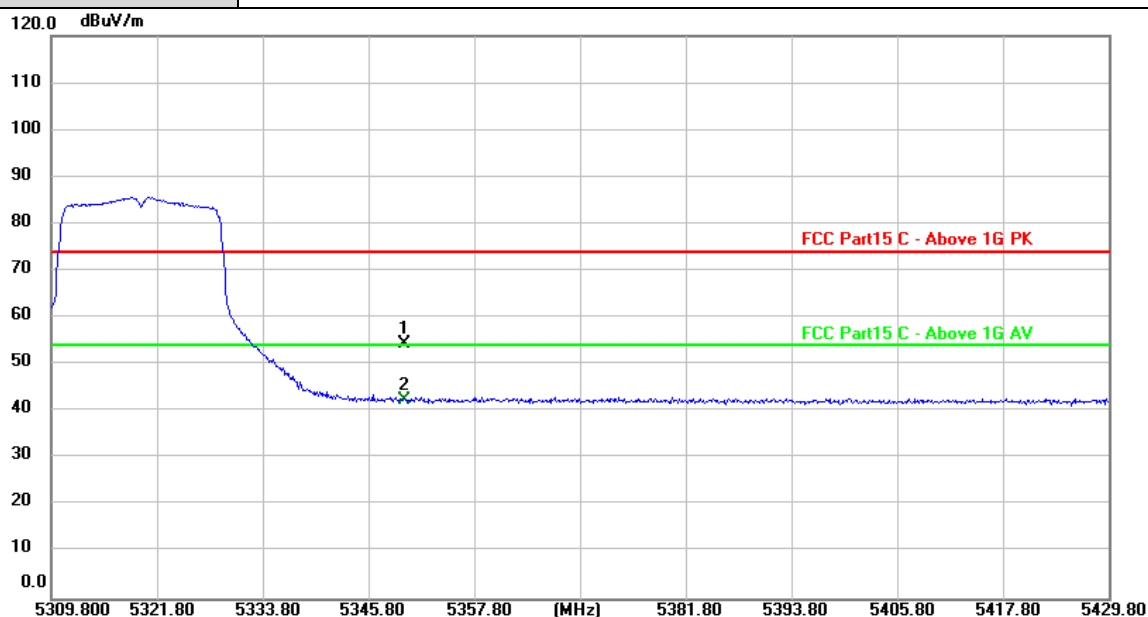

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	16.95	37.41	54.36	74.00	-19.64	peak
2 *	5350.000	5.17	37.41	42.58	54.00	-11.42	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)

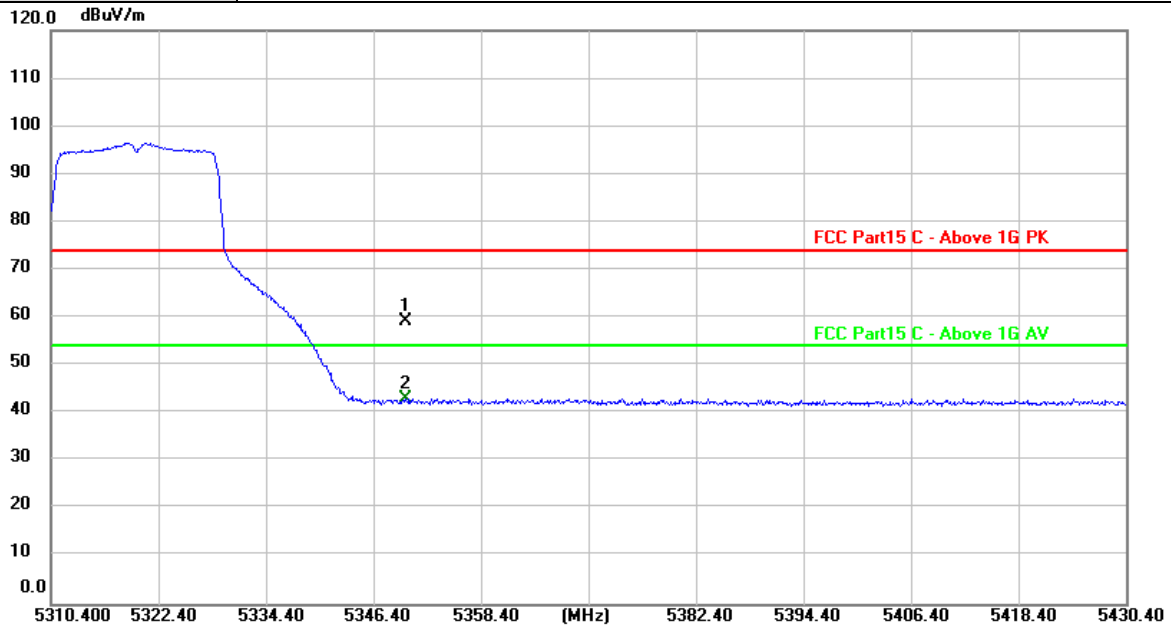


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	21.81	37.41	59.22	74.00	-14.78	peak
2 *	5350.000	5.55	37.41	42.96	54.00	-11.04	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

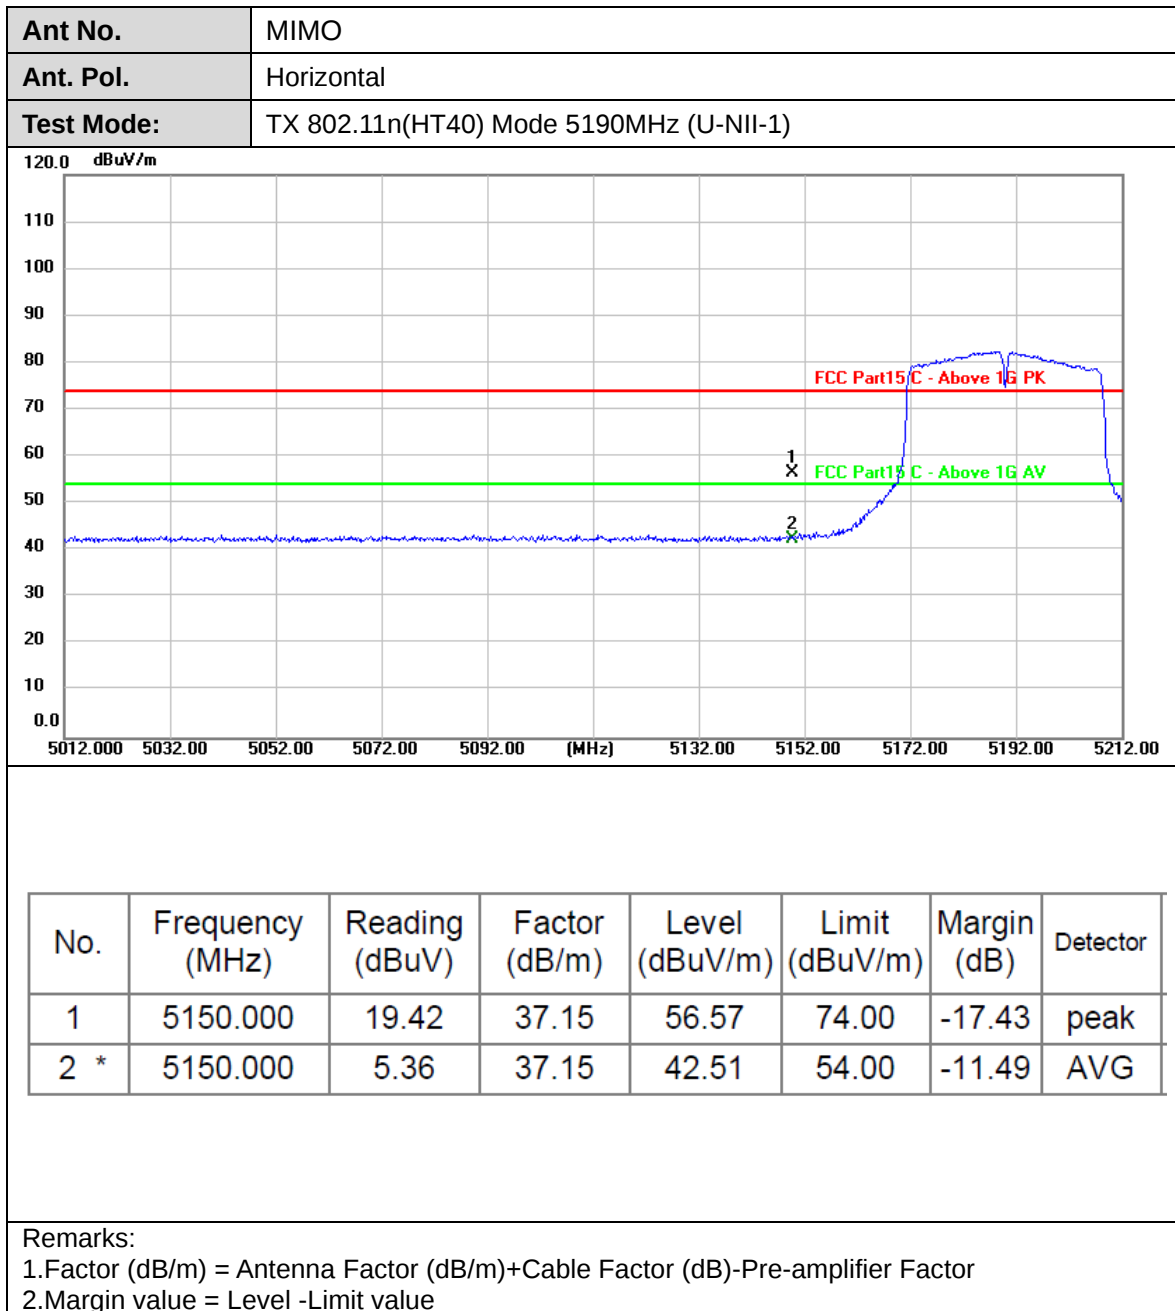



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)

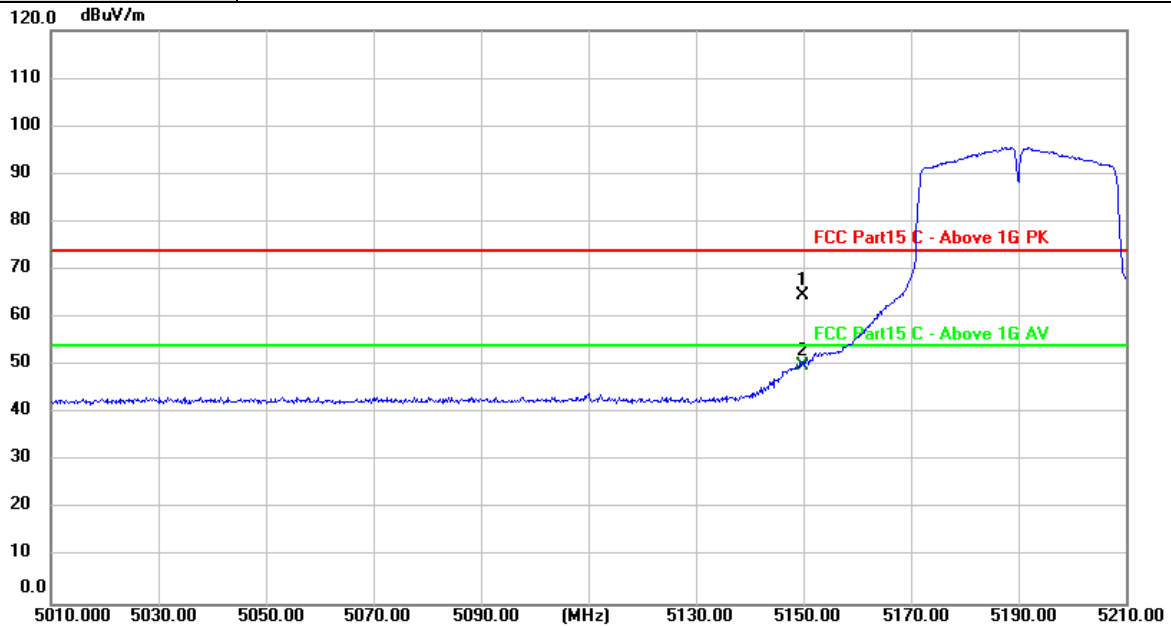


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	27.37	37.15	64.52	74.00	-9.48	peak
2 *	5150.000	12.73	37.15	49.88	54.00	-4.12	AVG

Remarks:


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

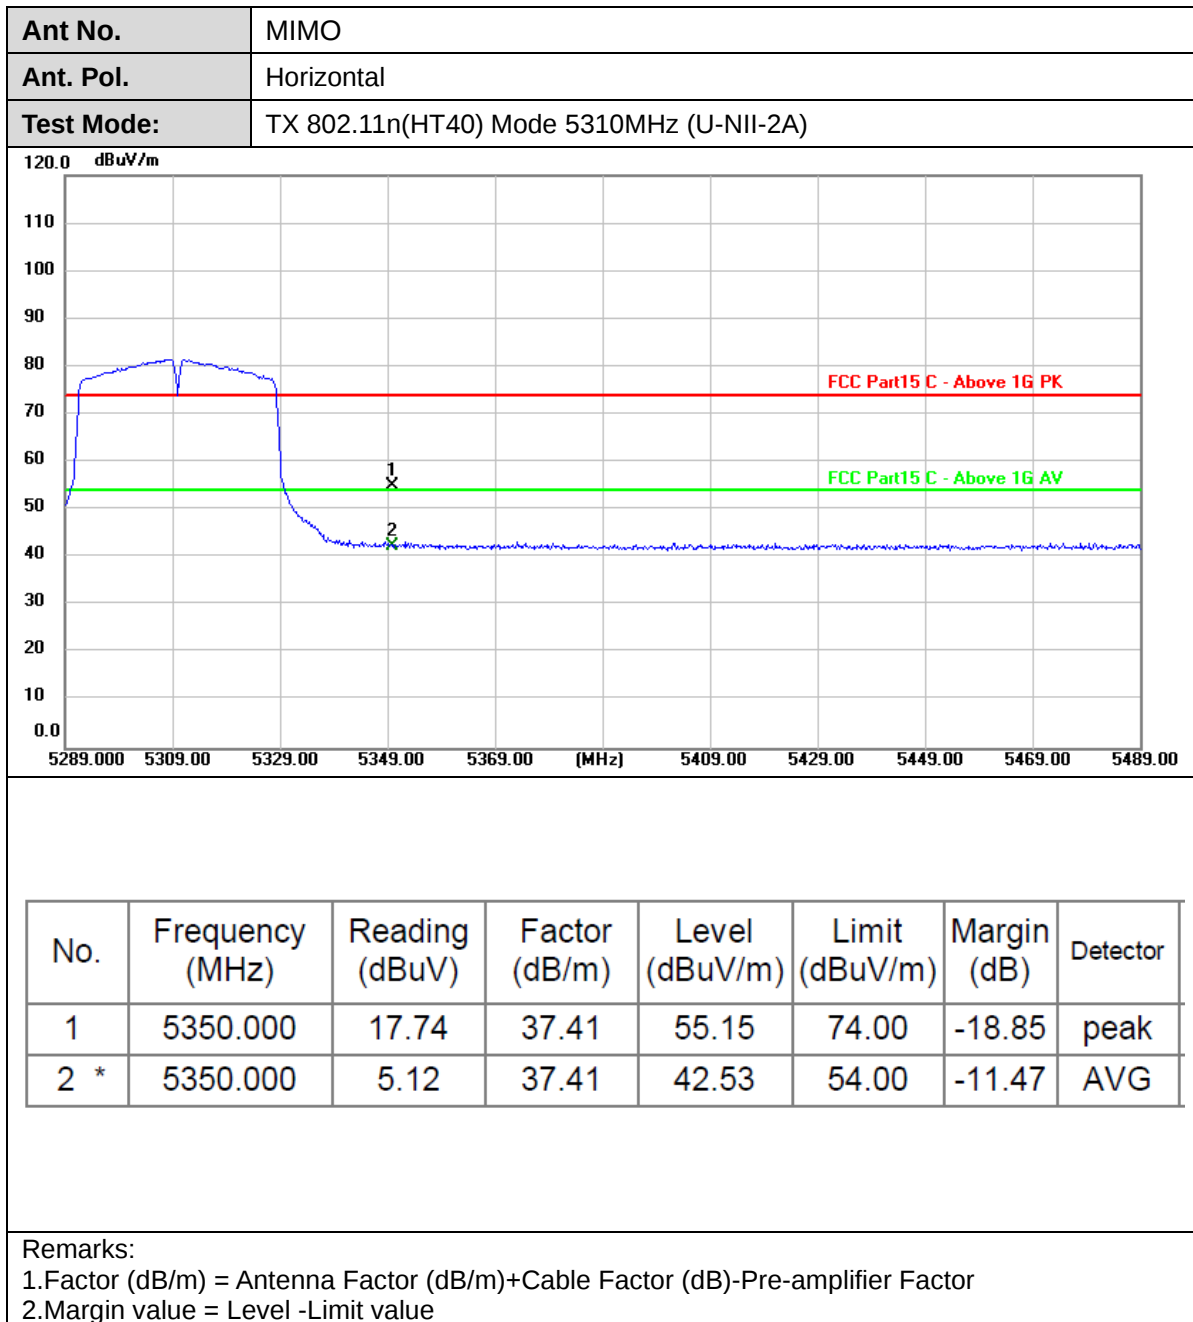



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)

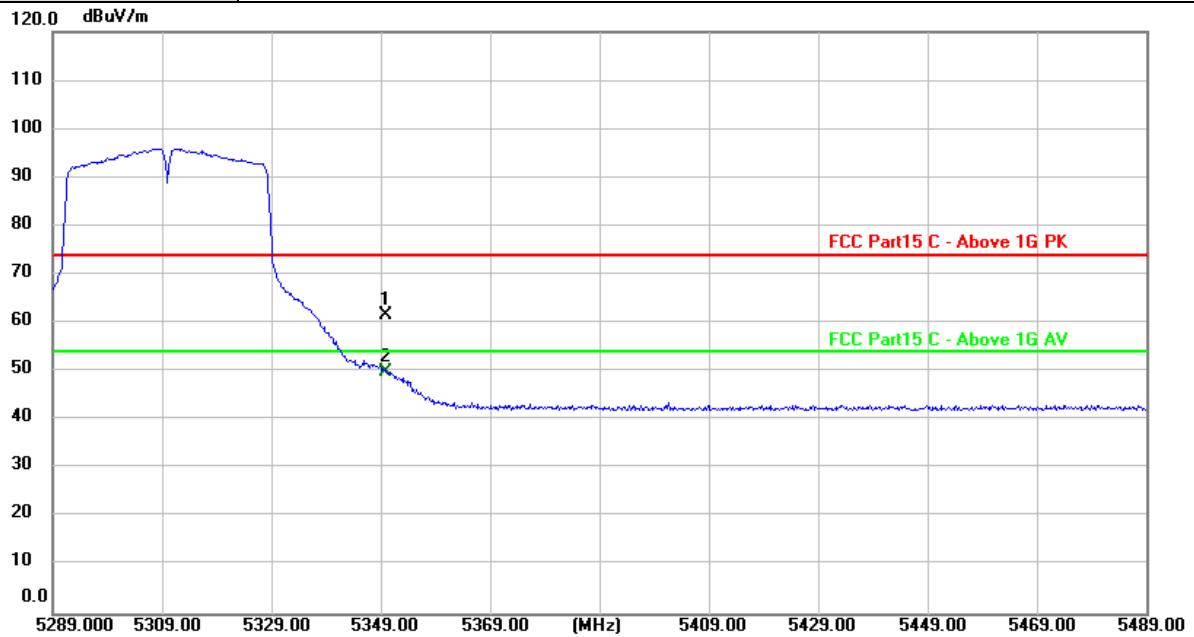


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	24.10	37.41	61.51	74.00	-12.49	peak
2 *	5350.000	12.58	37.41	49.99	54.00	-4.01	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value




Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)

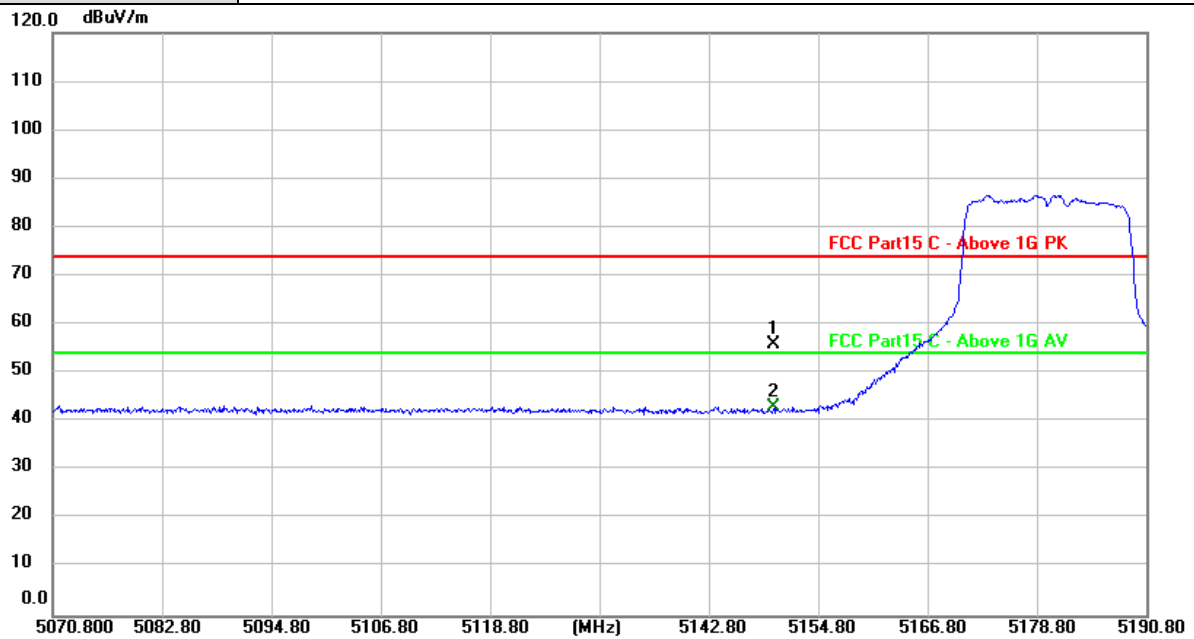


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	18.86	37.15	56.01	74.00	-17.99	peak
2 *	5150.000	5.79	37.15	42.94	54.00	-11.06	AVG

Remarks:


- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

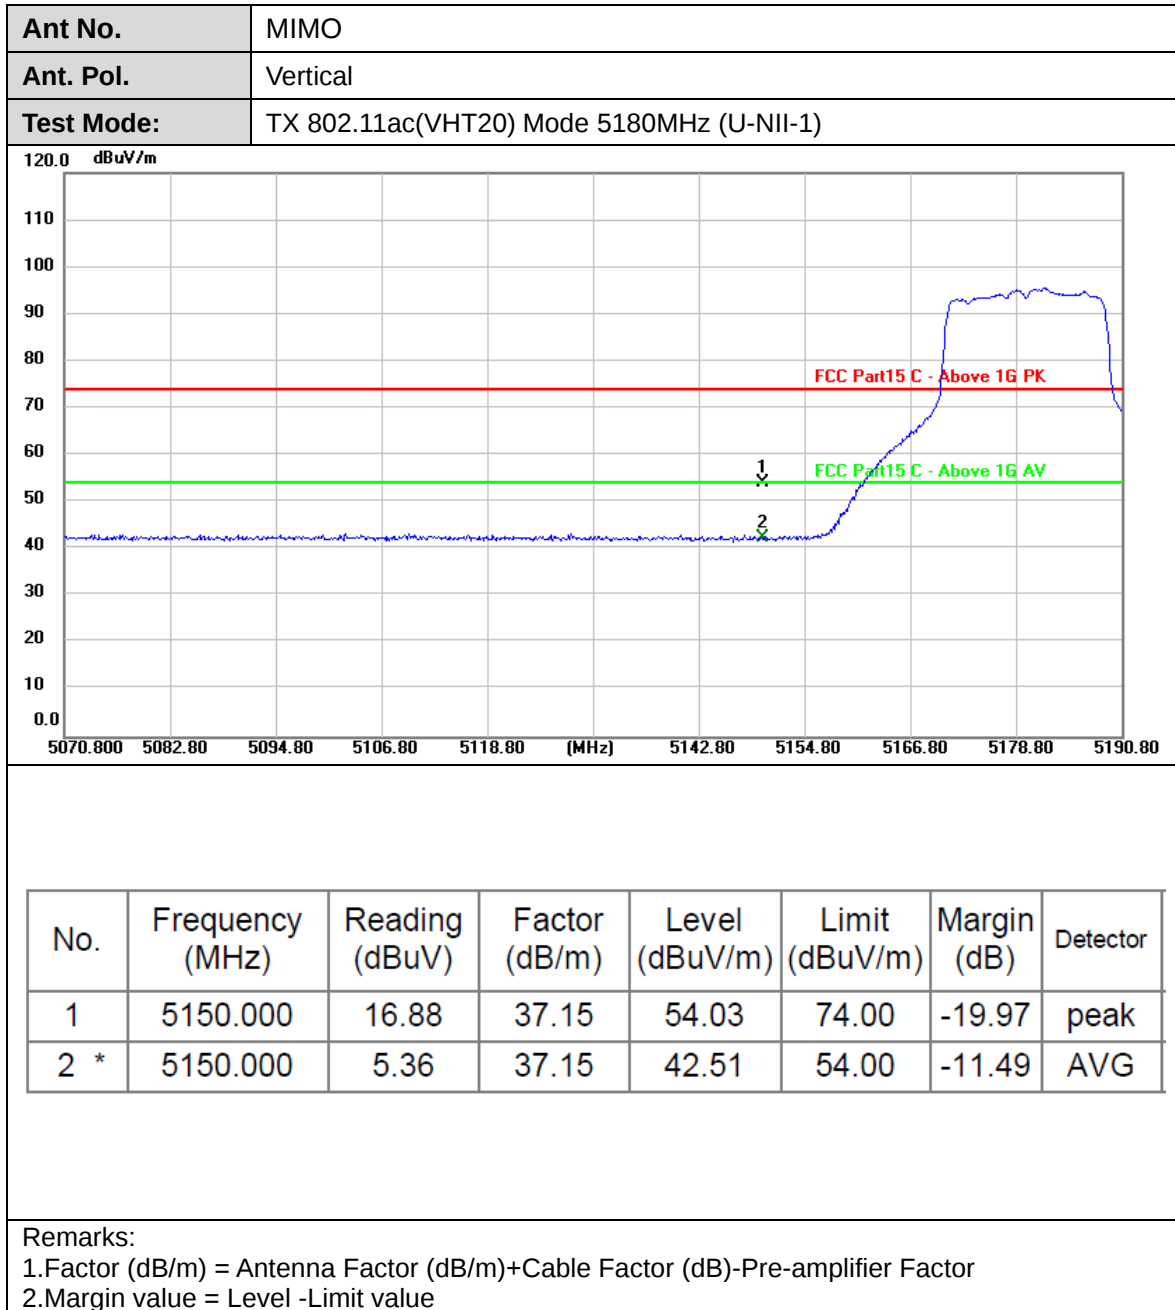

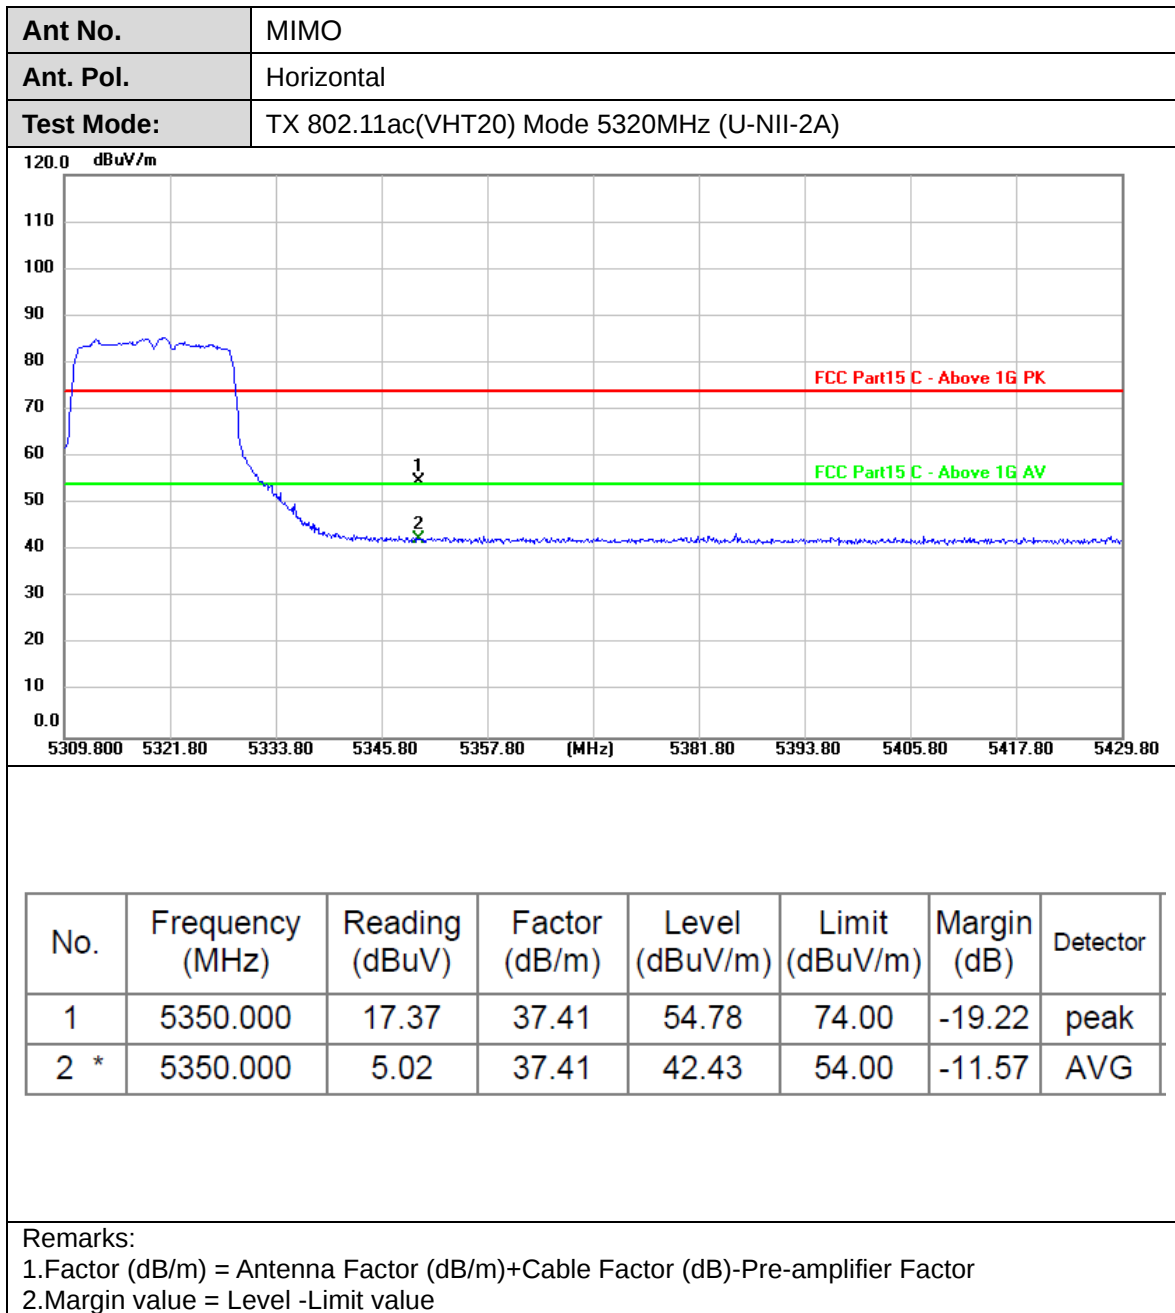



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)


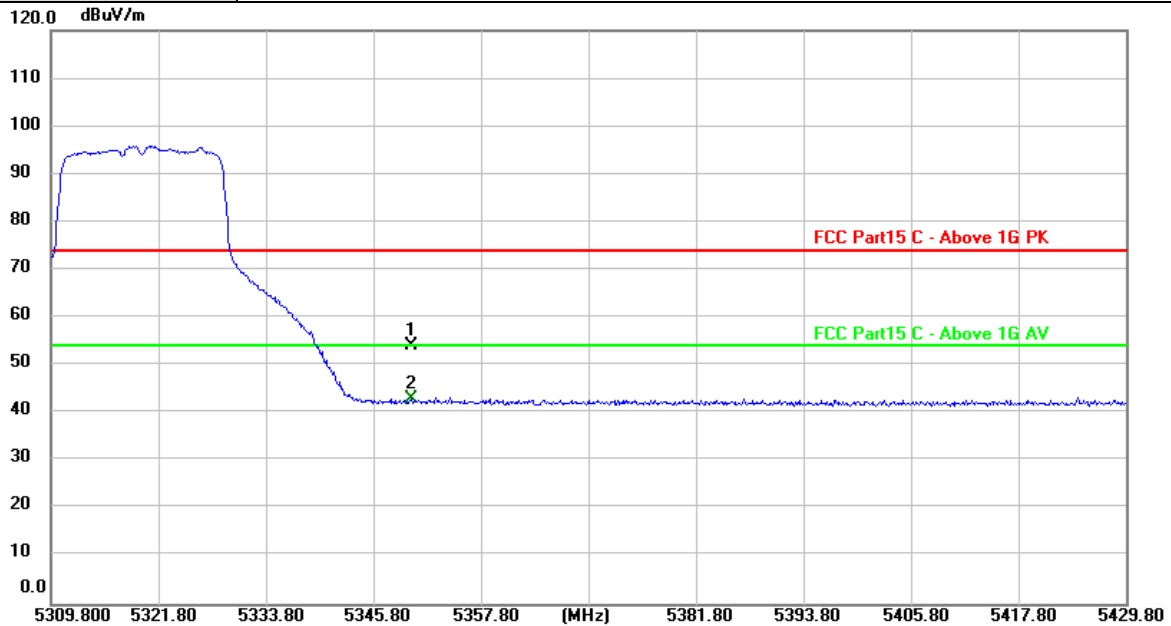



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	16.64	37.41	54.05	74.00	-19.95	peak
2 *	5350.000	5.59	37.41	43.00	54.00	-11.00	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

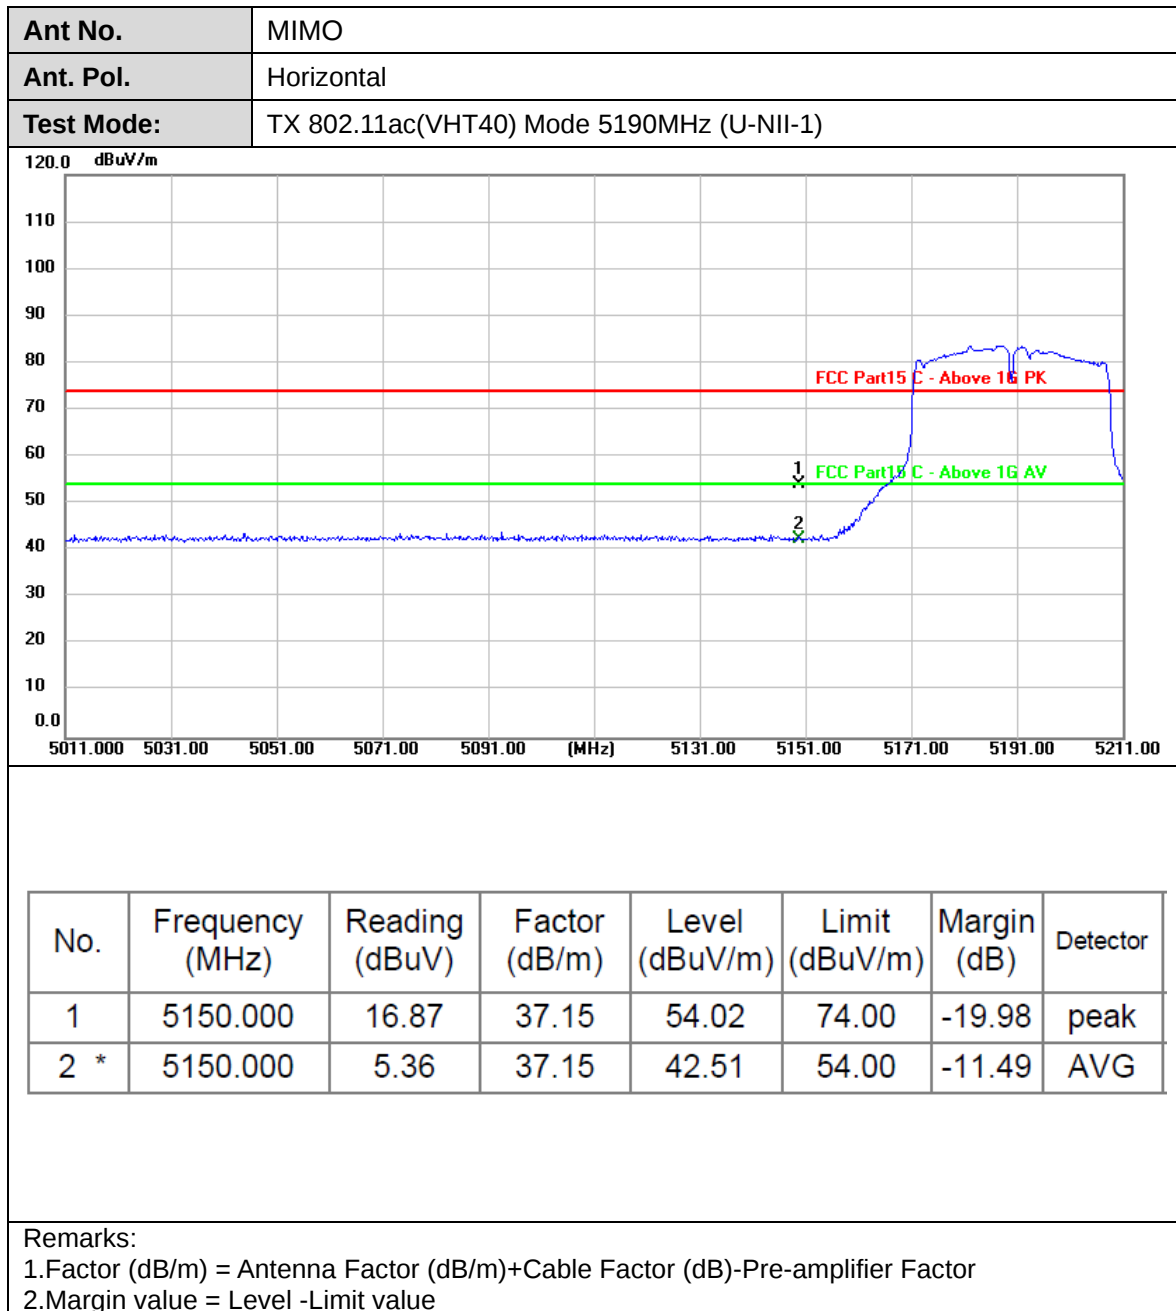


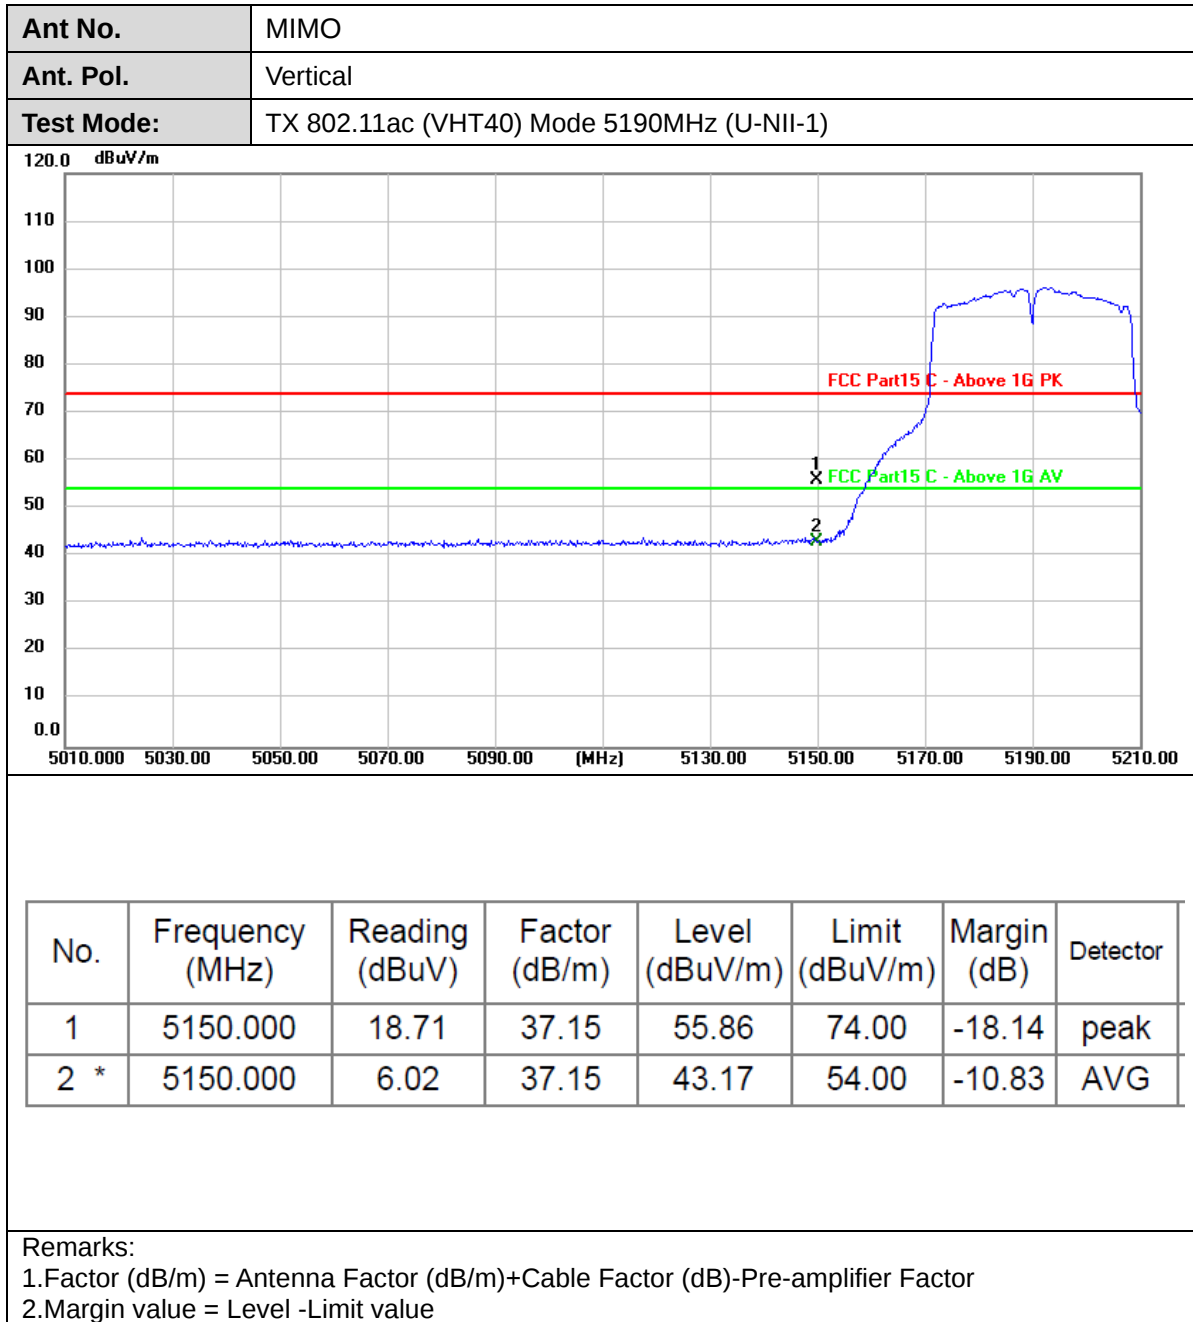

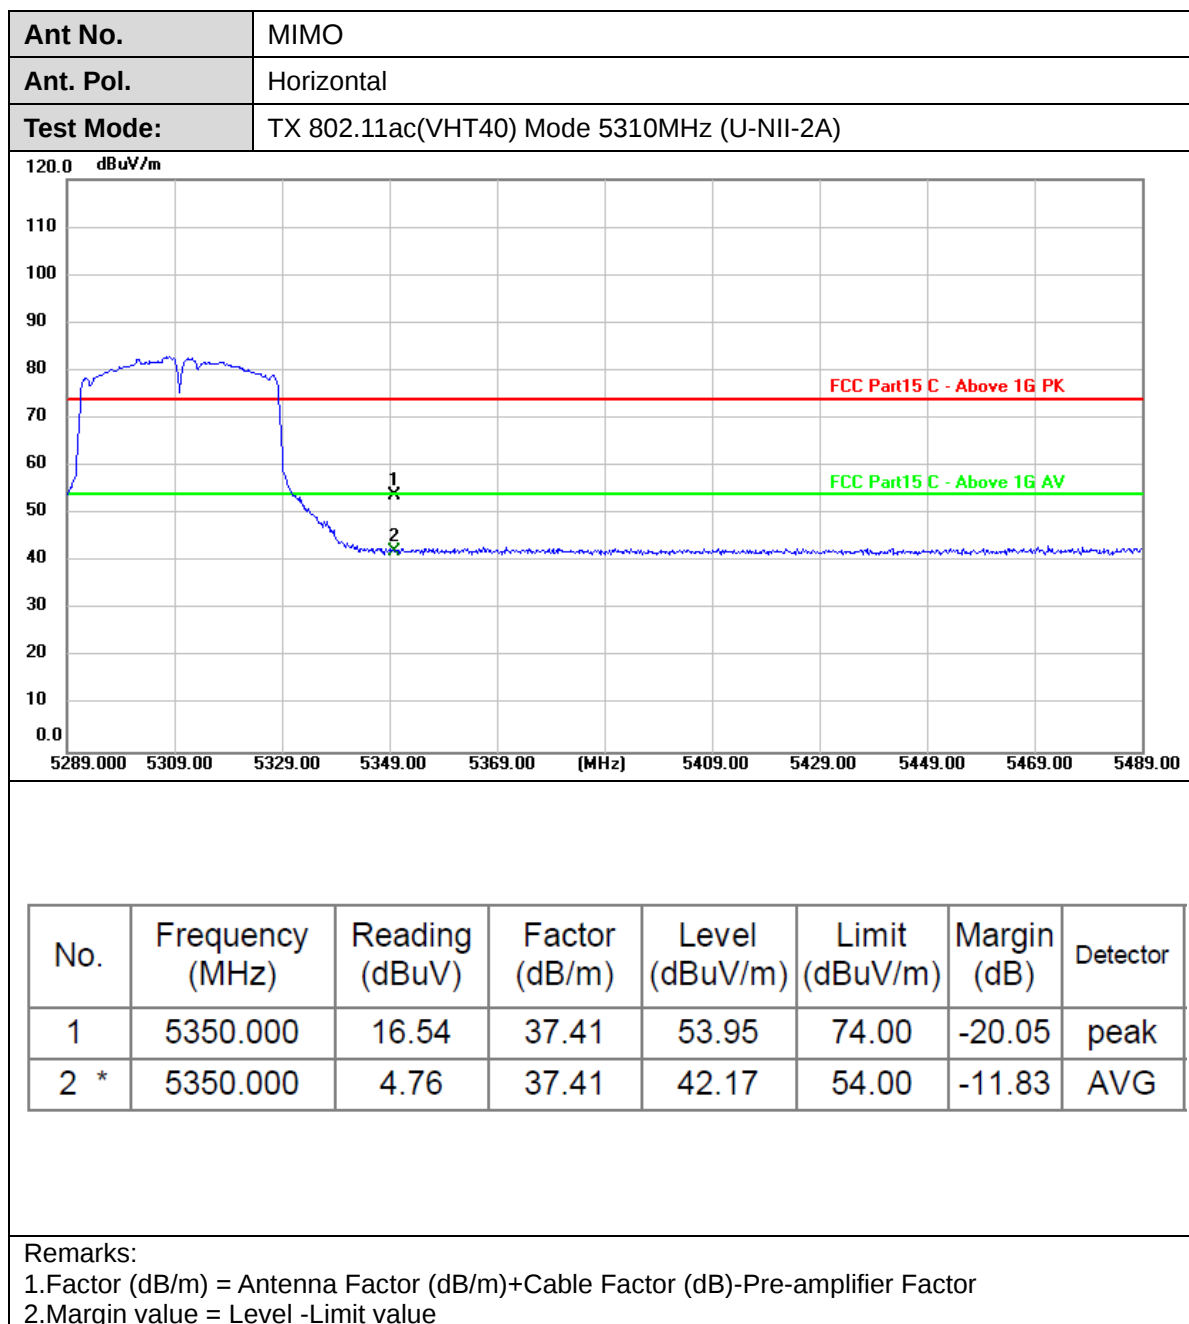




Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)

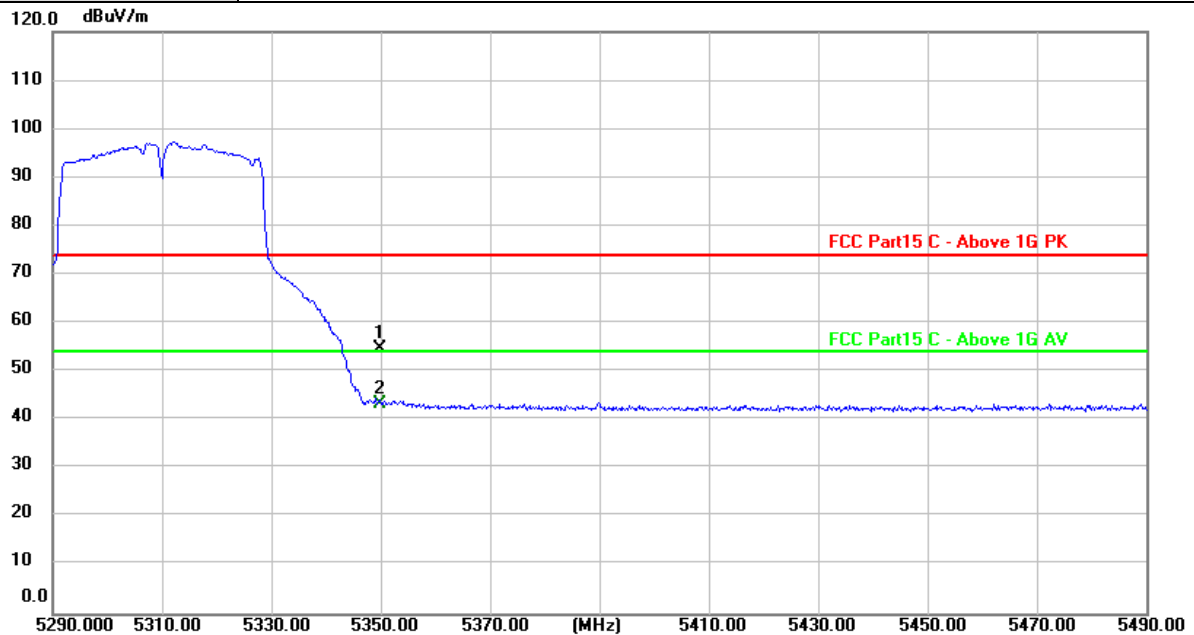

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	17.24	37.41	54.65	74.00	-19.35	peak
2 *	5350.000	5.98	37.41	43.39	54.00	-10.61	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

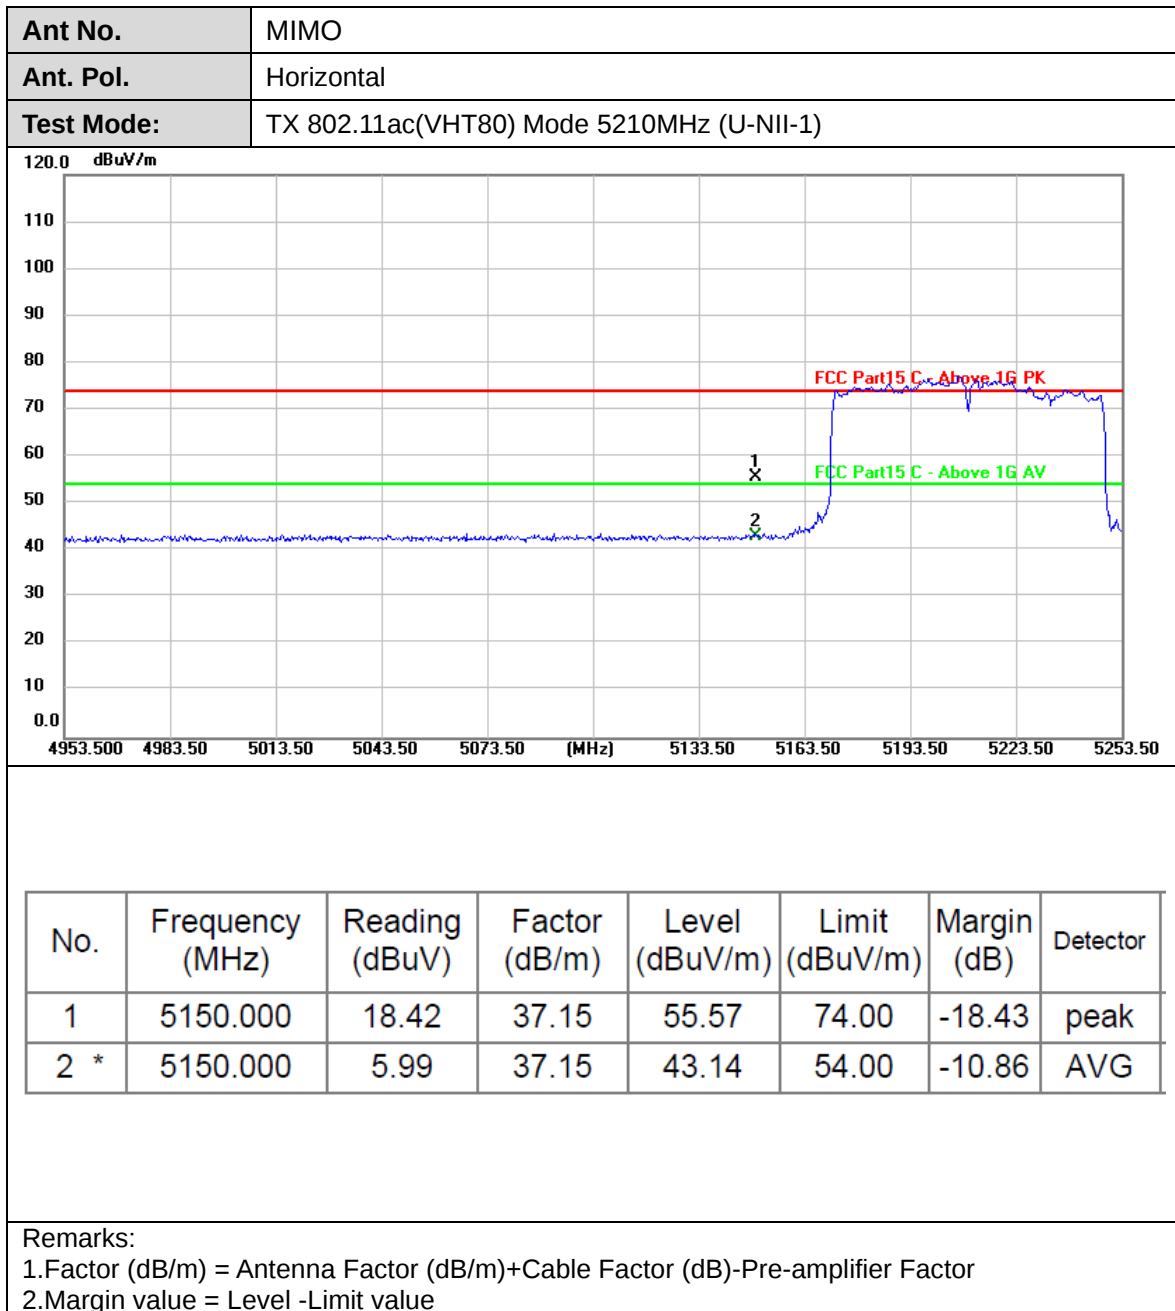



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)

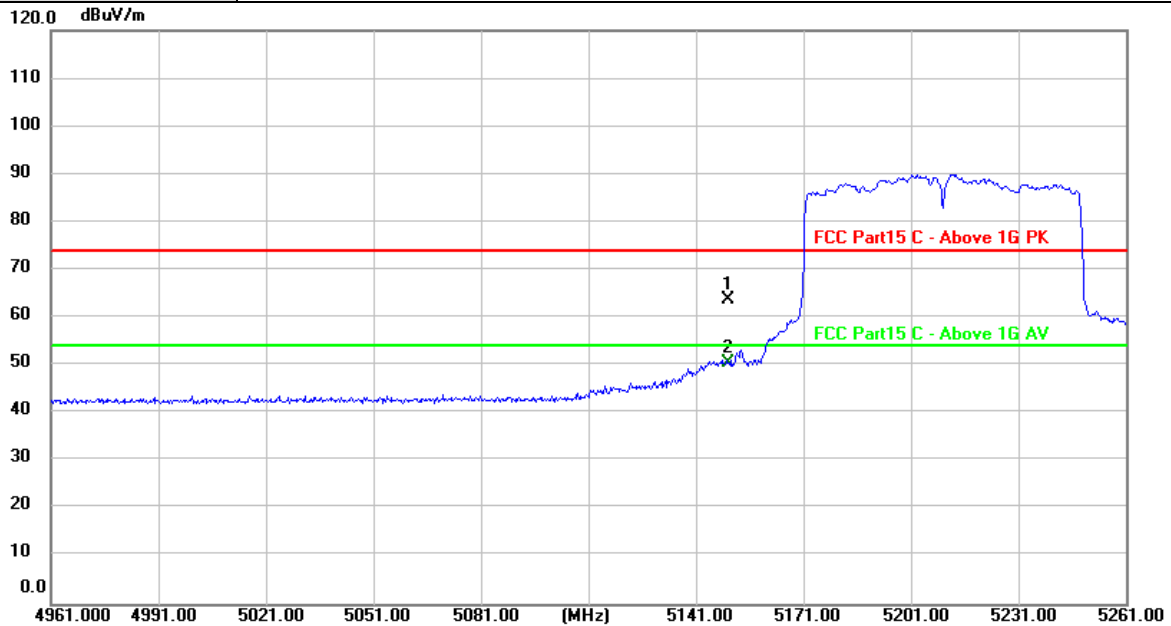


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	26.75	37.15	63.90	74.00	-10.10	peak
2 *	5150.000	13.43	37.15	50.58	54.00	-3.42	AVG

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

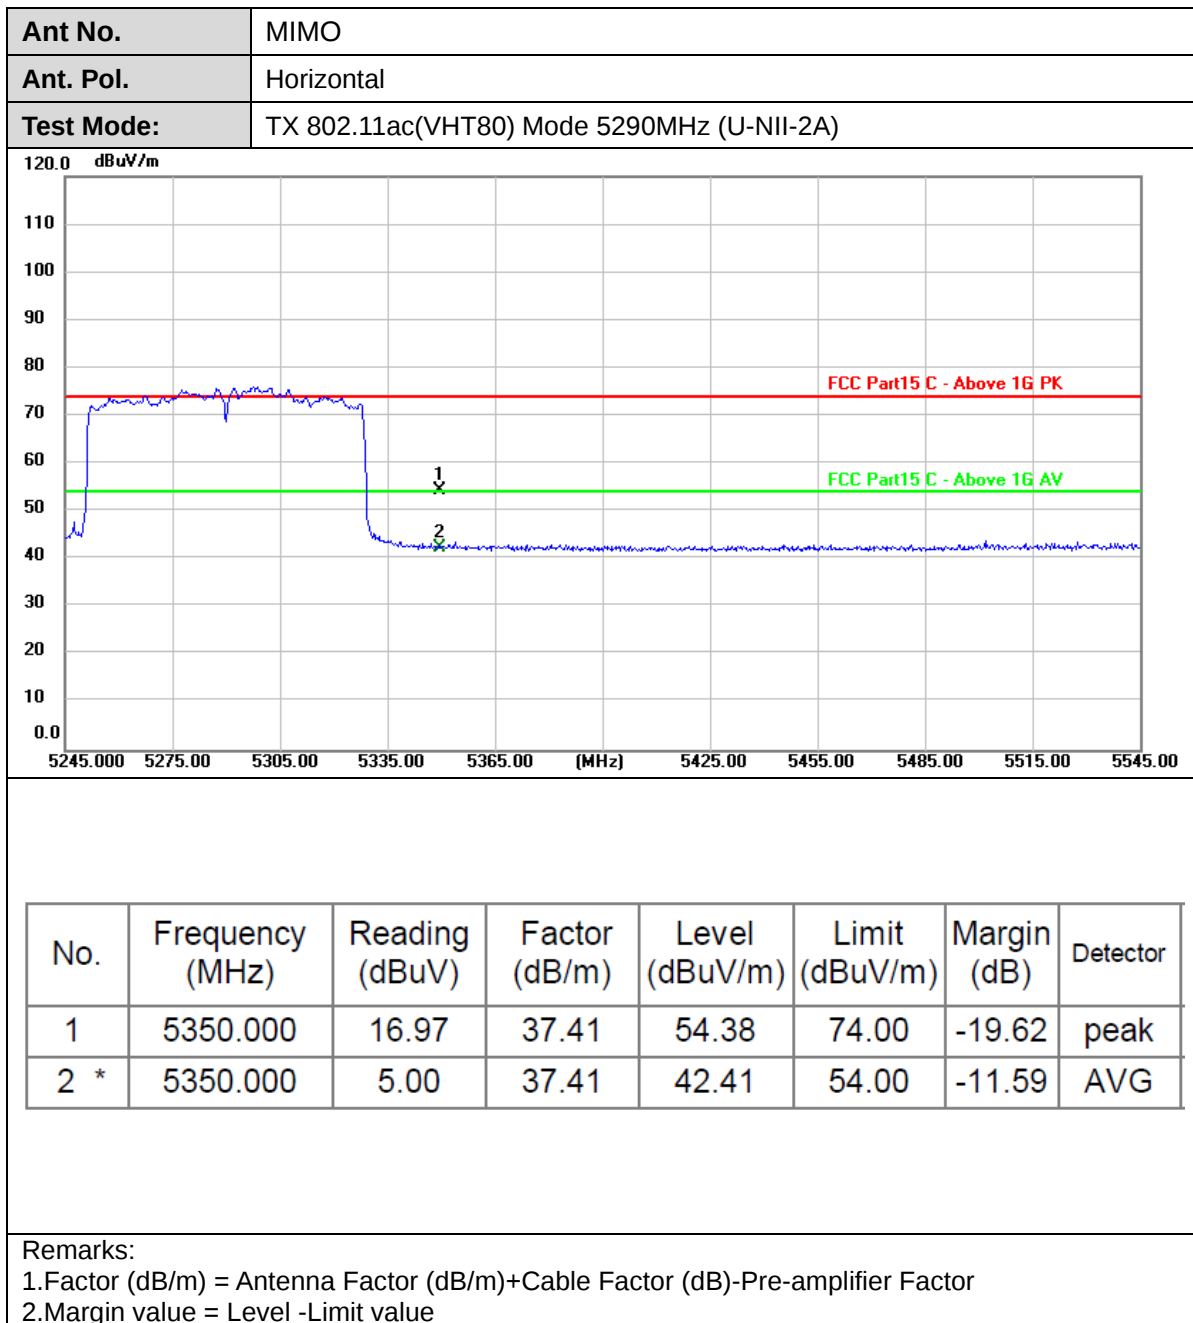




Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)

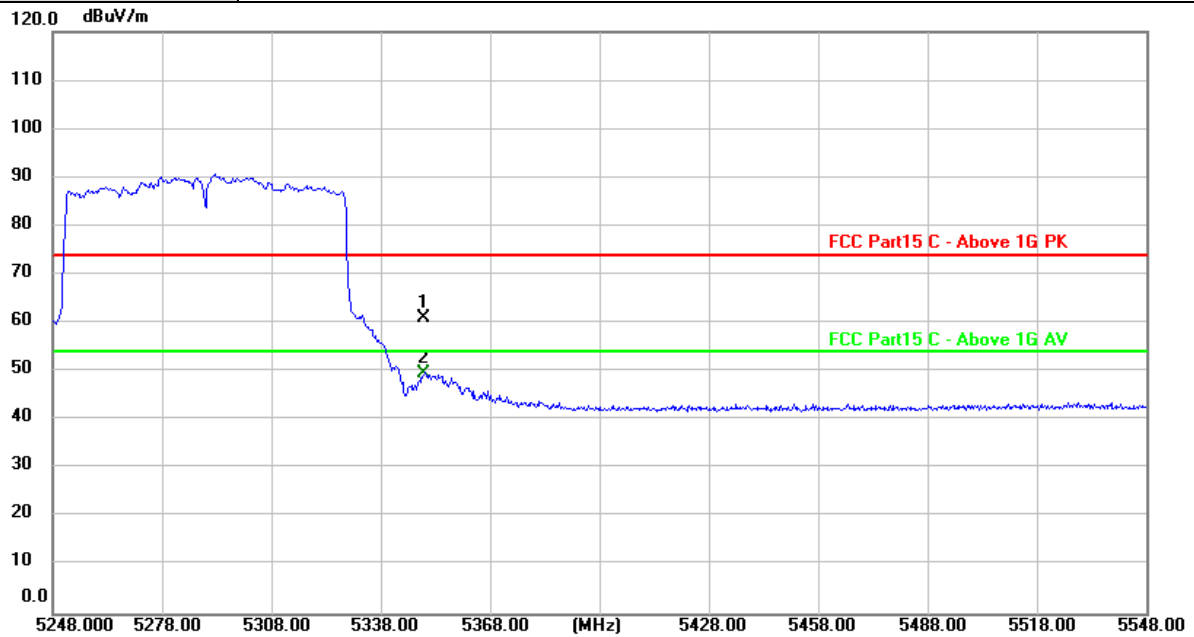

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	23.59	37.41	61.00	74.00	-13.00	peak
2 *	5350.000	12.10	37.41	49.51	54.00	-4.49	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

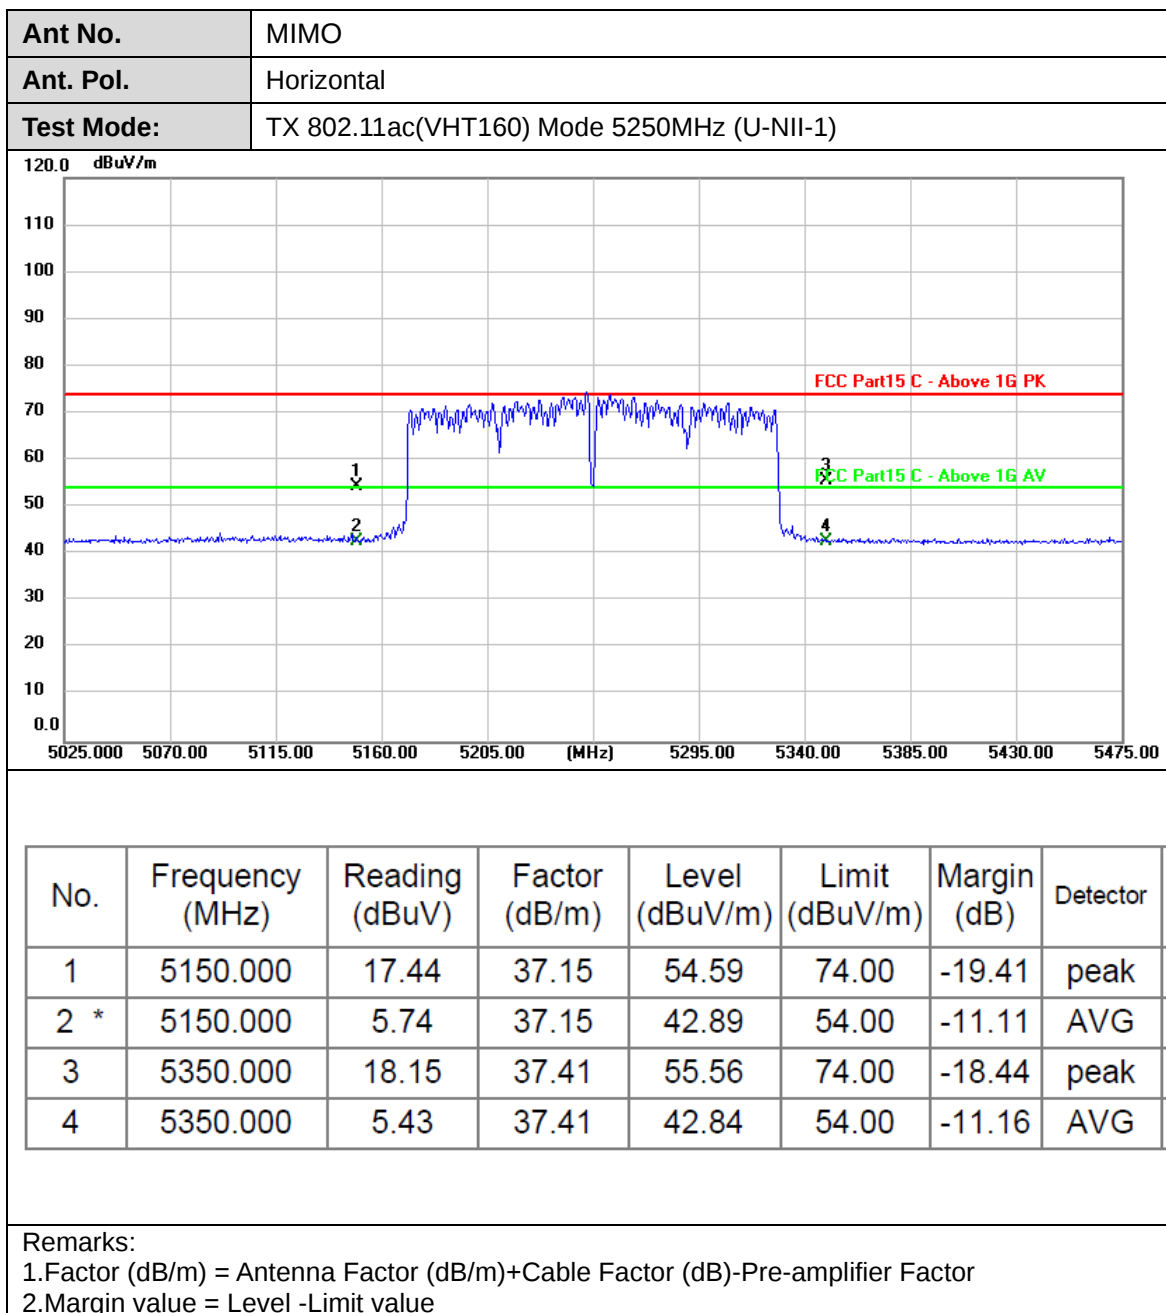



Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT160) Mode 5250MHz (U-NII-1)

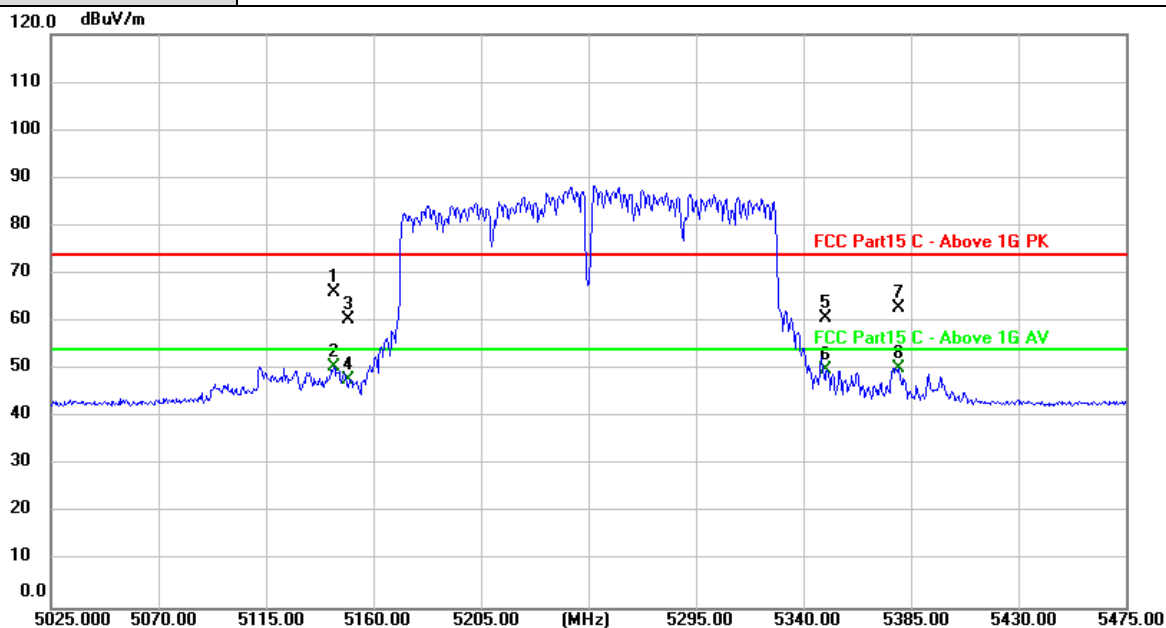

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5143.500	29.11	37.14	66.25	74.00	-7.75	peak
2 *	5143.500	13.51	37.14	50.65	54.00	-3.35	AVG
3	5150.000	23.28	37.15	60.43	74.00	-13.57	peak
4	5150.000	10.69	37.15	47.84	54.00	-6.16	AVG
5	5350.000	23.45	37.41	60.86	74.00	-13.14	peak
6	5350.000	12.67	37.41	50.08	54.00	-3.92	AVG
7	5380.200	25.48	37.44	62.92	74.00	-11.08	peak
8	5380.200	12.84	37.44	50.28	54.00	-3.72	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

