



Dosimetric Assessment Test Report

for the

**VeriFone Inc.
Vx670W POS TERMINAL**

**Tested and Evaluated In Accordance With
FCC OET 65 Supplement C: 01-01**

Prepared for

**VeriFone Inc.
3755 Atherton Rd.
Rocklin, CA 95765**

Engineering Statement: The measurements shown in this report were made in accordance with the procedures specified in Supplement C to OET Bulletin 65 of the Federal Communications Commission (FCC) Guidelines [FCC 2001] and Industry Canada RSS-102 for uncontrolled exposure. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment evaluated is capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1999.



SAR Evaluation Certificate of Compliance

FCC ID: B32VX670WWIFI

APPLICANT: VeriFone Inc.

Applicant Name and Address: VeriFone Inc.
3755 Atherton Rd.
Rocklin, CA 95765

Test Location: MET Laboratories, Inc.
4855 Patrick Henry Dr. Bldg #6
Santa Clara, CA 95054
USA

| | | |
|--|---|---------|
| EUT: | VeriFone | |
| Date of Receipt: | April 17, 2006 | |
| Device Category: | FCC 15.247 | |
| RF exposure environment: | uncontrolled environment/general population | |
| RF exposure category: | Portable | |
| Power supply: | 7.2 VDC Li-Ion Battery and 12VDC External | |
| Antenna: | Internal | |
| Production/prototype: | Prototype | |
| Modulation: | DTS | |
| Duty Cycle: | 100% | |
| TX Range: | 2412 - 2462MHz | |
| Maximum RF Power Output 2450MHz Band DSSS Mode: | Peak Conducted | 16.3dBm |
| Maximum RF Power Output 2450MHz Band OFDM Mode: | Peak Conducted | 20.6dBm |
| Maximum SAR Measurement | 0.781mW/g | |



Shawn McMillen
Senior Engineer



| | |
|---|----|
| INTRODUCTION | 4 |
| SAR DEFINITION | 4 |
| DESCRIPTION OF DEVICE UNDER TEST (EUT) | 5 |
| SAR MEASUREMENT SYSTEM..... | 6 |
| MEASUREMENT SUMMARY | 7 |
| EVALUATION PROCEDURES | 9 |
| DATA EVALUATION PROCEDURES | 10 |
| SYSTEM PERFORMANCE CHECK..... | 12 |
| SIMULATED EQUIVALENT TISSUES | 12 |
| SAR SAFETY LIMITS | 13 |
| ROBOT SYSTEM SPECIFICATIONS | 14 |
| 1.1. Specifications | 14 |
| 1.2. Data Acquisition Electronic (Dae) System: | 14 |
| 1.3. Phantom(s): | 14 |
| PROBE SPECIFICATIONS (ET3DV6) | 15 |
| SAR Measurement System | 16 |
| 1.4. RX90BL Robot | 16 |
| 1.5. Robot Controller | 16 |
| 1.6. Light Beam Switch | 16 |
| 1.7. Data Acquisition Electronics | 16 |
| 1.8. Electro-Optical Converter (EOC)..... | 17 |
| 1.9. Measurement Server | 17 |
| 1.10. Dosimetric Probe | 17 |
| 1.11. SAM Phantom..... | 17 |
| 1.12. Planar Phantom | 17 |
| 1.13. Validation Planar Phantom | 17 |
| 1.14. Device Holder | 18 |
| 1.15. System Validation Kits | 18 |
| TEST EQUIPMENT LIST..... | 19 |
| MEASUREMENT UNCERTANTIES..... | 20 |
| REFERENCES | 22 |
| EUT PHOTOS | 23 |
| TEST SET-UP..... | 26 |
| APPENDIX A – SAR MEASUREMENT DATA | 32 |
| APPENDIX B – SYSTEM PERFORMANCE CHECK | 33 |
| APPENDIX C – PROBE CALIBRATION CERTIFICATE | 34 |
| APPENDIX D – DIPOLE CALIBRATION CERTIFICATE | 35 |
| APPENDIX E – MEASURED FLUID DIELECTRIC PARAMETERS | 36 |
| APPENDIX F – PHANTOM CERTIFICATE OF CONFORMITY | 37 |



INTRODUCTION

This measurement report demonstrates that the VeriFone Vx670W POS TERMINAL FCC ID: B32VX670WWIFI described within this report complies with the Specific Absorption Rate (SAR) RF exposure requirements specified in ANSI/IEEE Std. C95.1-1999 and FCC 47 CFR §2.1093 for uncontrolled environment/general population. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 were employed.

A description of the device under test, device operating configuration and test conditions, measurement and site description, methodology and procedures used in the evaluation, equipment used, detailed summary of the test results and the various provisions of the rules are included in this dosimetric assessment test report.

SAR DEFINITION

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Figure 1.1
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

- σ - conductivity of the tissue - simulant material (S/m)
- ρ - mass density of the tissue - simulant material (kg/m³)
- E - Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.




DESCRIPTION OF DEVICE UNDER TEST (EUT)

| | | | |
|--|---|----------------|---------|
| Applicant: | VeriFone | | |
| Description of Test Item: | Vx670W POS Terminal | | |
| FCC ID: | B32VX670WWIFI | | |
| Modulations: | DSSS and OFDM | | |
| Supply Voltage: | 7.2 VDC Li-Ion Battery and 12VDC External | | |
| Antenna Type(s) Tested: | Internal | | |
| Modes and Bands of Operation: | DTS 2450MHz | | |
| Maximum Duty Cycle Tested: | 100% | | |
| Transmitter Frequency Range (MHz): | 2412 - 2462MHz | | |
| Frequencies Tested (MHz): | 2437MHz | | |
| Maximum RF Power Output 2450MHz Band DSSS Mode: | 2437 MHz | Peak Conducted | 16.3dBm |
| Maximum RF Power Output 2450MHz Band OFDM Mode: | 2437 MHz | Peak Conducted | 20.6dBm |
| Maximum SAR Measured: | 0.781mW/g @ mid channel | | |
| Application Type: | Certification | | |
| Exposure Category: | Uncontrolled Environment/General Population | | |
| FCC and IC Rule Part(s): | FCC 47 CFR §2.1093, Part 15.247 Subpart C | | |
| Standards: | IEEE Std. 1528-2003, FCC OET Bulletin 65, Supplement C, Edition 01-01 | | |



SAR MEASUREMENT SYSTEM

MET Laboratories, Inc SAR measurement facility utilizes the DASY4 Professional Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland for performing SAR compliance tests. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). The Cell controller system contain the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.

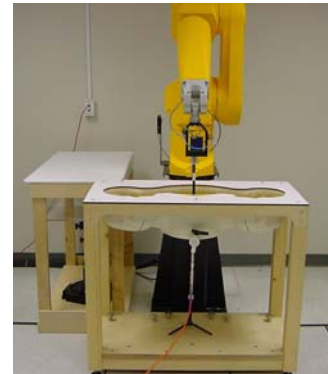

Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



MEASUREMENT SUMMARY

| BODY SAR MEASUREMENT RESULTS (2450MHz) Band | | | | | | | | | |
|--|------|---------------|------------------------------|-------------------------|--------------|-------------------|-----------------|--------------------------|------------------------|
| Freq (MHz) | Chan | Test Mode | Conducted Power Before (dBm) | Power Supply | Antenna Type | EUT Test Position | Phantom Section | Separation Distance (cm) | Measured SAR 1g (W/kg) |
| 2437.0 | Mid | DSSS | 16.3 | Battery | Internal | Back | Planar | 0.0 | 0.057 |
| 2437.0 | Mid | DSSS | 16.3 | Ext Pwr | Internal | Back | Planar | 0.0 | 0.054 |
| 2437.0 | Mid | OFDM | 20.6 | Battery | Internal | Back | Planar | 0.0 | 0.062 |
| 2437.0 | Mid | OFDM | 20.6 | Ext Pwr | Internal | Back | Planar | 0.0 | 0.060 |
| 2437.0 | Mid | DSSS | 16.3 | Battery | Internal | Face | Planar | 0.0 | 0.092 |
| 2437.0 | Mid | DSSS | 16.3 | Ext Pwr | Internal | Face | Planar | 0.0 | 0.244 |
| 2437.0 | Mid | OFDM | 20.6 | Battery | Internal | Face | Planar | 0.0 | 0.301 |
| 2437.0 | Mid | OFDM | 20.6 | Ext Pwr | Internal | Face | Planar | 0.0 | 0.287 |
| 2437.0 | Mid | DSSS | 16.3 | Battery | Internal | Front End | Planar | 0.0 | 0.569 |
| 2437.0 | Mid | DSSS | 16.3 | Ext Pwr | Internal | Front End | Planar | 0.0 | 0.617 |
| 2437.0 | Mid | OFDM | 20.6 | Battery | Internal | Front End | Planar | 0.0 | 0.780 |
| 2437.0 | Mid | OFDM | 20.6 | Ext Pwr | Internal | Front End | Planar | 0.0 | 0.781 |
| ANSI/IEEE C95.1 1992 – SAFETY LIMIT BODY: 1.6 W/kg (averaged over 1 gram) Spatial Peak – Uncontrolled Environment/General Population | | | | | | | | | |
| Measured Mixture Type | | 2450 MHz Body | | Date Tested | | March 22, 2006 | | | |
| Dielectric Constant ϵ_r | | IEEE Target | Measured | Duty Cycle | | 100% | | | |
| | | 52.7 | 54.5 | Ambient Temperature (C) | | 22.6 | | | |
| Conductivity σ (mho/m) | | IEEE Target | Measured | Fluid Temperature (C) | | 21.5 | | | |
| | | 1.95 | 2.04 | Fluid Depth | | ≥ 15 cm | | | |



DETAILS OF SAR EVALUATION

The VeriFoneVx670W POS TERMINAL was determined to be compliant for localized Specific Absorption Rate based on the test provisions and conditions described below.

1. The EUT was tested for body SAR in three different orientations. The EUT was placed with the back, face and front end next to the planar section of the phantom in order to facilitate a 0.0cm separation between the EUT housing and the phantom surface. The EUT was tested at the mid channel of the TX band.
2. The EUT was placed into a test mode with on board software and set to the data rate which gave the highest conducted power level. Both DSSS and OFDM modulations were examined
3. All SAR evaluations were performed with a fully charged battery.
4. The EUT was dismantled prior to the SAR evaluations in order to measure the conducted power. It was not practical to measure the output before and after each SAR evaluation. The EUT's RF output power was stable throughout the SAR evaluations.
5. The dielectric parameters of the simulated body fluid were measured prior to the evaluation using an 85070D Dielectric Probe Kit and an 8722D Network Analyzer.
6. The fluid and air temperature was measured prior to and after each SAR evaluation to ensure the temperature remained within ± 2 deg C of the temperature of the fluid when the dielectric properties were measured.
7. During the SAR evaluations if a distribution produced several hotspots over the course of the area scan, each hotspot was evaluated separately.



EVALUATION PROCEDURES

The evaluation was performed in the applicable area of the phantom depending on the type of device being tested.

- (i) For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.

The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.

A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

Based on the area scan, a 32mm x 32mm x 34mm (7x7x7 data points) zoom scan was assessed at the position where the greatest V/m was detected. The data at the surface was extrapolated since the distance from the probes sensors to the surface is 3.9cm. A least squares fourth-order polynomial was used to generate points between the probe detector and the inner surface of the phantom.

Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).

Z-Scan was determined as follows:

The Z-scan measures points along a vertical straight line. The line runs along a line normal to the inner surface of the phantom surface.



DATA EVALUATION PROCEDURES

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|----------------------------|----------------------------------|
| Probe Parameters: | - Sensitivity | $Norm_i, a_{i0}, a_{i1}, a_{i2}$ |
| | - Conversion Factor | $ConvF_i$ |
| | - Dipole Compression Point | dcp_i |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | σ |
| | - Density | ρ |

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC - transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = Compensated signal of channel i (i = x, y, z)
 U_i = Input signal of channel i (i = x, y, z)
 cf = Crest factor of exciting field (DASY parameter)
 dcp_i = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = Compensated signal of channel i (i = x, y, z)
 $Norm_i$ = Sensor sensitivity of channel i (i = x, y, z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = Sensitivity enhancement in solution
 a_{ij} = Sensor sensitivity factors for H-field probes
 f = Carrier frequency (GHz)
 E_i = Electric field strength of channel i in V/m
 H_i = Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = Equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m




SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed in the planar section of the SAM phantom with a 2450 MHz dipole. The dielectric parameters of the simulated head or muscle fluid was measured prior to the system performance check using an 85070D Dielectric Probe Kit and an 8722D Network Analyzer. A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of +10%.

| Test Date | 2450MHz Equivalent Tissue | SAR 1g (W/kg) | | Permittivity Constant ϵ_r | | Conductivity σ (mho/m) | | Ambient Temp. (C) | Fluid Temp. (C) | Fluid Depth (cm) |
|------------|---------------------------|-------------------|----------|------------------------------------|----------|-------------------------------|----------|-------------------|-----------------|------------------|
| | | Calibrated Target | Measured | IEEE Target | Measured | IEEE Target | Measured | | | |
| 04/17/2006 | Muscle | 53.6 \pm 5% | 55.6 | 52.7 \pm 5% | 54.5 | 1.95 \pm 10% | 2.04 | 22.9 | 21.6 | \geq 15 |

Note: The ambient and fluid temperatures were measured prior to the fluid parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

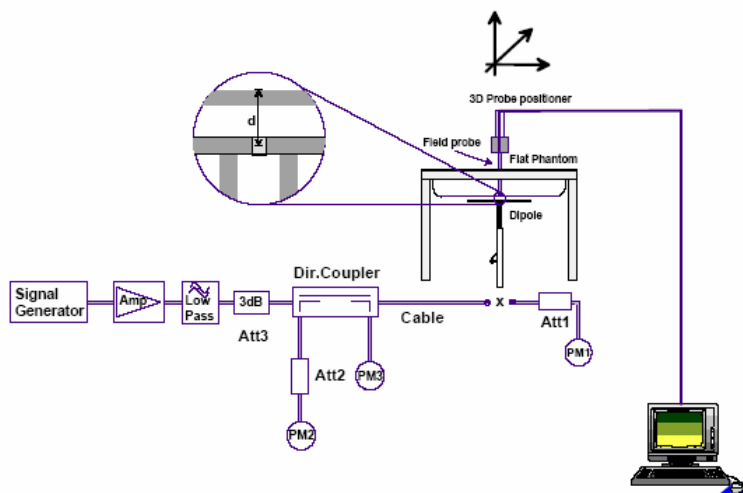

SIMULATED EQUIVALENT TISSUES

| Simulated Tissue Mixture | | |
|--------------------------|-------------------------|------------------|
| Ingredient | 2450MHz Head Validation | 2450MHz Body EUT |
| Water | 46.7% | 73.3% |
| DGMBE | 53.3% | 26.7% |



SAR SAFETY LIMITS

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|---|---|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average (averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak (averaged over any 1g of tissue) | 1.60 | 8.0 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10g) | 4.0 | 20.0 |

Notes:

1. Uncontrolled exposure environments are locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled exposure environments are locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.



ROBOT SYSTEM SPECIFICATIONS

1.1. SPECIFICATIONS

Positioner:

| | |
|----------------|---|
| Robot: | Staubli Unimation Corp. Robot Model: RX90 |
| Repeatability: | 0.02 mm |
| No. of axis: | 6 |

1.2. DATA ACQUISITION ELECTRONIC (DAE) SYSTEM:

Cell Controller

| | |
|------------|---|
| Processor: | Compaq Evo |
| | Clock Speed: 2.4 GHz |
| | Operating System: Windows XP Professional |

Data Converter

| | |
|-------------------|---|
| Features: | Signal Amplifier, multiplexer, A/D converter, and control logic |
| Software: | DASY4 software |
| Connecting Lines: | Optical downlink for data and status info. Optical uplink for commands and clock |

Dasy4 Measurement Server

| | |
|--------------|--|
| Function: | Real-time data evaluation for field measurements and surface detection |
| Hardware: | PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM |
| Connections: | COM1, COM2, DAE, Robot, Ethernet, Service Interface |

E-Field Probe

| | |
|---------------|--|
| Model: | ET3DV6 |
| Serial No.: | 1793 |
| Construction: | Triangular core fiber optic detection system |
| Frequency: | 10 MHz to 6 GHz |
| Linearity: | ± 0.2 dB (30 MHz to 3 GHz) |

EX-Probe

| | |
|---------------|--------------------------------|
| Model: | EX3DV3 |
| Serial No. | 3511 |
| Construction: | Triangular core |
| Frequency: | 10 MHz to > 6 GHz |
| Linearity: | ± 0.2 dB (30 MHz to 3 GHz) |

1.3. PHANTOM(S):


Validation & Evaluation Phantom

| | |
|-----------------|-------------------|
| Type: | SAM V4.0C |
| Shell Material: | Fiberglass |
| Thickness: | 2.0 ± 0.1 mm |
| Volume: | Approx. 20 liters |




PROBE SPECIFICATIONS (ET3DV6)

| | |
|--------------------|--|
| Construction: | Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycolether) |
| Calibration: | Basic Broadband calibration in air from 10 MHz to 3 GHz |
| Frequency: | 10 MHz to 3 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) |
| Directivity: | ± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis) |
| Dynamic Range: | 5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB |
| Surface Detection: | ± 0.2 mm repeatability in air and clear liquid over diffuse reflecting surfaces |
| Dimensions: | Overall length: 330 mm (Tip: 16 mm) Tip diameter (including protective cover): 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm |
| Application: | General dosimetric measurements up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms |





SAR Measurement System

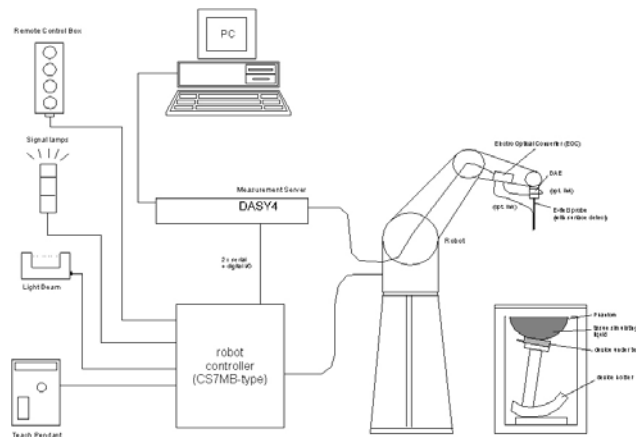

Measurement System Diagram

1.4. RX90BL ROBOT

The Stäubli RX90BL Robot is a standard high precision 6-axis robot with an arm extension for accommodating the data acquisition electronics (DAE).

1.5. ROBOT CONTROLLER

The CS7MB Robot Controller system drives the robot motors. The system consists of a power supply, robot controller, and remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.

1.6. LIGHT BEAM SWITCH

The Light Beam Switch (Probe alignment tool) allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured as well as the probe length and the horizontal probe offset. The software then corrects all movements, so that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



1.7. DATA ACQUISITION ELECTRONICS

The Data Acquisition Electronics consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16-bit A/D converter and a command decoder and control logic unit. Some of the task the DAE performs is signal amplification, signal multiplexing, A/D conversion, and offset measurements. The DAE also contains the mechanical probe-mounting device, which contains two different sensor systems for frontal and sideways probe contacts used for probe collision detection and mechanical surface detection for controlling the distance between the probe and the inner surface of the phantom shell. Transmission from the DAE to the measurement server, via the EOC, is through an optical downlink for data and status information as well as an optical uplink for commands and the clock.





1.8. ELECTO-OPTICAL CONVERTER (EOC)

The Electro-Optical Converter performs the conversion between the optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC connects to, and transfers data to, the DASY4 measurement server. The EOC also contains the fiber optical surface detection system for controlling the distance between the probe and the inner surface of the phantom shell.



1.9. MEASUREMENT SERVER

The Measurement Server performs time critical tasks such as signal filtering, all real-time data evaluation for field measurements and surface detection, controls robot movements, and handles safety operation. The PC-operating system cannot interfere with these time critical processes. A watchdog supervises all connections, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements.



1.10. DOSIMETRIC PROBE

Dosimetric Probe is a symmetrical design with triangular core that incorporates three 3 mm long dipoles arranged so that the overall response is close to isotropic. The probe sensors are covered by an outer protective shell, which is resistant to organic solvents i.e. glycol. The probe is equipped with an optical multi-fiber line, ending at the front of the probe tip, for optical surface detection. This line connects to the EOC box on the robot arm and provides automatic detection of the phantom surface. The optical surface detection works in transparent liquids and on diffuse reflecting surfaces with a repeatability of better than $\pm 0.1\text{mm}$.



1.11. SAM PHANTOM

The SAM (Specific Anthropomorphic Mannequin) twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm) integrated into a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left hand, right hand phone usage as well as body mounted usage at the flat phantom region. The flat section is also used for system validation and the length and width of the flat section are at least $0.75 \lambda_0$ and $0.6 \lambda_0$ respectively at frequencies of 824 MHz and above (λ_0 = wavelength in air).



Reference markings on the phantom top allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. A white cover is provided to cover the phantom during off-periods preventing water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible. The phantom is filled with a tissue simulating liquid to a depth of at least 15 cm at each ear reference point. The bottom plate of the wooden table contains three pair of bolts for locking the device holder.



1.12. PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld radio transceivers. The planar phantom is mounted on the wooden table of the DASY4 system.



1.13. VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted on the wooden table of the DASY4 system.



1.14. DEVICE HOLDER

The device holder is designed to cope with the different measurement positions in the three sections of the SAM phantom given in the standard. It has two scales, one for device rotation (with respect to the body axis) and one for device inclination (with respect to the line between the ear openings). The rotation center for both scales is the ear opening, thus the device needs no repositioning when changing the angles. The plane between the ear openings and the mouth tip has a rotation angle of 65° .

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



The dielectric properties of the liquid conform to all the tabulated values [2-5]. Liquids are *prepared* according to Annex A and dielectric properties are measured according to Annex B.

1.15. SYSTEM VALIDATION KITS

Power Capability: $> 100 \text{ W}$ ($f < 1\text{GHz}$); $> 40 \text{ W}$ ($f > 1\text{GHz}$)

Construction: Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 300, 450, 835, 1900, 2450 MHz

Return loss: $>20 \text{ dB}$ at specified validation position

Dimensions:

| | |
|------------------|---|
| 300 MHz Dipole: | Length: 396mm; Overall Height:430 mm; Diameter: 6 mm |
| 450 MHz Dipole: | Length: 270 mm; Overall Height: 347 mm; Diameter: 6 mm |
| 835 MHz Dipole: | Length: 161 mm; Overall Height: 270 mm; Diameter: 3.6 mm |
| 1900 MHz Dipole: | Length: 68 mm; Overall Height: 219 mm; Diameter: 3.6 mm |
| 2450 MHz Dipole: | Length: 51.5 mm; Overall Height: 300 mm; Diameter: 3.6 mm |





TEST EQUIPMENT LIST

| Test Equipment | Serial Number | Calibration Date |
|---|--|---|
| DASY4 System Robot ETVDV6 EX3DV3 DAE3 300MHz Dipole 450MHz Dipole 835MHz Dipole 1900MHz Dipole 2450MHz Dipole SAM Phantom V4.0C EUT Planar Phantom Validation Phantom | FO3/SX19A1/A/01 1793 3511 584 003 004 493 001 002 N/A N/A N/A | N/A Sept 2005 Jan 2006 Sept 2005 Dec 2005 Dec 2005 Sept 2005 Feb 2006 Feb 2006 N/A N/A N/A |
| 85070D Dielectric Probe Kt | N/A | N/A |
| 83650B Signal Generator | 3844A00910 | June 2005 |
| HP E4418B Power Meter | GB40205140 | June 2005 |
| HP 8482A Power Sensor | 2607A11286 | June 2005 |
| HP 8722D Vector Network Analyzer | 3S36140188 | March 2006 |
| Anritsu Power Meter ML2488A | 6K00001832 | June 2005 |
| Anritsu Power Sensor | 030864 | Jan 2005 |
| Mini-Circuits Power Amplifier | D111903#8 | N/A |



MEASUREMENT UNCERTAINTIES

UNCERTAINTY ASSESSMENT FOR EUT

| Error Description | Uncertainty Value $\pm\%$ | Probability Distribution | Divisor | c_i 1g | Standard Uncertainty $\pm\%$ (1g) | ν_i or ν_{eff} |
|---------------------------------|------------------------------|--------------------------|------------|-------------|--------------------------------------|------------------------|
| Measurement System | | | | | | |
| Probe calibration | ± 4.8 | Normal | 1 | 1 | ± 4.8 | ∞ |
| Axial isotropy of the probe | ± 4.6 | Rectangular | $\sqrt{3}$ | $(1-cp)1/2$ | ± 1.9 | ∞ |
| Spherical isotropy of the probe | ± 9.7 | Rectangular | $\sqrt{3}$ | $(cp)1/2$ | ± 3.9 | ∞ |
| Boundary effects | ± 8.5 | Rectangular | $\sqrt{3}$ | 1 | ± 4.8 | ∞ |
| Probe linearity | ± 4.5 | Rectangular | $\sqrt{3}$ | 1 | ± 2.7 | ∞ |
| Detection limit | ± 0.9 | Rectangular | $\sqrt{3}$ | 1 | ± 0.6 | ∞ |
| Readout electronics | ± 1.0 | Normal | 1 | 1 | ± 1.0 | ∞ |
| Response time | ± 0.9 | Rectangular | $\sqrt{3}$ | 1 | ± 0.5 | ∞ |
| Integration time | ± 1.2 | Rectangular | $\sqrt{3}$ | 1 | ± 0.8 | ∞ |
| RF ambient conditions | ± 0.54 | Rectangular | $\sqrt{3}$ | 1 | ± 0.43 | ∞ |
| Mech. constraints of robot | ± 0.5 | Rectangular | $\sqrt{3}$ | 1 | ± 0.2 | ∞ |
| Probe positioning | ± 2.7 | Rectangular | $\sqrt{3}$ | 1 | ± 1.7 | ∞ |
| Extrapolation & integration | ± 4.0 | Rectangular | $\sqrt{3}$ | 1 | ± 2.3 | ∞ |
| Test Sample Related | | | | | | |
| Device positioning | ± 2.2 | Normal | 1 | 1 | ± 2.23 | 11 |
| Device holder uncertainty | ± 5.0 | Normal | 1 | 1 | ± 5.0 | 7 |
| Power drift | ± 5.0 | Rectangular | $\sqrt{3}$ | | ± 2.9 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | ± 4.0 | Rectangular | $\sqrt{3}$ | 1 | ± 2.3 | ∞ |
| Liquid conductivity (target) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| Liquid conductivity (measured) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | $\pm 3.5/1.7$ | ∞ |
| Liquid permittivity (target) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| Liquid permittivity (measured) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| | | | | | | |
| Combined Standard Uncertainty | | | | | $\pm 12.14/11.76$ | |
| Coverage Factor for 95% | | Kp=2 | | | | |
| Expanded Uncertainty (k=2) | | | | | $\pm 24.29/23.51$ | |

Table: Worst-case uncertainty for DASY4 assessed according to IEEE P1528.

The budget is valid for the frequency range 300MHz to 6GHz and represents a worst-case analysis.



UNCERTAINTY ASSESSMENT FOR SYSTEM VALIDATION

| Error Description | Uncertainty Value $\pm\%$ | Probability Distribution | Divisor | c_i 1g | Standard Uncertainty $\pm\%$ (1g) | ν_i or ν_{eff} |
|---------------------------------|------------------------------|--------------------------|------------|-------------|--------------------------------------|------------------------|
| Measurement System | | | | | | |
| Probe calibration | ± 4.8 | Normal | 1 | 1 | ± 4.8 | ∞ |
| Axial isotropy of the probe | ± 4.7 | Rectangular | $\sqrt{3}$ | $(1-cp)1/2$ | ± 2.7 | ∞ |
| Spherical isotropy of the probe | ± 9.6 | Rectangular | $\sqrt{3}$ | $(cp)1/2$ | ± 3.8 | ∞ |
| Boundary effects | ± 1.0 | Rectangular | $\sqrt{3}$ | 1 | ± 0.0 | ∞ |
| Probe linearity | ± 4.7 | Rectangular | $\sqrt{3}$ | 1 | ± 3.2 | ∞ |
| Detection limit | ± 1.0 | Rectangular | $\sqrt{3}$ | 1 | ± 0.6 | ∞ |
| Readout electronics | ± 1.0 | Normal | 1 | 1 | ± 1.0 | ∞ |
| Response time | ± 0.8 | Rectangular | $\sqrt{3}$ | 1 | ± 0.5 | ∞ |
| Integration time | ± 1.3 | Rectangular | $\sqrt{3}$ | 1 | ± 0.8 | ∞ |
| RF ambient conditions | ± 3.0 | Rectangular | $\sqrt{3}$ | 1 | ± 1.7 | ∞ |
| Mech. constraints of robot | ± 0.4 | Rectangular | $\sqrt{3}$ | 1 | ± 0.2 | ∞ |
| Probe positioning | ± 1.4 | Rectangular | $\sqrt{3}$ | 1 | ± 1.7 | ∞ |
| Extrapolation & integration | ± 4.0 | Rectangular | $\sqrt{3}$ | 1 | ± 2.3 | ∞ |
| Dipole | | | | | | |
| Dipole Axis to liquid distance | ± 2.0 | Normal | 1 | 1 | ± 1.2 | 11 |
| Input Power | ± 5.0 | Normal | 1 | 1 | ± 2.7 | 7 |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | ± 4.0 | Rectangular | $\sqrt{3}$ | 1 | ± 2.3 | ∞ |
| Liquid conductivity (target) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| Liquid conductivity (measured) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| Liquid permittivity (target) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| Liquid permittivity (measured) | ± 5.0 | Rectangular | $\sqrt{3}$ | 0.6 | ± 1.7 | ∞ |
| | | | | | | |
| Combined Standard Uncertainty | | | | | ± 9.8 | |
| Coverage Factor for 95% | | Kp=2 | | | | |
| Expanded Uncertainty (k=2) | | | | | ± 19.7 | |



REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Aug. 1992.
- [3] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34, IEEE 1528 (August 2003), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb.1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz , IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz , IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric Evaluation Of Mobile Communications Equipment With Known Precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz - 300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgen ssische Technische Hoschschule Z rich, Dosimetric Evaluation of the Cellular Phone.
- [20] Federal Communications Commission, Radiofrequency radiation exposure evaluation: portable devices, Rule Part 47 CFR 2.1093: 1999.
- [21] Health Canada, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz , Safety Code 6.
- [22] Industry Canada, Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields, Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.



EUT PHOTOS



Front and Back of EUT



Back of EUT with Battery removed



Right Side of EUT



Left Side of EUT



Back End of EUT



Front End of EUT

TEST SET-UP



Front Side of EUT against Phantom with Battery Power



Front Side of EUT against Phantom with Battery Power



Front Side of EUT against Phantom with External Power



Front Side of EUT against Phantom with External Power



Back Side of EUT against Phantom with Battery Power



Back Side of EUT against Phantom with Battery Power



Back Side of EUT against Phantom with External Power



Back Side of EUT against Phantom with External Power



Antenna End of EUT against Phantom with Battery Power



Antenna End of EUT against Phantom with Battery Power



Antenna End of EUT against Phantom with External Power



Antenna End of EUT against Phantom with External Power



APPENDIX A – SAR MEASUREMENT DATA

Back side/DSSS mode/mid ch/battery power

Date/Time: 4/17/2006 1:37:42 PM

DUT: Verifone Vx670W; Type: 802.11b/g;

Medium Notes: Fluid Temp: 22.1 deg C, Ambient Temp: 22.9 deg C

Communication System: CW; ; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV3 - SN3511; ConvF(7.8, 7.8, 7.8); Calibrated: 1/23/2006

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn584; Calibrated: 9/22/2005

Phantom: SAM with CRP; Type: SAM; Serial: TP 1310

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

2450MHz/Area Scan (121x191x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.060 mW/g


2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.41 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.061 mW/g

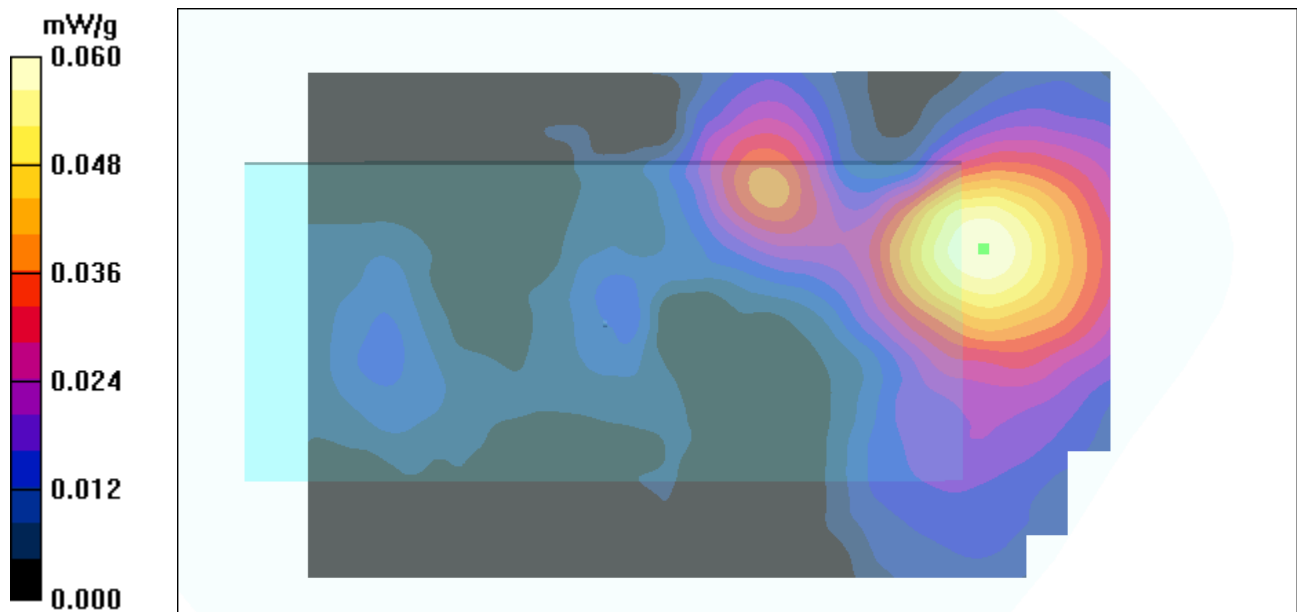

Back side/DSSS mode/mid ch/ext power

Date/Time: 4/17/2006 1:05:42 PM

DUT: Verifone Vx670W; Type: 802.11b/g;

Medium Notes: Fluid Temp: 22.1 deg C, Ambient Temp: 22.9 deg C

Communication System: CW; ; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV3 - SN3511; ConvF(7.8, 7.8, 7.8); Calibrated: 1/23/2006

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn584; Calibrated: 9/22/2005

Phantom: SAM with CRP; Type: SAM; Serial: TP 1310

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

2450MHz/Area Scan (121x191x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.056 mW/g


2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

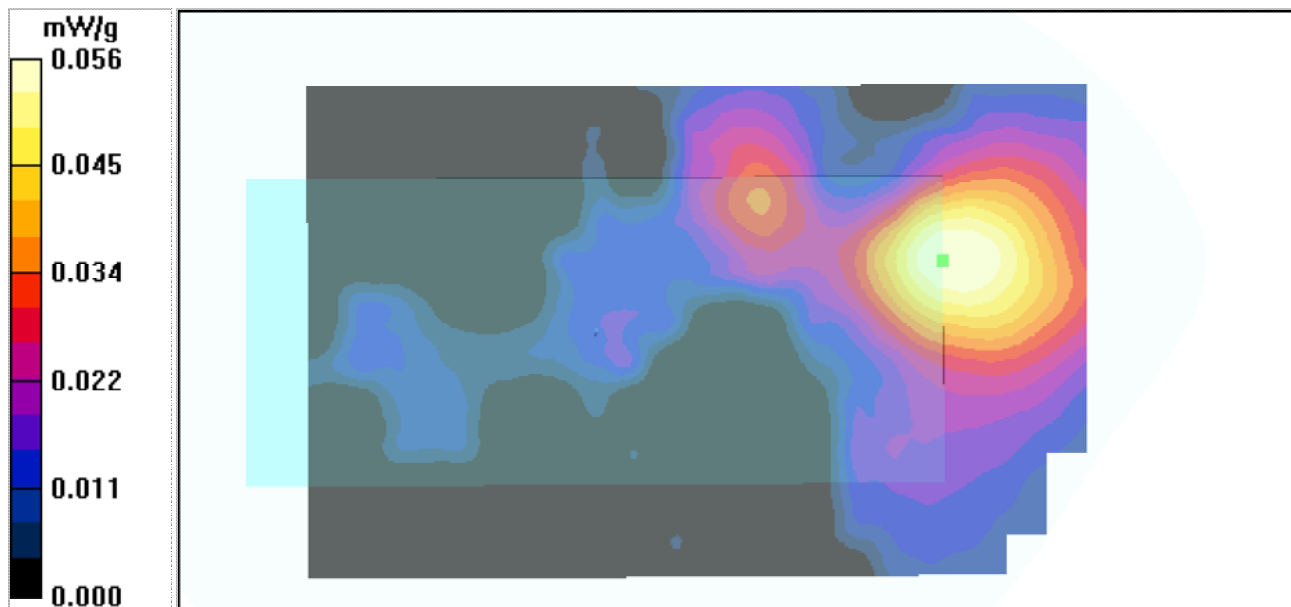

Back side/OFDM mode/mid ch/Battery power

Date/Time: 4/17/2006 11:36:26 AM

DUT: Verifone Vx670W; Type: 802.11b/g;

Medium Notes: Fluid Temp: 22.1 deg C, Ambient Temp: 22.9 deg C

Communication System: CW; ; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV3 - SN3511; ConvF(7.8, 7.8, 7.8); Calibrated: 1/23/2006

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn584; Calibrated: 9/22/2005

Phantom: SAM with CRP; Type: SAM; Serial: TP 1310

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

2450MHz/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.068 mW/g


2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.23 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

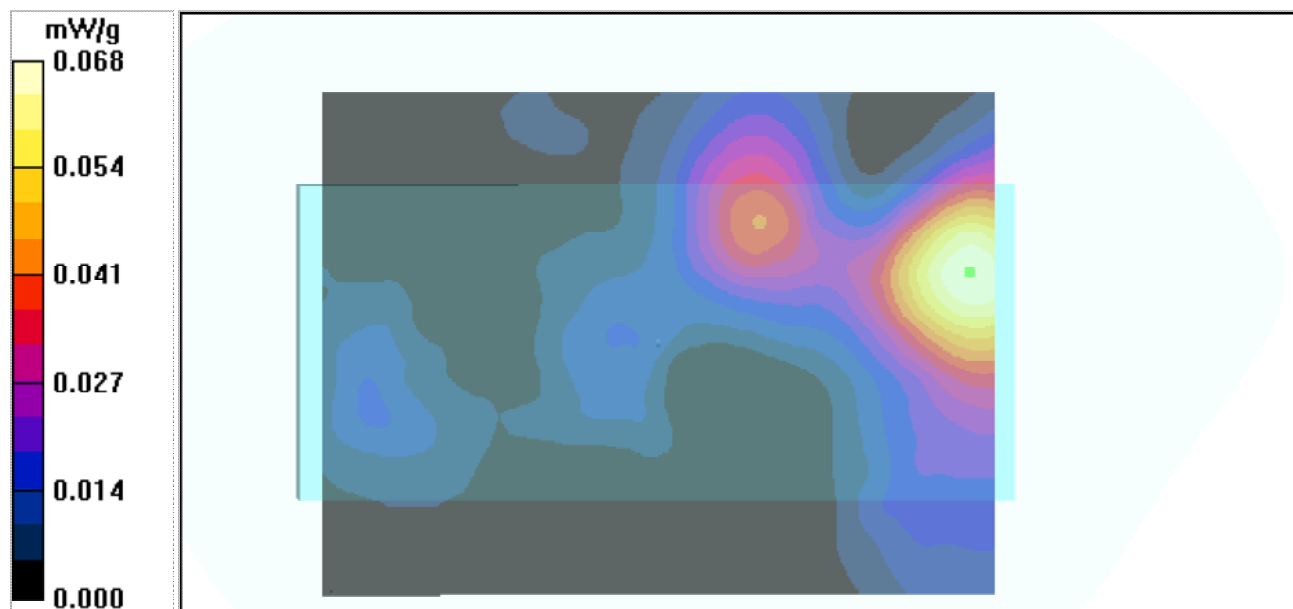

Back side/OFDM mode/mid ch/ext power

Date/Time: 4/17/2006 11:04:22 AM

DUT: Verifone Vx670W; Type: 802.11b/g;

Medium Notes: Fluid Temp: 22.1 deg C, Ambient Temp: 22.9 deg C

Communication System: CW; ; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Probe: EX3DV3 - SN3511; ConvF(7.8, 7.8, 7.8); Calibrated: 1/23/2006

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE3 Sn584; Calibrated: 9/22/2005

Phantom: SAM with CRP; Type: SAM; Serial: TP 1310

Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

2450MHz/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.066 mW/g

2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.40 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

