

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632 United States

Date of Testing: 08/17/2020 - 08/24/2020 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2006150096-21-R1.ZNF Date of Issue: 09/03/2020

FCC ID:

ZNFF100VM

APPLICANT:

LG ELECTRONICS U.S.A, INC.

Scope of Test: Application Type: FCC Rule Part(s): HAC Standard:

DUT Type: Model: Additional Model(s): Test Device Serial No.: Audio Band Magnetic Testing (T-Coil) Certification CFR §20.19(b) ANSI C63.19-2011 285076 D01 HAC Guidance v05 285076 D02 T-Coil testing for CMRS IP v03 Portable Handset LM-F100VM LMF100VM, F100VM, LM-F101V, LMF101V, F101V *Pre-Production Sample* [S/N: 00252]

C63.19-2011 HAC Category: T4 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2006150096-21-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President



FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 1 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 1 of 93
© 2020 PCTEST				REV 3.5.M

REV 3.5.M 8/18/2020

1.		3
2.	DUT DESCRIPTION	
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	
8.	FCC 3G MEASUREMENTS	
9.	T-COIL TEST SUMMARY	
10.	MEASUREMENT UNCERTAINTY	
11.	EQUIPMENT LIST	
12.	TEST DATA	
13.	CALIBRATION CERTIFICATES	
14.	CONCLUSION	
15.	REFERENCES	
16.	TEST SETUP PHOTOGRAPHS	

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 2 of 93
© 2020 PCTEST		*		REV 3.5.M

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFF100VM	PCTEST Road to be post of @ witness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 3 of 93
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 8/18/2020

2. DUT DESCRIPTION



FCC ID:	ZNFF100VM
Applicant:	LG Electronics U.S.A, Inc.
	111 Sylvan Avenue, North Building
	Englewood Cliffs, NJ 07632
	United States
Model:	LM-F100VM
Additional Model(s):	LMF100VM, F100VM, LM-F101V, LMF101V, F101V
Serial Number:	00252
HW Version:	Rev.B
SW Version:	F100VM09g
Antenna:	Internal Antenna
DUT Type:	Portable Handset

I. LTE Band Selection

This device supports the following pair of LTE bands with similar frequencies: LTE B4 & B66. This pair of LTE bands has the same target power and shares the same transmission path. Since the supported frequency span for the smaller LTE band is completely covered by the larger LTE band, only the larger LTE band (LTE B66) was evaluated for hearing-aid compliance.

II. Mechanical Configuration Evaluation

This device supports four different mechanical modes. Per FCC guidance, the use conditions of mechanical mode 1 ("Normal") and mechanical mode 3 ("Swivel") were considered for HAC testing. Full HAC testing was performed with Normal mode and the worst-case configuration for each band and mode was additionally evaluated with Swivel mode. See Section 9 for results from this testing.

FCC ID: ZNFF100VM	Rood to be post of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 4 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 4 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020

ZNFF 100VM HAC Air Interfaces						
Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
	835	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC
CDMA	1900	V0	Tes	Tes. WIFI OF BT	CIVINS VOICE	EVRC
	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR
GSM	1900		105			Env
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850					
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR
0	1900					
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	700 (B12)					
	780 (B13)					
	790 (B14)					
LTE (FDD)	850 (B5)	850 (B5) VD Yes Yes: WIFI or BT VoLTE ¹ , Google Duo ²	Vol TE ¹ Google Duo ²	VoLTE: NB AMR, WB AMR, EVS		
	1700 (B4)		Google Duo: OPUS			
	1700 (B66)					
	1900 (B2)					
	2300 (B30)					
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
	3600 (B48)					Google Duo. OP03
	850 (n5)		Yes ³		Carada Dura?	ODUC
NR (FDD)	1700 (n66) 1900 (n2)	VD	res	Yes: WIFI or BT	Google Duo ²	OPUS
	28000 (n261)					
NR (TDD)	39000 (n261)	VD	No ⁴	Yes: WIFI or BT	Google Duo ²	OPUS
	2450					
	5200 (U-NII 1)					
WIFI	5300 (U-NII 2A)	VD	Yes	Yes: CDMA, GSM, UMTS, LTE, or NR	VoWIFI ² , Google Duo ²	VoWIFI: NB AMR, WB AMR, EVS
	5500 (U-NII 2C)		vowin, doogie buo	Google Duo: OPUS		
	5800 (U-NII 3)					
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, LTE, or NR	N/A	N/A
Ype Transport Notes: // 2 Voice Only 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. // D = Digital Data - Not intended for Voice Services 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 // D = CMRS and/or IP Voice over Data Transport 3. NR was evaluated using an interim procedure outlined in Section 7.11.4. 4. n260 and n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations therefore they were not evaluated.						

Table 2-1 ZNFF100VM HAC Air Interfaces

FCC ID: ZNFF100VM	PCTEST Ploat to be part of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 5 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 5 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

ANSI C63.19-2011 PERFORMANCE CATEGORIES 3.


I. MAGNETIC COUPLING

Axial and Radial Field Intensity


All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

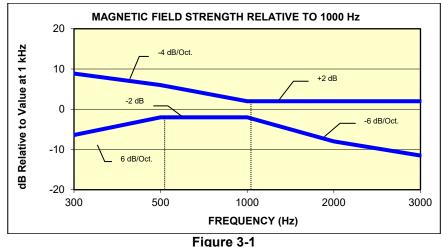

Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

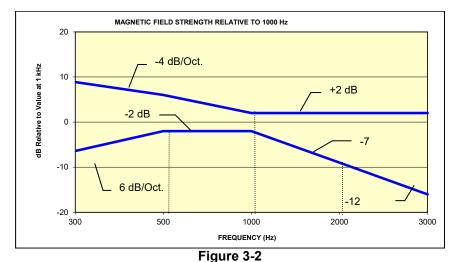

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFF100VM	PCTEST Poul la be pail of @ versees	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 6 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 6 of 93
© 2020 PCTEST				REV 3.5.M

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Cotogory	Telephone RF Parameters			
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFF100VM	PCTEST Provide la la post at di generationali	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 7 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 7 of 93
© 2020 PCTEST		· · · · · · · · · · · · · · · · · · ·		REV 3.5.M

8/18/2020

METHOD OF MEASUREMENT 4.

Test Setup I.

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


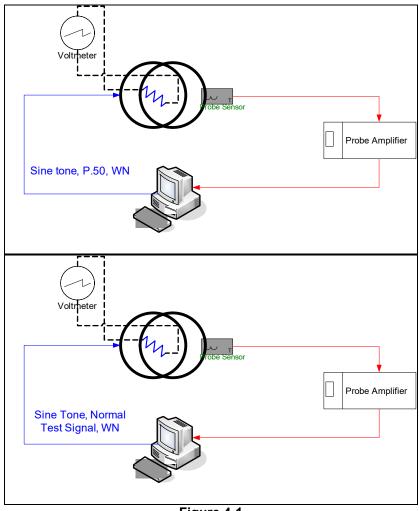


Figure 4-1 Validation Setup with Helmholtz Coil

FCC ID: ZNFF100VM	PCTEST Road to be part of @ wereare	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 9 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 8 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020

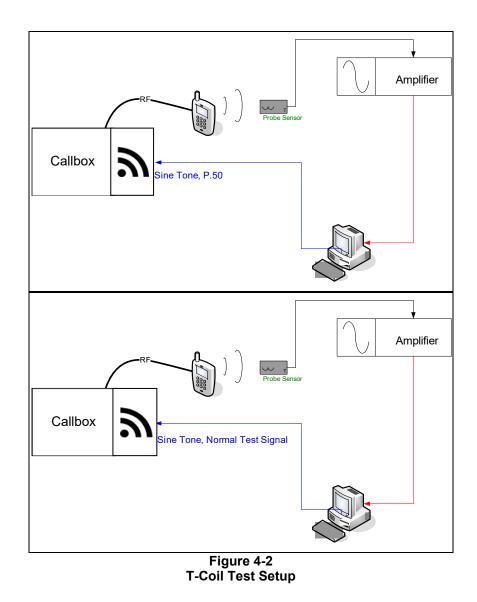

FCC ID: ZNFF100VM	PCTEST Bood to be part of @ wereare	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 0 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 9 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer:	ITU-T
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Male and Female, no spaces
Single Sample Duration:	20.96 seconds
Activity Level:	100%





Figure 4-4 Spectral Characteristic of full P.50




Temporal Characteristic of full P.50

FCC ID: ZNFF100VM	PCTEST Road to be part of @ wereare	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 10 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 10 of 93
© 2020 PCTEST		·		REV 3.5.M

8/18/2020

IV. 3GPP2 Normal Test Signal (Speech)







Figure 4-6 **Temporal Characteristic of Normal Test Signal**

ABM1 Measurement Block Diagram:



ABM2 Measurement Block Diagram:



Figure 4-7 Magnetic Measurement Processing Steps

V. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz a. with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements. b.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - The measurement system including the probe, pre-amplifier and acquisition system were a. validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

FCC ID: ZNFF100VM	POTEST Poul la be pail of @vernerst	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 11 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 11 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 47).

Frequency Response Validation C.

> The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 and Normal signal as shown below:




Figure 4-8 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz - 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

FCC ID: ZNFF100VM	PCTEST Poul la be pat al guerrant	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 12 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 12 of 93
© 2020 PCTEST				REV 3.5.M

	ABM2 Frequency Response Validation					
	HBI, A -	HBI, A -				
f (Hz)	Measured	Theoretical	dB Var.			
	(dB re 1kHz)	(dB re 1kHz)				
100	-16.180	-16.170	-0.010			
125	-13.257	-13.250	-0.007			
160	-10.347	-10.340	-0.007			
200	-8.017	-8.010	-0.007			
250	-5.925	-5.920	-0.005			
315	-4.045	-4.040	-0.005			
400	-2.405	-2.400	-0.005			
500	-1.212	-1.210	-0.002			
630	-0.349	-0.350	0.001			
800	0.071	0.070	0.001			
1000	0.000	0.000	0.000			
1250	-0.503	-0.500	-0.003			
1600	-1.513	-1.510	-0.003			
2000	-2.778	-2.780	0.002			
2500	-4.316	-4.320	0.004			
3150	-6.166	-6.170	0.004			
4000	-8.322	-8.330	0.008			
5000	-10.573	-10.590	0.017			
6300	-13.178	-13.200	0.022			
8000	-16.241	-16.270	0.029			
10000	-19.495	-19.520	0.025			

 Table 4-1

 ABM2 Eroquoney Posponso Validatio

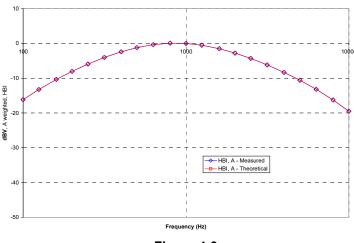



Figure 4-9 ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-10). Therefore the

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogo 12 of 02	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 13 of 93	
© 2020 PCTEST				REV 3.5.M 8/18/2020	

ABM2 Frequency Response Validation (LISTEN)

setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2


	WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
	-60	-60.36	-60.2	0.16
	-50	-50.19	-50.13	0.06
	-40	-40.14	-40.03	0.11
	-30	-30.13	-30.01	0.12
	-20	-20.12	-20	0.12
	-10	-10.14	-10	0.14
-20 -			$r_{1} = \frac{r_{1}}{1} = \frac{r_{2}}{1} = \frac{r_{2}}{1} = \frac{r_{2}}{1}$	$\frac{1}{1}$
-30 -				
-50 -			 	
-60 g				
-70				

Figure 4-11 ABM2 Power Sum Validation

FCC ID: ZNFF100VM	PCTEST Road to be part of @ wereare	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 14 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 14 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-13, the grid is not to scale but merely a graphical representation of the coordinate system in use):

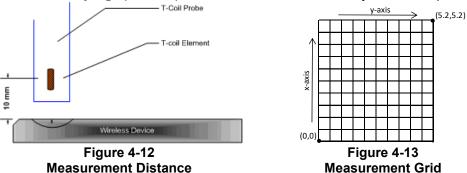

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure4-15 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5 and 7. NR configuration information can be found in Section 7. WIFI configuration information can be found in Section 6 and 7.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.

FCC ID: ZNFF100VM	POTEST Road to be part of @ enterest	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 15 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 15 of 93
© 2020 PCTEST		·		REV 3.5.M

- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 - 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-8. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - Signal Quality Index С
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz -10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

VI. Test Setup




Figure 4-14 Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 16 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 16 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

VII. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessibility of RF ports with battery installed.

VIII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFF100VM	POTEST Poul la la pot d'é venera	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 17 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 17 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

IX. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Center Channels and Frequencies									
Test frequencies & associated channels									
Channel	Frequency (MHz)								
Cellular 850									
384 (CDMA)	836.52								
190 (GSM)	836.60								
4183 (UMTS)	836.60								
AWS 1750									
1412 (UMTS)	1730.40								
PCS 1900									
600 (CDMA)	1880								
661 (GSM)	1880								
9400 (UMTS)	1880								

Table 4-3
Center Channels and Frequencies

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case bands according to Tables 7-6 and 7-7 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-13 and Tables 9-21 & 9-22 for LTE bandwidths and channels.

3. 5G (NR) Modes

The middle channel and supported bandwidths from the worst-case NR FDD band according to Table 7-11 was evaluated with OTT VoIP for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. See Table 9-23 for NR bandwidths and channels.

4. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-14 to 9-17 and 9-25 to 9-28 for WIFI standards and channels.

FCC ID: ZNFF100VM	POTEST Road to be post of @ element	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 19 of 02
1M2006150096-21-R1.ZNF 08/17/2020 - 08/24/2020		Portable Handset		Page 18 of 93
© 2020 PCTEST		· ·		REV 3.5.M

X. Test Flow

The flow diagram below was followed (From C63.19):

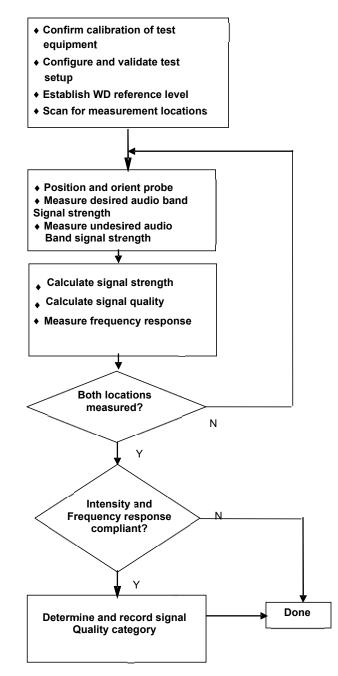


Figure 4-15 C63.19 T-Coil Signal Test Process

FCC ID: ZNFF100VM	POTEST Road to be part of @ enterest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 10 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 19 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

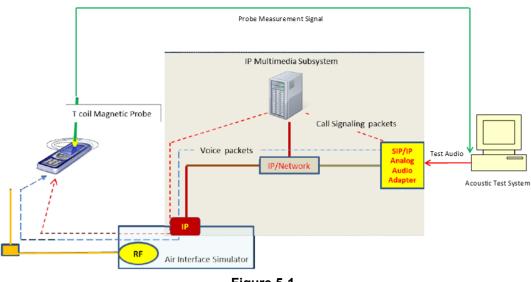


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level^{*}. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 20 of 93
© 2020 PCTEST		<u>.</u>		REV 3.5.M

8/18/2020

II. DUT Configuration for VoLTE over IMS T-coil Testing

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 50% RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
66	1745.0	132322	20	QPSK	1	0	0.93	-54.94	55.87
66	1745.0	132322	20	QPSK	1	50	0.64	-54.16	54.80
66	1745.0	132322	20	QPSK	1	99	0.78	-55.27	56.05
66	1745.0	132322	20	QPSK	50	0	0.87	-55.62	56.49
66	1745.0	132322	20	QPSK	50	25	0.61	-55.08	55.69
66	1745.0	132322	20	QPSK	50	50	1.26	-55.07	56.33
66	1745.0	132322	20	QPSK	100	0	0.88	-56.74	57.62
66	1745.0	132322	20	16QAM	1	0	0.87	-50.11	50.98
66	1745.0	132322	20	16QAM	1 50 0.74		-46.52	47.26	
66	1745.0	132322	20	16QAM	1	99	0.86	-48.61	49.47
66	1745.0	132322	20	16QAM	50	0	0.95	-55.15	56.10
66	1745.0	132322	20	16QAM	50	25	0.43	-56.77	57.20
66	1745.0	132322	20	16QAM	50	50	0.85	-54.99	55.84
66	1745.0	132322	20	16QAM	100	0	0.80	-57.17	57.97
66	1745.0	132322	20	64QAM	1	0	0.77	-50.77	51.54
66	1745.0	132322	20	64QAM	1	50	0.72	-47.87	48.59
66	1745.0	132322	20	64QAM	1	99	1.00	-49.22	50.22
66	1745.0	132322	20	64QAM	50	0	1.12	-55.69	56.81
66	1745.0	132322	20	64QAM	50	25	1.12	-54.72	55.84
66	1745.0	132322	20	64QAM	50	50	0.59	-56.81	57.40
66	1745.0	132322	20	64QAM	100	0	1.14	-57.80	58.94


Table 5-1 VoLTE over IMS SNNR by Radio Configuration

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

	Table 5-2 AMR Codec Investigation – VoLTE over IMS												
Codec Setting:	WRAMR WRAMR NRAMR NRAMR												
ABM1 (dBA/m)	1.64	0.68	4.84	4.91									
ABM2 (dBA/m)	-46.17	-45.80	-46.30	-46.13	Axial	Band 66	132322						
Frequency Response	Pass	Pass	Pass	Pass	Axiai 20MHz		152322						
S+N/N (dB)	47.81	46.48	51.14	51.04									

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram


FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 21 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 21 of 93
© 2020 PCTEST		•		REV 3.5.M

REV 3.5.M 8/18/2020

Codec Setting:	EVS Primary SWB 13.2kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel				
ABM1 (dBA/m)	9.01	8.60	2.48	1.32	5.33	3.45							
ABM2 (dBA/m)	-46.15	-46.12	-46.04	-46.20	-45.70	-45.46	Axial	Band 66 20MHz	132322				
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Axia						
S+N/N (dB)	55.16	54.72	48.52	47.52	51.03	48.91	ſ						

Table 5-3 EVS Codec Investigation - VoLTE over IMS

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10 \text{ ms}$, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1 \text{ ms}$, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	0	Subframe number 0 1 2 3 4 5 6 7 8 9								9	Calculated Transmission Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

 Table 5-4

 Uplink-Downlink Configurations for Type 2 Frame Structures

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 22 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 22 of 93
© 2020 PCTEST		•		REV 3.5.M

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 50% RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	50	0	0.94	-39.41	40.35
2593.0	40620	20	16QAM	1	50	1	0.82	-39.24	40.06
2593.0	40620	20	16QAM	1	50	2	0.66	-39.06	39.72
2593.0	40620	20	16QAM	1	50	3	0.63	-41.88	42.51
2593.0	40620	20	16QAM	1	50	4	0.92	-41.49	42.41
2593.0	40620	20	16QAM	1	50	5	0.77	-41.46	42.23
2593.0	40620	20	16QAM	1	50	6	0.45	-39.71	40.16

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

b. Conclusion

Per the investigations above, UL-DL Configuration 2 was used to evaluate Power Class 3 VoLTE over IMS.

FCC ID: ZNFF100VM	PCTEST Provide la la post at di generationali	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 22 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 23 of 93
© 2020 PCTEST		<u>.</u>		REV 3.5.M

6. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

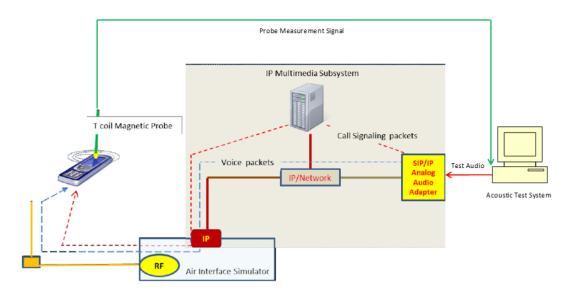


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFF100VM	PCTEST Road to be petit of gradients	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 24 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 24 of 93
© 2020 PCTEST				REV 3.5.M

^{© 2020} PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

II. DUT Configuration for VoWIFI over IMS T-coil Testing

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

IEEE 802.11b SNNR by Radio Configuration									
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
IEEE 802.11b	6	DSSS	1	-3.68	-39.75	36.07			
IEEE 802.11b	6	DSSS	2	-3.77	-40.62	36.85			
IEEE 802.11b	6	CCK	5.5	-3.73	-38.60	34.87			
IEEE 802.11b	6	CCK	11	-3.43	-38.82	35.39			

Table 6-1 IEEE 802.11b SNNR by Radio Configuration

 Table 6-2

 IEEE 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6 6	-3.71	-41.37	37.66
IEEE 802.11g	6	BPSK	9	-3.32	-42.00	38.68
IEEE 802.11g	6	QPSK	12	-3.33	-42.21	38.88
IEEE 802.11g	6	QPSK	18	-3.52	-42.29	38.77
IEEE 802.11g	6	16QAM	24	-3.36	-42.34	38.98
IEEE 802.11g	6	16QAM	36	-3.80	-42.69	38.89
IEEE 802.11g	6	64QAM	48	-3.51	-42.91	39.40
IEEE 802.11g	6	64QAM	54	-3.72	-43.29	39.57

Table 6-3 IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth	Channel	Modulation	MCS Index	ABM1	ABM2	SNNR
mouo	[MHz]	onanioi	modulation	moo maox	[dB(A/m)]	[dB(A/m)]	[dB]
IEEE 802.11n	20	40	BPSK	0	-3.30	-37.29	33.99
IEEE 802.11n	20	40	QPSK	1	-3.70	-38.82	35.12
IEEE 802.11n	20	40	QPSK	2	-3.61	-38.65	35.04
IEEE 802.11n	20	40	16QAM	3	-3.73	-38.72	34.99
IEEE 802.11n	20	40	16QAM	4	-3.61	-41.31	37.70
IEEE 802.11n	20	40	64QAM	5	-3.66	-39.57	35.91
IEEE 802.11n	20	40	64QAM	6	-3.63	-39.27	35.64
IEEE 802.11n	20	40	64QAM	7	-3.44	-38.16	34.72
IEEE 802.11ac	20	40	256QAM	8	-3.88	-42.93	39.05

FCC ID: ZNFF100VM	PCTEST Road to be paid of generation	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 25 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 25 of 93
© 2020 PCTEST		·		REV 3.5.M

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
IEEE 802.11n	40	38	BPSK	0	-3.85	-40.69	36.84			
IEEE 802.11n	40	38	QPSK	1	-3.92	-39.94	36.02			
IEEE 802.11n	40	38	QPSK	2	-3.75	-40.91	37.16			
IEEE 802.11n	40	38	16QAM	3	-3.99	-41.31	37.32			
IEEE 802.11n	40	38	16QAM	4	-3.72	-40.61	36.89			
IEEE 802.11n	40	38	64QAM	5	-3.47	-38.40	34.93			
IEEE 802.11n	40	38	64QAM	6	-3.75	-38.97	35.22			
IEEE 802.11n	40	38	64QAM	7	-3.66	-40.14	36.48			
IEEE 802.11ac	40	38	256QAM	8	-3.68	-41.12	37.44			
IEEE 802.11ac	40	38	256QAM	9	-3.53	-41.40	37.87			

Table 6-4 IEEE 802 11ax SU 20MHz BW SNNR by Radio Configuration

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:


AMR Codec Investigation – VoWIFI over IMS WB AN WB AM NB AMF 12.2kbps NB AMR 4.75kbps Standard Codec Setting: Orientation Band Channel 23.85kbp 6.60kbp ABM1 (dBA/r -2.26 -3.67 1.35 1.14 ABM2 (dBA/ -40.61 -39.21 -40.20 -39.84 Axial 2.4GHz IEEE 802.11b 6 Pass Pass Pass Frequency Respor Pass S+N/N (dE 38.35 35.54 41.55 40.98

Table 6-5

Table 6-6 EVS Codec Investigation – VoWIFI over IMS

Codec Setting:	EVS Primary SWB 13.2kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel	
ABM1 (dBA/m)	6.28	4.93	-1.35	-2.51	2.43	1.42					
ABM2 (dBA/m)	-41.82	-39.65	-39.14	-39.68	-39.48	-40.55	Axial	2.4GHz	IEEE 802.11b	6	
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Aniai	2.4012		0	
S+N/N (dB)	48.10	44.58	37.79	37.17	41.91	41.97					

Mute on; Backlight off; Max Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFF100VM	POTEST Provide la la potencia	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 26 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 26 of 93
© 2020 PCTEST		· ·		REV 3.5.M

8/18/2020

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Codec Investigation – OTT VOIP (EVDO)									
Codec Setting:	75kbps	6kbps	Orientation	Channel					
ABM1 (dBA/m)	3.97	3.75							
ABM2 (dBA/m)	-52.77	-52.25	Axial	600					
Frequency Response	Pass	Pass	Axia	600					
S+N/N (dB)	56.74	56.00							

Table 7-1	
Codec Investigation – OTT VoIP (EvDO)	

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 27 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 27 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

Codec I	Codec Investigation – OTT VoIP (EDGE)									
Codec Setting:	75kbps	6kbps	Orientation	Channel						
ABM1 (dBA/m)	4.58	4.49								
ABM2 (dBA/m)	-33.69	-33.74	Axial	661						
Frequency Response	Pass	Pass	Axia	001						
S+N/N (dB)	38.27	38.23								

T-61- 7 0

Table 7-3 Codec Investigation – OTT VoIP (HSPA)

Codec Setting:	75kbps	6kbps	Orientation	Channel			
ABM1 (dBA/m)	4.42	4.29					
ABM2 (dBA/m)	-56.47	-55.69	Axial	9400			
Frequency Response	Pass	Pass		5400			
S+N/N (dB)	60.89	59.98					

Table 7-4 Codec Investigation – OTT VoIP (LTE)


	00000	Jonganon	0.1.1.0.1	(=)	
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	3.99	3.48			
ABM2 (dBA/m)	-46.43	-45.95	Axial	Band 66 20MHz	132322
Frequency Response	Pass	Pass	Aniai		102022
S+N/N (dB)	50.42	49.43			

 Table 7-5

 Codec Investigation – OTT VoIP (WIFI)

Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel	
ABM1 (dBA/m)	3.71	3.30			IEEE 802.11b		
ABM2 (dBA/m)	-36.79	-36.87	Axial	2.4GHz			6
Frequency Response	Pass	Pass	Axiai	2.40112		0	
S+N/N (dB)	40.50	40.17					

- Mute on; Backlight off; Max Volume; Max Contrast
- Radio Configurations can be found in Section 9.II.H



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFF100VM	PCTEST Poul la la part d'é anoma	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 29 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 28 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 66 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
12	707.5	23095	10	16QAM	1	25	3.81	-47.45	51.26
13	782.0	23230	10	16QAM	1	25	3.64	-46.59	50.23
14	793.0	23330	10	16QAM	1	25	3.88	-47.87	51.75
5	836.5	20525	10	16QAM	1	25	3.81	-48.51	52.32
66	1745.0	132322	20	16QAM	1	50	3.62	-45.99	49.61
2	1880.0	18900	20	16QAM	1	50	3.55	-48.31	51.86
30	2310.0	27710	10	16QAM	1	25	3.90	-46.44	50.34

Table 7-6 OTT VoIP (LTE FDD) SNNR by LTE Band

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC3) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

OTT VOIP (LTE TDD) SNNR by LTE Band										
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
41 (PC3)	2593.0	40620	20	16QAM	1	50	3.67	-38.57	42.24	
48	3625.0	55990	20	16QAM	1	50	3.92	-38.62	42.54	

Table 7-7 OTT VoIP (LTE TDD) SNNR by LTE Band

3. LTE FDD Uplink Carrier Aggregation for OTT VolP

LTE FDD ULCA was evaluated to ensure LTE FDD standalone was the worst-case scenario. The configurations in Table 7-8 were determined from Table 7-6 and satisfy the configuration requirements as defined in 3GPP 36.101.

				PCC							SCC	00 .	J				
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	24	4.02	-48.63	52.65
12A-66A	LTE B12	10	23095	707.5	16QAM	1	0	LTE B66	20	132322	1745.0	16QAM	1	0	4.21	-46.00	50.21
66A-12A	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B12	10	23095	707.5	16QAM	1	0	3.86	-49.80	53.66
2A-12A	LTE B2	20	18900	1880.0	16QAM	1	0	LTE B12	10	23095	707.5	16QAM	1	0	3.84	-46.10	49.94
12A-2A	LTE B12	10	23095	707.5	16QAM	1	0	LTE B2	20	18900	1880.0	16QAM	1	0	3.75	-48.75	52.50
2A-5A	LTE B2	20	18900	1880.0	16QAM	1	0	LTE B5	10	20525	836.5	16QAM	1	0	4.12	-46.38	50.50
5A-2A	LTE B5	10	20525	836.5	16QAM	1	0	LTE B2	20	18900	1880.0	16QAM	1	0	3.80	-47.25	51.05
2A-66A	LTE B2	20	18900	1880.0	16QAM	1	0	LTE B66	20	132322	1745.0	16QAM	1	0	3.65	-46.45	50.10
66A-2A	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B2	20	18900	1880.0	16QAM	1	0	4.21	-48.13	52.34
5A-66A	LTE B5	10	20525	836.5	16QAM	1	0	LTE B66	20	132322	1745.0	16QAM	1	0	4.24	-46.55	50.79
66A-5A	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B5	10	20525	836.5	16QAM	1	0	4.34	-46.71	51.05

 Table 7-8

 LTE FDD SNNR for OTT VolP Uplink Carrier Aggregation

FCC ID: ZNFF100VM	PCTEST Road to be pail of @verseen	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 93
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset	ndset	
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 8/18/2020

4. Interim Procedure for evaluation OTT VoIP (NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
- b. Establish the ABM1_{NR} value by using the ABM1_{LTE} magnetic intensity for an LTE call using a correlating LTE band through existing procedures and test equipment.
- c. Establish an ABM2_{NR} value using factory test mode (FTM) to simulate a NR connection for the desired NR band and channel under test.
- d. The following information is documented in Section 9:
 - i. $ABM2_{LTE}$ and $ABM2_{NR}$ for respective tests.
 - ii. Calculate SNNR:
 - 1. $ABM1 = ABM1_{LTE}$
 - 2. ABM2 = $ABM2_{NR}$
 - 3. $SNNR_{NR} = [ABM1_{LTE} ABM2_{NR}] 3dB$
 - a. A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

FCC ID: ZNFF100VM	PCTEST Pool to be pool of @ weekeed	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 30 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

5. Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the procedure outlined in 7.II.4 was used to evaluate the SNNR for each radio configuration below. DFT-s-OFDM 16QAM, 1RB, 50%RB offset was determined to be the worst-case configuration for the handset and will be used for full testing in Section 9.

NR OTT VOIP SNNR by Radio Configuration (CP-OFDM)												
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]		
n66	1745.0	349000	20	CP-OFDM	QPSK	1	1	3.62	-56.08	59.70		
n66	1745.0	349000	20	CP-OFDM	QPSK	1	53	3.62	-55.94	59.56		
n66	1745.0	349000	20	CP-OFDM	QPSK	1	104	3.62	-56.80	60.42		
n66	1745.0	349000	20	CP-OFDM	QPSK	53	0	3.62	-54.29	57.91		
n66	1745.0	349000	20	CP-OFDM	QPSK	53	26	3.62	-53.54	57.16		
n66	1745.0	349000	20	CP-OFDM	QPSK	53	53	3.62	-54.09	57.71		
n66	1745.0	349000	20	CP-OFDM	QPSK	106	0	3.62	-54.46	58.08		
n66	1745.0	349000	20	CP-OFDM	16QAM	1	1	3.62	-56.85	60.47		
n66	1745.0	349000	20	CP-OFDM	16QAM	1	53	3.62	-56.57	60.19		
n66	1745.0	349000	20	CP-OFDM	16QAM	1	104	3.62	-56.83	60.45		
n66	1745.0	349000	20	CP-OFDM	16QAM	53	0	3.62	-54.27	57.89		
n66	1745.0	349000	20	CP-OFDM	16QAM	53	26	3.62	-53.78	57.40		
n66	1745.0	349000	20	CP-OFDM	16QAM	53	53	3.62	-54.33	57.95		
n66	1745.0	349000	20	CP-OFDM	16QAM	106	0	3.62	-56.54	60.16		
n66	1745.0	349000	20	CP-OFDM	64QAM	1	1	3.62	-53.16	56.78		
n66	1745.0	349000	20	CP-OFDM	64QAM	1	53	3.62	-52.79	56.41		
n66	1745.0	349000	20	CP-OFDM	64QAM	1	104	3.62	-53.13	56.75		
n66	1745.0	349000	20	CP-OFDM	64QAM	53	0	3.62	-56.03	59.65		
n66	1745.0	349000	20	CP-OFDM	64QAM	53	26	3.62	-56.04	59.66		
n66	1745.0	349000	20	CP-OFDM	64QAM	53	53	3.62	-56.39	60.01		
n66	1745.0	349000	20	CP-OFDM	64QAM	106	0	3.62	-56.37	59.99		
n66	1745.0	349000	20	CP-OFDM	256QAM	1	1	3.62	-55.30	58.92		
n66	1745.0	349000	20	CP-OFDM	256QAM	1	53	3.62	-55.27	58.89		
n66	1745.0	349000	20	CP-OFDM	256QAM	1	104	3.62	-55.00	58.62		
n66	1745.0	349000	20	CP-OFDM	256QAM	53	0	3.62	-57.08	60.70		
n66	1745.0	349000	20	CP-OFDM	256QAM	53	26	3.62	-56.69	60.31		
n66	1745.0	349000	20	CP-OFDM	256QAM	53	53	3.62	-56.21	59.83		
n66	1745.0	349000	20	CP-OFDM	256QAM	106	0	3.62	-56.24	59.86		

Table 7-9
NR OTT VolP SNNR by Radio Configuration (CP-OFDM)

FCC ID: ZNFF100VM	PCTEST Bload to be part of @ remember	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 21 of 02	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 31 of 93	
© 2020 PCTEST				REV 3.5.M	

8/18/2020

	NR OT I VOIP SNNR by Radio Configuration (DFT-S-OFDM)												
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1LTE [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	1	1	3.62	-55.84	59.46			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	1	53	3.62	-55.82	59.44			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	1	104	3.62	-55.82	59.44			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	50	0	3.62	-56.96	60.58			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	50	28	3.62	-56.62	60.24			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	50	56	3.62	-56.37	59.99			
n66	1745.0	349000	20	DFT-s-OFDM	π/2-BPSK	100	0	3.62	-55.27	58.89			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	1	1	3.62	-54.40	58.02			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	1	53	3.62	-53.61	57.23			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	1	104	3.62	-54.69	58.31			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	50	0	3.62	-55.95	59.57			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	50	28	3.62	-56.22	59.84			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	50	56	3.62	-56.00	59.62			
n66	1745.0	349000	20	DFT-s-OFDM	QPSK	100	0	3.62	-56.63	60.25			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	1	1	3.62	-49.93	53.55			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	1	53	3.62	-48.86	52.48			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	1	104	3.62	-49.88	53.50			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	50	0	3.62	-55.47	59.09			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	50	28	3.62	-55.54	59.16			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	50	56	3.62	-56.16	59.78			
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	100	0	3.62	-50.47	54.09			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	1	1	3.62	-52.62	56.24			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	1	53	3.62	-51.98	55.60			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	1	104	3.62	-52.98	56.60			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	50	0	3.62	-55.30	58.92			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	50	28	3.62	-55.94	59.56			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	50	56	3.62	-55.84	59.46			
n66	1745.0	349000	20	DFT-s-OFDM	64QAM	100	0	3.62	-50.32	53.94			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	1	1	3.62	-54.28	57.90			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	1	53	3.62	-53.79	57.41			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	1	104	3.62	-54.37	57.99			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	50	0	3.62	-56.71	60.33			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	50	28	3.62	-57.15	60.77			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	50	56	3.62	-56.42	60.04			
n66	1745.0	349000	20	DFT-s-OFDM	256QAM	100	0	3.62	-53.91	57.53			

Table 7-10 NR OTT VoIP SNNR by Radio Configuration (DFT-s-OFDM)

An investigation was performed to determine the worst-case NR FDD band to be used for OTT VoIP testing. NR n5 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR FDD bands:

Table 7-11OTT VoIP (NR FDD) SNNR by Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	53	3.81	-46.58	50.39
n66	1745.0	349000	20	DFT-s-OFDM	16QAM	1	53	3.62	-49.41	53.03
n2	1880.0	376000	20	DFT-s-OFDM	16QAM	1	53	3.55	-55.15	58.70

FCC ID: ZNFF100VM	PCTEST Provide la la post at di generationali	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:	DUT Type:	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 32 of 93
© 2020 PCTEST		· ·		REV 3.5.M

8/18/2020

8. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worstcase configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

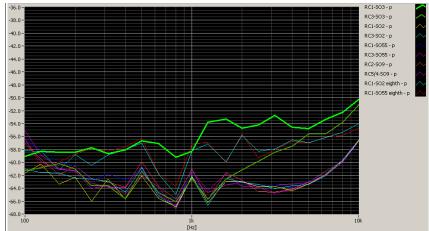



Figure 8-1 CDMA Audio Band Magnetic Noise

Table 8-1	
FCC 3G ABM Measurements for ZNFF100VM (CDMA)	

Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel		
ABM1 (dBA/m)	5.69	5.97	6.03		600		
ABM2 (dBA/m)	-45.66	-52.20	-59.35	Axial			
Frequency Response	Pass	Pass	Pass				
S+N/N (dB)	51.35	58.17	65.38				

• Mute on; Backlight off; Max Volume; Max Contrast

Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFF100VM	Road to be post of @ element	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		D 00 (00	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 33 of 93	
© 2020 PCTEST				REV 3.5.M	

REV 3.5.M 8/18/2020

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB (thick, purple data curve) was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:

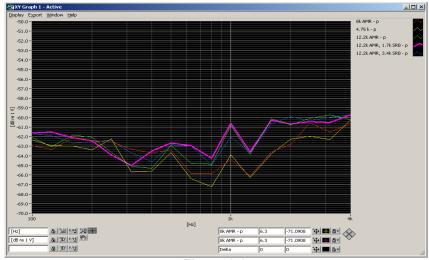



Figure 8-3 UMTS Audio Band Magnetic Noise

Table 8-2 Codec Investigation - UMTS

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
ABM1 (dBA/m)	6.37	6.30	6.07		9400
ABM2 (dBA/m)	-52.95	-54.12	-56.14	Avial	
Frequency Response	Pass	Pass	Pass	– Axial	
S+N/N (dB)	59.32	60.42	62.21		

Mute on; Backlight off; Max Volume; Max Contrast

TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFF100VM	POTEST Road to be post of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 24 af 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 34 of 93
© 2020 PCTEST		•		REV 3.5.M

REV 3.5.M 8/18/2020

T-COIL TEST SUMMARY 9.

© 2020 PCTEST

	Consolidated Table						Results					
			Freq. Response Margin 8.3.2		Magnetic Intensity Verdict 8.3.1		FCC SNNR Verdict		Margin from FCC Limit	C63.19-201		
	C62.4	0 Section					8.	3.4	(dB)	Ratir	ng	
	C63.1	9 Section	Axial	Radial	Axial	Radial	Axial	Radial				
	CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-22.70	-22.70 T4		
	CDWA	PCS	PASS	NA	PASS	PASS	PASS	PASS	-22.70	T4		
	EvDO	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-31.52			
	(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-51.52	14	14	
	GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-14.35	T4		
		PCS	PASS	NA	PASS	PASS	PASS	PASS	-14.55	14		
	EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-14.88	Т4		
	(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-14.00	14		
		Cellular	PASS	NA	PASS	PASS	PASS	PASS				
	UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-34.47	Т4		
		PCS	PASS	NA	PASS	PASS	PASS	PASS				
	11004	Cellular	PASS	NA	PASS	PASS	PASS	PASS		T4		
	HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-33.39			
		PCS	PASS	NA	PASS	PASS	PASS	PASS				
		B12	PASS	NA	PASS	PASS	PASS	PASS				
		B13	PASS	NA	PASS	PASS	PASS	PASS				
		B14	PASS	NA	PASS	PASS	PASS	PASS				
	LTE FDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-22.22	Т4		
		B66	PASS	NA	PASS	PASS	PASS	PASS				
		B2	PASS	NA	PASS	PASS	PASS	PASS				
		B30	PASS	NA	PASS	PASS	PASS	PASS				
	LTE FDD (OTT VoIP)	B66	PASS	NA	PASS	PASS	PASS	PASS	-27.11	Т4		
	LTE TDD	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	-13.64	Τ4		
		B48	PASS	NA	PASS	PASS	PASS	PASS	-13.04			
	LTE TDD (OTT VoIP)	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	-17.87	Т4		
	NR FDD (OTT VoIP)	n5	NA	NA	PASS	PASS	PASS	PASS	-26.57	Т4		
		IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS		TA		
		IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	40.04			
	WLAN	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-12.94	Т4		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				
		IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS		T4		
	WLAN	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-19.97			
	(OTT VoIP)	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-19.97	14		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				
		IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS				
	U-NII	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-12.43	T4		
		IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				
	U-NII (OTT VoIP)	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS				
		IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-21.26	Τ4		
	()	IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS				
C ID: ZNFF	=100VM	PCTE S	5 7	T HAC (T-COIL) TEST REPORT						🕒 LG		proved b ality Man
ename:	DUT Type:											
	6-21-R1.ZNF	Test Dates: 08/17/2020 - 0									Pag	ge 35 of 9

Table 9-1 **Consolidated Tabled Results**

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

REV 3.5.M 8/18/2020

I. **Raw Handset Data**

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	1013	Normal	6.20	-40.80	-64.33	2.00	47.00	20.00	-27.00	T4	2.0, 2.8
		384	Normal	5.71	-42.13		2.00	47.84	20.00	-27.84	T4	
	Aniai	777	Normal	6.21	-41.03	-04.55	2.00	47.24	20.00	-27.24	T4	
Cellular		1013	Swivel	6.28	0.00	İ	1.37	47.70	20.00	-27.70	T4	
Cellular	Radial	1013	Normal	-1.89	-48.73		N/A	46.84	20.00	-26.84	T4	2.0, 3.4
		384	Normal	-2.00	-48.95	-63.77		46.95	20.00	-26.95	T4	
		777	Normal	-2.10	-49.23			47.13	20.00	-27.13	T4	
		1013	Swivel	-2.62	-45.32			42.70	20.00	-22.70	T4	
	Axial	25	Normal	6.10	-45.27	-64.33	2.00	51.37	20.00	-31.37	T4	2.0, 2.8
		600	Normal	6.12	-45.05		2.00	51.17	20.00	-31.17	T4	
		1175	Normal	6.20	-44.15		2.00	50.35	20.00	-30.35	T4	
PCS		1175	Swivel	6.33	-44.40		1.38	50.73	20.00	-30.73	T4	
PCS		25	Normal	-2.26	-51.67	-63.77	N/A	49.41	20.00	-29.41	T4	2.0, 3.4
	Radial	600	Normal	-1.99	-52.56			50.57	20.00	-30.57	T4	
	radiai	1175	Normal	-2.22	-51.74		-03.77	IN/A	49.52	20.00	-29.52	T4
		25	Swivel	-2.57	-51.45			48.88	20.00	-28.88	T4	

Table 9-2 **Raw Data Results for CDMA**

Table 9-3 **Raw Data Results for GSM**

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	128	Normal	6.24	-32.11	-64.33	2.00	38.35	20.00	-18.35	T4	2.0, 2.8
		190	Normal	5.84	-31.60		2.00	37.44	20.00	-17.44	T4	
	Axiai	251	Normal	5.79	-33.07	-04.33	2.00	38.86	20.00	-18.86	T4	
GSM850		190	Swivel	5.82	-31.20	1	1.97	37.02	20.00	-17.02	T4	
6510050	Radial	128	Normal	-0.39	-36.89	-63.77	N/A	36.50	20.00	-16.50	T4	2.0, 3.4
		190	Normal	-0.26	-36.43			36.17	20.00	-16.17	T4	
		251	Normal	-0.33	-35.53			35.20	20.00	-15.20	T4	
		251	Swivel	-0.58	-35.38			34.80	20.00	-14.80	T4	
	Axial	512	Normal	5.73	-32.87	-64.33	2.00	38.60	20.00	-18.60	T4	2.0, 2.8
		661	Normal	6.25	-32.93		2.00	39.18	20.00	-19.18	T4	
		810	Normal	6.01	-33.56		2.00	39.57	20.00	-19.57	T4	
GSM1900		512	Swivel	5.99	-31.38		1.92	37.37	20.00	-17.37	T4	
	Radial	512	Normal	-0.29	-36.54	-63.77	-63.77 N/A	36.25	20.00	-16.25	T4	
		661	Normal	-0.27	-36.65			36.38	20.00	-16.38	T4	2.0, 3.4
		810	Normal	-0.30	0.00			37.38	20.00	-17.38	T4	2.0, 3.4
		512	Swivel	-0.57	-34.92			34.35	20.00	-14.35	T4	

FCC ID: ZNFF100VM	PCTEST Provide la Be port of Concession	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 26 of 02	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 36 of 93	
© 2020 PCTEST				REV 3.5.M	

8/18/2020

				INAN	Data	Results I		,				
Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	Normal	5.74	-54.15		2.00	59.89	20.00	-39.89	T4	
	Axial	4183	Normal	5.75	-53.47	-64.33	2.00	59.22	20.00	-39.22	T4	2.0, 2.8
	Aniai	4233	Normal	6.00	-53.80	-04.55	2.00	59.80	20.00	-39.80	T4	2.0, 2.0
UMTS V		4183	Swivel	5.58	-52.64		2.00	58.22	20.00	-38.22	T4	
UNITSV		4132	Normal	-0.71	-58.98			58.27	20.00	-38.27	T4	
	Radial	4183	Normal	-0.69	-57.97	-63.77	N/A	57.28	20.00	-37.28	T4	2.0, 3.4
	Raulai	4233	Normal	-0.77	-58.89	-03.77	IN/A	58.12	20.00	-38.12	T4	2.0, 3.4
		4183	Swivel	-0.83	-57.55	1		56.72	20.00	-36.72	T4	
		1312	Normal	5.61	-54.28		2.00	59.89	20.00	-39.89	T4	
	Axial	1412	Normal	5.77	-53.01	-64.33	2.00	58.78	20.00	-38.78	T4	2.0, 2.8
	Axiai	1513	Normal	5.78	-54.72	-04.00	2.00	60.50	20.00	-40.50	T4	2.0, 2.0
UMTS IV		1412	Swivel	5.53	-50.89	1	1.96	56.42	20.00	-36.42	T4	
UNITSIV		1312	Normal	-0.72	-57.78			57.06	20.00	-37.06	T4	
	Radial	1412	Normal	-0.73	-59.67	-63.77	N/A	58.94	20.00	-38.94	T4	2.0, 3.4
	Raulai	1513	Normal	-0.71	-58.05	-03.77	IN/A	57.34	20.00	-37.34	T4	2.0, 3.4
		1312	Swivel	-0.68	-56.90	1		56.22	20.00	-36.22	T4	1
		9262	Normal	6.15	-54.53		2.00	60.68	20.00	-40.68	T4	
	Axial	9400	Normal	5.68	-54.28	-64.33	2.00	59.96	20.00	-39.96	T4	2.0, 2.8
	Ахіаі	9538	Normal	5.71	-55.01	-04.33	2.00	60.72	20.00	-40.72	T4	2.0, 2.0
UMTS II		9400	Swivel	5.52	-53.64		1.96	59.16	20.00	-39.16	T4	
UWISI		9262	Normal	-0.67	-59.59			58.92	20.00	-38.92	T4	
	Radial	9400	Normal	-0.67	-58.14	62.77	NI/A	57.47	20.00	-37.47	T4	20.24
	radiai	9538	Normal	-0.70	-57.60	-63.77 N/A	56.90	20.00	-36.90	T4	2.0, 3.4	
	Naulai	9538	Swivel	-0.96	-55.43			54.47	20.00	-34.47	T4	1

Table 9-4 Raw Data Results for UMTS

Table 9-5 Raw Data Results for LTE B12

					Duto								
Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
		10MHz	23095	Normal	0.84	-47.78		1.97	48.62	20.00	-28.62	T4	
		5MHz	23095	Normal	0.59	-47.23		1.81	47.82	20.00	-27.82	T4	
	Axial	3MHz	23095	Normal	0.81	-47.77	-64.33	1.95	48.58	20.00	-28.58	T4	2.0, 2.8
		1.4MHz	23095	Normal	0.54	-48.31		2.00	48.85	20.00	-28.85	T4	
LTE Band		5MHz	23095	Swivel	0.37	-47.11		2.00	47.48	20.00	-27.48	T4	
12		10MHz	23095	Normal	-5.56	-53.98			48.42	20.00	-28.42	T4	
		5MHz	23095	Normal	-5.30	-54.44			49.14	20.00	-29.14	T4	
	Radial	3MHz	23095	Normal	-5.49	-54.95	-63.59	N/A	49.46	20.00	-29.46	T4	2.0, 3.4
		1.4MHz	23095	Normal	-5.64	-51.42			45.78	20.00	-25.78	T4	
		1.4MHz	23095	Swivel	-5.55	-50.95			45.40	20.00	-25.40	T4	

Table 9-6Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23230	Normal	0.83	-48.49		2.00	49.32	20.00	-29.32	T4	
	Axial	5MHz	23230	Normal	0.68	-47.23	-64.33	2.00	47.91	20.00	-27.91	T4	2.0, 2.8
LTE Band		5MHz	23230	Swivel	0.18	-45.89		2.00	46.07	20.00	-26.07	T4	
13		10MHz	23230	Normal	-5.36	-52.96			47.60	20.00	-27.60	T4	
	Radial	5MHz	23230	Normal	-5.58	-54.34	-63.59	N/A	48.76	20.00	-28.76	T4	2.0, 3.4
		10MHz	23230	Swivel	-5.60	-50.12			44.52	20.00	-24.52	T4	1

Table 9-7Raw Data Results for LTE B14

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates
		10MHz	23330	Normal	0.64	-44.17		1.73	44.81	20.00	-24.81	T4	
	Axial	5MHz	23330	Normal	0.70	-45.14	-64.33	2.00	45.84	20.00	-25.84	T4	2.0, 2.8
LTE Band		10MHz	23330	Swivel	0.50	-44.07		2.00	44.57	20.00	-24.57	T4	
14		10MHz	23330	Normal	-5.66	-50.37			44.71	20.00	-24.71	T4	
Radial	5MHz	23330	Normal	-5.88	-50.90	-63.59	-63.59	N/A	45.02	20.00	-25.02	T4	2.0, 3.4
		10MHz	23330	Swivel	-5.63	-47.85			42.22	20.00	-22.22	T4	

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 27 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 37 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

Table 9-8 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
		10MHz	20525	Normal	0.95	-48.37		2.00	49.32	20.00	-29.32	T4				
		5MHz	20525	Normal	0.85	-47.03]	2.00	47.88	20.00	-27.88	T4				
	Axial	3MHz	20525	Normal	0.90	-47.65	-64.33	2.00	48.55	20.00	-28.55	T4	2.0, 2.8			
		1.4MHz	20525	Normal	0.63	-47.81		2.00	48.44	20.00	-28.44	T4				
LTE Band 5		5MHz	20525	Swivel	0.66	-46.52		2.00	47.18	20.00	-27.18	T4				
LIE Ballu 5		10MHz	20525	Normal	-5.34	-53.39			48.05	20.00	-28.05	T4				
		5MHz	20525	Normal	-5.66	-53.95	-63.59	-63.59	-63.59			48.29	20.00	-28.29	T4	
	Radial	3MHz	20525	Normal	-5.68	-53.72						48.04	20.00	-28.04	T4	2.0, 3.4
		1.4MHz	20525	Normal	-5.54	-53.56			48.02	20.00	-28.02	T4				
		1.4MHz	20525	Swivel	-5.49	-49.23]		43.74	20.00	-23.74	T4]			

Table 9-9 Raw Data Results for LTE B66

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	132322	Normal	0.94	-46.47		2.00	47.41	20.00	-27.41	T4		
		15MHz	132322	Normal	0.87	-47.39		2.00	48.26	20.00	-28.26	T4		
		10MHz	132322	Normal	0.55	-47.59		1.85	48.14	20.00	-28.14	T4		
	Axial	5MHz	132322	Normal	0.93	-46.91	-64.33	2.00	47.84	20.00	-27.84	T4	2.0, 2.8	
		3MHz	132322	Normal	0.53	-47.03		2.00	47.56	20.00	-27.56	T4		
	-	1.4MHz	132322	Normal	0.55	-47.49		1.98	48.04	20.00	-28.04	T4		
LTE Band		20MHz	132322	Swivel	0.97	-45.98		2.00	46.95	20.00	-26.95	T4		
66		20MHz	132322	Normal	-5.72	-53.33	-			47.61	20.00	-27.61	T4	
		15MHz	132322	Normal	-5.62	-53.80				48.18	20.00	-28.18	T4	
		10MHz	132322	Normal	-5.77	-53.37					47.60	20.00	-27.60	T4
	Radial	5MHz	132322	Normal	-5.66	-54.08	-63.59	N/A	48.42	20.00	-28.42	T4	2.0, 3.4	
		3MHz	132322	Normal	-5.77	-53.30	30 34	.30	47.53	20.00	-27.53	T4		
		1.4MHz	132322	Normal	-5.69	-53.34				47.65	20.00	-27.65	T4]
		3MHz	132322	Swivel	-5.73	-50.31			44.58	20.00	-24.58	T4		

Table 9-10 Raw Data Results for LTE B2

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	18900	Normal	0.70	-48.76		1.99	49.46	20.00	-29.46	T4		
		15MHz	18900	Normal	0.55	-48.75		1.93	49.30	20.00	-29.30	T4		
		10MHz	18900	Normal	0.61	-49.38		1.83	49.99	20.00	-29.99	T4		
	Axial	5MHz	18900	Normal	0.86	-49.09	-64.33	1.93	49.95	20.00	-29.95	T4	2.0, 2.8	
		3MHz	18900	Normal	0.55	-49.75		1.	1.84	50.30	20.00	-30.30	T4	
		1.4MHz	18900	Normal	0.86	-49.58		2.00	50.44	20.00	-30.44	T4		
LTE Band 2		15MHz	18900	Swivel	0.77	-48.54		2.00	49.31	20.00	-29.31	T4		
LIE Dallu Z		20MHz	18900	Normal	-5.75	-56.38		4.58		50.63	20.00	-30.63	T4	
		15MHz	18900	Normal	-5.40	-54.58				49.18	20.00	-29.18	T4	
		10MHz	18900	Normal	-5.59	-55.32			49.73	20.00	-29.73	T4		
	Radial	5MHz	18900	Normal	-5.77	-54.45	-63.59	N/A	48.68	20.00	-28.68	T4	2.0, 3.4	
		3MHz	18900	Normal	-5.62	-54.95			49.33	20.00	-29.33	T4		
		1.4MHz	18900	Normal	-5.76	-54.93		-			49.17	20.00	-29.17	T4
		5MHz	18900	Swivel	-5.40	-51.35			45.95	20.00	-25.95	T4		

Table 9-11 Raw Data Results for LTE B30

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	27710	Normal	0.58	-45.74		1.75	46.32	20.00	-26.32	T4	
	Axial	5MHz	27710	Normal	0.68	-44.52	-64.33	2.00	45.20	20.00	-25.20	T4	2.0, 2.8
LTE Band		5MHz	27710	Swivel	0.59	-44.07		2.00	44.66	20.00	-24.66	T4	
30		10MHz	27710	Normal	-5.80	-49.93			44.13	20.00	-24.13	T4	
	Radial	5MHz	27710	Normal	-5.54	-50.71	-63.59	N/A	45.17	20.00	-25.17	T4	2.0, 3.4
		10MHz	27710	Swivel	-5.64	-47.99	1		42.35	20.00	-22.35	T4	

FCC ID: ZNFF100VM	PCTEST Road to be paid of generation	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 29 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 38 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

Table 9-12
Raw Data Results for LTE B41 Power Class 3

				an Data													
Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates				
		20MHz	40620	Normal	0.64	-39.12		1.84	39.76	20.00	-19.76	T4					
		15MHz	40620	Normal	0.90	-38.88		1.97	39.78	20.00	-19.78	T4					
		10MHz	41490	Normal	0.71	-40.30		1.90	41.01	20.00	-21.01	T4					
		10MHz	41055	Normal	0.65	-40.48		1.83	41.13	20.00	-21.13	T4					
	Axial	10MHz	40620	Normal	0.66	-38.57	-64.33	1.94	39.23	20.00	-19.23	T4	2.0, 2.8				
		10MHz	40185	Normal	0.92	-38.69		2.00	39.61	20.00	-19.61	T4					
LTE Band		10MHz	39750	Normal	0.73	-38.82	-	1.97	39.55	20.00	-19.55	T4					
41		5MHz	40620	Normal	0.70	-39.07		1	1.98	39.77	20.00	-19.77	T4				
		10MHz	40620	Swivel	0.59	-38.20]	2.00	38.79	20.00	-18.79	T4					
		20MHz	40620	Normal	-5.81	-42.79			36.98	20.00	-16.98	T4					
		15MHz	40620	Normal	-5.61	-42.54	-		-		36.93	20.00	-16.93	T4			
	Radial	10MHz	40620	Normal	-5.75	-42.19	-63.59	N/A	36.44	20.00	-16.44	T4	2.0, 3.4				
		5MHz	40620	Normal	-5.94	-42.57		-	-				36.63	20.00	-16.63	T4	1
		10MHz	40620	Swivel	-5.94	-40.02	1		34.08	20.00	-14.08	T4					

Table 9-13Raw Data Results for LTE B48

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates					
		20MHz	55990	Normal	0.96	-38.96		2.00	39.92	20.00	-19.92	T4						
		15MHz	55990	Normal	0.63	-39.01		2.00	39.64	20.00	-19.64	T4						
	Axial	10MHz	55990	Normal	0.78	-39.00	-64.33	1.93	39.78	20.00	-19.78	T4	2.0, 2.8					
		5MHz	55990	Normal	0.89	-39.35		1.87	40.24	20.00	-20.24	T4						
		15MHz	55990	Swivel	0.83	-38.93	1	2.00	39.76	20.00	-19.76	T4						
LTE Band		20MHz	56640	Normal	-5.58	-39.90	-		34.32	20.00	-14.32	T4						
48		20MHz	55990	Normal	-5.84	-39.60				33.76	20.00	-13.76	T4					
		20MHz	55340	Normal	-5.47	-39.11		-63.59 N/A	33.64	20.00	-13.64	T4						
	Radial	15MHz	55990	Normal	-5.63	-39.82	.82 -63.59 .84 .19		34.19	20.00	-14.19	T4	2.0, 3.4					
		10MHz	55990	Normal	-5.63	-39.84				4	4		5.55 INA	34.21	20.00	-14.21	T4	
		5MHz	55990	Normal	-5.33	-40.19								34.86	20.00	-14.86	T4	
		20MHz	55340	Swivel	-5.64	-42.04			36.40	20.00	-16.40	T4	1					

Table 9-14 Raw Data Results for 2.4GHz WIFI

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	Normal	-2.94	-39.05		2.00	36.11	20.00	-16.11	T4	
	Axial	6	Normal	-2.93	-39.00	-64.33	2.00	36.07	20.00	-16.07	T4	20.20
	Ала	11	Normal	-3.45	-38.65	-04.33	2.00	35.20	20.00	-15.20	T4	2.0, 2.8
IEEE		11	Swivel	-2.43	-35.37		2.00	32.94	20.00	-12.94	T4	
802.11b		1	Normal	-9.49	-47.03			37.54	20.00	-17.54	T4	
	Radial	6	Normal	-9.43	-47.09	-63.59	N/A	37.66	20.00	-17.66	T4	2.0, 3.4
	Radiai	11	Normal	-9.15	-48.12	-03.59	IN/A	38.97	20.00	-18.97	T4	2.0, 3.4
		1	Swivel	-9.48	-51.15			41.67	20.00	-21.67	T4	
IEEE	Axial	6	Normal	-2.99	-41.82	-64.33	2.00	38.83	20.00	-18.83	T4	2.0, 2.8
802.11g	Radial	6	Normal	-9.59	-51.76	-63.59	N/A	42.17	20.00	-22.17	T4	2.0, 3.4
IEEE	Axial	6	Normal	-2.37	-43.03	-64.33	2.00	40.66	20.00	-20.66	T4	2.0, 2.8
802.11n	Radial	6	Normal	-9.39	-50.18	-63.59	N/A	40.79	20.00	-20.79	T4	2.0, 3.4
IEEE	Axial	6	Normal	-3.14	-43.36	-64.33	2.00	40.22	20.00	-20.22	T4	2.0, 2.8
802.11ac	Radial	6	Normal	-9.47	-51.11	-63.59	N/A	41.64	20.00	-21.64	T4	2.0, 3.4

FCC ID: ZNFF100VM	PCTEST Poul la be pat al @ energy	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 20 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 39 of 93
© 2020 PCTEST		· ·		REV 3.5.M

8/18/2020

Table 9-15
Raw Data Results for 5GHz WIFI IEEE 802.11a

Mode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	1	40	Normal	-3.24	-39.81		2.00	36.57	20.00	-16.57	T4		
		20MHz	2A	52	Normal	-3.40	-37.90		2.00	34.50	20.00	-14.50	T4		
		20MHz	2A	56	Normal	-3.32	-38.78		2.00	35.46	20.00	-15.46	T4		
	Axial	20MHz	2A	64	Normal	-3.44	-39.39	-64.33	2.00	35.95	20.00	-15.95	T4	2.0, 2.8	
		20MHz	2C	120	Normal	-2.87	-39.60		2.00	36.73	20.00	-16.73	T4		
		20MHz	3	157	Normal	-3.03	-39.95	-	2.00	36.92	20.00	-16.92	T4		
		20MHz	2A	52	Swivel	-3.23	-35.66		2.00	32.43	20.00	-12.43	T4		
IEEE 802.11a															
002.11a		20MHz	1	40	Normal	-9.52	-53.57			44.05	20.00	-24.05	T4		
		20MHz	2A	56	Normal	-9.58	-55.44			45.86	20.00	-25.86	T4		
		20MHz	2C	100	Normal	-9.36	-53.67	3.67 2.81 -63.59 N/A 3.04 5.06	7		44.31	20.00	-24.31	T4	
	Radial	20MHz	2C	120	Normal	-9.70	70 -52.81 -63.59 .55 -53.04					43.11	20.00	-23.11	T4
		20MHz	2C	144	Normal	-9.55				43.49	20.00	-23.49	T4		
		20MHz	3	157	Normal	-9.48			45.58	20.00	-25.58	T4			
		20MHz	2C	120	Swivel	-9.53	-53.04			43.51	20.00	-23.51	T4		

Table 9-16Raw Data Results for 5GHz WIFI IEEE 802.11n

	Mode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates			
		Avial	40MHz	1	38	Normal	-2.79	-42.79	-64.33	2.00	40.00	20.00	-20.00	T4	2.0. 2.8			
	IEEE	Axial	20MHz	1	40	Normal	-2.94	-41.02	-04.33	2.00	38.08	20.00	-18.08	-18.08 T4	2.0, 2.0			
	802.11n																	
	802.11n	Radial	40MHz	1	38	Normal	-9.61	-54.99	-54.99	-54.99	-54.99	-63.59	-63.59 N/A	45.38	20.00	-25.38	T4	2.0. 3.4
			20MHz	1	40	Normal	-9.66	-55.53	-63.59	-63.59	-63.59			9 N/A	45.87	20.00	-25.87	T4

Table 9-17Raw Data Results for 5GHz WIFI IEEE 802.11ac

м	ode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates		
		Avial	40MHz	1	38	Normal	-3.37	-43.18	-64.33	2.00	39.81	20.00	-19.81	T4	2.0, 2.8		
	IEEE 802.11ac	Axial	20MHz	1	40	Normal	-3.29	-42.10	-04.33	2.00	38.81	20.00	-18.81	T4	2.0, 2.0		
001		Radial	40MHz	1	38	Normal	-9.73	-56.42	62.50	NIZA	46.69	20.00	-26.69	T4	2.0. 3.4		
		Nadiai	20MHz	1	40	Normal	-9.51	-54.97	-54.97 -63.59	-63.59	-63.59	-63.59 N/A	IN/A	45.46	20.00	-25.46	T4

Table 9-18 Raw Data Results for EvDO (OTT VoIP)

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	384	Normal	3.26	-56.04	-64.33	1.69	59.30	20.00	-39.30	T4	2.0, 2.8
Cellular	Axiai	384	Swivel	3.60	-53.98	-04.33	1.53	57.58	20.00	-37.58	T4	2.0, 2.0
EvDO	EvDO Radial	384	Normal	-2.74	-56.02	-63.59	N/A	53.28	20.00	-33.28	T4	00.04
	Radial	384	Swivel	-2.70	-54.22	-03.59	N/A	51.52	20.00	-31.52	T4	2.0, 3.4
	Axial	600	Normal	4.18	-53.63	-64.33	1.90	57.81	20.00	-37.81	T4	2.0, 2.8
PCS		600	Swivel	3.95	-54.21	-04.33	1.48	58.16	20.00	-38.16	T4	2.0, 2.0
EvDO	EvDO	600	Normal	-2.86	-56.90	-63.59	N/A	54.04	20.00	-34.04	T4	2.0, 3.4
	Radial	600	Swivel	-2.45	-55.12	-03.59	IN/A	52.67	20.00	-32.67	T4	2.0, 3.4

FCC ID: ZNFF100VM	POTEST Poul la la poul di Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 40 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 40 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
	Axial	190	Normal	3.79	-34.00	-64.33	1.63	37.79	20.00	-17.79	T4	2.0, 2.8	
EDGE850	Axiai	190	Swivel	3.97	-33.31	-04.33	1.73	37.28	20.00	-17.28	T4	2.0, 2.0	
EDGE850	Dedial	190	Normal	-2.75	-38.32	-63.77	N/A	35.57	20.00	-15.57	T4	2.0, 3.4	
	Radial	190	Swivel	-2.92	-38.42	-03.77	IN/A	35.50	20.00	-15.50	T4	2.0, 3.4	
	Axial	661	Normal	4.23	-33.73	-64.33	1.45	37.96	20.00	-17.96	T4	2.0, 2.8	
EDGE1900	Axiai	661	Swivel	3.62	-33.66	-04.55	1.60	37.28	20.00	-17.28	T4	2.0, 2.0	
20021900	Radial	661	Normal	-2.79	-39.32	-63.77	-63.77 N/A	NIA	36.53	20.00	-16.53	T4	2.0, 3.4
	radiai	661	Swivel	-2.46	-37.34			IN/A	34.88	20.00	-14.88	T4	2.0, 3.4

Table 9-19Raw Data Results for EDGE (OTT VoIP)

Table 9-20 Raw Data Results for HSPA (OTT VoIP)

Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	4183	Normal	4.03	-56.48	-64.33	1.59	60.51	20.00	-40.51	T4	2.0, 2.8
HSPA V	Aniai	4183	Swivel	4.25	-54.58	-04.33	1.67	58.83	20.00	-38.83	T4	2.0, 2.0
HSFA V	Radial	4183	Normal	-2.78	-58.13	-63.77	N/A	55.35	20.00	-35.35	T4	2.0, 3.4
		4183	Swivel	-2.64	-56.03	-03.77	IN/A	53.39	20.00	-33.39	T4	2.0, 3.4
	Axial	1412	Normal	3.79	-56.45	-64.33	1.85	60.24	20.00	-40.24	T4	2.0, 2.8
HSPA IV	Aniai	1412	Swivel	3.98	-54.39	-04.33	1.71	58.37	20.00	-38.37	T4	2.0, 2.0
HOFAN	Radial -	1412	Normal	-2.46	-57.20	-63.77	N/A	54.74	20.00	-34.74	T4	2.0, 3.4
	Naulai	1412	Swivel	-2.88	-57.26	-03.77	IN/A	54.38	20.00	-34.38	T4	2.0, 3.4
	Axial	9400	Normal	3.68	-56.31	-64.33	1.66	59.99	20.00	-39.99	T4	2.0, 2.8
HSPAII	Axiai	9400	Swivel	3.87	-54.62	-04.33	1.57	58.49	20.00	-38.49	T4	2.0, 2.0
n SPA II	Padial	9400	Normal	-2.59	-58.73	3 00.77	NI/A	56.14	20.00	-36.14	T4	2.0, 3.4
	Radial	9400	Swivel	-2.73	-57.40	-03.77	53.77 N/A	54.67	20.00	-34.67	T4	2.0, 3.4

Table 9-21Raw Data Results for LTE B66 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates		
		20MHz	132572	Normal	4.12	-47.01		1.69	51.13	20.00	-31.13	T4			
		20MHz	132322	Normal	4.08	-45.29		1.67	49.37	20.00	-29.37	T4			
		20MHz	132072	Normal	3.64	-46.75		1.74	50.39	20.00	-30.39	T4			
		15MHz	132322	Normal	3.94	-46.80		1.71	50.74	20.00	-30.74	T4			
	Axial	10MHz	132322	Normal	3.67	-46.91	-64.33	1.82	50.58	20.00	-30.58	T4	2.0, 2.8		
		5MHz	132322	Normal	4.07	-46.05		1.78	50.12	20.00	-30.12	T4			
		3MHz	132322	Normal	3.81	-46.54	-	1.86	50.35	20.00	-30.35	T4			
		1.4MHz	132322	Normal	4.12	-46.56		1.62	50.68	20.00	-30.68	T4			
LTE Band		20MHz	132322	Swivel	3.85	-46.66		1.45	50.51	20.00	-30.51	T4			
66		20MHz	132322	Normal	-2.73	-52.74			50.01	20.00	-30.01	T4			
		15MHz	132322	Normal	-2.68	-52.89			50.21	20.00	-30.21	T4			
		10MHz	132322	Normal	-2.70	-52.31			49.61	20.00	-29.61	T4			
		5MHz	132322	Normal	-2.86	-53.29	.29 .48 .08 .28 .53	29 18 18 18 16 15 15 15 15 15 15 15 15 15 15 15 15 15		50.43	20.00	-30.43	T4		
	Radial	3MHz	132657	Normal	-2.93	-54.48			N/A	51.55	20.00	-31.55	T4	2.0, 3.4	
		3MHz	132322	Normal	-2.64	-51.08				48.44	20.00	-28.44	T4		
		3MHz	131987	Normal	-2.65	-53.28			8	50.63	20.00	-30.63	T4]	
		1.4MHz	132322	Normal	-2.76	-52.53							49.77	20.00	-29.77
		3MHz	132322	Swivel	-2.67	-49.78			47.11	20.00	-27.11	T4			

FCC ID: ZNFF100VM	POTEST Poul la la pot d'é venera	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 41 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 41 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

				ia nesu			110000	01033					
Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	Normal	3.91	-38.25		1.82	42.16	20.00	-22.16	T4	
		15MHz	41490	Normal	3.71	-40.25		1.58	43.96	20.00	-23.96	T4	
		15MHz	41055	Normal	3.64	-40.40		1.84	44.04	20.00	-24.04	T4	
		15MHz	40620	Normal	3.67	-38.26		1.92	41.93	20.00	-21.93	Τ4	
	Axial	15MHz	40185	Normal	3.53	-38.30	-64.33	1.97	41.83	20.00	-21.83	T4	2.0, 2.8
		15MHz	39750	Normal	3.71	-39.27		1.71	42.98	20.00	-22.98	T4	
		10MHz	40620	Normal	3.53	-38.54		1.93	42.07	20.00	-22.07	T4	
		5MHz	40620	Normal	3.88	-38.23		1.69	42.11	20.00	-22.11	T4	
LTE Band		15MHz	40185	Swivel	3.54	-38.01		1.39	41.55	20.00	-21.55	T4	
41		20MHz	40620	Normal	-2.82	-42.49			39.67	20.00	-19.67	T4	
		15MHz	41490	Normal	-2.74	-44.24			41.50	20.00	-21.50	T4	
		15MHz	41055	Normal	-2.86	-44.11			41.25	20.00	-21.25	T4	
		15MHz	40620	Normal	-2.82	-42.02			39.20	20.00	-19.20	T4	
	Radial	15MHz	40185	Normal	-2.90	-42.47	-63.59	N/A	39.57	20.00	-19.57	T4	2.0, 3.4
		15MHz	39750	Normal	-2.46	-43.16			40.70	20.00	-20.70	T4	
		10MHz	40620	Normal	-2.52	-42.51			39.99	20.00	-19.99	T4	
		5MHz	40620	Normal	-2.81	-42.50			39.69	20.00	-19.69	T4	
		15MHz	40620	Swivel	-2.72	-40.59			37.87	20.00	-17.87	T4	

Table 9-22 Raw Data Results for LTE B41 Power Class 3 (OTT VoIP)

Table 9-23 Raw Data Results for NR n5 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{NR} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
		20MHz	167800	Normal	4.12	-45.45	-50.30			49.57	46.57	20.00	-26.57	T4	
		20MHz	167300	Normal	4.12	-46.45	-50.30			50.57	47.57	20.00	-27.57	T4	
		20MHz	166800	Normal	4.12	-48.24	-50.30			52.36	49.36	20.00	-29.36	T4	
	Axial	15MHz	167300	Normal	4.12	-46.54	-50.30	-64.43	N/A	50.66	47.66	20.00	-27.66	T4	2.0, 2.8
		10MHz	167300	Normal	4.12	-46.75	-50.30			50.87	47.87	20.00	-27.87	T4	
		5MHz	167300	Normal	4.12	-46.73	-50.30			50.85	47.85	20.00	-27.85	T4	
NR n5		20MHz	167800	Swivel	4.12	-46.80	-50.30			50.92	47.92	20.00	-27.92	T4	
NK IIS		20MHz	167300	Normal	-3.55	-58.52	-55.70			54.97	51.97	20.00	-31.97	T4	
		15MHz	168300	Normal	-3.55	-57.74	-55.70			54.19	51.19	20.00	-31.19	T4	
		15MHz	167300	Normal	-3.55	-57.82	-55.70			54.27	51.27	20.00	-31.27	T4	
	Radial	15MHz	166300	Normal	-3.55	-58.99	-55.70	-63.59	N/A	55.44	52.44	20.00	-32.44	T4	2.0, 3.4
		10MHz	167300	Normal	-3.55	-58.40	-55.70			54.85	51.85	20.00	-31.85	T4	
		5MHz	167300	Normal	-3.55	-58.31	-55.70			54.76	51.76	20.00	-31.76	T4	
		15MHz	168300	Swivel	-3.55	-55.13	-55.70			51.58	48.58	20.00	-28.58	T4	

Table 9-24 Raw Data Results for LTE B5 (OTT VoIP – Additional Measurements for NR)

Mode	Orientation	Bandwidth	Channel	DUT Configuration	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{LTE} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE B5	Axial	10MHz	20525	Normal	4.12	N/A	-50.30	-64.43	NIA	54.42	N/A	20.00	-34.42	T4	2.0, 2.8
LIE BŞ	Radial	10MHz	20525	Normal	-3.55	N/A	-55.70	-63.59		52.15	N/A	20.00	-32.15	T4	2.0, 3.4

FCC ID: ZNFF100VM	PCTEST Poul la la part d'é anoma	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 42 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

									/			
Mode	Orientation	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	Normal	3.27	-37.73		1.78	41.00	20.00	-21.00	T4	
	Axial	6	Normal	3.29	-36.68	-64.33	1.82	39.97	20.00	-19.97	T4	2.0, 2.8
	Axiai	11	Normal	3.36	-37.45	-04.33	1.74	40.81	20.00	-20.81	T4	2.0, 2.0
IEEE		6	Swivel	3.62	-38.23		1.60	41.85	20.00	-21.85	T4	
802.11b		1	Normal	-2.53	-46.79			44.26	20.00	-24.26	T4	
	Radial	6	Normal	-2.71	-44.34	-63.59	N/A	41.63	20.00	-21.63	T4	20.24
	Radiai	11	Normal	-2.78	-46.52	-03.59	IN/A	43.74	20.00	-23.74	T4	2.0, 3.4
		6	Swivel	-2.87	-47.71			44.84	20.00	-24.84	T4	
IEEE	Axial	6	Normal	3.90	-41.87	-64.33	1.48	45.77	20.00	-25.77	T4	2.0, 2.8
802.11g	Radial	6	Normal	-2.90	-48.71	-63.59	N/A	45.81	20.00	-25.81	T4	2.0, 3.4
IEEE	Axial	6	Normal	3.34	-41.50	-64.33	1.71	44.84	20.00	-24.84	T4	2.0, 2.8
802.11n	Radial	6	Normal	-2.53	-49.46	-63.59	N/A	46.93	20.00	-26.93	T4	2.0, 3.4
IEEE	Axial	6	Normal	3.49	-42.65	-64.33	1.86	46.14	20.00	-26.14	T4	2.0, 2.8
802.11ac	Radial	6	Normal	-2.45	-51.56	-63.59	N/A	49.11	20.00	-29.11	T4	2.0, 3.4

Table 9-25 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

Table 9-26 Raw Data Results for 5GHz WIFI IEEE 802.11a (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	1	40	Normal	3.00	-39.61		1.85	42.61	20.00	-22.61	T4	
		20MHz	2A	52	Normal	3.60	-38.38		1.93	41.98	20.00	-21.98	T4	
		20MHz	2A	56	Normal	3.58	-37.68		1.71	41.26	20.00	-21.26	T4	
	Axial	20MHz	2A	64	Normal	3.12	-38.58	-64.33	1.74	41.70	20.00	-21.70	T4	2.0, 2.8
		20MHz	2C	120	Normal	3.34	-38.62		1.59	41.96	20.00	-21.96	T4	
		20MHz	3	157	Normal	3.58	-38.96		1.65	42.54	20.00	-22.54	T4	
IEEE		20MHz	2A	56	Swivel	3.63	-38.32		1.56	41.95	20.00	-21.95	T4	
802.11a														
002.114		20MHz	1	40	Normal	-2.75	-54.74			51.99	20.00	-31.99	T4	
		20MHz	2A	52	Normal	-2.83	-54.74			51.91	20.00	-31.91	T4	
		20MHz	2A	56	Normal	-2.49	-54.47			51.98	20.00	-31.98	T4	
	Radial	20MHz	2A	64	Normal	-2.69	-55.34	-63.59	N/A	52.65	20.00	-32.65	T4	2.0, 3.4
		20MHz	2C	120	Normal	-2.95	-56.85			53.90	20.00	-33.90	T4]
		20MHz	3	157	Normal	-2.58	-56.45			53.87	20.00	-33.87	T4	
		20MHz	2A	52	Swivel	-2.42	-54.00			51.58	20.00	-31.58	T4	

Table 9-27 Raw Data Results for 5GHz WIFI IEEE 802.11n (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	40MHz	1	38	Normal	3.24	-43.06	-64.33	1.96	46.30	20.00	-26.30	T4	2.0. 2.8
IEEE	Axiai	20MHz	1	40	Normal	3.59	-40.01	-04.33	1.89	43.60	20.00	-23.60	T4	2.0, 2.0
802.11n														
002.1111	Radial	40MHz	1	38	Normal	-2.96	-56.32	-63.59	N/A	53.36	20.00	-33.36	T4	2.0. 3.4
	Nadiai	20MHz	1	40	Normal	-2.86	-56.33	-03.39	N/A	53.47	20.00	-33.47	T4	2.0, 3.4

Table 9-28

Raw Data Results for 5GHz WIFI IEEE 802.11ac (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	DUT Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	40MHz	1	38	Normal	3.77	-41.98	-64.33	1.85	45.75	20.00	-25.75	T4	2.0. 2.8
IEEE	Axiai	20MHz	1	40	Normal	3.78	-41.60	-04.33	1.72	45.38	20.00	-25.38	T4	2.0, 2.0
802.11ac														
002.1140	Radial	40MHz	1	38	Normal	-2.79	-56.61	-63.59	N/A	53.82	20.00	-33.82	T4	2.0. 3.4
	Naulai	20MHz	1	40	Normal	-2.91	-57.87	-03.39	N/A	54.96	20.00	-34.96	T4	2.0, 3.4

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 43 of 93
© 2020 PCTEST				REV 3.5.M

REV 3.5.M 8/18/2020

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Call Settings→Additional Settings→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice & 3GPP2 Normal Test Signal
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T4).
- 8. Each band/mode was additionally evaluated in the Swivel orientation as described in section 2.II.

B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Vocoder Configuration: RC1/SO3 (CDMA EVRC)
- 3. Speech Signal: ITU-T P.50 Artificial Voice

C. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);
- 3. Speech Signal: 3GPP2 Normal Test Signal

D. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);
- 3. Speech Signal: ITU-T P.50 Artificial Voice

E. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 50% RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 14 at 10MHz bandwidth is the worst-case for the Axial probe orientation, however, LTE Band 14 at 10MHz only supports one channel therefore low and high channels were not evaluated. LTE Band 30 at 10MHz bandwidth is the worst-case for the Radial probe orientation, however, LTE Band 30 at 10MHz only supports one channel therefore low and high channels were not evaluated.
- 5. Speech Signal: 3GPP2 Normal Test Signal

F. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 50% RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 2
- 4. Vocoder Configuration: WB AMR 6.60kbps

FCC ID: ZNFF100VM	POTEST Poul la be pat al @ energy	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 11 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 44 of 93
© 2020 PCTEST				REV 3.5.M

- 5. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 3) at 10MHz is the worst-case for the Axial probe orientation. LTE Band 48 at 20MHz is the worst-case for the Radial probe orientation.
- 6. Speech Signal: 3GPP2 Normal Test Signal


G. WIFI

- 1. Radio Configuration
 - a. IEEE 802.11b: CCK, 5.5Mbps
 - b. IEEE 802.11g/a: BPSK, 6Mbps
 - c. IEEE 802.11n/ac 20MHz: BPSK, MCS 0
 - d. IEEE 802.11n/ac 40MHz: 64QAM, MCS 5
- 2. Vocoder Configuration: WB AMR 6.60kbps
- 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both Axial and Radial probe orientations.
- 4. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11a (U-NII 2A) is the worstcase for the Axial probe orientation. IEEE 802.11a (U-NII 2C) is the worst-case for the Radial probe orientation.
- 5. Speech Signal: 3GPP2 Normal Test Signal
- H. OTT VoIP
 - 1. Vocoder Configuration: 6kbps
 - 2. Speech Signal: 3GPP2 Normal Test Signal
 - 3. EvDO Configuration
 - a. Revision: A
 - 4. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
 - 5. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
 - 6. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 50% RB offset
 - c. LTE Band 66 was the worst-case band from Table 7-6 and was used to test both Axial and Radial probe orientations.
 - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 20MHz is the worst-case for the Axial probe orientation. LTE Band 66 at 3MHz bandwidth is the worst-case for the Radial probe orientation.
 - 7. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 50% RB offset
 - c. Power Class 3 Uplink-Downlink configuration: 2
 - d. LTE Band 41 (Power Class 3) was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 3) at 15MHz is the worst-case for both Axial and Radial probe orientations.
 - 8. NR FDD Configuration


FCC ID: ZNFF100VM	PCTEST Boal to be pair of @ without	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 45 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 45 of 93
© 2020 PCTEST				REV 3.5.M

- a. Power Configuration: TxAGC is set such that the DUT operates at max power.
- b. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 50% RB Offset
- c. Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 7.II.4 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.
- d. NR Band n5 was the worst-case band from Table 7-11 and was used to test both Axial and Radial probe orientations.
- e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n5 at 20MHz is the worst-case for the Axial probe orientation. NR n5 at 15MHz bandwidth is the worst-case for the Radial probe orientation.
- 9. WIFI Configuration:
 - a. Radio Configuration
 - i. IEEE 802.11b: CCK, 5.5Mbps
 - ii. IEEE 802.11g/a: BPSK, 6Mbps
 - iii. IEEE 802.11n/ac 20MHz: BPSK, MCS 0
 - iv. IEEE 802.11n/ac 40MHz: 64QAM, MCS 5
 - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both Axial and Radial probe orientations.
 - c. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11a (U-NII 2A) is the worst-case for both Axial and Radial probe orientations.

III. 1 kHz Vocoder Application Check




This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.

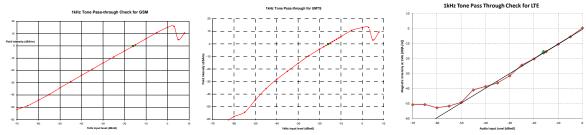

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 46 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 46 of 93
© 2020 PCTEST				REV 3.5.M



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

IV. T-Coil Validation Test Results

Helmholtz Coil Validation Table of Results – 08/17/2020					
Item	Target	Result	Verdict		
Axial	•				
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.388	PASS		
Environmental Noise	< -58 dBA/m	-64.33	PASS		
Frequency Response, from limits	> 0 dB	0.80	PASS		
Radial					
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.430	PASS		
Environmental Noise	< -58 dBA/m	-63.77	PASS		
Frequency Response, from limits	> 0 dB	0.80	PASS		

Table 9-29

Table 9-30 Helmholtz Coil Validation Table of Results - 08/24/2020

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.343	PASS
Environmental Noise	< -58 dBA/m	-64.43	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.424	PASS
Environmental Noise	< -58 dBA/m	-63.59	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFF100VM	POTEST Provide la la potencia	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 47 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 47 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

ABM1 Magnetic Field Distribution Scan Overlays V.

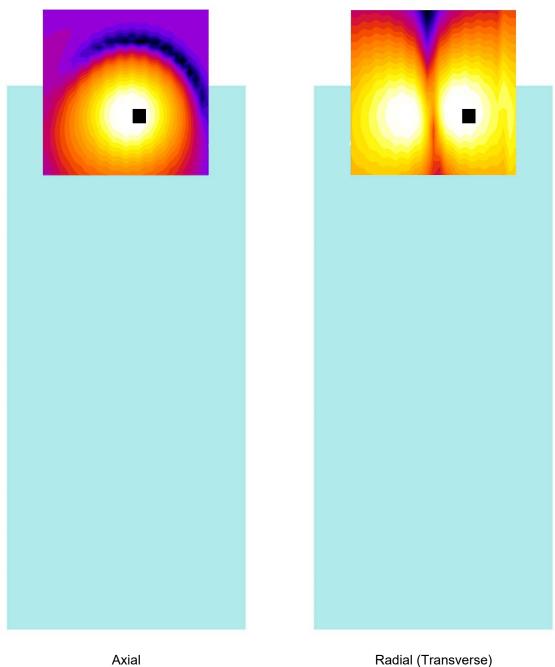


Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFF100VM	POTEST. Road bis petit of Sustainability	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 49 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 48 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

10. MEASUREMENT UNCERTAINTY

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level					35.3%	1.31	

Table 10-1 Uncertainty Estimation Table

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.

2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in

NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFF100VM	PCTEST Posit la la pot di 🔮 element	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 40 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 49 of 93
© 2020 PCTEST		· ·		REV 3.5.M

8/18/2020

11. EQUIPMENT LIST

Table 11-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Temperature / Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/24/2019	Biennial	4/24/2021	7BFNM32
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/24/2019	Biennial	4/24/2021	23528889
Listen	SoundConnect	Microphone Power Supply	4/22/2019	Biennial	4/22/2021	PS2612
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/4/2020	Annual	2/4/2021	162125
Rohde & Schwarz	CMW500	Radio Communication Tester	5/21/2020	Annual	5/21/2021	128635
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	5/20/2019	Biennial	5/20/2021	925
TEM	Axial T-Coil Probe	Axial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1124
TEM	Radial T-Coil Probe	Radial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1130

FCC ID: ZNFF100VM	POTEST Poul la la pot d'é venera	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 50 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 50 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

12. TEST DATA

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga E1 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 51 of 93
© 2020 PCTEST		·		REV 3.5.M 8/18/2020




Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Helmholtz Coil – SN: 925; Calibrated: 05/20/2019

Noise Spectrum

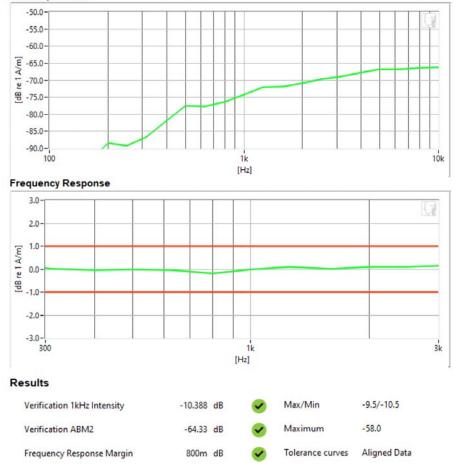

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Portest de Contract	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 52 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 52 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020




Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

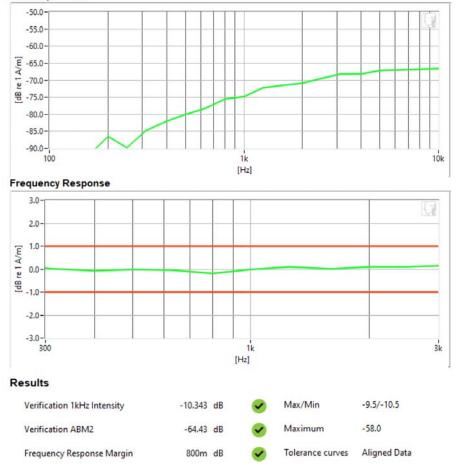

PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 53 of 93
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Fage 55 01 95
© 2020 PCTEST				REV 3.5.M

8/18/2020




Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

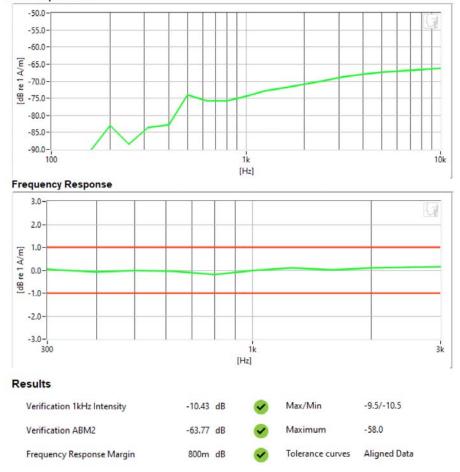

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST. Hoad to be pet to @ exceeded	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 54 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 54 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020




Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Helmholtz Coil – SN: 925; Calibrated: 05/20/2019

Noise Spectrum

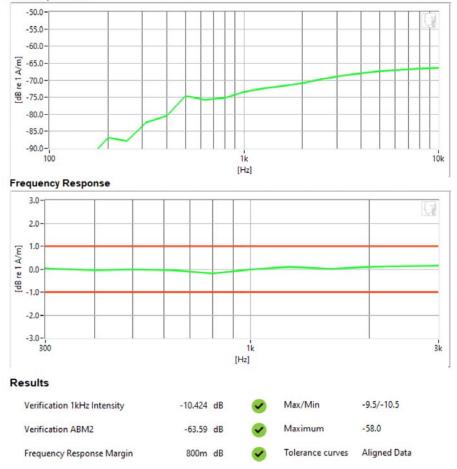

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST. Hoad to be pet to @ exemute	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 55 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 55 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020

8/17/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFF100VM

Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: CDMA Cellular
- Channel: 1013
- Speech Signal: ITU-T P.50 Artificial Voice
- DUT Configuration: Normal



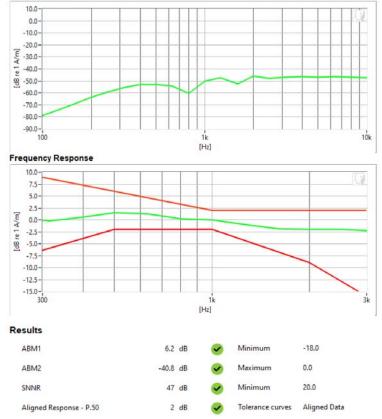

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Poul la be pat al Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 56 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 56 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/17/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFF100VM

Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: CDMA PCS
- Channel: 1175
- Speech Signal: ITU-T P.50 Artificial Voice
- DUT Configuration: Normal



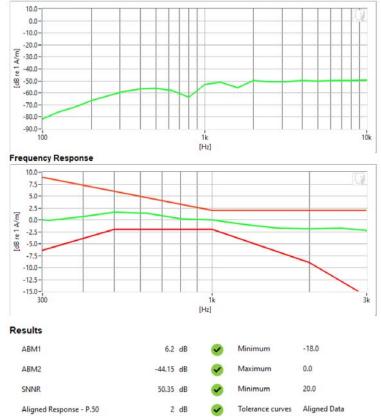

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Prod to be post of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 57 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 57 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 190
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel

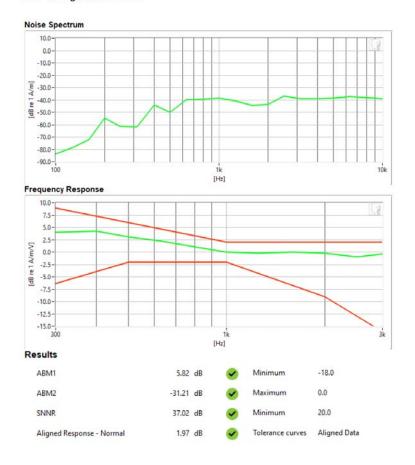

PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 50 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 58 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 512
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel

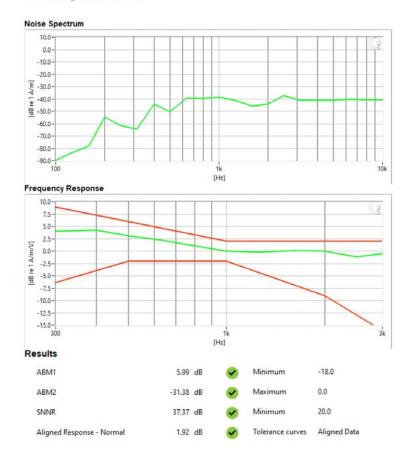

PCTEST 2020

FCC ID: ZNFF100VM	POTEST. Hoad to be pert of @ extension	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 50 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 59 of 93
© 2020 PCTEST		·		REV 3.5.M

8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFF100VM

Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band V
- Channel: 4183
- Speech Signal: ITU-T P.50 Artificial Voice
- DUT Configuration: Swivel



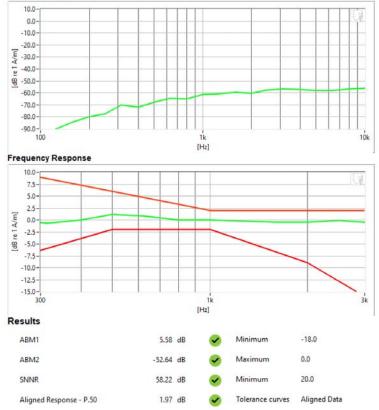

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Mod 1s be pet ti 🖉 exemute	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 93
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 60 01 95
© 2020 PCTEST		•		REV 3.5.M

8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFF100VM

Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1412
- Speech Signal: ITU-T P.50 Artificial Voice
- DUT Configuration: Swivel



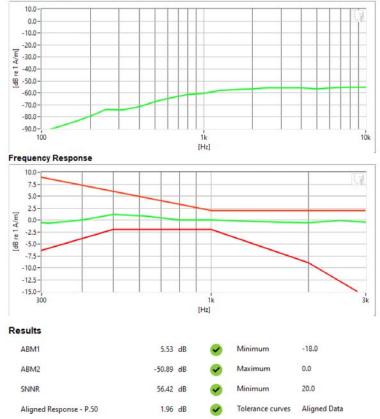

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Mod 1s be pet ti 🖉 exemute	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 61 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 61 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFF100VM

Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band II
- Channel: 9400
- Speech Signal: ITU-T P.50 Artificial Voice
- DUT Configuration: Swivel



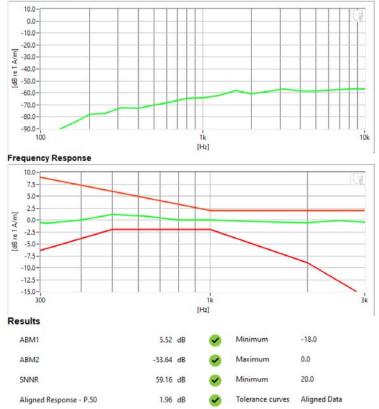

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Mod 1s be pet ti 🖉 exemute	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 93
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 62 01 95
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/19/2020



DUT: ZNFF100VM Type: Portable Handset Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE FDD Band 14 .
- Bandwidth: 10MHz .
- . Channel: 23330
- Speech Signal: 3GPP2 Normal Test Signal .
- .

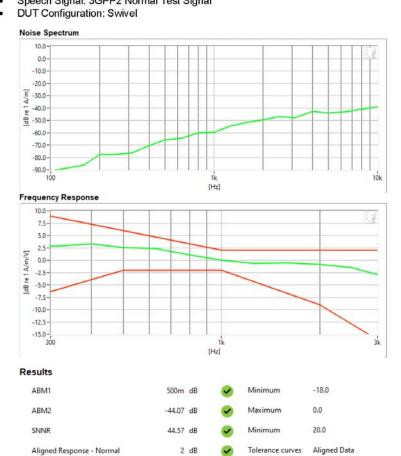

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Poul la be just of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 62 ef 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 63 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/20/2020



DUT: ZNFF100VM Type: Portable Handset Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE TDD Band 41 (PC3)
- Bandwidth: 10MHz
- Channel: 40620
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel



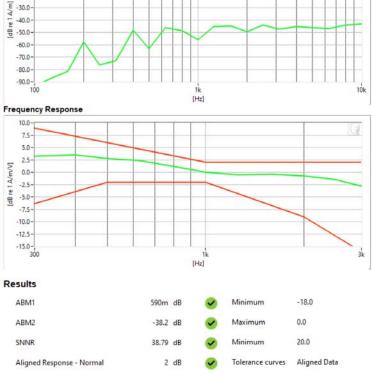

PCTEST 2020

FCC ID: ZNFF100VM	POTEST Poul la la juli d' juliera	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 64 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 64 of 93
© 2020 PCTEST		·		REV 3.5.M

8/18/2020

8/20/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 11
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel

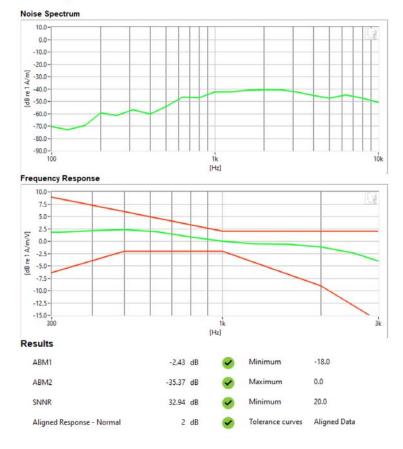

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Boat to be part of @ mercent	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 65 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 65 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/20/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: 5GHz WIFI
- Standard: IEEE 802.11a (U-NII 2A)
- Bandwidth: 20MHz
- Channel: 52
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel

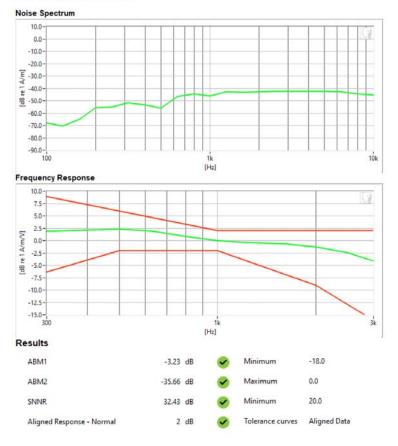

PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Poul la be pat al Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 66 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 66 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- VolP Application: Google Duo
- Mode: EDGE 850
- Channel: 190
- Speech Signal: 3GPP2 Normal Test Signal
- DUT Configuration: Swivel

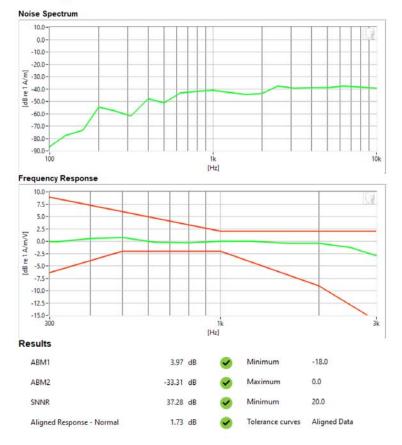

PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 93
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 67 01 95
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: CDMA Cellular
- Channel: 1013
- DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Moul to be part of @ remere	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 69 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 68 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: CDMA PCS
- Channel: 25
- DUT Configuration: Swivel

Noise Spectrum

SNNR

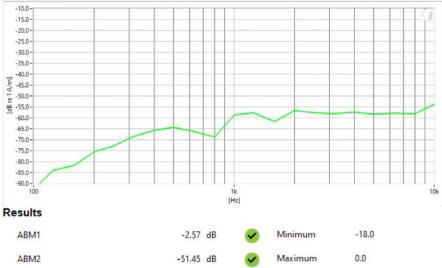

48.88 dB

20.0

Minimum

PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 60 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 69 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 251
- · DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Moul to be part of @ remere	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 70 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 70 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 512
- DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 71 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 71 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band V
- Channel: 4183 .
- ٠ **DUT Configuration: Swivel**

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	POTEST Prod to be pet of @ rement	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 72 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 72 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/22/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1312 .
- ٠ **DUT Configuration: Swivel**

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	Road to be part of @ newses	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 72 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 73 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

8/22/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band II
- ٠ Channel: 9538
- . DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Portest of Constant	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 74 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 74 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE FDD Band 14
- · Bandwidth: 10MHz
- Channel: 23330
- DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM	PCTEST Portest of Constant	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 75 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 75 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE TDD Band 48 .
- Bandwidth: 20MHz ٠
- . Channel: 55340
- DUT Configuration: Normal .

Noise Spectrum

SNNR



-39.11 dB

33.64 dB

Minimum

20.0

PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 76 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 76 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 1
- DUT Configuration: Normal

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 77 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 77 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: 5GHz WIFI
- Standard: IEEE 802.11a (U-NII 2C)
- Bandwidth: 20MHz
- Channel: 120
- DUT Configuration: Normal

Noise Spectrum

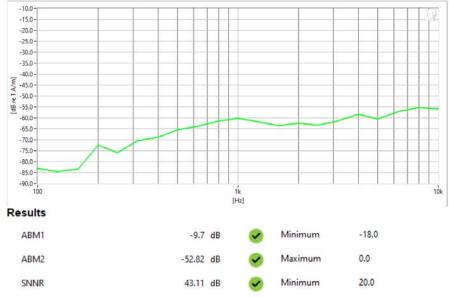

PCTEST 2020

FCC ID: ZNFF100VM	HAC (T-COIL) TEST REPORT		🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 79 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 78 of 93
© 2020 PCTEST		•		REV 3.5.M

8/18/2020

8/22/2020



DUT: ZNFF100VM Type: Portable Handset

Serial: 00252

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- VolP Application: Google Duo
- Mode: EDGE 1900
- Channel: 661
- DUT Configuration: Swivel

Noise Spectrum



PCTEST 2020

FCC ID: ZNFF100VM		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 70 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 79 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

13. CALIBRATION CERTIFICATES

FCC ID: ZNFF100VM	PCTEST Road to be part of @ enterest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 90 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 80 of 93
© 2020 PCTEST				REV 3.5.M 8/18/2020

West (Caldwell Calibrat	ion Laboratories I	nc.
vi est c			
Corti	ficato of	Calibrati	on
Ceru	incate of	Camprati	
	for		
	AXIAL T COII Manufactured by:	. PROBE TEM CONSULTING	
	Model No:	AXIAL T COIL PROBE	
	Serial No: Calibration Recall No:	TEM-1124 29973	
	Submitte	ed By:	2
		REW HARWELL	
	•	EST ENGINEERING LAB B DOBBIN ROAD	
	COL	UMBIA MD 210)45
National Institute of S	tandards and Technology or to	ed specification using standards t accepted values of natural physi ollowing specification upon its re	cal constants. 🛛 🚟
West Caldwell Calibra	ation Laboratories Procedure I	NO. AXIAL T C TEM C	12A 6/4/2019
Upon receipt for Calil	oration, the instrument was fou	nd to be:	6/4/2019
Within	(X)		
	ated specification. See attached	•	
	lied relates to the calibrated ite ation Laboratories' calibration	m listed above. control system meets the require	ments, ISO
10012-1 MIL-STD-45	562A, ANSI/NCSL Z540-1, IEC	C Guide 25, ISO 9001:2015 and IS	SO 17025.
		/	7 🛒
Note: With this Certificate,	Report of Calibration is included.	Approved by:	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Calibration Date:	17-May-19	James Zhu	ı 🖉
Certificate No:	29973 -1	Quality Mana ISO/IEC 17025	iger 2005
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate Page		
	est Caldwell Calibration		
	Laboratories, Inc.	ACCREDITE Calibration Lab. Cer	
is to claic house oo, victor,			

FCC ID: ZNFF100VM	PCTEST Poul la be pat al @ versea	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 91 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 81 of 93
© 2020 PCTEST				REV 3.5.M

HCATEMC_TEM-1124_May-17-2019



1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

REPORT OF CALIBRATION

oration results:								
Probe Sensitiv	ity measured wit	th Helmhol	z Coil					
	Helmholtz Coil;			Before & after	data same:	X		
the number of turn		10	No.					
the radius of each		0.204	m		Environment:			
the current in the coil	•	0.09	A A/m/V		Temperature:	20.7	°C	
	z Coil Constant;	7.09			pient Humidity:	42.7	% RH	
Heimholtz Col	l magnetic field;	5.96	A/m		ent Pressure:	98.256	kPa	
					alibration Date:	-		
Prob	e Sensitivity at	1000	Hz.		alibration Due:	-		
	was	-60.41	dBV/A/ı		eport Number:		73-1	
Der	be resistance	0.954 903	mV/A/m Ohms		ontrol Number:	2997	13	
above listed instrument				cer's specifications				
Calibration is traceable throug			683/290	•				
expanded uncertainty of calibrati			el with a cove	age factor of k=2.				
oh represents Probes Frequence	y Response.							
			Axial Prob	Response			7	
20				1	Measure	d Probe Resp.	<u></u>	
15								
10								
5								
0								<u> </u>
-5								
-10								
-15								
-20								
100		Fre	q. (Hz)	000				10000
a above listed instrument ibration Laboratories Inc. bration was performed by West aded to implement the requiren	procedure : Caldwell Calibratio	sing calibra	tion proce	lure documented in W Rev. 7. Operating Procedures	0 Jan. 24, 20 [.]		38 HCAT	
	17-May-2019			Measurements	performed by:			
Cal. Date:						James Zhu	I	
Cal. Date: ibrated on WCCL system type	9700						•	

FCC ID: ZNFF100VM	Road to be post at @ newser	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 92 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 82 of 93
© 2020 PCTEST		·		REV 3.5.M

^{8/18/2020}

HCATEMC_TEM-1124_May-17-2019

West Caldwell Calibration Laboratories Inc. 1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Labs Model No.: Axial T Coil Probe

Serial No.: TEM-1124

Test	Function	Tolera	nce	Measured values			
				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.41			
			dB				
2.0	Probe Level Linearity		6	6.10			
		Ref. (0 dB)	0	0.00			
			-6	-6.00			
			-12	-12.00			
			Hz			1	
3.0	Probe Frequency Response		100	-19.9			
			126	-17.9			
			158	-16.0			
			200	-14.0			
			251	-12.0			
			316	-10.0			
			398	-8.0			
			/ 501	-6.0			
			631	-3.9			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	2.0			
			1585	4.0			
			1995	5.9			
			2512	7.9			
			3162	9.9			
			3981	11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.2			

Instruments used for o	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFF100VM	PCTEST Pour la bie pet al Series	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates: DUT Type:			Dere 82 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 83 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

West (Caldwell Calib	oration Lal	ooratorie	es Inc.	
Certi	i ficate (of Ca	libra	tion	
		for			
	RADIAL '	Г COIL PROBE			Con Con Con
	Manufactured by Model No:	: TEM C	ONSULTING L T COIL PRO	RF	
	Serial No: Calibration Recal	TEM-1		.012	
		bmitted By:			
	Customer:	ANDREW HARV	VELL		
	Company: Address:	PCTEST ENGIN			
	Autress.	COLUMBIA		D 21045	
The subject instrume	it was calibrated to the in	idicated specificati	on using standa	ards traceable to the	
	Standards and Technolog es that the instrument me	v 1			
submitter.		0.	•	InA	
West Caldwell Calibr	ation Laboratories Proce	dure No. RAD	IAL T TEM C	6/4/2019	
Upon receipt for Calil	bration, the instrument w	as found to be:		6/4/2011	Ĩ
Withir	1 (X)				
	ated specification. See at lied relates to the calibra	-			
West Caldwell Calibr	ation Laboratories' calib 662A, ANSI/NCSL Z540	ration control syste	em meets the re	-	
		.,,.			Ĩ
				Λ	111
Note: With this Certificate,	, Report of Calibration is Inclu	ded.	Approved by:	p	
Calibration Date:	17-May-19			zhu	
Certificate No:	29973 -2		Quality ISO/IEC 1	Manager 7025:2005	Ĩ
	est Caldwell	te Page 1 of 1	2		
uncompromised calibration		1С.	ACCRE	DITED	
1575 State Route 96, Victor,			Calibration Lab	. Cert. # 1533.01	

FCC ID: ZNFF100VM	PCTEST Prod to be post of @ newses	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogo 94 of 02	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 84 of 93	
© 2020 PCTEST				REV 3.5.M	

REV 3.5.M 8/18/2020

HCRTEMC_TEM-1130_May-17-2019



uncompromised calibration Laboratori

1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION

ra	tion r	results:											
		Probe S	Sensitivity mea		th Helmhol	tz Coil					v		
			Helmho		40	N -		Bef	ore & afte	r data same:	X		
			r of turns on ea of each coil, in i	,	10 0.204	No. m			Lahorator	y Environment:			
	th		the coils, in am	-	0.204	A				t Temperature:	20.7	°C	
			leimhoitz Coil Co	•	7.09	A/m/	v			bient Humidity:	42.7	% RH	
			oltz Coil magne		5.94	A/m	•			bient Pressure:	98.256	kPa	
			one con magne	io neia,	0.04	1 0111					17-May-2019		
			Probe Sensi	livity at	1000	Hz.					17-May-2020		
			FIDE Selisi	was	-60.37	dBV/	Δ/m			Report Number:	2997		
				nuo	0.958	mV/A				ontrol Number:	2997		
			Probe res	stance	895	Ohm	s						
			ument meets o					-	ations.				
			le through NIST to			683/2							
			f calibration: 0.30d		confidence lev	el with a c	covera	ge factor of k=2					
1	repre	esents Probes I	Frequency Respo	nse.					,				
						Radial P	rope	Response			red Probe Resp.		
	²⁰ T												1
	15 -												_
	10 +												
	5			-			-						-
									•				
	0 -						\neg						
	-5												-
	10 +												
	15												-
•	4 20 10	<u> </u>			Fr	əq. (Hz)	1(00				1(
b ra	ratio tion	on Laborator was performed implement the	rument was ch ies Inc. proced I by West Caldwe requirements of	dure : Il Calibratio SO10012-	on Laboratorie	es Inc. un	der (perating Proce L Z540-1, (MIL	Rev. 7 edures -STD-4566	.0 Jan. 24, 20 2A) and ISO 17	14 Doc. # 103		ıc
	ated		I. Date: 17-Ma tem type 9700	y-2019				Me	asurement	s performed by:	James Zhu		
		•	oduced, except in full	without the v	written approval	from West	Caldwe	I Cal. Labs. Inc.		Rev. 7.0 Jar	n. 24, 2014 Doc. # 10	38 HORTEMC	
											V		
						Pag	ye 1	of 2					

 FCC ID: ZNFF100VM
 PCTEST
 HAC (T-COIL) TEST REPORT
 Approved by: Quality Manager

 Filename: 1M2006150096-21-R1.ZNF
 Test Dates: 08/17/2020 - 08/24/2020
 DUT Type: Portable Handset
 Page 85 of 93

 © 2020 PCTEST
 REV 3.5.M

REV 3.5.M 8/18/2020

HCRTEMC_TEM-1130_May-17-2019

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Test	Function	Tolera	nce	Measured values			
				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37			
			dB				
2.0	Probe Level Linearity		6	6.00			
		Ref. (0 dB)	0	0.00			
			-6	-6.10			
			-12	-12.10			
			Hz				
3.0	Probe Frequency Response		100	-20.0			
			126	-17.9			
			158	-16.0			
			200	-14.0			
			251	-12.0			
			316	-10.0			
			398	-8.0			
			501	-6.0			
			631	-4.0			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	1.9			
			1585 1995	3.9			
			2512	5.9 7.9			
			3162	9.9			
			3162	9.9 11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.1			
			10000	20.1			

Instruments used for ca	libration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Tested by: James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFF100VM	PCTEST Road to be paid of generation	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 96 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 86 of 93
© 2020 PCTEST				REV 3.5.M

8/18/2020

14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFF100VM	POLIS be pet of @ revenue	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 97 of 02	
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 87 of 93	
© 2020 PCTEST				REV 3.5.M 8/18/2020	

15. REFERENCES

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFF100VM	PCTEST Poul to be poil of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	: DUT Type:		Dege 99 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 88 of 93
© 2020 PCTEST		•		REV 3.5.M

- Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFF100VM	POTEST. Poul la be pat al Sustained	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 90 of 02
1M2006150096-21-R1.ZNF	08/17/2020 - 08/24/2020	Portable Handset		Page 89 of 93
© 2020 PCTEST				REV 3.5.M
				8/18/202