

2.4G

DUT: D1 Plus

Communication System: 802.11b; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.776 \text{ S/m}$; $\epsilon_r = 40.424$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.0 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2022/3/24;
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

TOP-High /Area Scan (41x141x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.310 W/kg


TOP-High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.939 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.384 W/kg ; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

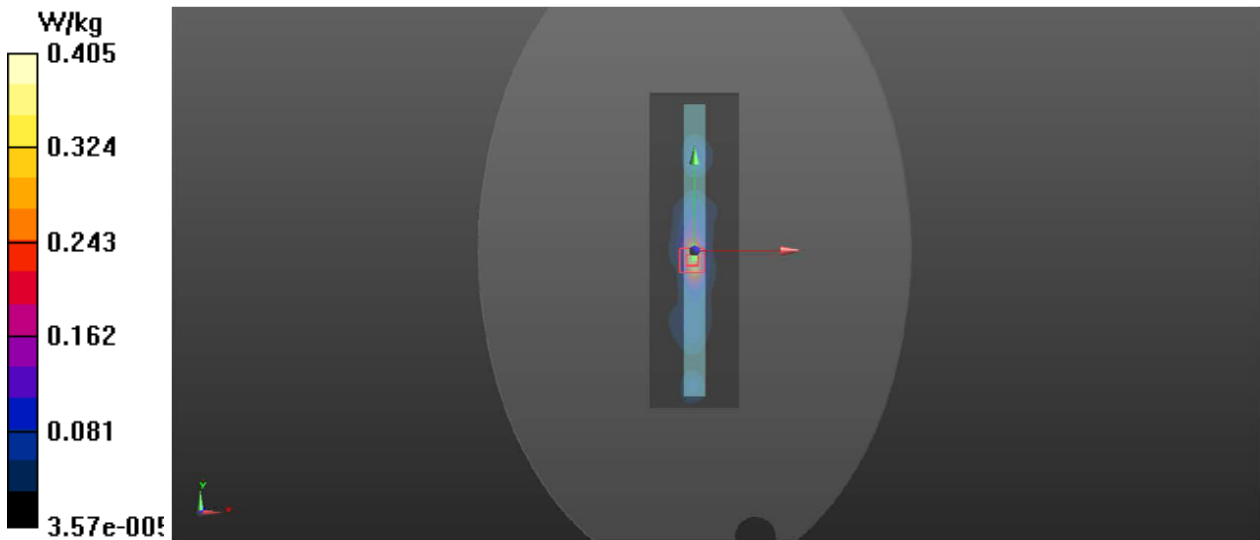

5.2G

DUT: D1 Plus

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1.2517
Medium: H5G Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.688 \text{ S/m}$; $\epsilon_r = 36.999$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2022/3/24;
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

TOP/Area Scan (41x141x1): Interpolated grid: $dx=2.000 \text{ mm}$, $dy=2.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.419 W/kg


TOP/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.576 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 4.05 W/kg

SAR(1 g) = 0.686 W/kg ; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

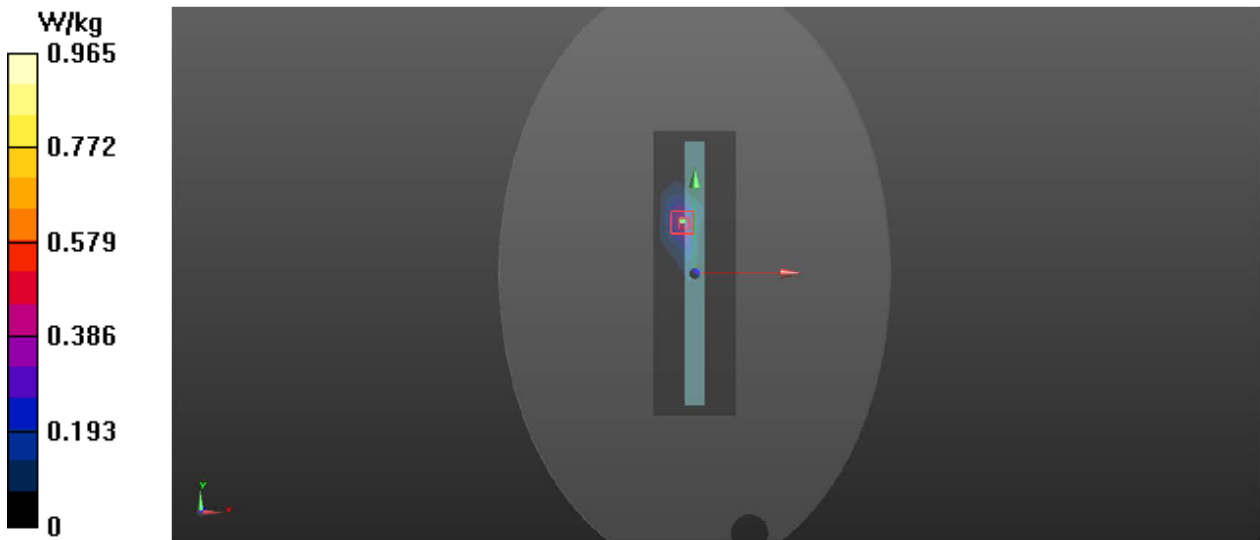

5.8G

DUT: D1 Plus

Communication System: 802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1.2517
Medium: H5G Medium parameters used: $f = 5785\text{ MHz}$; $\sigma = 5.396\text{ S/m}$; $\epsilon_r = 35.742$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.5\text{ }^\circ\text{C}$; Liquid Temperature : $22.3\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2022/3/24;
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

TOP/Area Scan (41x141x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$

Maximum value of SAR (interpolated) = 0.619 W/kg

TOP/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$

Reference Value = 2.277 V/m ; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 0.760 W/kg ; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

