



Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm ANT1

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.287$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.819 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.431 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 0.823 W/kg

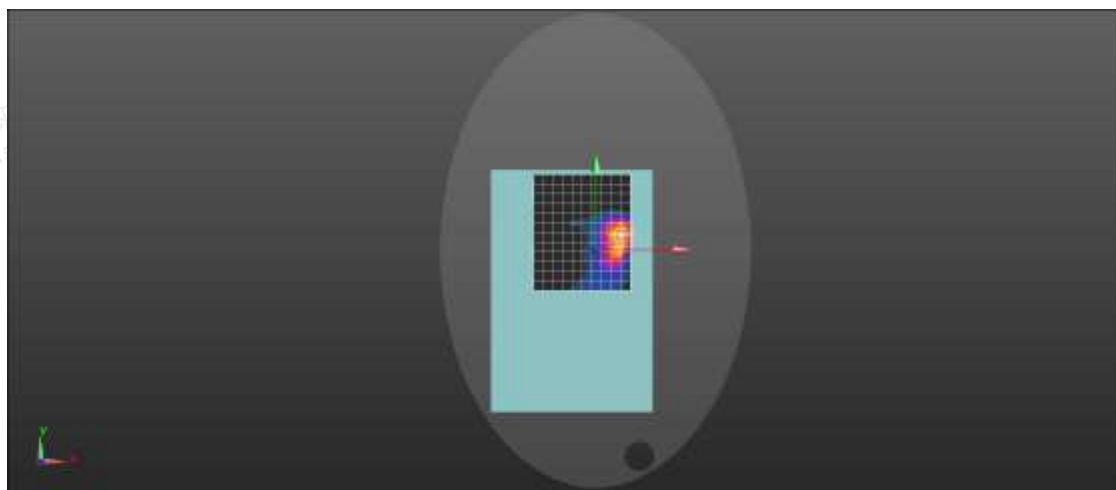

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm ANT2

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 39.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.781 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.897 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.785 W/kg

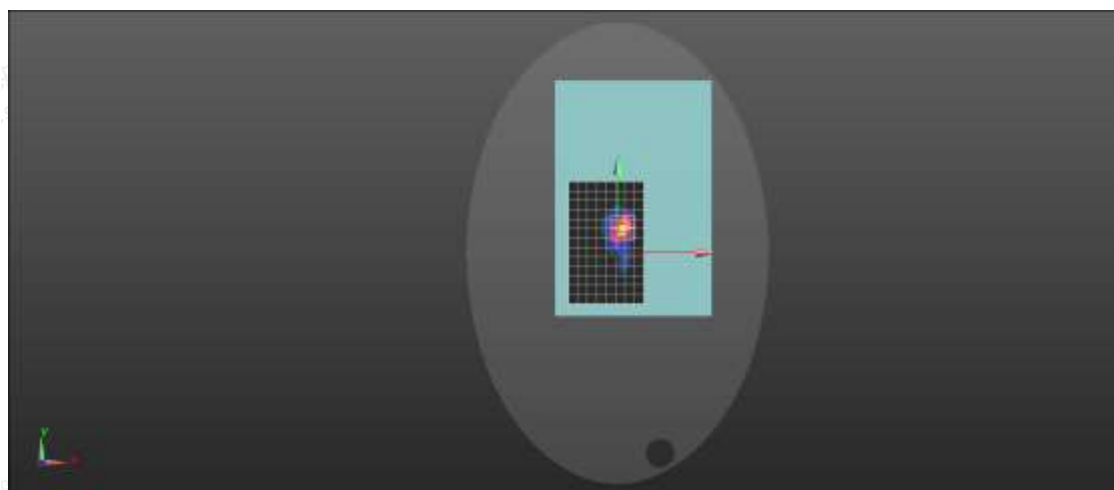

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11ac 20M 48CH Rear side 0mm ANT1

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.621 \text{ S/m}$; $\epsilon_r = 35.59$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.709 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.715 W/kg

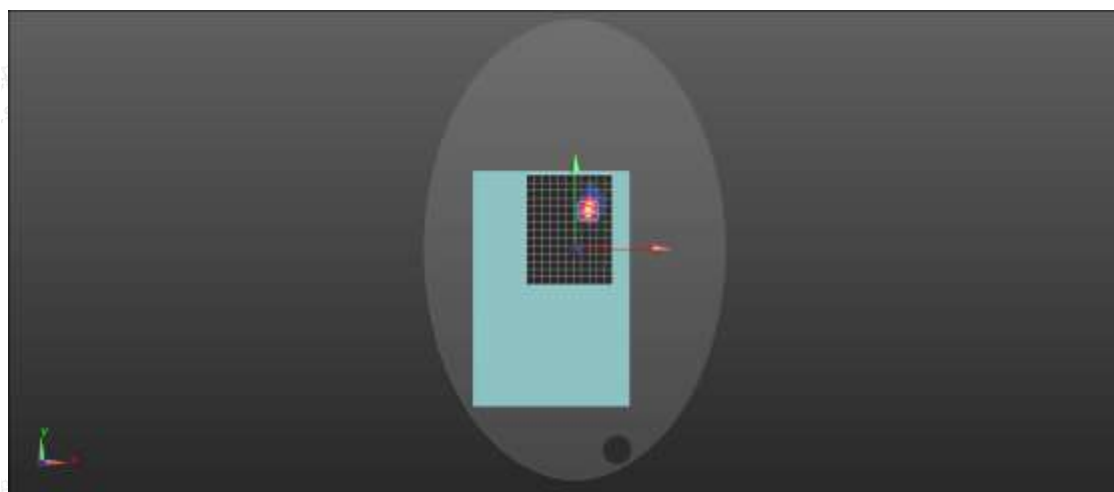



Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11n 40M 46CH Rear side 0mm ANT2

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 36.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (11x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.748 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.754 W/kg

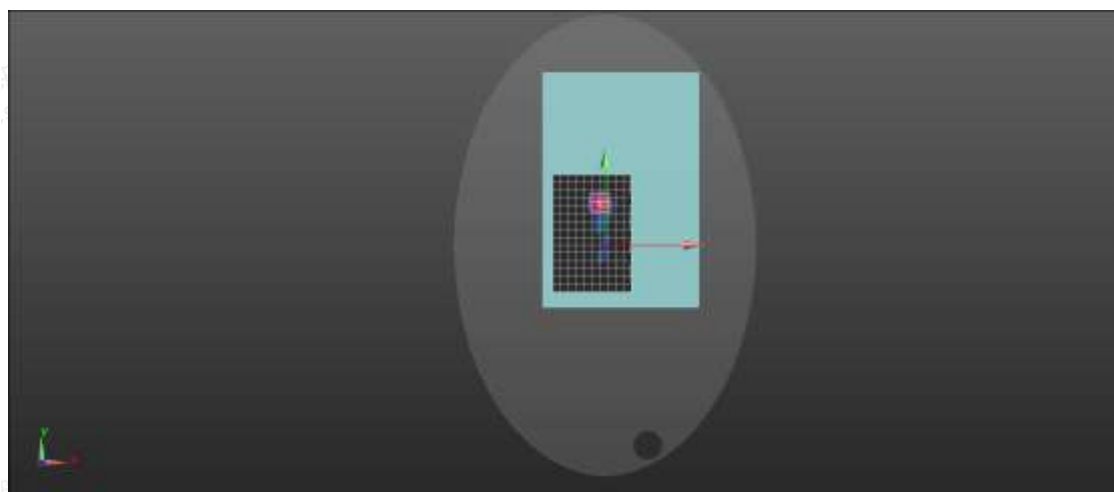



Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n 20M 157CH Rear side 0mm ANT1

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.218 \text{ S/m}$; $\epsilon_r = 35.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.720 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.4220 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

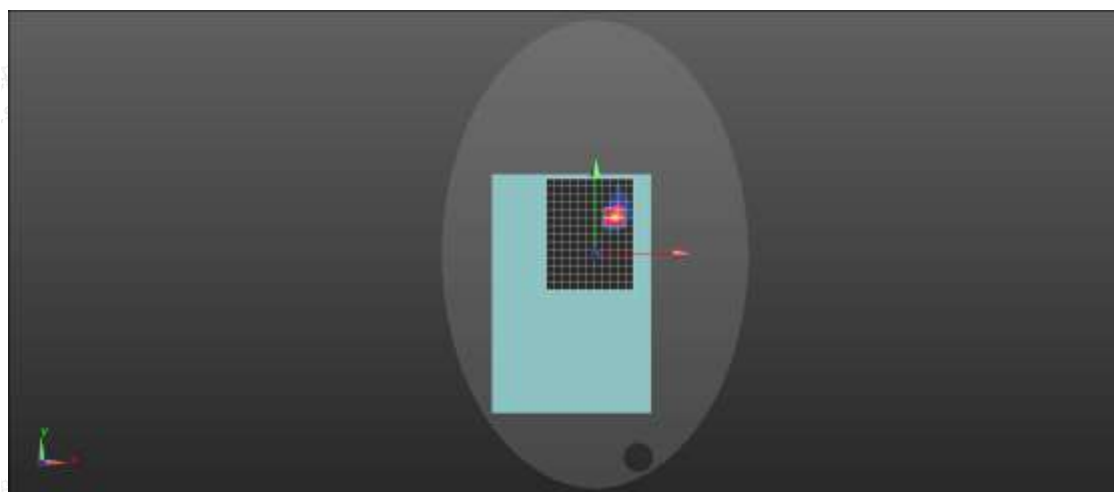



Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n 40M 155CH Rear side 0mm ANT2

DUT: NOTEBOOK COMPUTER; Type: N17A; Serial: A240819085

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 35.691$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Rear side 0mm /Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.776 W/kg



Configuration/ Rear side 0mm /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

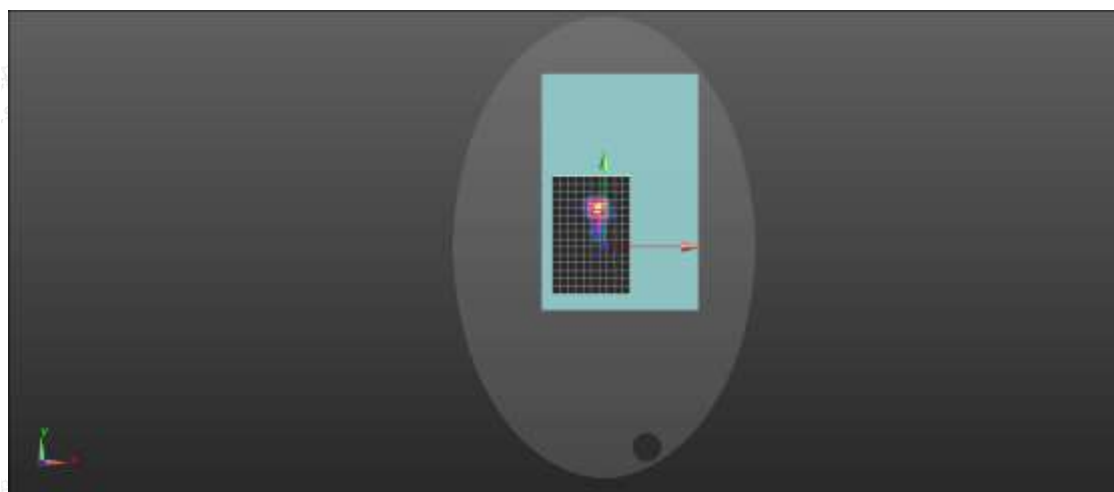

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity