



FCC TEST REPORT

REPORT NO.: RF931014L02

MODEL NO.: F5D7235-4

RECEIVED: Oct. 14, 2004

TESTED: Oct. 18 ~ Nov. 03. 2004

APPLICANT: Belkin Corporation

ADDRESS: 501 West Walnut Street, Compton, CA 90220-5221, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	GENERAL DESCRIPTION OF EUT	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS.....	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP.....	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS.....	25
4.2.3	TEST PROCEDURES	26
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP.....	27
4.2.6	EUT OPERATING CONDITIONS	27
4.2.7	TEST RESULTS	28
4.2.8	TEST RESULTS (A)	32
4.2.9	TEST RESULTS (B)	35
4.3	6dB BANDWIDTH MEASUREMENT.....	38
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2	TEST INSTRUMENTS.....	38
4.3.3	TEST PROCEDURE.....	39
4.3.4	DEVIATION FROM TEST STANDARD	39
4.3.5	TEST SETUP.....	39
4.3.6	EUT OPERATING CONDITIONS	39
4.3.7	TEST RESULTS (A)	40



4.3.8	TEST RESULTS (B)	44
4.4	MAXIMUM PEAK OUTPUT POWER	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
4.4.2	TEST INSTRUMENTS.....	48
4.4.3	TEST PROCEDURES	49
4.4.4	DEVIATION FROM TEST STANDARD	49
4.4.5	TEST SETUP.....	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS (A)	50
4.4.8	TEST RESULTS (B)	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	52
4.5.4	DEVIATION FROM TEST STANDARD	52
4.5.5	TEST SETUP.....	52
4.5.6	EUT OPERATING CONDITIONS	52
4.5.7	TEST RESULTS (A)	53
4.5.8	TEST RESULTS (B)	57
4.6	BAND EDGES MEASUREMENT	61
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	61
4.6.2	TEST INSTRUMENTS.....	61
4.6.3	TEST PROCEDURE.....	61
4.6.4	DEVIATION FROM TEST STANDARD	61
4.6.5	EUT OPERATING CONDITION	61
4.6.6	TEST RESULTS	62
4.6.7	TEST RESULTS(A)	62
4.6.8	TEST RESULTS(B)	62
4.7	ANTENNA REQUIREMENT	71
4.7.1	STANDARD APPLICABLE	71
4.7.2	ANTENNA CONNECTED CONSTRUCTION	71
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	72
6	INFORMATION ON THE TESTING LABORATORIES	74



1 CERTIFICATION

PRODUCT : 11g Gigabit Router
MODEL NO. : F5D7235-4
BRAND NAME : Belkin
APPLICANT : Belkin Corporation
TESTED : Oct. 18 ~ Nov. 03. 2004
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Nov. 05, 2004
(Andrea Hsia)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Nov. 05, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Nov. 05, 2004
(Cody Chang, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.83dB at 1.594MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.31dB at 9648.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 GENERAL DESCRIPTION OF EUT

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	11g Gigabit Router
MODEL NO.	F5D7235-4
POWER SUPPLY	5.0Vdc from AC adapter
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	61.944mW
ANTENNA TYPE	Dipole antenna with 3dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was tested with the following adapter:

BRAND:	LEADER ELECTRONICS INC.
MODEL :	MT15-5050200-A1
INPUT :	100-120Vac, 0.5A, 50-60Hz,
OUTPUT :	5.0Vdc, 2A

BRAND:	LEADER ELECTRONICS INC.
MODEL :	NU20-5050200-I3
INPUT :	100-240Vac, 1.0A, 50-60Hz,
OUTPUT :	5.0Vdc, 2A

- The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
- The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. Two test results were presented in the following sections. The test result A was for CCK technique and the test result B was for OFDM technique.
5. For Conducted Emission and Radiated Emission below 1GHz test, two test models were presented in the following sections. The test model 1 is for adapter model MT 15-5050200-A1 and the test model 2 is for model NU20-5050200-I3.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 11g Gigabit Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4: 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
4	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable without core.
3	1.2m shielded cable without core.
4	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m)
2. Item 2 act as a communication partner to transfer data.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

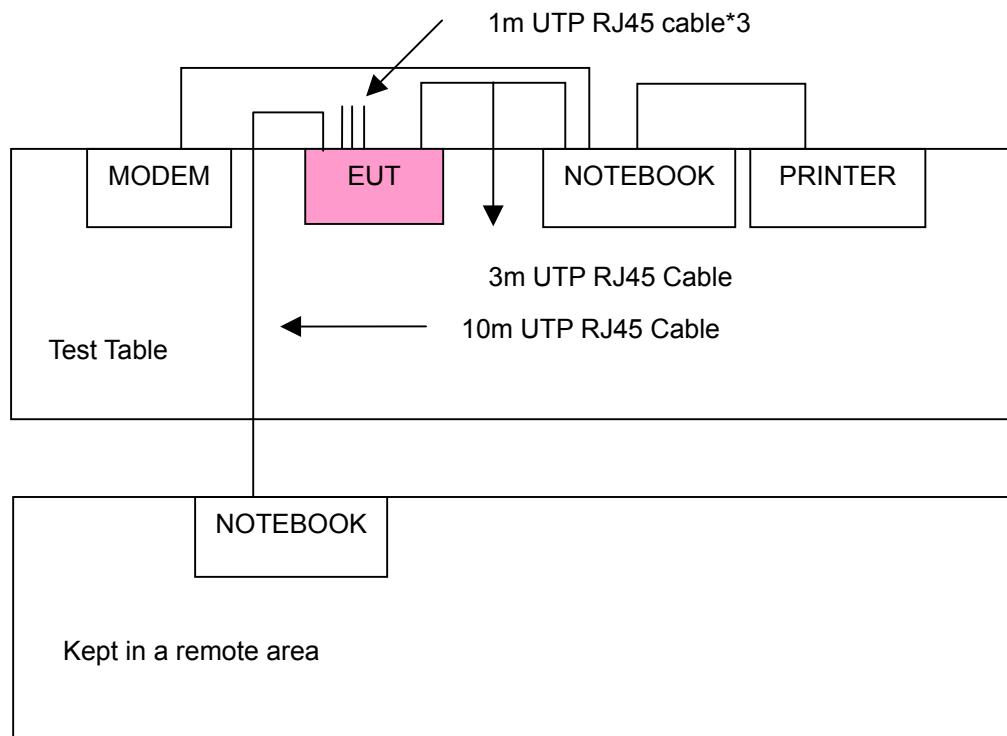

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Dec. 12, 2004
RF signal cable Woken	5D-FB	Cable-HYC01-01	Mar. 02, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Mar. 03, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Mar. 02, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

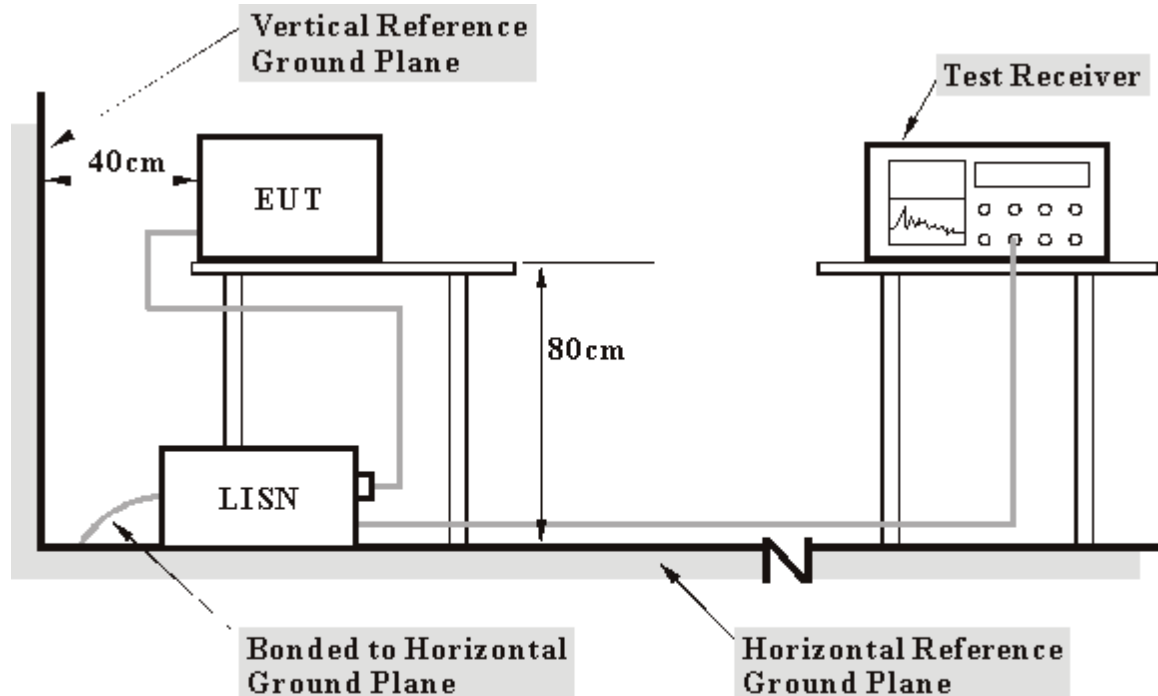

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- Placed the EUT on the testing table.
- Prepared another Notebook system to act as a communication partner and placed it outside of testing area.
- The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	43.19	-	43.30	-	65.58	55.58	-22.28	-
2	0.318	0.12	40.37	-	40.49	-	59.76	49.76	-19.27	-
3	0.427	0.13	41.60	-	41.73	-	57.30	47.30	-15.58	-
4	1.324	0.15	44.88	-	45.03	-	56.00	46.00	-10.97	-
5	2.012	0.16	44.93	-	45.09	-	56.00	46.00	-10.91	-
6	3.945	0.21	38.34	-	38.55	-	56.00	46.00	-17.45	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

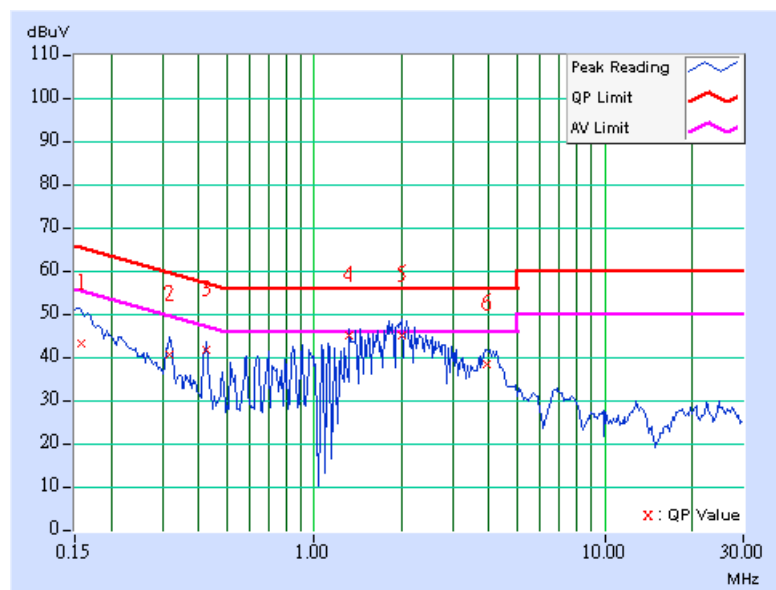

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	42.86	-	42.96	-	65.58	55.58	-22.62	-
2	0.427	0.12	40.53	-	40.65	-	57.30	47.30	-16.66	-
3	1.328	0.15	44.94	-	45.09	-	56.00	46.00	-10.91	-
4	1.867	0.16	45.48	-	45.64	-	56.00	46.00	-10.36	-
5	2.285	0.17	43.25	-	43.42	-	56.00	46.00	-12.58	-
6	4.230	0.20	44.00	-	44.20	-	56.00	46.00	-11.80	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

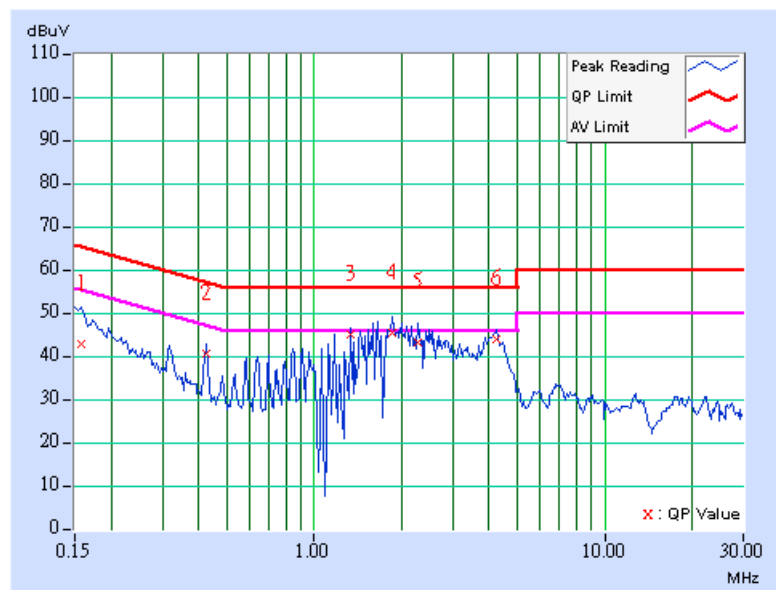

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	42.84	-	42.95	-	65.38	55.38	-22.43	-
2	0.322	0.12	40.85	-	40.97	-	59.66	49.66	-18.68	-
3	0.427	0.13	41.64	-	41.77	-	57.30	47.30	-15.54	-
4	1.867	0.16	45.46	-	45.62	-	56.00	46.00	-10.38	-
5	2.289	0.17	42.66	-	42.83	-	56.00	46.00	-13.17	-
6	4.023	0.21	40.19	-	40.40	-	56.00	46.00	-15.60	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

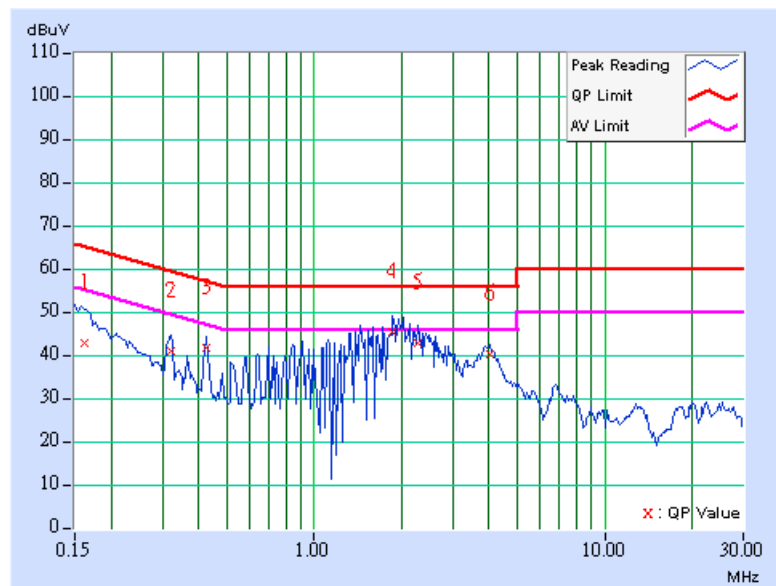

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	42.60	-	42.70	-	65.38	55.38	-22.67	-
2	0.322	0.11	39.40	-	39.51	-	59.66	49.66	-20.14	-
3	0.427	0.12	40.57	-	40.69	-	57.30	47.30	-16.62	-
4	1.602	0.16	46.89	35.98	47.05	36.14	56.00	46.00	-8.95	-9.86
5	2.074	0.16	44.85	-	45.01	-	56.00	46.00	-10.99	-
6	4.223	0.20	42.70	-	42.90	-	56.00	46.00	-13.10	-


REMARKS: 1. Q.P. and AV. Are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level – Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

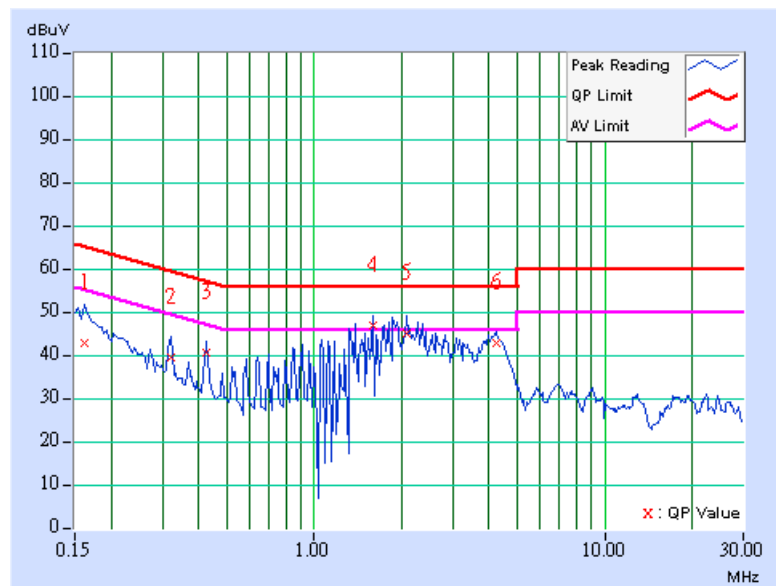

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	42.74	-	42.85	-	65.58	55.58	-22.73	-
2	0.322	0.12	40.95	-	41.07	-	59.66	49.66	-18.58	-
3	0.427	0.13	41.66	-	41.79	-	57.30	47.30	-15.52	-
4	1.391	0.15	46.19	35.57	46.34	35.72	56.00	46.00	-9.66	-10.28
5	1.809	0.16	44.92	-	45.08	-	56.00	46.00	-10.92	-
6	2.090	0.16	46.21	32.58	46.37	32.74	56.00	46.00	-9.63	-13.26


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

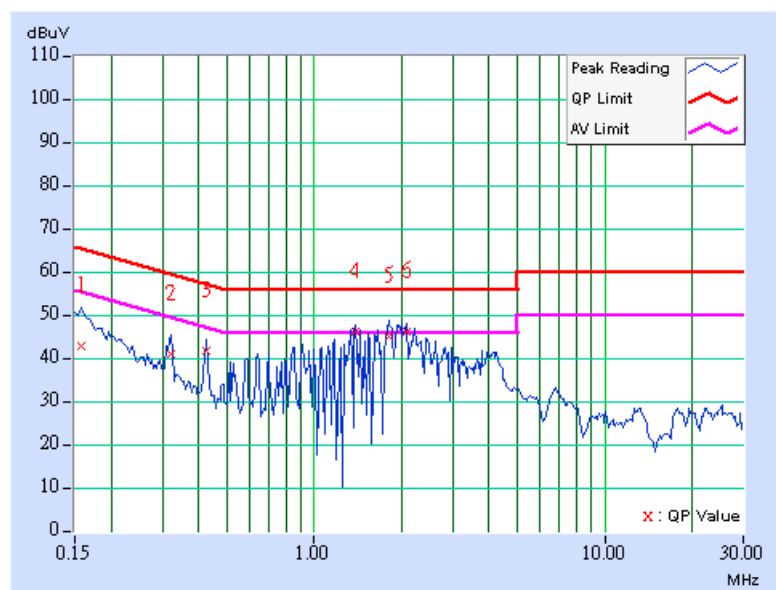

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	42.37	-	42.47	-	65.58	55.58	-23.11	-
2	0.322	0.11	39.82	-	39.93	-	59.66	49.66	-19.72	-
3	0.427	0.12	40.61	-	40.73	-	57.30	47.30	-16.58	-
4	1.594	0.16	47.01	35.58	47.17	35.74	56.00	46.00	-8.83	-10.26
5	2.082	0.16	45.55	-	45.71	-	56.00	46.00	-10.29	-
6	4.164	0.20	42.68	-	42.88	-	56.00	46.00	-13.12	-


REMARKS: 1. Q.P. and AV. Are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level – Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

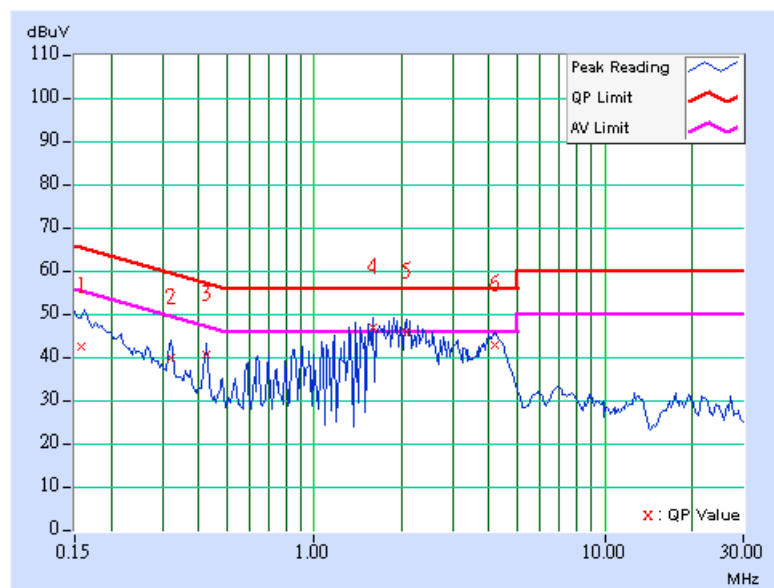

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	38.24	-	38.35	-	66.00	56.00	-27.65	-
2	0.209	0.12	47.05	-	47.17	-	63.26	53.26	-16.09	-
3	0.275	0.12	38.01	-	38.13	-	60.97	50.97	-22.83	-
4	0.345	0.12	31.56	-	31.68	-	59.07	49.07	-27.39	-
5	2.961	0.18	27.07	-	27.25	-	56.00	46.00	-28.75	-
6	25.332	1.18	29.18	-	30.36	-	60.00	50.00	-29.64	-


REMARKS: 1. Q.P. and AV. Are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level – Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

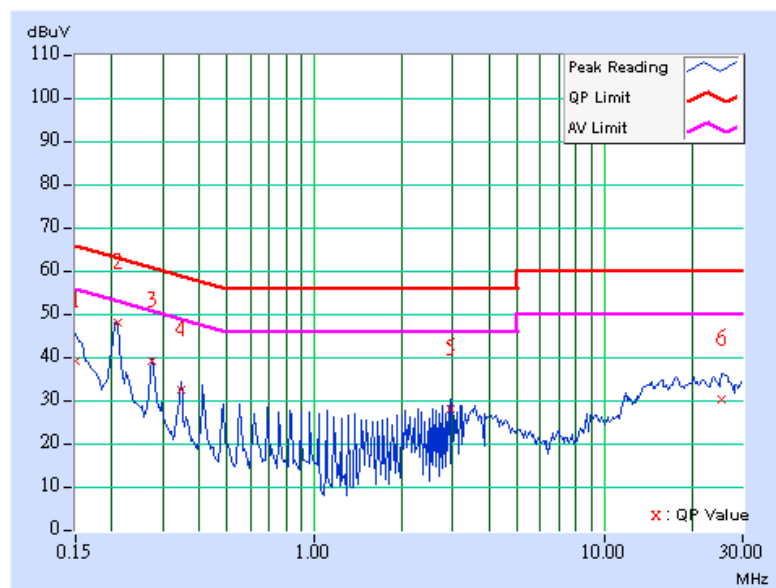

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	38.04	-	38.14	-	66.00	56.00	-27.86	-
2	0.209	0.11	47.16	-	47.27	-	63.26	53.26	-15.99	-
3	0.275	0.11	38.83	-	38.94	-	60.97	50.97	-22.02	-
4	0.412	0.12	32.03	-	32.15	-	57.61	47.61	-25.47	-
5	15.500	0.65	29.80	-	30.45	-	60.00	50.00	-29.55	-
6	25.836	0.67	31.16	-	31.83	-	60.00	50.00	-28.17	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

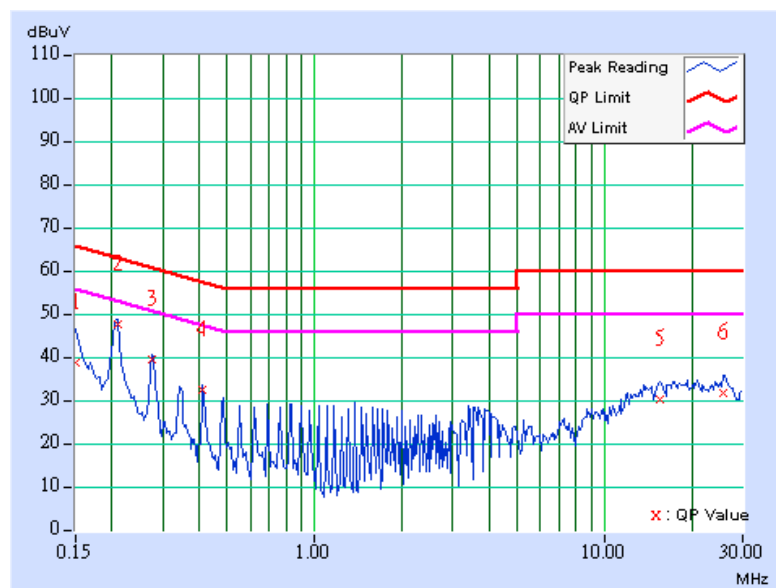

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.12	46.08	-	46.20	-	63.26	53.26	-17.06	-
2	0.275	0.12	37.86	-	37.98	-	60.97	50.97	-22.98	-
3	0.345	0.12	31.89	-	32.01	-	59.07	49.07	-27.06	-
4	0.412	0.13	31.48	-	31.61	-	57.61	47.61	-26.01	-
5	16.640	0.86	29.75	-	30.61	-	60.00	50.00	-29.39	-
6	25.935	1.21	30.09	-	31.30	-	60.00	50.00	-28.70	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

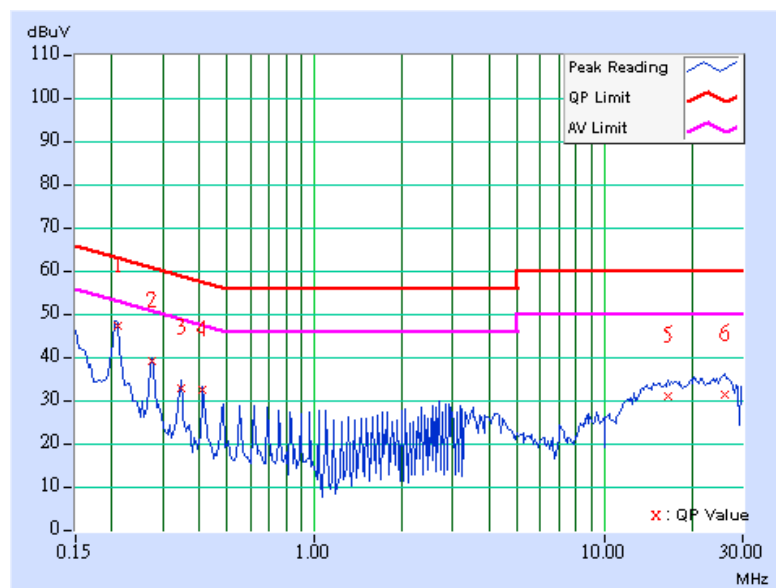

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	36.46	-	36.56	-	66.00	56.00	-29.44	-
2	0.205	0.11	46.26	-	46.37	-	63.42	53.42	-17.05	-
3	0.275	0.11	38.07	-	38.18	-	60.97	50.97	-22.78	-
4	0.412	0.12	32.33	-	32.45	-	57.61	47.61	-25.17	-
5	1.512	0.16	26.72	-	26.88	-	56.00	46.00	-29.12	-
6	25.305	0.67	29.84	-	30.51	-	60.00	50.00	-29.49	-


REMARKS: 1. Q.P. and AV. Are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level – Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

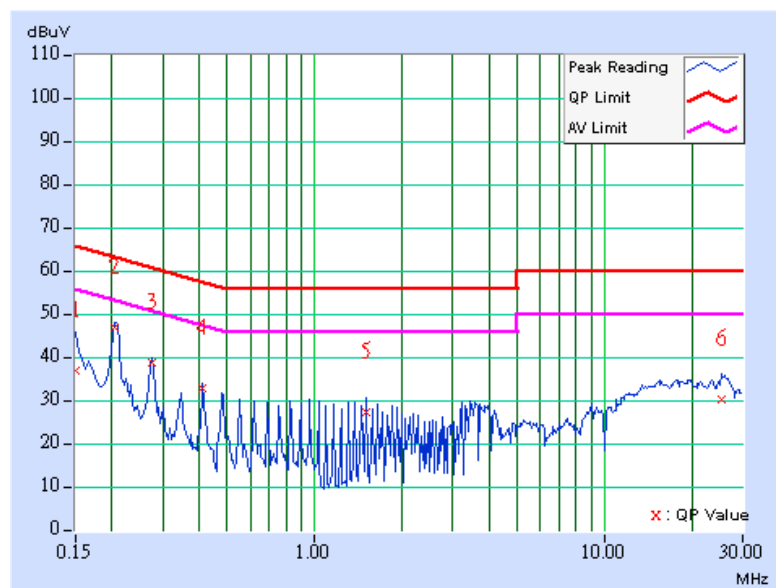

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TEST MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.12	45.96	-	46.08	-	63.42	53.42	-17.34	-
2	0.275	0.12	37.40	-	37.52	-	60.97	50.97	-23.44	-
3	0.345	0.12	31.44	-	31.56	-	59.07	49.07	-27.51	-
4	2.746	0.18	26.90	-	27.08	-	56.00	46.00	-28.92	-
5	17.590	0.90	30.01	-	30.91	-	60.00	50.00	-29.09	-
6	26.246	1.23	29.80	-	31.03	-	60.00	50.00	-28.97	-


REMARKS: 1. Q.P. and AV. Are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level – Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

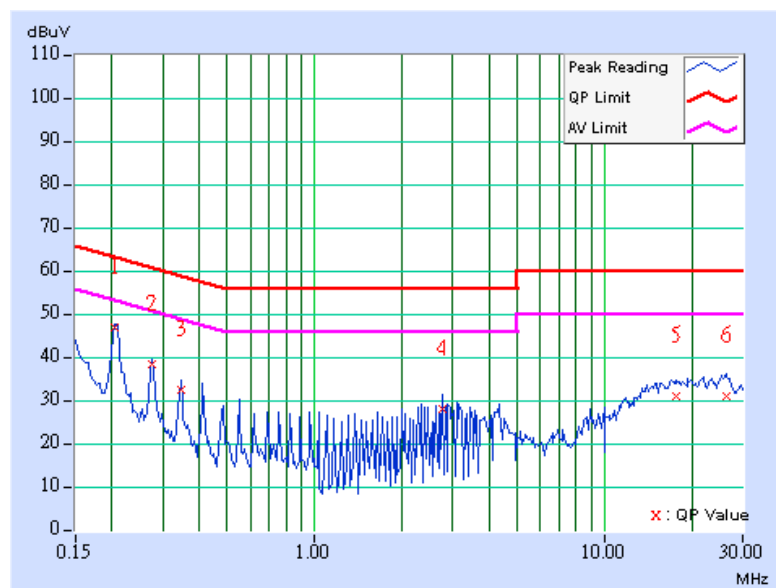

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Steven Lu
TSET MODEL	2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.11	46.20	-	46.31	-	63.42	53.42	-17.11	-
2	0.275	0.11	37.96	-	38.07	-	60.97	50.97	-22.89	-
3	0.412	0.12	32.33	-	32.45	-	57.61	47.61	-25.17	-
4	0.482	0.12	29.89	-	30.01	-	56.30	46.30	-26.30	-
5	13.813	0.55	29.77	-	30.32	-	60.00	50.00	-29.68	-
6	25.152	0.67	30.08	-	30.75	-	60.00	50.00	-29.25	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

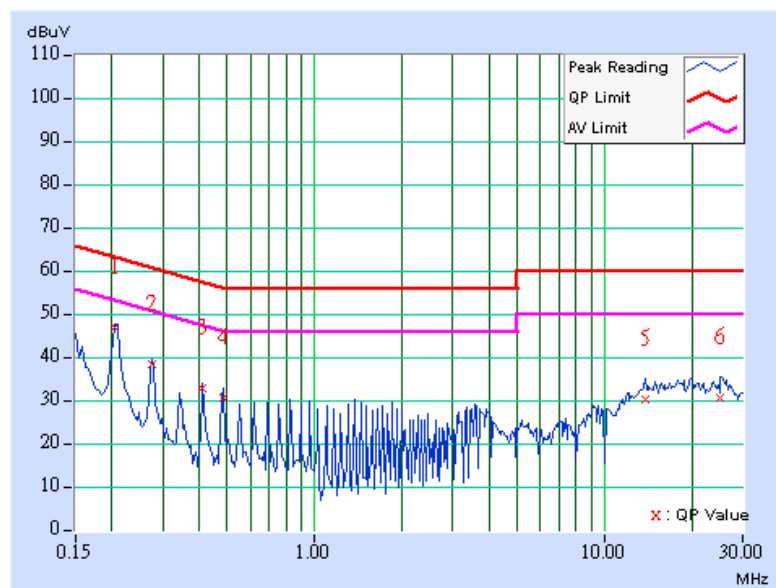

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY44360124	Jan. 27, 2005
BILOG Antenna SCHWARZBECK	VULB 9168	9168-161	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-405	Feb. 03, 2005
Signal Generator Agilent	E8257C	MY43320668	Jan. 01, 2005
Preamplifier Agilent	8449B	3008A01976	Mar. 08, 2005
Preamplifier Agilent	8447D	2944A10639	Jan. 15, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218187/4	Mar. 09, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218189/4	Mar. 09, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower Inn-co GmbH	MA 4000	MA 4000/013/6150303/L	NA
Turn Table ADT	NA	SN30303	NA
Controller TDK RF	SI-300	1200015	NA
Temperature & Humidity chamber WIT	TH-4S-C	W981030	Jul. 18, 2005

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa RF Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

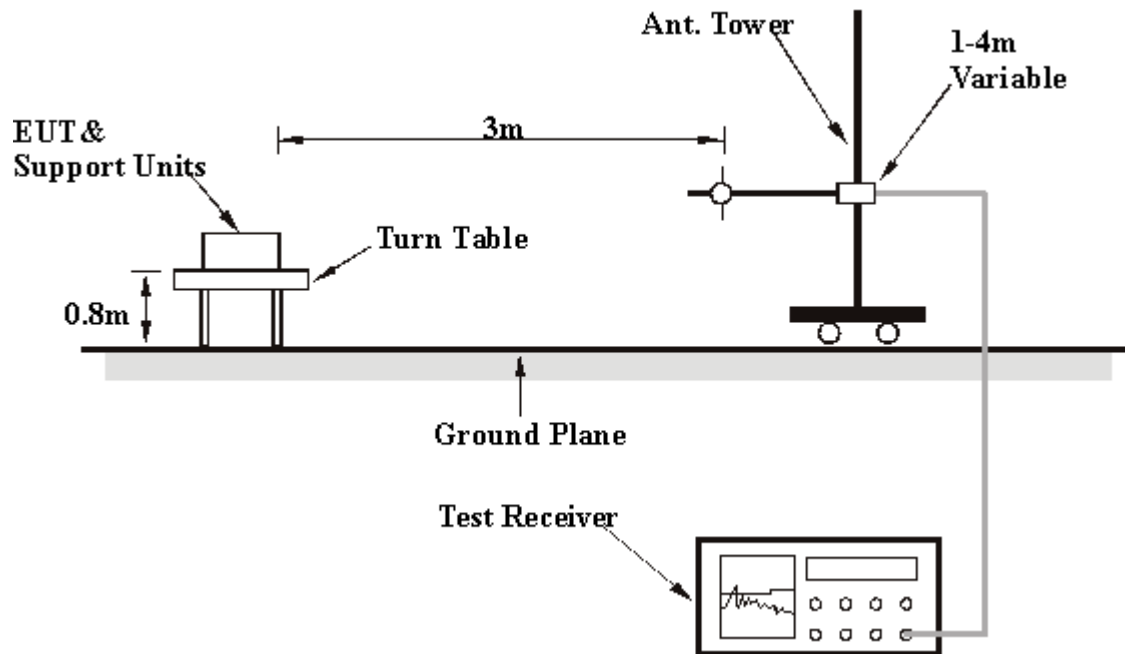

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Long Chen
TEST MODEL	1		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.66	39.85 QP	46.00	-6.15	1.25 H	100	26.44	13.41
2	374.07	40.11 QP	46.00	-5.89	1.00 H	259	23.72	16.39
3	500.01	43.77 QP	46.00	-2.23	1.78 H	309	25.06	18.71
4	599.56	37.42 QP	46.00	-8.58	1.25 H	34	16.18	21.24
5	624.83	40.22 QP	46.00	-5.78	1.25 H	10	18.63	21.59
6	700.64	37.28 QP	46.00	-8.72	1.00 H	280	14.76	22.53
7	807.56	41.30 QP	46.00	-4.70	1.00 H	7	17.46	23.84
8	875.59	41.62 QP	46.00	-4.38	1.50 H	13	16.86	24.76

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Long Chen
TEST MODEL	1		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.66	37.49 QP	40.00	-2.51	1.50 V	235	21.60	15.89
2	78.60	33.07 QP	40.00	-6.93	2.00 V	28	22.22	10.85
3	249.66	42.81 QP	46.00	-3.19	2.00 V	10	29.39	13.41
4	374.07	42.91 QP	46.00	-3.09	1.50 V	46	26.52	16.39
5	449.88	34.08 QP	46.00	-11.92	1.00 V	343	15.98	18.11
6	500.01	44.54 QP	46.00	-1.46	1.96 V	331	25.83	18.71
7	624.83	42.33 QP	46.00	-3.67	1.75 V	133	20.73	21.59
8	875.59	38.59 QP	46.00	-7.41	1.25 V	100	13.84	24.76

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3.The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Long Chen
TEST MODEL	2		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.66	41.01 QP	46.00	-4.99	1.50 H	295	27.60	13.41
2	374.07	42.71 QP	46.00	-3.29	2.00 H	274	26.32	16.39
3	500.42	43.28 QP	46.00	-2.72	1.50 H	355	24.56	18.72
4	624.83	42.75 QP	46.00	-3.25	1.50 H	22	21.16	21.59
5	659.82	40.67 QP	46.00	-5.33	1.50 H	52	18.62	22.05
6	700.64	37.72 QP	46.00	-8.28	2.00 H	22	15.19	22.53
7	751.18	40.48 QP	46.00	-5.52	2.00 H	25	16.79	23.68
8	875.59	38.64 QP	46.00	-7.36	1.50 H	19	13.88	24.76

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value..

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 67% RH, 991 hPa	TESTED BY	Long Chen
TEST MODEL	2		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.05	36.11 QP	40.00	-3.89	1.00 V	220	22.46	13.64
2	249.66	41.58 QP	46.00	-4.42	1.00 V	19	28.17	13.41
3	374.07	42.57 QP	46.00	-3.43	2.00 V	106	26.18	16.39
4	500.00	44.79 QP	46.00	-1.21	1.00 V	346	26.08	18.71
5	624.83	42.63 QP	46.00	-3.37	1.50 V	319	21.03	21.59
6	659.82	41.51 QP	46.00	-4.49	1.00 V	121	19.46	22.05
7	700.64	42.30 QP	46.00	-3.70	1.50 V	346	19.78	22.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (A)

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 68% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.77 PK	74.00	-27.23	1.12 H	23	18.20	28.57
2	2390.00	45.28 PK	74.00	-28.72	1.50 H	0	13.67	31.61
3	*2412.00	101.57 PK			1.50 H	0	69.87	31.70
3	*2412.00	94.25 AV			1.50 H	0	62.55	31.70
4	3216.00	46.31 PK	74.00	-27.69	1.20 H	275	12.53	33.78
5	4824.00	48.37 PK	74.00	-25.63	1.03 H	1	10.79	37.58
6	9648.00	59.02 PK	74.00	-14.98	1.14 H	30	10.65	48.37
6	9648.00	47.73 AV	54.00	-6.27	1.14 H	30	-0.64	48.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	47.62 PK	74.00	-26.38	1.00 V	353	19.05	28.57
2	2390.00	56.08 PK	74.00	-17.92	1.39 V	30	24.47	31.61
2	2390.00	48.47 AV	54.00	-5.53	1.39 V	30	16.86	31.61
3	*2412.00	112.37 PK			1.39 V	30	80.67	31.70
3	*2412.00	104.76 AV			1.39 V	30	73.06	31.70
4	3216.00	53.15 PK	74.00	-20.85	1.11 V	333	19.37	33.78
4	3216.00	50.06 AV	54.00	-3.94	1.11 V	333	16.28	33.78
5	4824.00	55.98 PK	74.00	-18.02	1.17 V	356	18.40	37.58
5	4824.00	43.25 AV	54.00	-10.75	1.17 V	356	5.67	37.58
6	9648.00	61.27 PK	74.00	-12.73	1.37 V	33	12.90	48.37
6	9648.00	53.69 AV	54.00	-0.31	1.37 V	33	5.32	48.37

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	46.73 PK	74.00	-27.27	1.02 H	12	18.15	28.58
2	*2437.00	108.35 PK			1.00 H	360	76.50	31.85
2	*2437.00	101.26 AV			1.00 H	360	69.41	31.85
3	3248.00	47.99 PK	74.00	-26.01	1.06 H	338	14.13	33.86
4	4874.00	51.94 PK	74.00	-22.06	1.04 H	243	14.28	37.66
4	4874.00	39.27 AV	54.00	-14.73	1.04 H	243	1.61	37.66
5	9748.00	58.93 PK	74.00	-15.07	1.06 H	263	10.49	48.44
5	9748.00	46.27 AV	54.00	-7.73	1.06 H	263	-2.17	48.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	48.39 PK	74.00	-25.61	1.05 V	308	19.81	28.58
2	*2437.00	112.70 PK			1.07 V	12	80.85	31.85
2	*2437.00	105.38 AV			1.07 V	12	73.53	31.85
3	3248.00	52.48 PK	74.00	-21.52	1.24 V	297	18.62	33.86
3	3248.00	43.95 AV	54.00	-10.05	1.24 V	297	10.09	33.86
4	4874.00	61.34 PK	74.00	-12.66	1.11 V	33	23.68	37.66
4	4874.00	48.67 AV	54.00	-5.33	1.11 V	33	11.01	37.66
5	9748.00	61.64 PK	74.00	-12.36	1.41 V	30	13.20	48.44
5	9748.00	53.52 AV	54.00	-0.48	1.41 V	30	5.08	48.44

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.31 PK	74.00	-27.69	1.13 H	274	17.74	28.57
2	*2462.00	108.02 PK			1.00 H	360	76.02	32.00
2	*2462.00	100.74 AV			1.00 H	360	68.74	32.00
3	2484.50	54.07 PK	74.00	-19.93	1.00 H	360	21.93	32.14
3	2484.50	46.79 AV	54.00	-7.21	1.00 H	360	14.65	32.14
4	3282.00	48.67 PK	74.00	-25.33	1.00 H	206	14.73	33.94
5	4924.00	49.41 PK	74.00	-24.59	1.00 H	233	11.67	37.74
6	9848.00	59.24 PK	74.00	-14.76	1.41 H	20	10.58	48.66
6	9848.00	47.56 AV	54.00	-6.44	1.41 H	20	-1.10	48.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	47.42 PK	74.00	-26.58	1.24 V	341	18.82	28.59
2	*2462.00	113.23 PK			1.00 V	307	81.23	32.00
2	*2462.00	105.89 AV			1.00 V	307	73.89	32.00
3	2484.10	59.28 PK	74.00	-14.72	1.00 V	307	27.15	32.13
3	2484.10	51.94 AV	54.00	-2.06	1.00 V	307	19.81	32.13
4	3282.00	51.11 PK	74.00	-22.89	1.04 V	336	17.18	33.94
4	3282.00	46.98 AV	54.00	-7.02	1.04 V	336	13.05	33.94
5	4924.00	59.57 PK	74.00	-14.43	1.09 V	33	21.83	37.74
5	4924.00	46.63 AV	54.00	-7.37	1.09 V	33	8.89	37.74
6	9848.00	61.28 PK	74.00	-12.72	1.38 V	265	12.62	48.66
6	9848.00	50.78 AV	54.00	-3.22	1.38 V	265	2.12	48.66

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS (B)

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	44.80 PK	74.00	-29.20	1.13 H	217	16.23	28.57
2	2390.00	53.10 PK	74.00	-20.90	1.00 H	15	21.49	31.61
2	2390.00	47.81 AV	54.00	-6.19	1.00 H	15	16.20	31.61
3	*2412.00	103.09 PK			1.00 H	15	71.39	31.70
3	*2412.00	97.80 AV			1.00 H	15	66.10	31.70
4	3216.00	49.63 PK	74.00	-24.37	1.03 H	168	15.85	33.78
5	4824.00	50.67 PK	74.00	-23.33	1.00 H	308	13.09	37.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	45.33 PK	74.00	-28.67	1.24 V	334	16.76	28.57
2	2390.00	58.39 PK	74.00	-15.61	1.04 V	301	26.78	31.61
2	2390.00	52.42 AV	54.00	-1.58	1.04 V	301	20.81	31.61
3	*2412.00	108.38 PK			1.04 V	301	76.68	31.70
3	*2412.00	102.41 AV			1.04 V	301	70.71	31.70
4	3216.00	53.75 PK	74.00	-20.25	1.10 V	8	19.97	33.78
4	3216.00	51.03 AV	54.00	-2.97	1.10 V	8	17.25	33.78
5	4824.00	55.23 PK	74.00	-18.77	1.24 V	334	17.65	37.58
5	4824.00	52.49 AV	54.00	-1.51	1.24 V	334	14.91	37.58

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	45.90 PK	74.00	-28.10	1.43 H	216	17.32	28.58
2	*2437.00	103.93 PK			1.00 H	17	72.08	31.85
2	*2437.00	98.08 AV			1.00 H	17	66.23	31.85
3	3248.00	49.52 PK	74.00	-24.48	1.13 H	266	15.66	33.86
4	4874.00	48.51 PK	74.00	-25.49	1.63 H	147	10.85	37.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	48.59 PK	74.00	-25.41	1.00 V	12	20.01	28.58
2	*2437.00	109.78 PK			1.04 V	307	77.93	31.85
2	*2437.00	103.45 AV			1.04 V	307	71.60	31.85
3	3248.00	53.81 PK	74.00	-20.19	1.13 V	335	19.95	33.86
3	3248.00	50.30 AV	54.00	-3.70	1.13 V	335	16.44	33.86
4	4874.00	55.76 PK	74.00	-18.24	1.00 V	340	18.10	37.66
4	4874.00	52.02 AV	54.00	-1.98	1.00 V	340	14.36	37.66

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	11g Gigabit Router	MODEL	F5D7235-4
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	45.30 PK	74.00	-28.70	1.13 H	207	16.71	28.59
2	*2462.00	102.95 PK			1.00 H	11	70.95	32.00
2	*2462.00	96.89 AV			1.00 H	11	64.89	32.00
3	3282.00	48.61 PK	74.00	-25.39	1.06 H	189	14.67	33.94
4	4924.00	48.63 PK	74.00	-25.37	1.44 H	23	10.89	37.74

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	47.14 PK	74.00	-26.86	1.09 V	308	18.55	28.59
2	*2462.00	109.47 PK			1.23 V	311	77.47	32.00
2	*2462.00	103.19 AV			1.23 V	311	71.19	32.00
3	2483.50	58.63 PK	74.00	-15.37	1.23 V	311	26.50	32.13
3	2483.50	52.35 AV	54.00	-1.65	1.23 V	311	20.22	32.13
4	3282.00	51.76 PK	74.00	-22.24	1.04 V	333	17.83	33.94
4	3282.00	48.17 AV	54.00	-5.83	1.04 V	333	14.24	33.94
5	4924.00	54.93 PK	74.00	-19.07	1.00 V	316	17.19	37.74
5	4924.00	52.21 AV	54.00	-1.79	1.00 V	316	14.47	37.74

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS (A)


EUT	11g Gigabit Router	MODEL	F5D7235-4
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.06	0.5	PASS
6	2437	11.10	0.5	PASS
11	2462	10.70	0.5	PASS


CH1

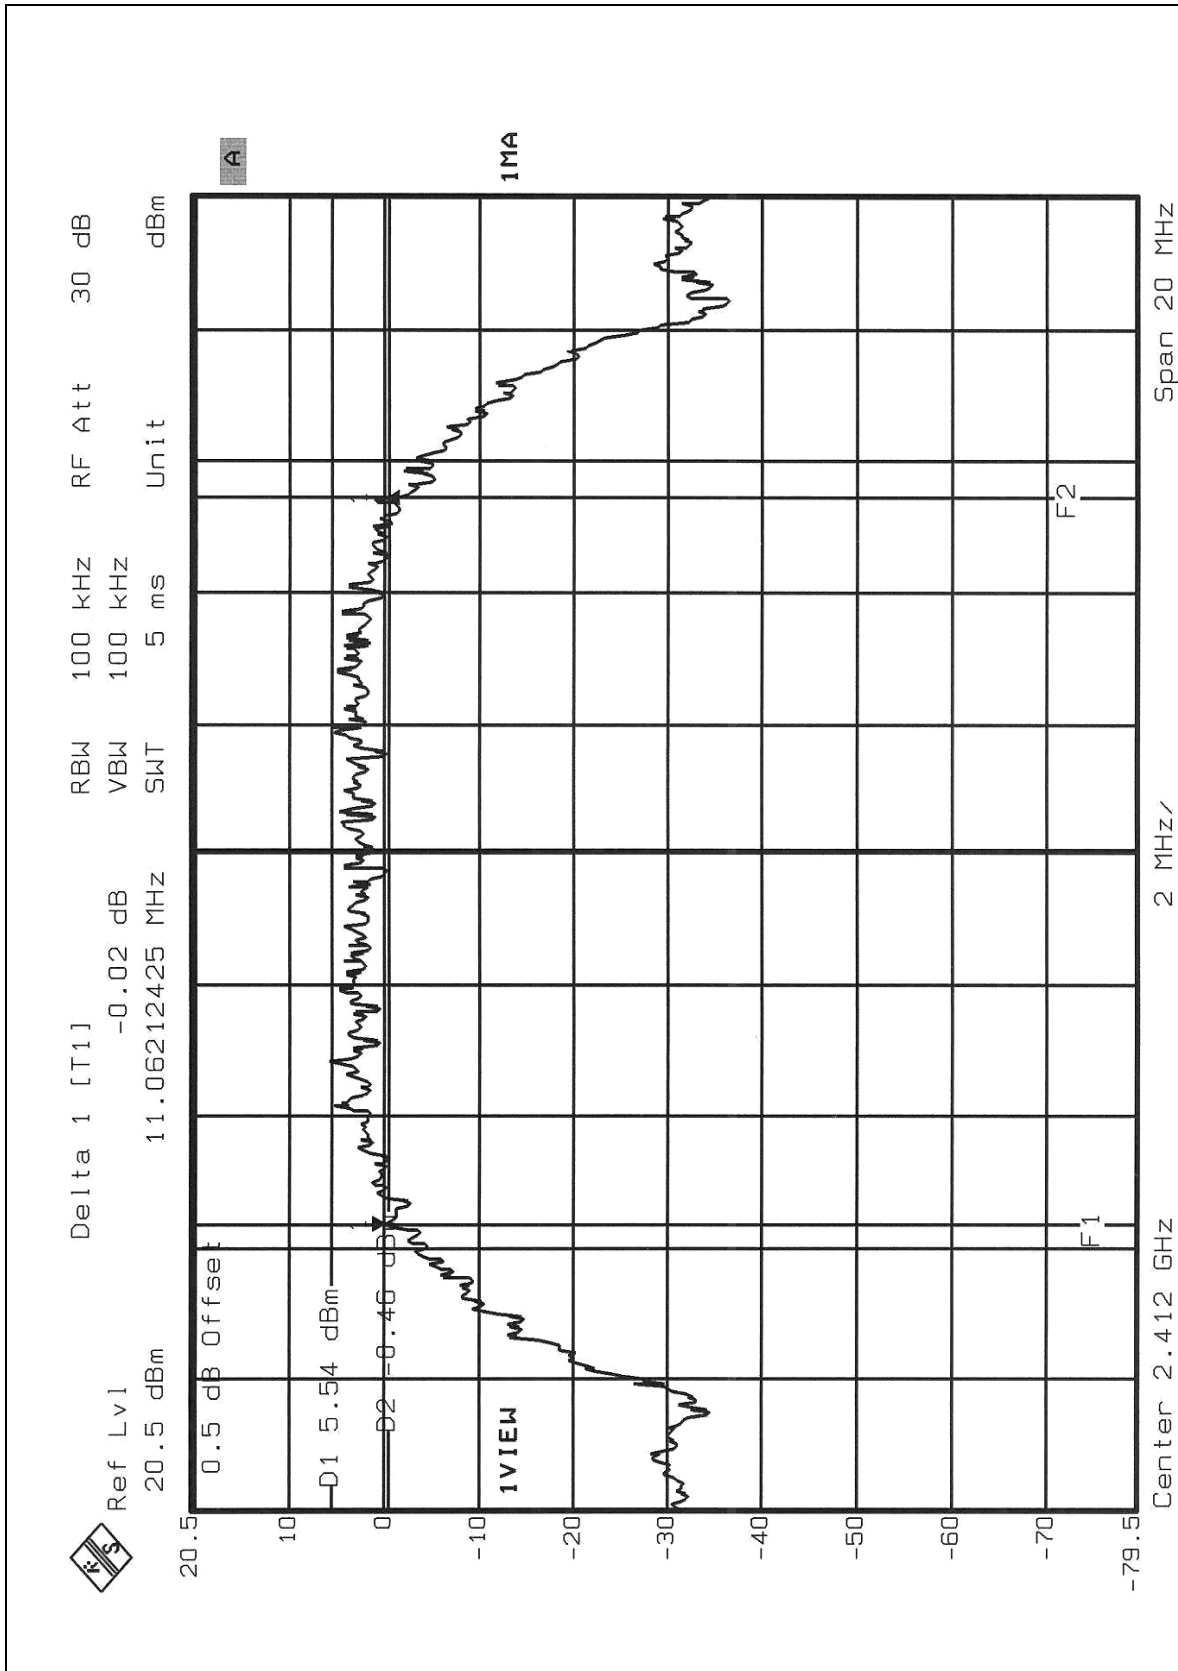

CH6

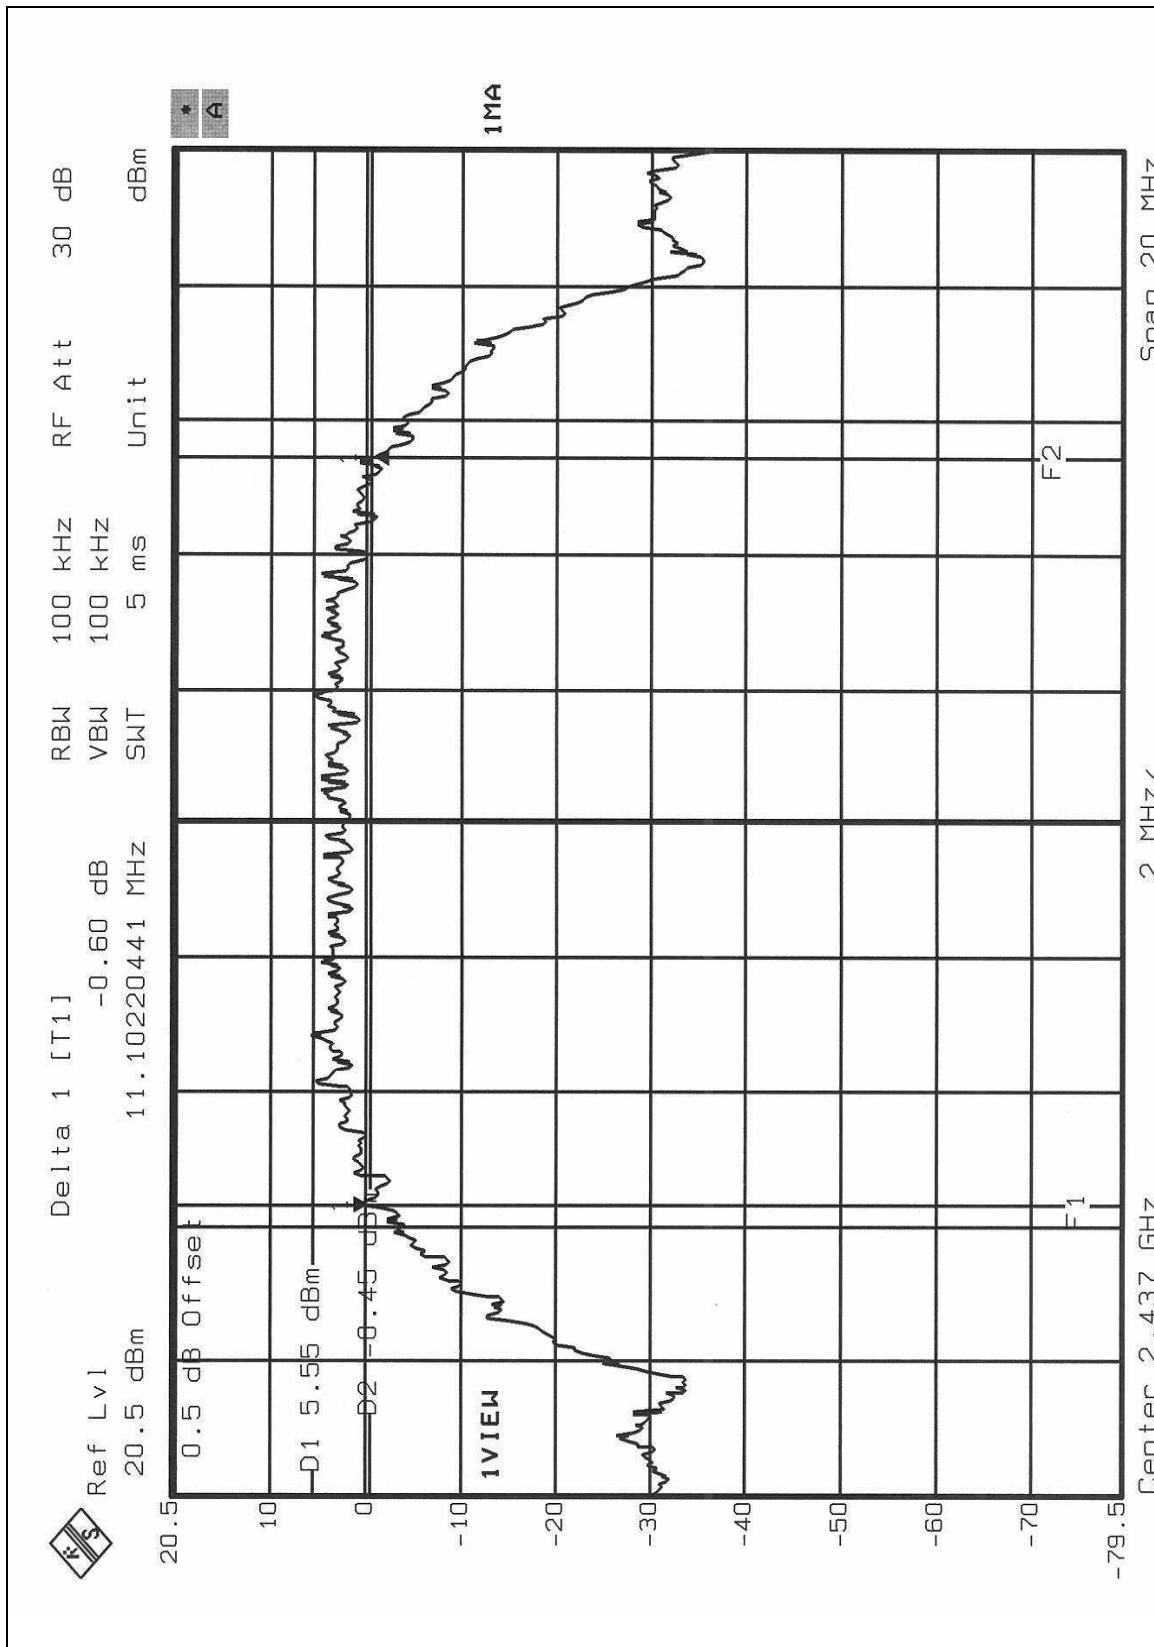

CH11

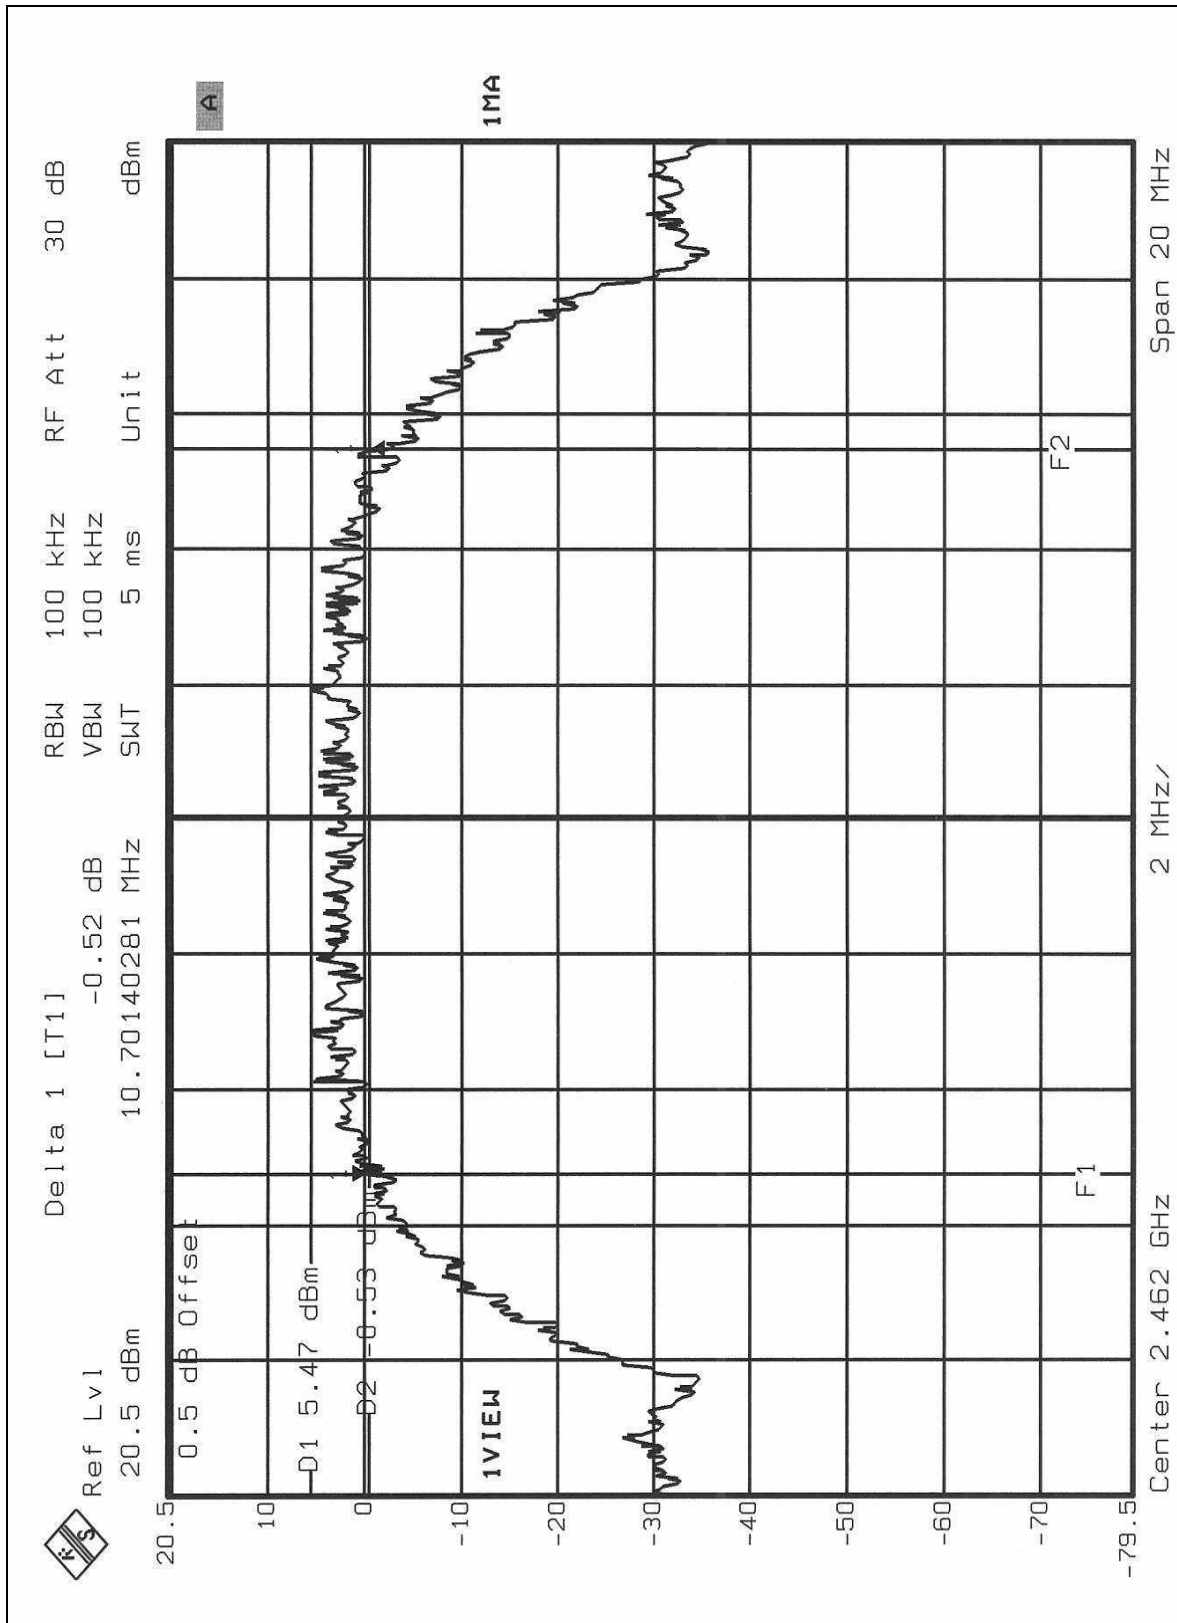


4.3.8 TEST RESULTS (B)

EUT	11g Gigabit Router	MODEL	F5D7235-4
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.31	0.5	PASS
6	2437	16.43	0.5	PASS
11	2462	16.39	0.5	PASS

CH1

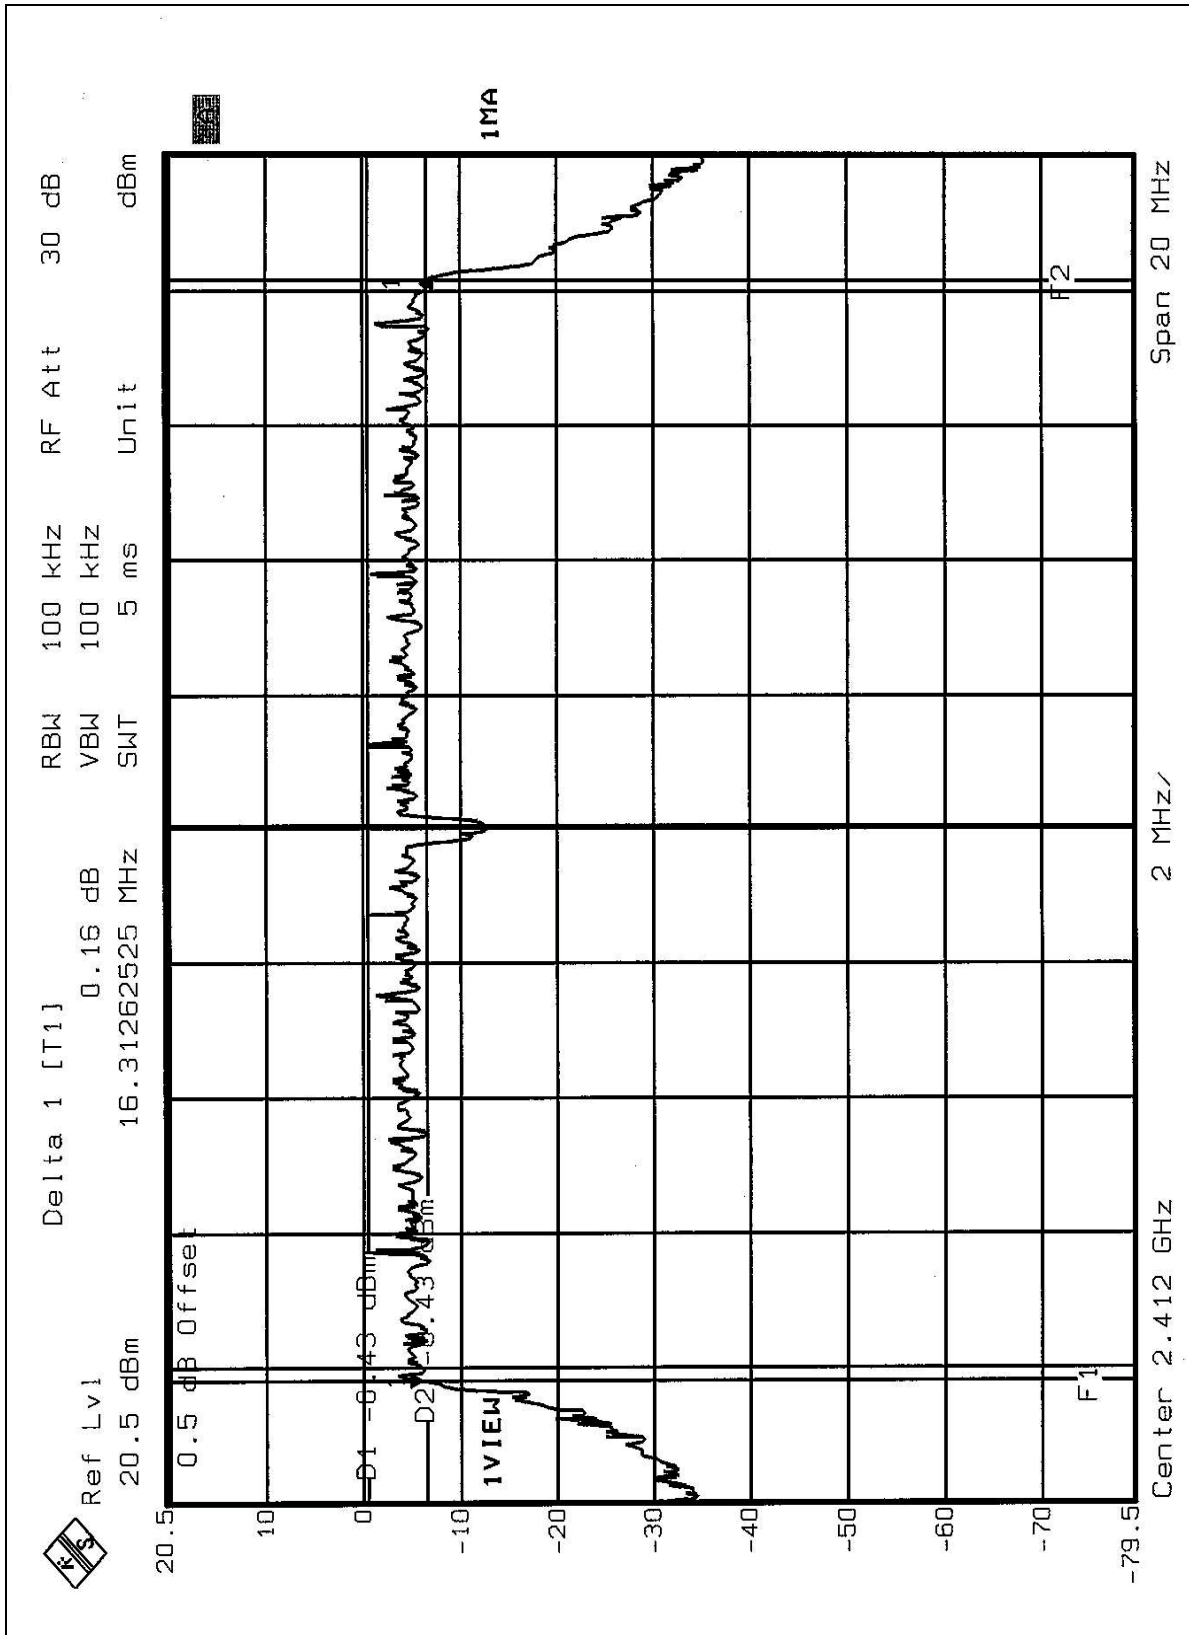

Ref Lvl 20.5 dBm

Delta 1 [T1] 1.27 dB

RBW 100 kHz

VBW 100 kHz

SWT 5 ms

RF Att 30 dB

Unit dBm

0.5 dB Offset

01 -1.09 dBm

1VIEW

-8.16 dBm

2.42876353 GHz

1.27 dB

16.43286573 MHz


F1

F2

Center 2.437 GHz

Span 20 MHz

CH11

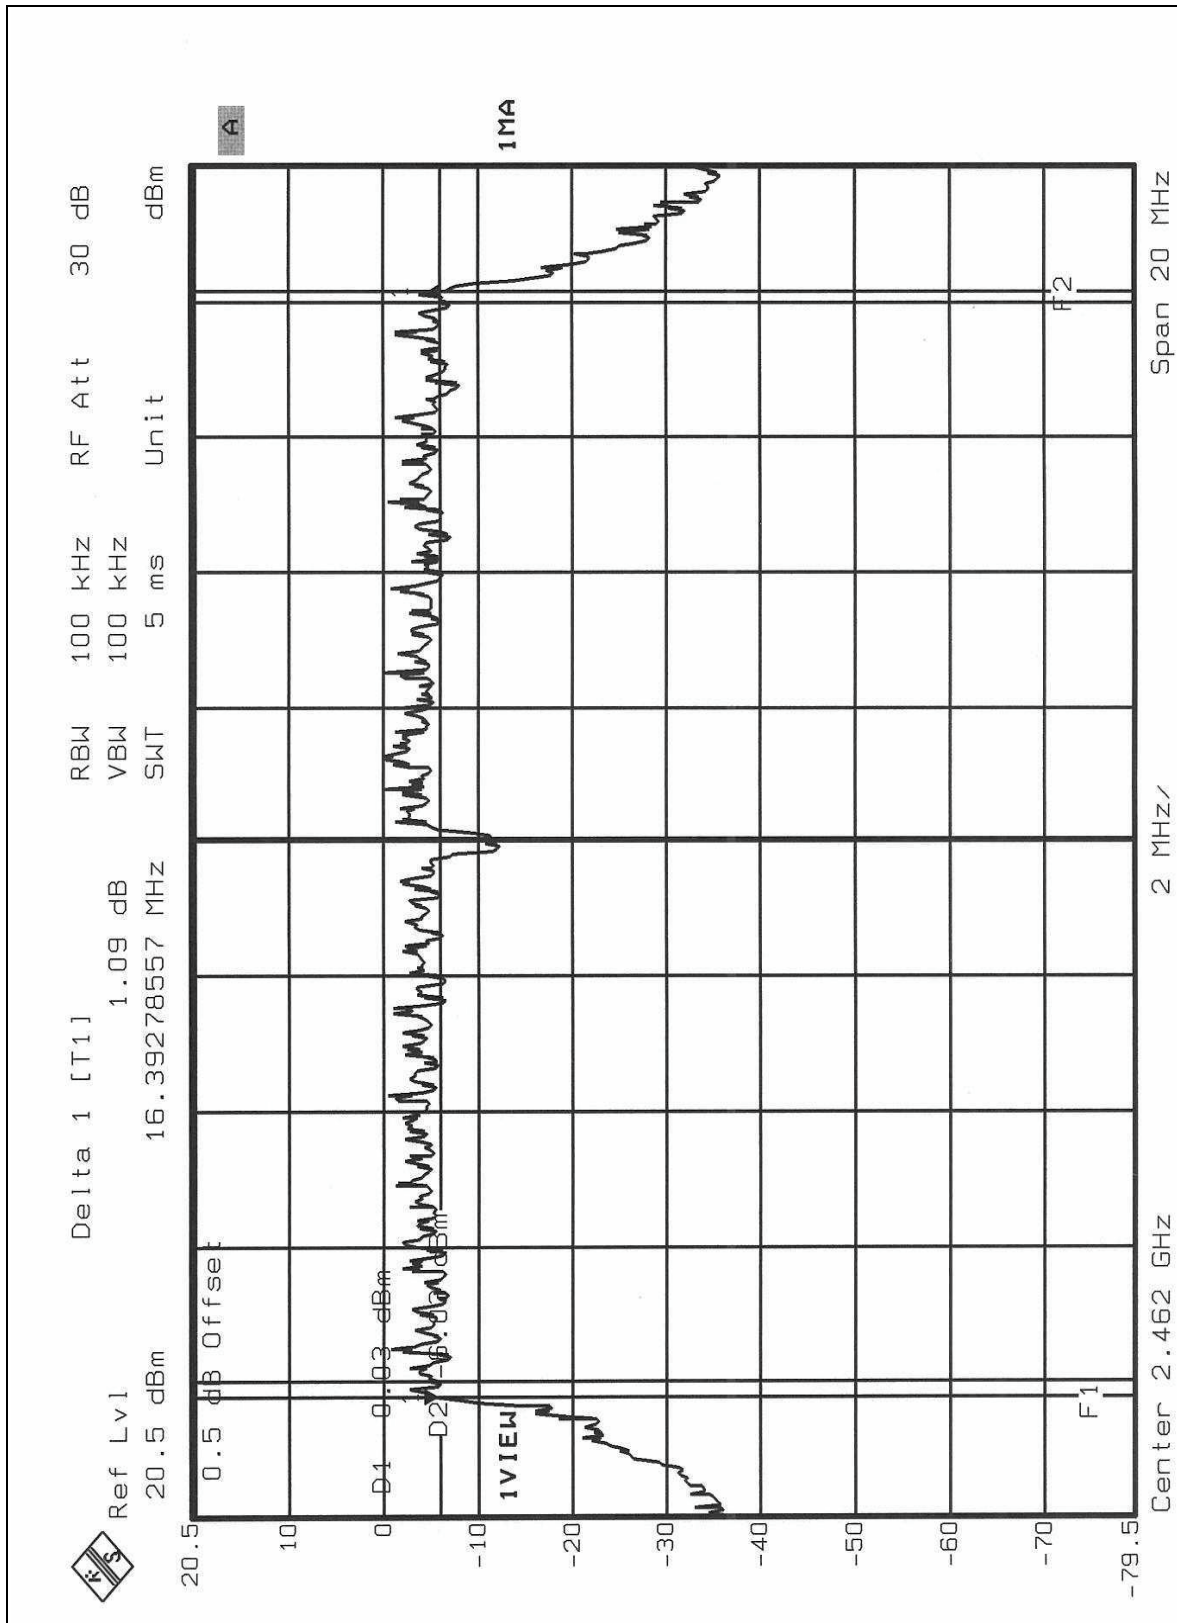

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (A)

EUT	11g Gigabit Router	MODEL	F5D7235-4
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	61.660	17.90	30	PASS
6	2437	61.802	17.91	30	PASS
11	2462	61.944	17.92	30	PASS

4.4.8 TEST RESULTS (B)

EUT	11g Gigabit Router	MODEL	F5D7235-4
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	31.989	15.05	30	PASS
6	2437	32.063	15.06	30	PASS
11	2462	31.842	15.03	30	PASS