

# **FCC Test Report**

Report No.: AGC02129220902FE10

FCC ID : 2AGPDZEAPMO33

APPLICATION PURPOSE Original Equipment

**PRODUCT DESIGNATION**: 3-in-1 Modular Charging Station

BRAND NAME : Zens

MODEL NAME : ZEAPMO2/00, ZEAPMO2/06

**APPLICANT** : Zens International B.V.

**DATE OF ISSUE** : Sep. 21, 2022

**STANDARD(S)** : FCC Part 15 Subpart C

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 30

### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 21, 2022	Valid	Initial Release




### **TABLE OF CONTENTS**

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	5
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	. 10
4.SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	. 11
4.2 EUT EXERCISE	. 11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	. 11
4.5 SUMMARY OF TEST RESULTS	. 12
5. DESCRIPTION OF TEST MODES	13
6. FIELD STRENGTH OF FUNDAMENTAL	. 14
6.1 PROVISIONS APPLICABLE	. 14
6.3 FIELD STRENGTH CALCULATION	16
6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
6.5 MEASUREMENT RESULTS	18
7. 20 DB BANDWIDTH	. 24
7.1 PROVISIONS APPLICABLE	. 24
7.2 MEASUREMENT PROCEDURE	. 24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	. 24
7.4 MEASUREMENT RESULTS	. 24
8. AC POWER LINE CONDUCTED EMISSION TEST	. 26
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	. 26
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	. 26



Page 4 of 30

ΔΡ	PENDIX II: PHOTOGRAPHS OF TEST FUT	30
ΑP	PENDIX I: PHOTOGRAPHS OF TEST SETUP	30
	8.5 MEASUREMENT RESULTS	28
	8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	27
	8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	27





### 1. GENERAL INFORMATION

Applicant	Zens International B.V.		
Address	High Tech Campus 85, 5656 AG Eindhoven, The Netherlands		
Manufacturer	Zens International B.V.		
Address	High Tech Campus 85, 5656 AG Eindhoven, The Netherlands		
Factory	Huizhou SPEED Wireless Technology Co.,Ltd.		
Address	No.138 Huize Road, Hi-Tech Industrial Park of East River, Zhongkai Hi-tech District, Huizhou City, Guangdong Province, China		
Product Designation	3-in-1 Modular Charging Station		
Brand Name	Zens		
Test Model	ZEAPMO2/00		
Series Model	ZEAPMO2/06		
Difference description	All the same except the model name.		
Deviation from Standard	No any deviation from the test method		
Date of Test	Sep. 19, 2022~Sep. 21, 2022		
Test Result	Pass		
Test Report Form No	AGCTR-ER-FCC-WPTV1.0		

Reviewed By

Bibo Zhang
(Project Engineer)

Calvin Liu
(Reviewer)

Sep. 21, 2022

Approved By

Max Zhang
Authorized Officer

Sep. 21, 2022



Page 6 of 30

### 2. PRODUCT INFORMATION

### 2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	WLT0065-BPP-V10
Software Version	WLT0065-V01
Frequency Band	WPT_1:110.5KHz-148KHz WPT_2: 360KHz-365KHz
Operation Frequency	147.1KHz, 360.0KHz
Modulation Type	ASK
Number of channels	2
Field Strength of Fundamental	70.30dBuV/m (Max)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Power Supply	Input:DC 24V==2.7A Output1:MagSafe Charger 15W Max Output2:Qi Charger 5W Max Output3:USB-C 5V==3A/9V==3A/12V==3A/15V==3A/20V==3A Max Output4: Pogopin 15V==0.87A( can extend Apple Wacth Charger 2.5W )
Adapter Information	Input: AC 100V-240V, 50/60Hz, 1.5A Output: DC 24.0V, 2.7A

### 2.2 TEST FREQUENCY LIST

### For AirPods Pro Case:

Frequency Band	Channel Number	Frequency
110.5~148KHz	01	147.1KHz

### **For Apple Mobile Phone:**

Frequency Band	Channel Number	Frequency
360~365KHz	01	360.0KHz



Page 7 of 30

### 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AGPDZEAPMO33**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No. Identity Document Title  1 FCC 47 CFR Part 2 Frequency allocations and radio treaty matters; general rules a		Document Title
		Frequency allocations and radio treaty matters; general rules and regulations
2	2 FCC 47 CFR Part 15 Radio Frequency Devices	
3 ANSI C63.10-2013 American National Standard for Testing Unlicensed Wirele		American National Standard for Testing Unlicensed Wireless Devices

### 2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

### 2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7 ANTENNA REQUIREMENT

### **Standard Requirement**

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0 dBi.



Page 8 of 30

### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 30

### 3.3 ENVIRONMENTAL CONDITIONS

15 - 35	-20 - 50
	-20 - 30
20 % - 75 %	20 % - 75 %
86 - 106	86 - 106
	86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

#### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 10 of 30

### 3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY5347050 4	Nov. 17, 2021	Nov. 16, 2022
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test Software	FARA	EZ-EMC(Ver.RA-0 3A)	N/A	N/A	N/A



Page 11 of 30

### **4.SYSTEM TEST CONFIGURATION**

#### **4.1 EUT CONFIGURATION**


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **4.2 EUT EXERCISE**


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



#### **4.4 EQUIPMENT USED IN TESTED SYSTEM**

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment	Model No.	Identifier	Note
1	Wireless Load	N/A	N/A	Accessories
2	Apple Mobile Phone	iPhone 12	N/A	Accessories

☐ Test Accessories Come From The Manufacturer


Item	Equipment	Model No. Identifier		Note
1	3-in-1 Modular Charging Station	ZEAPMO2/00	2AGPDZEAPMO33	EUT
2	USB Cable	N/A	1.5m, Shielded	Accessories
3	Adapter	GJ60WD-2400270DP	Input:AC100V-240V, 50/60Hz, 1.5A Output:DC24.0V, 2.7A	Accessories



Page 12 of 30

### 4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass





### 5. DESCRIPTION OF TEST MODES

	Summary table of Test Cases
	Equipment type / Modulation
Test Item	WPT_ASK
Radiated&Conducted Test Cases	Mode 1: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) +Wireless load (Full Load)  Mode 2: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) +Wireless load (Full Load)  Mode 3: AC/DC Adapter + EUT + Mobile Phone (Battery Status: 100%) +Wireless load (Full Load)  Mode 4: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) +Wireless load (Half Load)  Mode 5: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) +Wireless load (Half Load)  Mode 6: AC/DC Adapter + EUT + Mobile Phone (Battery Status: 100%) +Wireless load (Half Load)  Mode 7: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) +Wireless load (Null Load)  Mode 8: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) +Wireless load (Null Load)  Mode 9: AC/DC Adapter + EUT + Mobile Phone (Battery Status: 100%) +Wireless load (Null Load)  Mode 10: AC/DC Adapter + EUT (Null Load)
AC Conducted Emission	Mode 1: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%)

### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- The manufacturer provides wireless charging equipment for testing and evaluation Apple Phone and the wireless load replaces the AirPods Pro Case.



Page 14 of 30

### 6. FIELD STRENGTH OF FUNDAMENTAL

### **6.1 PROVISIONS APPLICABLE**

Test Requirement:	FCC Part15 C Secti	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	9kHz to 1GHz							
Test site:	Measurement Distance: 3m							
	Frequency	Detector	RBW	VBW	Value			
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak			
Receiver setup:	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak			
ixeceivei setup.	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak			
	Above 1CH7	Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
		_						

### Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

### Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1CHz	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark: (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 15 of 30

#### **6.2 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 16 of 30

#### **6.3 FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where  $FS = Field Strength in dB\mu V/m$ 

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF where FS = Field Strength in  $dB\mu V/m$ RR = RA - AG - AV in  $dB\mu V$ LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m.

This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 52.0 dB\mu V/m$ 

AF = 7.4 dB/m  $RR = 18.0 \text{ dB}\mu\text{V}$  CF = 1.6 dB LF = 9.0 dB

AG = 29.0 dB

AV = 5.0 dBFS = RR + LF

 $FS = 18 + 9 = 27 dB\mu V/m$ 

Level in  $\mu$ V/m = Common Antilogarithm [(27 dB $\mu$ V/m)/20] = 22.4  $\mu$ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFH[dB(S/m)]$ 

Where,

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

LC is the cable loss,

GPA is the gain of the preamplifier (if used), and

AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFE[dB(m-1)] - 51.5[dB\Omega]$ 


where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






### 6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

### RADIATED EMISSION TEST SETUP 9KHz-30MHz

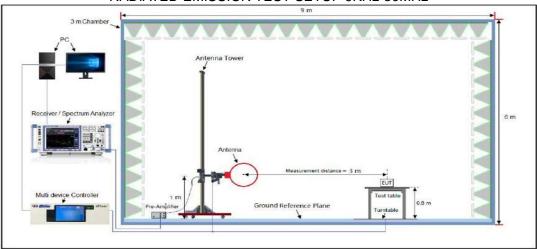

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

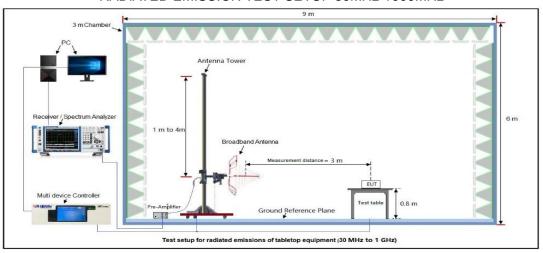


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



### **6.5 MEASUREMENT RESULTS**

### **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9KHz-150KHz**

		• • • •	
EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Face

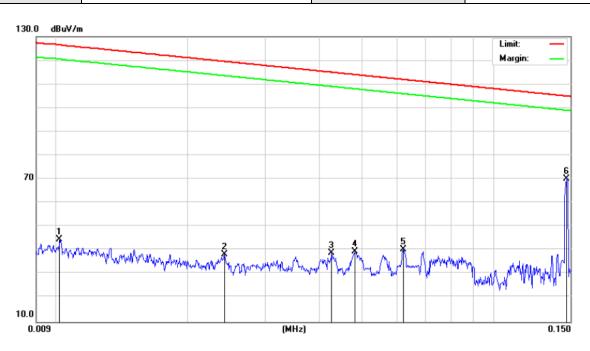


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0102	16.44	28.33	44.77	126.5	-81.78	peak
2	0.0241	11.06	27.29	38.35	119.5	-81.24	peak
3	0.0427	13.03	25.90	38.93	114.9	-76.03	peak
4	0.0483	13.97	25.48	39.45	113.9	-74.52	peak
5	0.0622	16.01	24.44	40.45	111.9	-71.47	peak
6 *	0.1471	48.77	21.53	70.30	104.9	-34.65	peak

### **RESULT: PASS**




### **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9KHz-150KHz**

EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Side

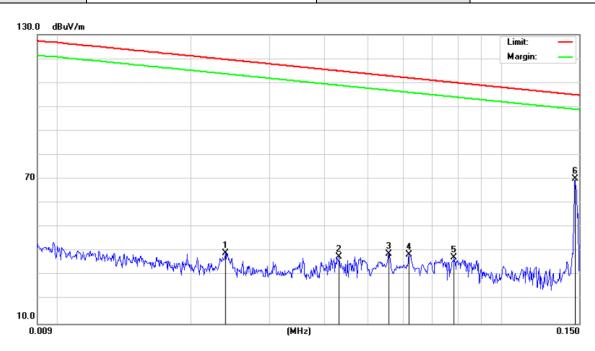

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0239	12.01	27.30	39.31	119.6	-80.35	peak
2	0.0430	11.85	25.88	37.73	114.9	-77.18	peak
3	0.0556	13.88	24.94	38.82	112.8	-74.01	peak
4	0.0619	14.16	24.46	38.62	111.9	-73.34	peak
5	0.0782	14.23	23.25	37.48	110.0	-72.59	peak
6 *	0.1471	48.56	21.53	70.09	104.9	-34.86	peak


### **RESULT: PASS**






### **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHz-30MHz**

EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00			
Temperature	22° C	Relative Humidity	55%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna	Face			

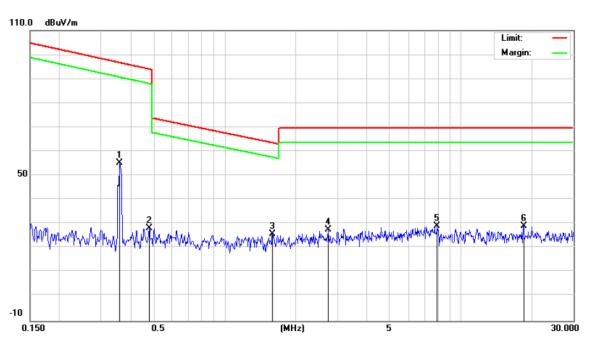

Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
0.3596	34.22	21.14	55.36	96.67	-41.31	peak
0.4786	7.31	20.92	28.23	94.02	-65.79	peak
1.5935	4.22	21.78	26.00	63.56	-37.56	peak
2.7502	5.43	22.34	27.77	69.54	-41.77	peak
7.9353	5.35	23.82	29.17	69.54	-40.37	peak
18.4258	4.18	24.99	29.17	69.54	-40.37	peak
	MHz 0.3596 0.4786 1.5935 2.7502 7.9353	Freq. Level  MHz dBuV  0.3596 34.22  0.4786 7.31  1.5935 4.22  2.7502 5.43  7.9353 5.35	Freq.         Level         Factor           MHz         dBuV         dB           0.3596         34.22         21.14           0.4786         7.31         20.92           1.5935         4.22         21.78           2.7502         5.43         22.34           7.9353         5.35         23.82	Freq.         Level         Factor         ment           MHz         dBuV         dB         dBuV/m           0.3596         34.22         21.14         55.36           0.4786         7.31         20.92         28.23           1.5935         4.22         21.78         26.00           2.7502         5.43         22.34         27.77           7.9353         5.35         23.82         29.17	Freq.         Level         Factor         ment         Limit           MHz         dBuV         dB         dBuV/m         dBuV/m           0.3596         34.22         21.14         55.36         96.67           0.4786         7.31         20.92         28.23         94.02           1.5935         4.22         21.78         26.00         63.56           2.7502         5.43         22.34         27.77         69.54           7.9353         5.35         23.82         29.17         69.54	Freq.         Level         Factor         ment         Limit         Over           MHz         dBuV         dB         dBuV/m         dBuV/m         dB           0.3596         34.22         21.14         55.36         96.67         -41.31           0.4786         7.31         20.92         28.23         94.02         -65.79           1.5935         4.22         21.78         26.00         63.56         -37.56           2.7502         5.43         22.34         27.77         69.54         -41.77           7.9353         5.35         23.82         29.17         69.54         -40.37


**RESULT: PASS** 





### **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHz-30MHz**

EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Side

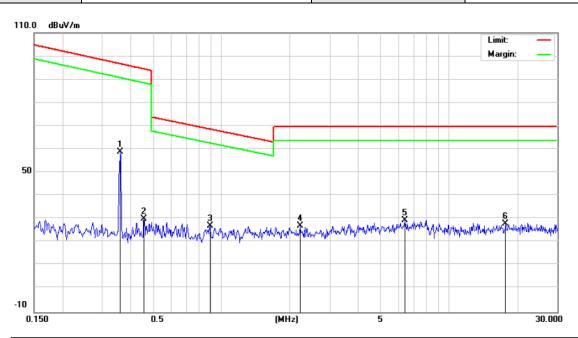

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	0.3596	37.77	21.14	58.91	96.67	-37.76	peak
2		0.4564	9.09	20.96	30.05	94.46	-64.41	peak
3		0.8897	5.87	21.20	27.07	68.62	-41.55	peak
4		2.2132	5.00	22.17	27.17	69.54	-42.37	peak
5		6.3859	6.04	23.40	29.44	69.54	-40.10	peak
6		17.7549	3.07	24.95	28.02	69.54	-41.52	peak

### **RESULT: PASS**


### **NOTES:**

- 1. Quasi-Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.




### **RADIATED EMISSION BELOW 1GHz**

EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00				
Temperature	22° C	Relative Humidity	55%				
Pressure	960hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 1	Antenna	Horizontal				

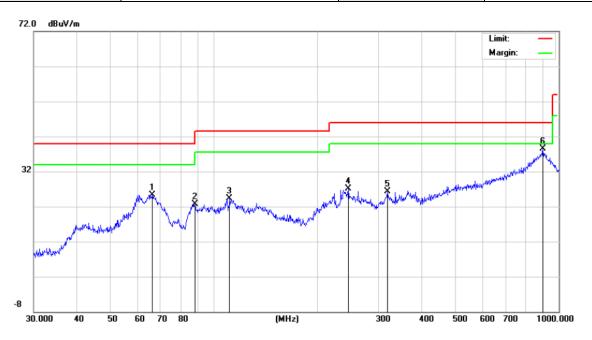

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		66.2662	12.17	13.11	25.28	40.00	-14.72	peak
2		88.0329	11.34	11.38	22.72	43.50	-20.78	peak
3	1	10.9571	9.93	14.47	24.40	43.50	-19.10	peak
4	2	245.0900	8.60	18.57	27.17	46.00	-18.83	peak
5	3	318.8170	8.63	17.67	26.30	46.00	-19.70	peak
6	* 9	00.1474	6.63	31.86	38.49	46.00	-7.51	peak


### **RESULT: PASS**





#### **RADIATED EMISSION BELOW 1GHz**

10.000.100							
EUT	3-in-1 Modular Charging Station	Model Name	ZEAPMO2/00				
Temperature	22° C	Relative Humidity	55%				
Pressure	960hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 1	Antenna	Vertical				

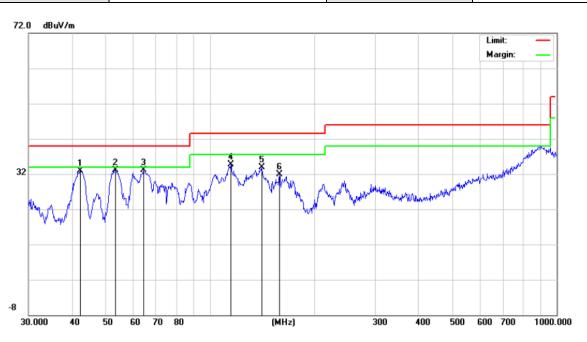

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1		42.3021	17.12	15.69	32.81	40.00	-7.19	peak
2	*	53.3179	17.64	15.53	33.17	40.00	-6.83	peak
3		64.4330	15.09	17.98	33.07	40.00	-6.93	peak
4		114.9168	16.97	17.71	34.68	43.50	-8.82	peak
5		141.3298	16.59	17.23	33.82	43.50	-9.68	peak
6		158.6676	14.70	17.19	31.89	43.50	-11.61	peak

### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



Page 24 of 30

### 7. 20 dB BANDWIDTH

### 7.1 PROVISIONS APPLICABLE


N/A

#### 7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:


- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

### 7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

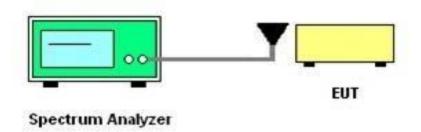

#### 7.4 MEASUREMENT RESULTS


	Test Data of Occupied Bandwidth and -20dB Bandwidth									
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (MHz)	Pass or Fail					
ASK	0.1471	0.808	0.936	N/A	Pass					
ASK	0.3600	0.815	0.919	N/A	Pass					






**Test Graphs of Occupied Bandwidth** 



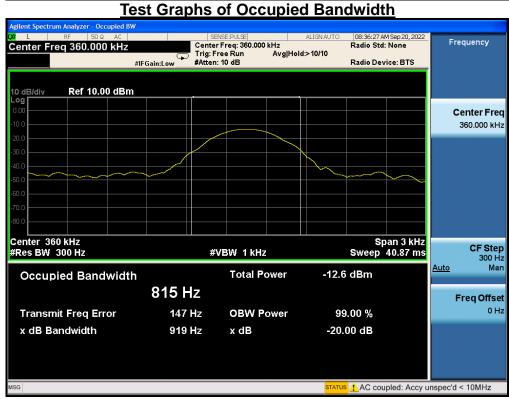

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





### 8. AC POWER LINE CONDUCTED EMISSION TEST


### **8.1 LIMITS OF LINE CONDUCTED EMISSION TEST**

Frequency	Maximum RF	Line Voltage
Frequency	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

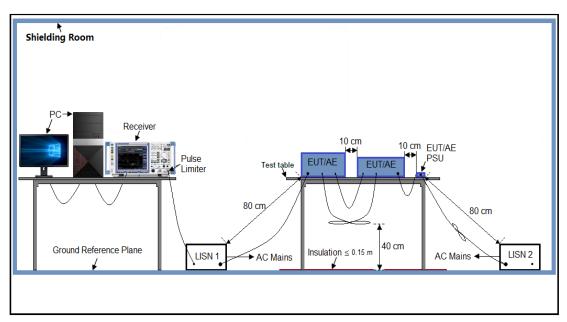



Page 27 of 30

#### 8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 24V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


#### 8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



### **8.5 MEASUREMENT RESULTS**

	AC LINE CONDUCTED E	MISSION TEST	
Test Mode	Mode 1	LISN line	Hot Side

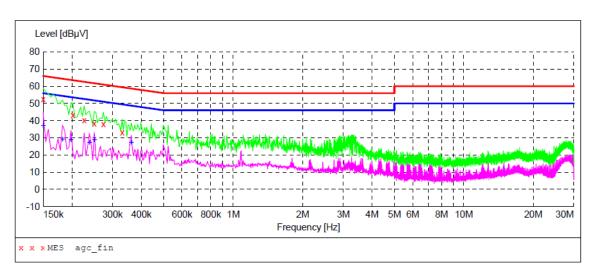

### MEASUREMENT RESULT: "agc fin"

2022/9/20 15:39

2022	/ 5/20 15.	55					
F	requency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
	0.150000	52.50	6.9	66	13.5	QP	L1
	0.202000	43.10	6.5	64	20.4	QP	L1
	0.226000	40.40	6.4	63	22.2	QP	L1
	0.250000	38.50	6.3	62	23.3	QP	L1
	0.274000	37.80	6.1	61	23.2	QP	L1
	0.330000	33.00	5.9	60	26.5	OP	L1

## MEASUREMENT RESULT: "agc fin2"


2022/9/20 15:41


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000 0.182000 0.198000 0.238000 0.250000 0.362000	36.90 29.20 28.50 27.10 28.60 27.30	6.9 6.7 6.6 6.3 6.3	56 54 54 52 52 49	19.1 25.2 25.2 25.1 23.2 21.4		L1 L1 L1 L1 L1 L1

RESULT: PASS

Any report naving not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection to the province of the p Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





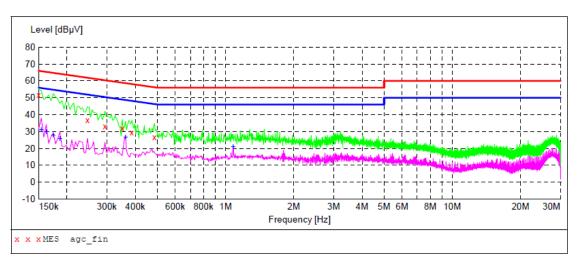

### MEASUREMENT RESULT: "agc fin"

2022/9/20 15:44

2022/3/20 13	/. ==					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	51.90	6.9	66	14.1	QP	N
0.246000	36.80	6.3	62	25.1	QP	N
0.294000	33.10	6.1	60	27.3	QP	N
0.350000	32.00	5.8	59	27.0	QP	N
0.386000	29.60	5.7	58	28.5	QP	N
0.486000	26.80	5.4	56	29.4	OP	N

## MEASUREMENT RESULT: "agc fin2"

2022/9/20 15:44

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.162000 0.174000 0.186000 0.362000 1.082000	31.30 29.80 28.10 25.90 26.60 21.00	6.9 6.8 6.7 6.6 5.8	56 55 55 54 49 46	26.7 28.3 22.1	AV AV	N N N N N

### **RESULT: PASS**



Page 30 of 30

### **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC02129220902AP01

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC02129220902AP02

----END OF REPORT----



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.