

# TEST REPORT

FCC Sub6 n13 Test for TFGMEIBBCD4  
Class II Permissive Change

**APPLICANT**  
LG Electronics Inc.

**REPORT NO.**  
HCT-RF-2409-FC009

**DATE OF ISSUE**  
September 26, 2024

**Tested by**  
Jung Ki Lim



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

**REPORT NO.**

HCT-RF-2409-FC009

**DATE OF ISSUE**

September 26, 2024

**Additional Model**

TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8,  
TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC

**Applicant**

**LG Electronics Inc.**

10, MagokJungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea

**Product Name**

GM Onstar Gen12 ROW

**Model Name**

TFGMEIBBCD4

**Date of Test**

May 07, 2024 ~ June 19, 2024

**Location of Test**

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

**FCC ID**

BEJTFGMEIBBCD4

**FCC Classification**

PCS Licensed Transmitter (PCB)

**Test Standard Used**

FCC Rule Part(s) : § 27

**Test Results**

PASS

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 26, 2024	Initial Release

## Notice

### Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY.....	7
3. DESCRIPTION OF TESTS .....	8
3.1 TEST PROCEDURE .....	8
3.2 CONDUCTED OUTPUT POWER.....	9
3.3 RADIATED TEST .....	10
3.3.1 RADIATED POWER.....	11
3.3.2 RADIATED SPURIOUS EMISSIONS .....	12
3.4 PEAK- TO- AVERAGE RATIO .....	14
3.5 OCCUPIED BANDWIDTH.....	16
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	17
3.7 BAND EDGE.....	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	20
3.9 WORST CASE(RADIATED TEST) .....	21
3.9 WORST CASE(CONDUCTED TEST) .....	22
4. LIST OF TEST EQUIPMENT .....	23
5. MEASUREMENT UNCERTAINTY .....	24
6. SUMMARY OF TEST RESULTS .....	25
7. EMISSION DESIGNATOR.....	26
8. TEST DATA .....	27
8.1 Conducted Output Power.....	27
9. TEST DATA .....	29
9.1 EFFECTIVE RADIATED POWER .....	29
9.1.1 External Antenna.....	29
9.1.2 Internal Antenna .....	30
9.2 RADIATED SPURIOUS EMISSIONS .....	31
9.2.1 External Antenna.....	31
9.2.2 Internal Antenna .....	33
9.3 PEAK-TO-AVERAGE RATIO .....	35
9.4 OCCUPIED BANDWIDTH .....	36
9.5 CONDUCTED SPURIOUS EMISSIONS.....	37
9.6 BAND EDGE.....	37
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	38
10. TEST PLOTS .....	40
11. ANNEX A_ TEST SETUP PHOTO.....	77

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	LG Electronics Inc..
<b>Address:</b>	10, Magok Jungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea
<b>FCC ID:</b>	BEJTFGMEIBBCD4
<b>Application Type:</b>	Class II Permissive Change
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	GM Onstar Gen12 ROW
<b>Model(s):</b>	TFGMEIBBCD4
<b>Additional Model(s)</b>	TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8, TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC
<b>SCS(kHz):</b>	15
<b>Bandwidth(MHz):</b>	5, 10, 15
<b>Waveform:</b>	CP-OFDM, DFT-S-OFDM
<b>Modulation:</b>	DFT-S-OFDM: PI/2 BPSK, QPSK, 16 QAM, 64 QAM, 256 QAM CP-OFDM: QPSK, 16 QAM, 64 QAM, 256 QAM
<b>Tx Frequency:</b>	779.5 MHz – 784.5 MHz (Sub6 n13 (5 MHz)) 782 MHz (Sub6 n13 (10 MHz))
<b>Date(s) of Tests:</b>	May 07, 2024 ~ June 19, 2024
<b>Serial number:</b>	Radiated : EBR36018942K_#30 Conducted : EBR36018942K_#30
<b>External Antenna Information</b>	ANT5 : 86531607 ANT4 : 86575530 DUT4 : 85608774

### 1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP External Antenna		ERP Internal Antenna	
				Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
Sub6 n13 (5)	779.5 –784.5	4M51G7D	PI/2 BPSK	0.269	24.29	0.358	25.54
		4M51G7D	QPSK	0.267	24.27	0.332	25.21
		4M50W7D	16QAM	0.206	23.14	0.263	24.20
		4M50W7D	64QAM	0.146	21.65	0.186	22.69
		4M50G7D	256QAM	0.093	19.68	0.119	20.77
Sub6 n13 (10)	782.0	8M96G7D	PI/2 BPSK	0.261	24.16	0.365	25.62
		8M96G7D	QPSK	0.258	24.11	0.338	25.29
		8M96W7D	16QAM	0.205	23.11	0.270	24.31
		8M95W7D	64QAM	0.143	21.56	0.204	23.09
		8M97G7D	256QAM	0.089	19.51	0.126	21.00

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a GM Onstar Gen12 ROW with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 CONDUCTED OUTPUT POWER

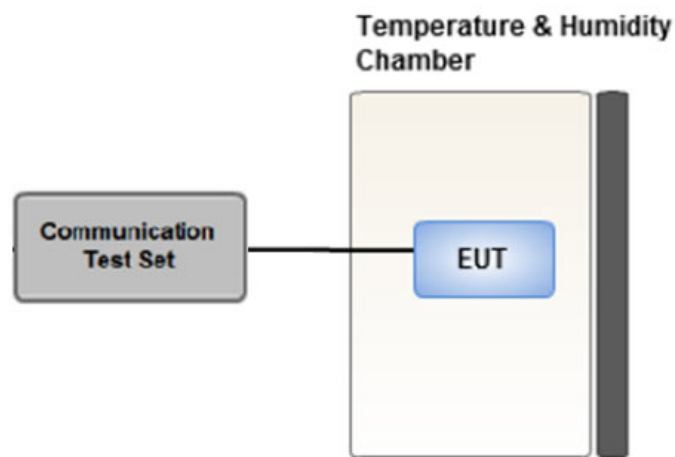

Test setup

#### Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.


## 3.3 RADIATED TEST

### Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

### Test Configuration


Below 30 MHz

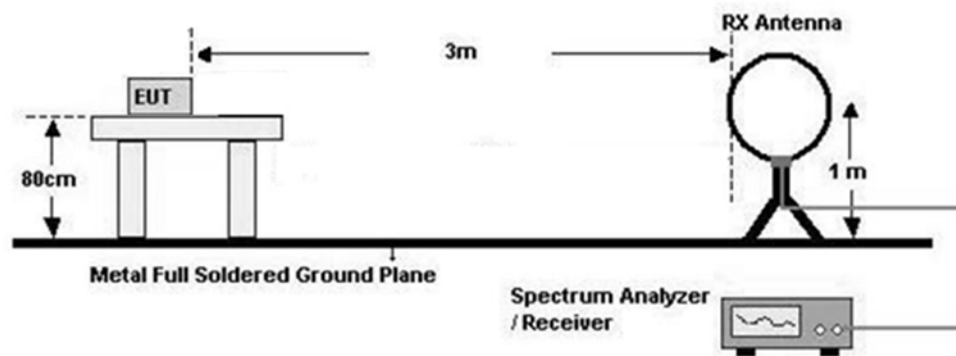

30 MHz - 1 GHz

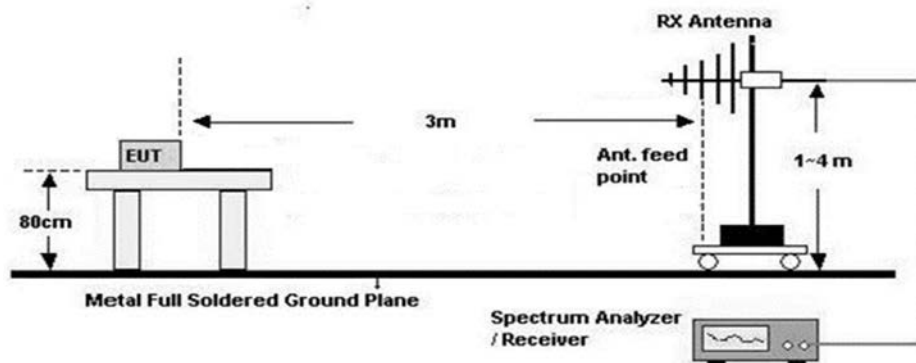

Above 1 GHz

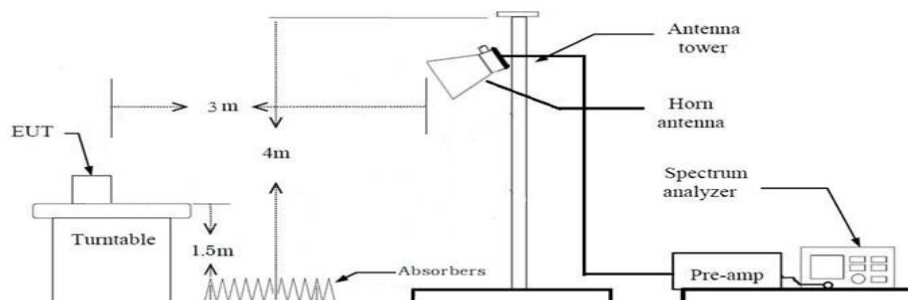

### 3.3.1 RADIATED POWER

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7.  $\text{Total(dB}\mu\text{V/m)} = \text{Measured Value(dB}\mu\text{V)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB/m)} + \text{Distance Factor(D.F)}$
8.  $\text{EIRP (dBm)}$   
 $= \text{Total (dB}\mu\text{V/m)} + 20 \log D - 104.8$  (where D is the measurement distance in meters. D=3)  
 $= \text{Total (dB}\mu\text{V/m)} - 95.2(\text{dB})$
9.  $\text{ERP(dBm)} = \text{EIRP(dBm)} - 2.15(\text{dB})$

### 3.3.2 RADIATED SPURIOUS EMISSIONS

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
2. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

#### Below 30 MHz

1. The loop antenna was placed at a location 3 m from the EUT
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$   
Measurement Distance : 3 m
6. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$   
Measurement Distance : 3 m
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. EIRP (dBm)  
= Total (dB $\mu$ V/m) +  $20 \log D - 104.8$  (where D is the measurement distance in meters. D=3)  
= Total (dB $\mu$ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


**Below 1 GHz**

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)  
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)  
= Total (dBμV/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

**Above 1 GHz**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)  
+ H.P.F(dB) - Amp Gain(dB)
8. EIRP (dBm)  
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)  
= Total (dBμV/m) - 95.2(dB)

## 3.4 PEAK- TO- AVERAGE RATIO

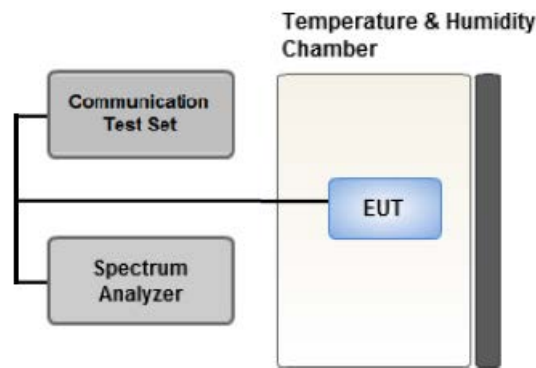

Test setup

### ① CCDF Procedure for PAPR

#### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

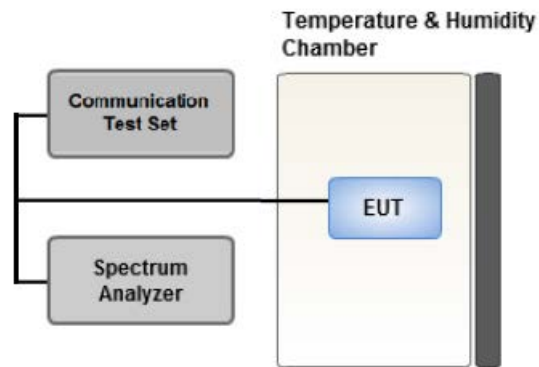

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

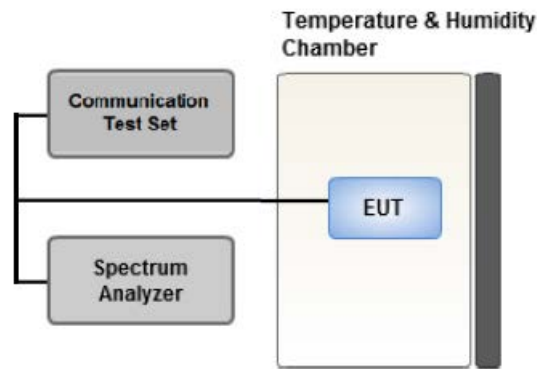

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

### 3.7 BAND EDGE

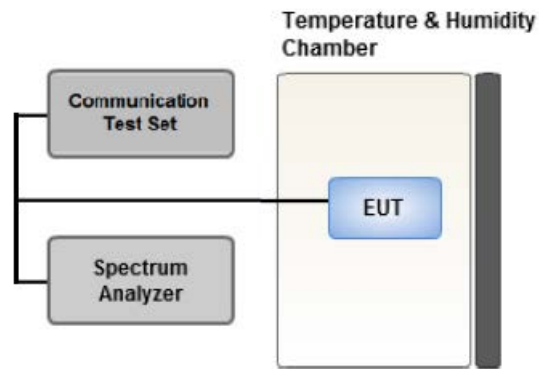

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

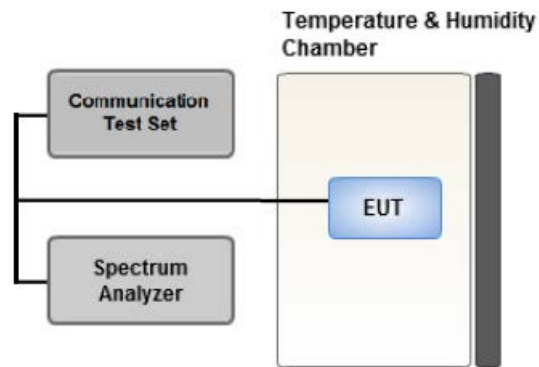

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode : SA, NSA  
Worst case : SA  
Mode : Internal Antenna, External Antenna (ANT 5, ANT 4, DUT 4)  
Worst case : Internal Antenna, External Antenna (ANT 5)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.  
(External Antenna Worst case : 5 MHz)  
(Internal Antenna Worst case : 10 MHz)
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.  
(Worst case : TFGMEIBBCD4)

[ External Antenna Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK QPSK, 16QAM, 64QAM 256QAM	See Section 9.1.1		Only X
Radiated Spurious and Harmonic Emissions	BPSK	See Section 9.2.1		Only X

[ Internal Antenna Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK QPSK, 16QAM, 64QAM 256QAM	See Section 9.1.2		Z
Radiated Spurious and Harmonic Emissions	BPSK	See Section 9.2.2		Y

### 3.9 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.  
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode: NSA, SA  
Worst case: SA
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.  
Please refer to the table below.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.  
(Worst case : TFGMEIBBCD4)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	PI/2 BPSK QPSK, 16QAM, 64QAM 256QAM	5, 10	Mid	Full RB	0
Band Edge	BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		5, 10	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	BPSK	5, 10	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1542/ 57580623/G	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090001	N/A	N/A
RF Switch System	TMX0132C	TNM System	TM21100002	N/A	N/A
RF Switch System	FBSR-04C HPF1	TNM System	S5L1	03/12/2025	Annual
RF Switch System	FBSR-04C LNA1	TNM System	S5L4	03/12/2025	Annual
RF Switch System	FBSR-04C HPF2	TNM System	S5L5	03/12/2025	Annual
HIGHPASS FILTER	WHKX10-900-1000- 15000-40SS	WAINWRIGHT INSTRUMENTS	16	07/24/2025	Annual
HIGHPASS FILTER	WHNX6.0/26.5G-6SS	WAINWRIGHT INSTRUMENTS	1	12/11/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Loop Antenna (9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Horn Antenna(1 ~ 18 GHz)	HF907	ROHDE & SCHWARZ	103224	05/07/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	1135	08/19/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/19/2025	Annual
DC Power Supply	E3632A	Hewlett Packard	KR01009150	04/18/2025	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/10/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101510	03/28/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/16/2025	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/14/2025	Annual
Signal Analyzer (10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
Signal Analyzer (5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(c)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
On all frequencies between 763-775 MHz and 793-805 MHz.	§ 27.53(c)(4)	< 65 + 10log10 (P[Watts])	PASS (See Note1)
Conducted Output Power	§ 2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

#### Note:

1. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance.

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(b)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(c)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Undesirable Emissions in the 1559 – 1610 MHz band	§ 2.1053, 27.53(f)	< -70dBW/MHz EIRP (wideband) < -80dBW EIRP (narrowband)	PASS

## 7. EMISSION DESIGNATOR

### GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

### EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

### WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

### QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

### QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 Conducted Output Power

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
						140300	141500	142700
						701.5 MHz	707.5 MHz	713.5 MHz
5 MHz	15	DFT-s	pi/2 BPSK	1	1	23.47	23.46	23.50
				1	13	23.45	23.58	23.44
				1	23	23.46	23.50	23.44
				12	0	23.07	23.03	23.08
				12	7	23.48	23.57	23.45
				12	13	23.00	23.07	22.99
				25	0	22.99	22.22	22.99
			QPSK	1	1	23.43	23.43	23.52
				1	13	23.48	23.55	23.45
				1	23	23.41	23.47	23.34
				12	0	22.59	22.55	22.55
				12	7	23.52	23.58	23.49
				12	13	22.52	22.59	22.47
				25	0	22.53	22.51	22.54
			16QAM	1	1	22.42	22.51	22.45
			64QAM	1	1	20.91	21.03	21.03
			256QAM	1	1	19.08	19.06	19.19
		CP	QPSK	1	1	21.98	21.96	22.03

Bandwidth	SCS(kHz)	OFDM	Modulation	RB Size	RB Offset	Max.Average Power (dBm)
						156400
						782.0 MHz
10 MHz	15	DFT-s	pi/2 BPSK	1	1	23.51
				1	26	23.53
				1	50	23.45
				25	0	23.18
				25	14	23.52
				25	27	23.04
				50	0	23.00
			QPSK	1	1	23.45
				1	26	23.49
				1	50	23.42
				25	0	22.56
				25	14	23.52
				25	27	22.54
				50	0	22.52
			16QAM	1	1	22.43
			64QAM	1	1	20.98
			256QAM	1	1	19.04
		CP	QPSK	1	1	22.03

## 9. TEST DATA

### 9.1 EFFECTIVE RADIATED POWER

#### 9.1.1 External Antenna

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	ERP		RB	
							W	W	dBm	Size	Offset
779.5	Sub6 n13 (5 MHz)	PI/2 BPSK	91.53	30.11	121.64	V	< 3.00	0.269	24.29	1	12
		QPSK	91.51	30.11	121.62	V		0.267	24.27		
		16-QAM	90.38	30.11	120.49	V		0.206	23.14		
		64-QAM	88.89	30.11	119.00	V		0.146	21.65		
		256-QAM	86.92	30.11	117.03	V		0.093	19.68		
782.0		PI/2 BPSK	91.15	30.11	121.26	V		0.246	23.91	1	23
		QPSK	91.14	30.11	121.25	V		0.245	23.90		
		16-QAM	89.75	30.11	119.86	V		0.178	22.51		
		64-QAM	88.31	30.11	118.42	V		0.128	21.07		
		256-QAM	86.39	30.11	116.50	V		0.082	19.15		
784.5	PI/2 BPSK	91.13	30.11	121.24	V	0.245	23.89	1	1		
	QPSK	91.10	30.11	121.21	V	0.243	23.86				
	16-QAM	90.02	30.11	120.13	V	0.190	22.78				
	64-QAM	88.55	30.11	118.66	V	0.135	21.31				
	256-QAM	86.65	30.11	116.76	V	0.087	19.41				

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	ERP		RB	
							W	W	dBm	Size	Offset
782.0	Sub6 n13 (10 MHz)	PI/2 BPSK	91.40	30.11	121.51	V	< 3.00	0.261	24.16	1	1
		QPSK	91.35	30.11	121.46	V		0.258	24.11		
		16-QAM	90.35	30.11	120.46	V		0.205	23.11		
		64-QAM	88.80	30.11	118.91	V		0.143	21.56		
		256-QAM	86.75	30.11	116.86	V		0.089	19.51		

### 9.1.2 Internal Antenna

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	ERP		RB	
							W	W	dBm	Size	Offset
779.5	Sub6 n13 (5 MHz)	PI/2 BPSK	92.78	30.11	122.89	H	< 3.00	0.358	25.54	1	1
		QPSK	92.45	30.11	122.56	H		0.332	25.21		
		16-QAM	91.44	30.11	121.55	H		0.263	24.20		
		64-QAM	89.93	30.11	120.04	H		0.186	22.69		
		256-QAM	88.01	30.11	118.12	H		0.119	20.77		
782.0		PI/2 BPSK	92.29	30.11	122.40	H		0.320	25.05	1	1
		QPSK	92.25	30.11	122.36	H		0.317	25.01		
		16-QAM	91.25	30.11	121.36	H		0.025	24.01		
		64-QAM	89.66	30.11	119.77	H		0.174	22.42		
		256-QAM	87.80	30.11	117.91	H		0.114	20.56		
784.5		PI/2 BPSK	91.95	30.11	122.06	H		0.296	24.71	1	1
		QPSK	91.60	30.11	121.71	H		0.273	24.36		
		16-QAM	90.82	30.11	120.93	H		0.228	23.58		
		64-QAM	89.35	30.11	119.46	H		0.162	22.11		
		256-QAM	87.40	30.11	117.51	H		0.104	20.16		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	ERP		RB	
							W	W	dBm	Size	Offset
782.0	Sub6 n13 (10 MHz)	PI/2 BPSK	92.86	30.11	122.97	H	< 3.00	0.365	25.62	1	1
		QPSK	92.53	30.11	122.64	H		0.338	25.29		
		16-QAM	91.55	30.11	121.66	H		0.270	24.31		
		64-QAM	90.33	30.11	120.44	H		0.204	23.09		
		256-QAM	88.24	30.11	118.35	H		0.126	21.00		

## 9.2 RADIATED SPURIOUS EMISSIONS

### 9.2.1 External Antenna

■ MODE: Sub6 n13  
 ■ MODULATION SIGNAL: 5 MHz QPSK  
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
155900 (779.5)	1 559 ~ 1610	54.95	-16.01	38.94	V	-56.26	-40.00	1	12
	1 559.00	55.31	-16.52	38.79	V	-56.41	-40.00		
	2 338.50	66.63	-12.81	53.82	V	-41.38	-13.00		
	3 118.00	52.60	-9.22	43.38	V	-51.82	-13.00		
	3 897.50	67.50	-6.80	60.70	V	-34.50	-13.00		
	4 677.00	50.51	-4.94	45.57	V	-49.63	-13.00		
	5 456.50	49.16	-2.65	46.51	V	-48.69	-13.00		
156400 (782.0)	1 559 ~ 1610	55.28	-16.52	38.76	V	-56.44	-40.00	1	23
	1564.00	54.34	-16.45	37.89	V	-57.31	-40.00		
	2 346.00	68.04	-12.90	55.14	V	-40.06	-13.00		
	3 128.00	52.91	-9.07	43.84	V	-51.36	-13.00		
	3 910.00	62.75	-6.80	55.95	V	-39.25	-13.00		
	4 692.00	48.88	-4.87	44.01	V	-51.19	-13.00		
	5 474.00	47.82	-2.68	45.14	V	-50.06	-13.00		
156900 (784.5)	1 559 ~ 1610	54.99	-16.52	38.47	V	-56.73	-40.00	1	1
	1569.00	54.08	-16.38	37.70	V	-57.50	-40.00		
	2 353.50	65.46	-12.99	52.48	V	-42.73	-13.00		
	3 138.00	53.26	-8.94	44.32	V	-50.88	-13.00		
	3 922.50	58.39	-6.80	51.59	V	-43.61	-13.00		

	4 707.00	49.27	-4.84	44.43	V	-50.77	-13.00		
	5 491.50	48.00	-2.66	45.34	V	-49.86	-13.00		

■ MODE: Sub6 n13  
 ■ MODULATION SIGNAL: 10 MHz QPSK  
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
156400 (782.0)	1 559 ~ 1610	55.01	-16.52	38.49	V	-56.71	-40.00	1	1
	1564.00	54.89	-16.45	38.44	V	-56.76	-40.00		
	2 346.00	61.70	-12.90	48.80	V	-46.40	-13.00		
	3 128.00	52.92	-9.07	43.85	V	-51.35	-13.00		
	3 910.00	60.21	-6.80	53.41	V	-41.79	-13.00		
	4 692.00	49.58	-4.87	44.71	V	-50.49	-13.00		
	5 474.00	49.16	-2.68	46.48	V	-48.72	-13.00		

### 9.2.2 Internal Antenna

■ MODE: Sub6 n13  
 ■ MODULATION SIGNAL: 5 MHz QPSK  
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
155900 (779.5)	1 559 ~ 1610	54.96	-16.52	38.44	H	-56.76	-40.00	1	1
	1 559.00	65.54	-16.52	49.02	H	-46.18	-40.00		
	2 338.50	56.25	-12.81	43.44	H	-51.76	-13.00		
	3 118.00	53.28	-9.22	44.06	H	-51.14	-13.00		
	3 897.50	63.66	-6.80	56.86	H	-38.34	-13.00		
	4 677.00	50.26	-4.94	45.32	H	-49.88	-13.00		
	5 456.50	49.26	-2.65	46.61	H	-48.59	-13.00		
156400 (782.0)	1 559 ~ 1610	65.73	-16.45	49.28	H	-45.92	-40.00	1	1
	1 564.00	65.82	-16.45	49.37	H	-45.83	-40.00		
	2 346.00	57.02	-12.90	44.12	H	-51.08	-13.00		
	3 128.00	53.89	-9.07	44.82	H	-50.38	-13.00		
	3 910.00	61.46	-6.80	54.66	H	-40.54	-13.00		
	4 692.00	49.94	-4.87	45.07	H	-50.13	-13.00		
	5 474.00	49.03	-2.68	46.35	H	-48.85	-13.00		
156900 (784.5)	1 559 ~ 1610	64.47	-16.45	48.09	H	-47.11	-40.00	1	1
	1 569.00	64.51	-16.45	48.13	H	-47.07	-40.00		
	2 353.50	56.81	-12.90	43.83	H	-51.38	-13.00		
	3 138.00	52.67	-9.07	43.73	H	-51.47	-13.00		
	3 922.50	65.35	-6.80	58.55	H	-36.65	-13.00		
	4 707.00	50.74	-4.87	45.90	H	-49.30	-13.00		

	5 491.50	48.82	-2.68	46.16	H	-49.04	-13.00		
--	----------	-------	-------	-------	---	--------	--------	--	--

☐ MODE: Sub6 n13  
☐ MODULATION SIGNAL: 10 MHz QPSK  
☐ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/ m)	Pol.	Result (dBm)	Limit (dBm)	RB	
								Size	Offset
156400 (782.0)	1 559 ~ 1610	54.18	-16.52	37.66	H	-57.54	-40.00	1	1
	1 564.00	65.42	-16.45	48.97	H	-46.23	-40.00		
	2 346.00	56.61	-12.90	43.71	H	-51.49	-13.00		
	3 128.00	53.35	-9.07	44.28	H	-50.92	-13.00		
	3 910.00	62.56	-6.80	55.76	H	-39.44	-13.00		
	4 692.00	49.38	-4.87	44.51	H	-50.69	-13.00		
	5 474.00	49.65	-2.68	46.97	H	-48.23	-13.00		

### 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n13	5 MHz	782.0	BPSK	25	0	4.03
			QPSK			4.56
			16-QAM			5.83
			64-QAM			6.16
			256-QAM			6.69
	10 MHz		BPSK	50		4.26
			QPSK			4.84
			16-QAM			5.70
			64-QAM			6.06
			256-QAM			6.47

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 52 ~ 61.

#### 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Sub6 n13	5 MHz	782.0	BPSK	25	0	4.5079
			QPSK			4.5049
			16-QAM			4.5034
			64-QAM			4.4994
			256-QAM			4.4996
	10 MHz		BPSK	50		8.9630
			QPSK			8.9610
			16-QAM			8.9548
			64-QAM			8.9461
			256-QAM			8.9707

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 42 ~ 51.

## 9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n13	5	779.5	4.9577	30.200	-69.826	-39.626	-13.00
		782.0	9.6520	30.815	-70.324	-39.509	
		784.5	8.0025	30.815	-70.127	-39.312	
	10	782.0	9.7164	30.815	-70.260	-39.445	

### Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 62 ~ 65.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

## 9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 66 ~ 77.

## 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ☐ BandWidth: 5 MHz  
☐ Voltage(100 %): 13.500 VDC  
☐ LIMIT: Emission must remain in band


Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
779.5	100%	+20(Ref)	779 499 998	0.0	0.000 000	0.000
	100%	-30	779 499 995	-2.8	0.000 000	-0.004
	100%	-20	779 499 995	-3.2	0.000 000	-0.004
	100%	-10	779 499 995	-3.6	0.000 000	-0.005
	100%	0	779 500 003	5.0	0.000 001	0.006
	100%	+10	779 500 002	4.2	0.000 001	0.005
	100%	+30	779 499 993	-5.5	-0.000 001	-0.007
	100%	+40	779 500 001	3.0	0.000 000	0.004
	100%	+50	779 499 991	-6.7	-0.000 001	-0.009
	85%	+20	779 499 996	-2.1	0.000 000	-0.003
	115%	+20	779 500 002	4.0	0.000 001	0.005
784.5	100%	+20(Ref)	784 500 006	0.0	0.000 000	0.000
	100%	-30	784 500 011	5.3	0.000 001	0.007
	100%	-20	784 500 011	5.0	0.000 001	0.006
	100%	-10	784 500 011	4.9	0.000 001	0.006
	100%	0	784 500 010	4.6	0.000 001	0.006
	100%	+10	784 500 010	4.3	0.000 001	0.006
	100%	+30	784 500 010	4.3	0.000 001	0.005
	100%	+40	784 500 010	3.9	0.000 000	0.005
	100%	+50	784 500 010	3.7	0.000 000	0.005
	85%	+20	784 500 004	-1.4	0.000 000	-0.002
	115%	+20	784 500 010	3.8	0.000 000	0.005

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 13.500 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
782.0	100%	+20(Ref)	782 000 004	0.0	0.000 000	0.000
	100%	-30	782 000 007	2.9	0.000 000	0.004
	100%	-20	782 000 006	2.2	0.000 000	0.003
	100%	-10	782 000 005	1.2	0.000 000	0.002
	100%	0	782 000 004	0.4	0.000 000	0.001
	100%	+10	782 000 003	-0.6	0.000 000	-0.001
	100%	+30	782 000 002	-1.4	0.000 000	-0.002
	100%	+40	782 000 011	6.8	0.000 001	0.009
	100%	+50	782 000 010	6.5	0.000 001	0.008
	85%	+20	782 000 001	-2.8	0.000 000	-0.004
	115%	+20	782 000 005	1.2	0.000 000	0.002

## 10. TEST PLOTS


Sub6 n13\_5 M\_OBW\_Mid\_ BPSK\_FullRB

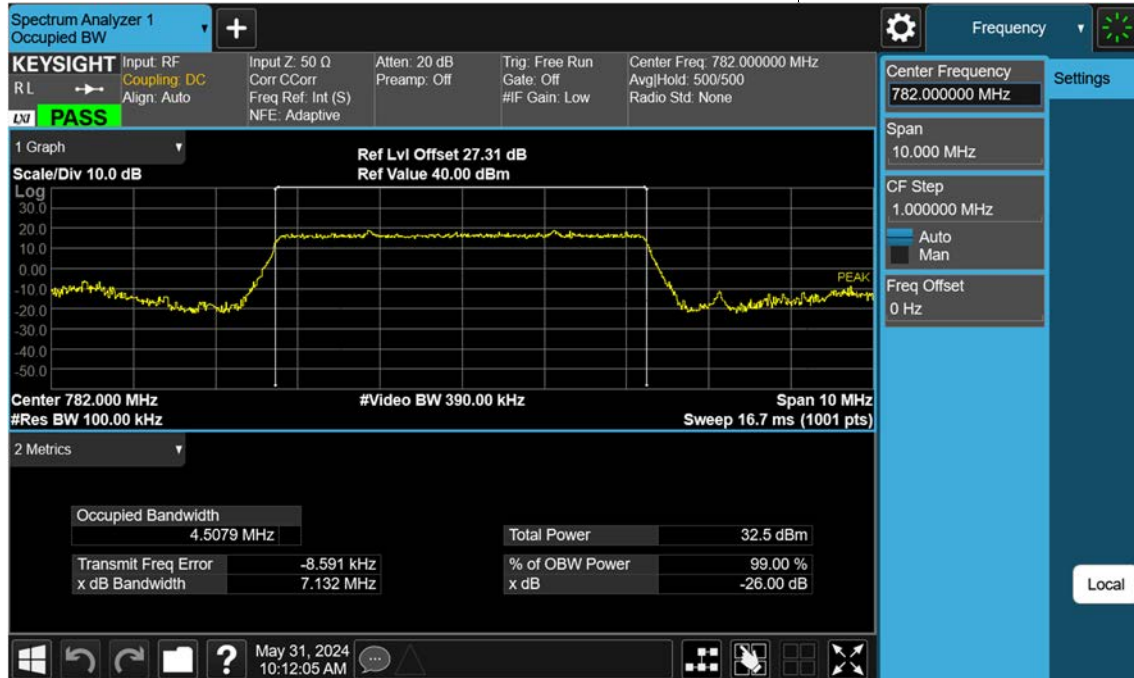


Sub6 n13\_5 M\_OBW\_Mid\_QPSK\_FullRB

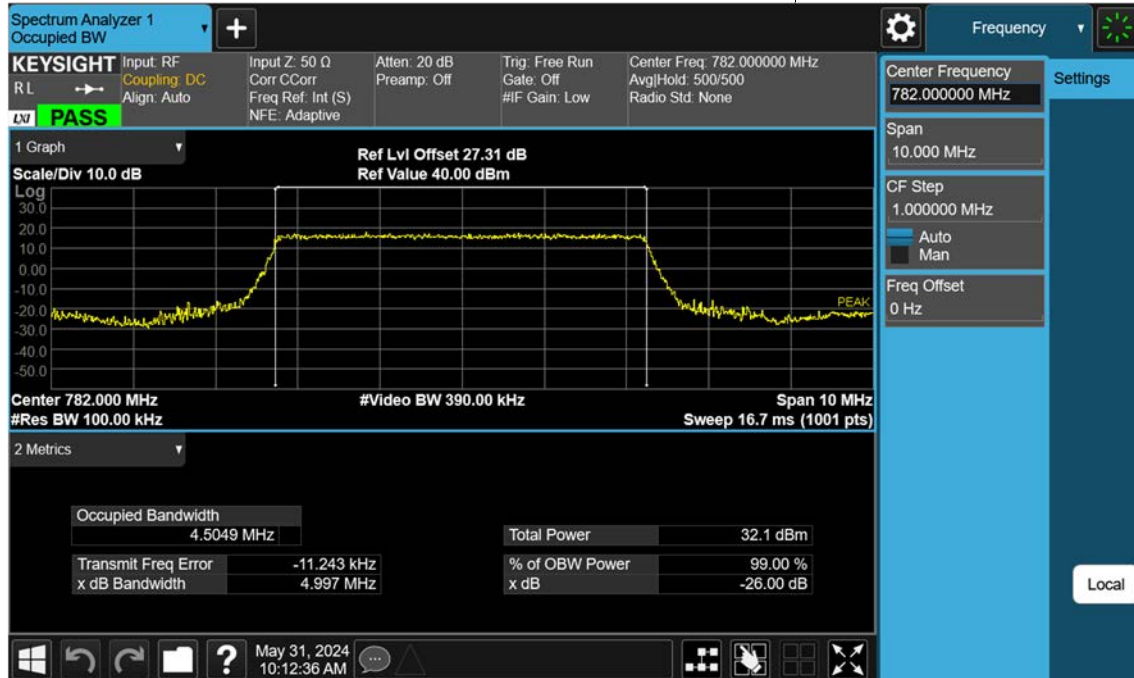


Sub6 n13\_5 M\_OBW\_Mid\_16QAM\_FullIRB

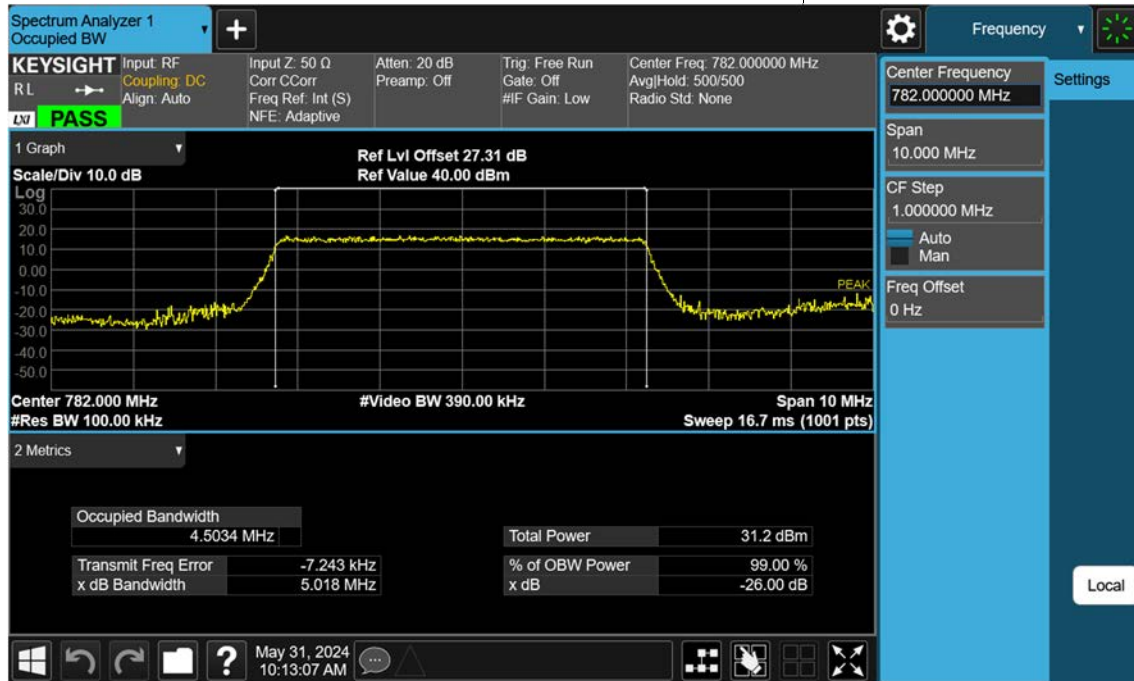


Sub6 n13\_5 M\_OBW\_Mid\_64QAM\_FullIRB

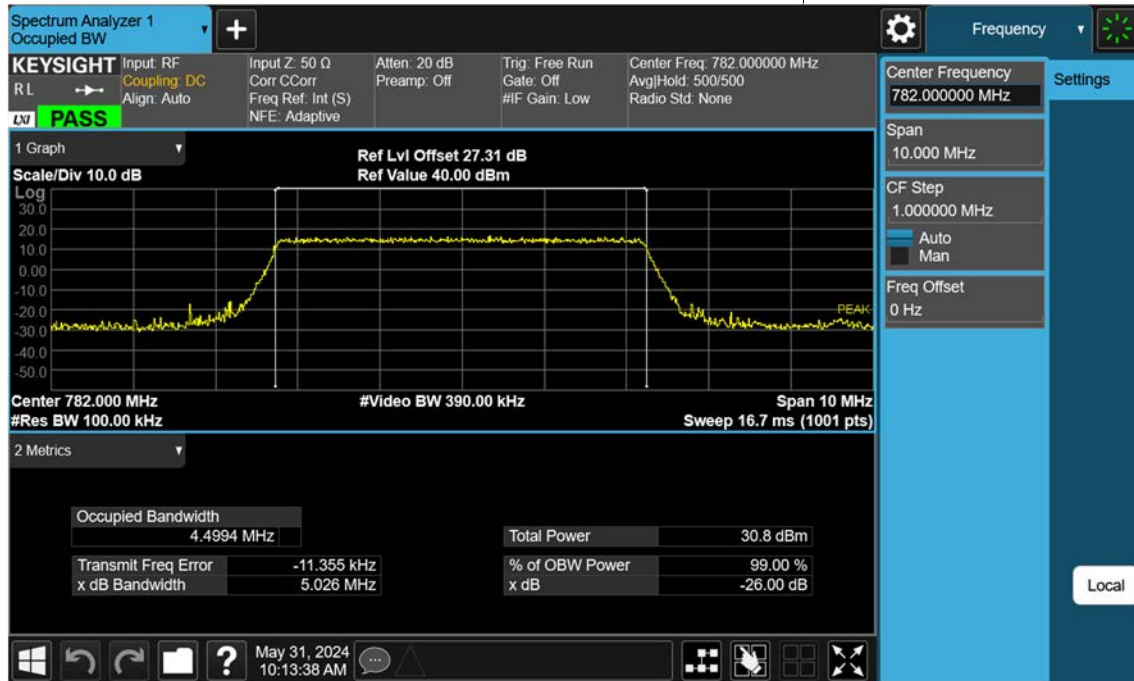


Sub6 n13\_5 M\_OBW\_Mid\_256QAM\_FullRB

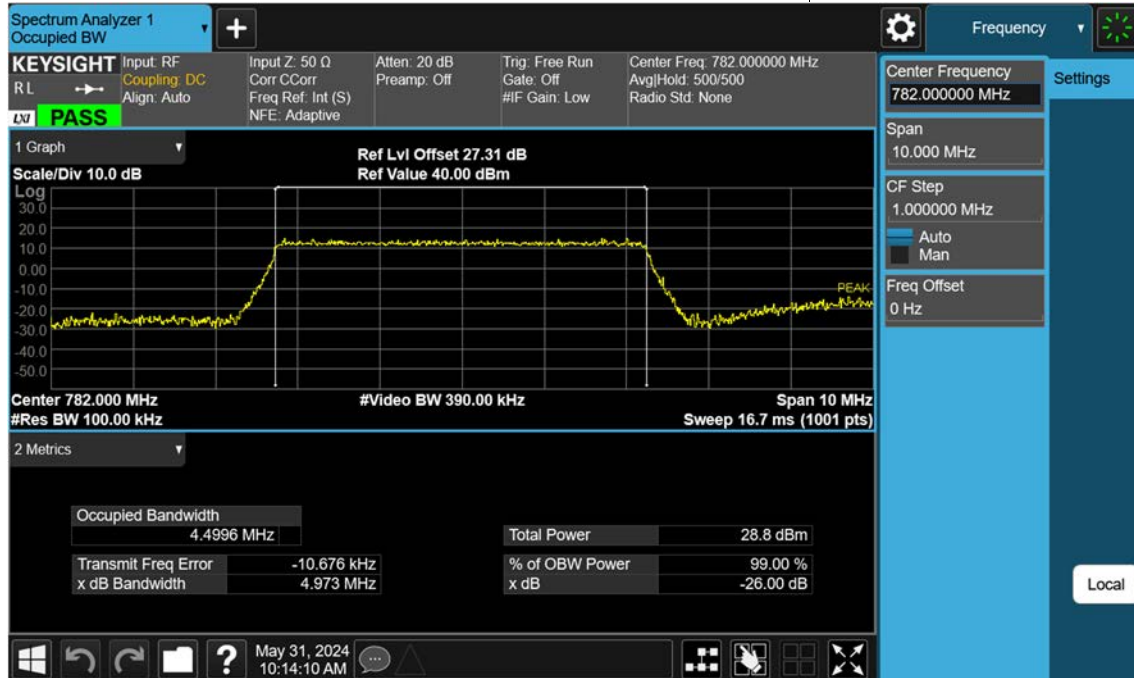


Sub6 n13\_10 M\_OBW\_Mid \_BPSK\_FullRB

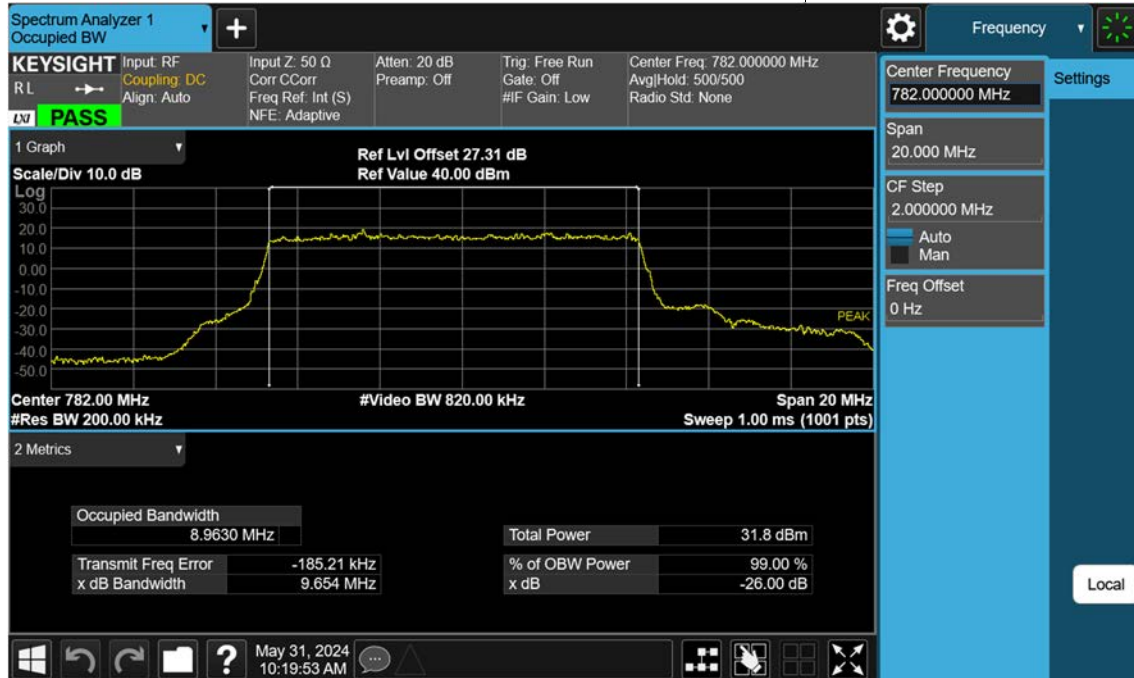


Sub6 n13\_10 M\_OBW\_Mid\_QPSK\_FullRB

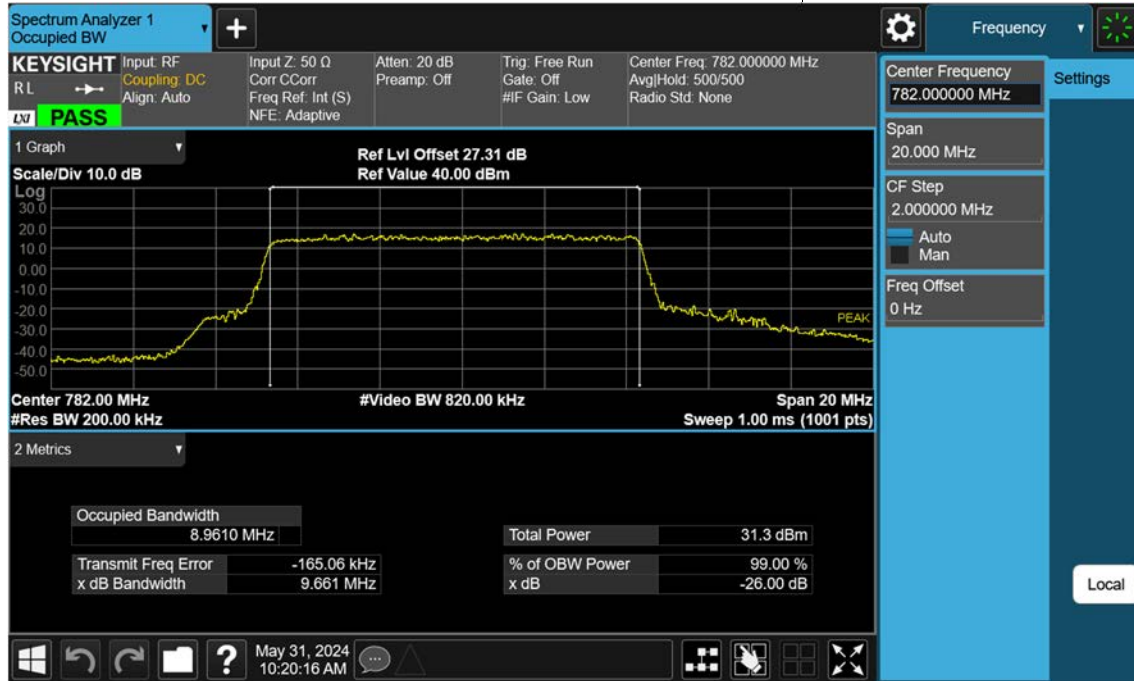


Sub6 n13\_10 M\_OBW\_Mid\_16QAM\_FullRB

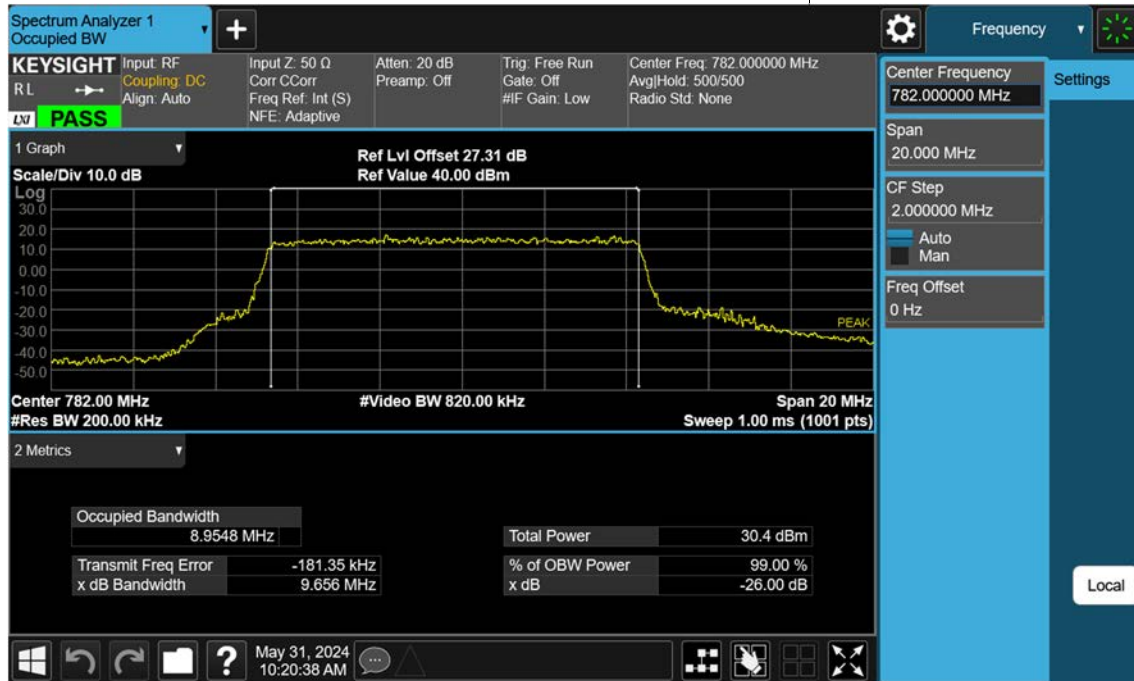


Sub6 n13\_10 M\_OBW\_Mid\_64QAM\_FullRB

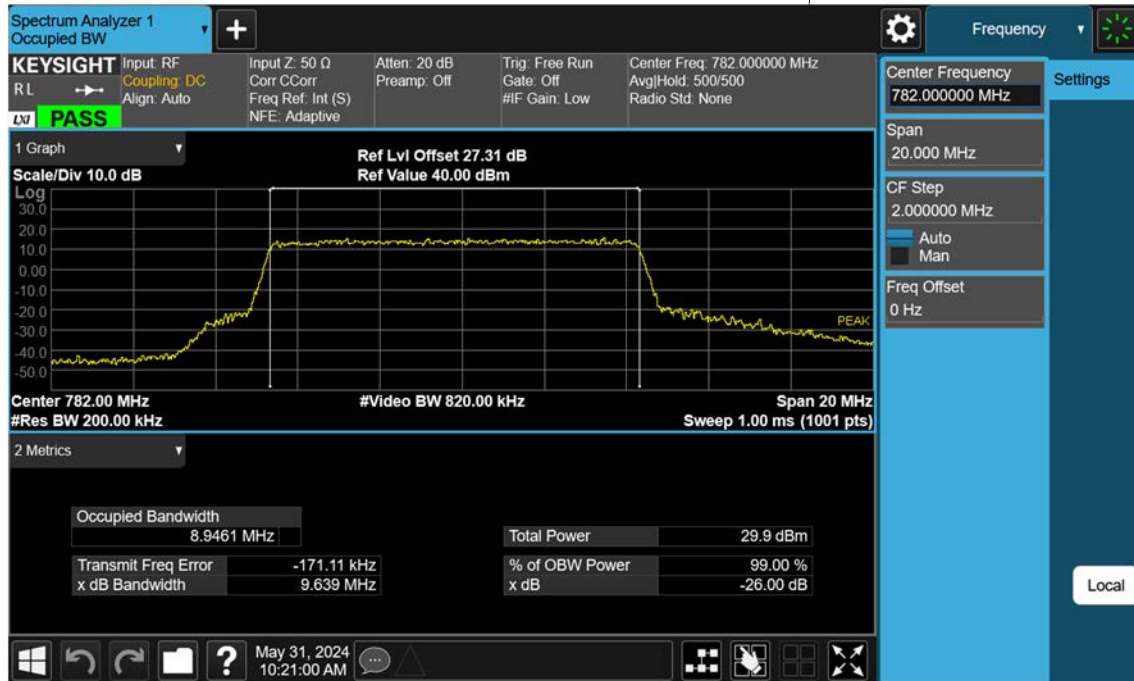


Sub6 n13\_10 M\_OBW\_Mid\_256QAM\_FullRB

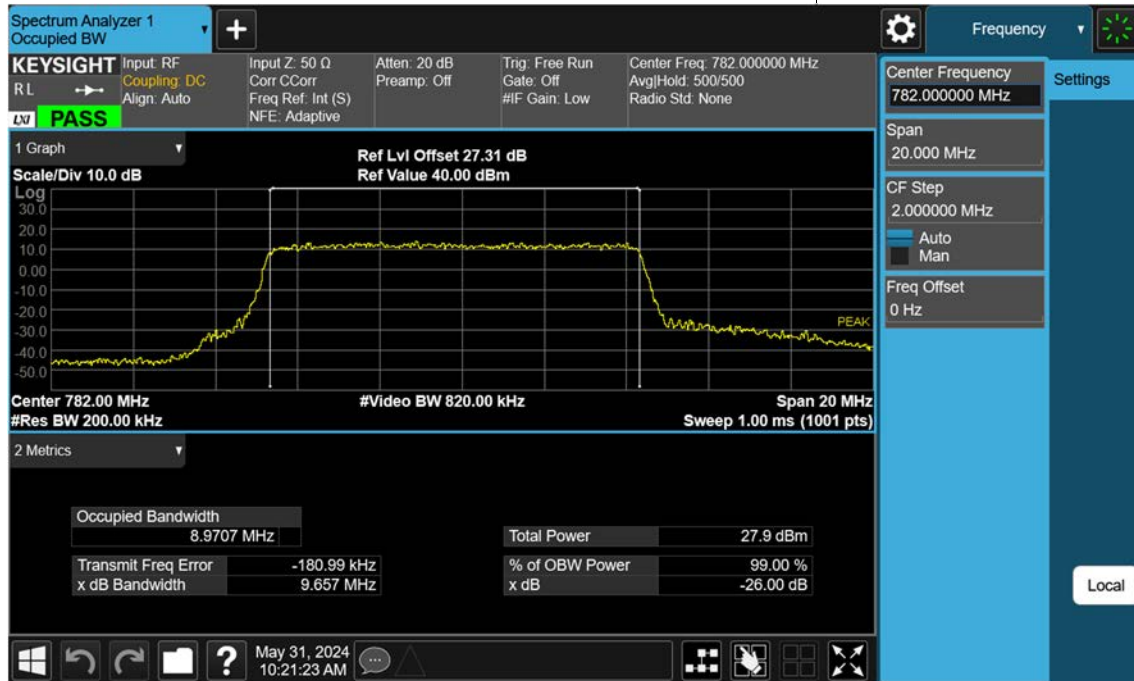

## 5 M\_PAR\_Mid Channel\_ BPSK \_FullRB

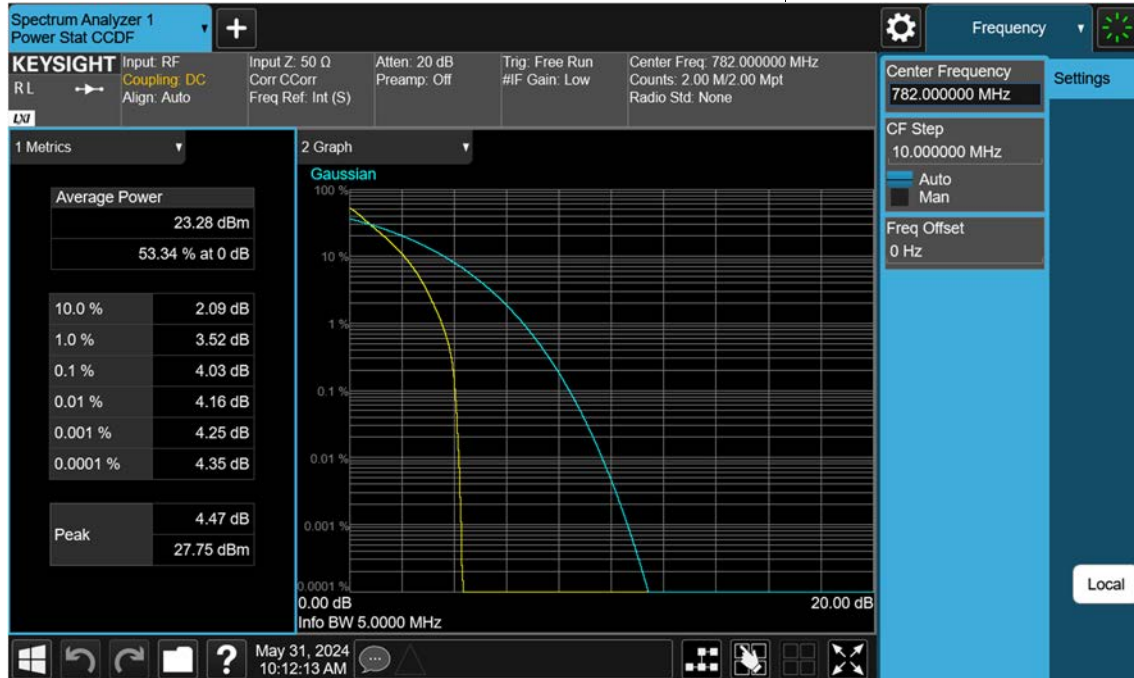

## 5 M\_PAR\_Mid Channel\_QPSK\_FullRB

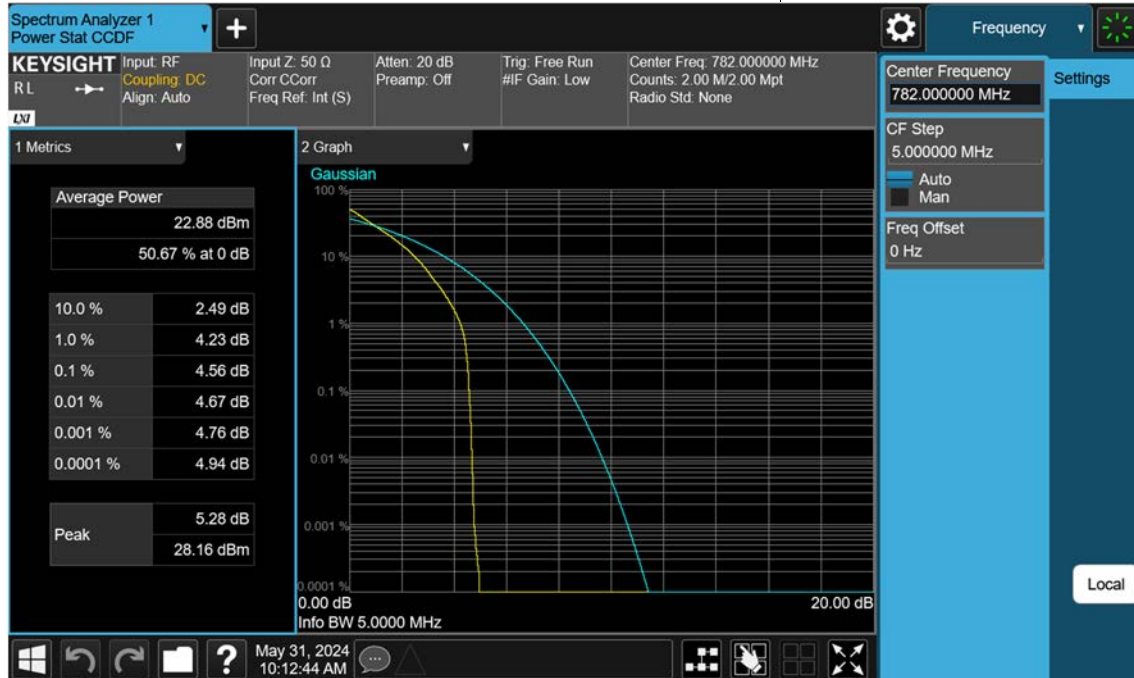


## 5 M\_PAR\_Mid Channel\_16QAM\_FullRB




## 5 M\_PAR\_Mid Channel\_64QAM\_FullRB




## 5 M\_PAR\_Mid Channel\_256QAM\_FullRB

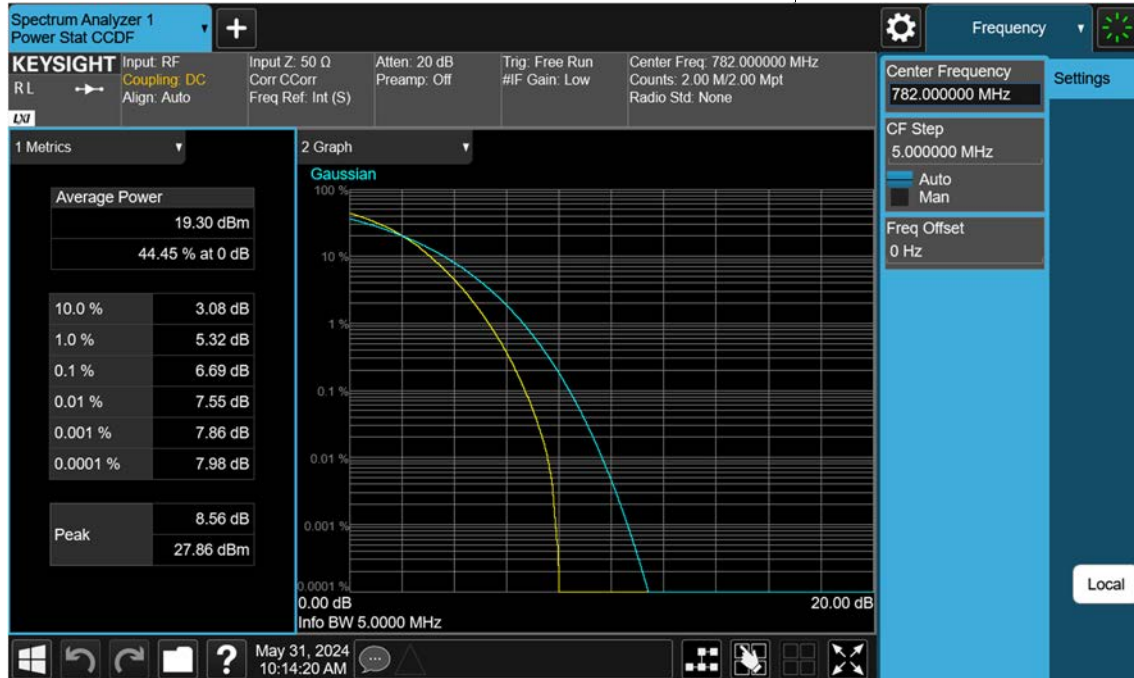

10 M\_PAR\_Mid Channel\_ BPSK\_FullRB

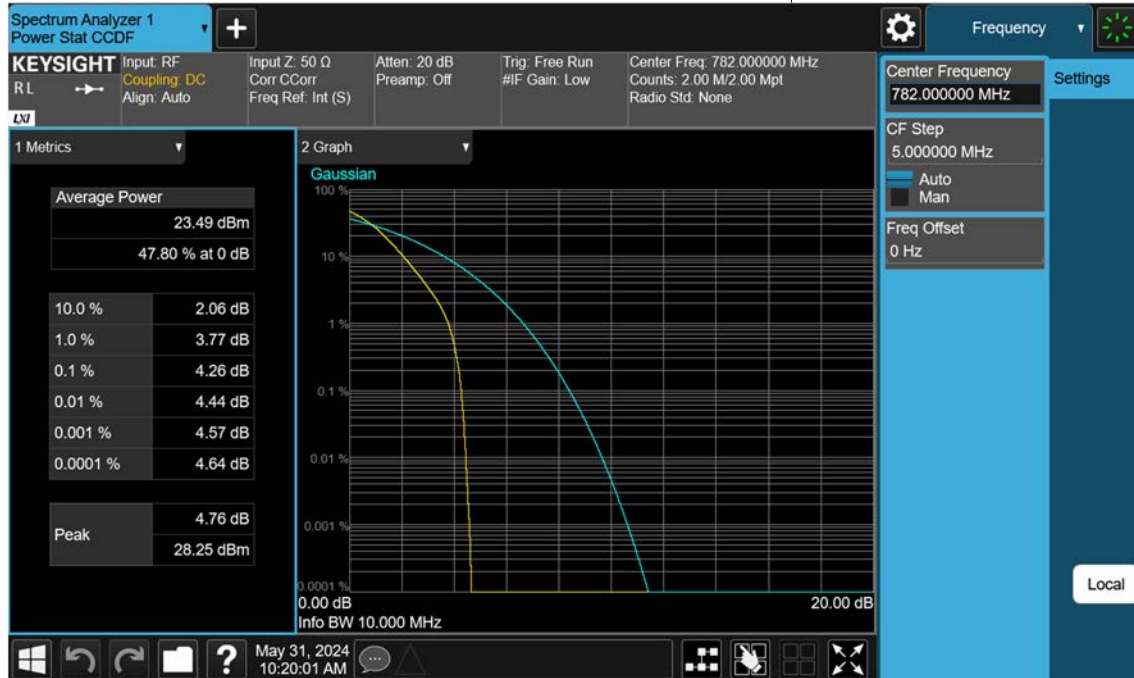


## 10 M\_PAR\_Mid Channel\_QPSK\_FullRB

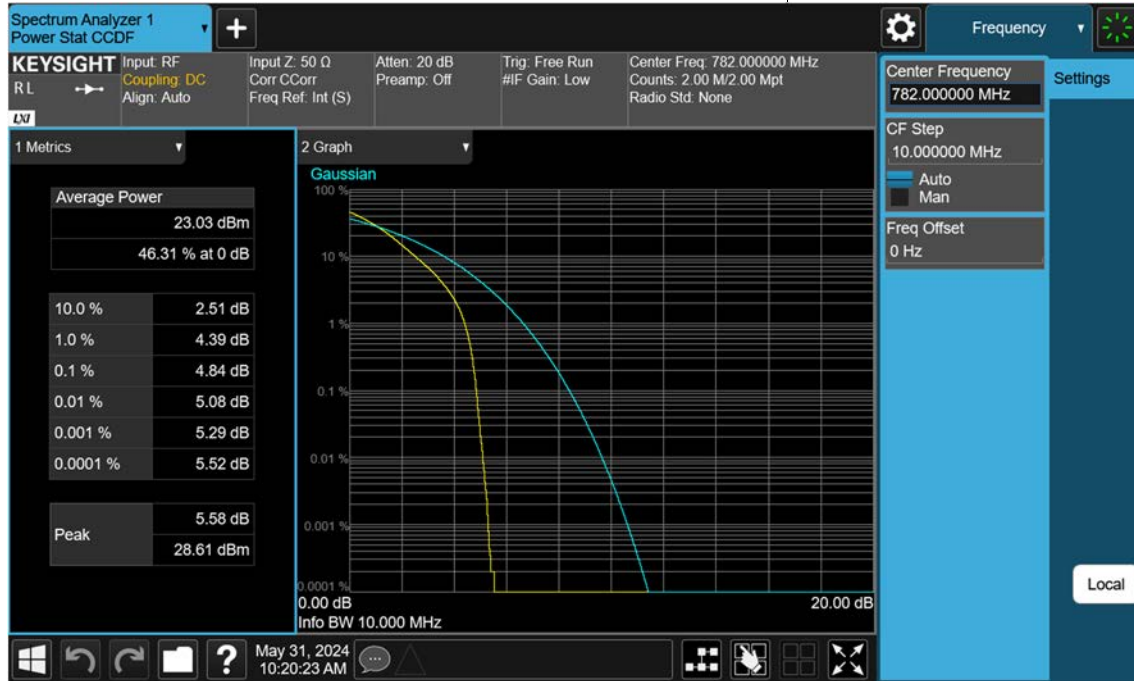


## 10 M\_PAR\_Mid Channel\_16QAM\_FullRB




## 10 M\_PAR\_Mid Channel\_64QAM\_FullRB

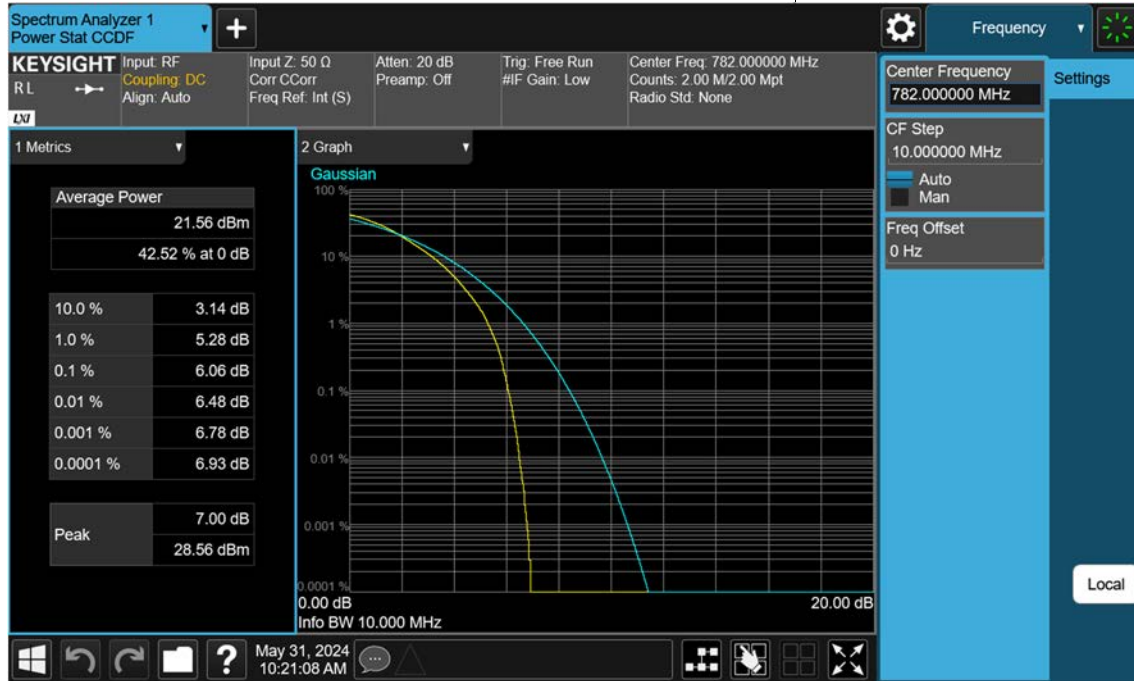


10 M\_PAR\_Mid Channel\_256QAM\_FullRB

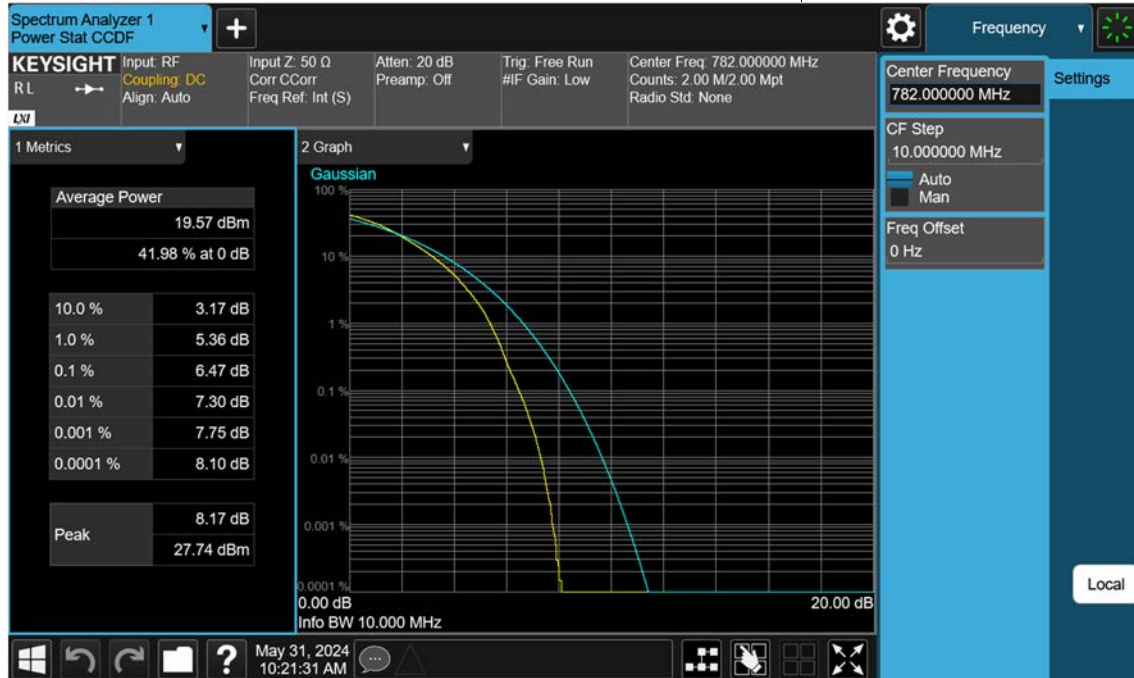


## Sub6 n13\_5 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB

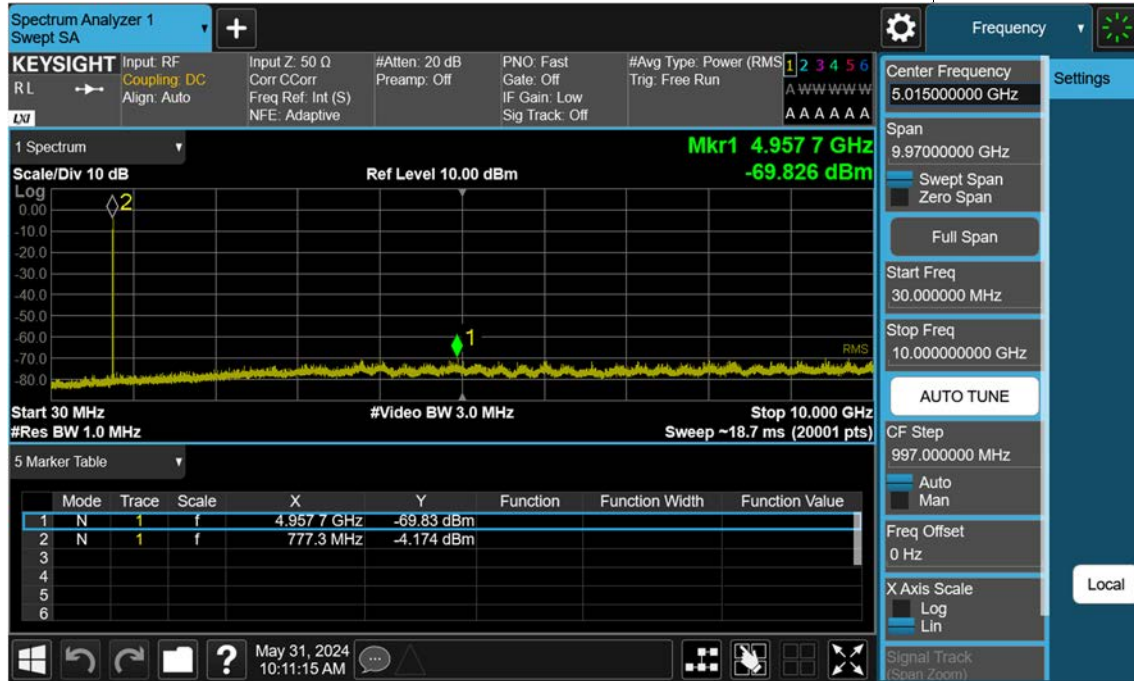


Sub6 n13\_5 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB

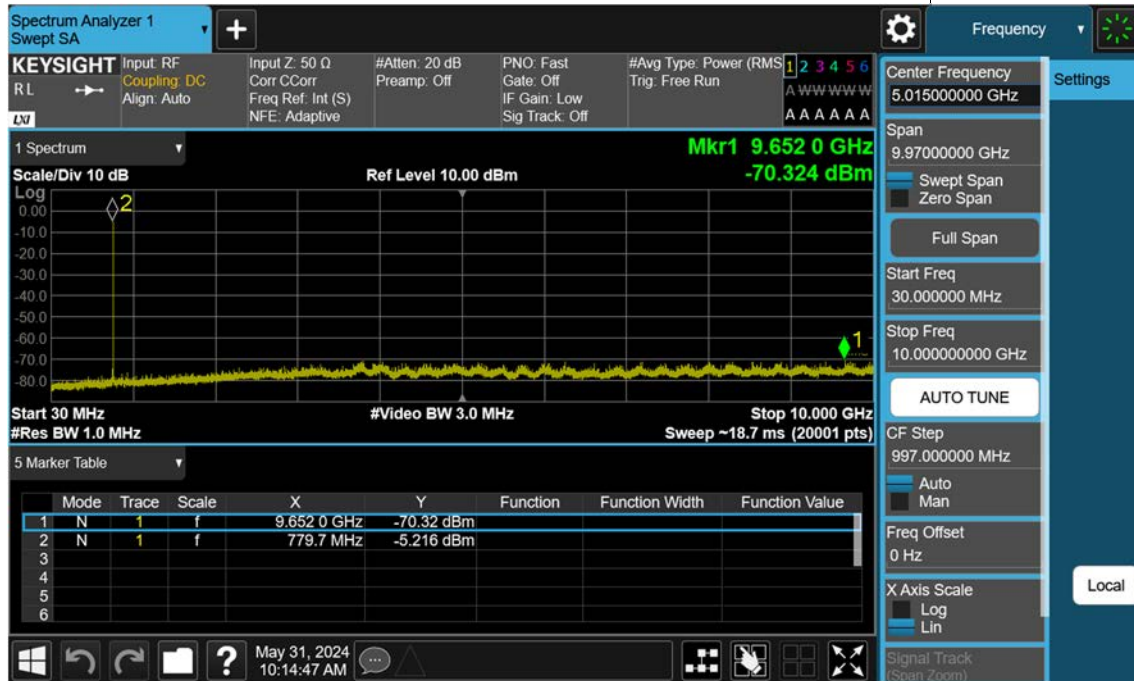


Sub6 n13\_5 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB

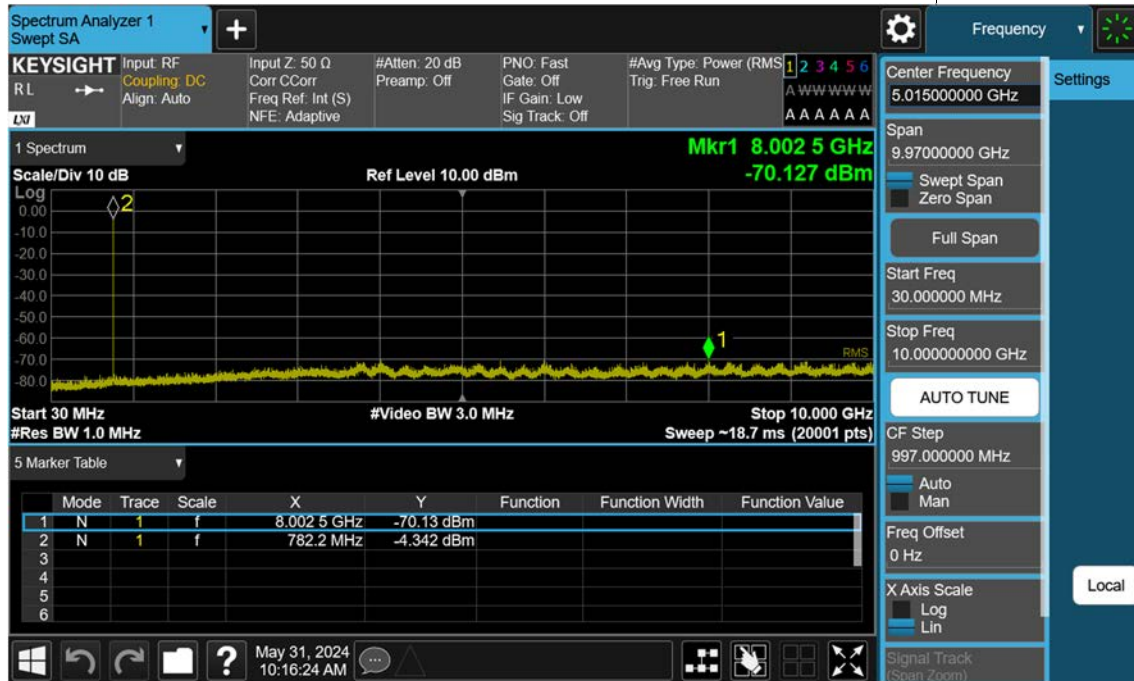

Sub6 n13\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB

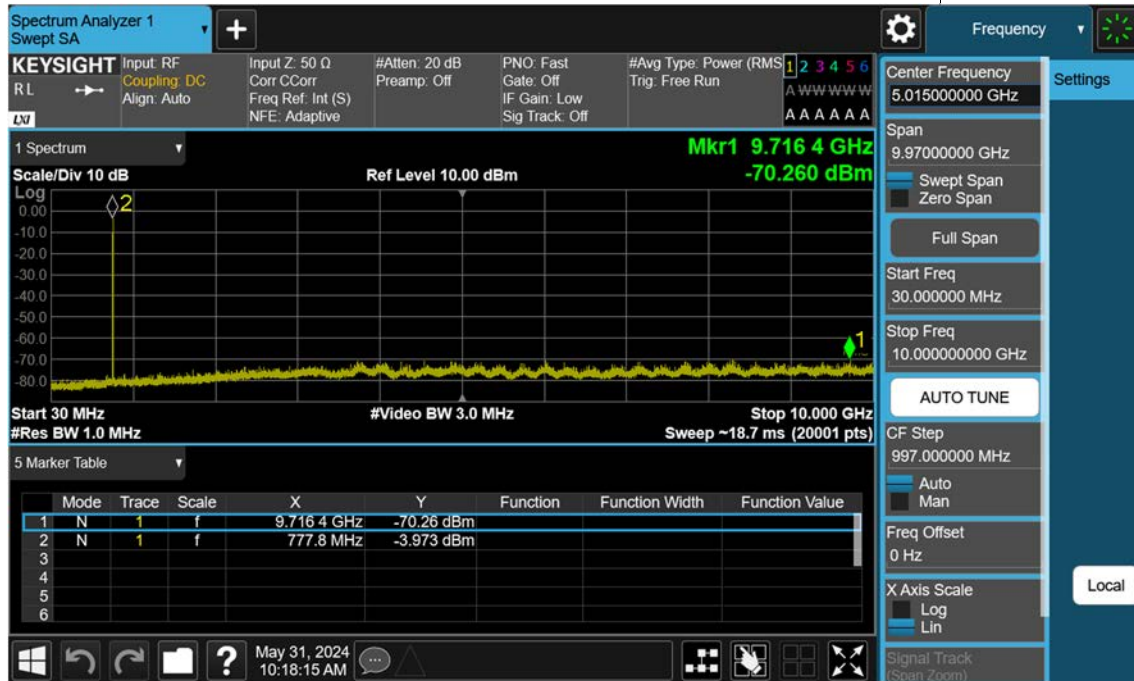


Sub6 n13\_5 M\_Band Edge\_Low\_QPSK\_1RB

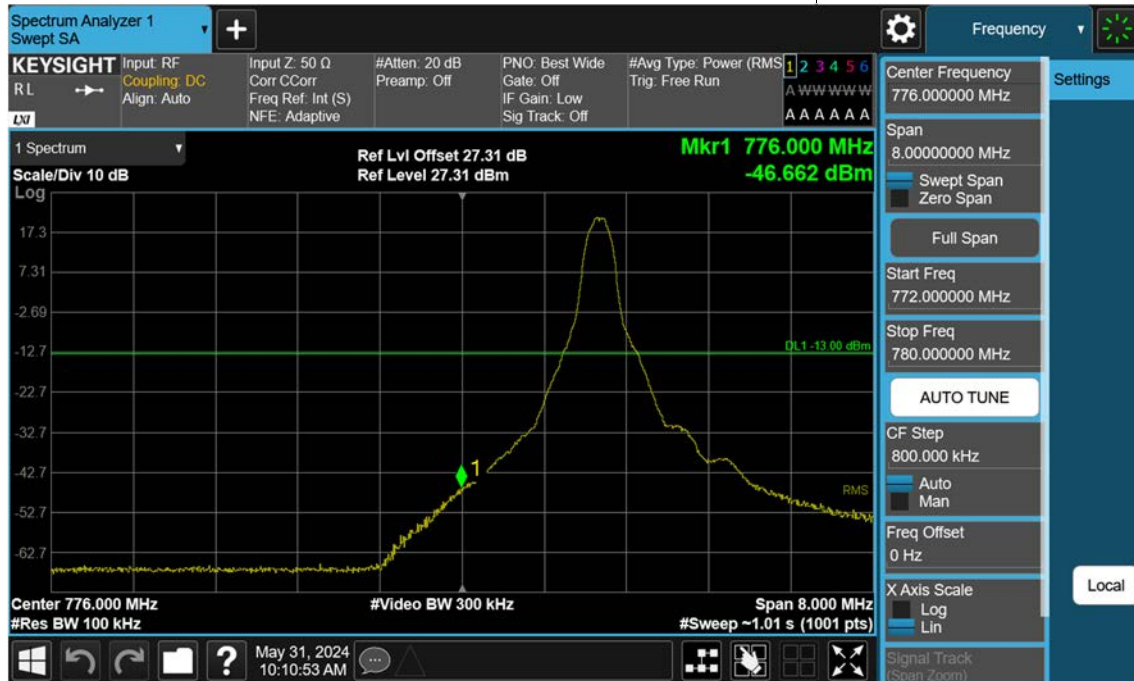


## Sub6 n13\_5 M\_Band Edge\_Low\_QPSK\_FullRB



Sub6 n13\_5 M\_Extended Band Edge\_Low\_QPSK\_FullRB

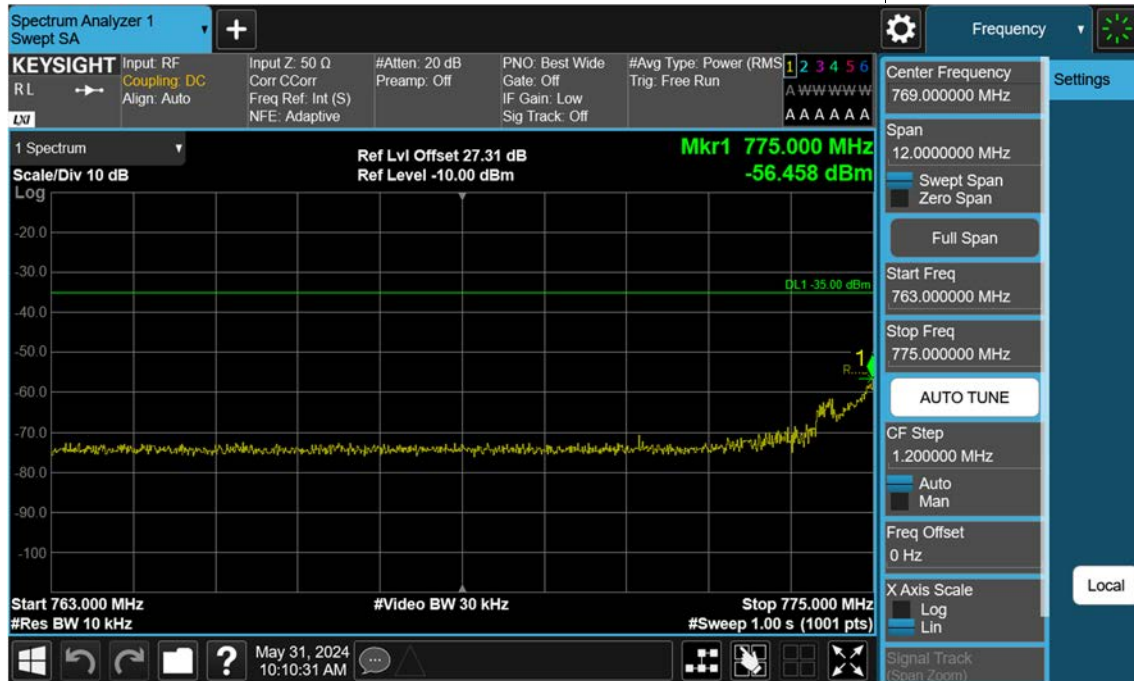


Sub6 n13\_5 M\_Band Edge\_High\_QPSK\_1RB

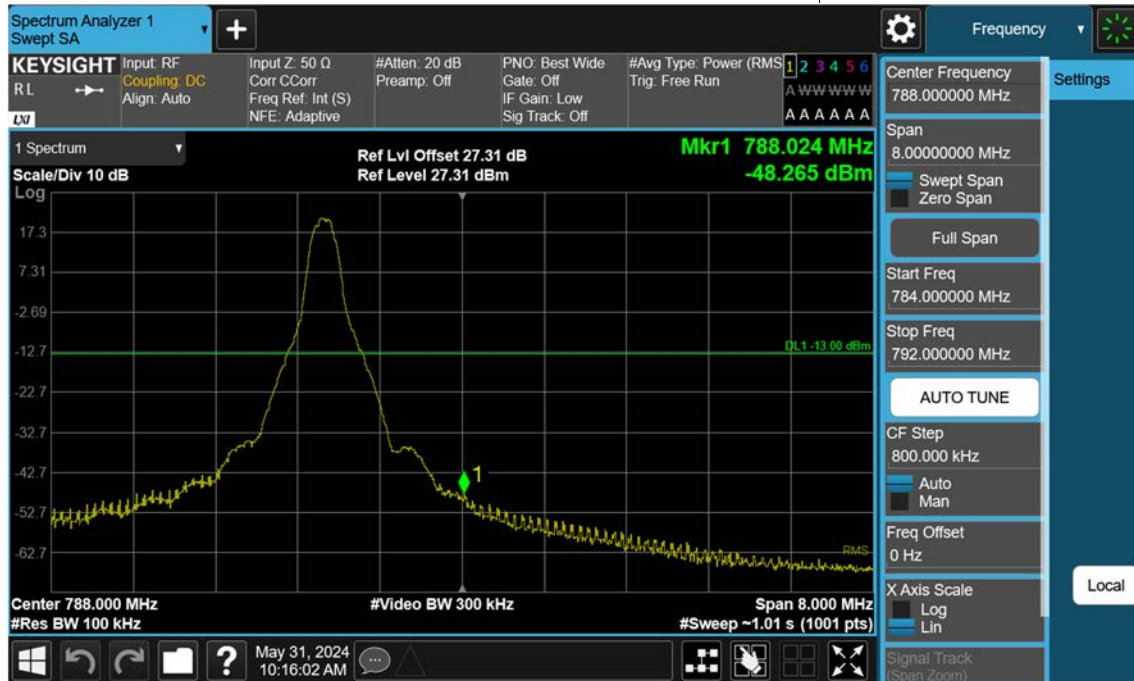


Sub6 n13\_5 M\_Band Edge\_High\_QPSK\_FullIRB



Sub6 n13\_5 M\_Extended Band Edge\_High\_QPSK\_FullRB

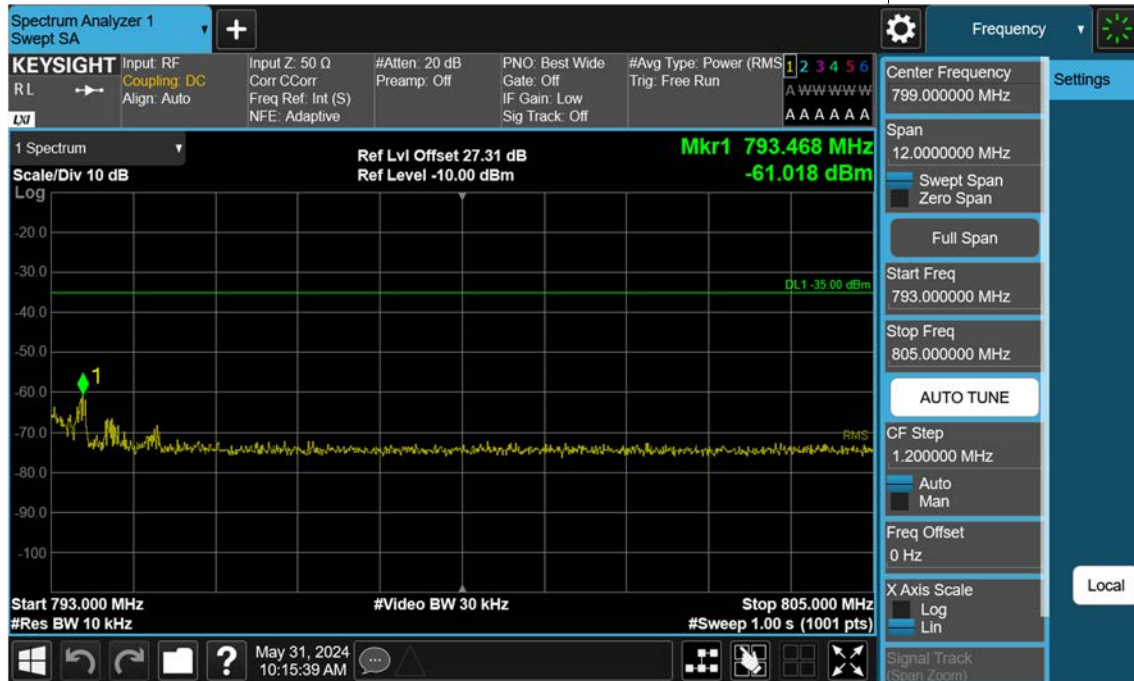


Sub6 n13\_10 M\_Band Edge\_Low\_QPSK\_1RB

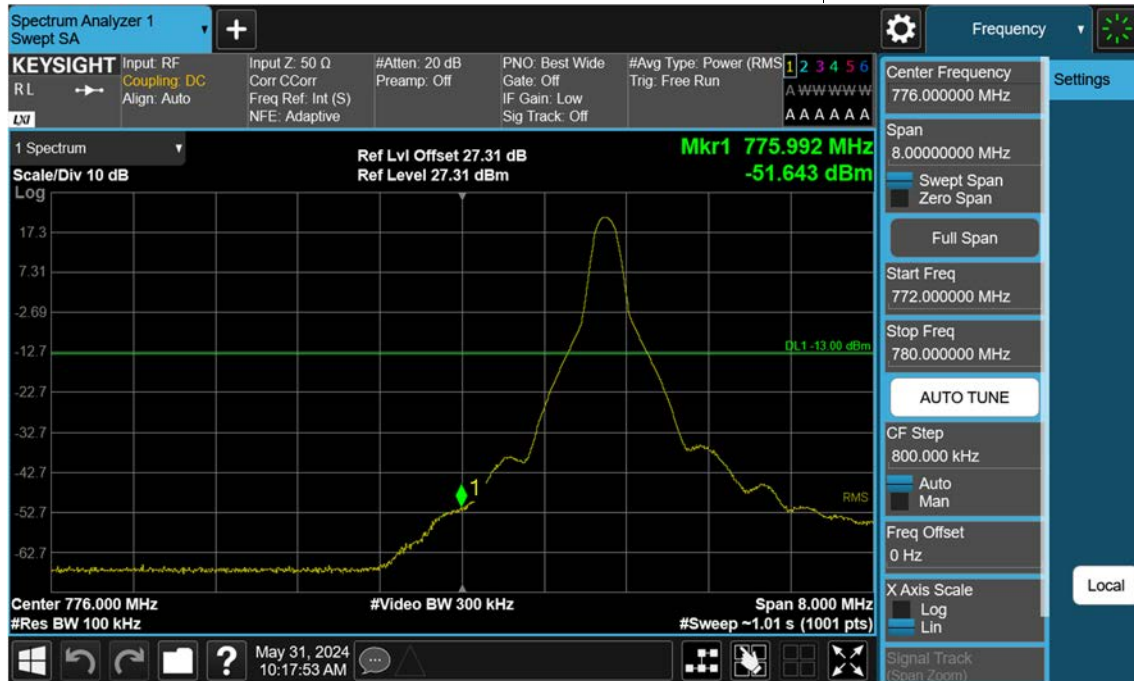

## Sub6 n13\_10 M\_Band Edge\_Low\_QPSK\_FullIRB



Sub6 n13\_10 M\_Extended Band Edge\_Low\_QPSK\_FullRB

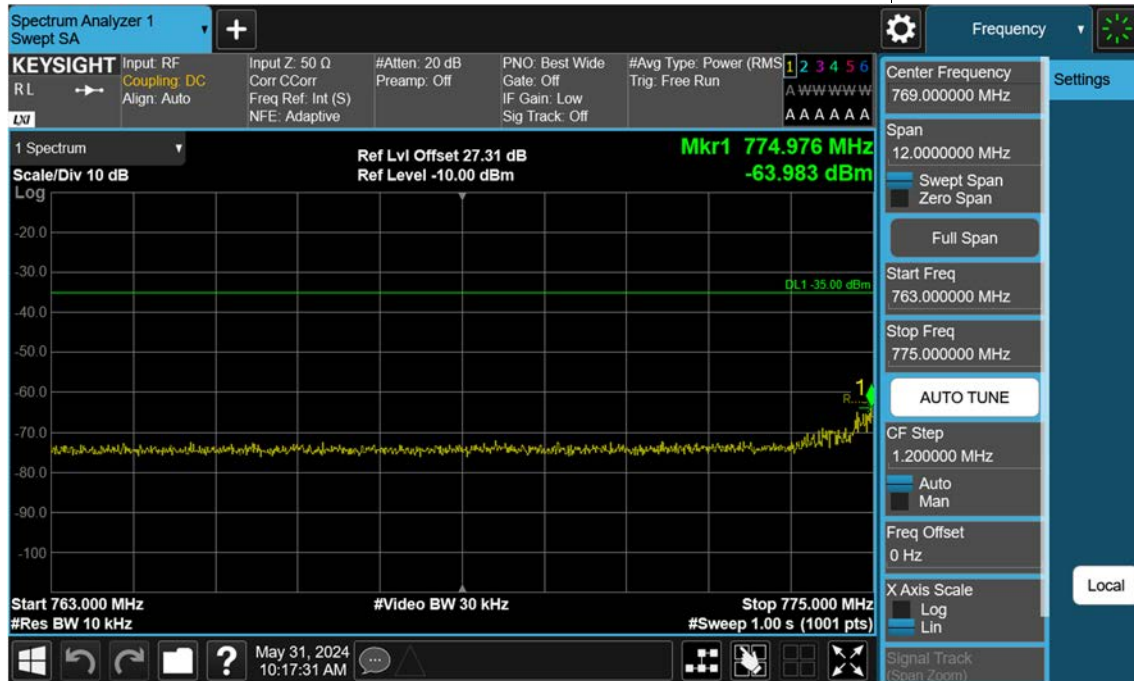


Sub6 n13\_10 M\_Band Edge\_High\_QPSK\_1RB



Sub6 n13\_10 M\_Band Edge\_High\_QPSK\_FullRB



Sub6 n13\_10 M\_Extended Band Edge\_High\_QPSK\_FullRB

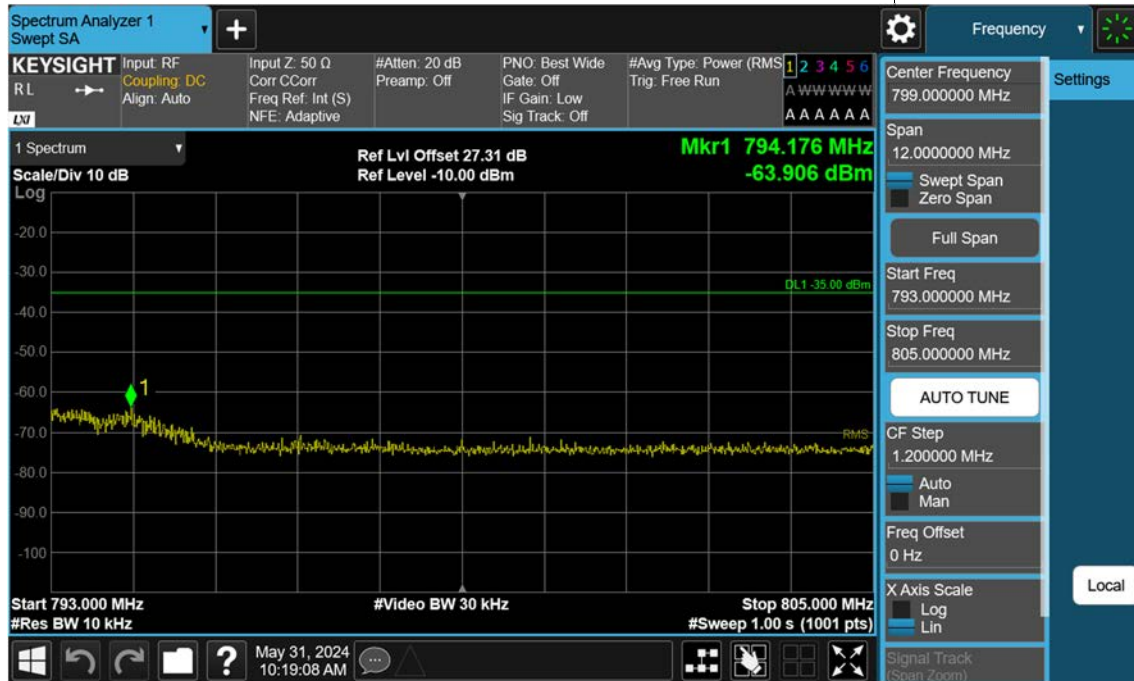

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2409-FC009-P