

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 128/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.048 mW/g

Antenna position: Normal - GPRS ch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = 0.174 dB

Peak SAR (extrapolated) = 0.066 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

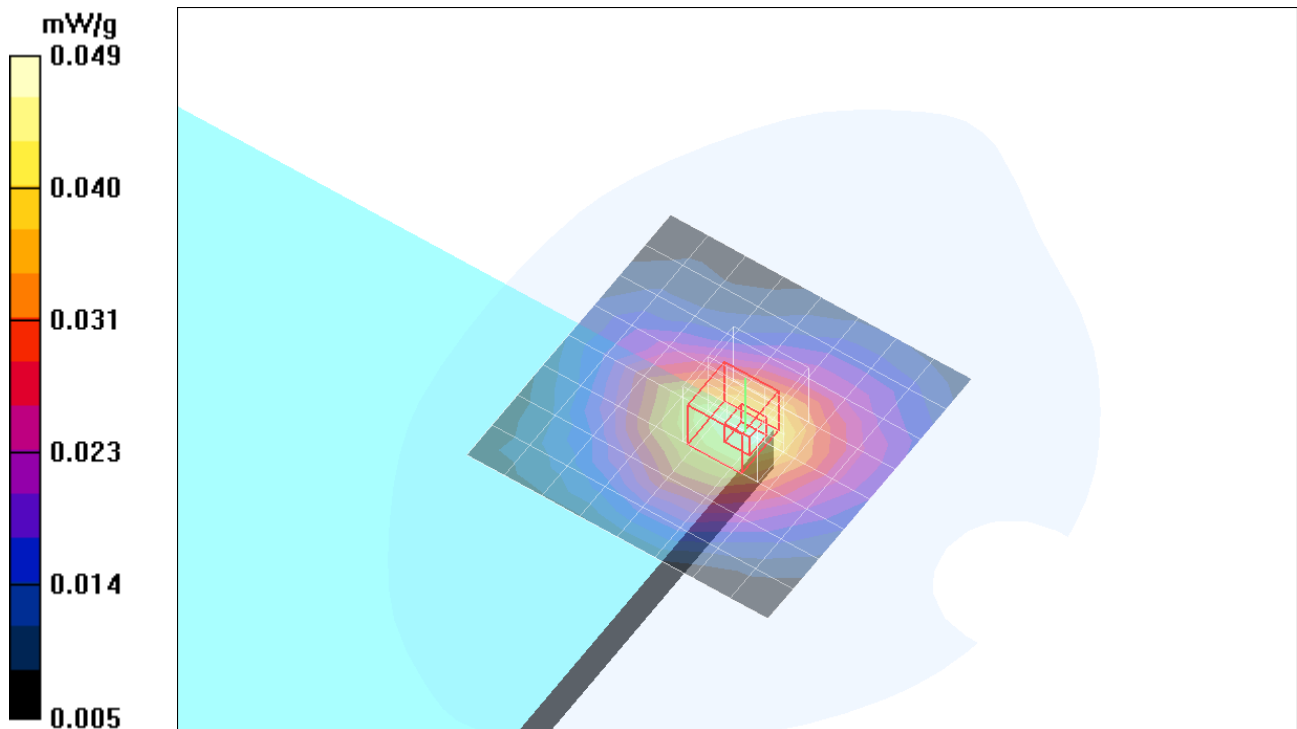

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.052 mW/g

Antenna position: Normal - GPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.39 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.034 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.054 mW/g

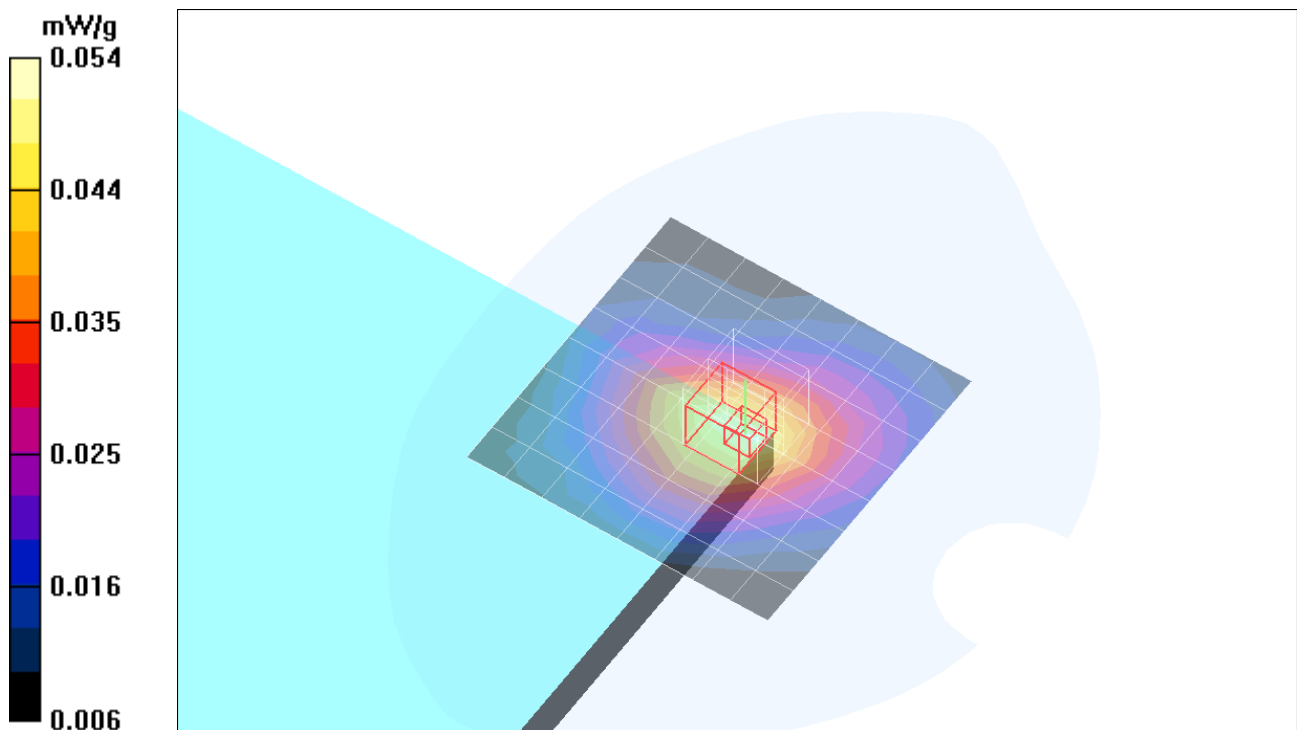

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

Antenna position: Normal - GPRS ch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.79 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.037 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.059 mW/g

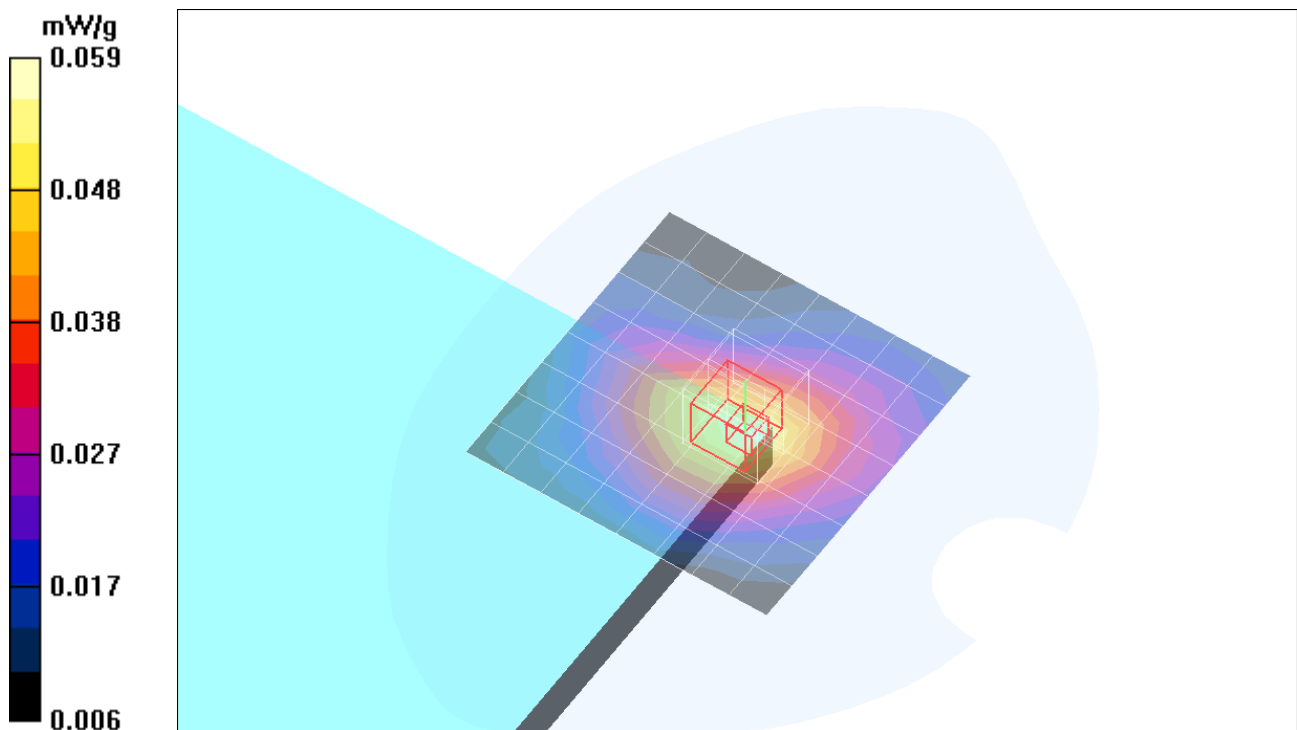

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz b mode/Area

Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz b mode/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.75 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

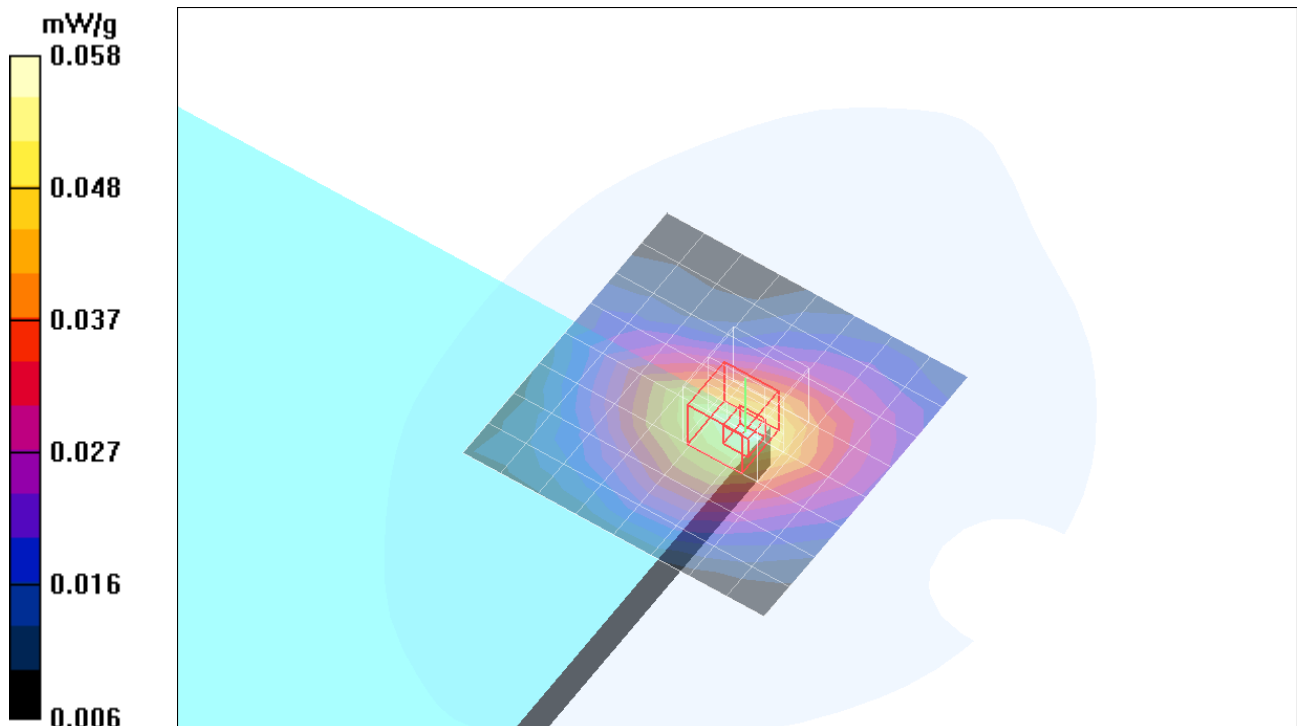

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz g mode/Area

Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz g mode/Zoom


Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.66 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

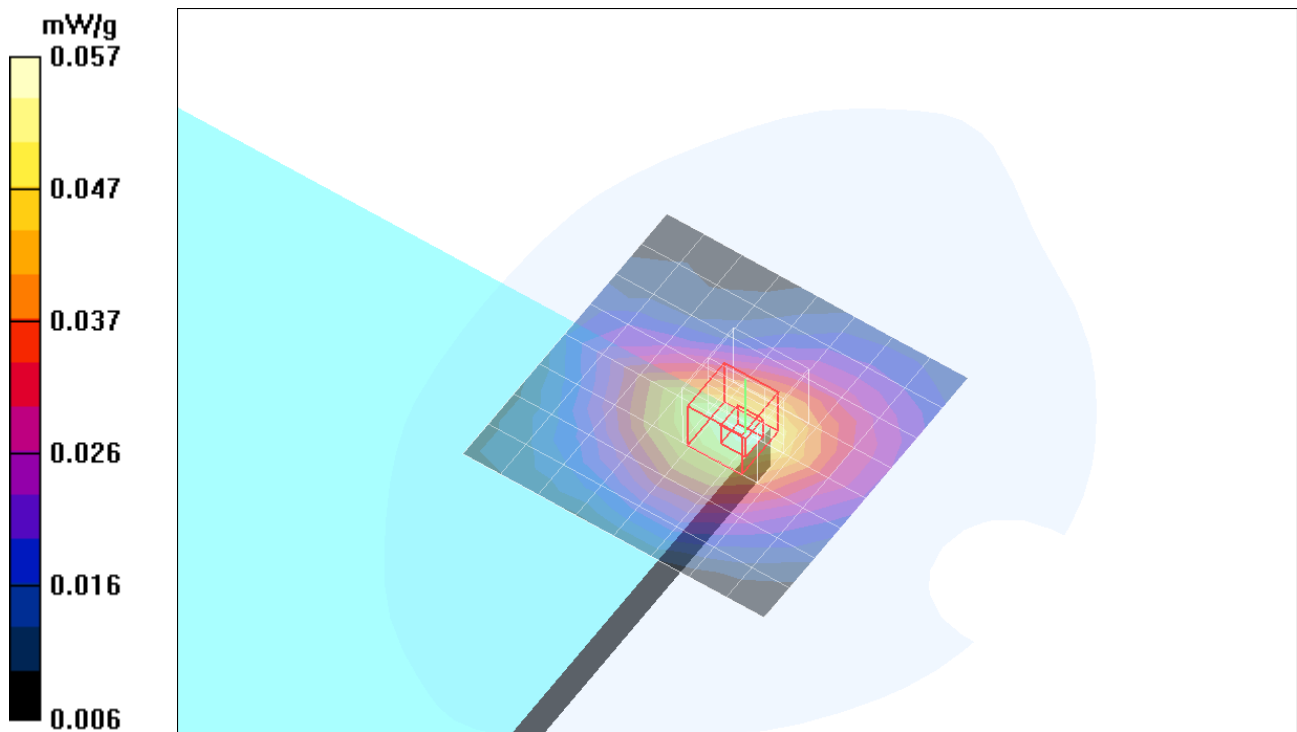

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz HT20

mode/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz HT20

mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.70 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

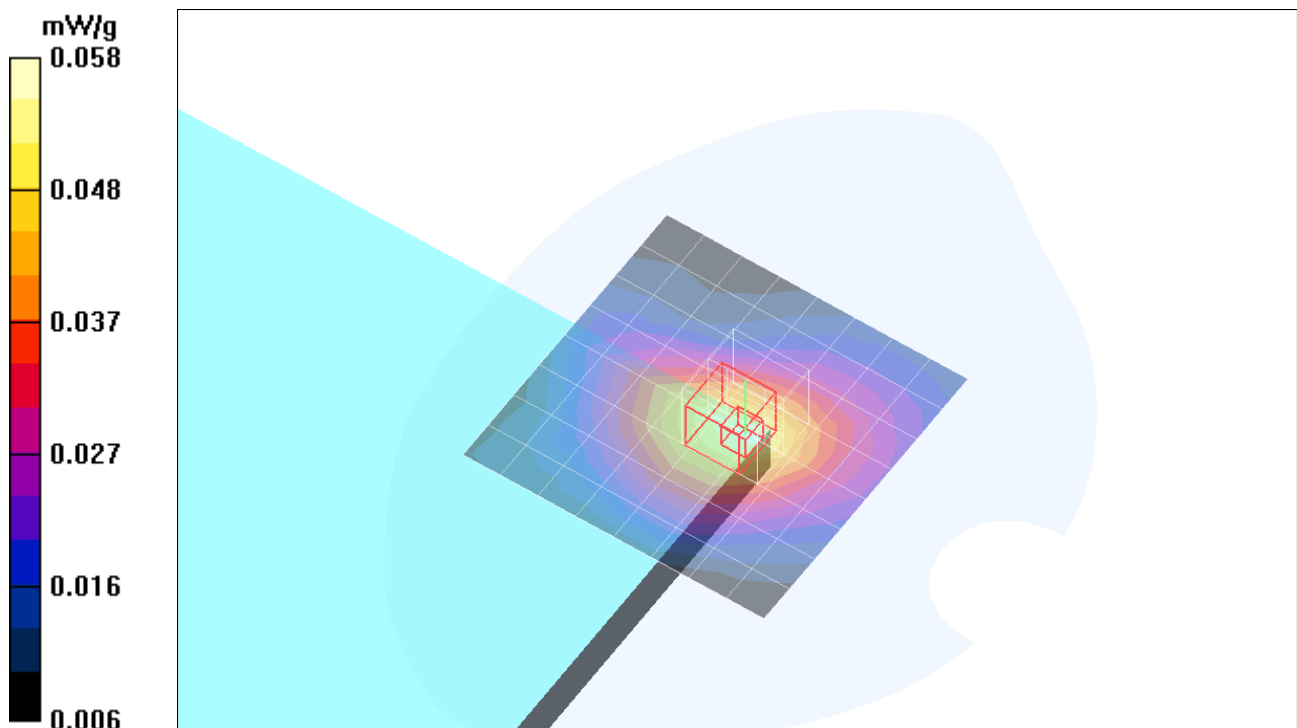

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz HT40

mode/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 2.4GHz HT40


mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.68 V/m; Power Drift = 0.076 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

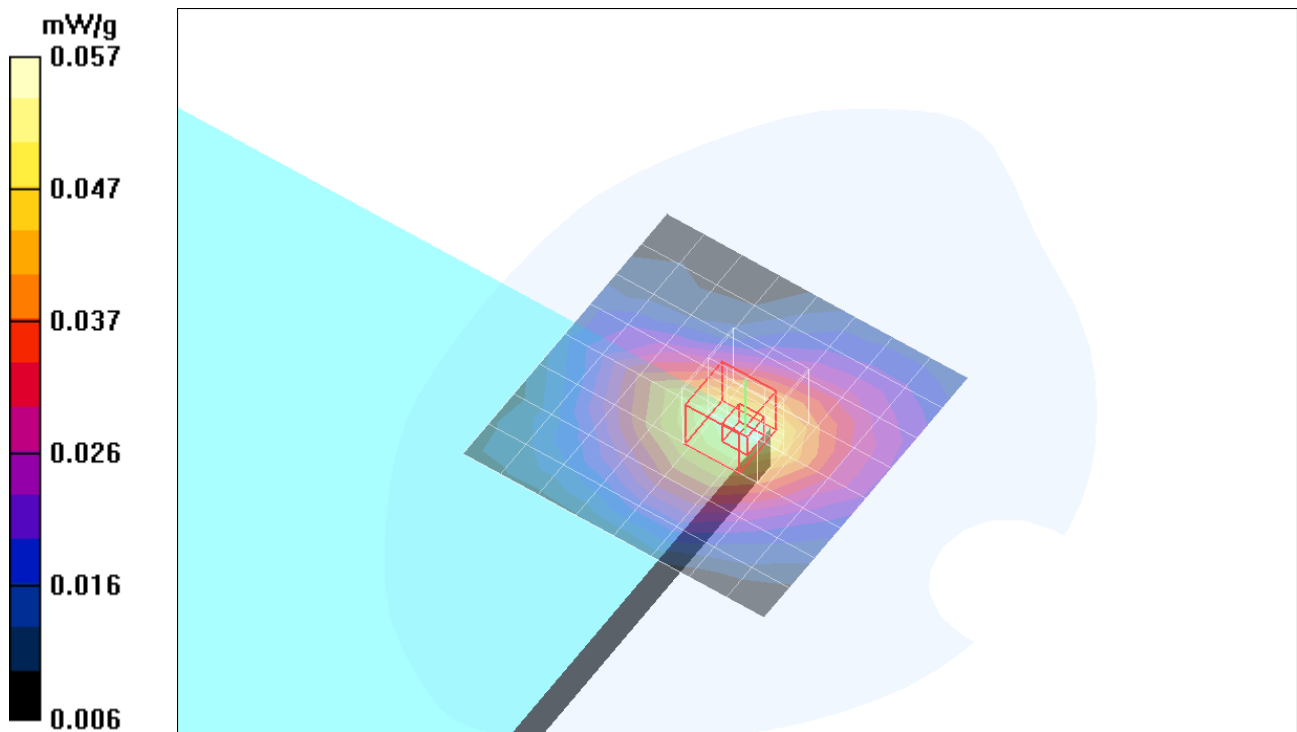

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz a mode/Area

Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz a mode/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.64 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

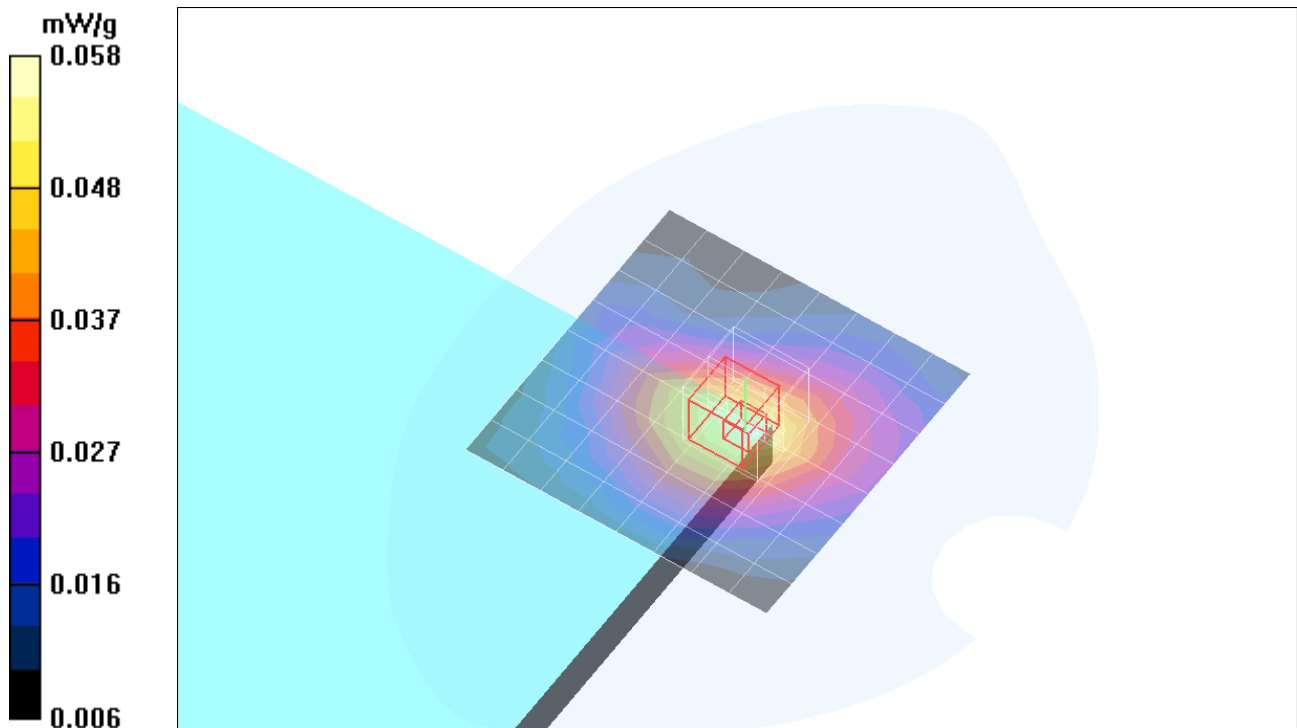

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz HT20

mode/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.056 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz HT20

mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.63 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

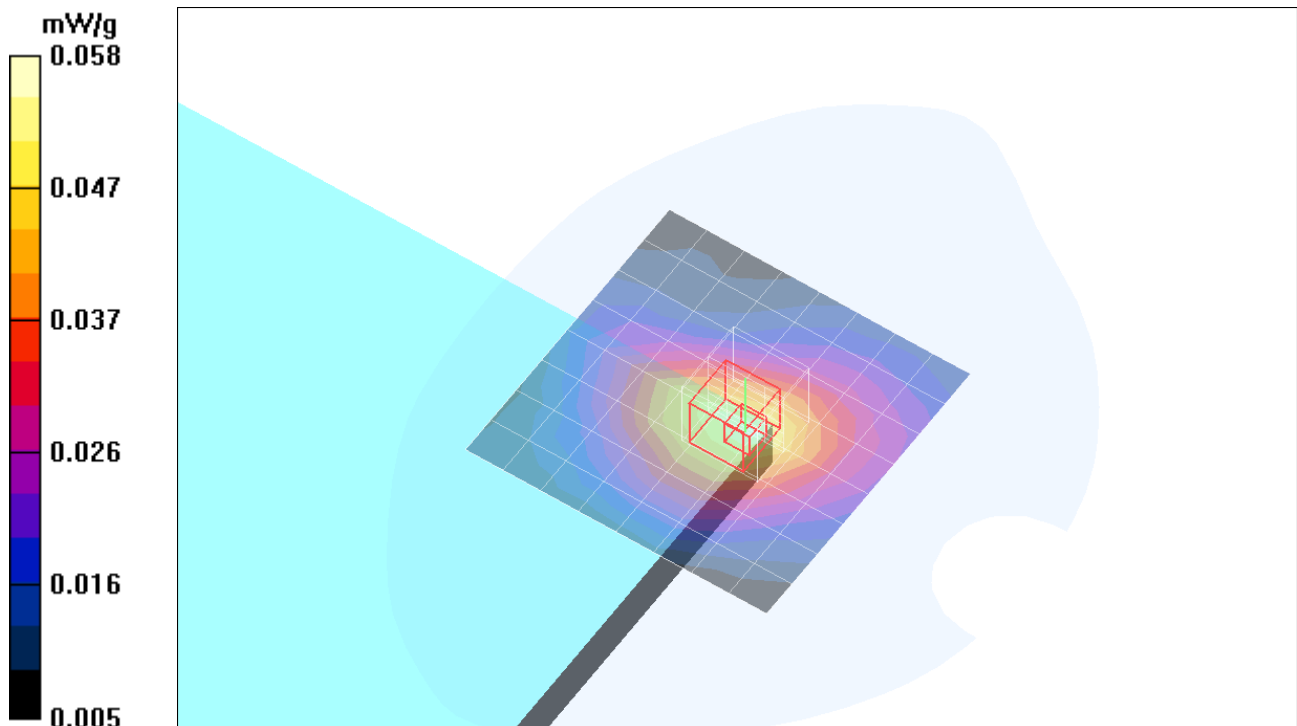

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz HT40

mode/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.059 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.2GHz HT40


mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.89 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.037 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

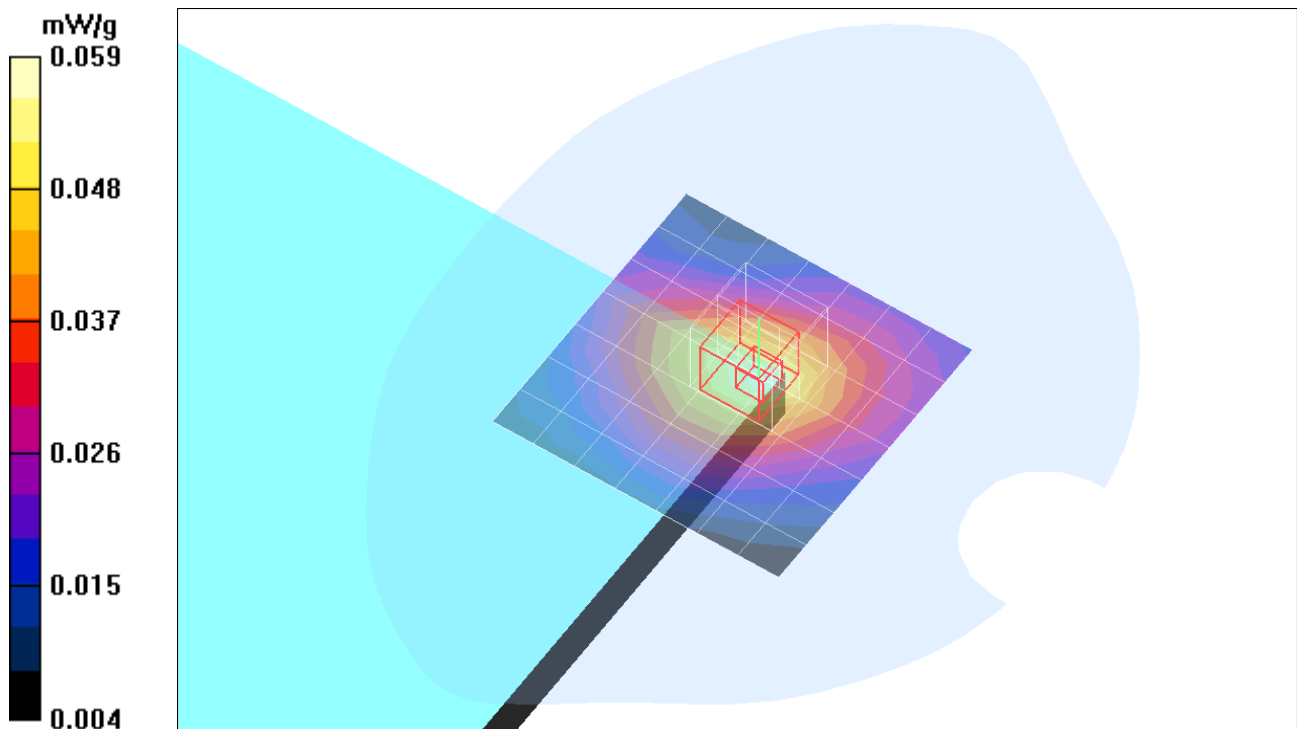

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz a mode/Area

Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz a mode/Zoom

Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.84 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.037 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.060 mW/g

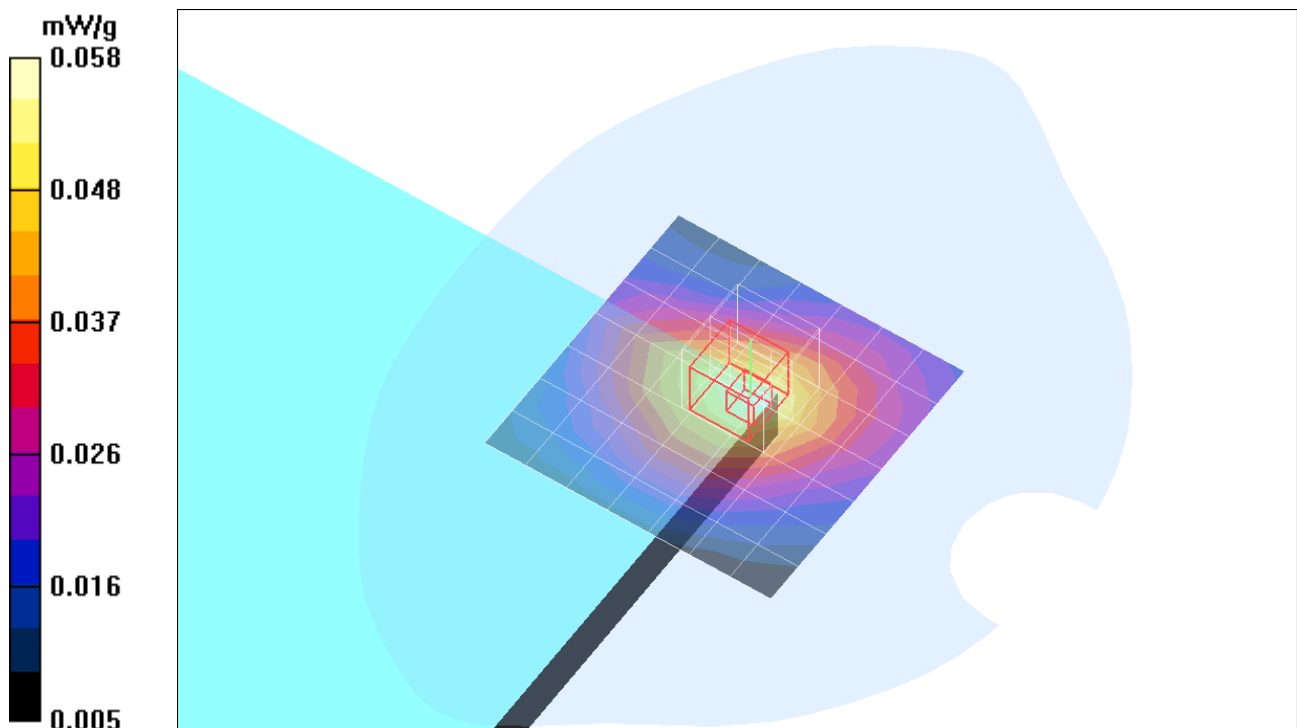

Test Laboratory: Compliance Certification Services

Cell Band


DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz a mode/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.040 mW/g

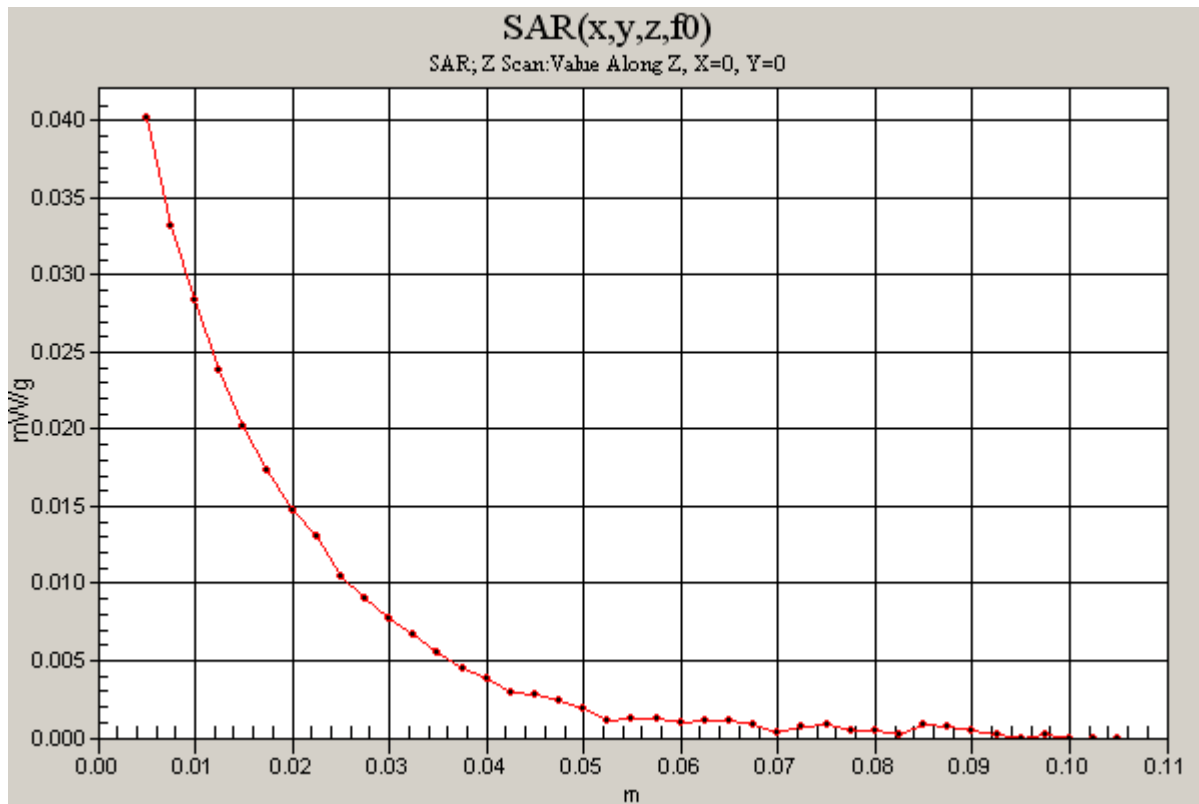

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz HT20

mode/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz HT20


mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.83 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.037 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

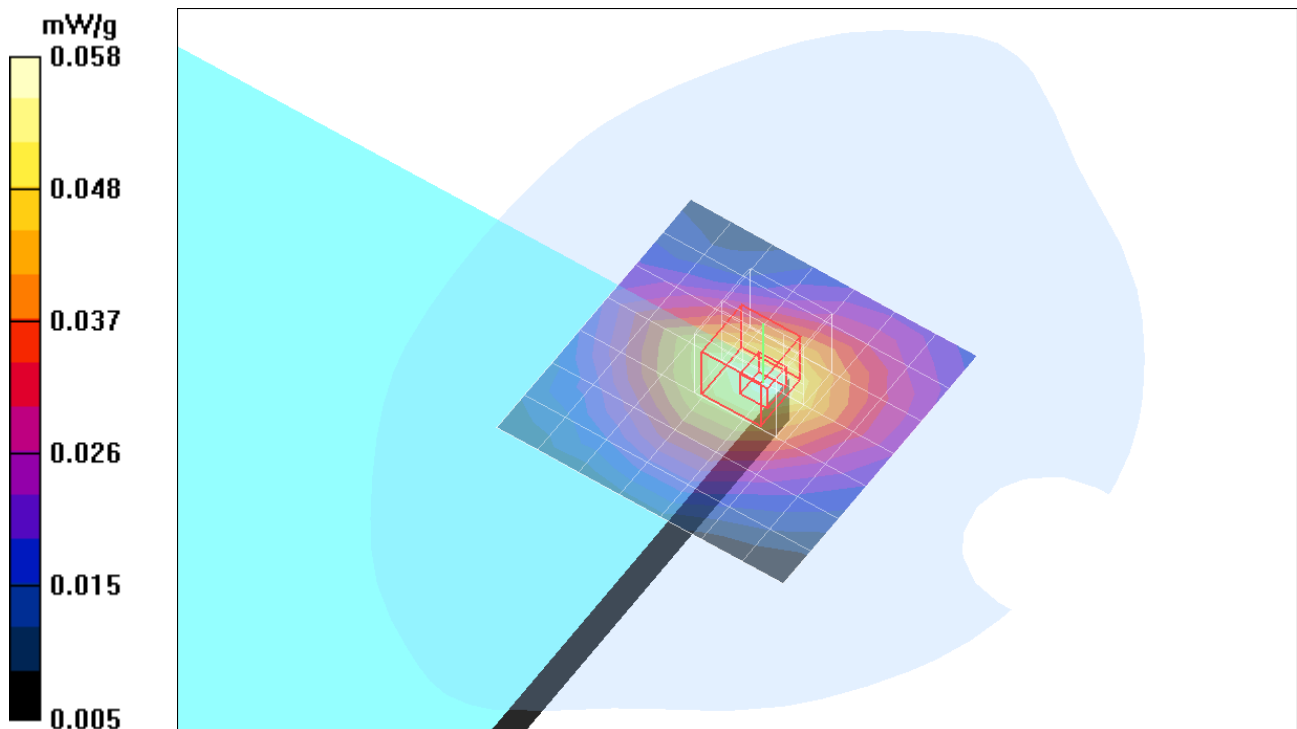

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz HT40

mode/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.057 mW/g

Antenna position: Normal - GPRS ch 251 with BT and WLAN @ 5.8GHz HT40

mode/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.76 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.037 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

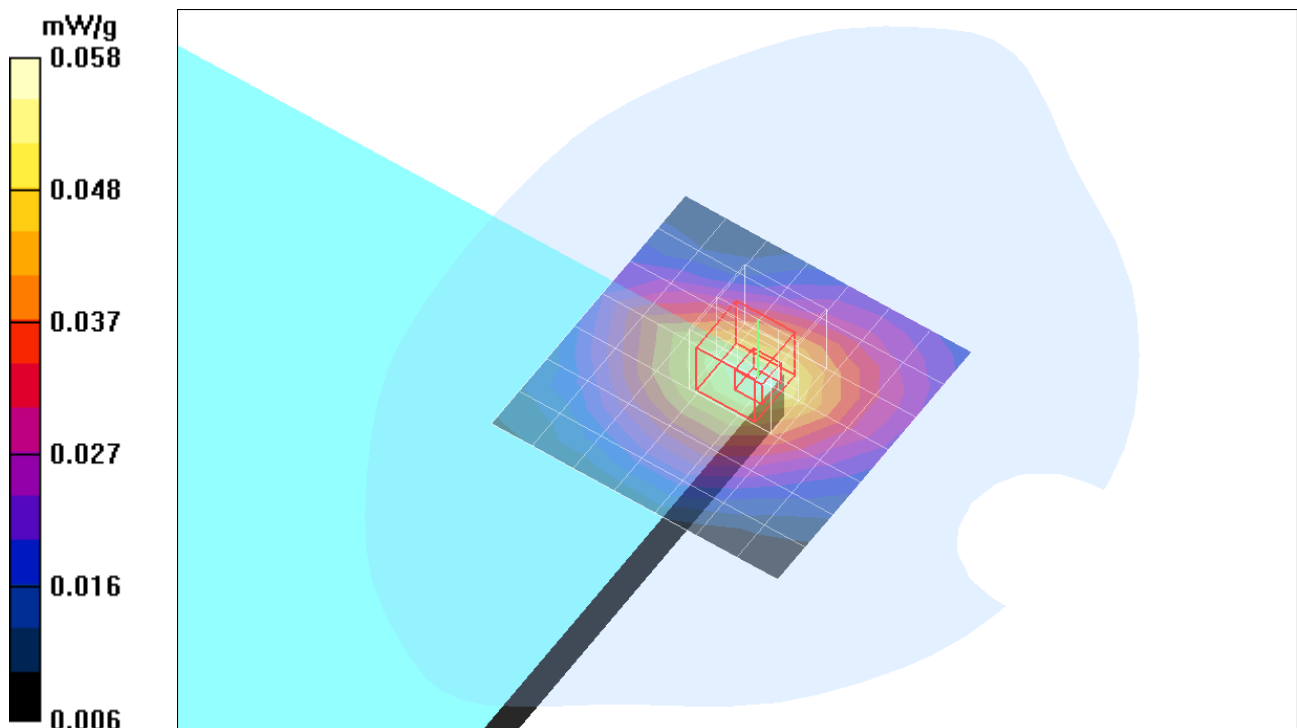

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - EGPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.016 mW/g

Antenna position: Normal - EGPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.03 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00995 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

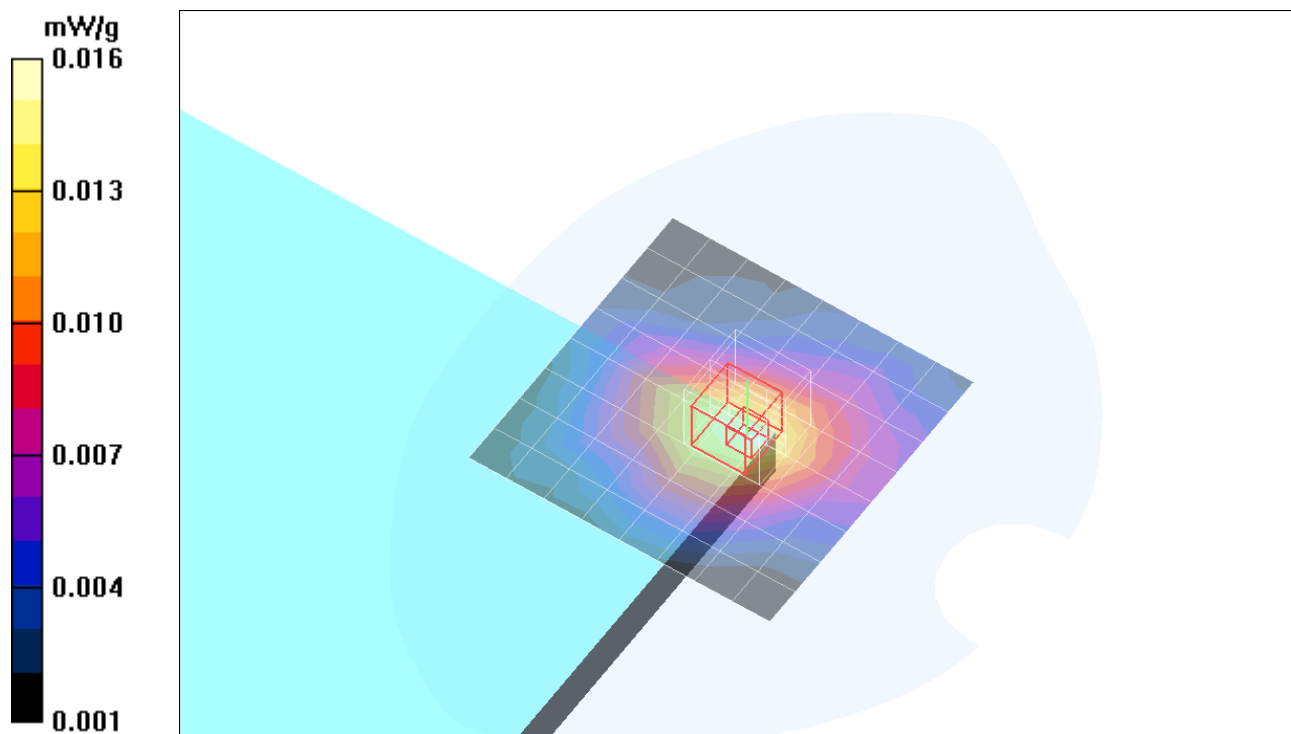

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Normal - WCDMA ch 4182/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.038 mW/g

Antenna position: Normal - WCDMA ch 4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.98 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.046 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.022 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.035 mW/g

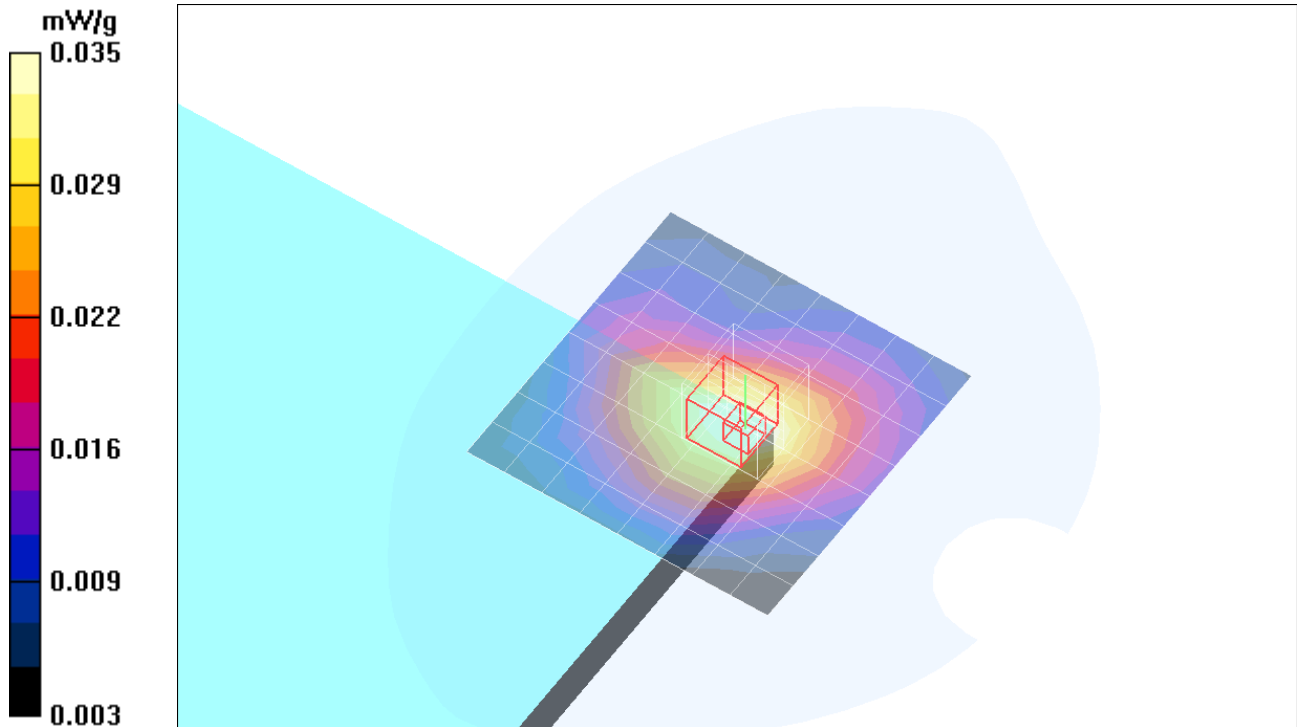

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position:Extended - GPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.052 mW/g

Antenna position:Extended - GPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.37 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.034 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.053 mW/g

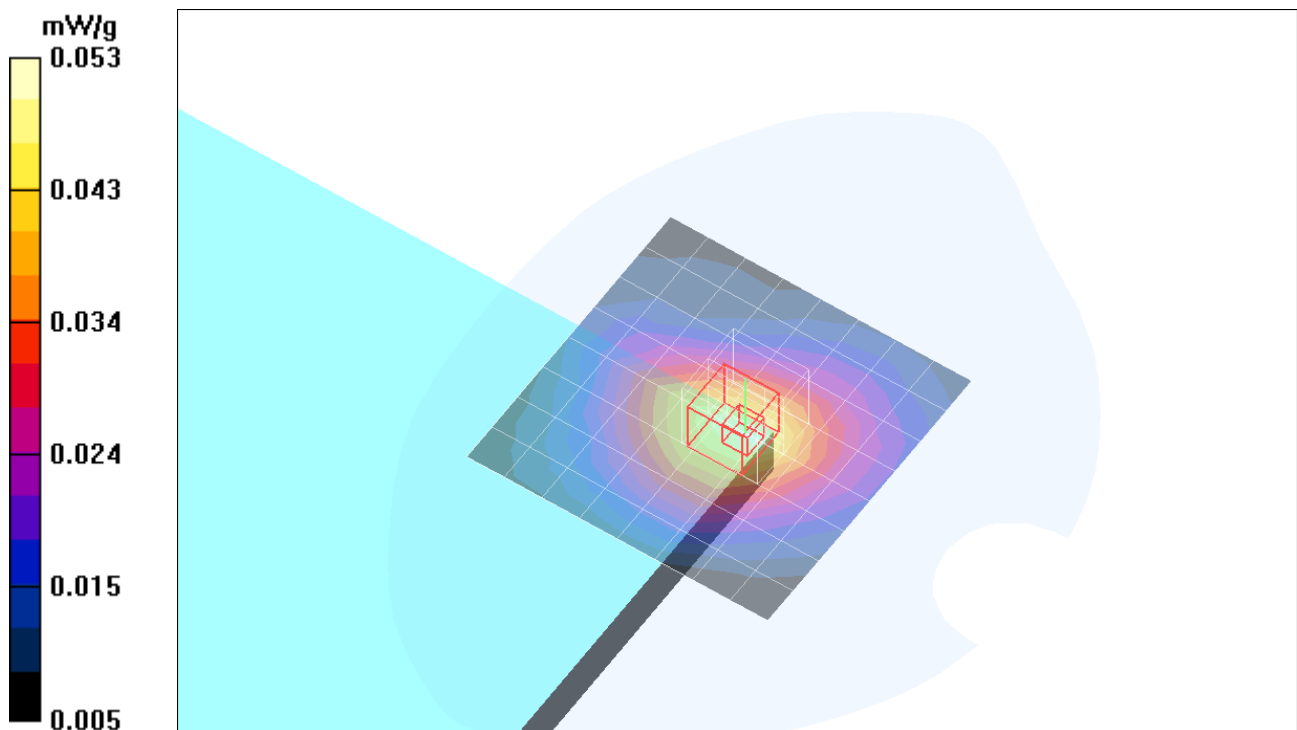

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position:Extended - EGPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.015 mW/g

Antenna position:Extended - EGPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 3.86 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00882 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.014 mW/g

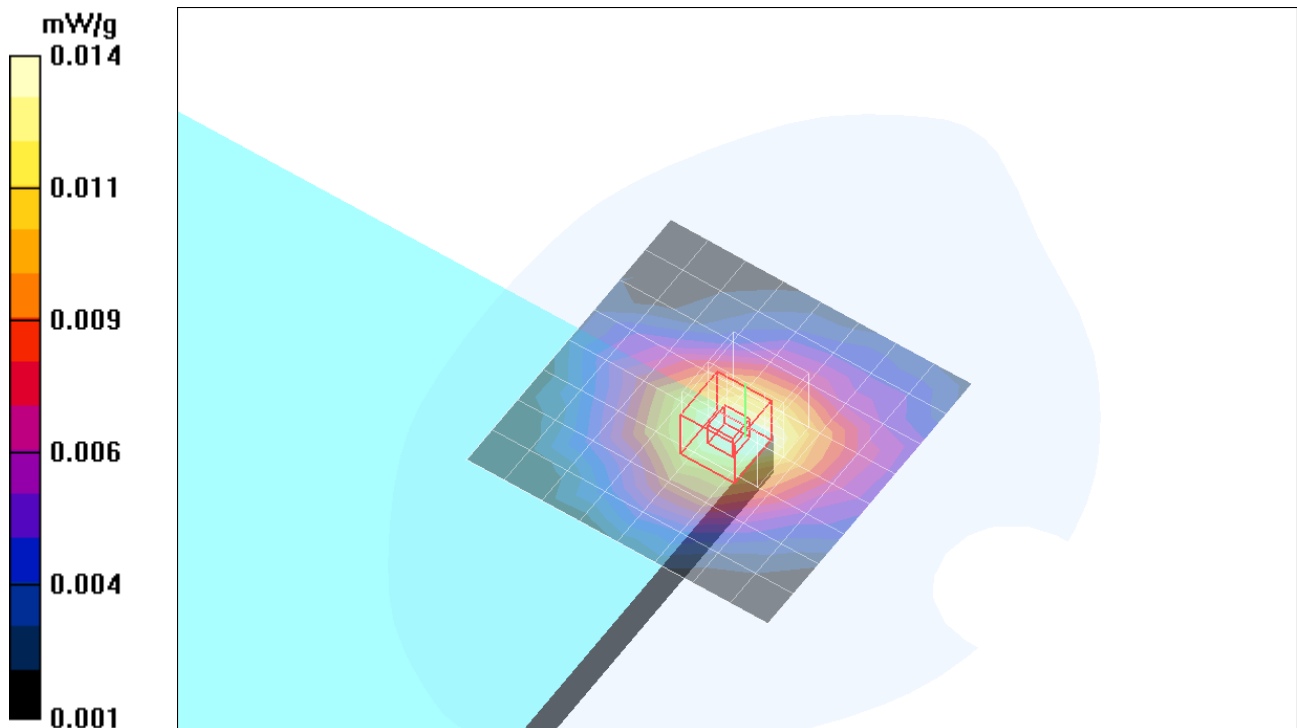

Test Laboratory: Compliance Certification Services

Cell Band

DUT: C2 Note; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.959$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna position: Extended - WCDMA ch 4182/Area Scan (9x10x1): Measurement grid:

dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.052 mW/g

Antenna position: Extended - WCDMA ch 4182/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.071 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.034 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.054 mW/g

