



TEST REPORT

No. I23N01645-BLE

for

unitech electronics co., ltd.

Rugged Tablet

Model Name: RT112

with

Hardware Version: V1.2

Software Version: IRIS_V03.29b01_20230920

FCC ID: HLERT112BWN

ISED Number: 6724A-RT112BWN

Issued Date: 2023-12-20

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn, www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



No. I23N01645-BLE

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23N01645-BLE	Rev.0	1st edition	2023-12-20

Note: the latest revision of the test report supersedes all previous versions.

CONTENTS

1. SUMMARY OF TEST REPORT.....	4
1.1. TEST ITEMS.....	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. TEST RESULTS	8
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS	8
5.3. STATEMENTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. LABORATORY ENVIRONMENT.....	10
8. MEASUREMENT UNCERTAINTY	11
ANNEX A: DETAILED TEST RESULTS.....	12
A.0 ANTENNA REQUIREMENT	12
A.1 MAXIMUM PEAK OUTPUT POWER	13
A.2 PEAK POWER SPECTRAL DENSITY	14
A.3 6dB BANDWIDTH.....	18
A.4 BAND EDGES COMPLIANCE	22
A.5 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	25
A.6 TRANSMITTER SPURIOUS EMISSION - RADIATED.....	34
A.7 AC POWER LINE CONDUCTED EMISSION	45
A.8 99% OCCUPIED BANDWIDTH.....	48

1. Summary of Test Report

1.1. Test Items

Description	Rugged Tablet
Model Name	RT112
Applicant's name	unitech electronics co., ltd.
Manufacturer's Name	unitech electronics co., ltd.

1.2. Test Standards

FCC Part15-2021; ANSI C63.10-2013; RSS-247 Issue 3; RSS-Gen Issue 5

1.3. Test Result

Pass

Please refer to 5.2 Test Results.


1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000


1.5. Project data

Testing Start Date:	2023-10-16
Testing End Date:	2023-11-09

1.6. Signature



Lin Kanfeng
(Prepared this test report)



An Ran
(Reviewed this test report)



Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: unitech electronics co., ltd.
Address: 5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City
231028 , Taiwan
Contact Person: Ben Chiang
E-Mail: BenC@tw.ute.com
Telephone: 886-2-8912-1122
FAX: 886-2-89121391

2.2. Manufacturer Information

Company Name: unitech electronics co., ltd.
Address: 5F., No. 136, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City
231028 , Taiwan
Contact Person: Ben Chiang
E-Mail: BenC@tw.ute.com
Telephone: 886-2-8912-1122
FAX: 886-2-89121391

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Rugged Tablet
Model Name	RT112
Frequency Range	2400MHz~2483.5MHz
Equipment type	Bluetooth® Low Energy
Type of Modulation	GFSK
RF PHY	LE 1M/2M
Number of Channels	40
Antenna Type	Integrated
Antenna Gain	2.76 dBi
Power Supply	3.85V DC by Battery
FCC ID	HLERT112BWN
ISED Number	6724A-RT112BWN

Condition of EUT as received No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
UT02aa	A20235230110	V1.2	IRIS_V03.29b01_20230920	2023-10-12
UT04aa	A20235230127	V1.2	IRIS_V03.29b01_20230920	2023-10-10

*EUT ID: is used to identify the test sample in the lab internally.

*UT02aa is used for Conduction test; UT04aa is used for radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE

AE No.	Description	AE ID*
AE1	Battery	1400-900077G
AE2	Charger	ADP-45HG B

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Rugged Tablet with integrated antenna and battery. It consists of normal options: Lithium Battery and Charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
RSS-247	Spectrum Management and Telecommunications Radio Standards Specification Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices	Issue 3 August, 2023
RSS-Gen	Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus	Issue 5 A2 February, 2021

5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Sub-clause of IC	Verdict
0	Antenna Requirement	15.203	/	P
1	Maximum Peak Output Power	15.247 (b)	RSS-247 section 5.4	P
2	Peak Power Spectral Density	15.247 (e)	RSS-247 section 5.2	P
3	6dB Bandwidth	15.247 (a)	RSS-247 section 5.2	P
4	Band Edges Compliance	15.247 (d)	RSS-247 section 5.5	P
5	Transmitter Spurious Emission - Conducted	15.247 (d)	RSS-247 section 5.5/ RSS-Gen section 6.13	P
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	RSS-247 section 5.5/ RSS-Gen section 6.13	P
7	AC Power line Conducted Emission	15.107, 15.207	RSS-Gen section 8.8	P
8	99% Occupied Bandwidth	/	RSS-Gen section 6.7	/

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.

6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due Date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2023-12-28	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2023-12-28	1 year
3	Data Acquisition	U2531A	TW55443507	Keysight	/	/
4	Shielding Room	S81	CT000986-13 44	ETS-Lindgren	2026-09-12	5 years

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due Date	Calibration Period
1	Test Receiver	ESR7	101676	Rohde & Schwarz	2024-11-22	1 year
2	BiLog Antenna	3142E	0224831	ETS-lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-lindgren	2025-04-17	1 year
4	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2025-05-28	2 years
5	Spectrum Analyzer	FSV40	101192	Rohde & Schwarz	2024-01-11	1 year
6	Loop Antenna	HLA6120	35779	TESEQ	2025-05-10	3 years
7	Horn Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2026-02-01	3 years
8	Test Receiver	ESCI	100702	Rohde & Schwarz	2024-01-11	1 year
9	LISN	ENV216	102067	Rohde & Schwarz	2024-07-13	1 year

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal.

The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Laboratory Environment

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

Anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. RF Output Power - Conducted	1.32dB	
2. Power Spectral Density - Conducted	1.32dBm/MHz	
3. Occupied channel bandwidth - Conducted	4.56kHz	
4. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.70dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.80dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.62dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	2.36dB
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	2.62dB

ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Note: The Directional gains of antenna used for transmitting is 2.76 dBi. The RF transmitter uses an integrate antenna without connector.

**A.1 Maximum Peak Output Power****Method of Measurement: See ANSI C63.10-clause 11.9.1.3**

The maximum peak conducted output power may be measured using a broadband peak RF power meter.

Measurement Limit:

Standard	Limit (dBm)	E.I.R.P Limit (dBm)
FCC CRF Part 15.247 (b) & RSS-247 section 5.4	< 30	< 36

Measurement Results:

Mode	Frequency (MHz)	Peak Conducted Output Power (dBm)	E.I.R.P (dBm)	Conclusion
LE-1M	2402 (CH0)	5.54	8.30	P
	2440 (CH19)	5.52	8.28	P
	2480 (CH39)	4.93	7.69	P
LE-2M	2402 (CH0)	5.42	8.18	P
	2440 (CH19)	5.47	8.23	P
	2480 (CH39)	4.91	7.67	P

Note: E.I.R.P value = Conducted values (with conducted samples) + Antenna Gain.

Conclusion: Pass

A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247 (e) & RSS-247 section 5.2	< 8 dBm/3 kHz

Measurement Results:

Mode	Frequency (MHz)	Peak Power Spectral Density (dBm)		Conclusion
LE-1M	2402 (CH0)	Fig.1	-9.66	P
	2440 (CH19)	Fig.2	-9.49	P
	2480 (CH39)	Fig.3	-10.09	P
LE-2M	2402 (CH0)	Fig.4	-13.91	P
	2440 (CH19)	Fig.5	-13.80	P
	2480 (CH39)	Fig.6	-14.39	P

See below for test graphs.

Conclusion: PASS

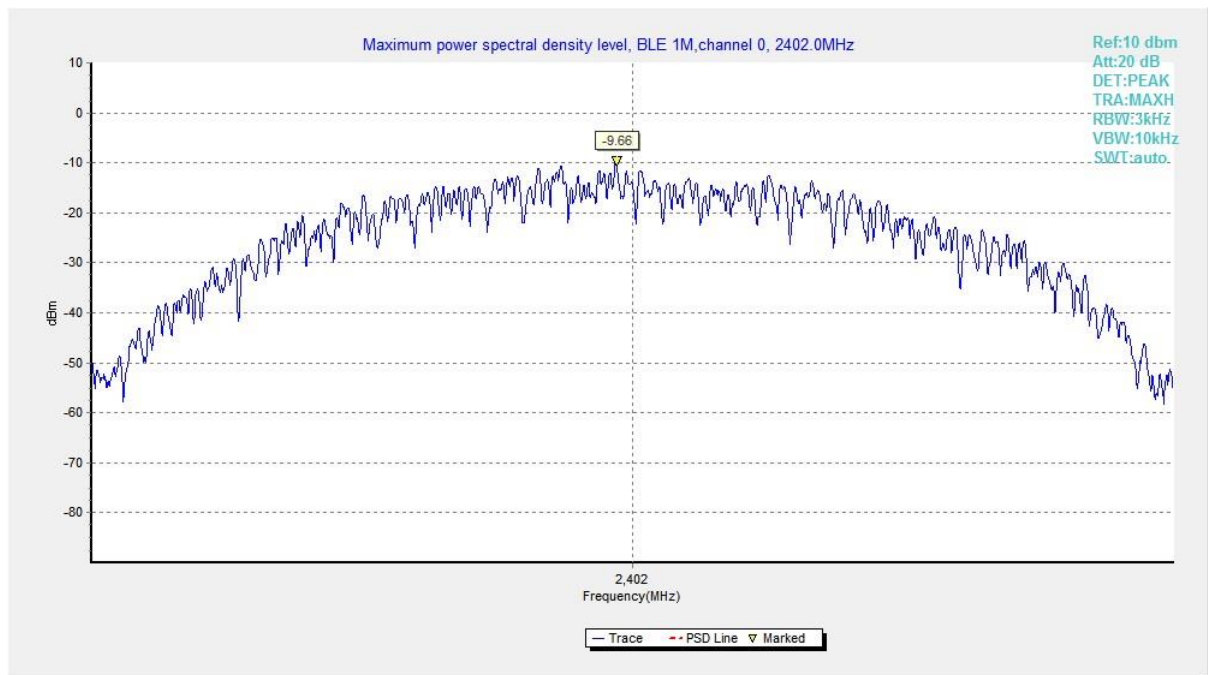


Fig.1 Power Spectral Density (Ch 0), LE 1M

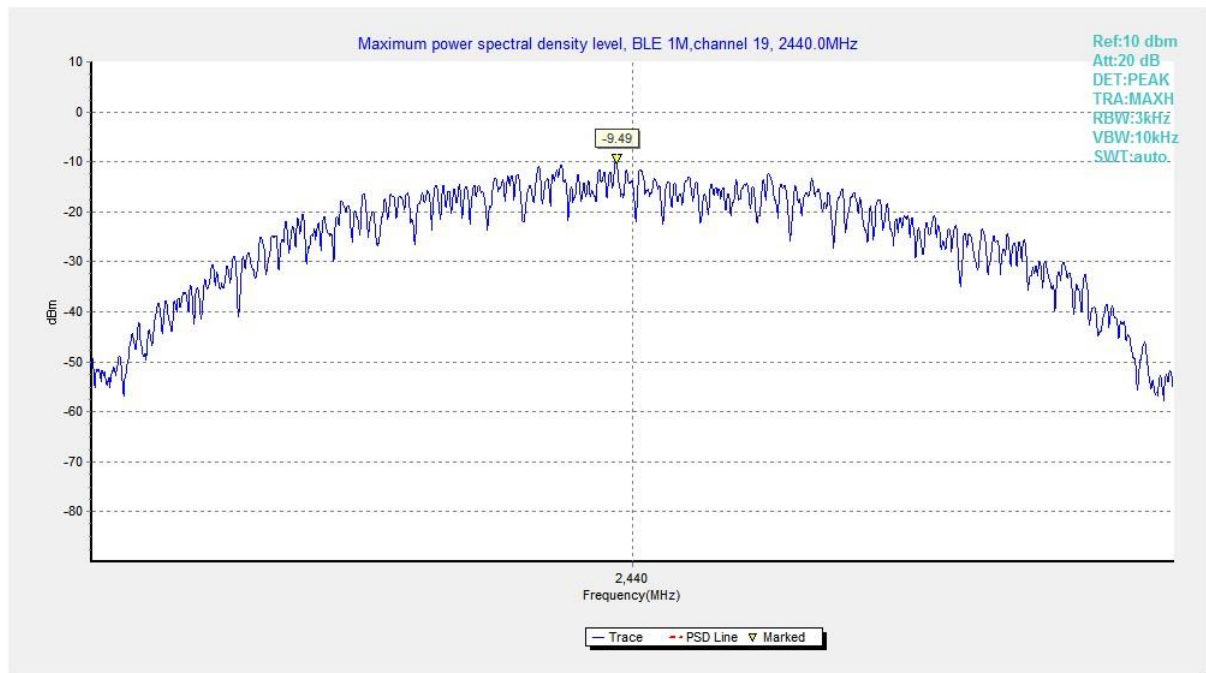


Fig.2 Power Spectral Density (Ch 19), LE 1M

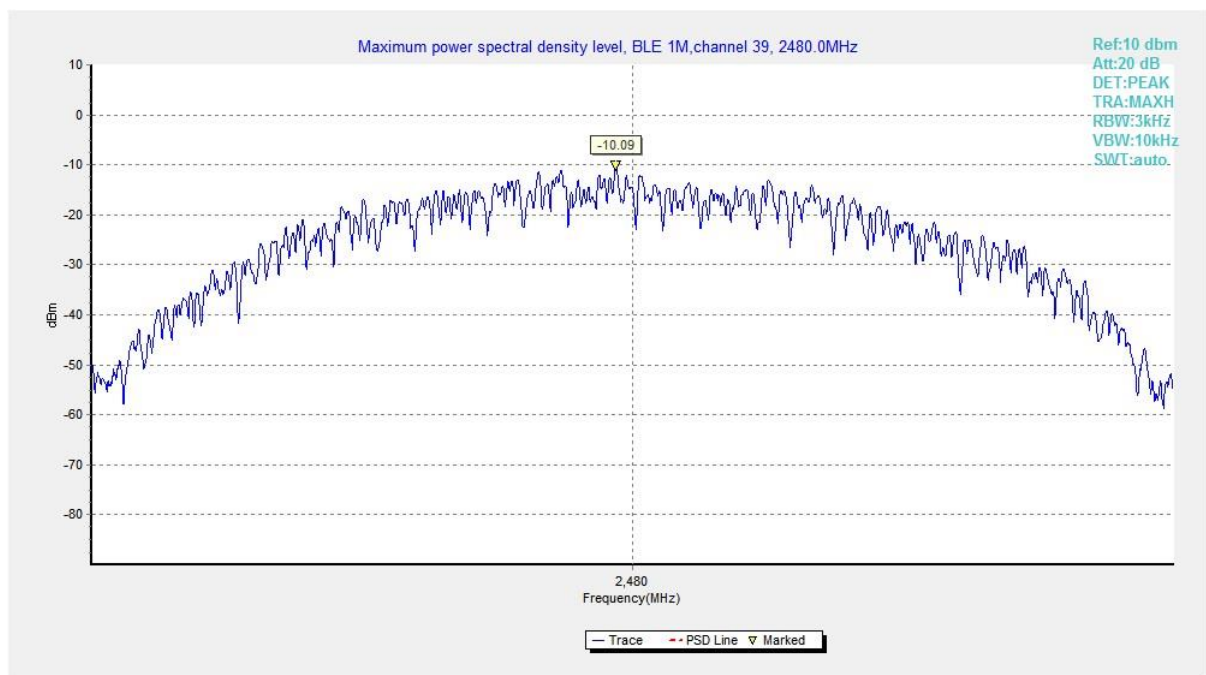


Fig.3 Power Spectral Density (Ch 39), LE 1M

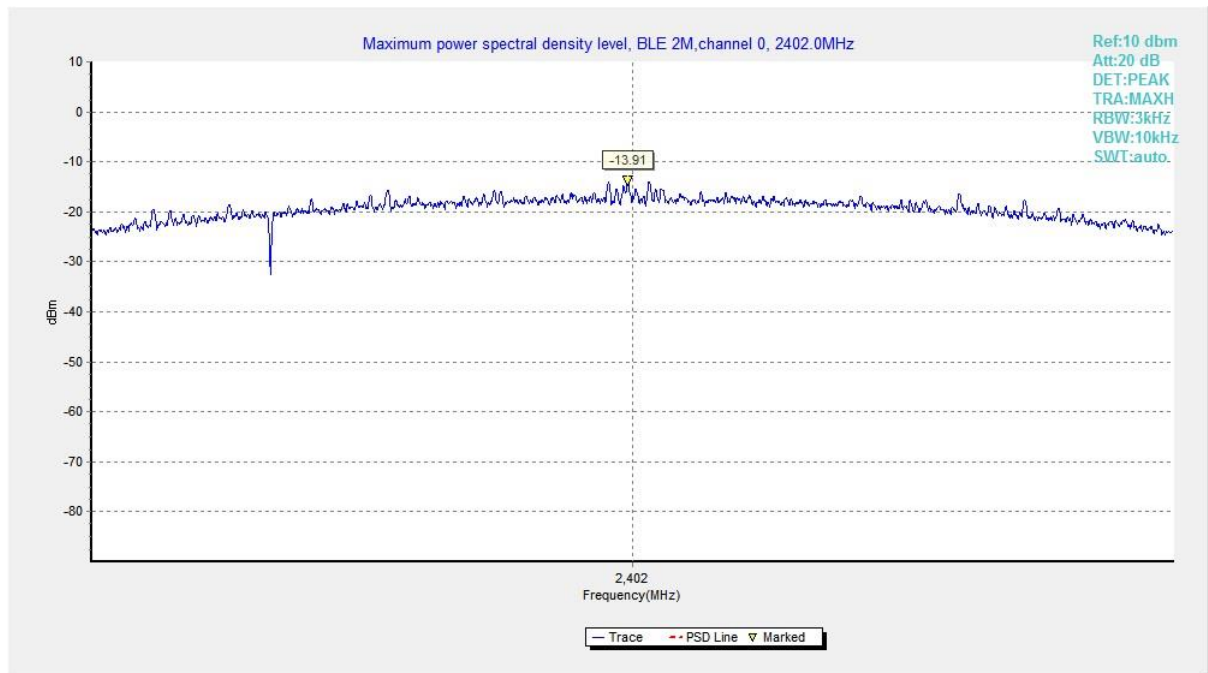


Fig.4 Power Spectral Density (Ch 0), LE 2M

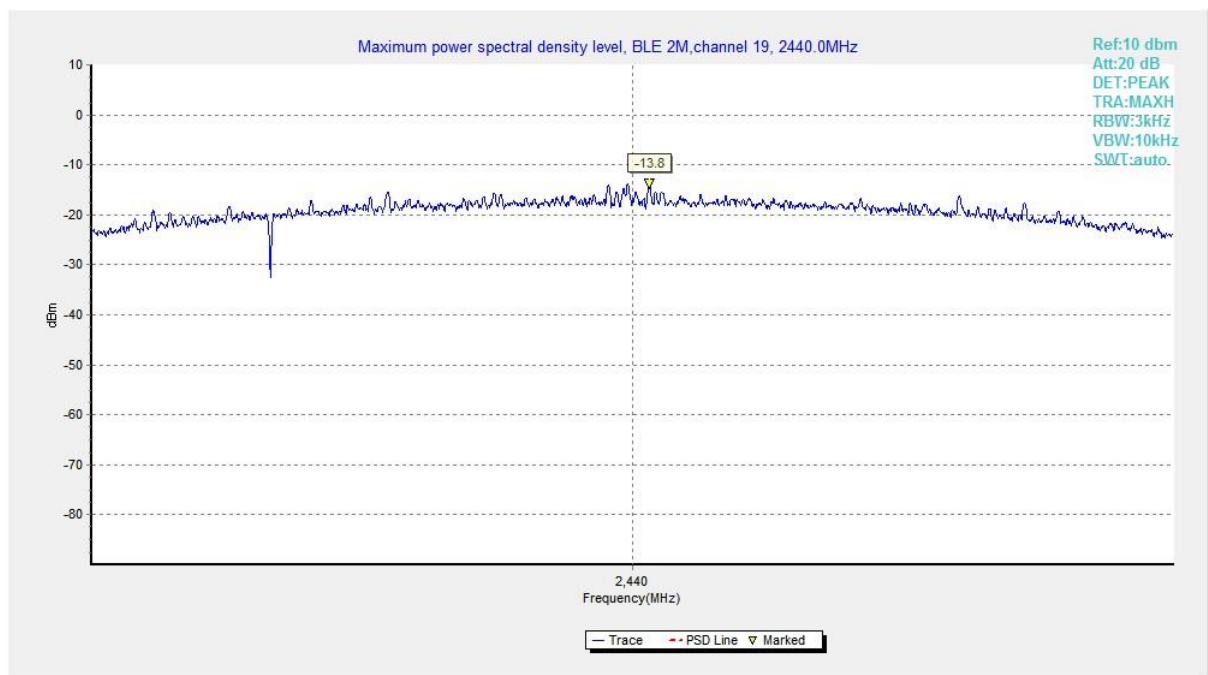


Fig.5 Power Spectral Density (Ch 19), LE 2M

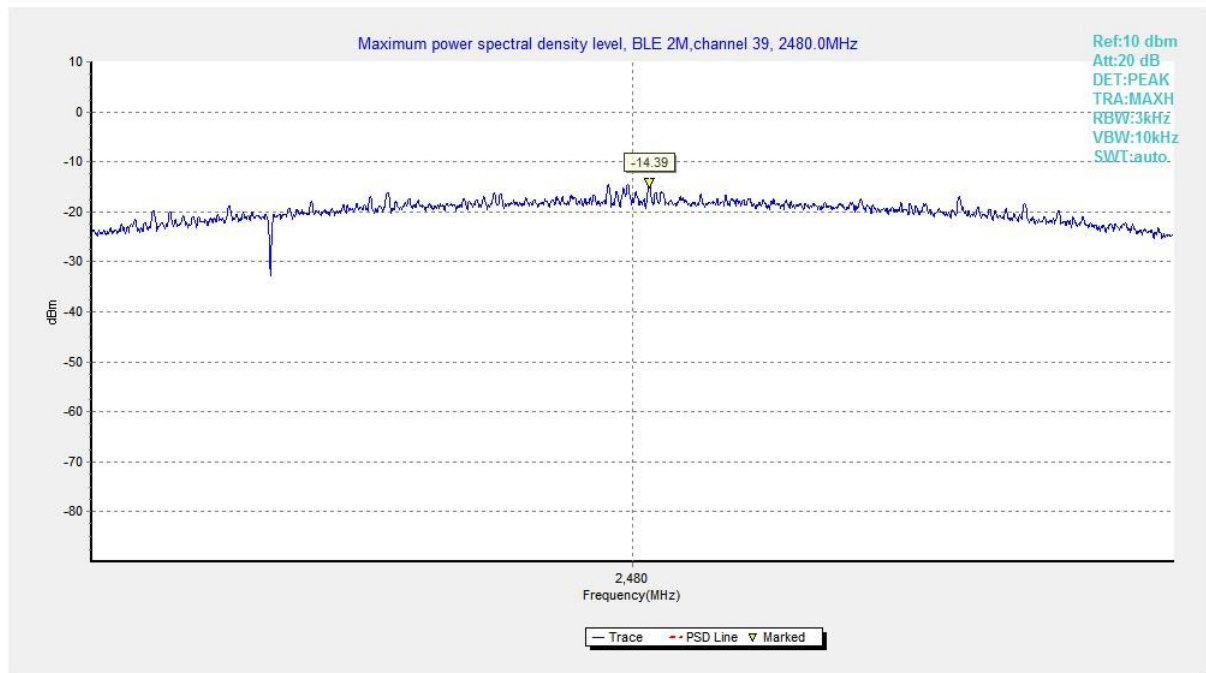


Fig.6 Power Spectral Density (Ch 39), LE 2M

A.3 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) & RSS-247 section 5.2	≥ 500

Measurement Result:

Mode	Frequency (MHz)	Test Results (kHz)		Conclusion
LE-1M	2402 (CH0)	Fig.7	669.50	P
	2440 (CH19)	Fig.8	669.50	P
	2480 (CH39)	Fig.9	667.50	P
LE-2M	2402 (CH0)	Fig.10	1153.00	P
	2440 (CH19)	Fig.11	1157.50	P
	2480 (CH39)	Fig.12	1156.50	P

See below for test graphs.

Conclusion: PASS

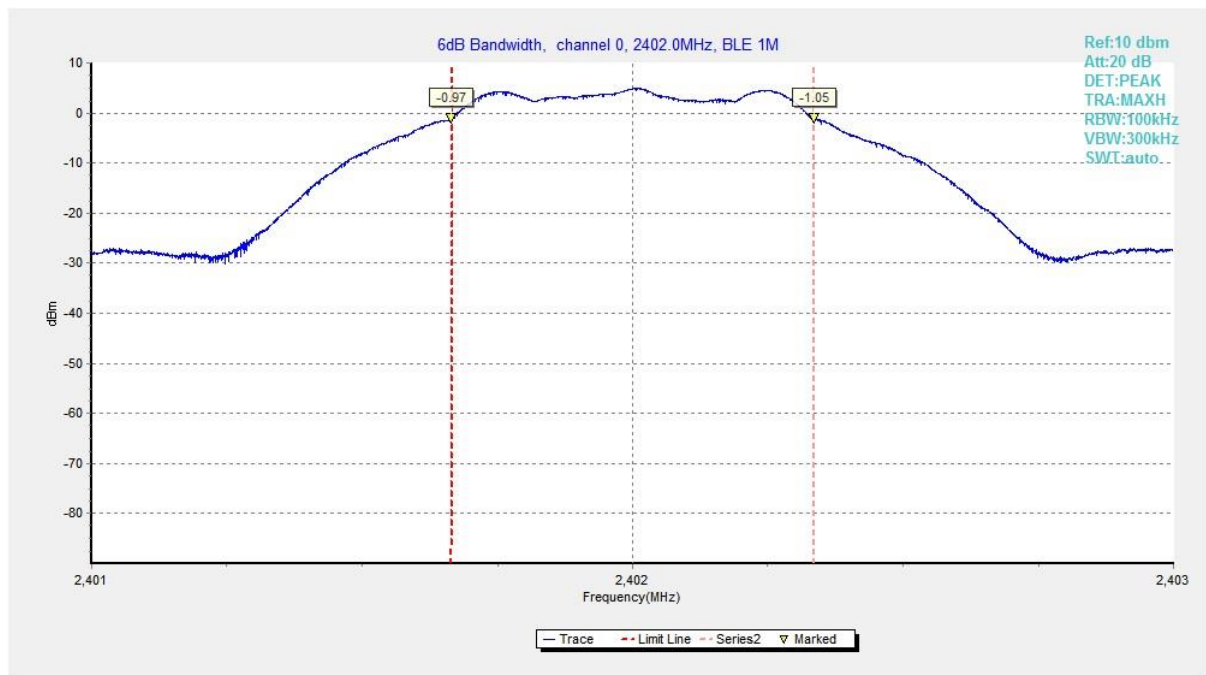


Fig.7 6dB Bandwidth (Ch 0), LE 1M

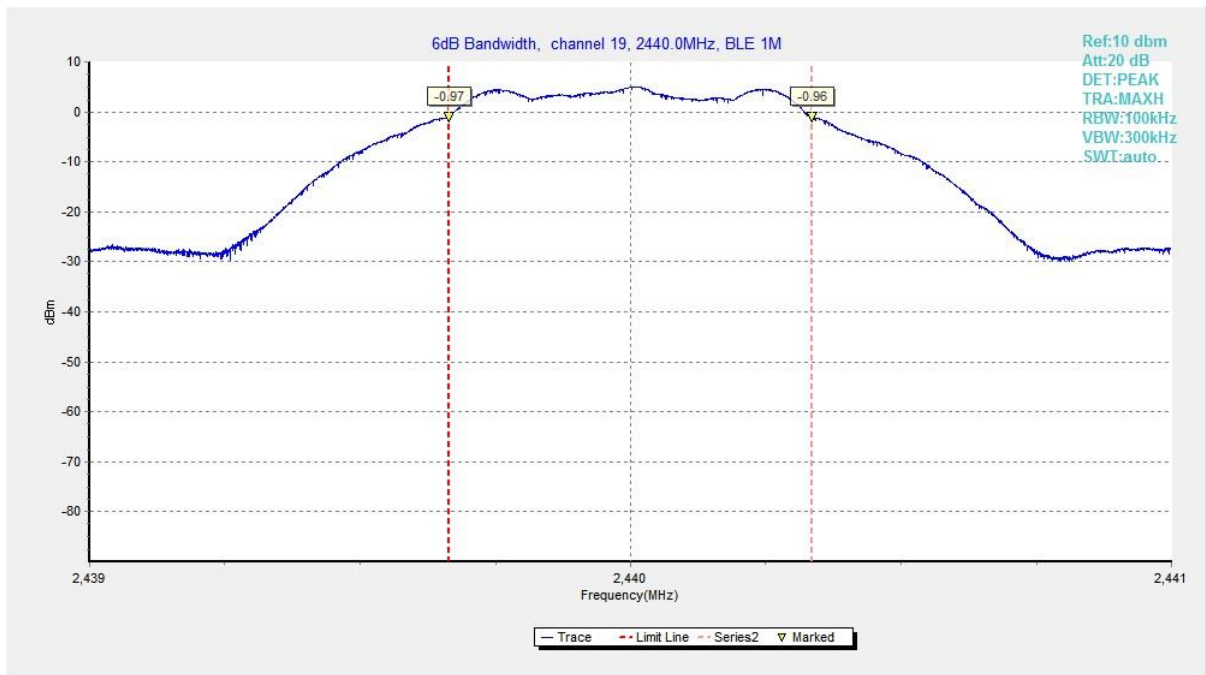


Fig.8 6dB Bandwidth (Ch 19), LE 1M

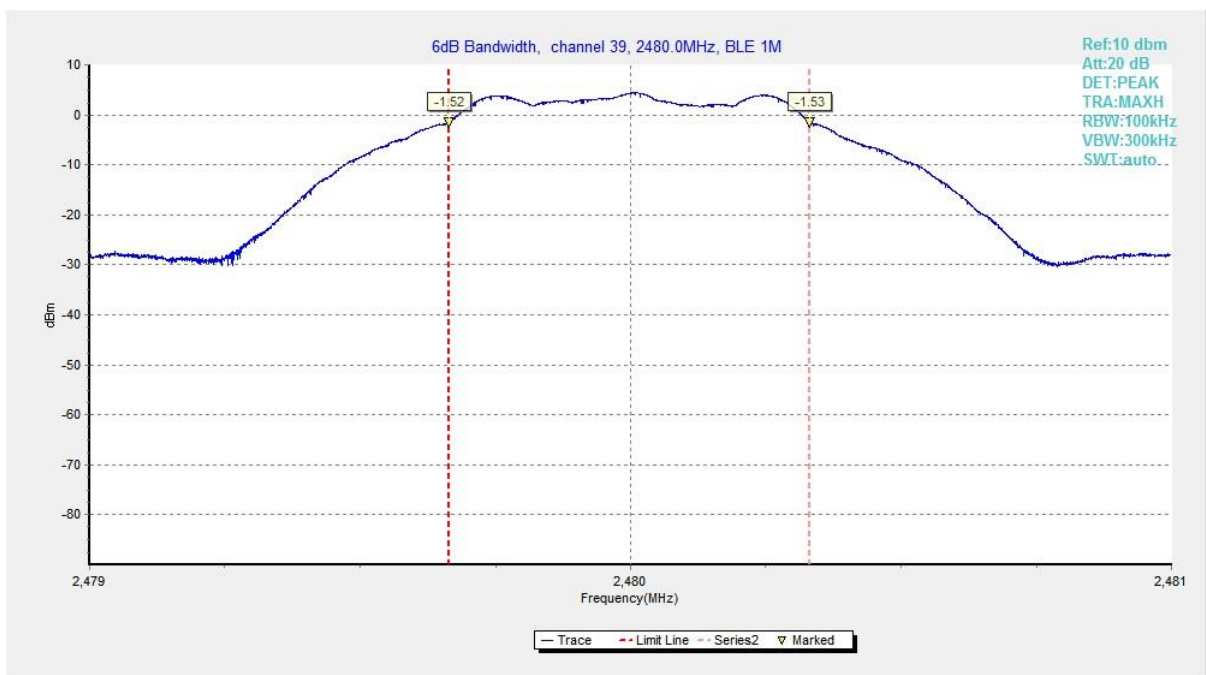


Fig.9 6dB Bandwidth (Ch 39), LE 1M

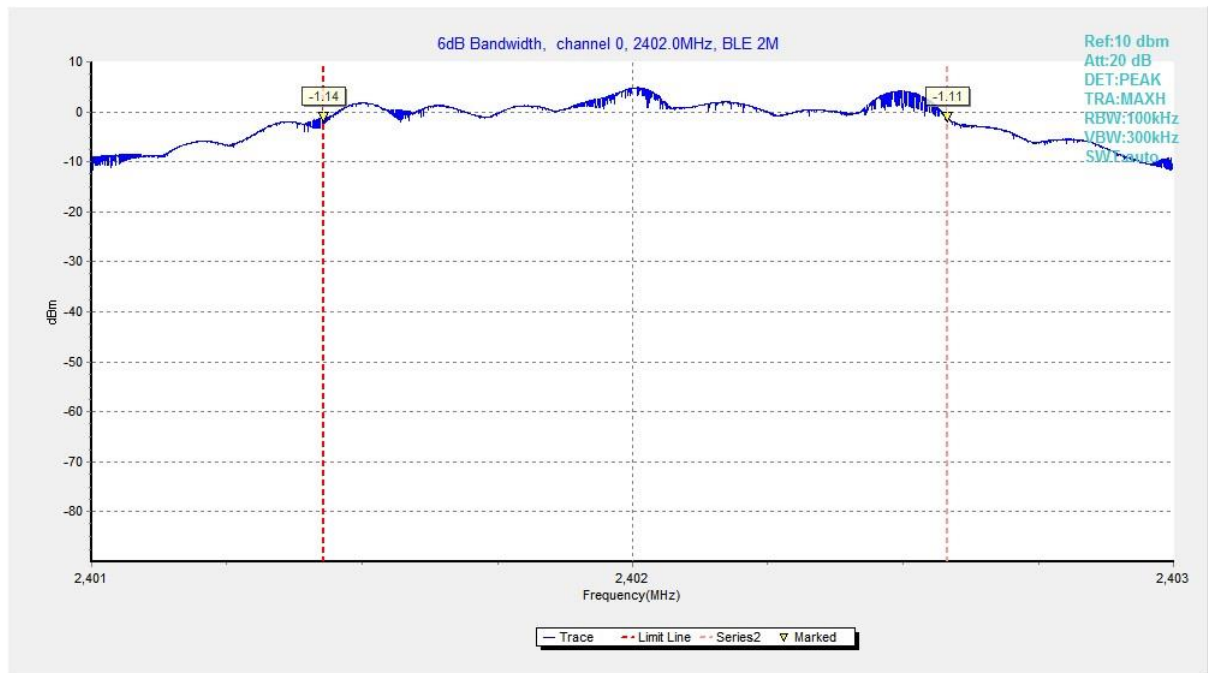


Fig.10 6dB Bandwidth (Ch 0), LE 2M

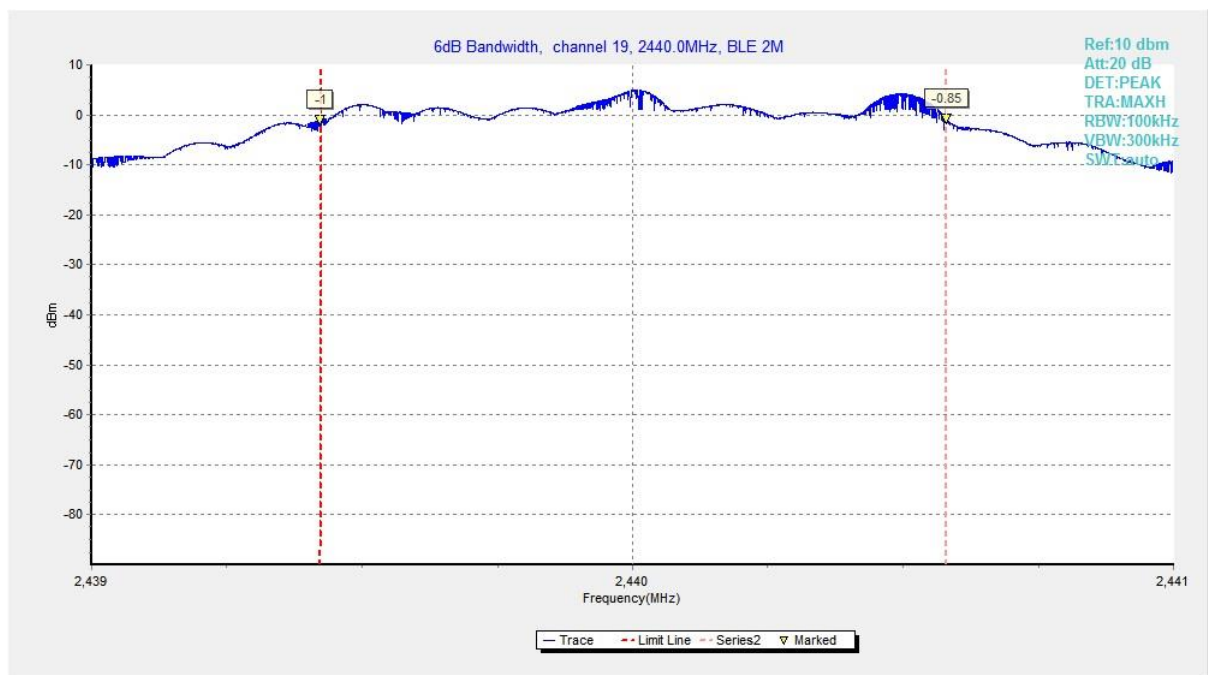


Fig.11 6dB Bandwidth (Ch 19), LE 2M

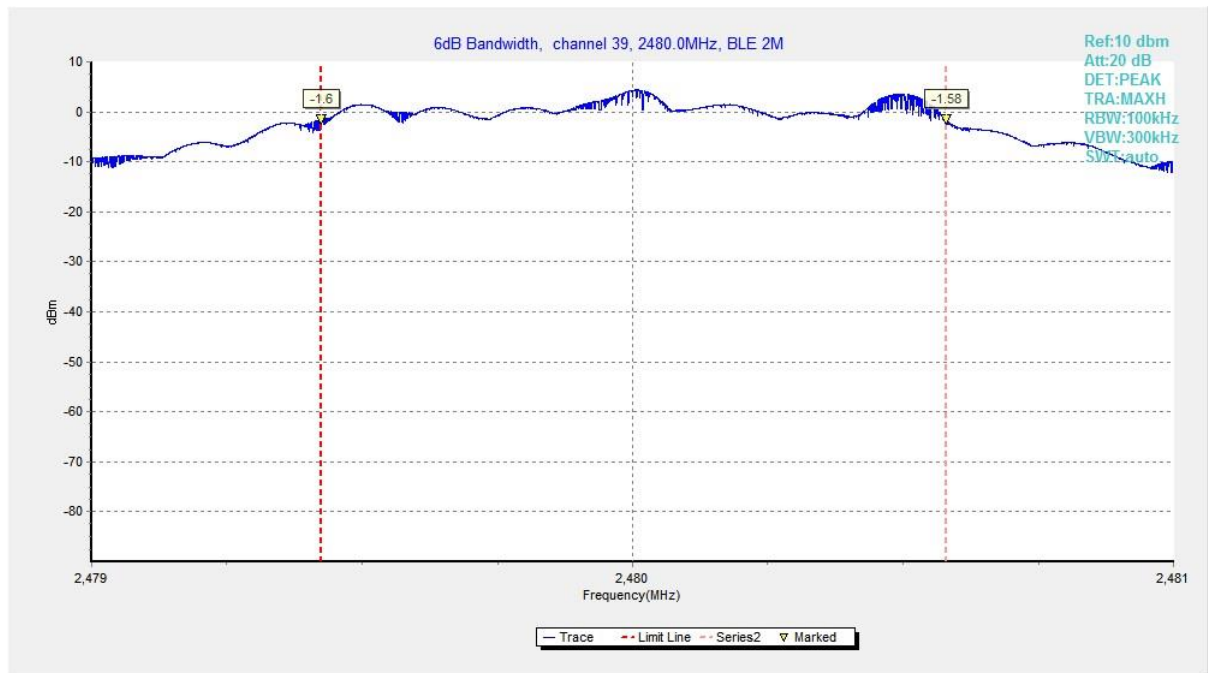


Fig.12 6dB Bandwidth (Ch 39), LE 2M

**A.4 Band Edges Compliance****Measurement Limit:**

Standard	Limit (dB)
FCC 47 CFR Part 15.247 (d) & RSS-247 section 5.5	> 20

Measurement Result:

Mode	Frequency (MHz)	Test Results (dB)		Conclusion
LE-1M	2402 (CH0)	Fig.13	59.41	P
	2480 (CH39)	Fig.14	64.00	P
LE-2M	2402 (CH0)	Fig.15	43.79	P
	2480 (CH39)	Fig.16	59.16	P

See below for test graphs.

Conclusion: Pass

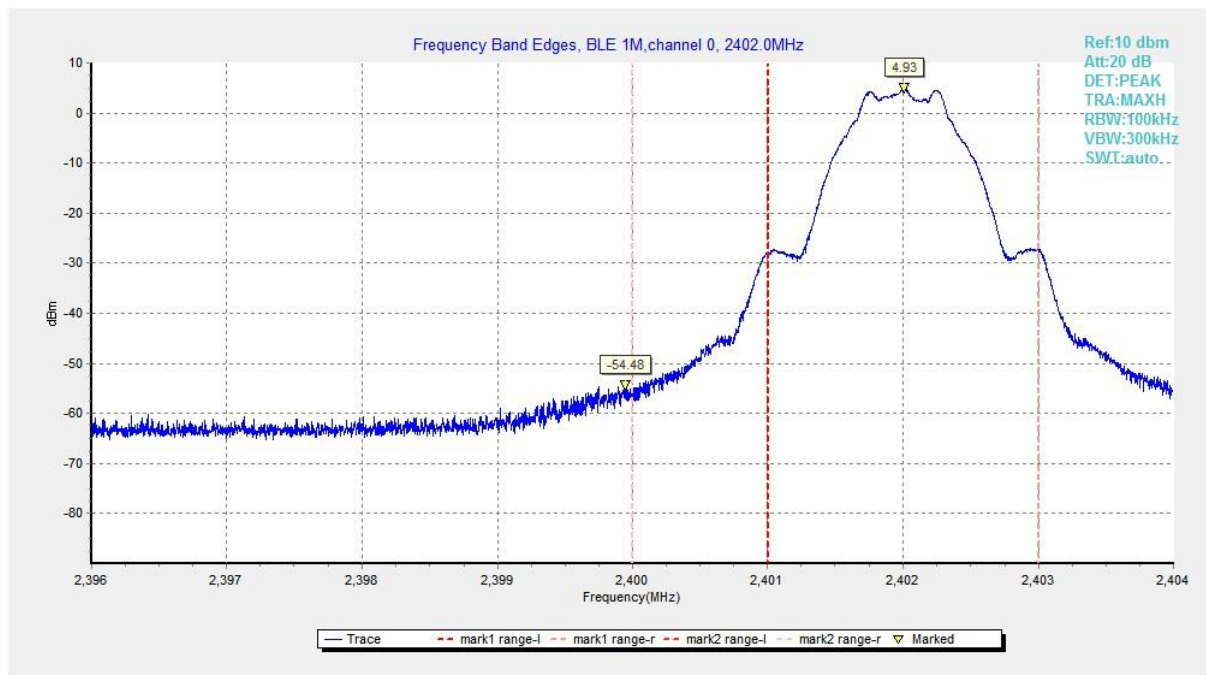


Fig.13 Band Edges (Ch 0), LE 1M

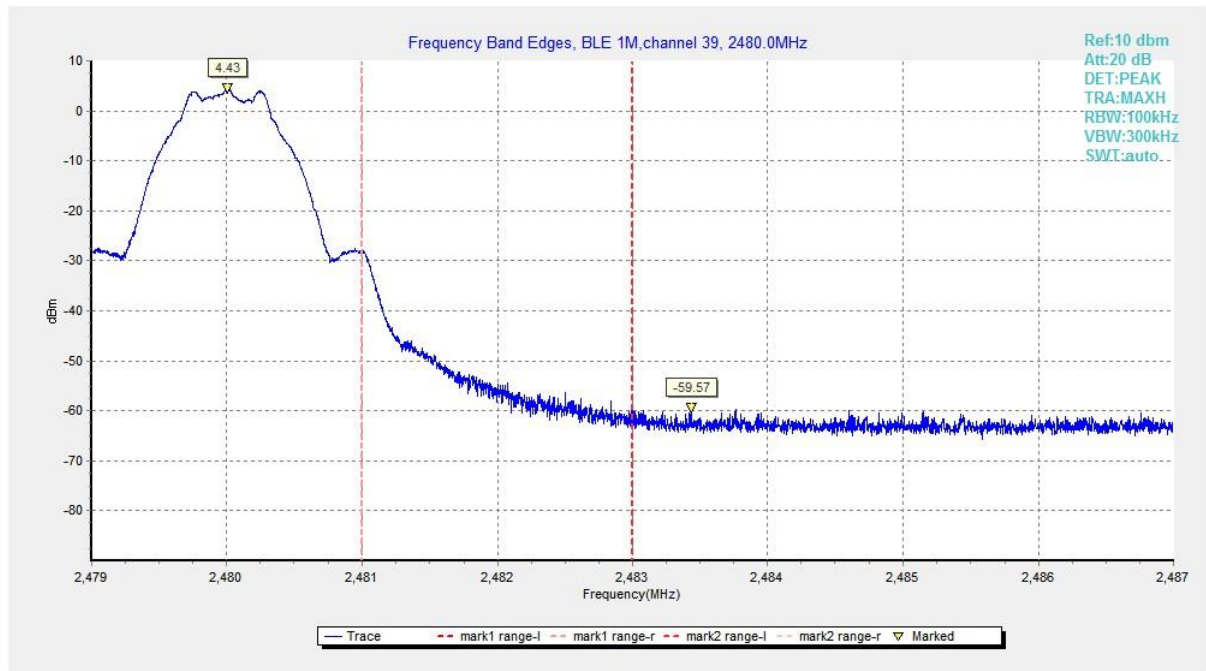


Fig.14 Band Edges (Ch 39), LE 1M

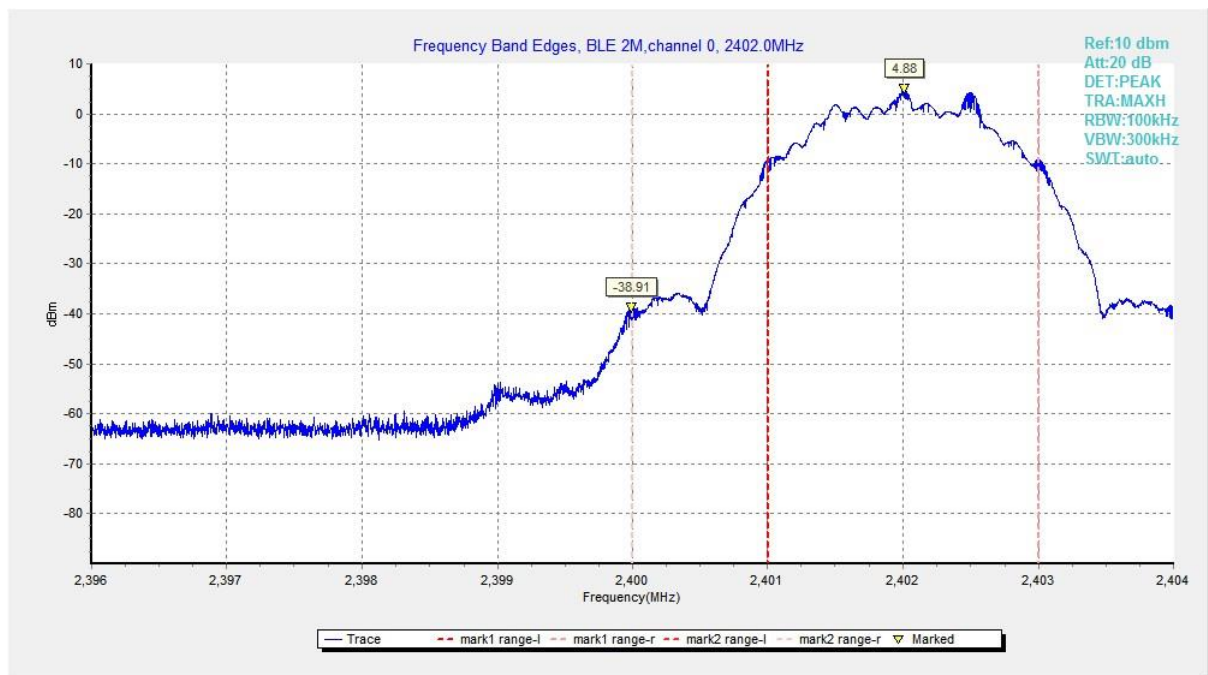


Fig.15 Band Edges (Ch 0), LE 2M

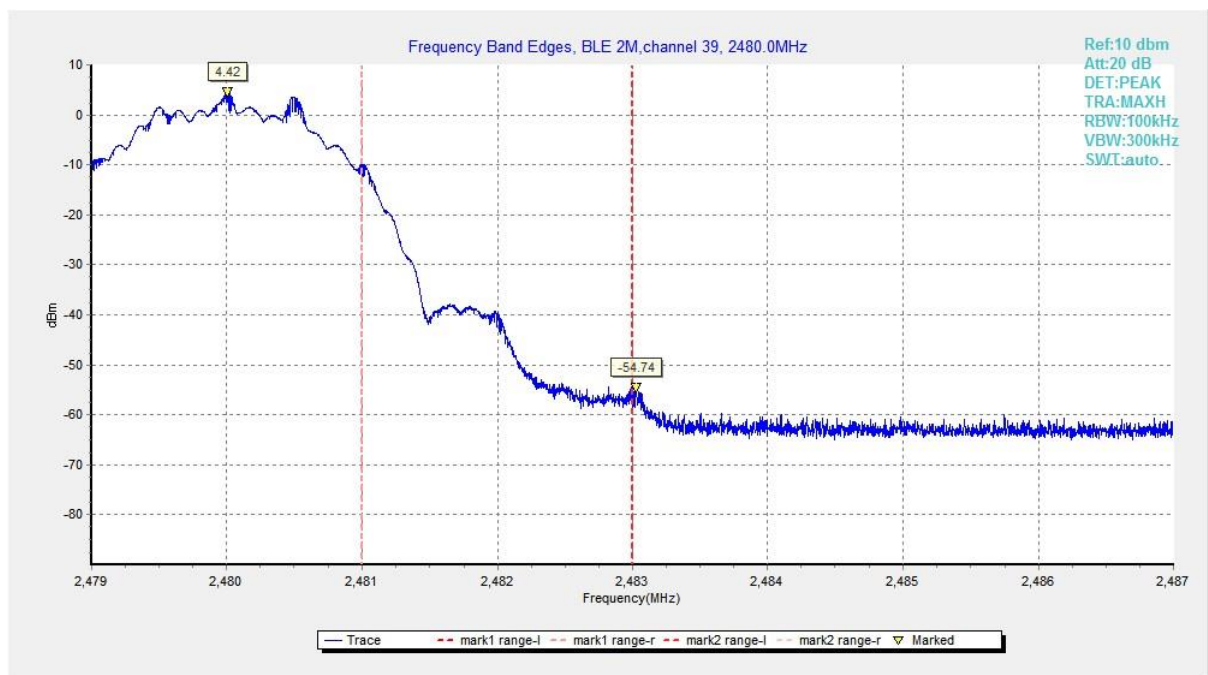


Fig.16 Band Edges (Ch 39), LE 2M

A.5 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) & RSS-247 section 5.5/RSS-Gen section 6.13	20dB below peak output power in 100kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
LE-1M	0	1 GHz ~ 3 GHz	Fig.17	P
		3 GHz ~ 10 GHz	Fig.18	P
	19	1 GHz ~ 3 GHz	Fig.19	P
		3 GHz ~ 10 GHz	Fig.20	P
	39	1 GHz ~ 3 GHz	Fig.21	P
		3 GHz ~ 10 GHz	Fig.22	P
	All channels	30 MHz ~ 1 GHz	Fig.23	P
		10 GHz ~ 26 GHz	Fig.24	P
LE-2M	0	1 GHz ~ 3 GHz	Fig.25	P
		3 GHz ~ 10 GHz	Fig.26	P
	19	1 GHz ~ 3 GHz	Fig.27	P
		3 GHz ~ 10 GHz	Fig.28	P
	39	1 GHz ~ 3 GHz	Fig.29	P
		3 GHz ~ 10 GHz	Fig.30	P
	All channels	30 MHz ~ 1 GHz	Fig.31	P
		10 GHz ~ 26 GHz	Fig.32	P

See below for test graphs.

Conclusion: Pass

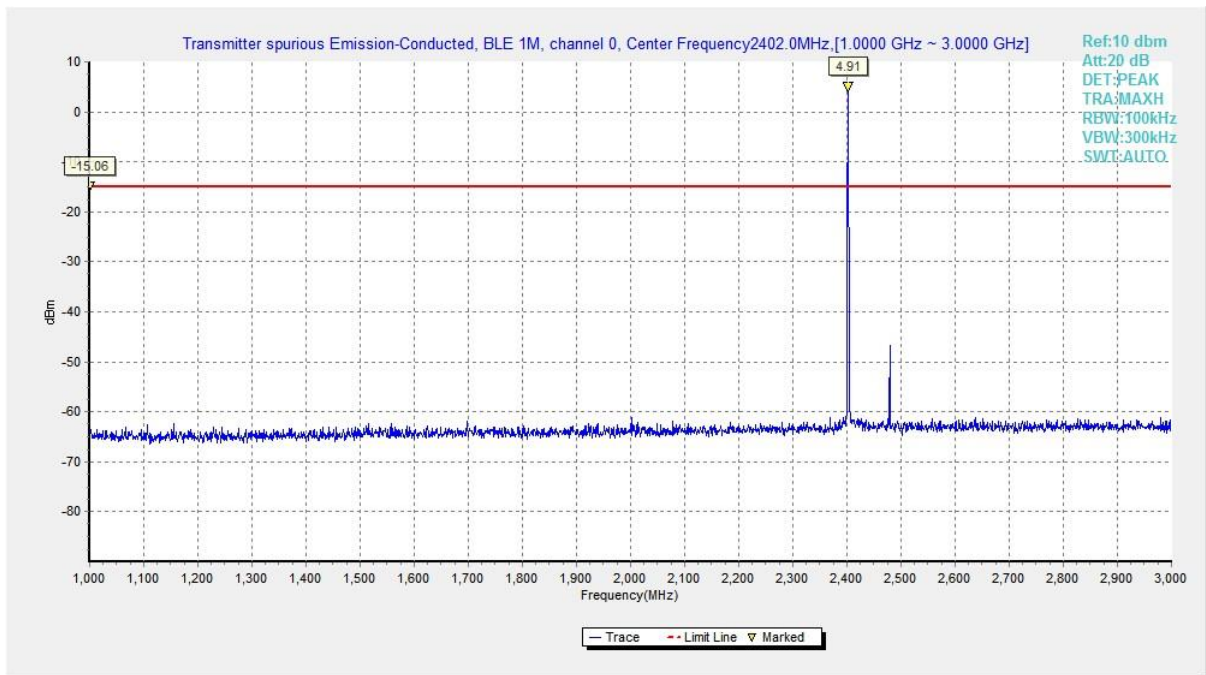


Fig.17 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 1M

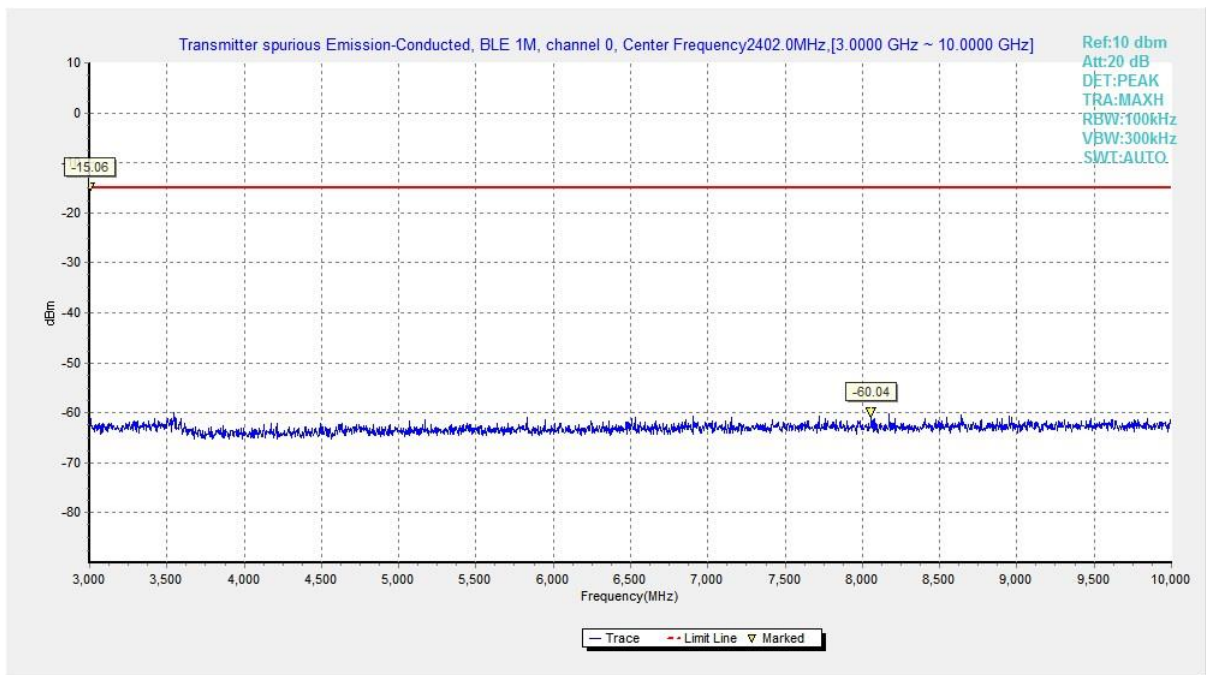


Fig.18 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 1M

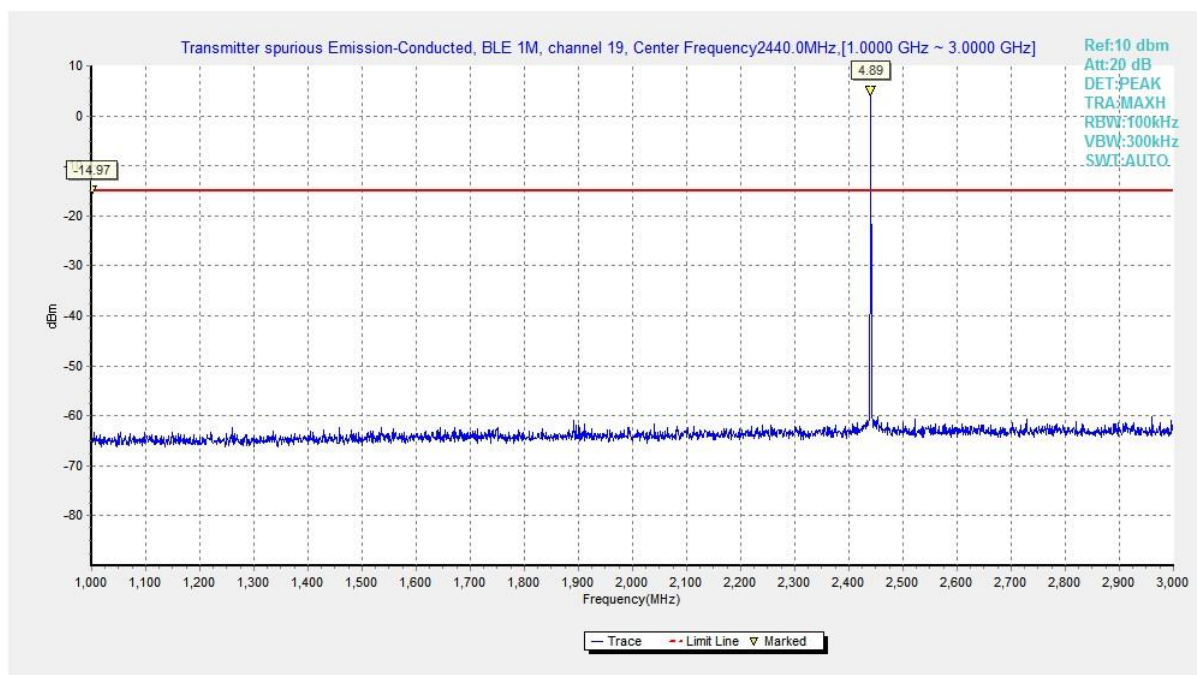


Fig.19 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 1M

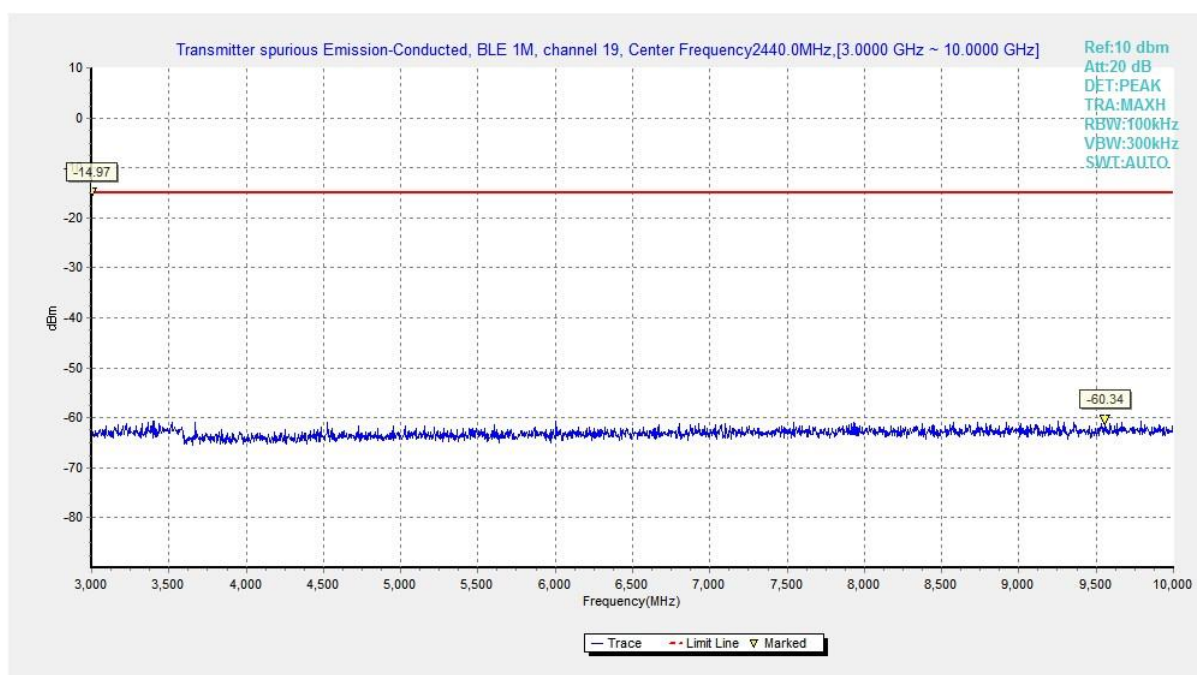


Fig.20 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 1M

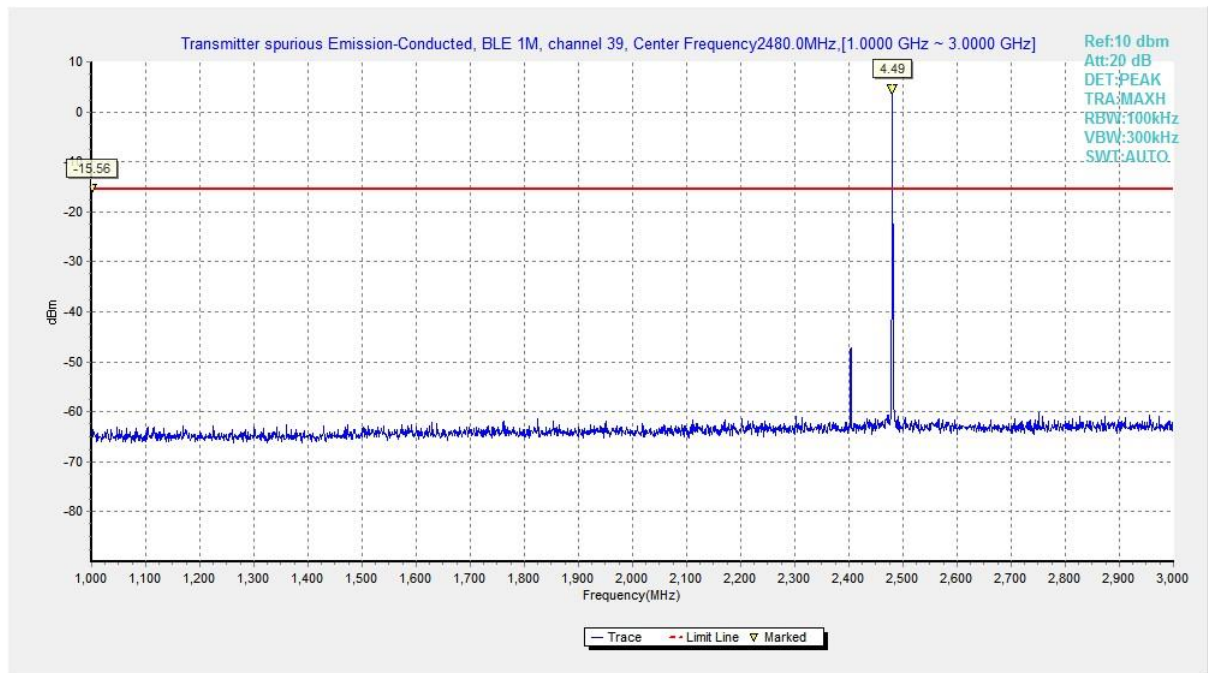


Fig.21 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE 1M

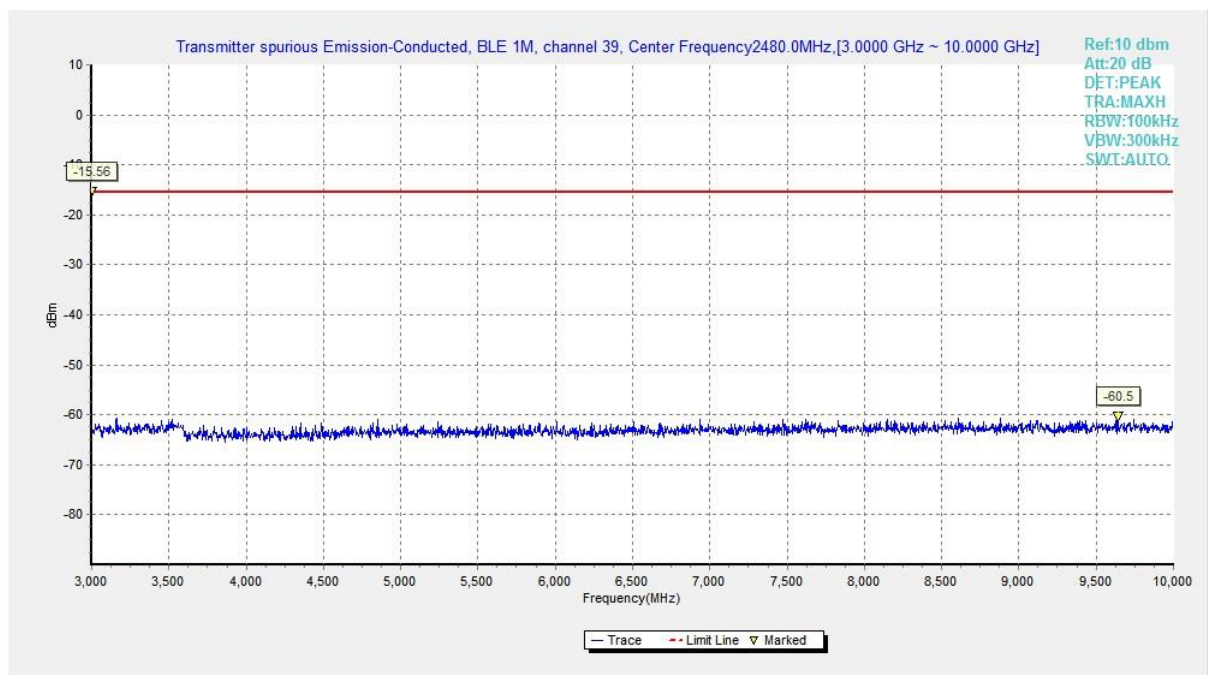


Fig.22 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE 1M

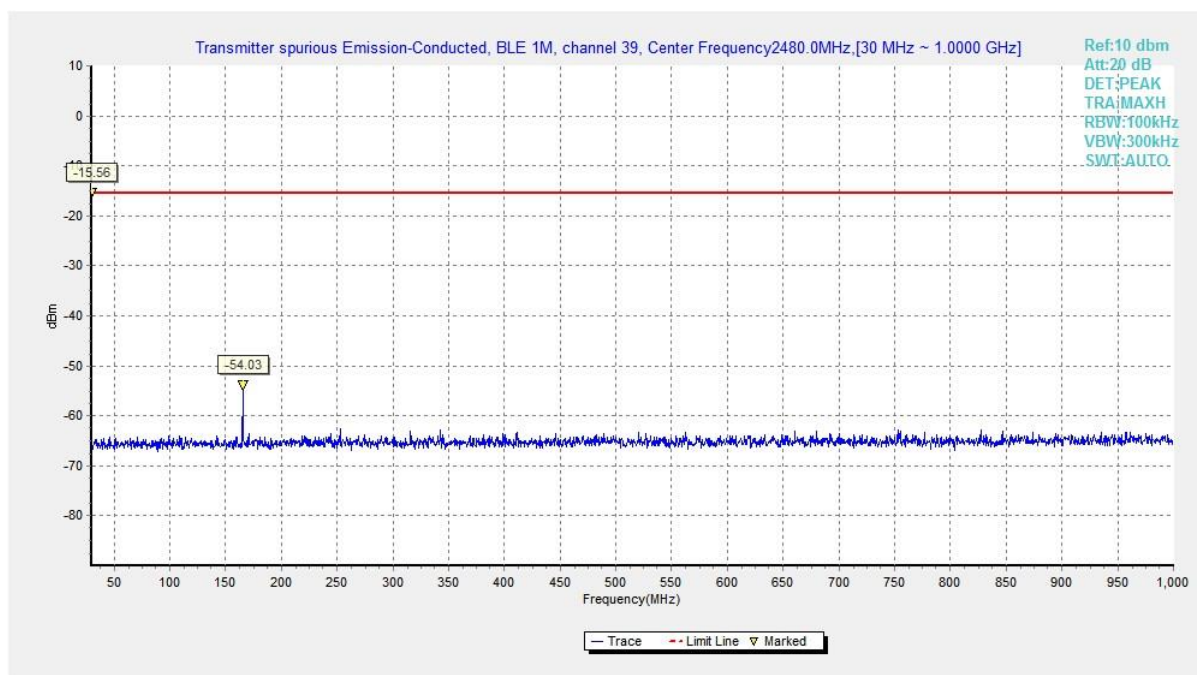


Fig.23 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE 1M

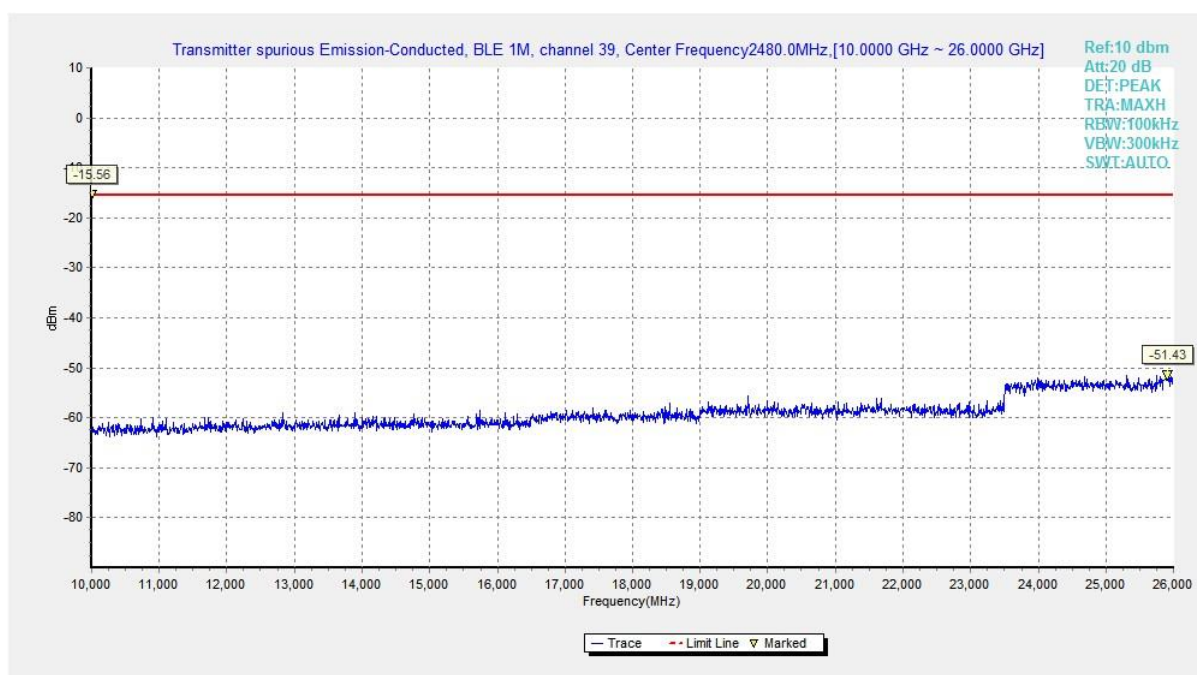


Fig.24 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE 1M

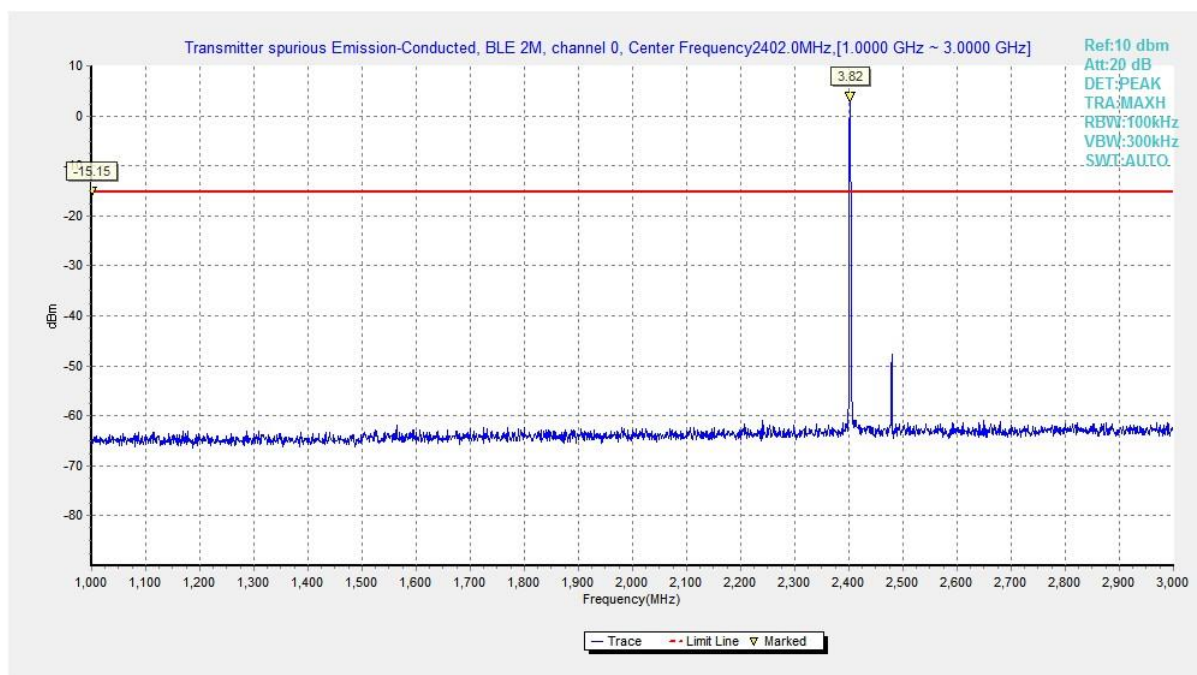


Fig.25 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 2M

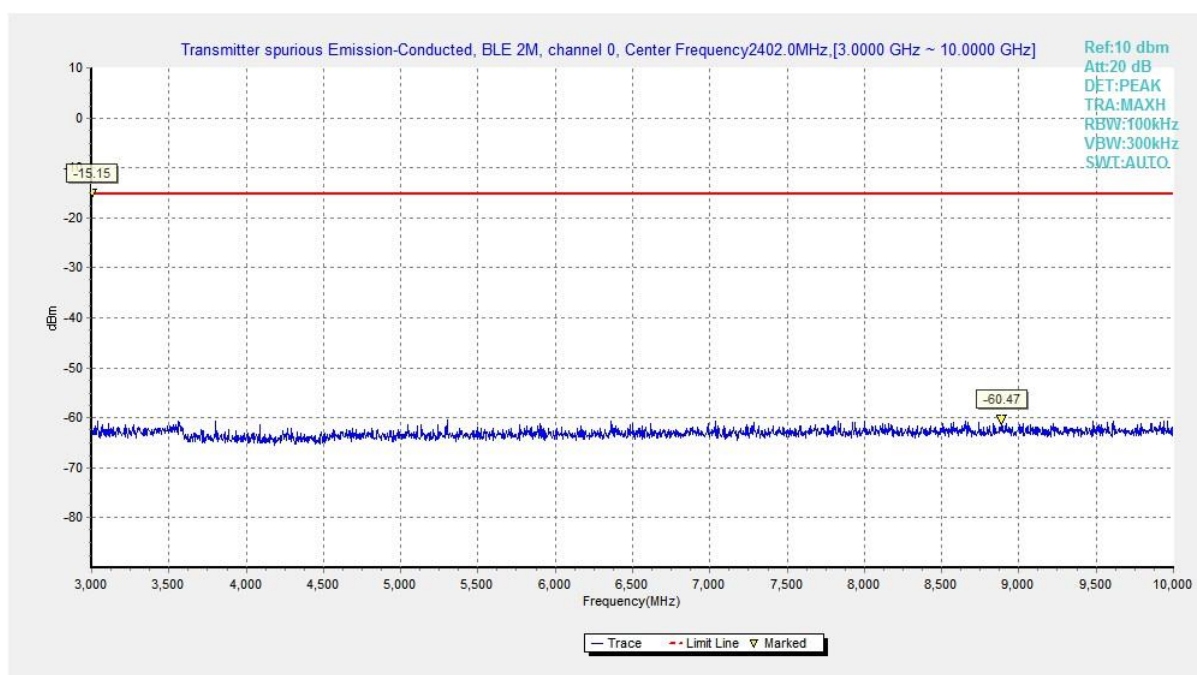


Fig.26 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 2M

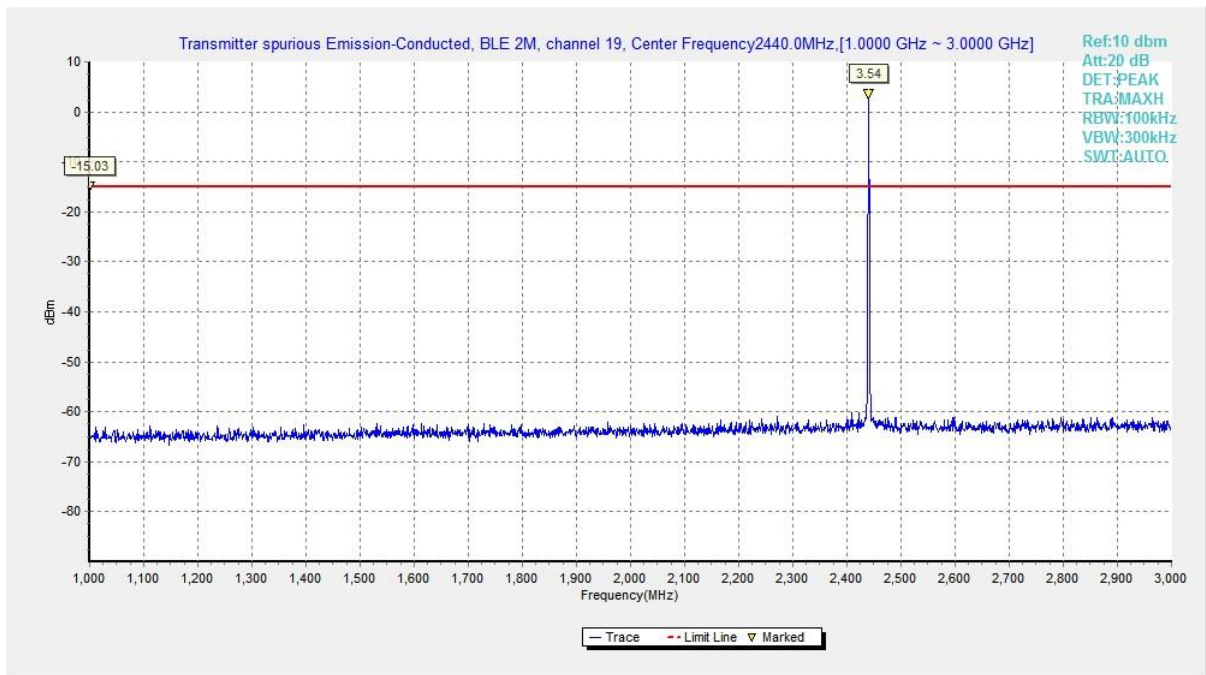


Fig.27 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 2M

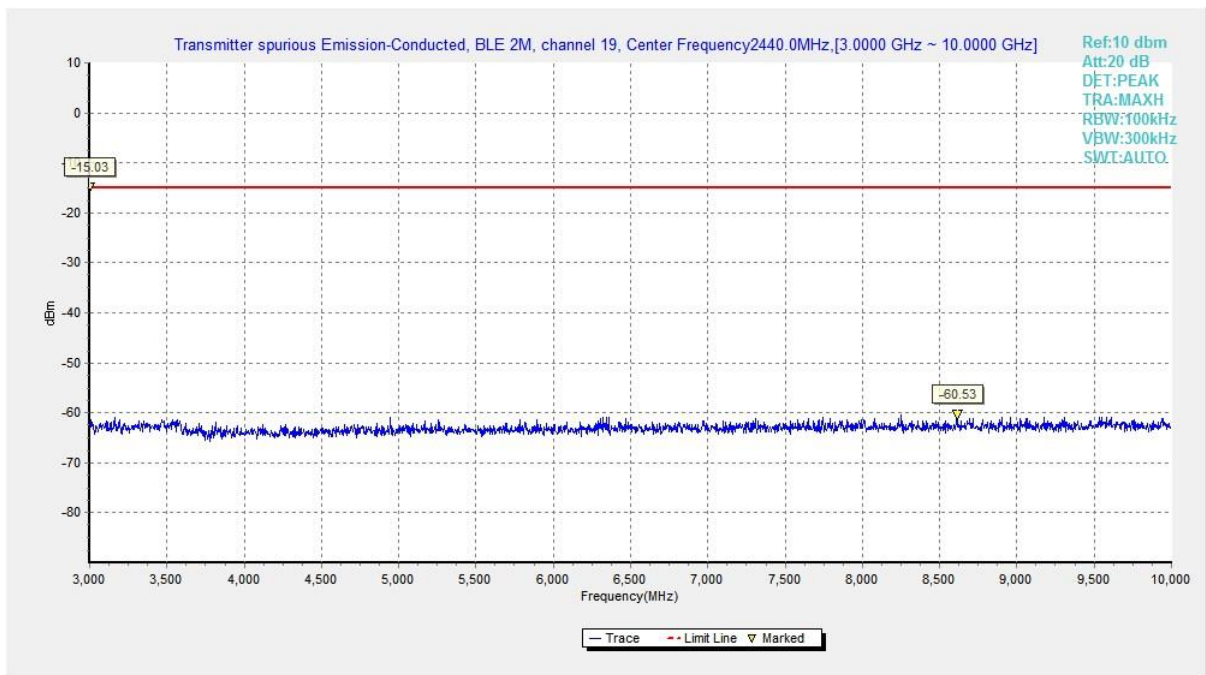


Fig.28 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 2M

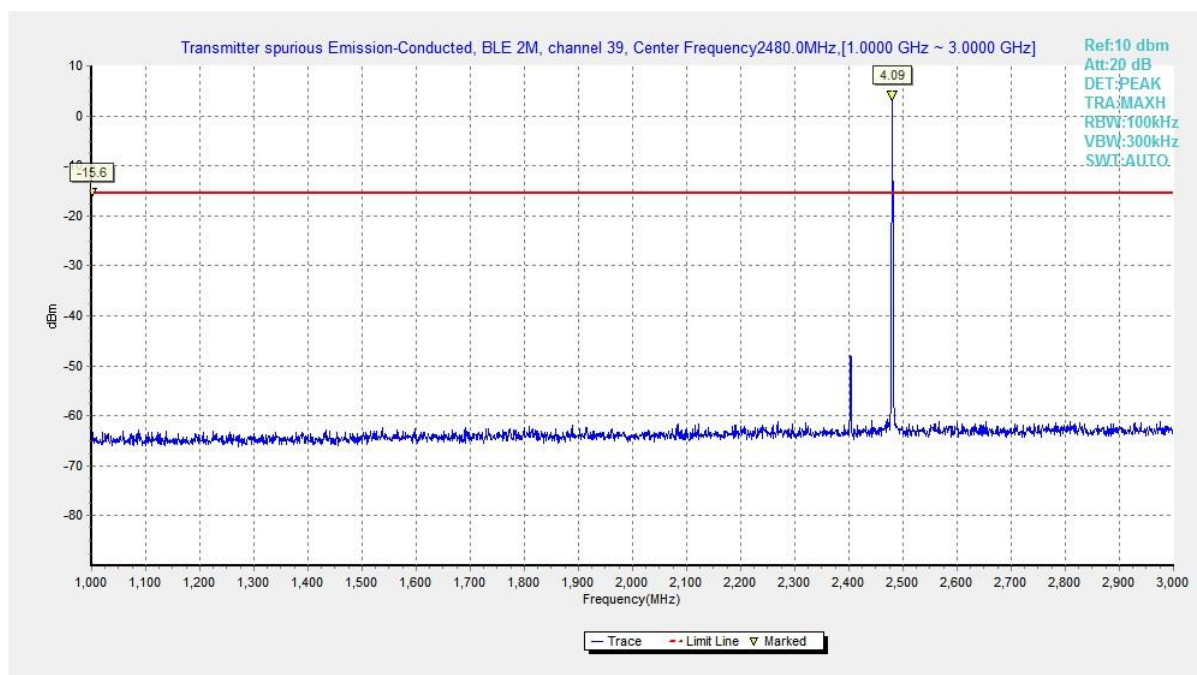


Fig.29 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE 2M

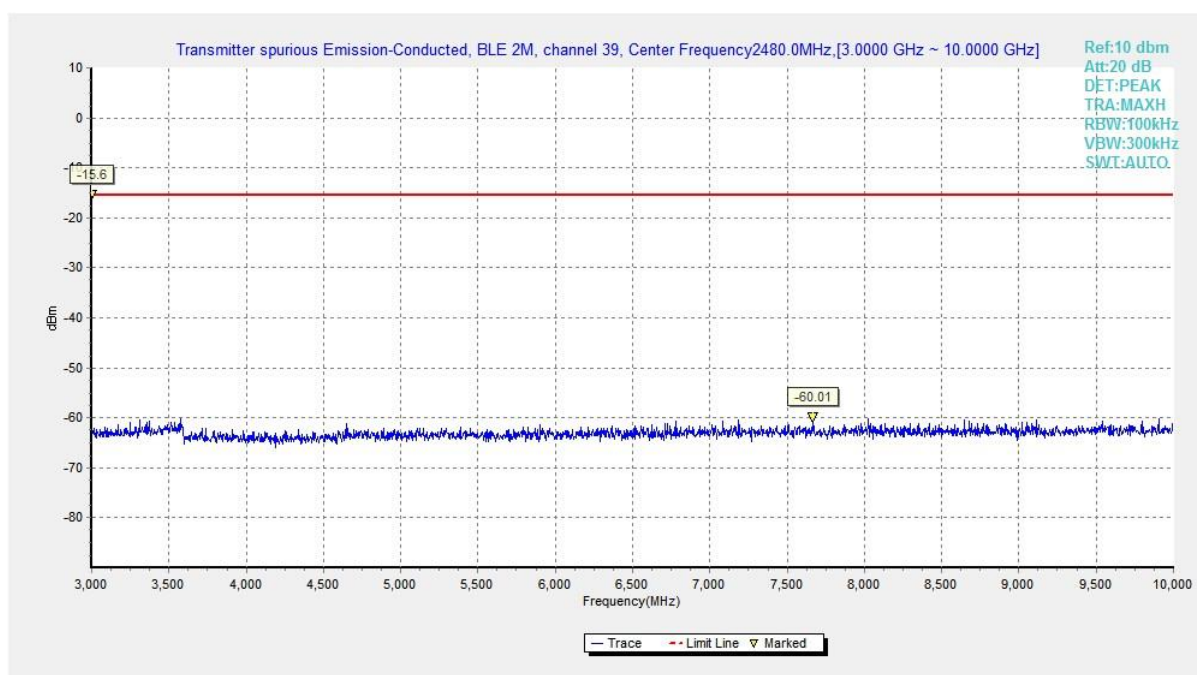


Fig.30 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE 2M

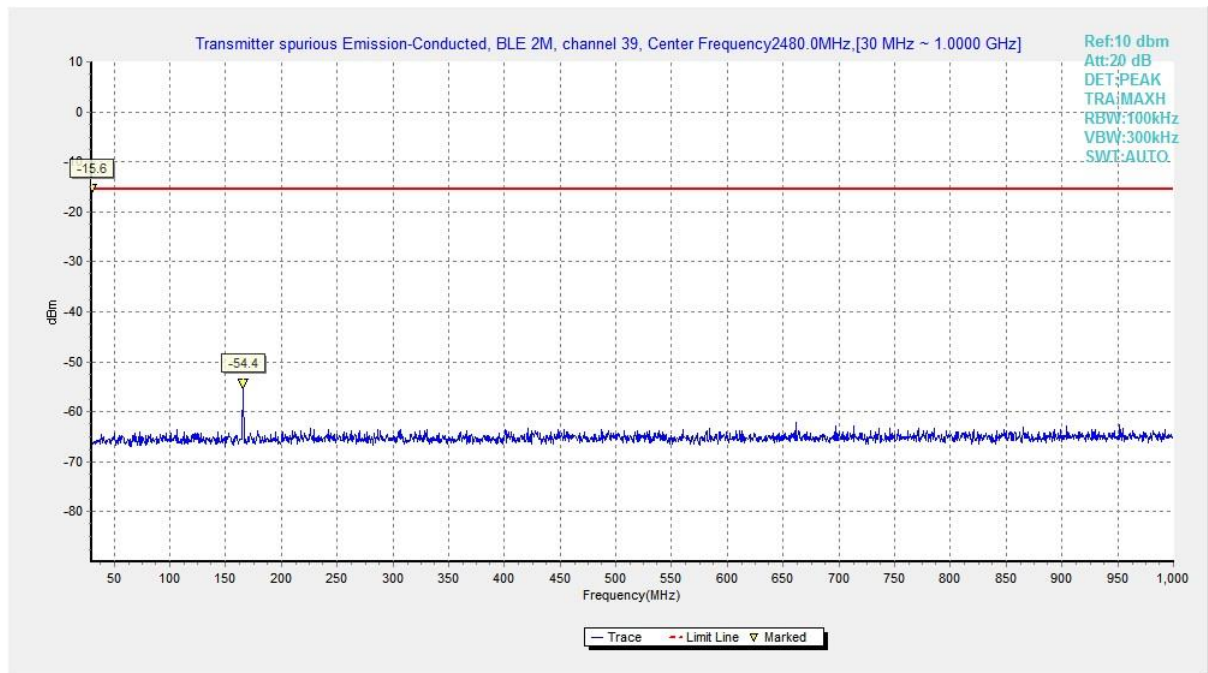


Fig.31 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE 2M

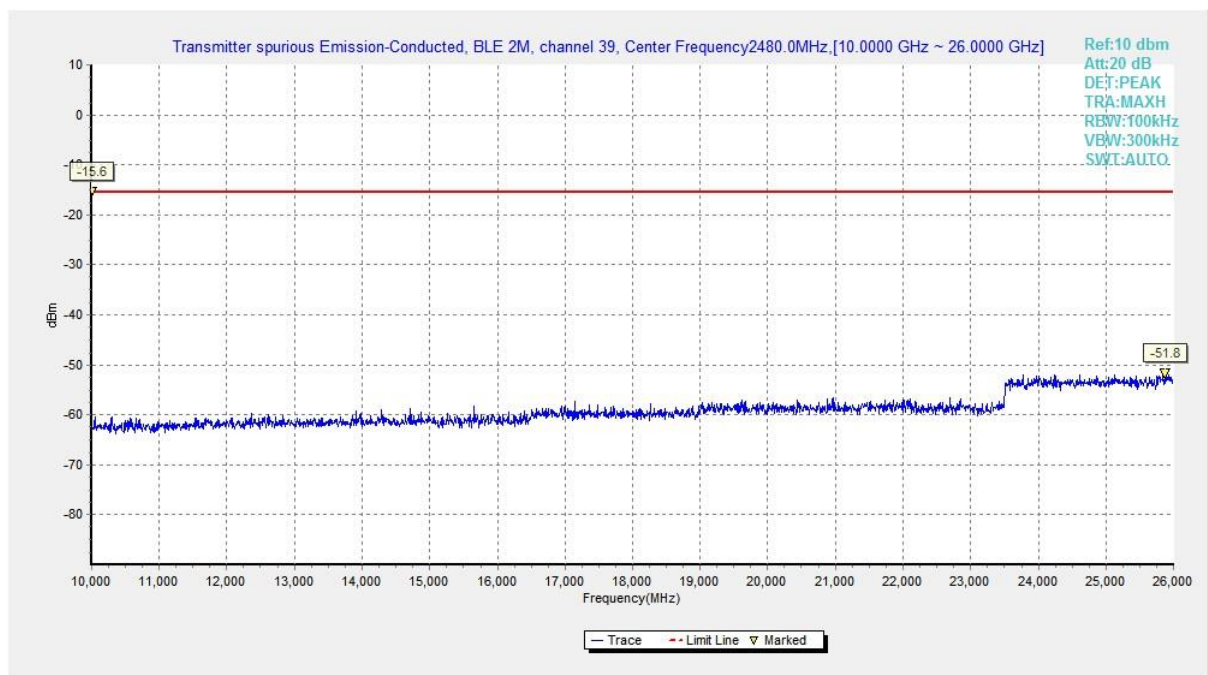


Fig.32 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE 2M

A.6 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 & RSS-247 section 5.5/RSS-Gen section 6.13	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
LE-1M	0	1 GHz ~ 18 GHz	Fig.33	P
	19	9 kHz ~ 30 MHz	Fig.34	P
		30 MHz ~ 1 GHz	Fig.35	P
		1 GHz ~ 18 GHz	Fig.36	P
		18 GHz ~ 26.5 GHz	Fig.37	P
	39	1 GHz ~ 18 GHz	Fig.38	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.39	P
	Restricted Band (CH39)	2.45 GHz ~ 2.5 GHz	Fig.40	P
LE-2M	0	1 GHz ~ 18 GHz	Fig.41	P
	19	9 kHz ~ 30 MHz	Fig.42	P
		30 MHz ~ 1 GHz	Fig.43	P
		1 GHz ~ 18 GHz	Fig.44	P
		18 GHz ~ 26.5 GHz	Fig.45	P
	39	1 GHz ~ 18 GHz	Fig.46	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.47	P
	Restricted Band (CH39)	2.45 GHz ~ 2.5 GHz	Fig.48	P

See below for test graphs.

Conclusion: Pass

Worst Case Result
LE-1M CH0 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)
2910.714286	51.29	74.00	22.71	H	6.5
5505.900000	48.04	74.00	25.96	V	3.8
10416.000000	48.01	74.00	25.99	H	9.1
12495.000000	49.59	74.00	24.41	V	11.3
17540.142857	54.47	74.00	19.53	H	18.1
17943.857143	54.59	74.00	19.41	V	19.0

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)
2910.714286	39.92	54.00	15.08	H	6.5
5505.900000	36.19	54.00	18.81	V	3.8
10416.000000	36.39	54.00	18.61	H	9.1
12495.000000	36.61	54.00	17.39	V	11.3
17540.142857	41.33	54.00	12.67	H	18.1
17943.857143	42.64	54.00	11.36	V	19.0

LE-2M CH19 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)
2971.071429	51.64	74.00	22.36	H	6.8
5979.300000	48.06	74.00	25.94	V	4.9
10446.000000	47.44	74.00	25.56	H	9.0
12012.428572	47.85	74.00	25.15	H	10.3
16614.428571	53.70	74.00	20.30	V	17.0
17861.142857	53.10	74.00	19.90	H	18.7

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB)
2971.071429	39.35	54.00	14.65	H	6.8
5979.300000	35.85	54.00	18.15	V	4.9
10446.000000	35.44	54.00	18.56	H	9.0
12012.428572	35.52	54.00	18.48	H	10.3
16614.428571	41.68	54.00	12.32	V	17.0
17861.142857	41.77	54.00	12.23	H	18.7

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = P_{Mea} + Cable Loss + Antenna Factor - Gain of the preamplifier

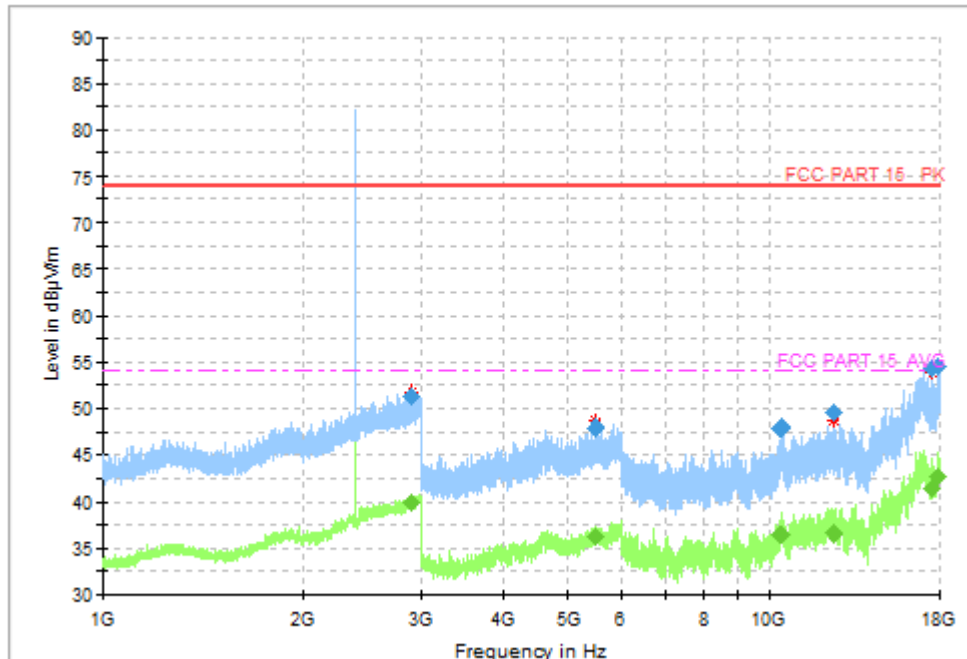


Fig.33 Radiated Spurious Emission (Ch0, 1 GHz - 18 GHz), 1M

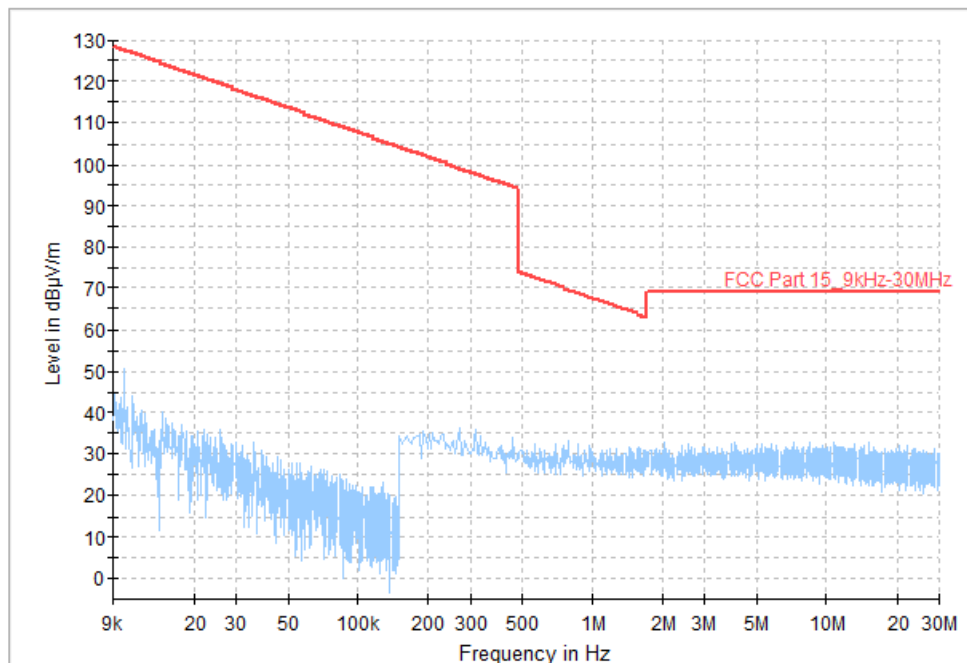


Fig.34 Radiated Spurious Emission (Ch19, 9 kHz - 30 MHz), 1M

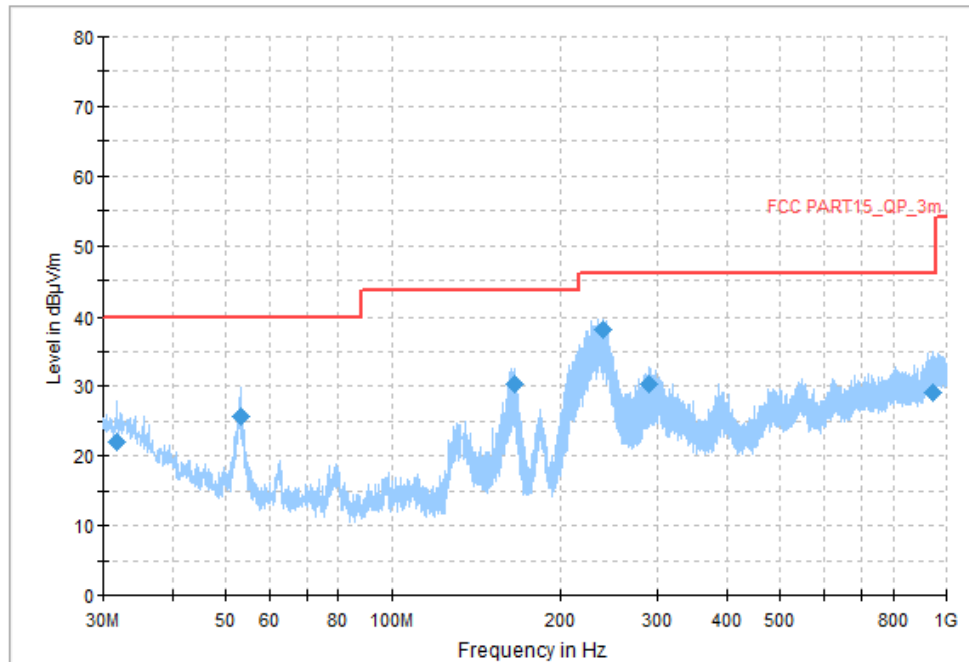


Fig.35 Radiated Spurious Emission (Ch19, 30 MHz - 1 GHz), 1M

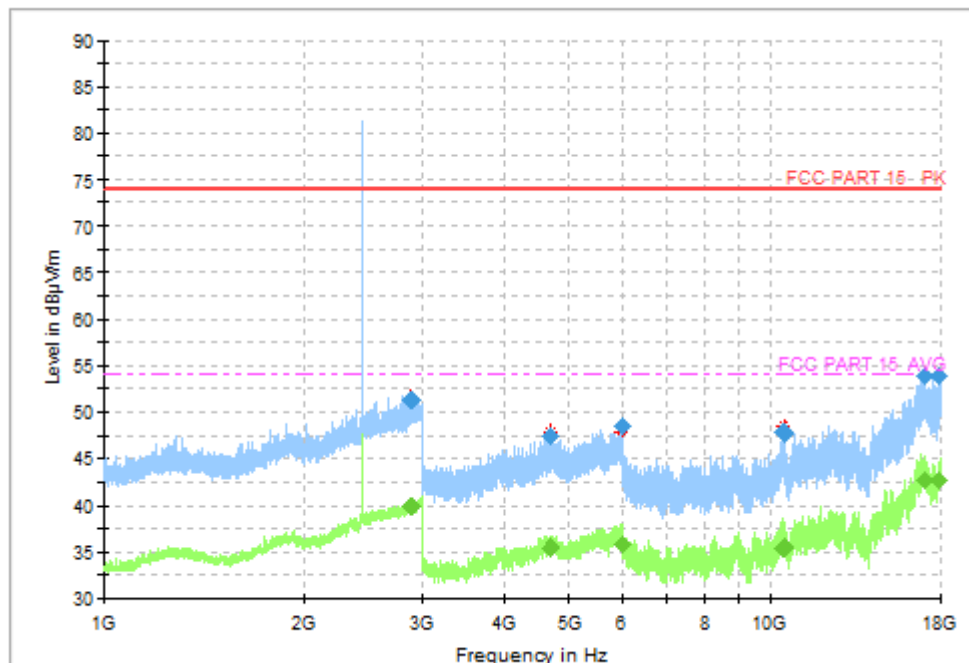


Fig.36 Radiated Spurious Emission (Ch19, 1 GHz - 18 GHz), 1M

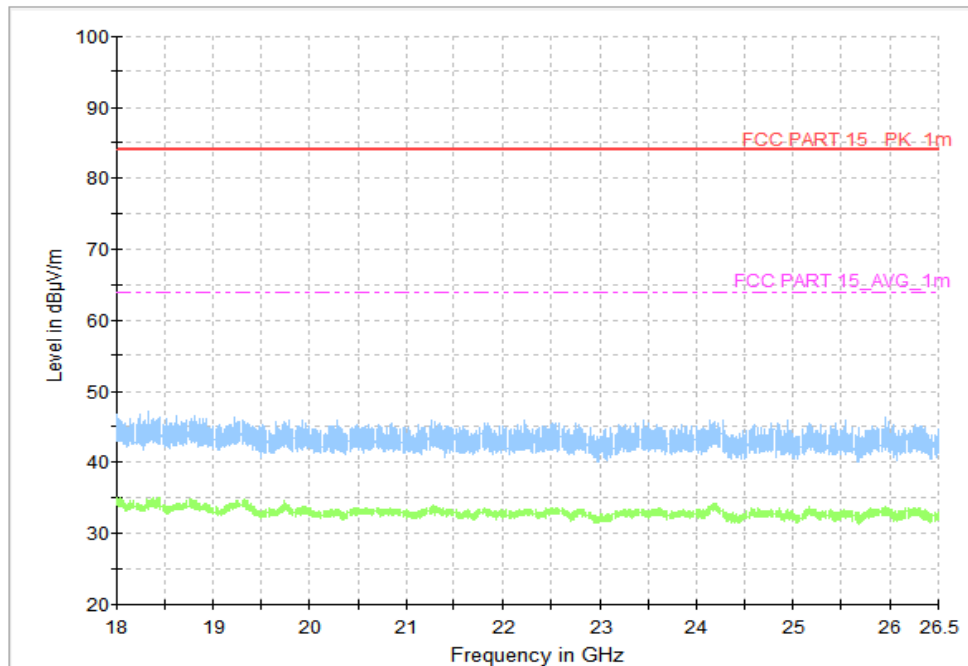


Fig.37 Radiated Spurious Emission (Ch19, 18 GHz - 26.5 GHz), 1M

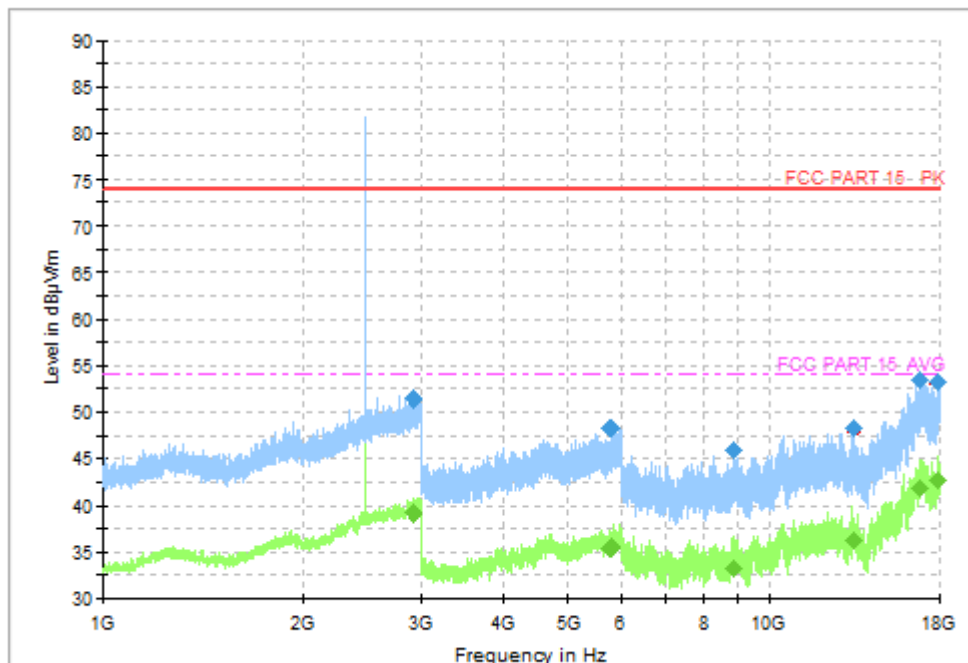


Fig.38 Radiated Spurious Emission (Ch39, 1 GHz - 18 GHz), 1M

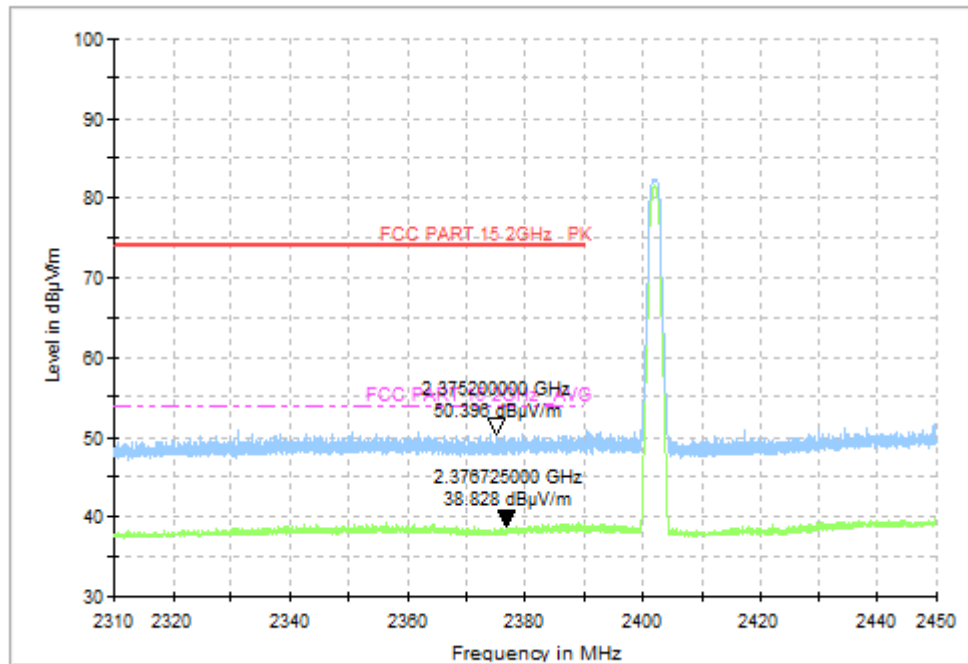


Fig.39 Radiated Band Edges (Ch0, 2380GHz - 2450GHz), 1M

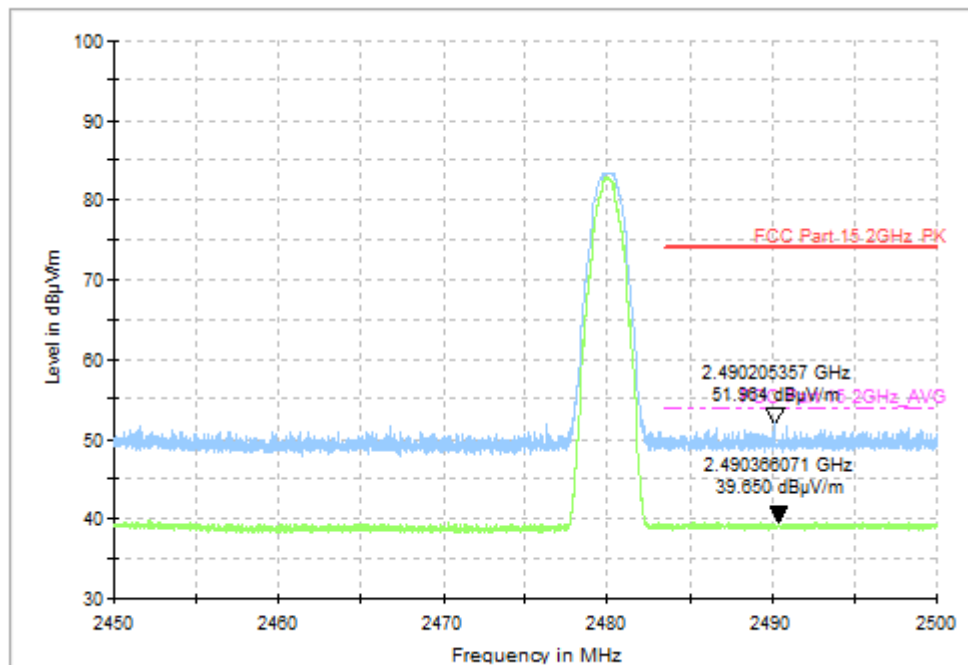


Fig.40 Radiated Band Edges (Ch39, 2450GHz - 2500GHz), 1M

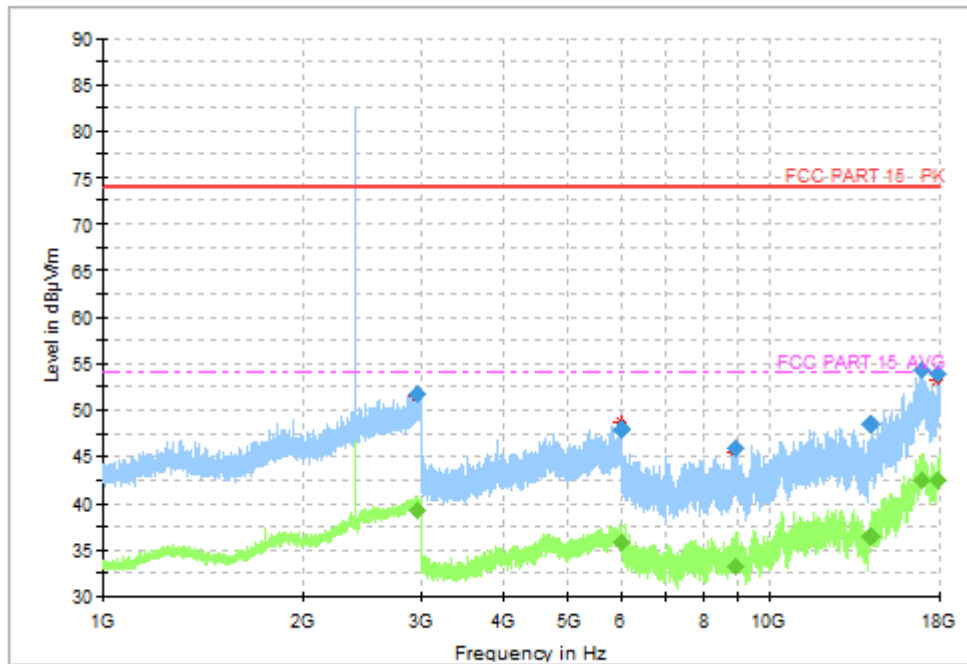


Fig.41 Radiated Spurious Emission (Ch0, 1 GHz - 18 GHz), 2M

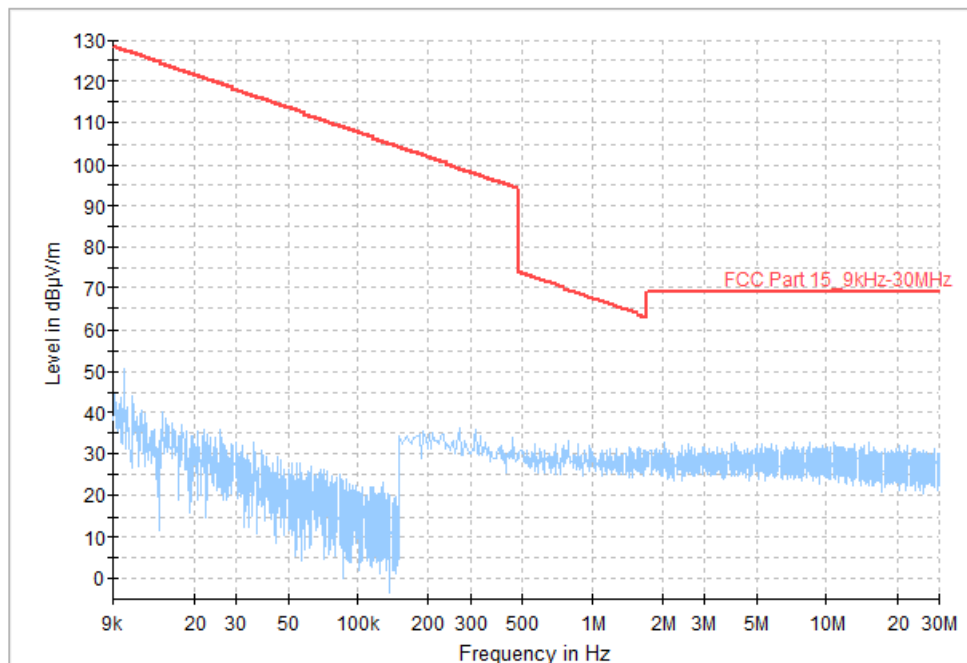


Fig.42 Radiated Spurious Emission (Ch19, 9 kHz - 30 MHz), 2M

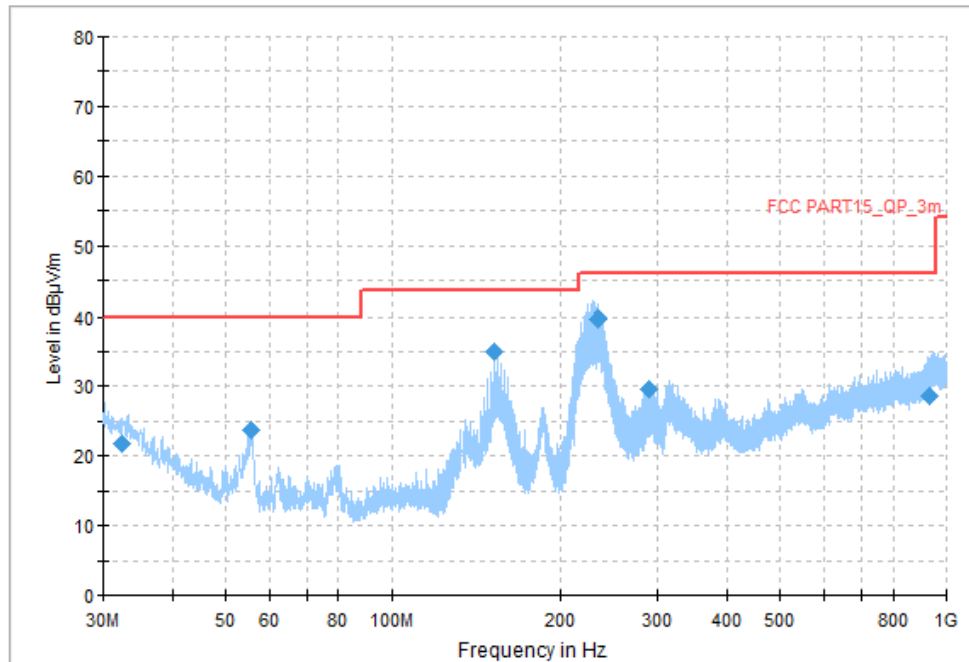


Fig.43 Radiated Spurious Emission (Ch19, 30 MHz - 1 GHz), 2M



Fig.44 Radiated Spurious Emission (Ch19, 1 GHz - 18 GHz), 2M

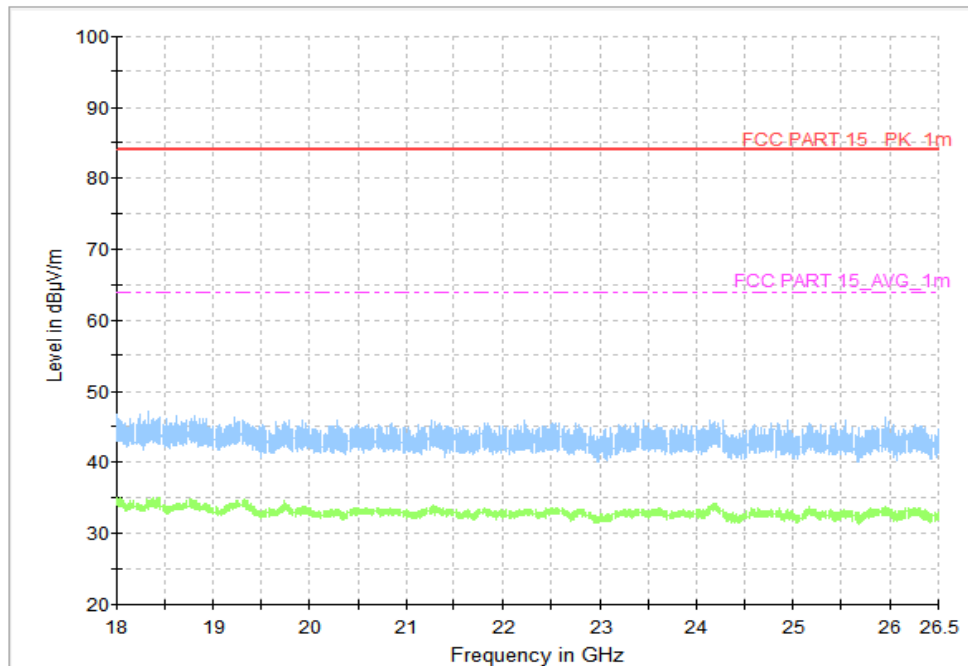


Fig.45 Radiated Spurious Emission (Ch19, 18 GHz - 26.5 GHz), 2M

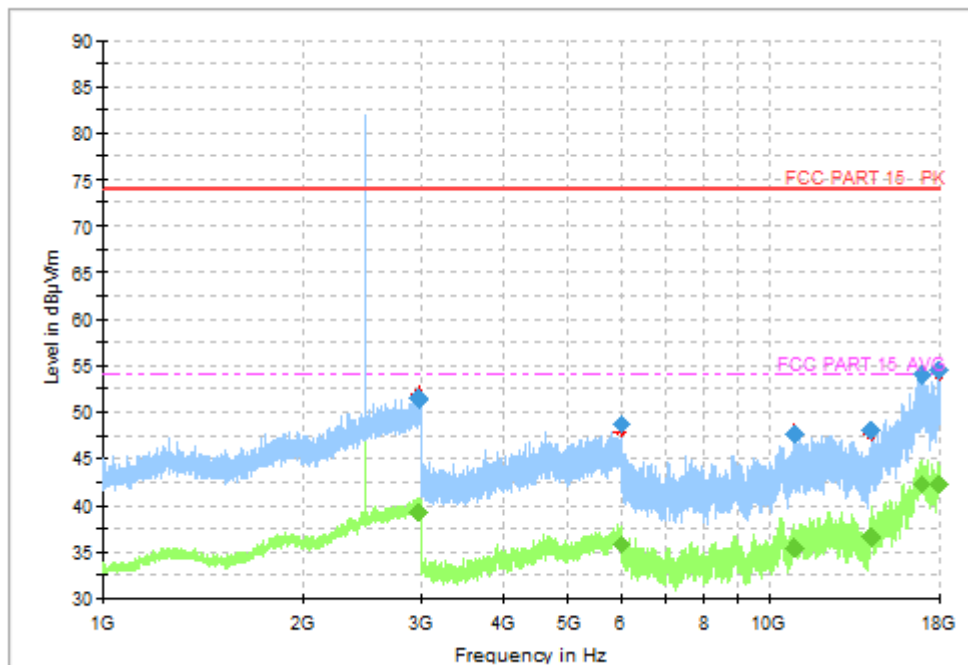


Fig.46 Radiated Spurious Emission (Ch39, 1 GHz - 18 GHz), 2M

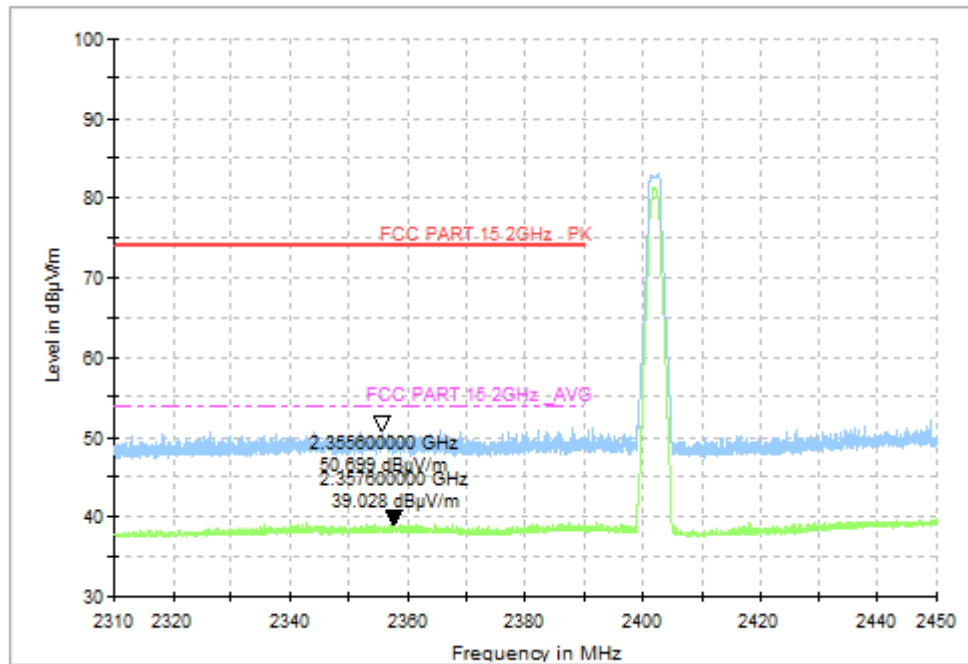


Fig.47 Radiated Band Edges (Ch0, 2380GHz - 2450GHz), 2M

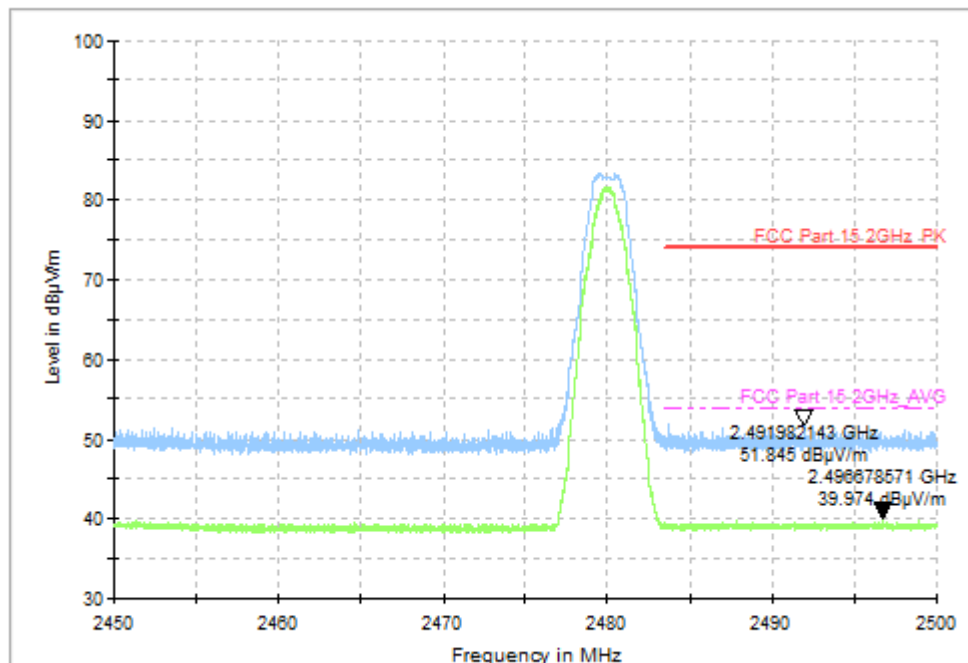


Fig.48 Radiated Band Edges (Ch39, 2450GHz - 2500GHz), 2M

A.7 AC Power line Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

LE-1M

BLE (Quasi-peak Limit) - AE2

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.49	Fig.50	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BLE (Average Limit) - AE2

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.49	Fig.50	P
0.5 to 5	46			
5 to 30	50			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: Pass

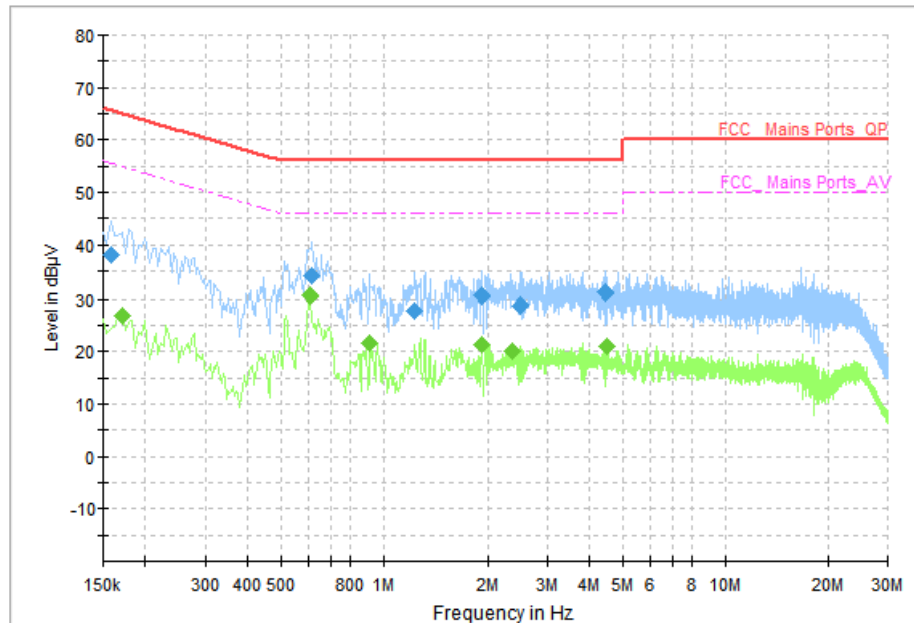


Fig.49 AC Power line Conducted Emission (Traffic, AE2, 120V), 1M

Measurement Results: Quasi Peak

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	38.25	65.57	27.32	L1	ON	10
0.618000	34.01	56.00	21.99	N	ON	10
1.230000	27.62	56.00	28.38	N	ON	10
1.926000	30.49	56.00	25.51	L1	ON	10
2.510000	28.73	56.00	27.27	L1	ON	10
4.454000	31.06	56.00	24.94	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170000	26.93	54.96	28.03	N	ON	10
0.606000	30.31	46.00	15.69	N	ON	10
0.914000	21.61	46.00	24.39	N	ON	10
1.926000	21.20	46.00	24.80	N	ON	10
2.366000	20.14	46.00	25.86	N	ON	10
4.502000	21.07	46.00	24.93	N	ON	10

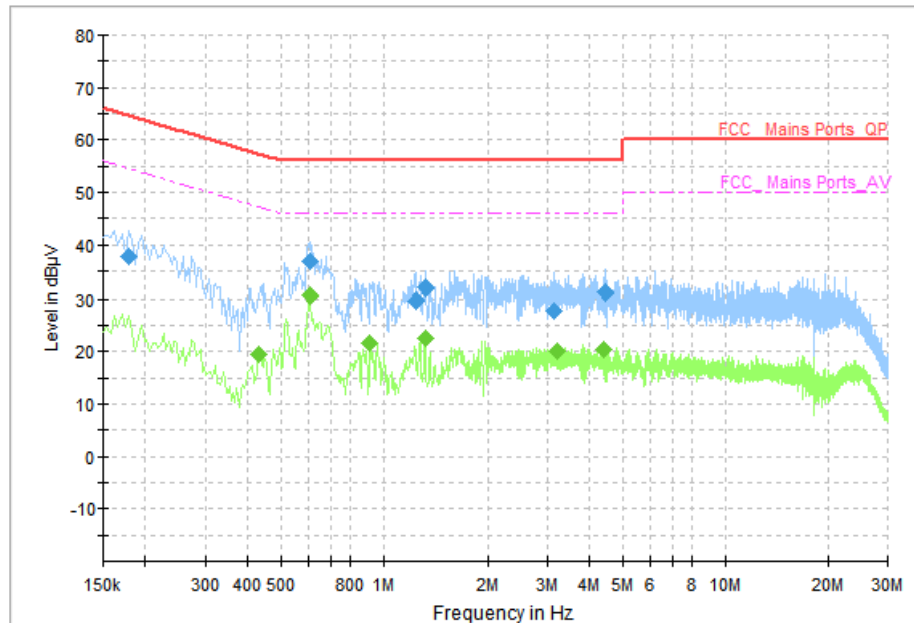


Fig.50 AC Power line Conducted Emission (Idle, AE2, 120V), 1M

Measurement Results: Quasi Peak

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.178000	37.78	64.58	26.79	L1	ON	10
0.610000	36.95	56.00	19.05	L1	ON	10
1.242000	29.69	56.00	26.31	L1	ON	10
1.326000	32.09	56.00	23.91	L1	ON	10
3.142000	27.67	56.00	28.33	N	ON	10
4.458000	30.92	56.00	25.08	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.430000	19.39	47.25	27.86	N	ON	10
0.606000	30.33	46.00	15.67	N	ON	10
0.914000	21.47	46.00	24.53	N	ON	10
1.326000	22.45	46.00	23.55	N	ON	10
3.218000	19.92	46.00	26.08	N	ON	10
4.410000	20.30	46.00	25.70	N	ON	10

A.8 99% Occupied Bandwidth

Measurement Limit:

Standard	Limit
RSS-Gen section 6.7	/

Measurement Result:

Mode	Frequency (MHz)	Test Results (kHz)		Conclusion
LE-1M	2402 (CH0)	Fig.51	1032.00	P
	2440 (CH19)	Fig.52	1031.00	P
	2480 (CH39)	Fig.53	1033.00	P
LE-2M	2402 (CH0)	Fig.54	2007.00	P
	2440 (CH19)	Fig.55	2002.00	P
	2480 (CH39)	Fig.56	2007.00	P

See below for test graphs.

Conclusion: PASS

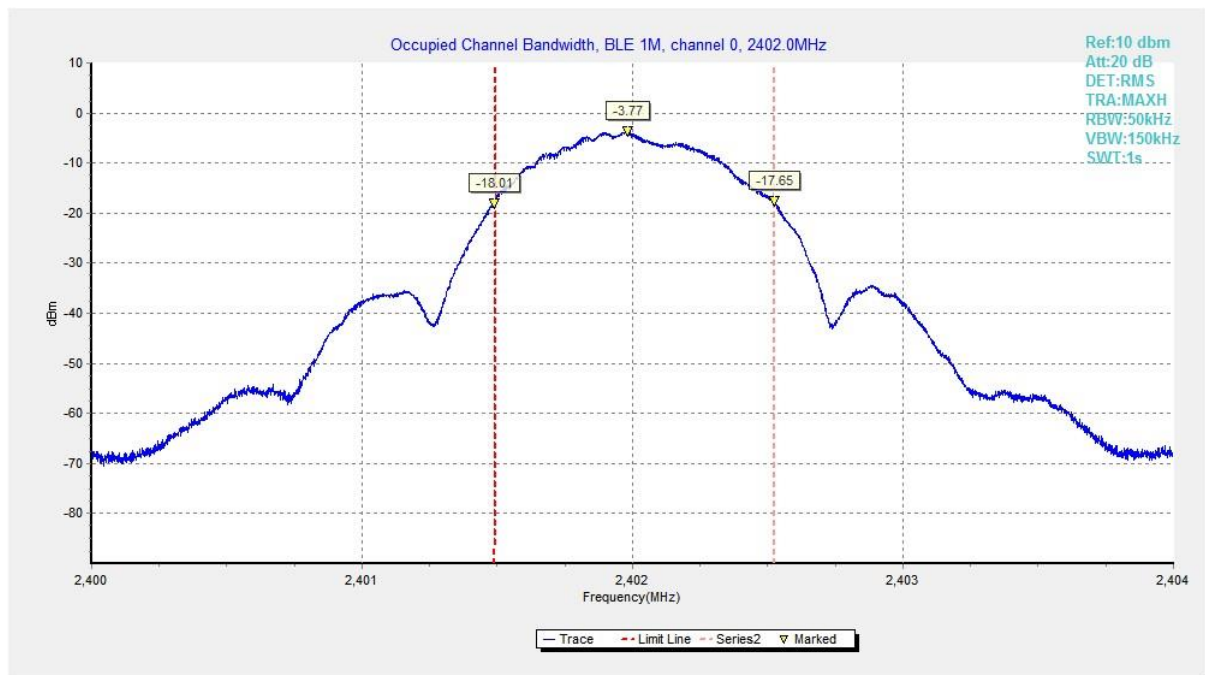


Fig.51 99% Occupied Bandwidth (Ch 0), LE 1M

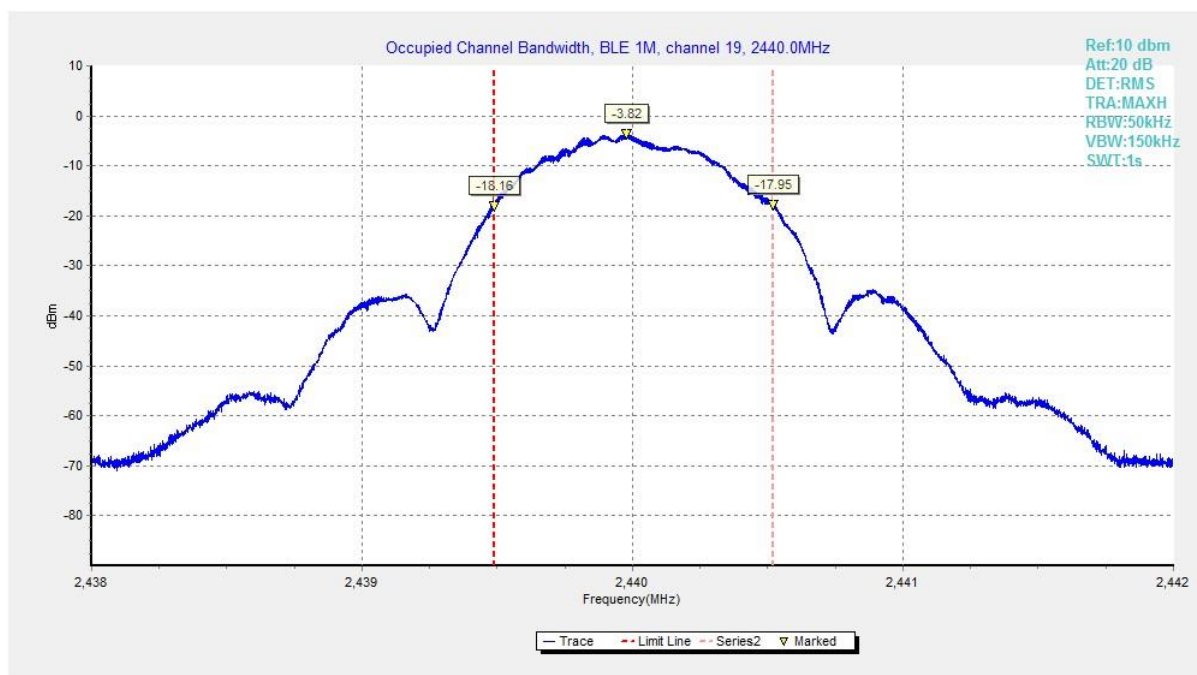


Fig.52 99% Occupied Bandwidth (Ch 19), LE 1M

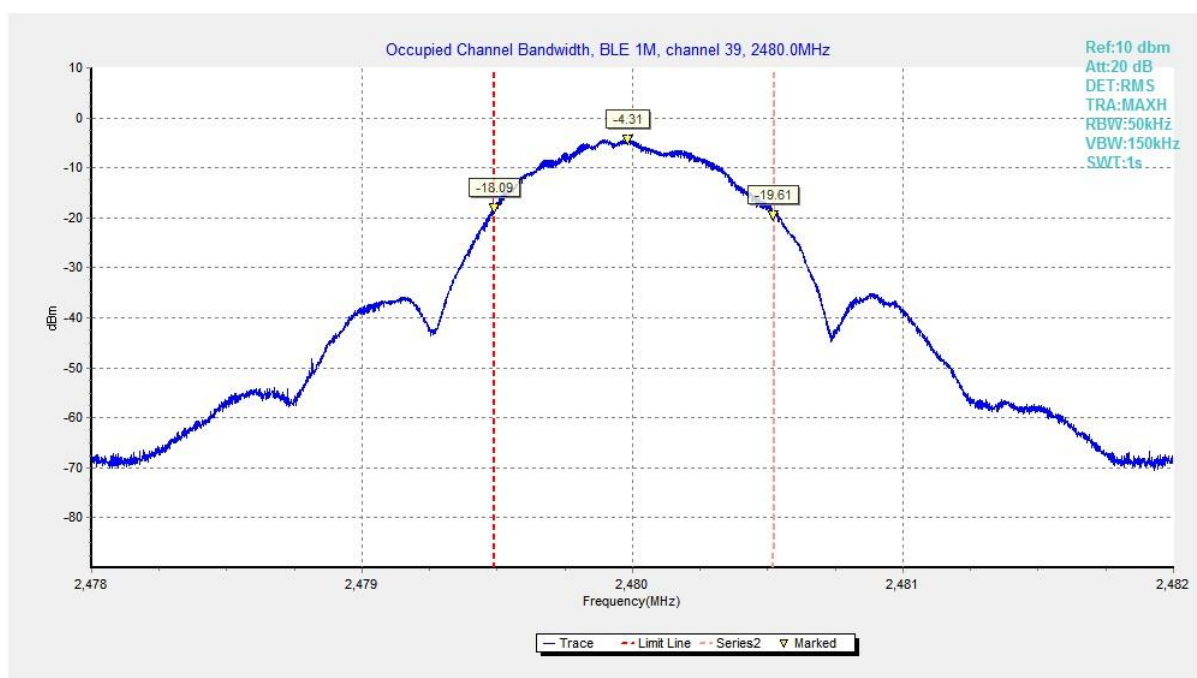


Fig.53 99% Occupied Bandwidth (Ch 39), LE 1M



Fig.54 99% Occupied Bandwidth (Ch 0), LE 2M

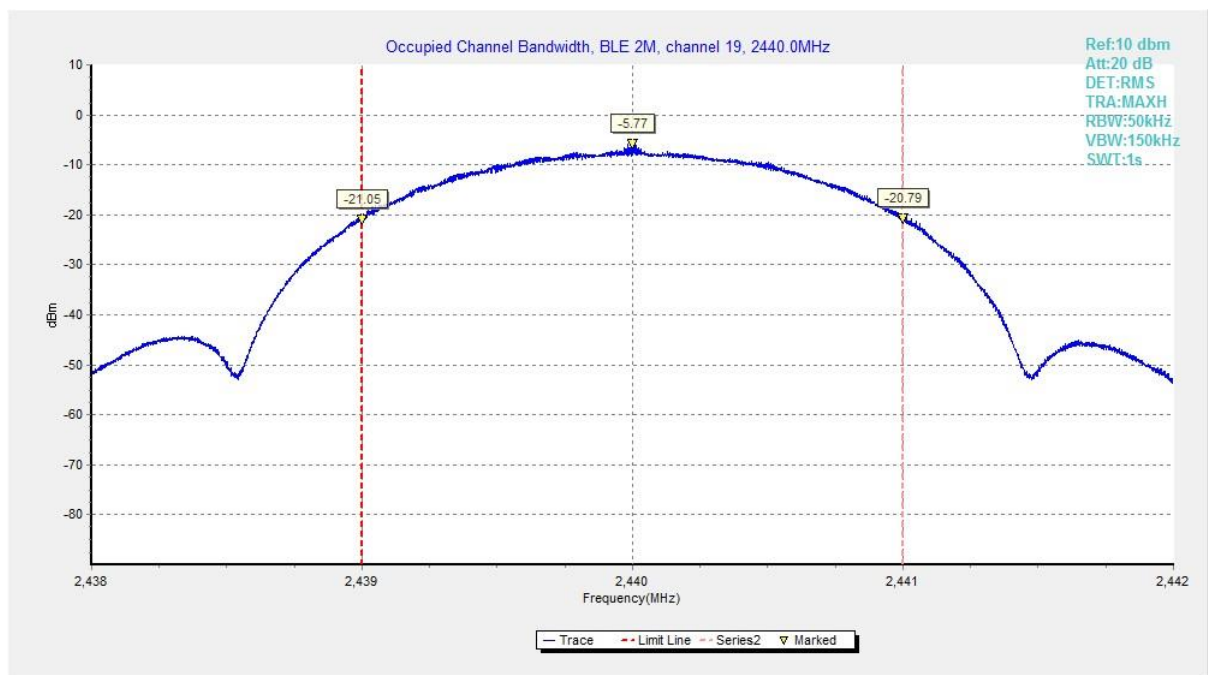


Fig.55 99% Occupied Bandwidth (Ch 19), LE 2M

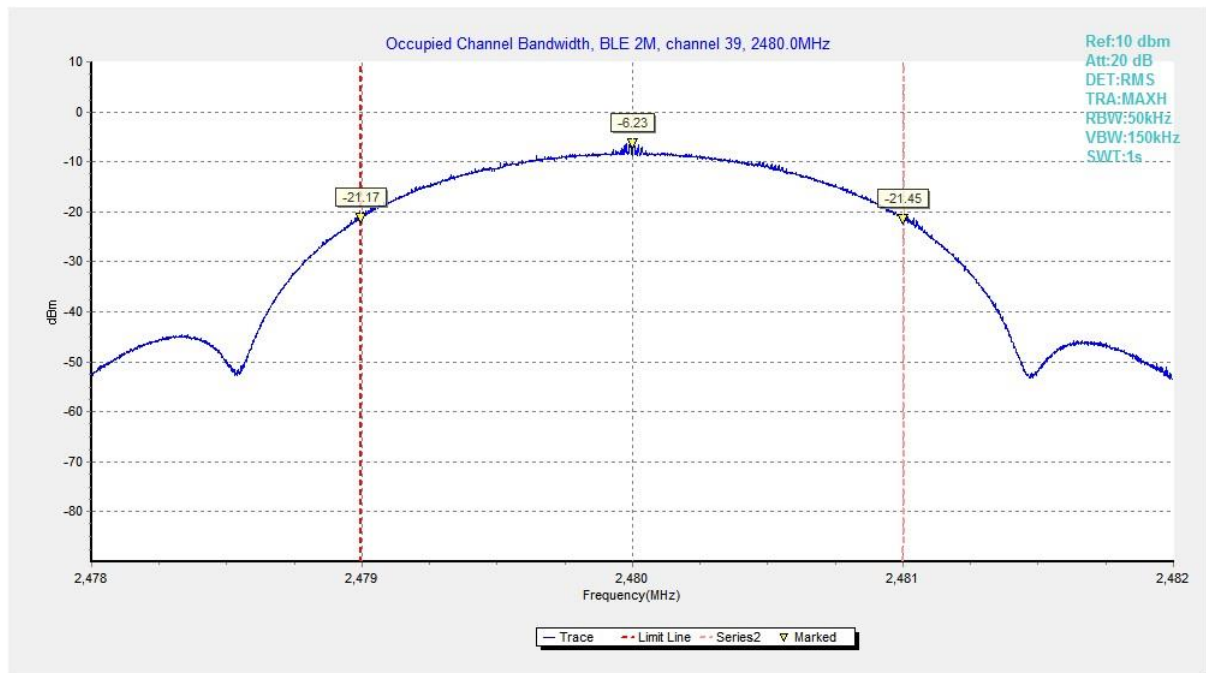


Fig.56 99% Occupied Bandwidth (Ch 39), LE 2M

*****END OF REPORT*****