

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Product: Commercial Kiosk Tablet

Model No.: NEB101

Trademark: Glory Star

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C, Paragraph 15.247 for the evaluation of electromagnetic

compatibility

Approved By

Terry lang

Terry Tang

Manager

Dated: October 09, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2208395-04E Page 2 of 95

Date: 2022-10-09



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

## **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## **A2LA (Certification Number:5013.01)**

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



# **Test Report Conclusion**

## Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Undesirable Emission and Restrict band.	12
7.0	Bandwidth Measurement.	30
8.0	Peak Transmit Power Measurement.	65
9.0	Peak Power Spectral Density Measurement	59
10.0	Frequency Stability	90
11.0	Antenna Requirement	92
12.0	FCC ID Label.	93
13.0	Photo of Test Setup and EUT View.	94

Date: 2022-10-09



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

### 1.2 Applicant Details

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., Zong Yuntai Technology Industrial Park, Songbai Road, Shiyan Street, Baoan,

Shenzhen, China

Telephone: (0755)-26001808-305 Fax: (0755)-26002933

#### 1.3 Description of EUT

Product: Commercial Kiosk Tablet

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., Zong Yuntai Technology Industrial Park, Songbai Road, Shiyan Street,

Baoan, Shenzhen, China

Trademark: Glory Star

Additional Trademark: N/A
Model Number: NEB101

Additional Model Number: N/A

Type of Modulation IEEE 802.11a/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK);

IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Frequency Band 1: 5180MHz-5240MHz

Channel Separation 802.11a/802.11n20:20MHz, 802.11n40:40MHz, 802.11ac: 80MHz

Air Data Rate IEEE 802.11a: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0: 6.5Mbps, mcs1:13Mbps, mcs2:19.5Mbps, mcs3:26Mbps,

mcs4:39Mbps, mcs5:52Mbps, mcs6:58.5Mbps, mcs7:65Mbps

IEEE 802.11n/HT40: mcs0:15Mbps, mcs1:30Mbps, mcs2:45Mbps, mcs3:60Mbps,

mcs4:90Mbps, mcs5:120Mbps, mcs6:135Mbps, mcs7:150Mbps

IEEE 802.11ac: Up to 433.3Mbps

Antenna: Two FPC antennas used.

The report refers only to the sample tested and does not apply to the bulk.

Date: 2022-10-09



Antenna Gain: 3.04dBi for each one. (Get from the antenna specification)

Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the worst case

for 802.11a mode; mcs0 air data rate was the worst case for 802.11n mode; 23.9Mbps air

data rate was the worst case for 802.11ac mode.

Frequency Selection By software

Rating: Input: DC12V, 1.2A, 14.4W Switching Adapter: Model: FJ-SW20181202000D

Input: 100-240V~, 50/60Hz, 1.5A Max; Output: DC12V, 2.0A, 24W

#### Each Channel Operation Frequency

1	Zuen enminer eperation required						
	Band 1						
802.11a / 11n HT	20 / 802.11ac VHT20	802.11n HT	40 / 802.11acVHT40	802.11a	ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency		
36	5180MHz	38	5190 MHz	42	5210 MHz		
40	5200 MHz	46	5230 MHz				
44	5220 MHz						
48	5240 MHz						

#### The selected test channels as follows:

Band 1					
802.11a / 11n HT20		802.11n HT40		802.11ac VHT80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190 MHz	42	5210 MHz
40	5200 MHz	46	5230 MHz		
48	5240 MHz				

Note: 802.11ac VHT20/VHT40 is similar with 802.11n HT20/HT40.

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2022-08-25 to 2022-10-09

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Date: 2022-10-09



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2022-07-15	2023-07-14
RF Cable	Zhengdi	7m		2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17

#### 2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

### For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-10-09



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested according to the following specifications:			
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.407	<b>Conducted Emission Test</b>	Pass	Complies
FCC Part 15 Subpart E Paragraph 15.407 (b1/4/5/6/7), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	Pass	Complies
FCC Part 15, Paragraph 15.407 (a1/2/3)	Peak Transmit Power	Pass	Complies
FCC Part 15, Paragraph 15.407 (a)(6)	Peak Power Excursion	Pass	Complies
FCC Part 15, Paragraph 15.407 (a/1/2/3)	Peak Power Spectral Density	Pass	Complies
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	Pass	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2013, ANSI C63.4:2014 789033 D02 General UNII Test Procedures New Rules v01r04

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

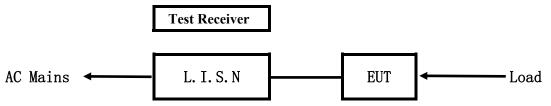


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

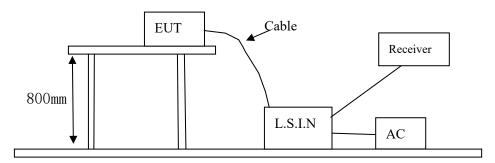

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Device	Manufacturer	Model	FCC ID
Commercial Kiosk Tablet	GLORY STAR TECHNICS	NEB101	2AACS-NEB101
Commercial Klosk Tablet	(SHENZHEN) CO., LTD.	NEDIUI	ZAACS-NEDIUI

Report No.: TW2208395-04E Page 9 of 95

Date: 2022-10-09



#### B. Internal Device

Device	Manufacturer	Model	Rating

# C. Peripherals

Device Manufacturer Me	odel Rating
------------------------	-------------

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-10-09



#### Conducted Emission on Live Terminal (150kHz to 30MHz) A:


## **EUT Operating Environment**

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

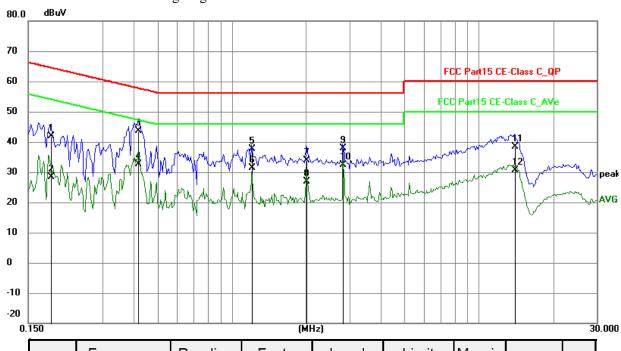

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	32.01	9.76	41.77	64.26	-22.49	QP	Д
2	0.1850	18.58	9.76	28.34	54.26	-25.92	AVG	А
3	0.4191	33.86	9.76	43.62	57.47	-13.85	QP	Р
4	0.4191	22.98	9.76	32.74	47.47	-14.73	AVG	Р
5	1.2069	27.84	9.79	37.63	56.00	-18.37	QP	А
6	1.2069	21.51	9.79	31.30	46.00	-14.70	AVG	Л
7	2.0064	24.15	9.80	33.95	56.00	-22.05	QP	Р
8	2.0064	17.19	9.80	26.99	46.00	-19.01	AVG	Р
9	2.8136	27.94	9.84	37.78	56.00	-18.22	QP	Р
10	2.8136	22.52	9.84	32.36	46.00	-13.64	AVG	Р
11	13.9395	28.13	10.33	38.46	60.00	-21.54	QP	Р
12	13.9395	20.33	10.33	30.66	50.00	-19.34	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.



Date: 2022-10-09



#### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

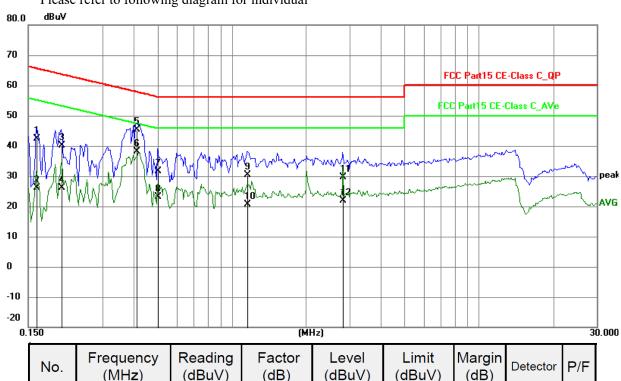

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	32.63	9.78	42.41	65.38	-22.97	QP	Р
2	0.1617	16.31	9.78	26.09	55.38	-29.29	AVG	Р
3	0.2046	30.48	9.75	40.23	63.42	-23.19	QP	Р
4	0.2046	16.50	9.75	26.25	53.42	-27.17	AVG	Р
5	0.4113	35.61	9.76	45.37	57.62	-12.25	QP	Р
6	0.4113	28.43	9.76	38.19	47.62	-9.43	AVG	Р
7	0.5010	21.97	9.77	31.74	56.00	-24.26	QP	Л
8	0.5010	13.34	9.77	23.11	46.00	-22.89	AVG	А
9	1.1562	20.64	9.79	30.43	56.00	-25.57	QP	Р
10	1.1562	10.73	9.79	20.52	46.00	-25.48	AVG	Л
11	2.8176	19.77	9.84	29.61	56.00	-26.39	QP	Р
12	2.8176	11.99	9.84	21.83	46.00	-24.17	AVG	Р

Report No.: TW2208395-04E Page 12 of 95

Date: 2022-10-09




#### 6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector.

  Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

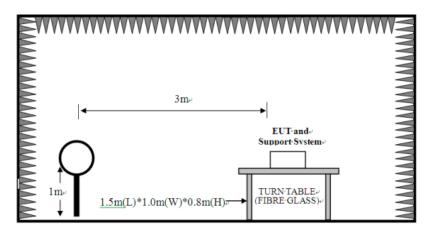


Page 13 of 95

Report No.: TW2208395-04E


Date: 2022-10-09



For radiated emissions from 30MHz to1GHz

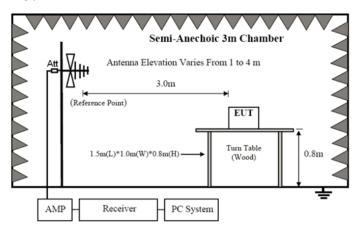

For radiated emissions above 1GHz

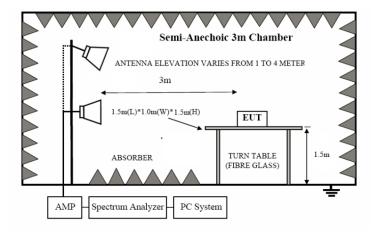

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2208395-04E Page 14 of 95

Date: 2022-10-09



## Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Date: 2022-10-09



Page 15 of 95

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 


Page 16 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



## Test Figure

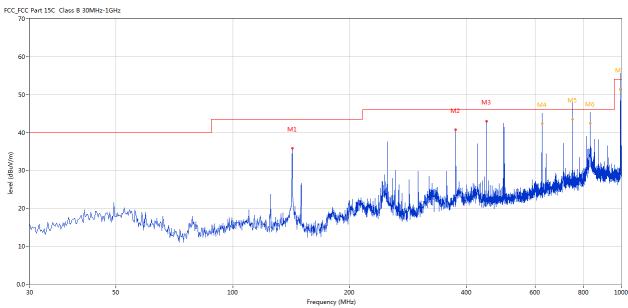

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	142.249	35.91	-17.31	43.5	-7.59	Peak	24.00	100	Horizontal	Pass
2	374.991	40.77	-9.44	46.0	-5.23	Peak	29.00	100	Horizontal	Pass
3	449.905	42.97	-8.01	46.0	-3.03	Peak	0.00	100	Horizontal	Pass
4*	624.946	42.26	-4.85	46.0	-3.74	QP	19.00	100	Horizontal	Pass
5*	750.045	43.55	-3.43	46.0	-2.45	QP	0.00	100	Horizontal	Pass
6*	831.990	42.42	-2.91	46.0	-3.58	QP	0.00	100	Horizontal	Pass
7*	995.394	51.47	-1.26	54.0	-2.53	QP	29.00	100	Horizontal	Pass


Page 17 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



# Test Figure

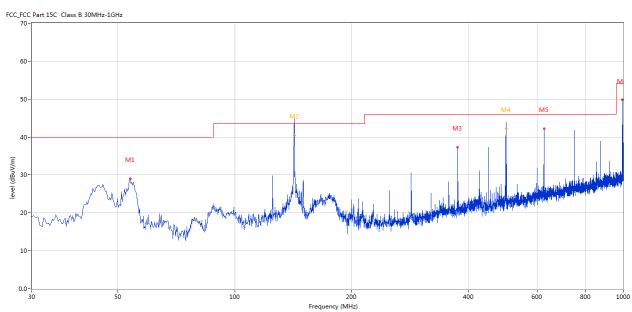

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	53.759	29.03	-11.53	40.0	-10.97	Peak	332.00	100	Vertical	Pass
2*	142.249	40.42	-17.31	43.5	-3.08	QP	360.00	100	Vertical	Pass
3	374.991	37.29	-9.44	46.0	-8.71	Peak	360.00	100	Vertical	Pass
4*	500.090	42.20	-6.91	46.0	-3.80	QP	330.00	100	Vertical	Pass
5	624.946	42.18	-4.85	46.0	-3.82	Peak	360.00	100	Vertical	Pass
6	995.394	49.77	-1.26	54.0	-4.23	Peak	327.00	100	Vertical	Pass

Date: 2022-10-09



## Operation Mode: Keeping Transmitting under CH36 for 11g at 6Mbps

	1 0		_	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)	
5180.00	89.34 (PK)	Н	Fundamental Fraguency	
5180.00	82.39 (PK)	V	Fundamental Frequency	
10360		Н	74(Peak)/ 54(AV)	
10360		V	74(Peak)/ 54(AV)	
15540		V	74(Peak)/ 54(AV)	
20720		H/V	74(Peak)/ 54(AV)	
25900		H/V	74(Peak)/ 54(AV)	
31080		H/V	74(Peak)/ 54(AV)	
36260		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

### Operation Mode: Keeping Transmitting under CH40 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
5200.00	89.80 (PK)	Н	Fundamental Fraguency
5200.00	81.94 (PK)	V	Fundamental Frequency
10400	1	Н	74(Peak)/ 54(AV)
10400		V	74(Peak)/ 54(AV)
15600	1	V	74(Peak)/ 54(AV)
20800	1	H/V	74(Peak)/ 54(AV)
26000	1	H/V	74(Peak)/ 54(AV)
31200	-	H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Page 19 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



## Operation Mode: Keeping Transmitting under CH48 for 11g at 6Mbps

	1 0	U	<u> </u>	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)	
5240.00	85.18 (PK)	Н	Fundamental Fraguency	
5240.00	81.93 (PK)	V	Fundamental Frequency	
10480		Н	74(Peak)/ 54(AV)	
10480		V	74(Peak)/ 54(AV)	
15720		H/V	74(Peak)/ 54(AV)	
20960		H/V	74(Peak)/ 54(AV)	
26200		H/V	74(Peak)/ 54(AV	
31440		H/V	74(Peak)/ 54(AV)	
36680		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured


3. For 802.11a mode 6Mbps

Date: 2022-10-09




Please refer to the following test plots for details:

## CH36 for 11a at 6Mbps: Horizontal

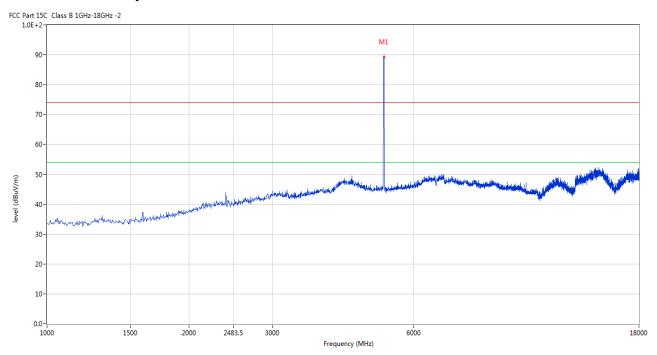

# CH36 for 11a at 6Mbps: Vertical

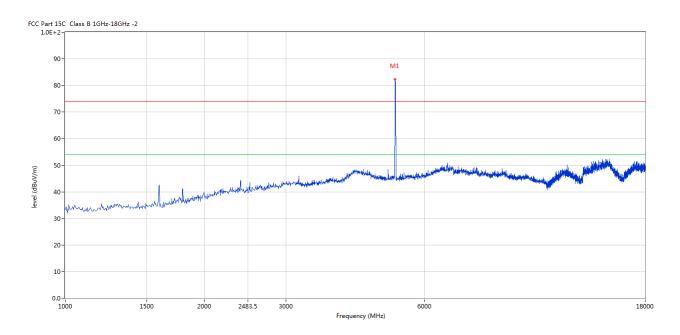

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2022-10-09



# CH40 for 11a at 6Mbps: Vertical

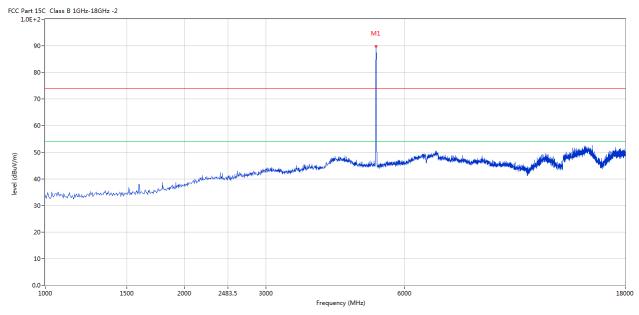

### CH40 for 11a at 6Mbps: Horizontal

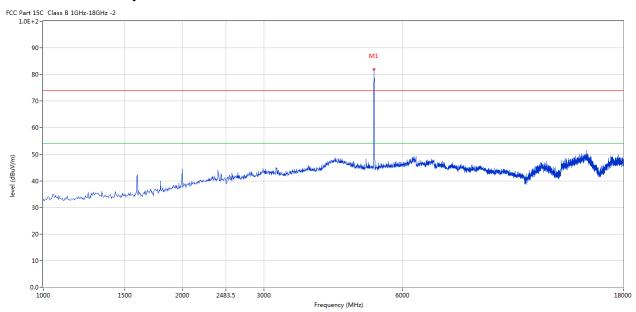


Page 22 of 95

Report No.: TW2208395-04E


Date: 2022-10-09



## CH48 for 11a at 6Mbps: Vertical

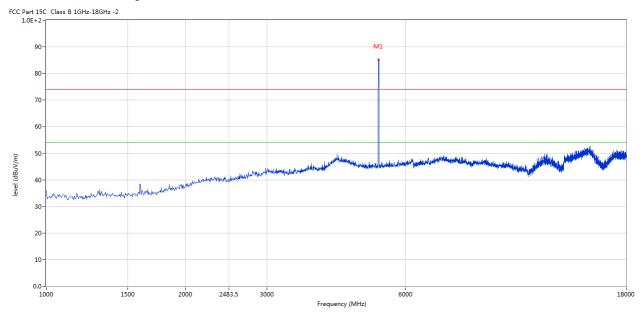

## CH48 for 11g at 6Mbps: Horizontal

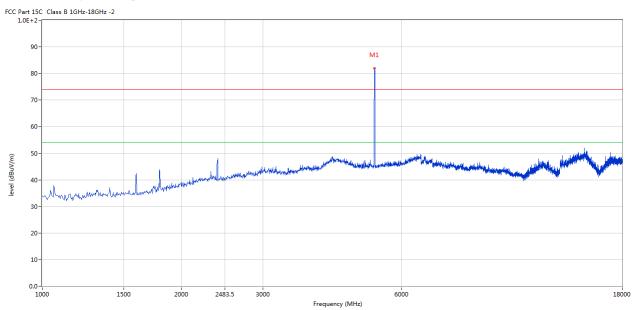

Note: 1.For radiated Emissions from 18-40GHz and below 30MHz, it is only the floor noise.

2. 802.11a is the worst case.

Date: 2022-10-09



Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36 (5180MHz)-11a				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	45.6 (PK)	T ' '/	27.10 /A.41.				
	EIRP (dBm) -49.6		Limit	-27dBm/MHz				
Polarity	Horizontal							

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.6 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.6-95.2=-49.6dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36 (5180MHz)-11a				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBμV/m)	42.8 (PK)	T : '/	27 ID /MII				
	EIRP (dBm) -52.4		Limit	-27dBm/MHz				
Polarity	Vertical			-				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 42.8 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=42.8-95.2=-52.4dBm$ 

Date: 2022-10-09



Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-11a				
Mode	Keeping	Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	49.1 (PK)	T: '/	27.15 /2.47				
	EIRP (dBm) -46.1		Limit	-27dBm/MHz				
Polarity	Horizontal							

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 49.1dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=49.1-95.2=-46.1dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-11a				
Mode	Keeping	Transmitting	Input Voltage	120V~				
Temperature	24 deg. C,		Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	46.5 (PK)	T,	27.10 /4.11				
	EIRP (dBm) -48.7		Limit	-27dBm/MHz				
Polarity	Vertical							

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.5dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.5 - 95.2 = -48.7 dBm$ 

Date: 2022-10-09



Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36		
				(5180MHz)-11n/HT20		
Mode	Keeping	Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 46.7(PK)		Ŧ	0.5 10 (2.5)		
	EIRP (dBm) -48.5		Limit	-27dBm/MHz		
Polarity	Но	orizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.7 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.7-95.2=-48.5dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36		
				(5180MHz)-11n/HT20		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 43.7 (PK)		T ' '/	27.10 (2.41)		
	EIRP (dBm) -51.5		Limit	-27dBm/MHz		
Polarity	Vertical					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 43.7dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=43.7-95.2=-51.5dBm$ 

Date: 2022-10-09



Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-		
				11n/HT20		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5250	PK (dBµV/m)	47.9(PK)	T ' '/	27 10 / 101		
	EIRP (dBm) -47.3		Limit	-27dBm/MHz		
Polarity	Horizontal					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 47.9 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.9-95.2=-47.3dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-		
				11n/HT20		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5250	PK (dBμV/m) 44.9(PK)		T	27.15 (2.41)		
	EIRP (dBm) -50.3		Limit	-27dBm/MHz		
Polarity	7	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 44.9dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=44.9-95.2=-50.3dBm$ 

Date: 2022-10-09



Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 38		
				(5190MHz)-11n/HT40		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 44.6(PK)		T ' '	27.10 /2411		
	EIRP (dBm) -50.6		Limit	-27dBm/MHz		
Polarity	Но	orizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 44.6 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=44.6-95.2=-50.6dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 38		
				(5190MHz)-11n/HT40		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 42.8 (PK)		Ŧ.	27.10 (2.41)		
	EIRP (dBm) -52.4		Limit	-27dBm/MHz		
Polarity	1	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 42.8dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 42.8 - 95.2 = -52.4 dBm$ 

Date: 2022-10-09



Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 46 (5230MHz)-		
				11n/HT40		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5250	PK (dBµV/m)	48.3(PK)	T,	27.10 /2.41		
	EIRP (dBm) -46.9		Limit	-27dBm/MHz		
Polarity	Horizontal					

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.3dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=48.3-95.2=-46.9 dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 46 (5230MHz)-		
				11n/HT40		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5250	PK (dBμV/m) 45.9(PK)		T	27.15 (2.41)		
	EIRP (dBm) -49.3		Limit	-27dBm/MHz		
Polarity	1	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.9dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 45.9 - 95.2 = -49.3 dBm$ 

Date: 2022-10-09



Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42		
				(5210MHz)-11ac/VHT80		
Mode	Keeping	Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 47.7 (PK)		T ' '/	27.15 (2.41)		
	EIRP (dBm) -47.5		Limit	-27dBm/MHz		
Polarity	Но	orizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 47.7dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.7-95.2=-47.5dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement						
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42 (5210MHz)-		
				11ac/VHT80		
Mode	Keeping	g Transmitting	Input Voltage	120V~		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:		Pass	Detector	PK		
5150	PK (dBμV/m) 45.9 (PK)		T	27.15 (2.41)		
	EIRP (dBm) -49.3		Limit	-27dBm/MHz		
Polarity	1	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.9dB\mu V/m$ ,


 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 45.9 - 95.2 = -49.3 dBm$ 

Date: 2022-10-09



#### 7.0 Emission Bandwidth

# 7.1 Test Setup



## 7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set VBW  $\geqslant$  3  $\times$  RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set  $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 31 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 7.6 Test Result

EUT		Com	nercial Kio	sk Tablet	Model	NEB101
Mode			802.11a	ı	Input Voltage	120V~
Temperati	ure		24 deg. (	Ξ,	Humidity	56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
36		5180	6	22.12		Pass
40		5200	6	22.12		Pass
48		5240	240 6 22.12			Pass
99% Ban	dwidth					
36		5180	6	16.83		Pass
40		5200	6	16.83		Pass
48		5240	6	16.83		Pass

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



Test Figure:

#### 26dB Bandwidth

#### Channel 36

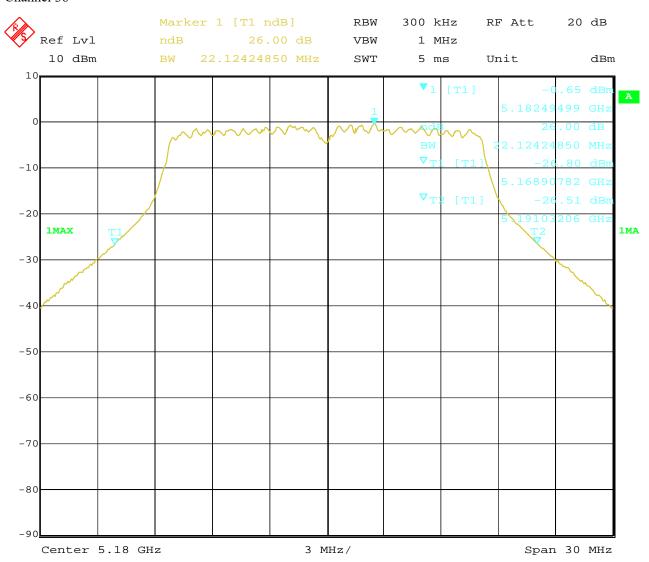

27.SEP.2022 16:54:25 Date:


Page 33 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



### Channel 40

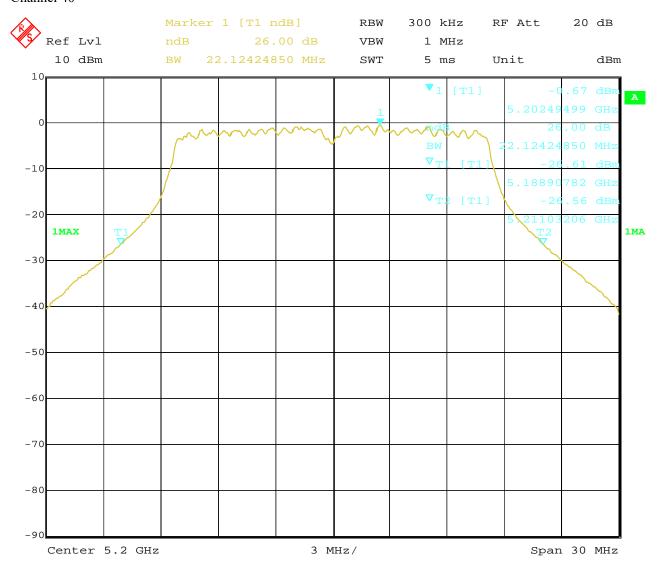

Date: 27.SEP.2022 16:57:02


Page 34 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

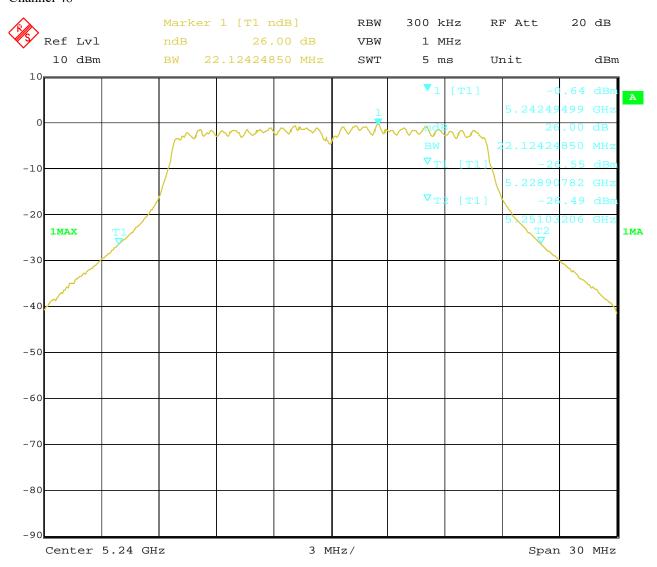

Date: 27.SEP.2022 17:05:43


Date: 2022-10-09



Test Figure:

#### 99% Bandwidth

#### Channel 36

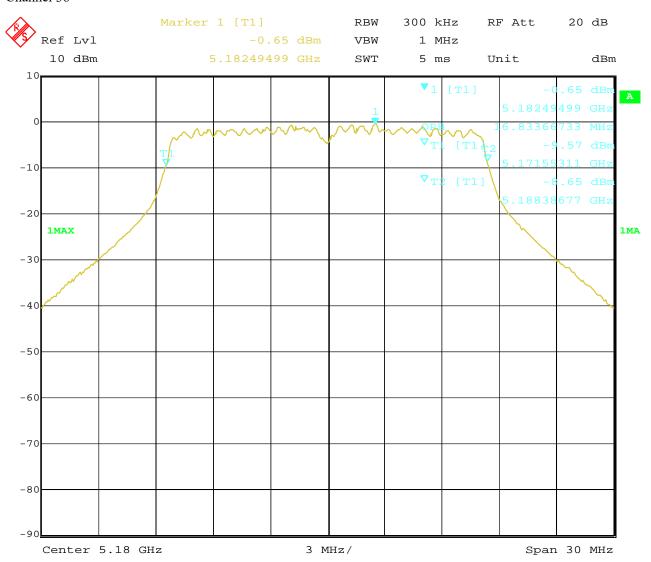

27.SEP.2022 16:53:54 Date:


Page 36 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



# Channel 40

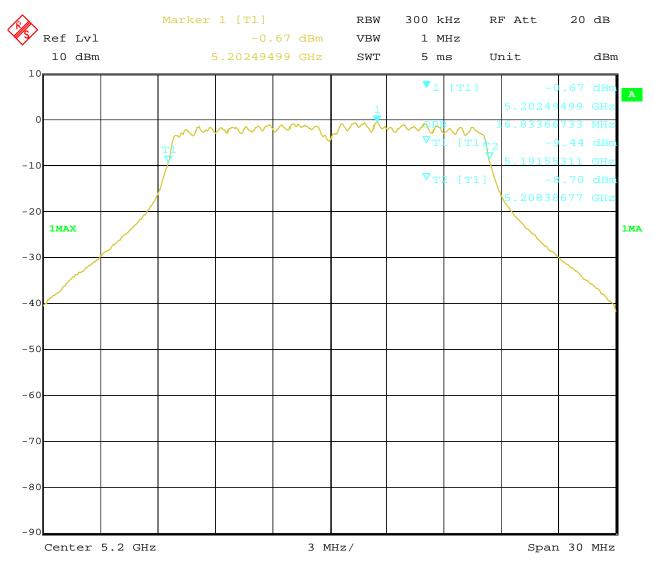

Date: 27.SEP.2022 16:57:13


Page 37 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

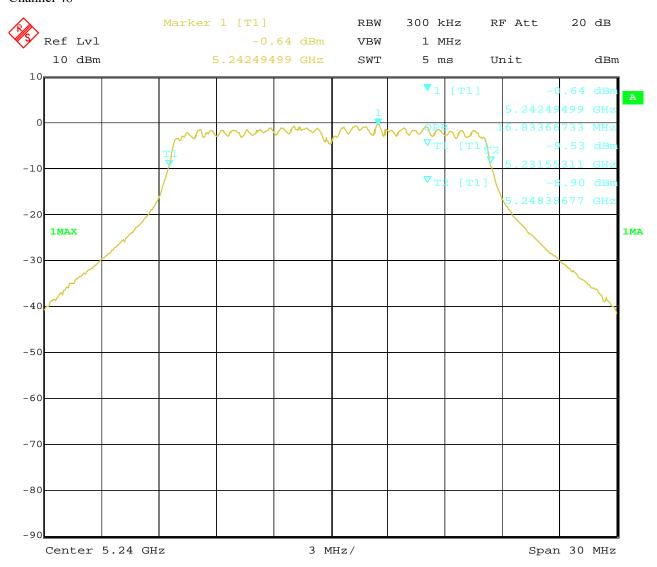

Date: 27.SEP.2022 17:05:21

Page 38 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT		Com	mercial Ki	osk Tablet	Model	NEB101
Mode			802.11n H	IT20	Input Voltage	120V~
Temperat	ure		24 deg.	C,	Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
36	5180		mcs0	23.63		Pass
40		5200	mcs0	23.63		Pass
48		5240	mcs0	23.63		Pass
99% Ban	dwidth					
36	5180		mcs0	18.10		Pass
40	5200		mcs0	18.04		Pass
48	5240		mcs0	18.10		Pass

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



Test Configure

#### 26dB Bandwidth

### Channel 36

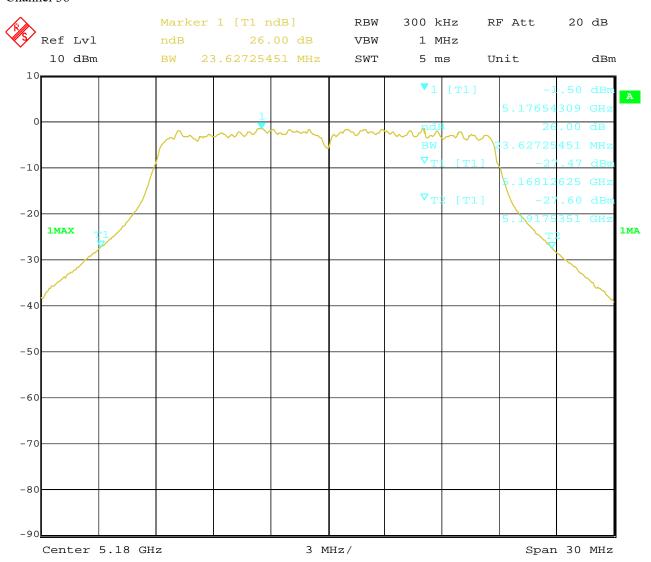

27.SEP.2022 19:40:28 Date:


Page 40 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 40

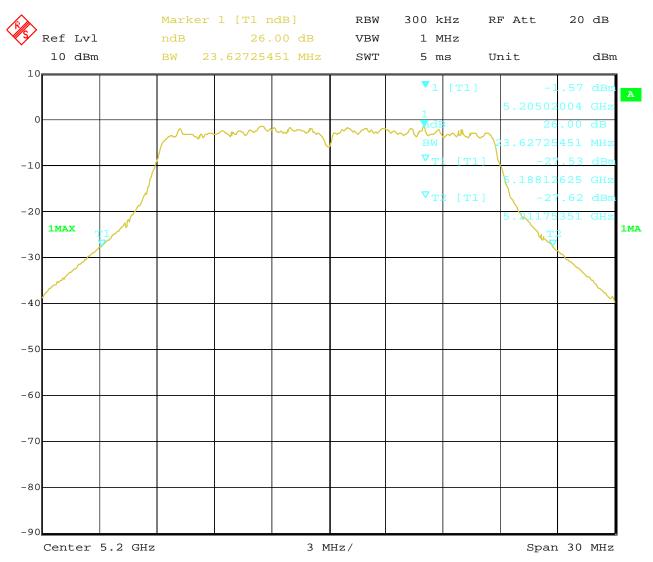

Date: 27.SEP.2022 19:35:09


Page 41 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

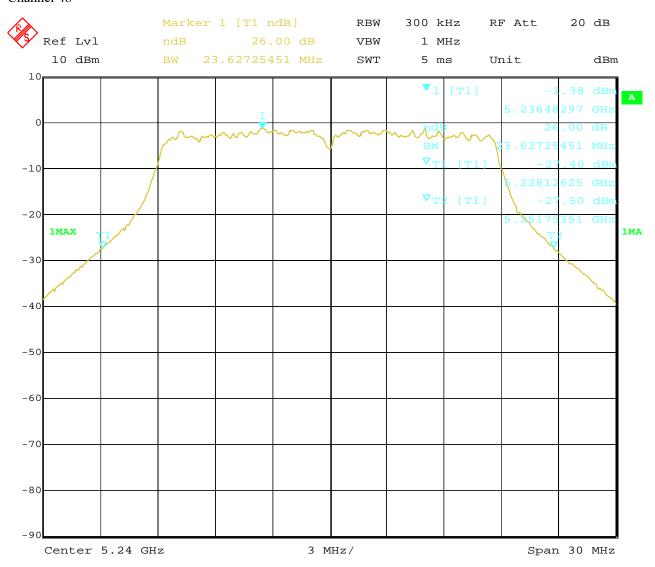

Date: 27.SEP.2022 19:24:58


Date: 2022-10-09



# Test Configure

### 99% Bandwidth

### Channel 36

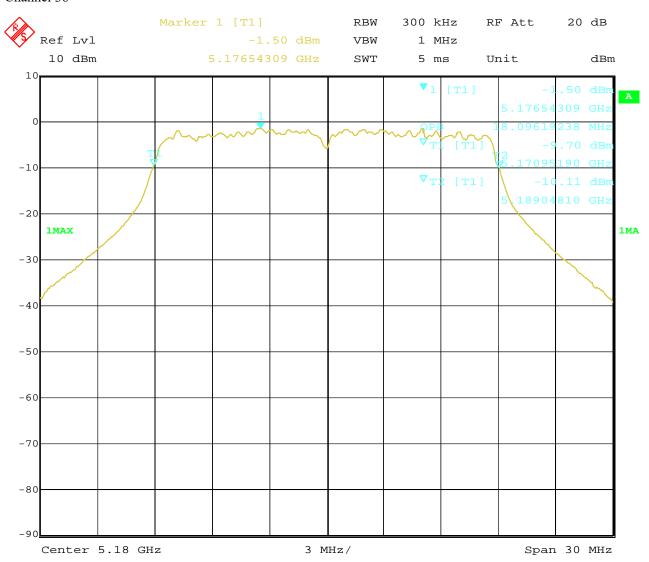

27.SEP.2022 19:40:42 Date:


Page 43 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 40

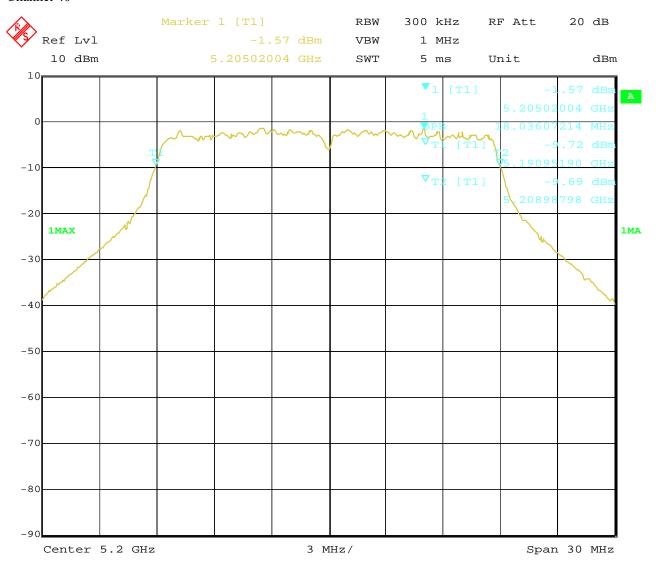

Date: 27.SEP.2022 19:34:51


Page 44 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

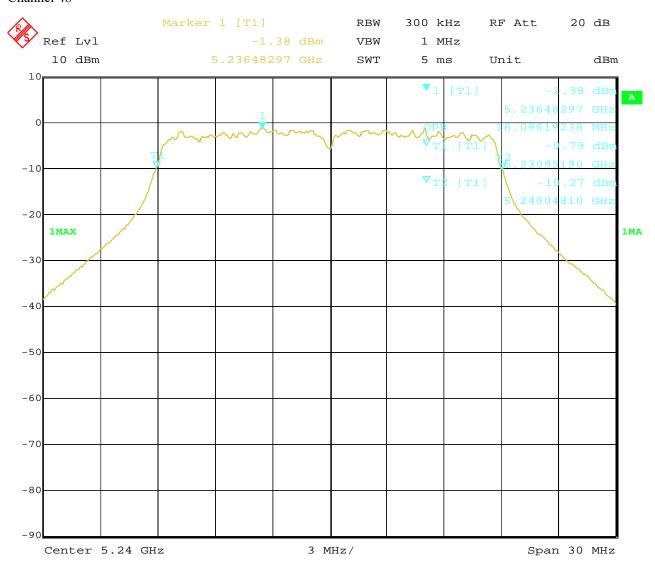

Date: 27.SEP.2022 19:25:35

Page 45 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT		Com	mercial Ki	osk Tablet	Model	NEB101
Mode			802.11n H	T40	Input Voltage	120V~
Temperati	ure		24 deg. C, Hun		Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Bandwidth Rate (MHz) (Mbps)		Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
38	5190		mcs0	46.29		Pass
46		5230	mcs0	46.29		Pass
99% Ban	dwidth					
38	5190		mcs0	37.39		Pass
46	5230		230 mcs0			Pass

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



### Test Configure

#### 26dB Bandwidth

### Channel 38

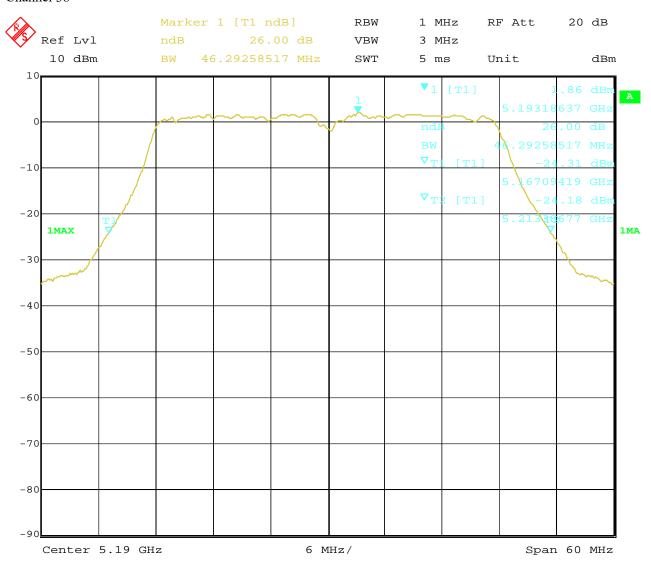

27.SEP.2022 21:00:33 Date:


Page 47 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 46

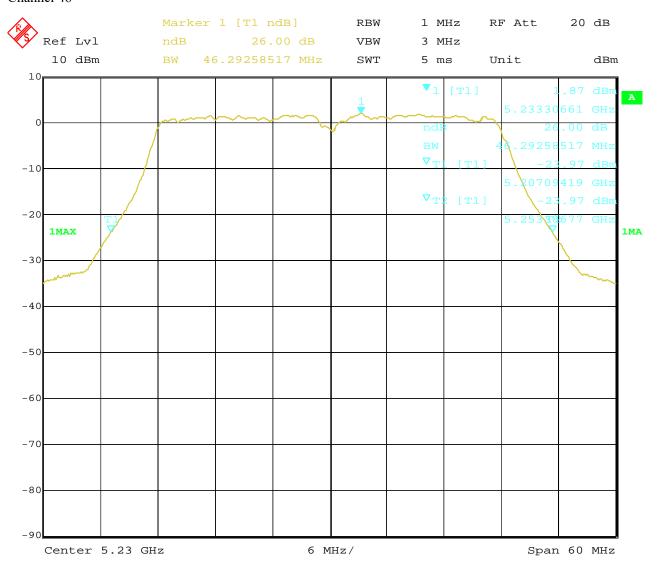

Date: 27.SEP.2022 21:03:36


Date: 2022-10-09



Test Configure

### 99% Bandwidth

### Channel 38

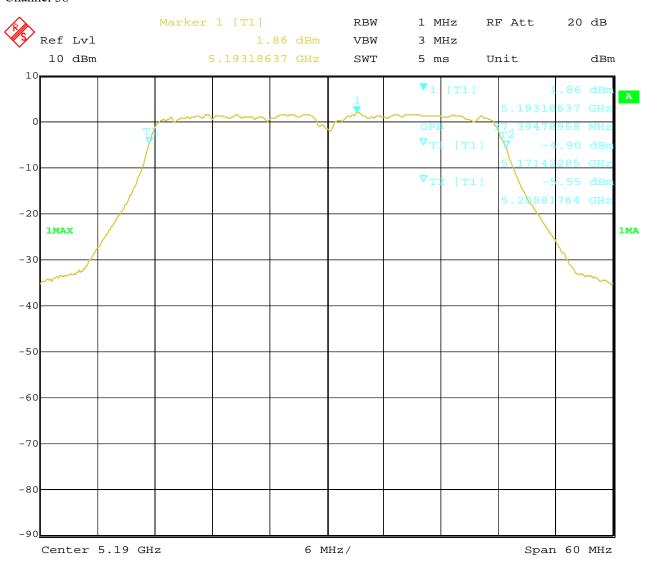

27.SEP.2022 21:00:16 Date:


Page 49 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 46

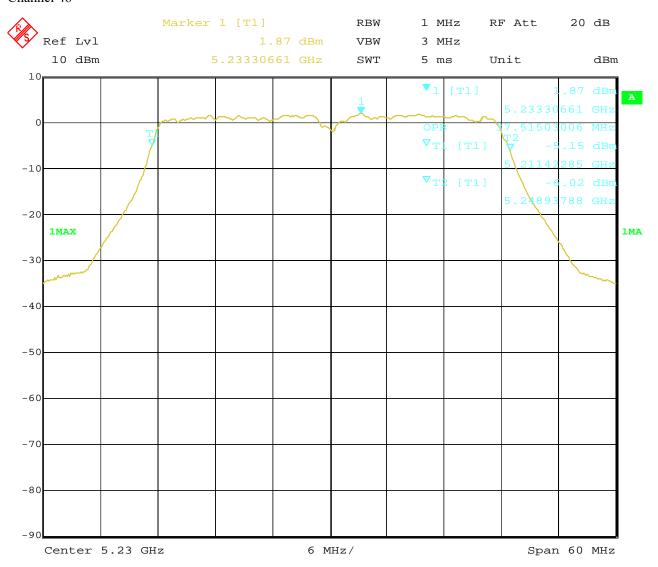

Date: 27.SEP.2022 21:03:48 Report No.: TW2208395-04E Page 50 of 95

Date: 2022-10-09



EUT		Cor	nmercial K	iosk Tablet	Model	NEB101
Mode			802.11ac V	/HT20	Input Voltage	120V~
Temperati	ure		24 deg.	. С,	Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Bandwidth Rate (MHz) (Mbps)		Minimum Limit (MHz)	Pass/ Fail
26dB Bar	ndwidth					
36		5180	mcs0	23.69		Pass
40		5200	mcs0	23.81		Pass
48		5240	mcs0	23.81		Pass
99% Ban	dwidth					
36	5180		mcs0	18.16		Pass
40	5200		mcs0	18.22		Pass
48	5240		mcs0	18.16		Pass

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



Test Configure

#### 26dB Bandwidth

### Channel 36

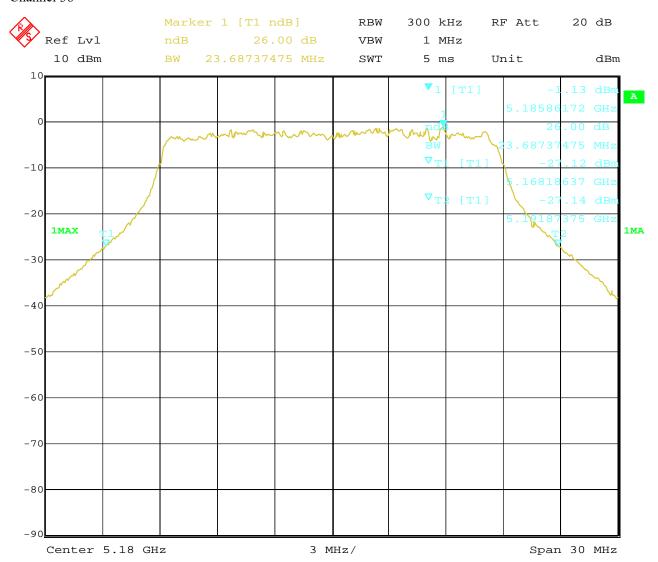

27.SEP.2022 19:56:03 Date:


Page 52 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 40

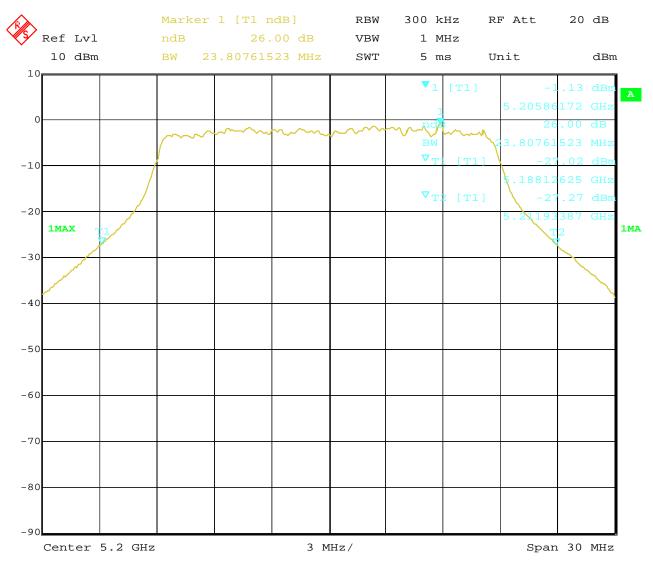

Date: 27.SEP.2022 19:53:58


Page 53 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

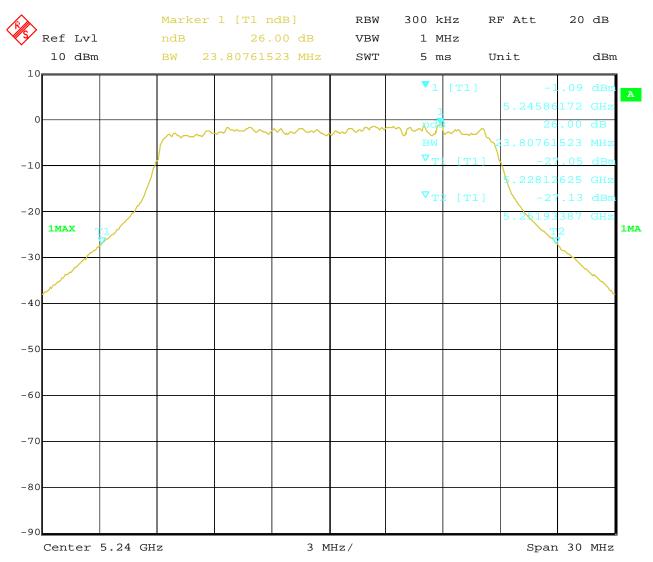

Date: 27.SEP.2022 19:59:09


Date: 2022-10-09



# Test Configure

### 99% Bandwidth

### Channel 36

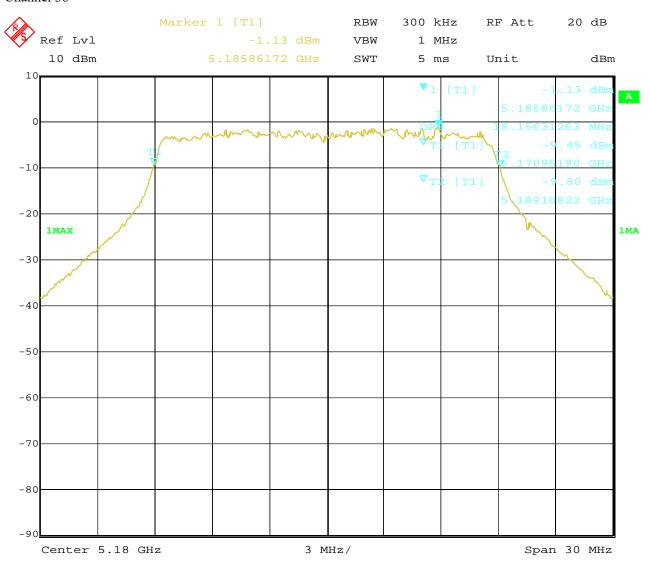

27.SEP.2022 19:55:53 Date:


Page 55 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 40

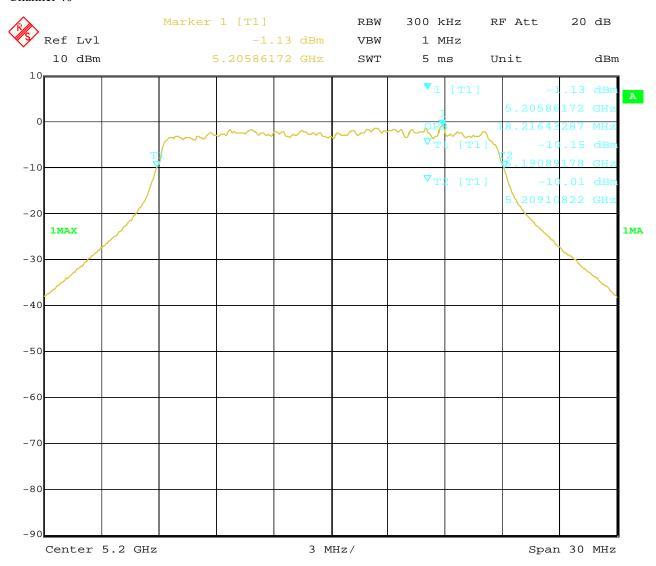

Date: 27.SEP.2022 19:54:21


Page 56 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 48

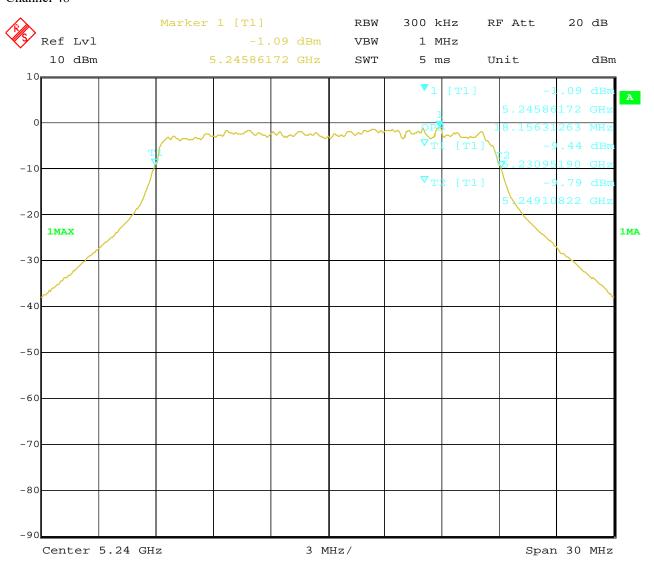

Date: 27.SEP.2022 19:59:20

Page 57 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT		Com	mercial Ki	osk Tablet	Model	NEB101
Mode			802.11ac V	HT40	Input Voltage	120V~
Temperati	ure		24 deg.	C,	Humidity	56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
26dB Bar						
38		5190	mcs0	45.93		Pass
46		5230	mcs0	45.69		Pass
99% Ban	dwidth					
38	5190		mcs0	37.03		Pass
46	5230		mcs0 37.27			Pass

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



Test Configure

#### 26dB Bandwidth

### Channel 38

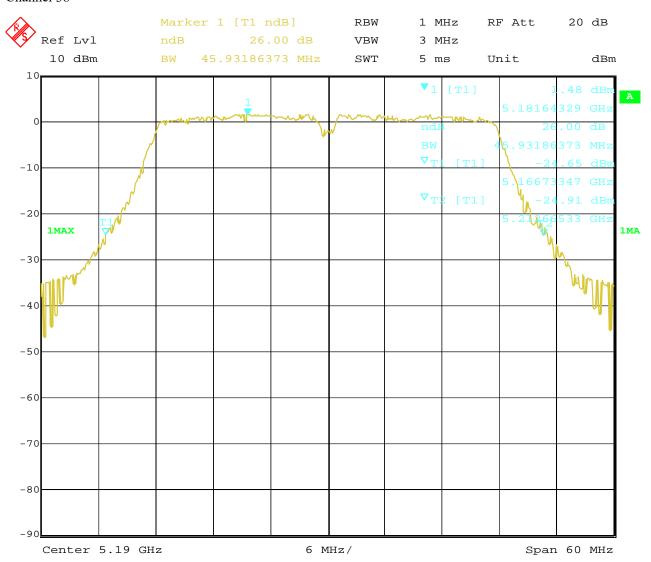

27.SEP.2022 22:22:20 Date:


Page 59 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### Channel 46

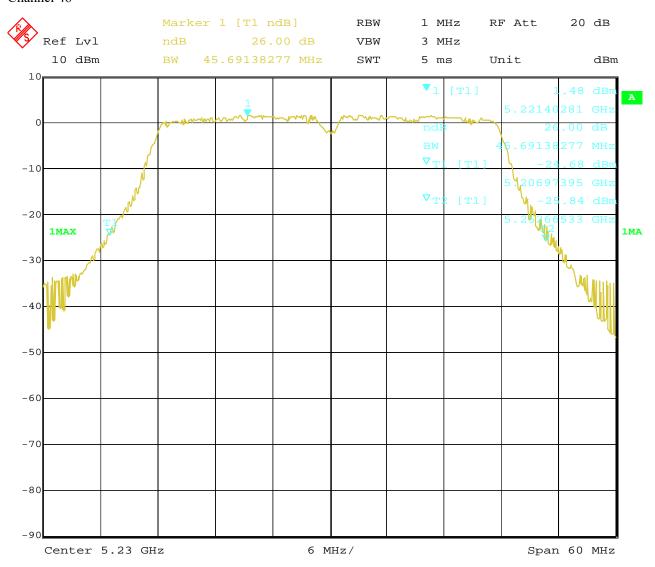

Date: 27.SEP.2022 22:24:23


Date: 2022-10-09



# Test Configure

### 99% Bandwidth

### Channel 38

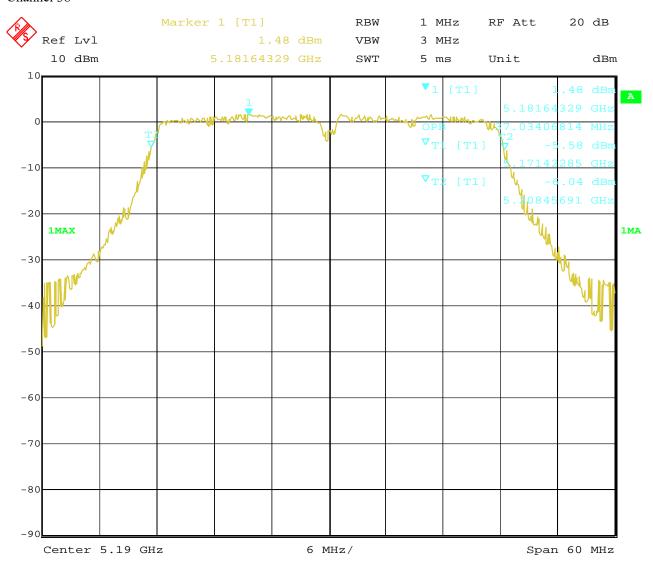

27.SEP.2022 22:22:07 Date:


Page 61 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



### Channel 46

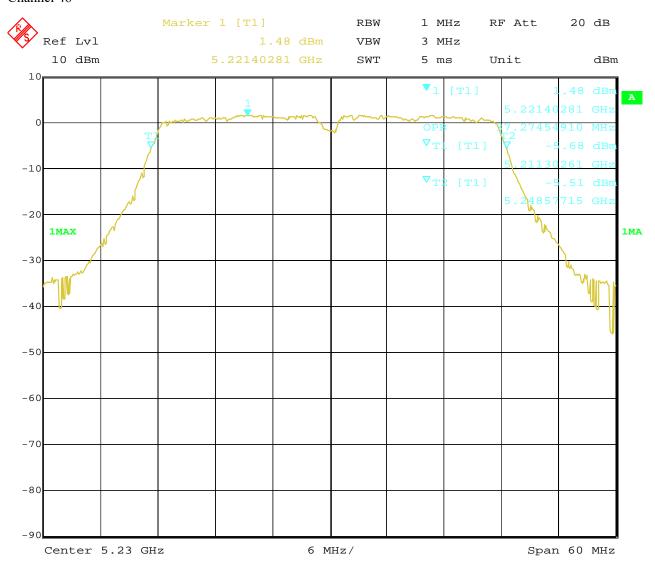

Date: 27.SEP.2022 22:24:43 Report No.: TW2208395-04E Page 62 of 95

Date: 2022-10-09



EUT		Com	mercial Kio	osk Tablet	Model	NEB101				
Mode		:	802.11ac V	HT80	Input Voltage	120V~				
Temperati	ure		24 deg.	С,	Humidity	56% RH				
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail				
26dB Bar	ndwidth									
42		5210	mcs0	84.65		Pass				
99% Ban	99% Bandwidth									
42	42 5210		mcs0	75.99		Pass				

Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2022-10-09



### Test Configure

#### 26dB Bandwidth

### Channel 42

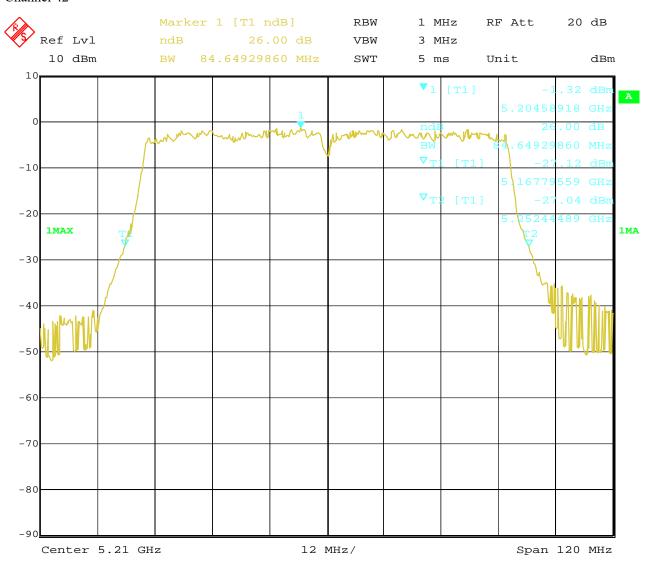

27.SEP.2022 22:21:06 Date:


Date: 2022-10-09



# Test Configure

### 99% Bandwidth

### Channel 42

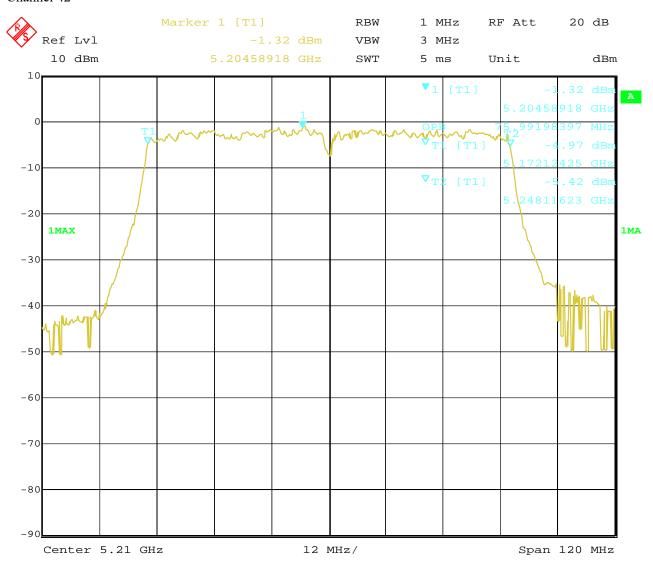

27.SEP.2022 22:21:22 Date:

Page 65 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### 8.0 Peak Transmit Power Measurement

# 8.1 Test Setup



# 8.2 Limits of Peak Transmit Power Measurement

For client devices in the 5.15-5.25 GHz band	250mW (24 dBm)

### 8.3 Test Procedure

The average power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Date: 2022-10-09



#### **8.4Test Results**

EU	T		Commercia	l Kiosk Table	t		Model		NEB10	1		
Mod	de		80	2.11a		Test Voltage			120V~			
Temper	Temperature		24 d		Humidity			56% RH				
Channel	Frequency		_		A	Ant 0		A	nt 1		Limit (dBm)	Pass/ Fail
	(MH	(MHz) dBn		mW	dB	n	mW					
36	5180	)	2.83	1.92	2.7	9	1.90		24	Pass		
40	5200		2.84	1.92	2.8		1.91		24	Pass		
48	5240		2.83	1.92	2.7	6	1.89		24	Pass		

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	T		Commercia	al Kiosk Tabl	et		Model			NEB101	
Mod	de		802.1	1n HT20			Test Voltage	e	120V~		
Temper	Temperature		24		Humidity			56% RH			
Channel	Frequency		A	nt 0		Aı	nt 1	Doy	Limit		Pass/ Fail
	(MH:	Z)	dBm	mW	dBm	n mW			ver-MIMO (dBm)	(dBm)	
36	5180	)	2.28	1.69	2.16		1.64		5.23	24	Pass
40	5200	)	2.26	1.68	2.12	2 1.63			5.20	24	Pass
48	5240		2.33	1.71	2.24		1.67		5.30	24	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 67 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



EU	T		Commerci	ial Kiosk Tab	let	Model			NEB101		
Mod	de		802.	11n HT40		Test Voltag	ge		120V~		
Temper	rature		24	deg. C,		Humidity	1				
Channel	Freque (MH:	-	A	nt 0	1	Ant 1		Total er-MIMO	Limit	Pass/ Fail	
	(MH)	<i>L)</i>	dBm	mW	dBm	mW		(dBm)	(dBm)		
38	5190	0	0.24	1.06	0.16	1.04		3.21	24	Pass	
46	5230	)	0.40	1.10	0.35	1.08		3.39	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38 and CH46

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	T		Commercia	ıl Kiosk Tabl	et		Model			NEB101	
Mod	de		802.11	ac VHT20			Test Voltage	2	120V~		
Temper	Temperature		24		Humidity			56% RH			
Channel	Frequency		A	nt 0		An	nt 1	Dow	Total ver-MIMO	Limit	
	(MH:	Z)	dBm	mW	dBm		mW		(dBm)	(dBm)	
36	5180	)	2.21	1.66	2.16		1.64		5.20	24	Pass
40	5200		2.22	1.67	2.18		1.65		5.21	24	Pass
48	5240		2.24	1.67	2.19		1.66		5.23	24	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 68 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



EU	T		Commercia	al Kiosk Tabl	et		Model			NEB101		
Mod	de		802.11ac VHT40			Test Voltage				120V~		
Temper	emperature		24 deg. C,			Humidity				56% RH		
Channel	Freque (MH:	-	A	nt 0		A	nt 1	Dow	Total ver-MIMO	Limit	Pass/ Fail	
	(MH)	Z)	dBm	mW	dBm		mW		(dBm)	(dBm)		
38	5190	)	0.25	1.06	0.16		1.04		3.22	24	Pass	
46	5230	)	0.23	1.05	0.11		1.03		3.18	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38 and CH46

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU'	Т		Commerci	al Kiosk Tab	let	Model		NEB101		
Mode			802.11ac VHT80			Test Voltage	÷	120V~		
Temper	ature		24 deg. C,			Humidity		56% RH		
Channel	Freque (MH:	-	Ai	nt 0	1	Ant 1	Total Power-MIMO	Limit	Pass/ Fail	
	(17111)	<i>L)</i>	dBm	mW	dBm	mW	(dBm)	(dBm)		
42	5210	0	-2.44	0.57	-2.63	0.55	0.48	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 s for CH42

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 69 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



# 9. Power Spectral Density Measurement

# 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

Operation Band	Limit		
U-NII-1	11dBm/MHz		

#### 9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz.
- 3. Set the VBW = 3MHz.
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 70 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



### 9.4Test Result

EUT Con		Con	nmercial Kiosk Tablet	Model	NEB101		
Mode			802.11a	Test Voltage	120V~		
Temperature		24 deg. C,		Humidity	56% RH		
Channel		Frequency Power Spectr (MHz)		ral Density(dBm/MH	(z)	Limit (dBm)	Pass/ Fail
36	5	5180		-1.76		11	Pass
40	5	200		-2.06		11	Pass
48	5	240		-1.88		11	Pass


Note: Two antennas (Ant 0 and Ant 1) were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Date: 2022-10-09



# 9.5 Plots of Power Spectral Density Measurement

1.802.11a at CH36

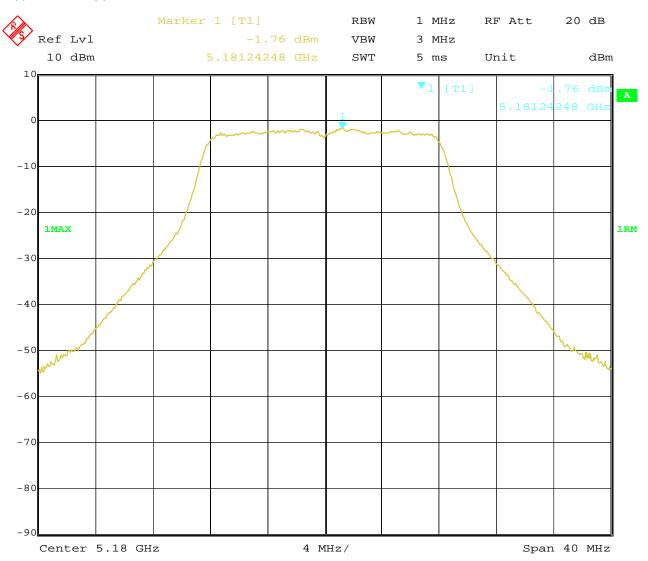

28.SEP.2022 14:36:59 Date:


Page 72 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 2.802.11a at CH40

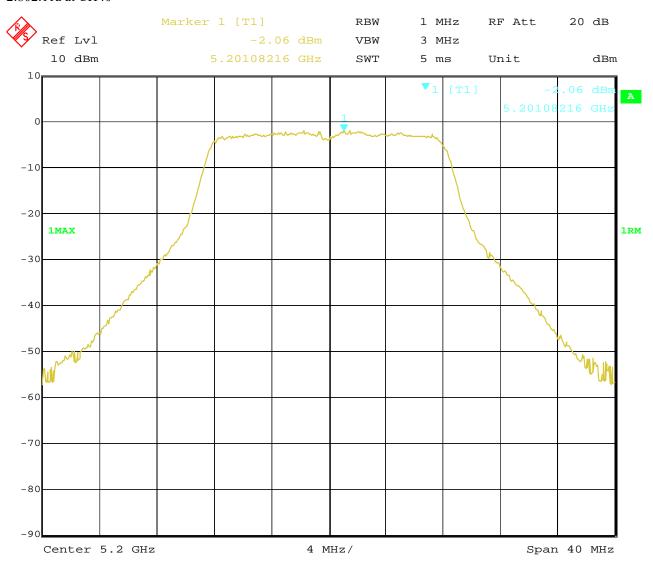

28.SEP.2022 14:41:14 Date:


Page 73 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 3.802.11a at CH48

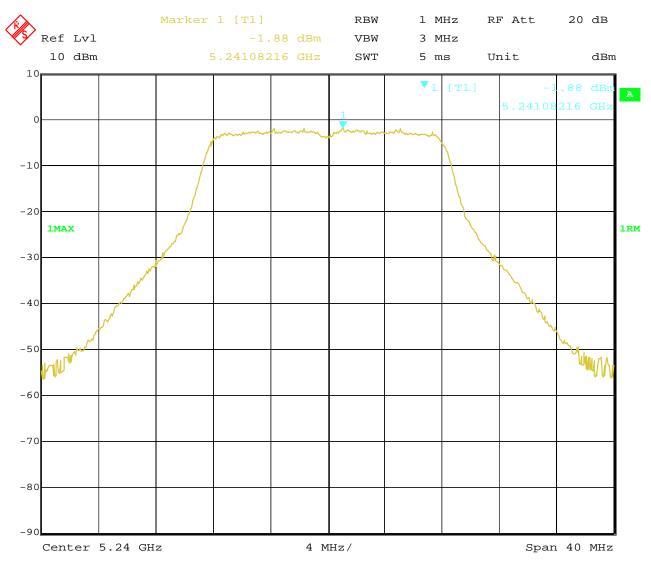

Date: 28.SEP.2022 14:42:22 Report No.: TW2208395-04E Page 74 of 95

Date: 2022-10-09



EUT	EUT C		Commercial Kiosk Tablet		Model		NEB101		
Mode		802.11n HT20		Test Vo	Test Voltage		120V~		
Tempera	ture		24 deg. C,	Humi	idity		56% RH		
Channel	_	uency IHz)	Power Spectral Density(dBm/MHz)	Factor	Total Spectral Density-MIMO (dBm/MHz)		Limit (dBm/MHz)	Pass/ Fail	
36	51	180	-2.76	3.01		0.25	11	Pass	
40	52	200	-2.50	3.01		0.51	11	Pass	
48	52	240	-2.81	3.01		0.20	11	Pass	

Page 75 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### **Test Plots**

1.802.11n at CH36

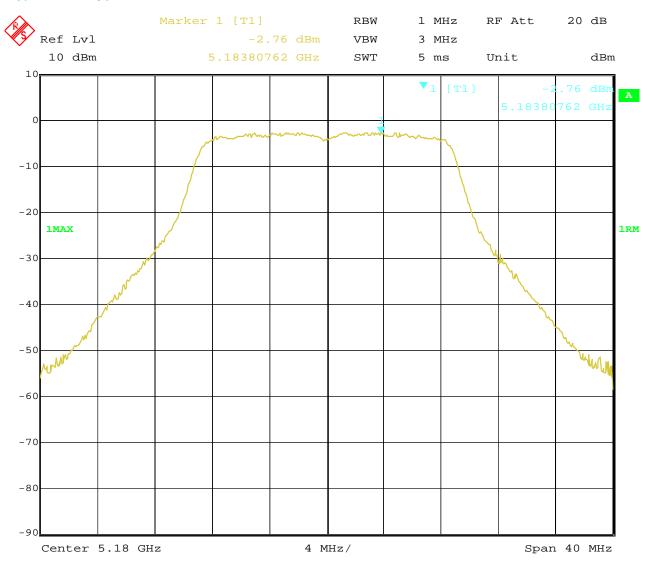

Date: 28.SEP.2022 15:31:33


Page 76 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 2.802.11n at CH40

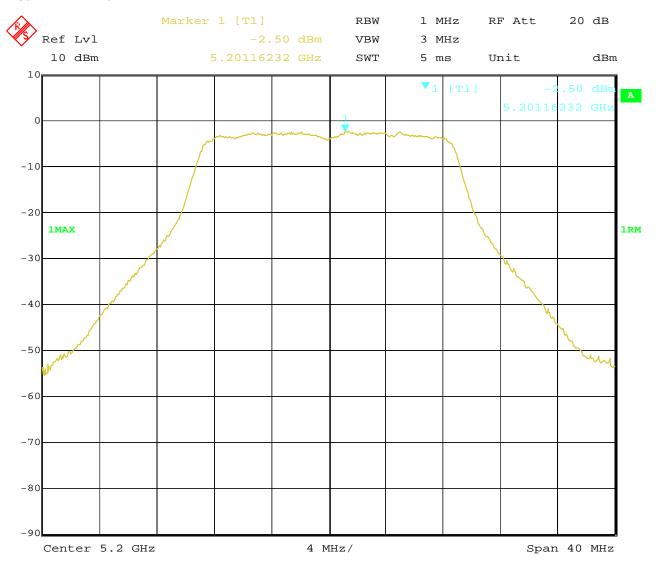

28.SEP.2022 15:21:34 Date:


Page 77 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 3.802.11n at CH48

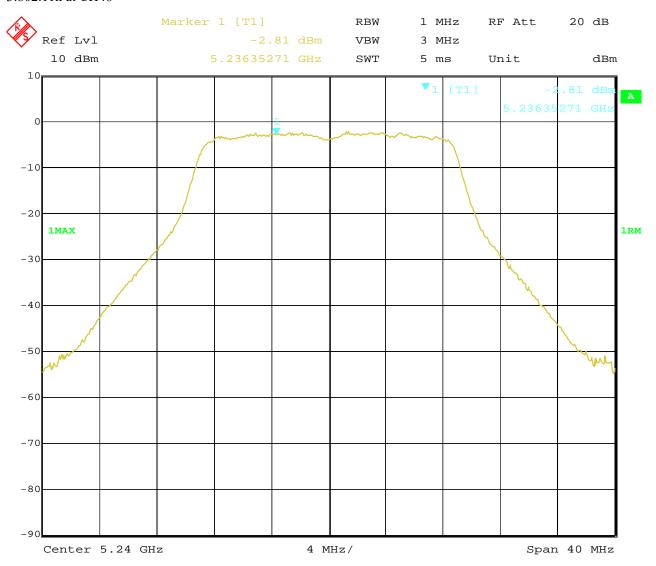

Date: 28.SEP.2022 15:19:04

Page 78 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT		Con	nmercial Kiosk Tablet	rcial Kiosk Tablet Model		NEB101		
Mode	de		802.11n HT40		Test Voltage		120V~	
Temperature			24 deg. C,	Humi	Humidity		56% RH	
Channel	Frequency		Power Spectral	Factor	Total Spectral		Limit	Pass/
	(MHz)		Density(dBm/MHz)		Density-MIMO		(dBm/MHz)	Fail
					(dl	Bm/MHz)		
38	5	190	-4.92	3.01		-1.91	11	Pass
46	5	230	-4.88	3.01		-1.87	11	Pass

Page 79 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### **Test Plots**

### 1.802.11n HT40 at CH38

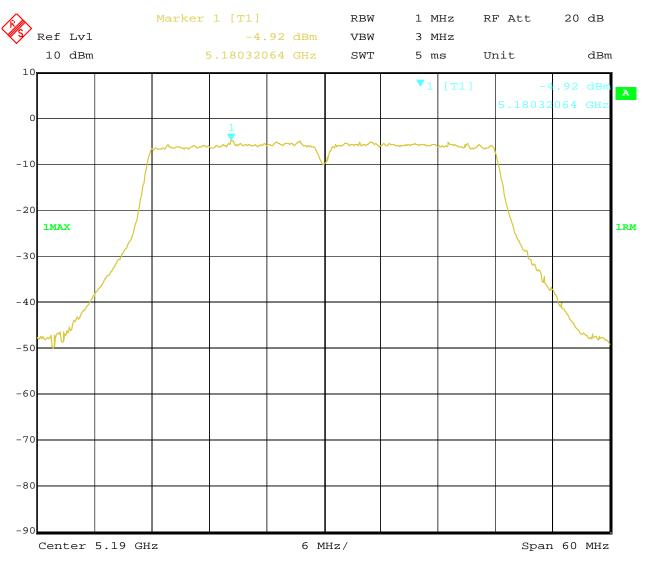

Date: 28.SEP.2022 14:24:26


Page 80 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 2.802.11n HT40 at CH46

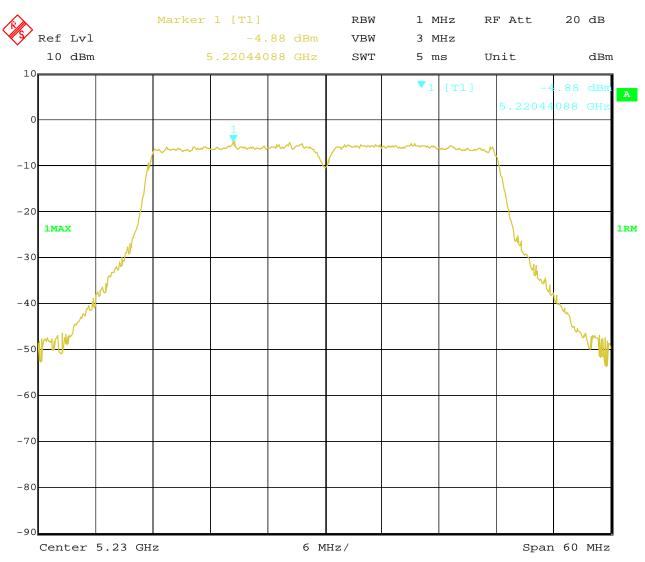

Date: 28.SEP.2022 14:15:54 Report No.: TW2208395-04E Page 81 of 95

Date: 2022-10-09



EUT Con		mmercial Kiosk Tablet Mo		del		NEB101			
Mode		802.11ac VHT20		Test Vo	Test Voltage		120V~		
Temperat	mperature 24 deg. C, Humidity			56% RH					
Channel	Frequer (MHz	-	Power Spectral Density(dBm/MHz)	Factor	Densit	Spectral y-MIMO n/MHz)	Limit (dBm/MHz)	Pass/ Fail	
36	5180	)	-2.27	3.01	0	).74	11	Pass	
40	5200	)	-2.31	3.01	0	).70	11	Pass	
48	5240	)	-2.15	3.01	0	).86	11	Pass	

Page 82 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### **Test Plots**

1.802.11ac at CH36

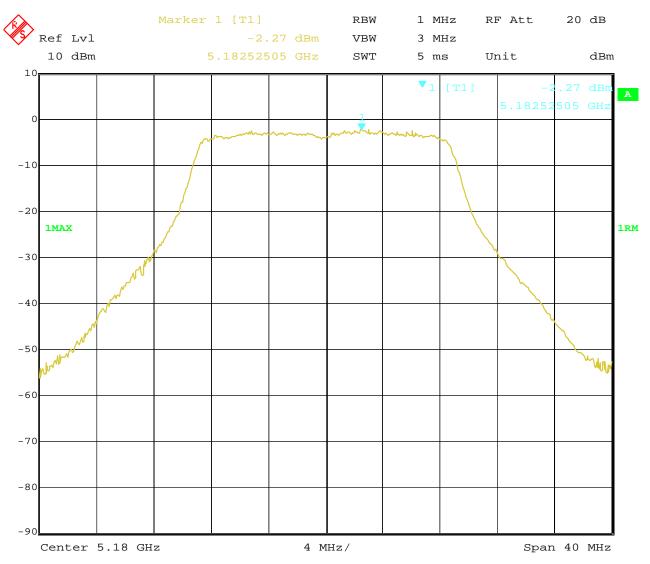

Date: 28.SEP.2022 15:27:31


Page 83 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 2.802.11ac at CH40

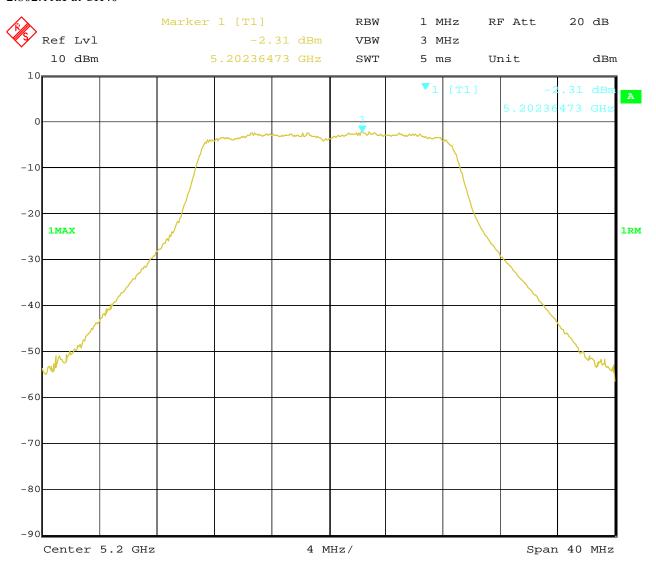

28.SEP.2022 15:26:30 Date:


Page 84 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 3.802.11ac at CH48

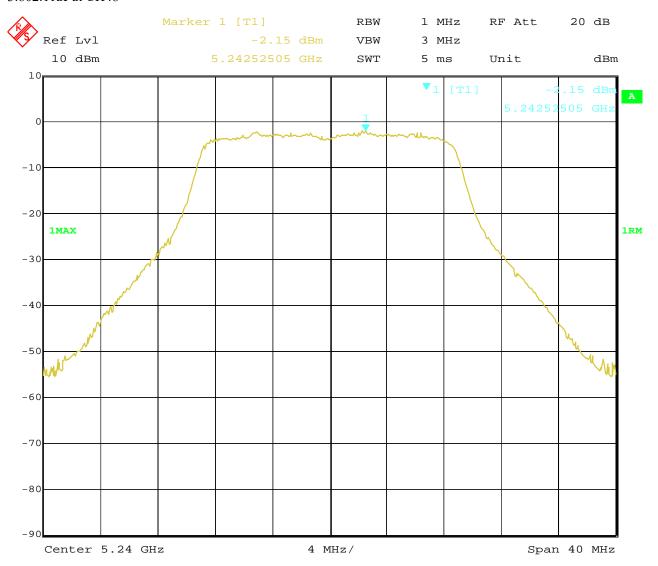

Date: 28.SEP.2022 15:12:21

Page 85 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT	EUT Cor		nmercial Kiosk Tablet	Mod	Model		NEB101	
Mode	Mode		802.11ac VHT40	Test Vo	oltage		120V~	
Temperat	Temperature		24 deg. C,	Humi	Humidity		56% RH	
Channel		quency (Hz)	Power Spectral Density(dBm/MHz)	Factor	Total Spectral Density-MIMO		Limit (dBm/MHz)	Pass/ Fail
	(17	1112)	Density (d.Diii/1vii12)		(dBm/MHz)		(dDill Willz)	
38	5	190	-5.20	3.01	-2	2.19	11	Pass
46	5.	230	-5.33	3.01	-2	2.32	11	Pass

Page 86 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### **Test Plots**

### 1.802.11ac at CH38

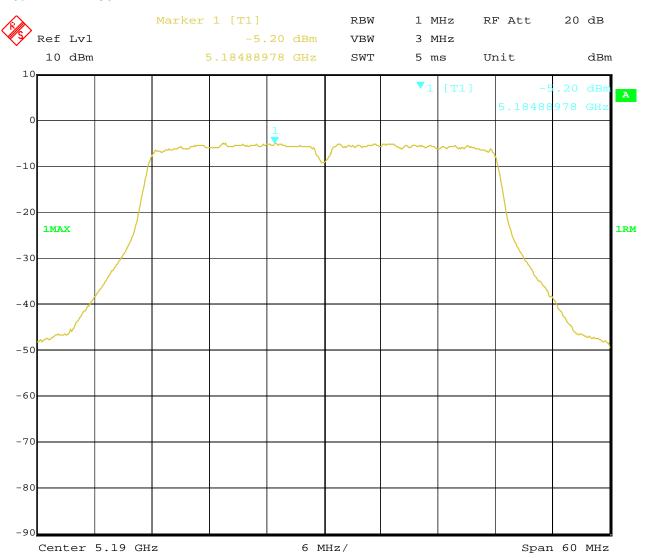

Date: 28.SEP.2022 13:53:56


Page 87 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



#### 2.802.11ac at CH46

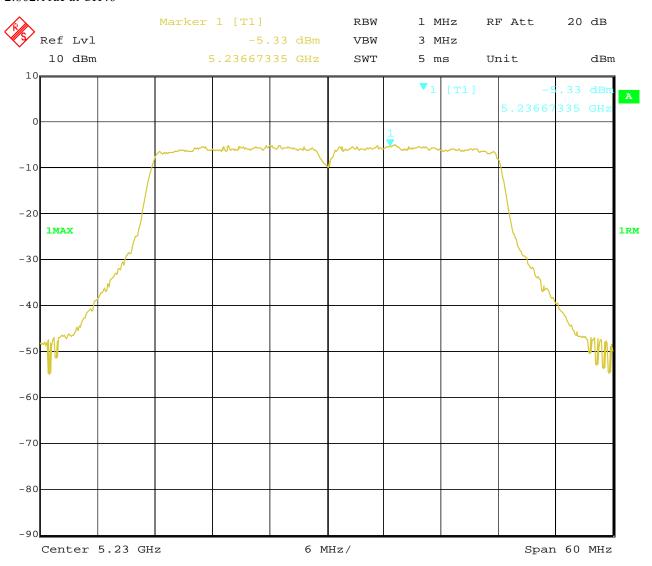

Date: 28.SEP.2022 13:59:41

Page 88 of 95 Report No.: TW2208395-04E

Date: 2022-10-09



EUT		Commercial Kiosk Tablet		Mod	Model		NEB101		
Mode			802.11ac VHT80	Test Voltage		120V~			
Temperat	Temperature		24 deg. C,	Humi	Humidity		56% RH		
Channel		luency IHz)	Power Spectral Density(dBm/MHz)	Factor	Dens	al Spectral sity-MIMO Bm/MHz)	Limit (dBm/MHz)	Pass/ Fail	
42	5:	210	-8.02	3.01		-5.01	11	Pass	

Page 89 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### **Test Plots**

1.802.11ac at CH42

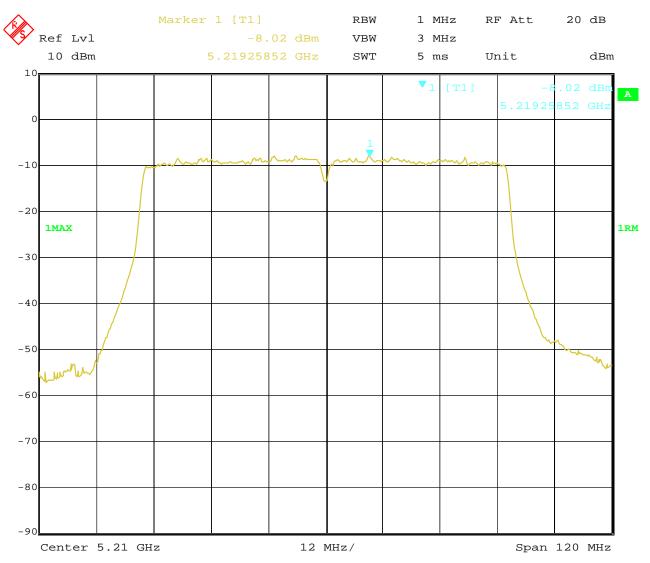

28.SEP.2022 13:48:28 Date:

Report No.: TW2208395-04E

Date: 2022-10-09



Page 90 of 95

# 10.0 Frequency Stability

### 10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within  $\pm$ 0.02% of the operating frequency over a temperature variation of  $\pm$ 30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

### 10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Page 91 of 95

Report No.: TW2208395-04E

Date: 2022-10-09



### 10.3 Test Result

# **Channel 36 (5180MHz)**

# Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
120V	5180.0367
108V	5180.0378
132V	5180.0364
Max. Deviation (MHz)	0.0374
Max. Deviation (ppm)	7.32

Rated working voltage: 120V~

# **Temperature vs. Frequency Stability**

Temperature (°C)	Measurement Frequency (MHz)
-30	5180.0376
-20	5180.0358
-10	5180.0387
0	5180.0354
10	5180.0363
20	5180.0378
30	5180.0384
40	5180.0376
50	5180.0367
Max. Deviation (MHz)	0.0386
Max. Deviation (ppm)	7.32

Report No.: TW2208395-04E

Date: 2022-10-09



Page 92 of 95

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 11.2 Antenna Connected construction

Two FPC antenna used. The maximum Gain is 3.04dBi for each one.

Report No.: TW2208395-04E Page 93 of 95

Date: 2022-10-09



#### 12.0 FCC Label

# FCC ID: 2AACS-NEB101

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:



Page 94 of 95


Report No.: TW2208395-04E

Date: 2022-10-09



#### 13.0 **Photo of testing**

Conducted Emission Test Setup:

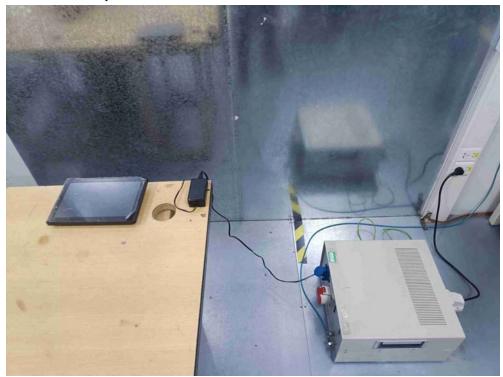


Report No.: TW2208395-04E

Date: 2022-10-09



# Radiated Emission Test Setup:

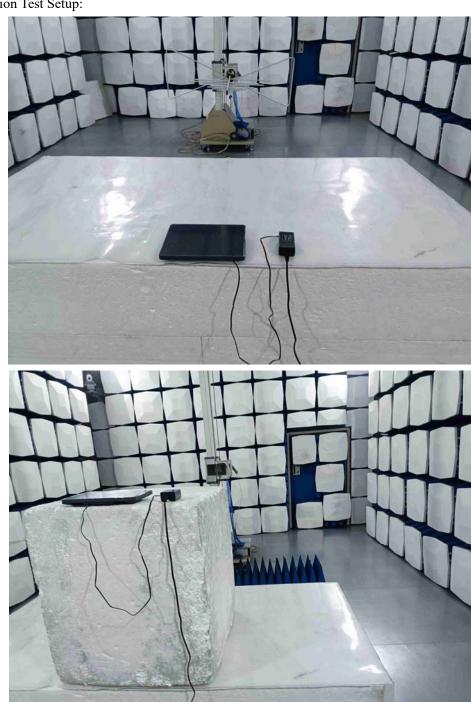

# **Photos of EUT**

Please see test report TW2208395-01E

# -- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.