




Band Edge 802.11g 2442MHzRef

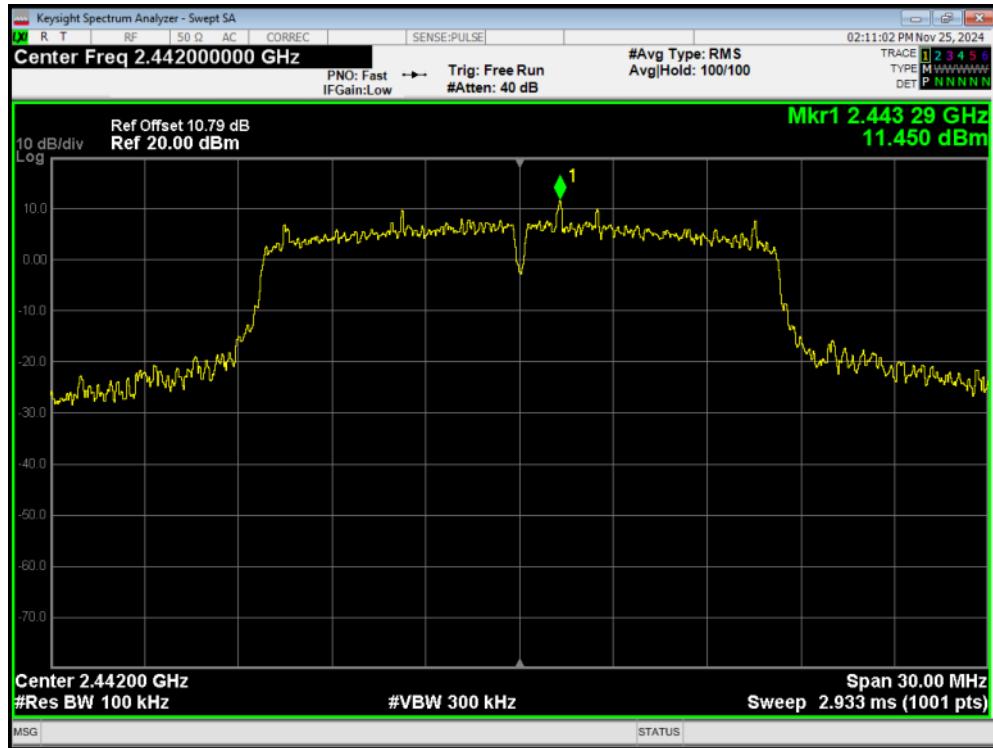


Band Edge 802.11g 2442MHzEmission

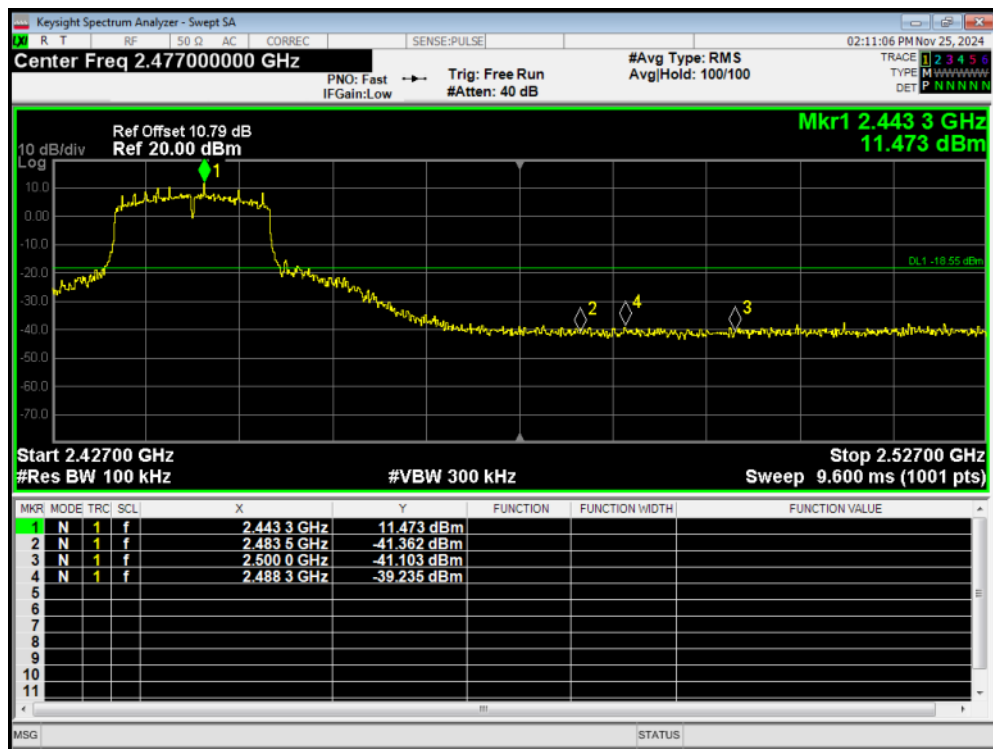


Band Edge 802.11g 2447MHzRef

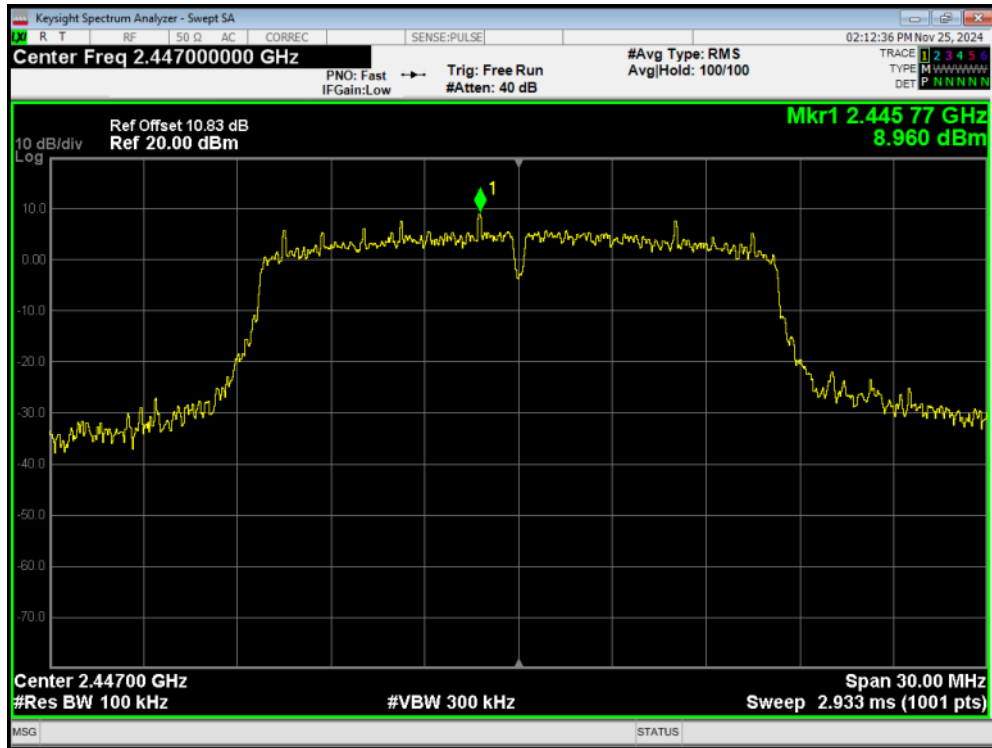


Band Edge 802.11g 2447MHzEmission

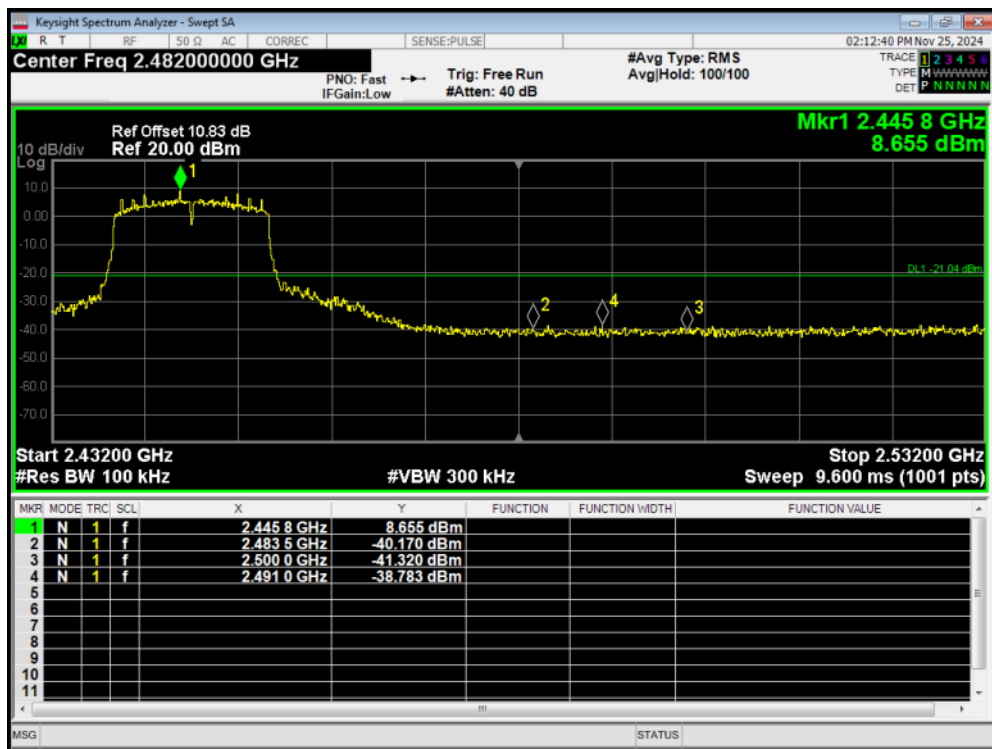


Band Edge 802.11g 2452MHzRef

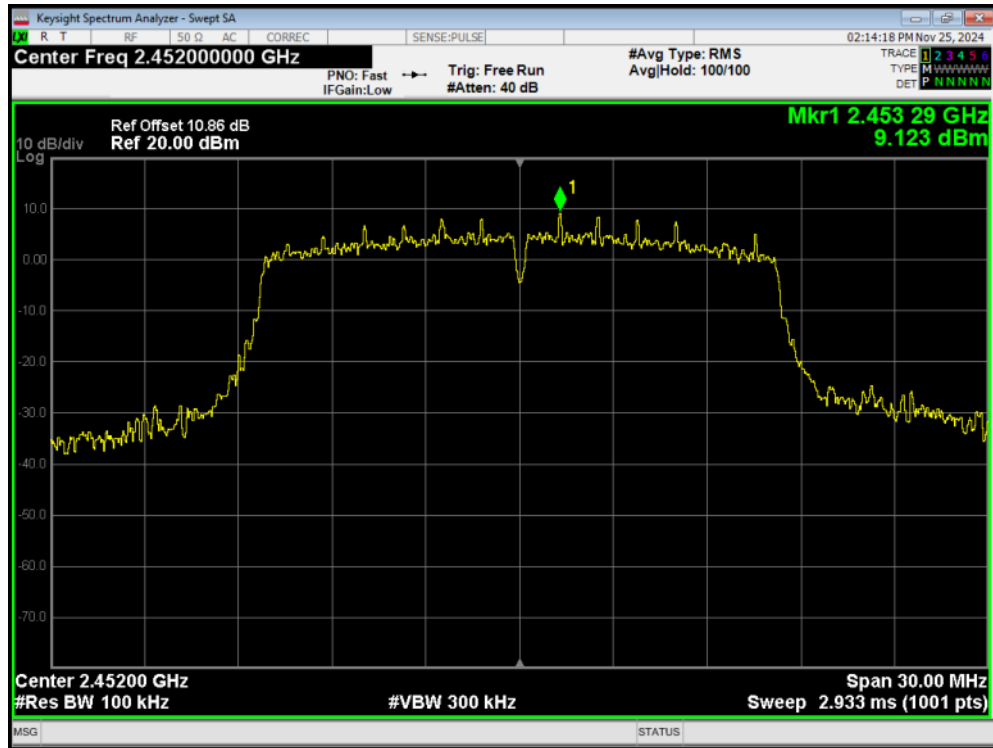


Band Edge 802.11g 2452MHzEmission

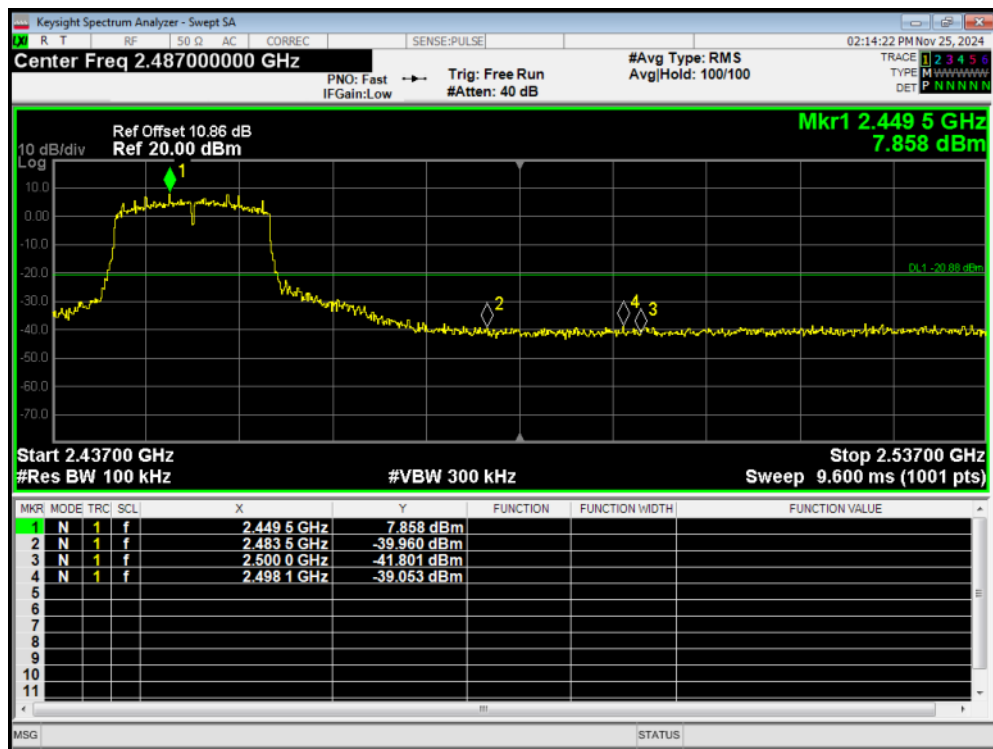


Band Edge 802.11g 2457MHzRef

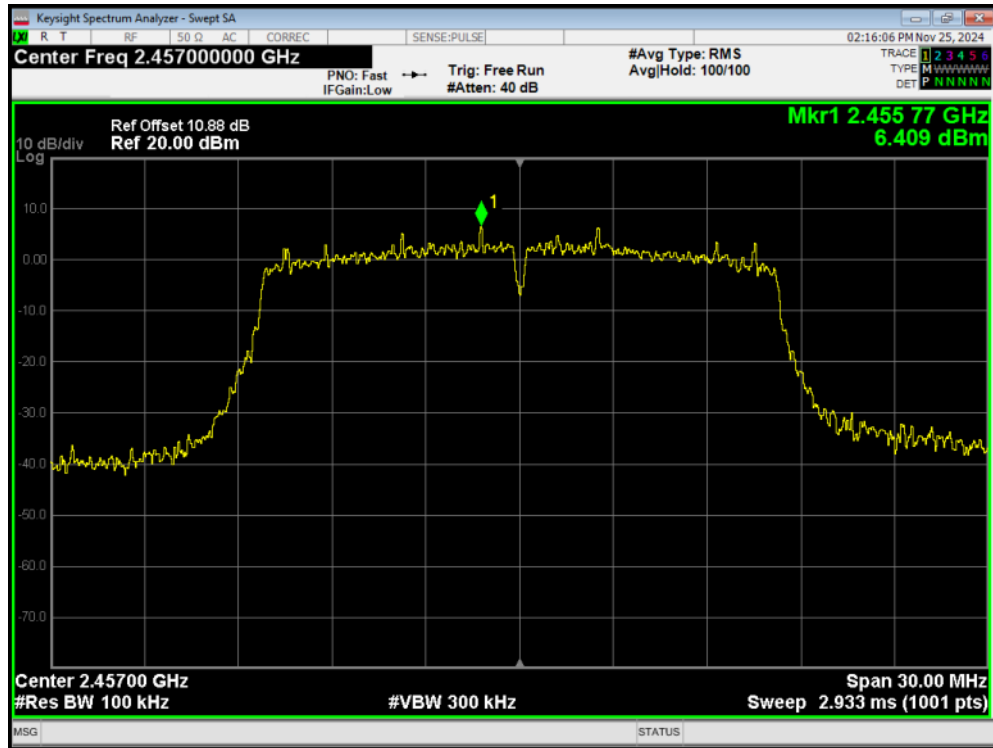


Band Edge 802.11g 2457MHzEmission

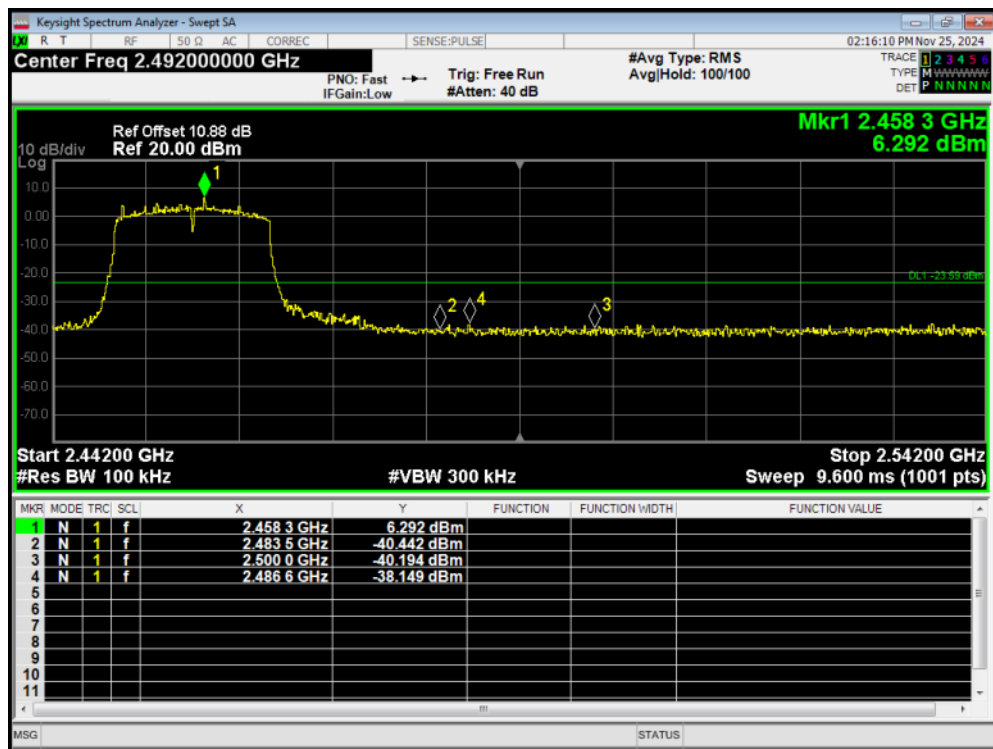


Band Edge 802.11g 2462MHzRef

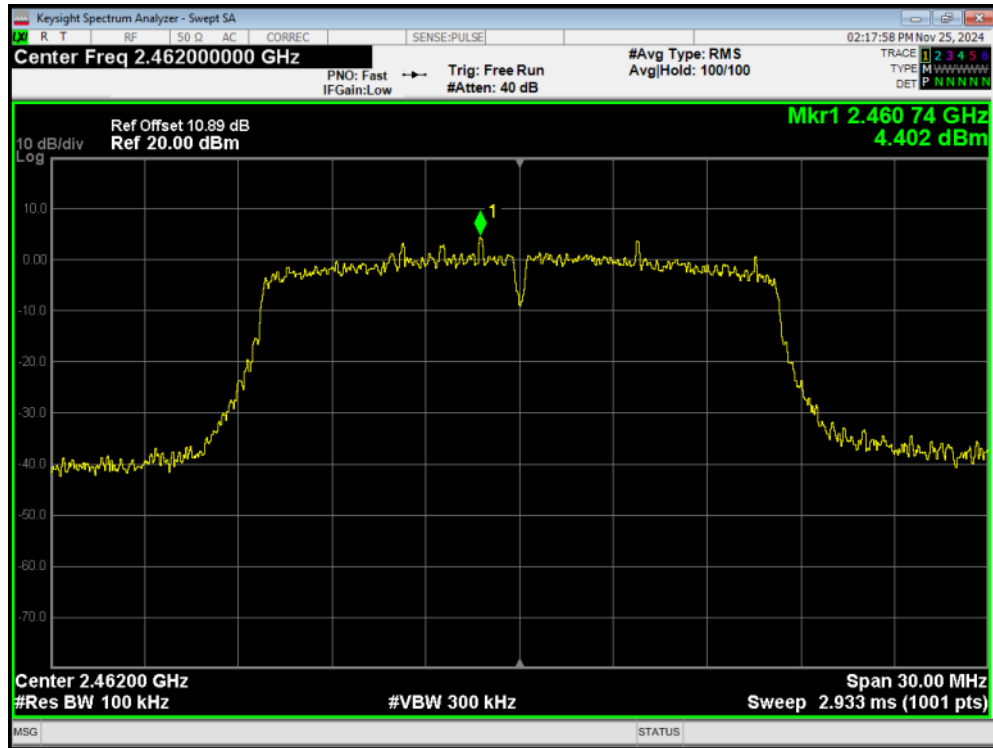


Band Edge 802.11g 2462MHzEmission

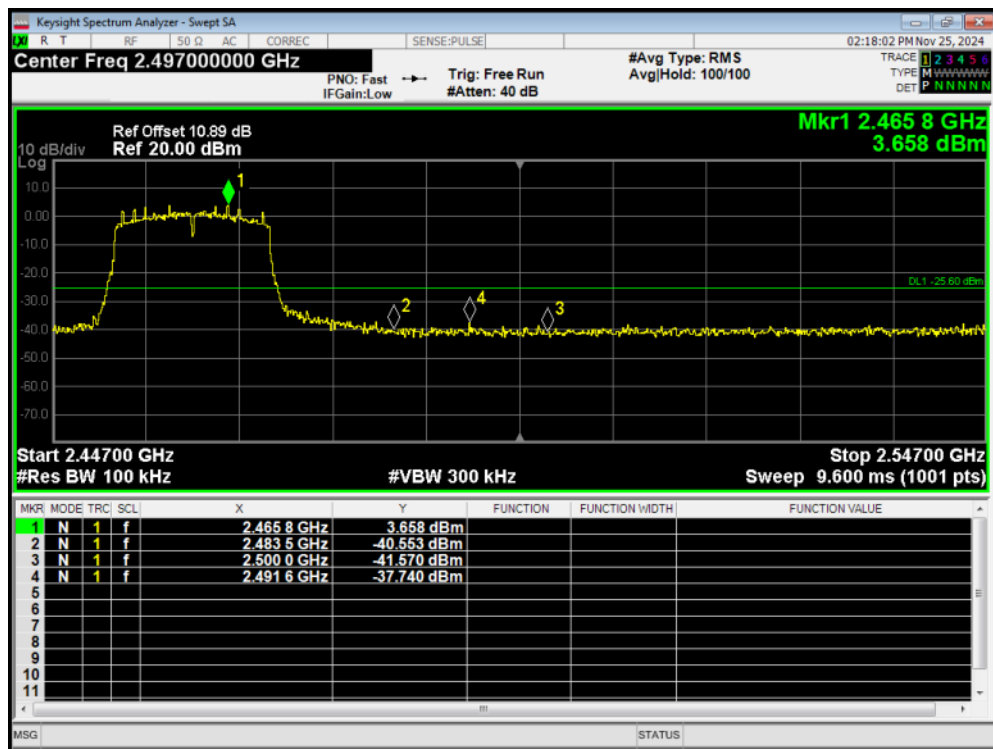


Band Edge 802.11n(HT20) 2412MHzRef

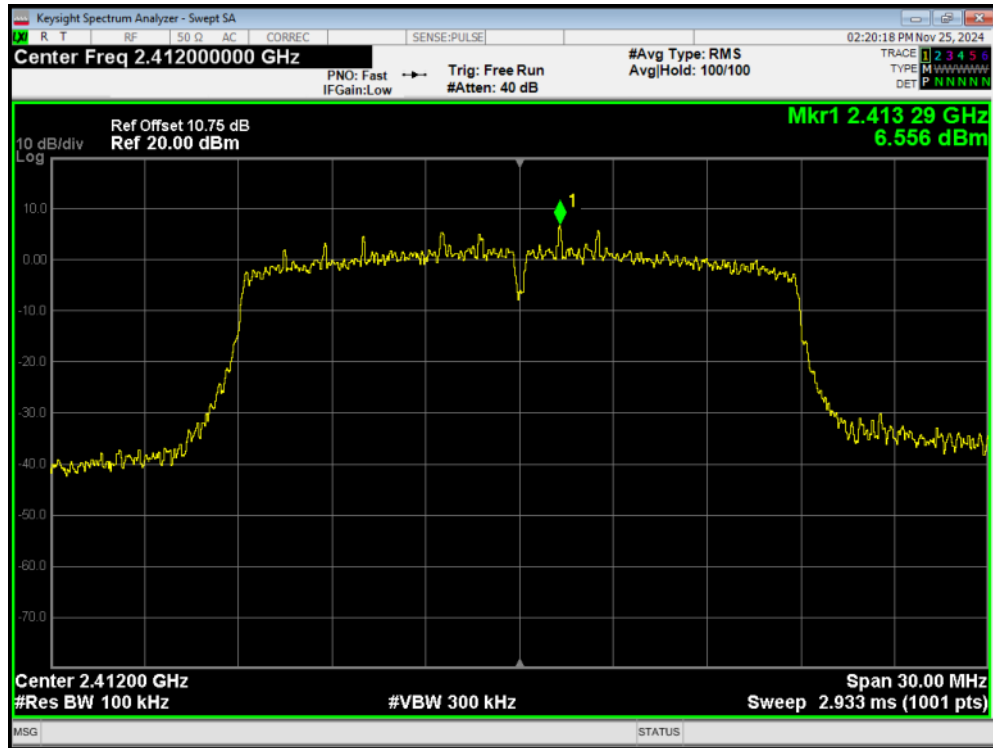


Band Edge 802.11n(HT20) 2412MHzEmission

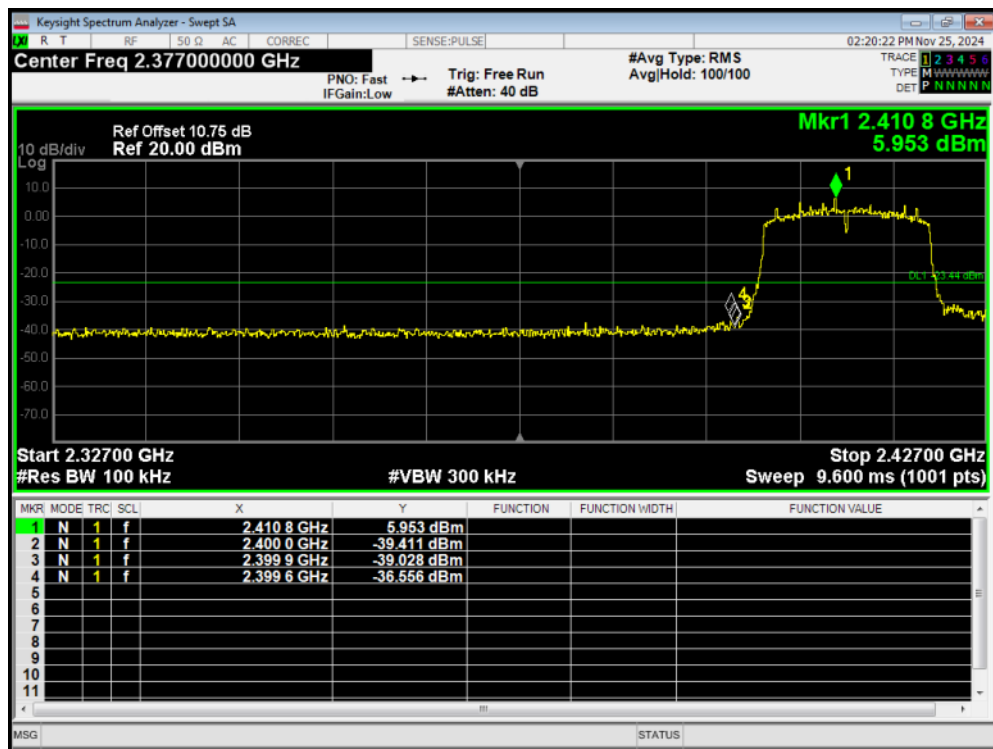


Band Edge 802.11n(HT20) 2417MHzRef

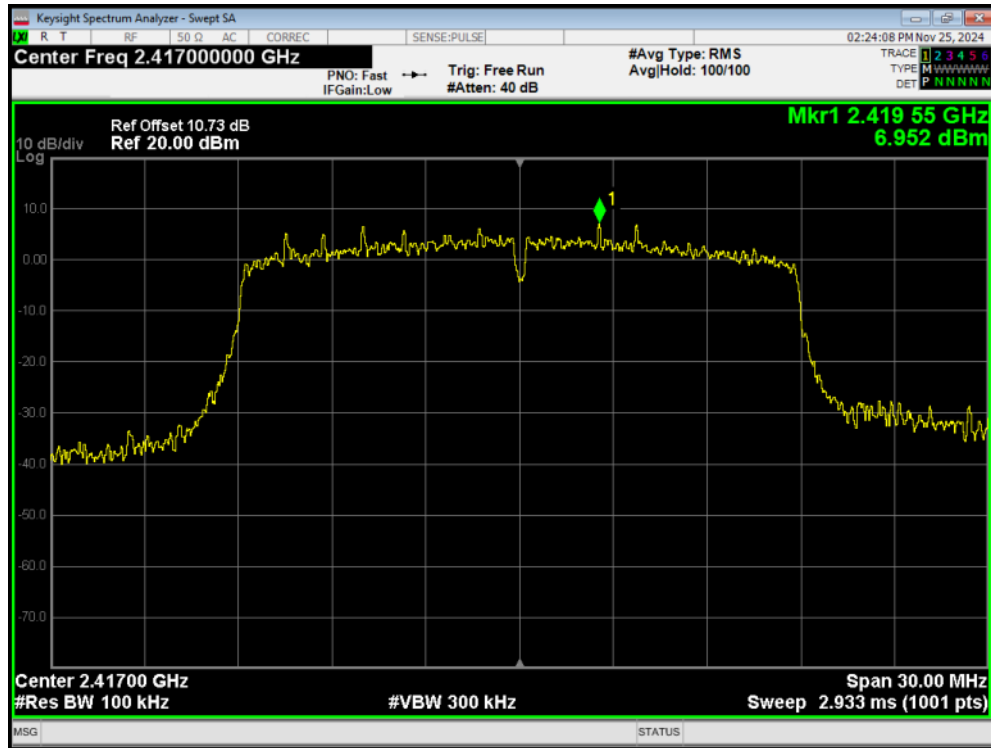


Band Edge 802.11n(HT20) 2417MHzEmission

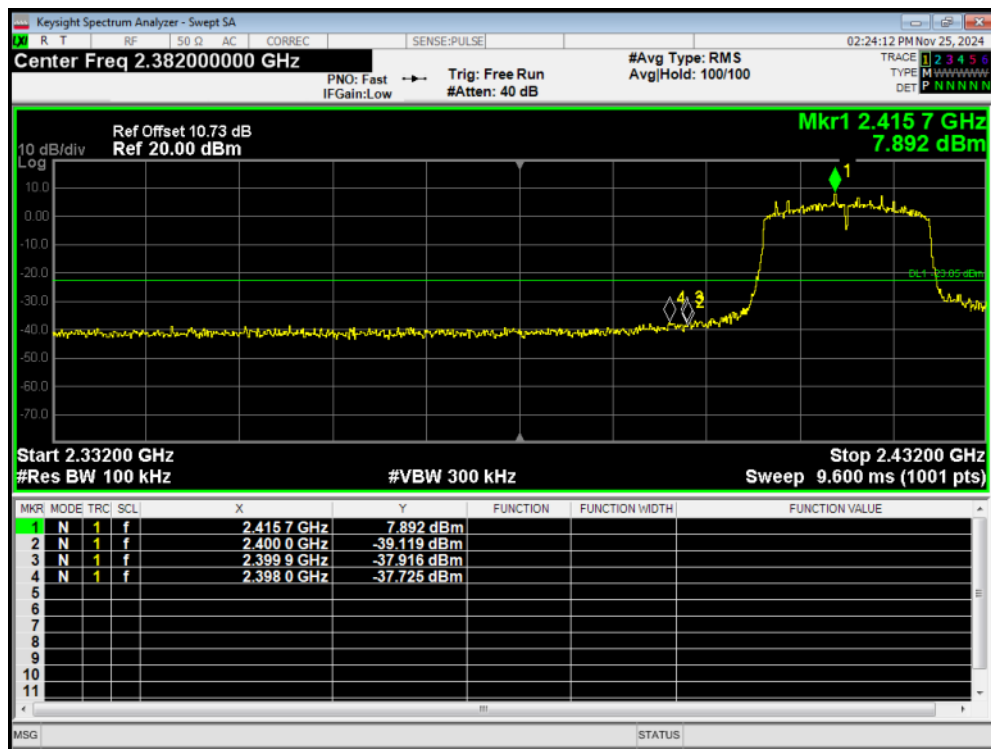


Band Edge 802.11n(HT20) 2422MHzRef

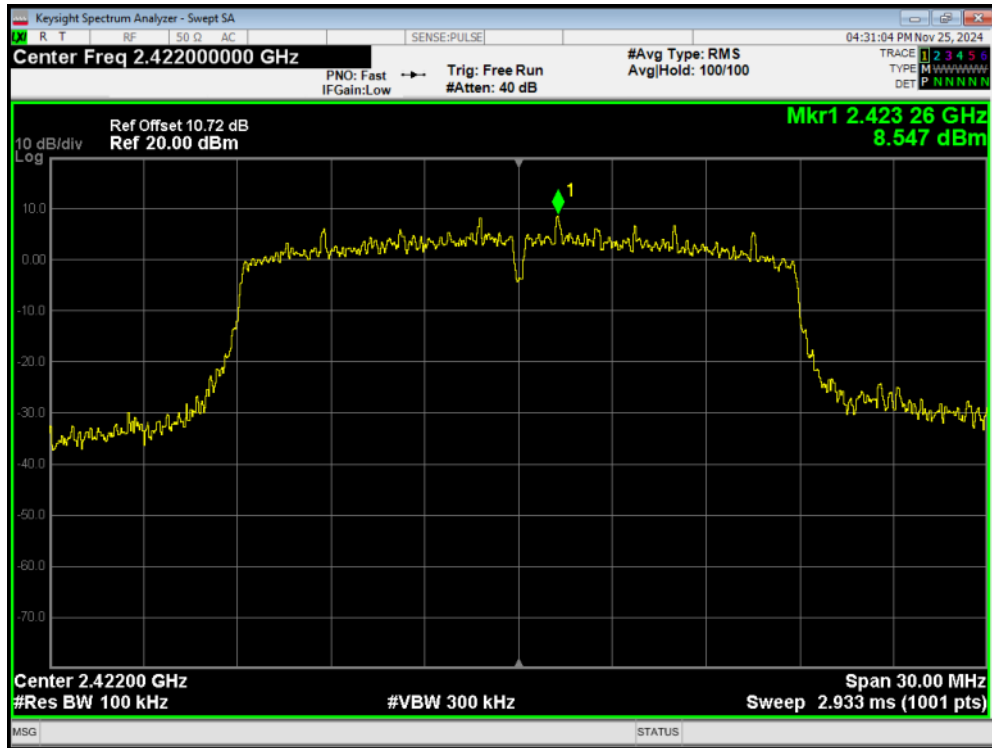


Band Edge 802.11n(HT20) 2422MHzEmission

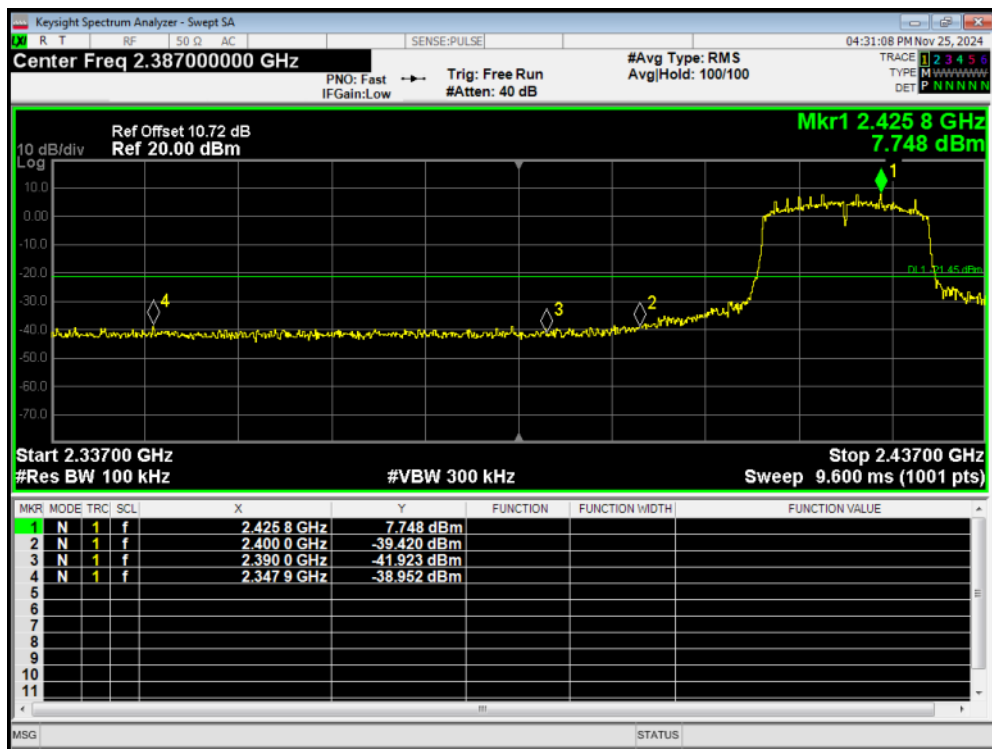


Band Edge 802.11n(HT20) 2427MHzRef

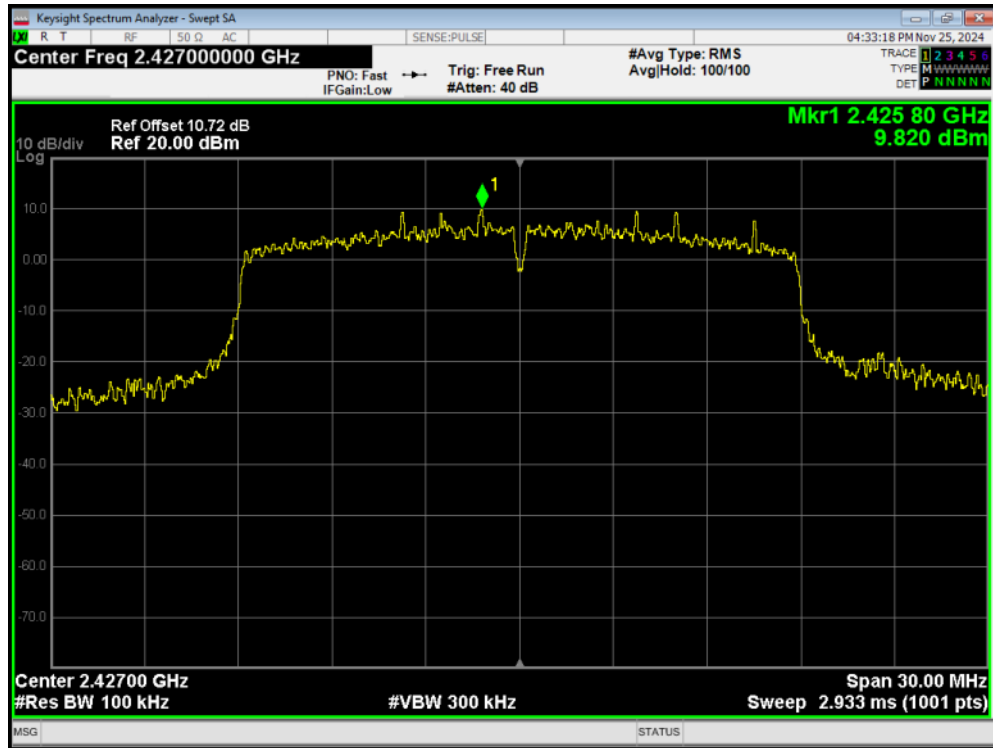


Band Edge 802.11n(HT20) 2427MHzEmission

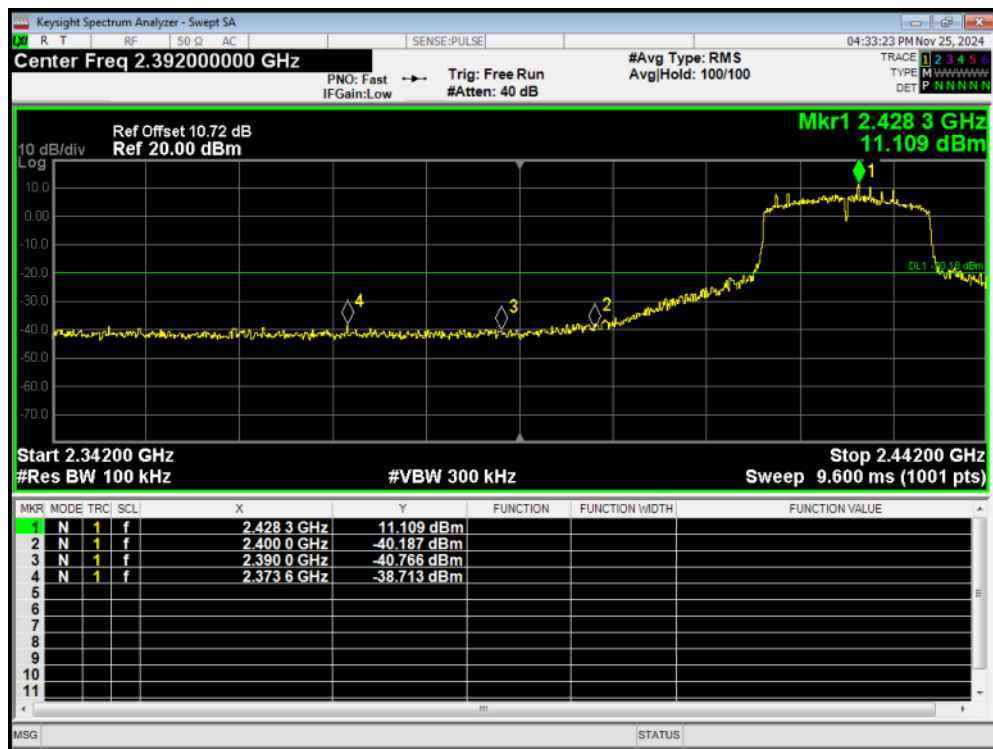


Band Edge 802.11n(HT20) 2432MHzRef

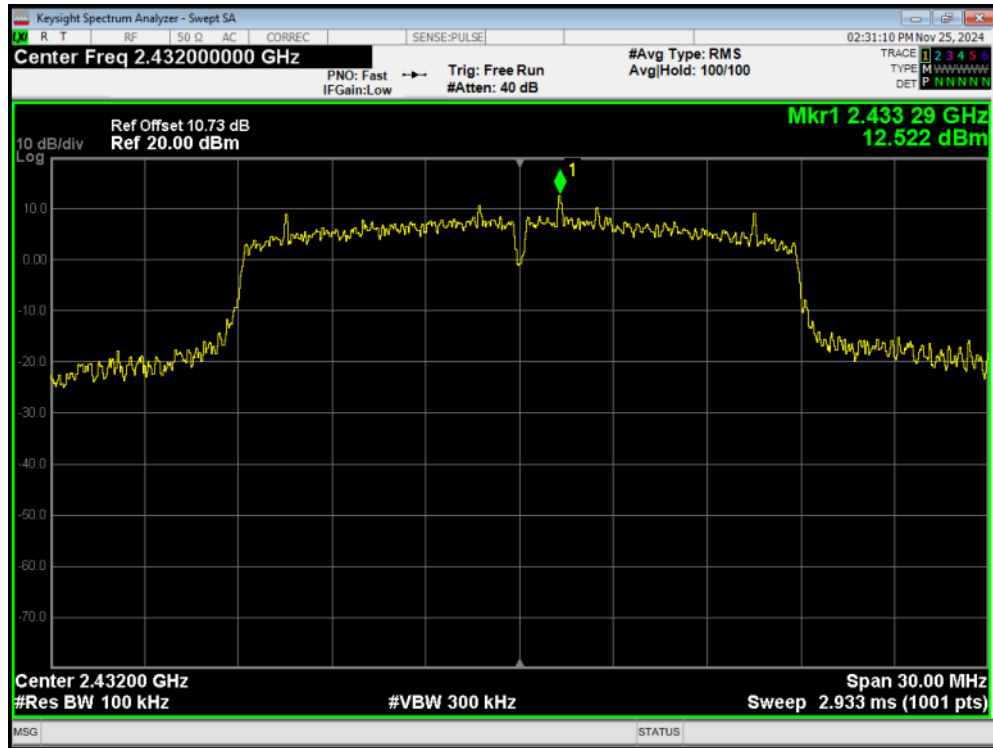


Band Edge 802.11n(HT20) 2432MHzEmission

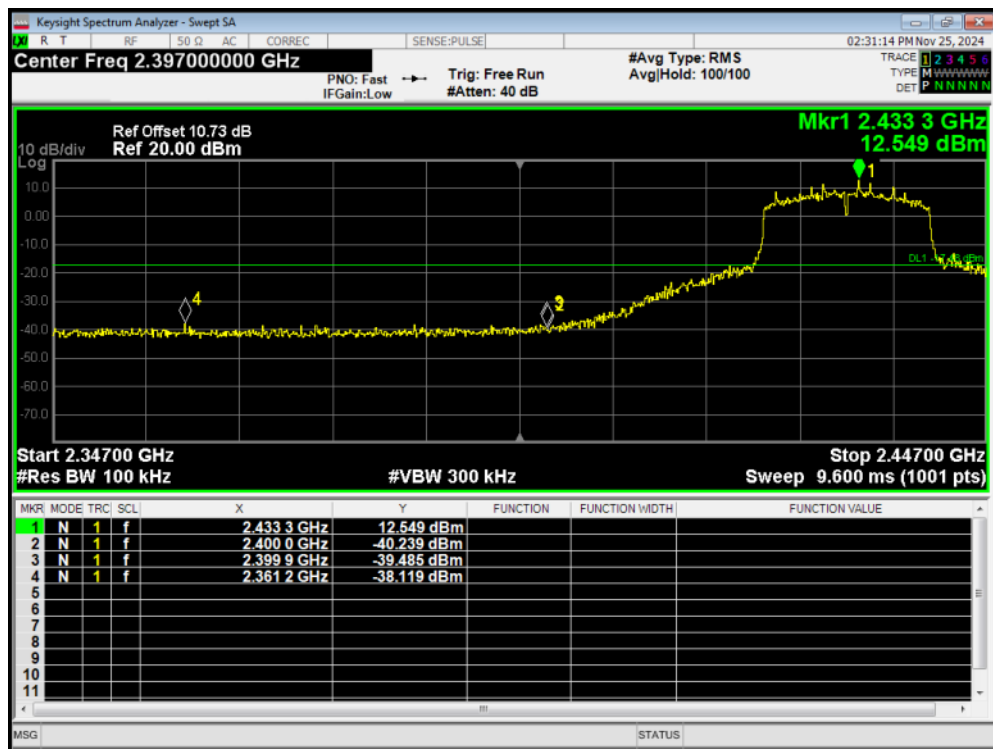


Band Edge 802.11n(HT20) 2442MHzRef

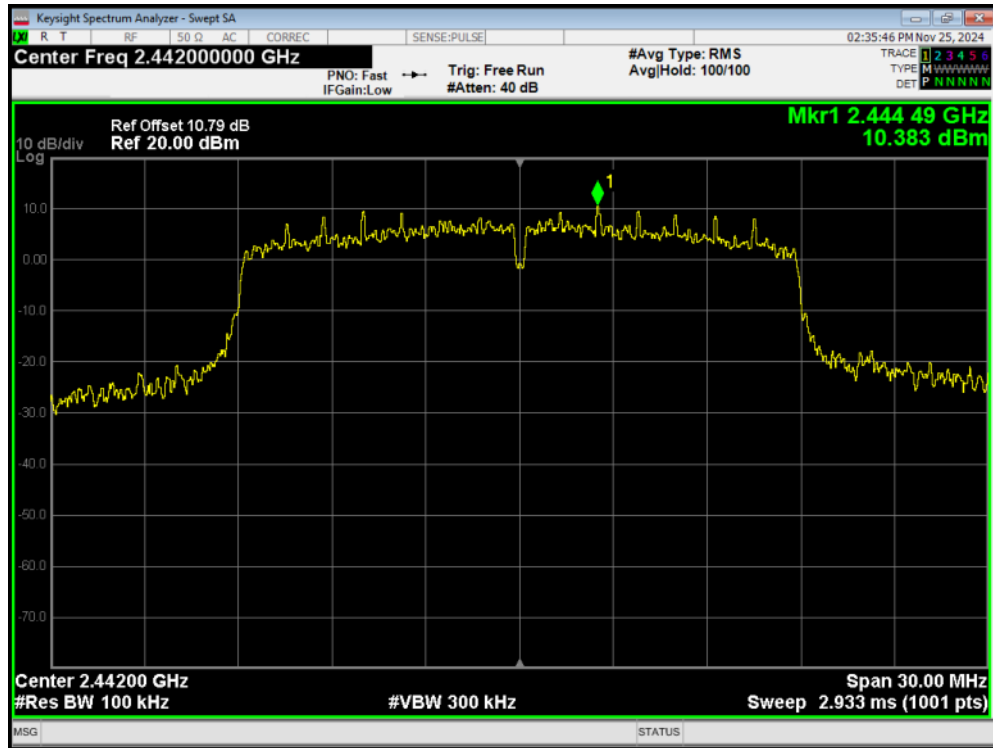


Band Edge 802.11n(HT20) 2442MHzEmission

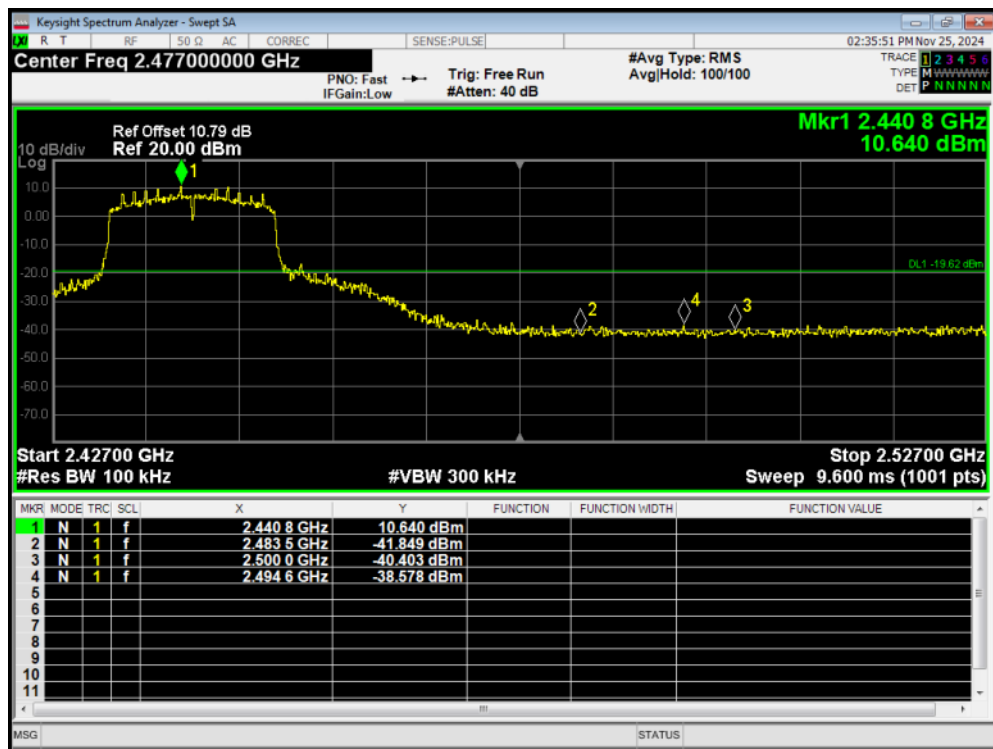


Band Edge 802.11n(HT20) 2447MHzRef

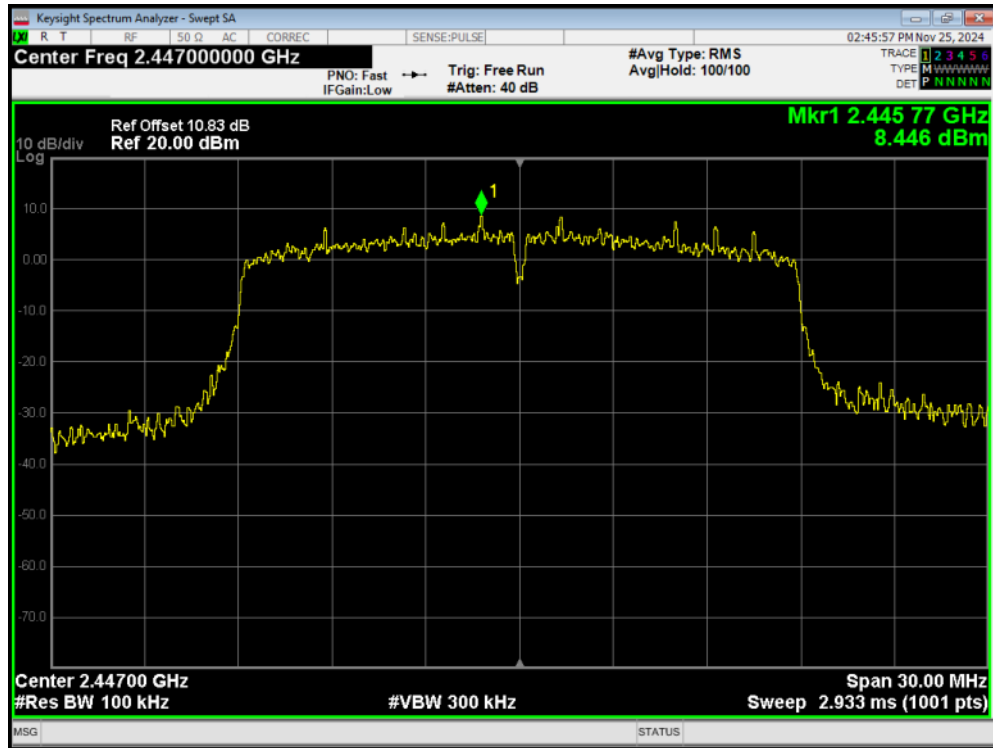


Band Edge 802.11n(HT20) 2447MHzEmission

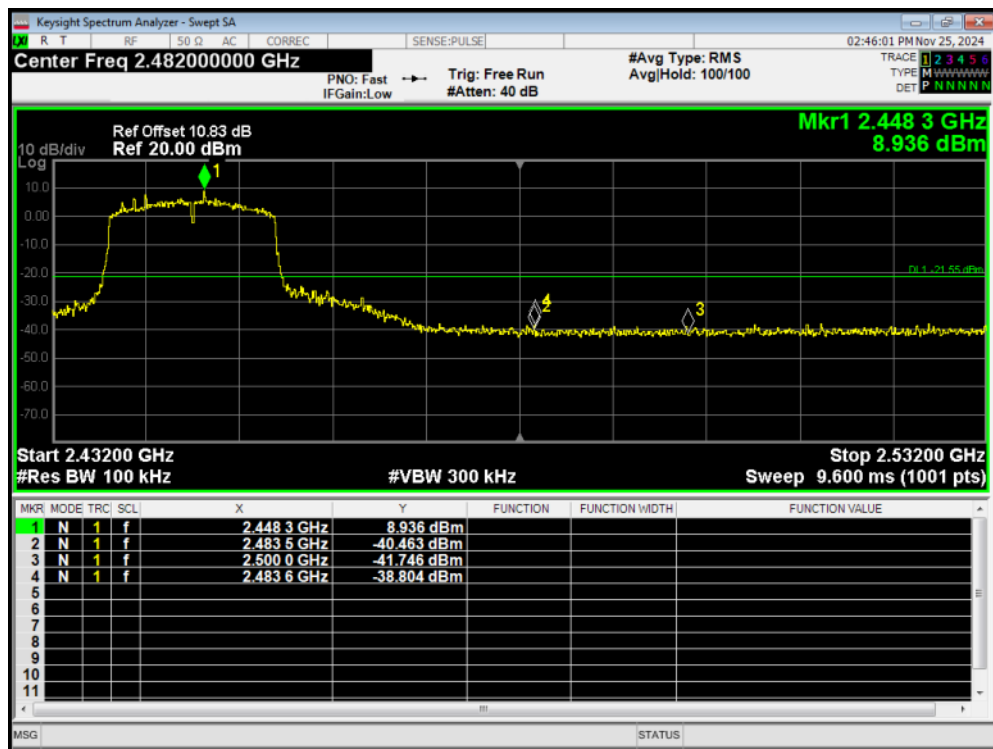


Band Edge 802.11n(HT20) 2452MHzRef

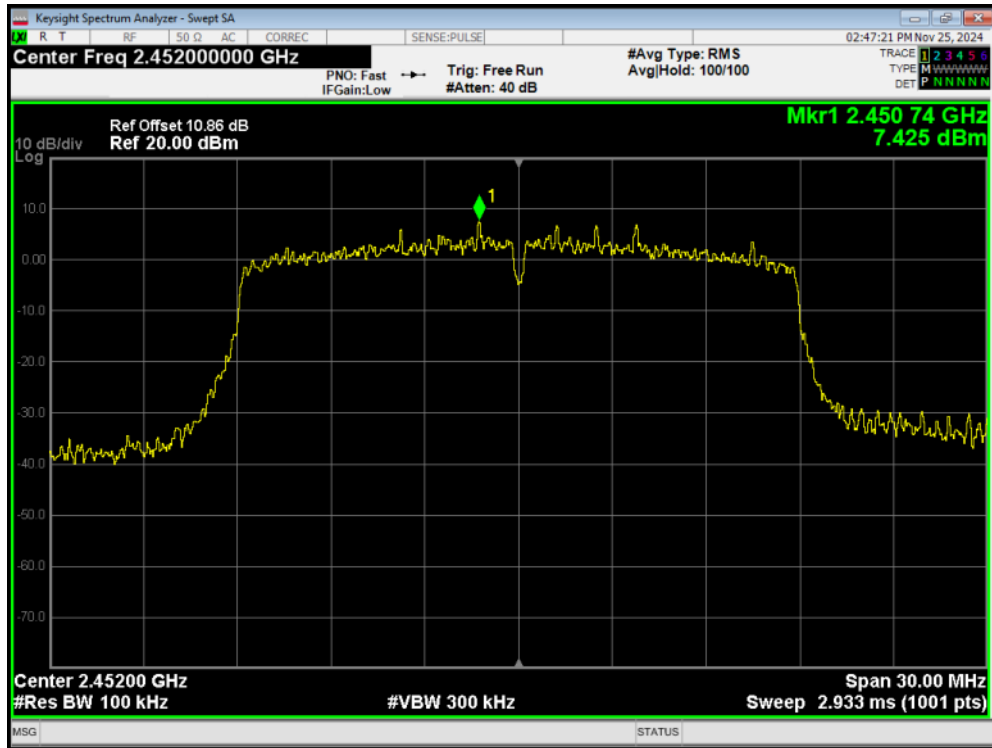


Band Edge 802.11n(HT20) 2452MHzEmission

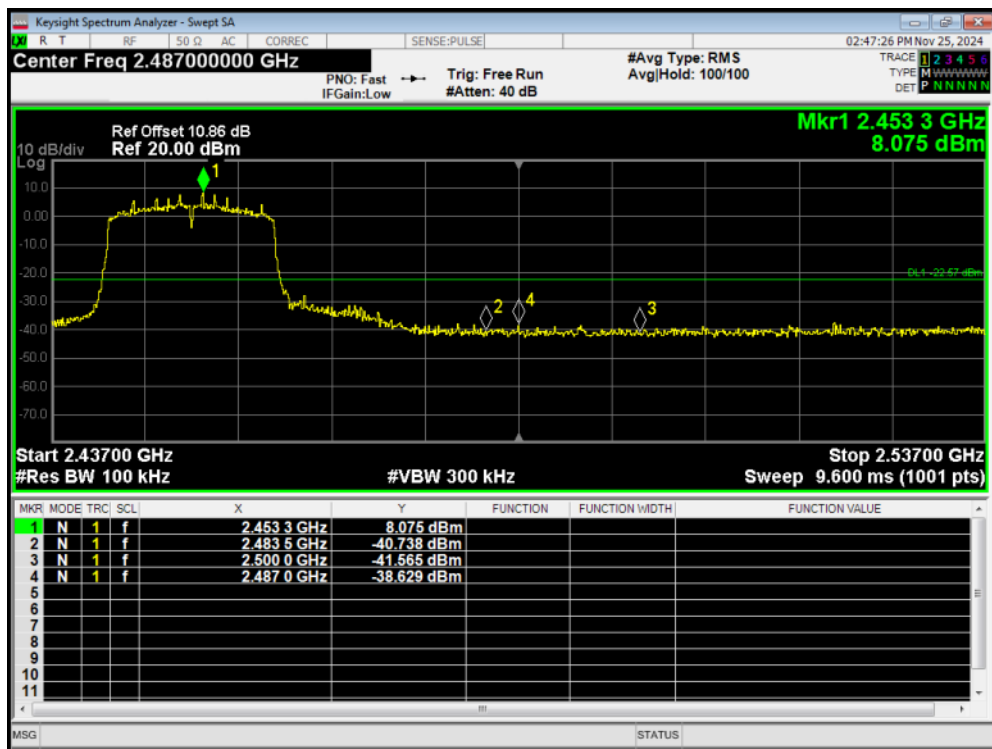


Band Edge 802.11n(HT20) 2457MHzRef

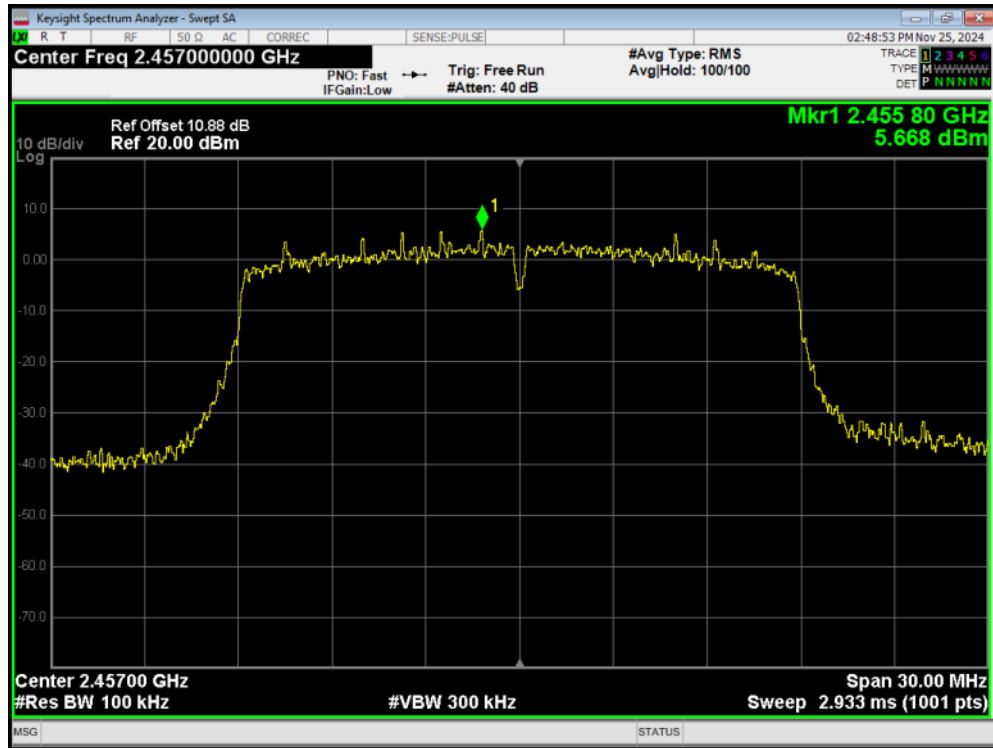


Band Edge 802.11n(HT20) 2457MHzEmission

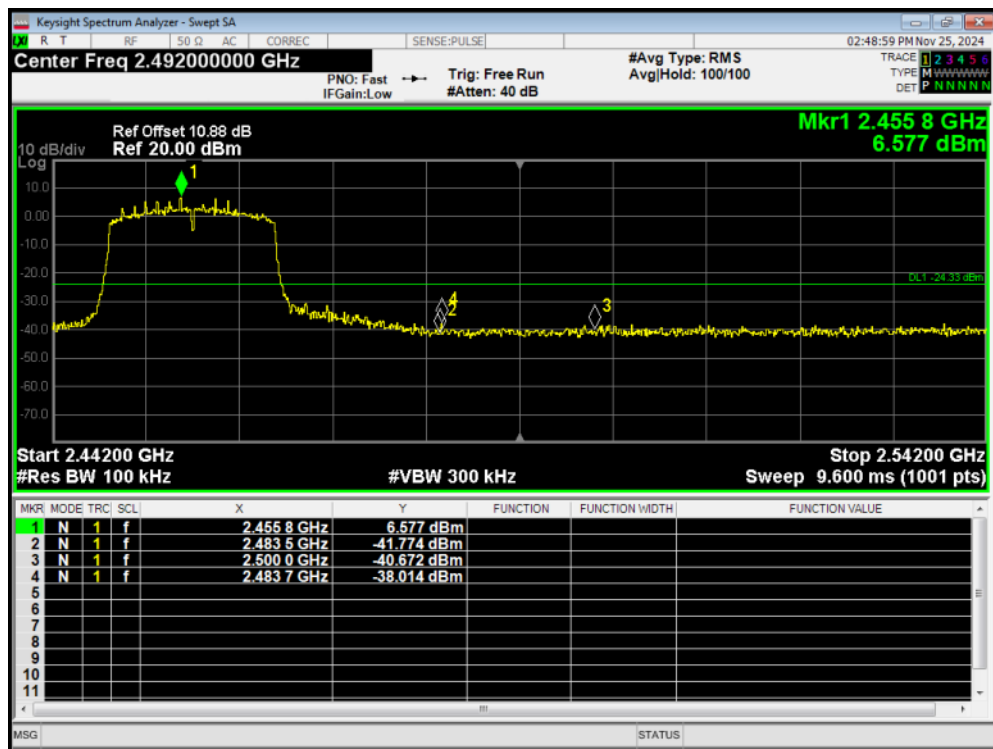


Band Edge 802.11n(HT20) 2462MHzRef

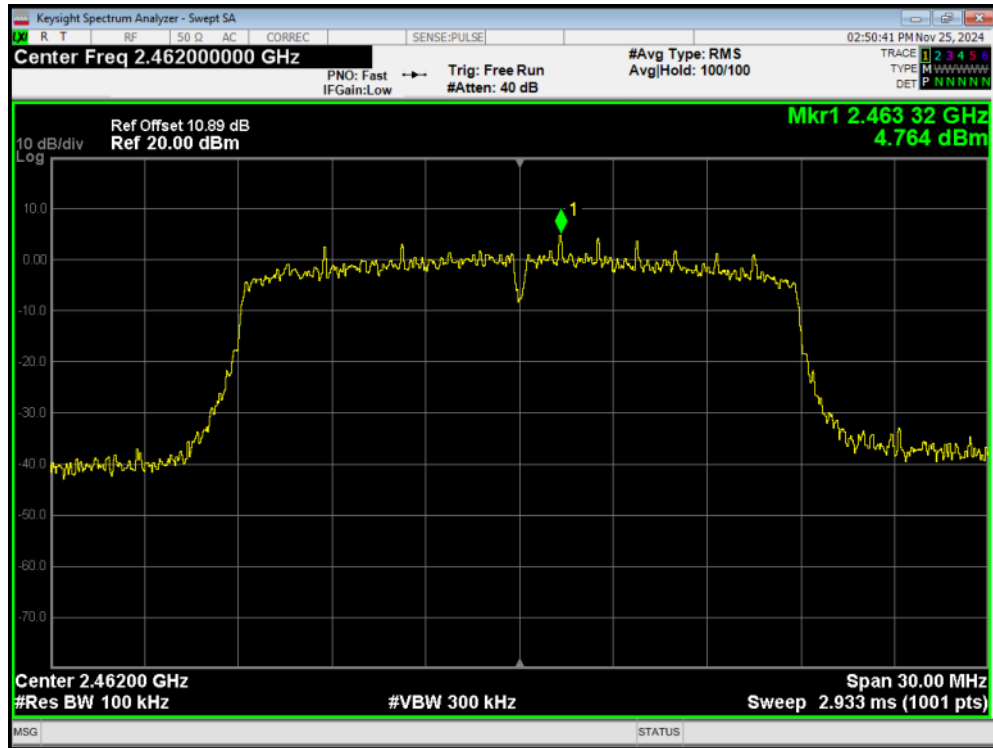


Band Edge 802.11n(HT20) 2462MHzEmission

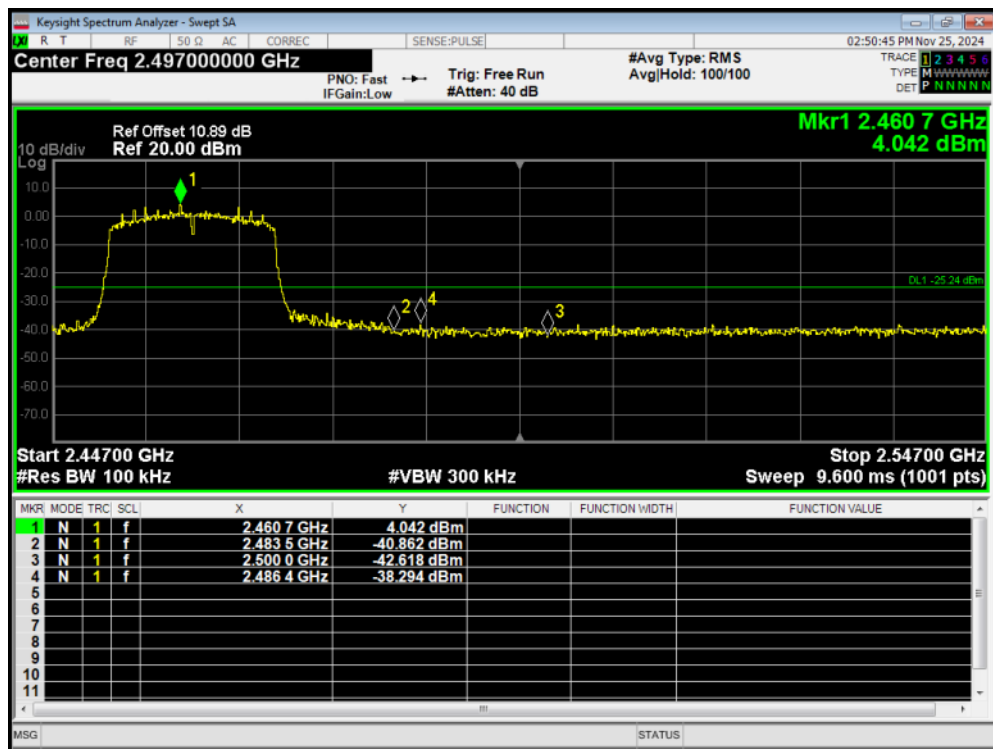


Band Edge 802.11n(HT40) 2422MHzRef

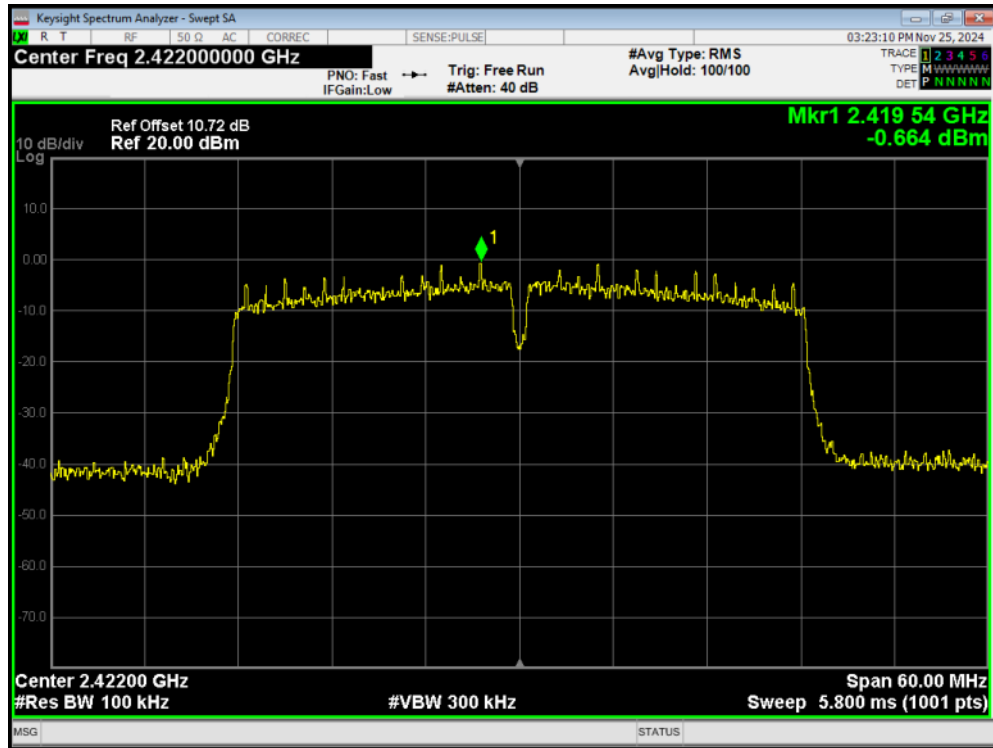


Band Edge 802.11n(HT40) 2422MHzEmission

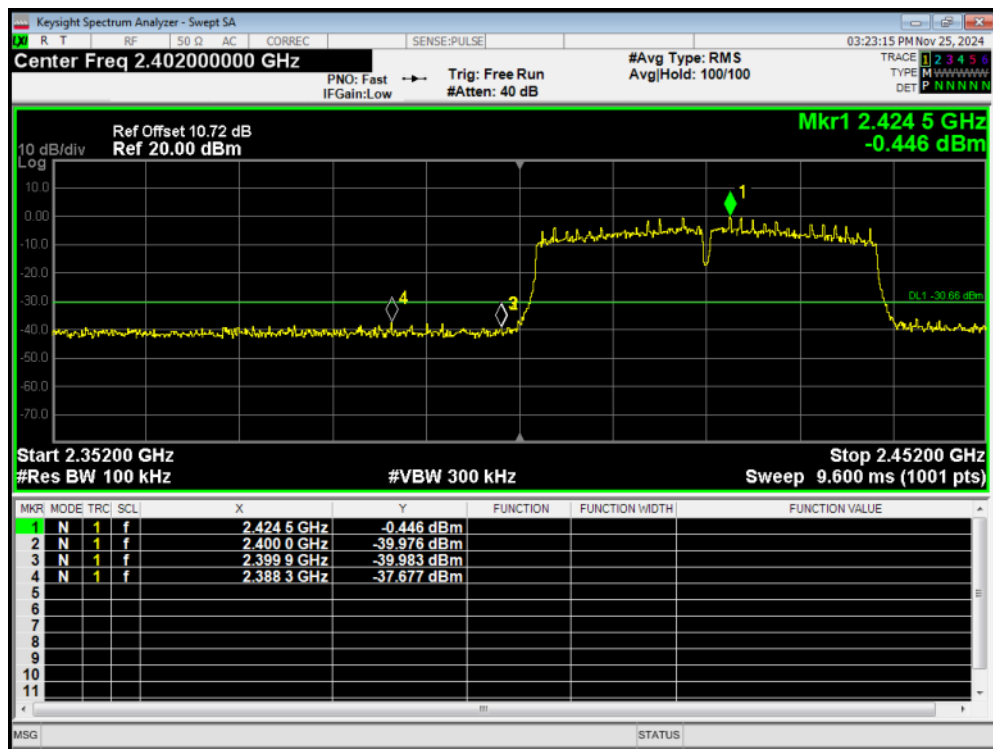


Band Edge 802.11n(HT40) 2427MHzRef

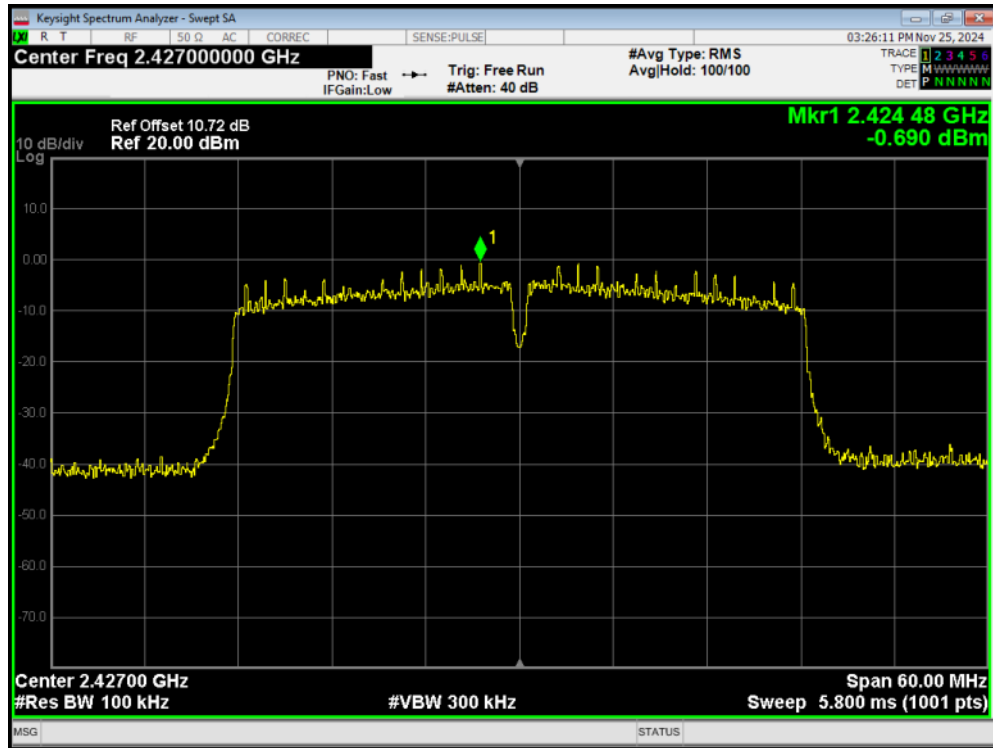


Band Edge 802.11n(HT40) 2427MHzEmission

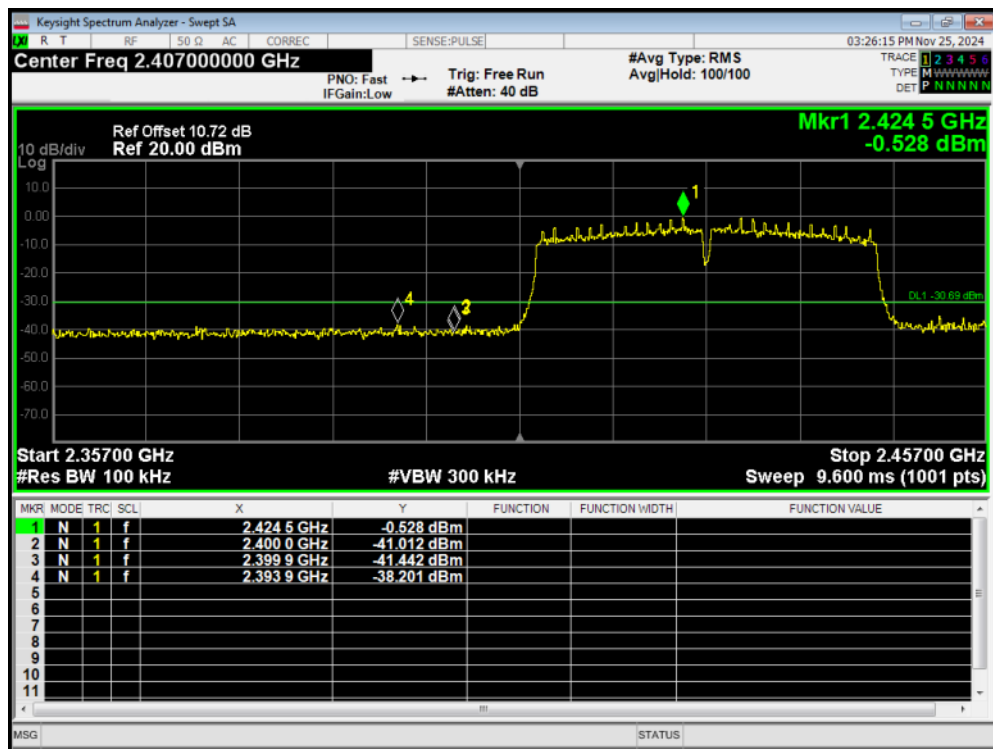


Band Edge 802.11n(HT40) 2432MHzRef

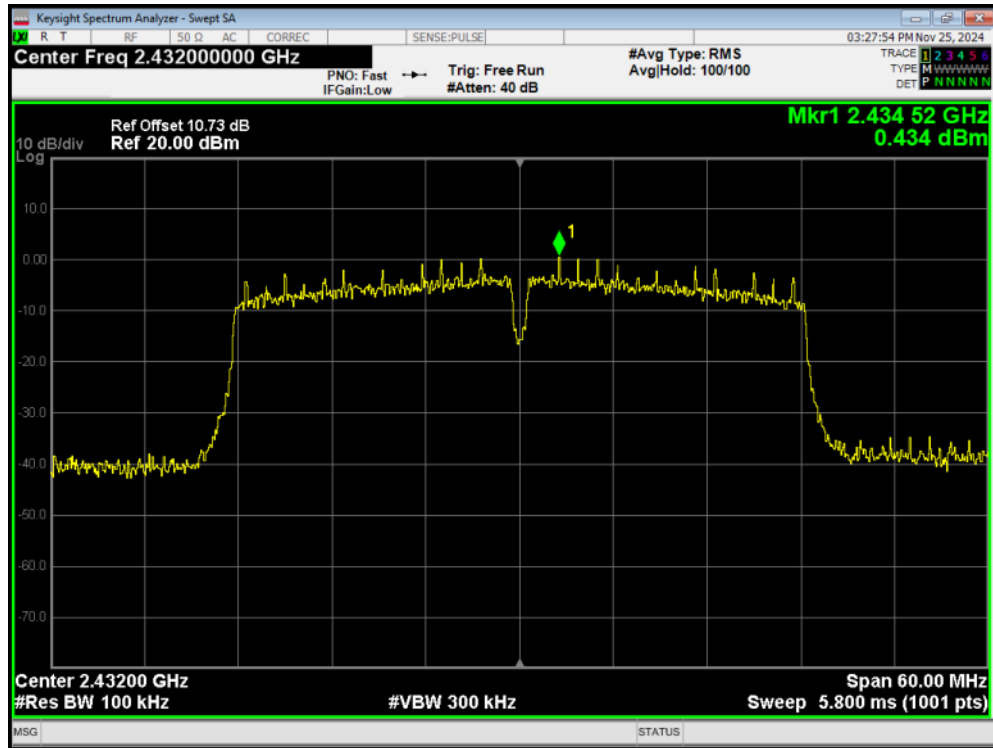


Band Edge 802.11n(HT40) 2432MHzEmission

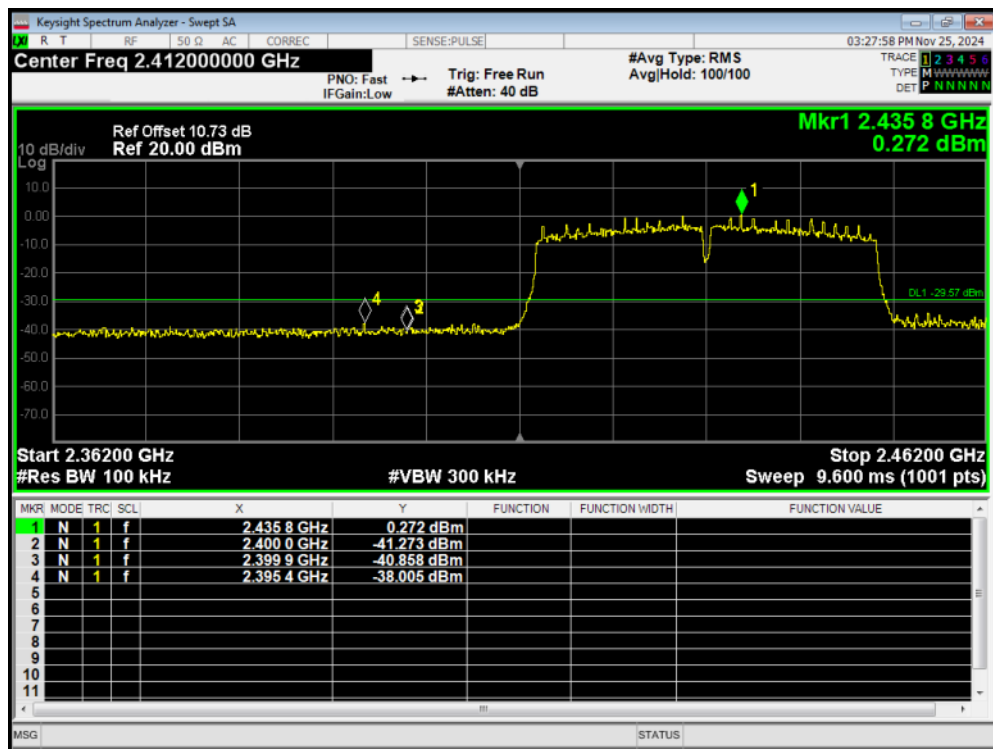


Band Edge 802.11n(HT40) 2442MHzRef

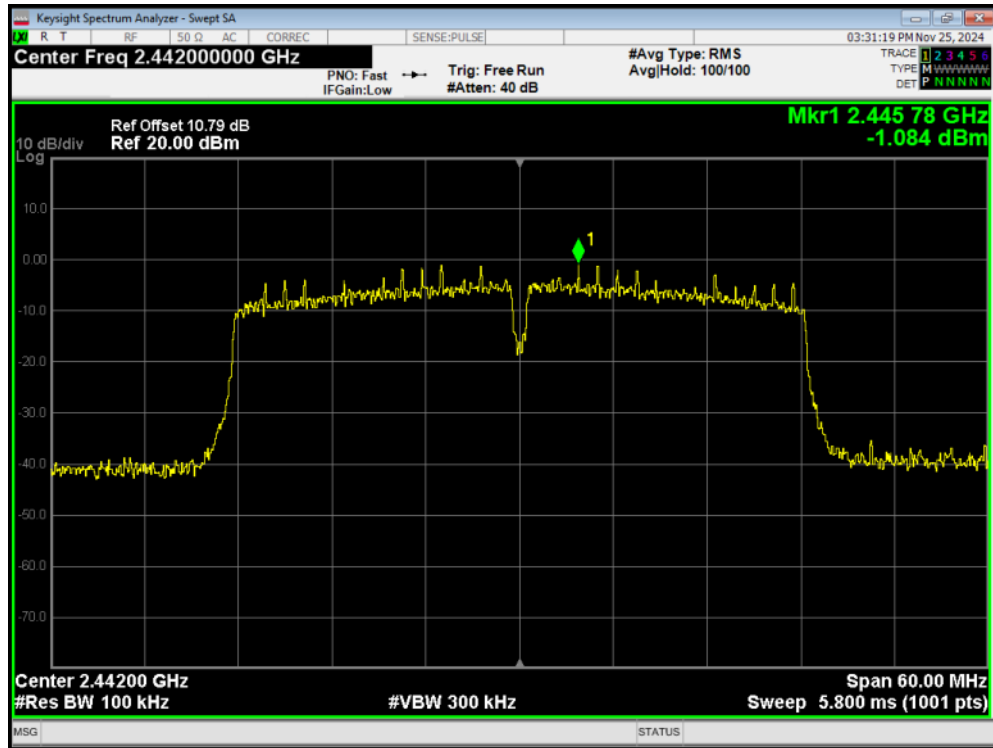


Band Edge 802.11n(HT40) 2442MHzEmission

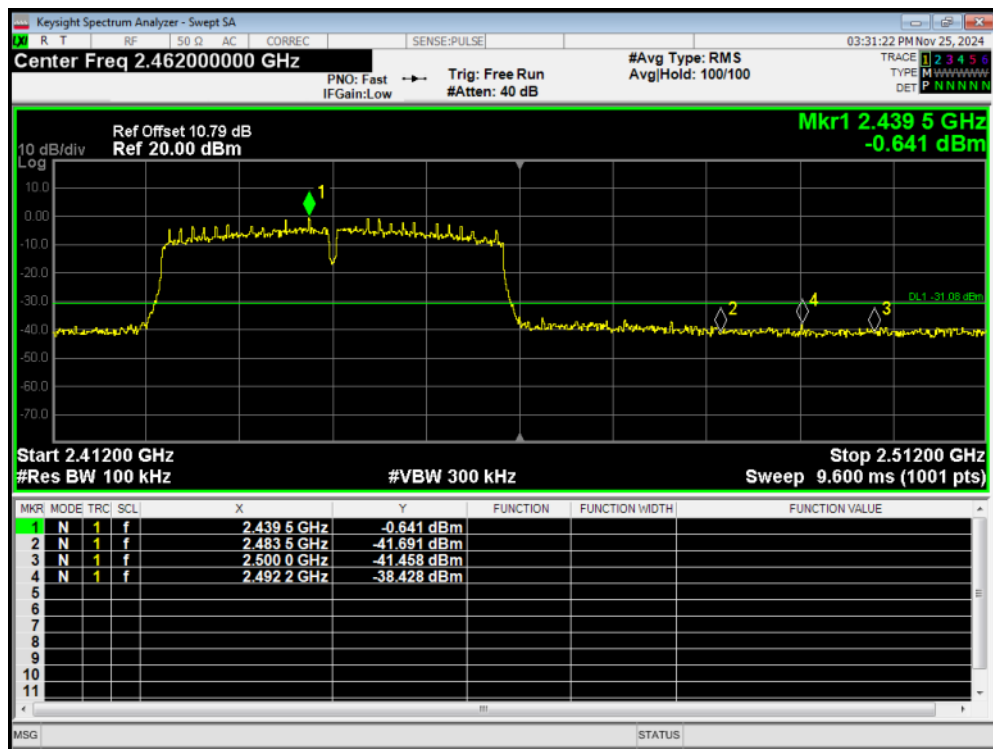


Band Edge 802.11n(HT40) 2447MHzRef

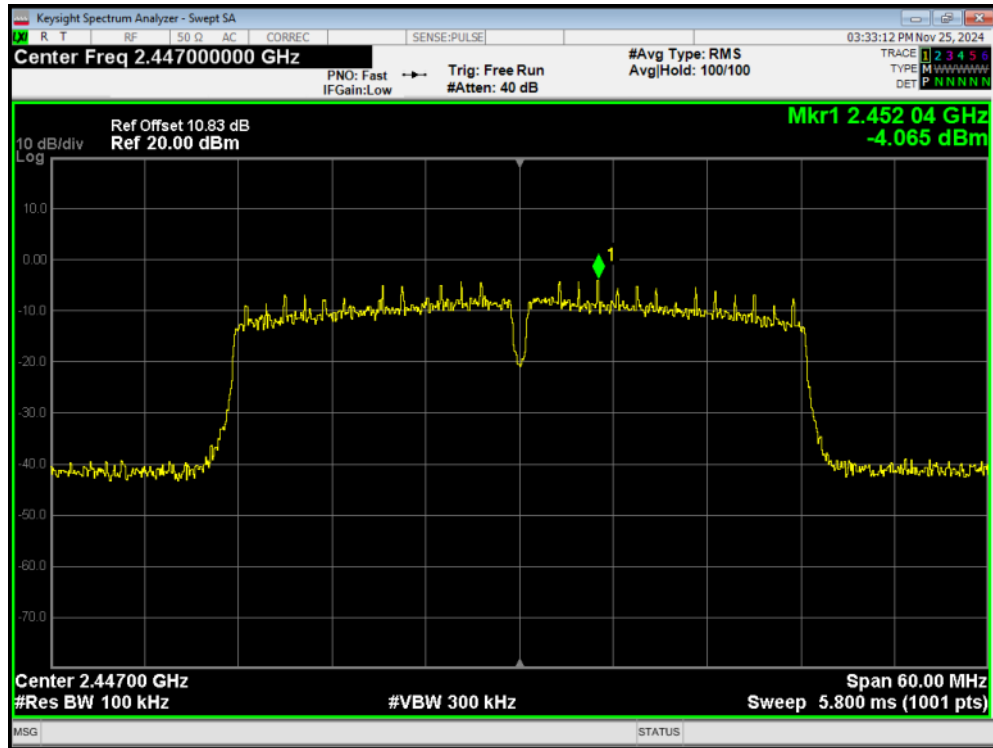


Band Edge 802.11n(HT40) 2447MHzEmission

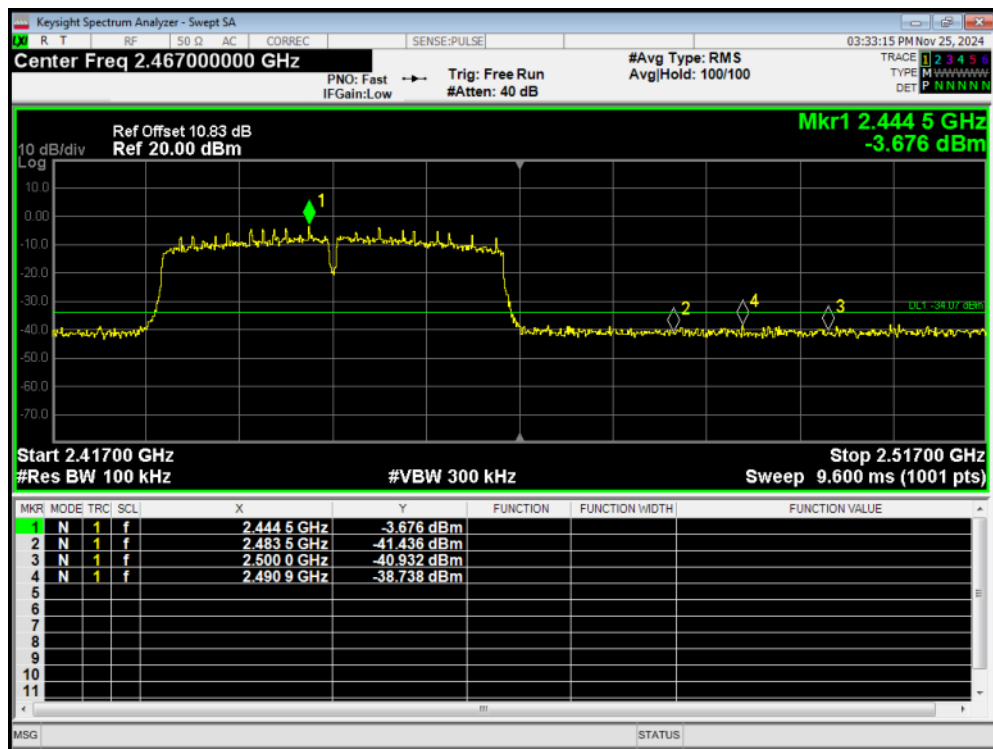

Band Edge 802.11n(HT40) 2452MHzRef

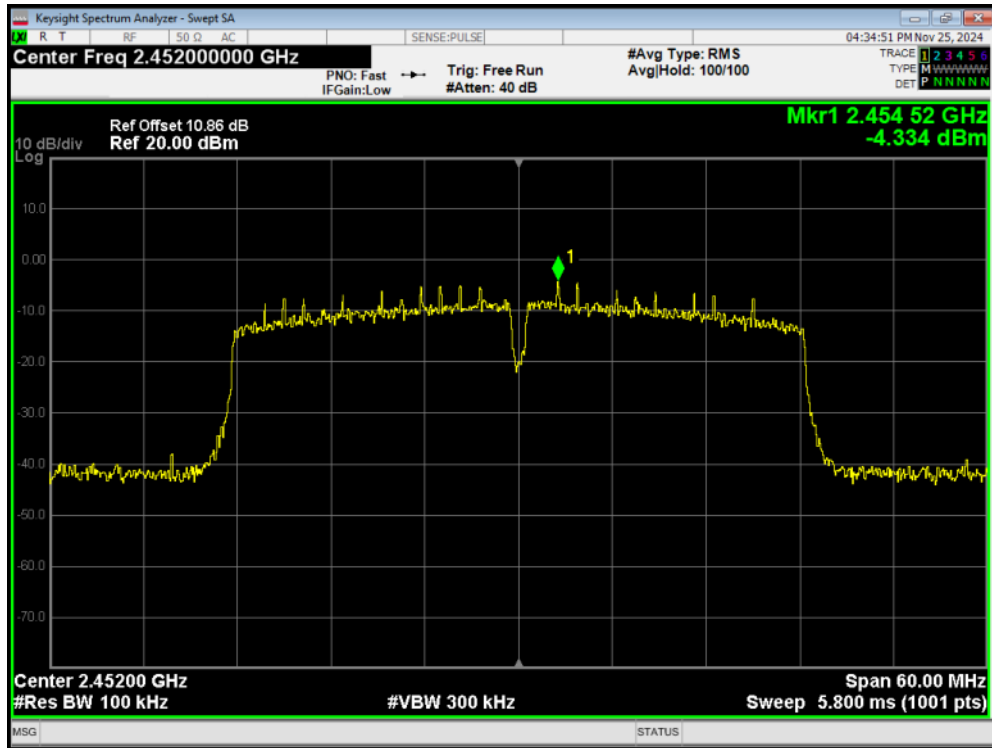

Band Edge 802.11n(HT40) 2452MHzEmission

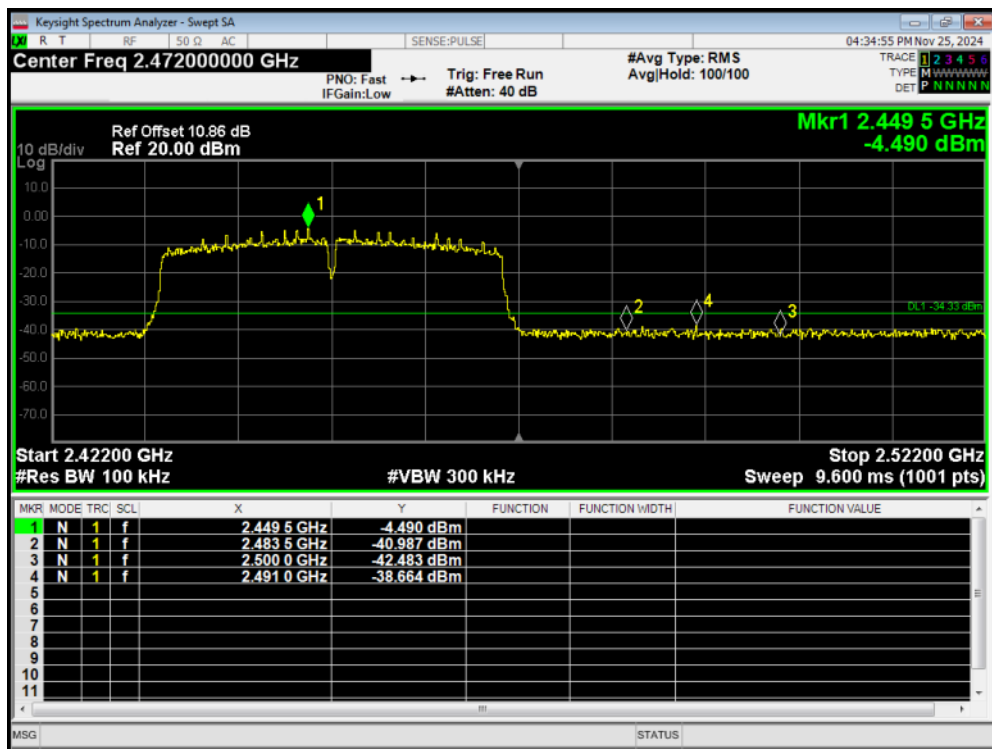

5.4. Power Spectral Density

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPS-1 was used for this test.

- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector=power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$
- Sweep time auto couple
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Method AVGPS-2 was used for this test.


- Measure the duty cycle (D) of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector= power averaging (rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span}/\text{RBW}]$
- Sweep time =auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level

l) Add $[10 \log(1/D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:
SISO antenna 1

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-0.58	-10.58	8	PASS
	2417/CH 2	-4.20	-14.20	8	PASS
	2422/CH 3	-1.74	-11.74	8	PASS
	2427/CH 4	-0.67	-10.67	8	PASS
	2432/CH 5	0.27	-9.73	8	PASS
	2437/CH 6	-0.13	-10.13	8	PASS
	2442/CH 7	-2.92	-12.92	8	PASS
	2447/CH 8	-3.62	-13.62	8	PASS
	2452/CH 9	-3.62	-13.62	8	PASS
	2457/CH 10	-4.73	-14.73	8	PASS
	2462/CH 11	-5.70	-15.70	8	PASS
802.11g	2412/CH 1	-5.38	-15.07	8	PASS
	2417/CH 2	-6.26	-15.95	8	PASS
	2422/CH 3	-3.62	-13.31	8	PASS
	2427/CH 4	-2.33	-12.02	8	PASS
	2432/CH 5	-4.24	-13.93	8	PASS
	2437/CH 6	-3.03	-12.72	8	PASS
	2442/CH 7	-2.78	-12.47	8	PASS
	2447/CH 8	-4.69	-14.38	8	PASS
	2452/CH 9	-4.63	-14.32	8	PASS
	2457/CH 10	-6.62	-16.31	8	PASS
	2462/CH 11	-8.76	-18.45	8	PASS
802.11n HT20	2412/CH 1	-7.27	-16.93	8	PASS
	2417/CH 2	-5.37	-15.03	8	PASS
	2422/CH 3	-4.83	-14.49	8	PASS
	2427/CH 4	-2.76	-12.42	8	PASS
	2432/CH 5	-1.89	-11.55	8	PASS
	2437/CH 6	-2.19	-11.85	8	PASS
	2442/CH 7	-2.89	-12.55	8	PASS
	2447/CH 8	-4.77	-14.43	8	PASS
	2452/CH 9	-5.76	-15.42	8	PASS
	2457/CH 10	-6.95	-16.61	8	PASS
	2462/CH 11	-8.90	-18.56	8	PASS
802.11n HT40	2422/CH 3	-13.21	-22.56	8	PASS
	2427/CH 4	-13.79	-23.14	8	PASS
	2432/CH 5	-12.43	-21.78	8	PASS
	2437/CH 6	-12.25	-21.60	8	PASS
	2442/CH 7	-13.90	-23.25	8	PASS

	2447/CH 8	-16.59	-25.94	8	PASS
	2452/CH 9	-16.31	-25.66	8	PASS
802.11ax HE20	2412/CH 1	-8.18	-17.75	8	PASS
	2417/CH 2	-6.84	-16.41	8	PASS
	2422/CH 3	-4.62	-14.19	8	PASS
	2427/CH 4	-4.04	-13.61	8	PASS
	2432/CH 5	-3.06	-12.63	8	PASS
	2437/CH 6	-1.77	-11.34	8	PASS
	2442/CH 7	-4.24	-13.81	8	PASS
	2447/CH 8	-5.73	-15.30	8	PASS
	2452/CH 9	-6.86	-16.43	8	PASS
	2457/CH 10	-9.15	-18.72	8	PASS
	2462/CH 11	-11.76	-21.33	8	PASS
802.11ax HE40	2422/CH 3	-14.78	-24.00	8	PASS
	2427/CH 4	-14.98	-24.20	8	PASS
	2432/CH 5	-13.04	-22.26	8	PASS
	2437/CH 6	-12.91	-22.13	8	PASS
	2442/CH 7	-15.55	-24.77	8	PASS
	2447/CH 8	-16.94	-26.16	8	PASS
	2452/CH 9	-16.86	-26.08	8	PASS
Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*log10(3/30)					

SISO antenna 2

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-0.02	-10.02	8	PASS
	2417/CH 2	-3.76	-13.76	8	PASS
	2422/CH 3	-1.23	-11.23	8	PASS
	2427/CH 4	-0.34	-10.34	8	PASS
	2432/CH 5	0.73	-9.27	8	PASS
	2437/CH 6	0.87	-9.13	8	PASS
	2442/CH 7	-2.37	-12.37	8	PASS
	2447/CH 8	-3.17	-13.17	8	PASS
	2452/CH 9	-3.24	-13.24	8	PASS
	2457/CH 10	-3.86	-13.86	8	PASS
	2462/CH 11	-4.94	-14.94	8	PASS
802.11g	2412/CH 1	-5.21	-14.90	8	PASS
	2417/CH 2	-6.12	-15.81	8	PASS
	2422/CH 3	-3.18	-12.87	8	PASS
	2427/CH 4	-2.53	-12.22	8	PASS
	2432/CH 5	-4.17	-13.86	8	PASS
	2437/CH 6	-2.57	-12.26	8	PASS
	2442/CH 7	-2.23	-11.92	8	PASS
	2447/CH 8	-4.35	-14.04	8	PASS
	2452/CH 9	-4.56	-14.25	8	PASS
	2457/CH 10	-6.48	-16.17	8	PASS
	2462/CH 11	-8.75	-18.44	8	PASS
802.11n HT20	2412/CH 1	-7.23	-16.89	8	PASS
	2417/CH 2	-5.12	-14.78	8	PASS
	2422/CH 3	-4.47	-14.13	8	PASS
	2427/CH 4	-2.65	-12.31	8	PASS
	2432/CH 5	-1.08	-10.74	8	PASS
	2437/CH 6	-1.46	-11.12	8	PASS
	2442/CH 7	-2.59	-12.25	8	PASS
	2447/CH 8	-4.44	-14.10	8	PASS
	2452/CH 9	-5.89	-15.55	8	PASS
	2457/CH 10	-6.49	-16.15	8	PASS
	2462/CH 11	-8.73	-18.39	8	PASS
802.11n HT40	2422/CH 3	-13.01	-22.36	8	PASS
	2427/CH 4	-13.42	-22.77	8	PASS
	2432/CH 5	-12.53	-21.88	8	PASS
	2437/CH 6	-11.32	-20.67	8	PASS
	2442/CH 7	-13.61	-22.96	8	PASS
	2447/CH 8	-16.53	-25.88	8	PASS

	2452/CH 9	-16.77	-26.12	8	PASS
802.11ax HE20	2412/CH 1	-8.42	-17.99	8	PASS
	2417/CH 2	-6.39	-15.96	8	PASS
	2422/CH 3	-4.48	-14.05	8	PASS
	2427/CH 4	-3.35	-12.92	8	PASS
	2432/CH 5	-2.84	-12.41	8	PASS
	2437/CH 6	-1.80	-11.37	8	PASS
	2442/CH 7	-3.74	-13.31	8	PASS
	2447/CH 8	-5.46	-15.03	8	PASS
	2452/CH 9	-6.98	-16.55	8	PASS
	2457/CH 10	-8.18	-17.75	8	PASS
	2462/CH 11	-11.79	-21.36	8	PASS
802.11ax HE40	2422/CH 3	-15.19	-24.41	8	PASS
	2427/CH 4	-15.13	-24.35	8	PASS
	2432/CH 5	-12.69	-21.91	8	PASS
	2437/CH 6	-13.54	-22.76	8	PASS
	2442/CH 7	-16.52	-25.74	8	PASS
	2447/CH 8	-17.42	-26.64	8	PASS
	2452/CH 9	-17.59	-26.81	8	PASS
Note: Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*log10(3/30)					

MIMO

Test Mode	Carrier frequency (MHz)/ Channel	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclu sion
		Antenna 1		Antenna 2				
		Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11n HT20	2412/CH 1	-7.49	-17.15	-6.47	-16.13	-13.60	6.64	PASS
	2417/CH 2	-5.73	-15.39	-4.87	-14.53	-11.93	6.64	PASS
	2422/CH 3	-4.46	-14.12	-3.8	-13.46	-10.77	6.64	PASS
	2427/CH 4	-3.04	-12.70	-1.79	-11.45	-9.02	6.64	PASS
	2432/CH 5	-2.17	-11.83	-1.01	-10.67	-8.20	6.64	PASS
	2437/CH 6	-2.08	-11.74	-0.87	-10.53	-8.08	6.64	PASS
	2442/CH 7	-3.24	-12.90	-1.78	-11.44	-9.10	6.64	PASS
	2447/CH 8	-4.64	-14.30	-3.67	-13.33	-10.78	6.64	PASS
	2452/CH 9	-5.55	-15.21	-5.14	-14.80	-11.99	6.64	PASS
	2457/CH 10	-6.42	-16.08	-6.03	-15.69	-12.87	6.64	PASS
	2462/CH 11	-8.71	-18.37	-7.95	-17.61	-14.96	6.64	PASS
802.11n HT40	2422/CH 3	-13.52	-22.87	-13.35	-22.70	-19.77	6.64	PASS
	2427/CH 4	-12.89	-22.24	-13.43	-22.78	-19.49	6.64	PASS
	2432/CH 5	-12.44	-21.79	-12.77	-22.12	-18.94	6.64	PASS
	2437/CH 6	-10.62	-19.97	-11.3	-20.65	-17.29	6.64	PASS
	2442/CH 7	-13.92	-23.27	-13.96	-23.31	-20.28	6.64	PASS
	2447/CH 8	-15.99	-25.34	-17.02	-26.37	-22.81	6.64	PASS
	2452/CH 9	-16.43	-25.78	-17.63	-26.98	-23.33	6.64	PASS
802.11ax HE20	2412/CH 1	-8.56	-18.13	-8.1	-17.67	-14.88	6.64	PASS
	2417/CH 2	-6.75	-16.32	-6.36	-15.93	-13.11	6.64	PASS
	2422/CH 3	-4.85	-14.42	-4.46	-14.03	-11.21	6.64	PASS
	2427/CH 4	-3.93	-13.50	-3.26	-12.83	-10.14	6.64	PASS
	2432/CH 5	-2.89	-12.46	-2.64	-12.21	-9.32	6.64	PASS
	2437/CH 6	-2.44	-12.01	-1.7	-11.27	-8.61	6.64	PASS
	2442/CH 7	-3.47	-13.04	-3.39	-12.96	-9.99	6.64	PASS
	2447/CH 8	-5.83	-15.40	-5.22	-14.79	-12.07	6.64	PASS
	2452/CH 9	-6.68	-16.25	-6.69	-16.26	-13.24	6.64	PASS
	2457/CH 10	-8.62	-18.19	-8.42	-17.99	-15.08	6.64	PASS
	2462/CH 11	-11.57	-21.14	-11.77	-21.34	-18.23	6.64	PASS
802.11ax HE40	2422/CH 3	-14.26	-23.48	-14.77	-23.99	-20.72	6.64	PASS
	2427/CH 4	-14.74	-23.96	-15.05	-24.27	-21.10	6.64	PASS
	2432/CH 5	-12.79	-22.01	-12.95	-22.17	-19.08	6.64	PASS
	2437/CH 6	-13.24	-22.46	-13.09	-22.31	-19.37	6.64	PASS
	2442/CH 7	-15.66	-24.88	-16.66	-25.88	-22.34	6.64	PASS
	2447/CH 8	-16.81	-26.03	-17.5	-26.72	-23.35	6.64	PASS
	2452/CH 9	-16.89	-26.11	-17.82	-27.04	-23.54	6.64	PASS

Note: 1.Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*LOG10(3 / 30)

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),
the power spectral density= $10\log(10^{(\text{PSD antenna1 in dBm}/10)}+10^{(\text{PSD antenna2 in dBm}/10)})$
3. The manufacturer declared that the directional gain = 7.36 >6dBi. So the PSD limit is 6.64 dBm.

Beamforming


Test Mode	Carrier frequency (MHz)/ Channel	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclu sion
		Antenna 1		Antenna 2				
		Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	(dBm / 3kHz)		
802.11n HT20	2412/CH 1	-7.73	-17.39	-6.57	-16.23	-13.76	6.64	PASS
	2417/CH 2	-5.69	-15.35	-4.7	-14.36	-11.82	6.64	PASS
	2422/CH 3	-4.83	-14.49	-3.58	-13.24	-10.81	6.64	PASS
	2427/CH 4	-2.84	-12.50	-2.52	-12.18	-9.33	6.64	PASS
	2432/CH 5	-2.3	-11.96	-1.39	-11.05	-8.47	6.64	PASS
	2437/CH 6	-1.9	-11.56	-1.52	-11.18	-8.36	6.64	PASS
	2442/CH 7	-2.76	-12.42	-2.5	-12.16	-9.28	6.64	PASS
	2447/CH 8	-4.97	-14.63	-4.19	-13.85	-11.21	6.64	PASS
	2452/CH 9	-6.17	-15.83	-4.91	-14.57	-12.14	6.64	PASS
	2457/CH 10	-6.88	-16.54	-5.42	-15.08	-12.74	6.64	PASS
	2462/CH 11	-8.97	-18.63	-8.33	-17.99	-15.29	6.64	PASS
802.11n HT40	2422/CH 3	-12.89	-22.24	-13.47	-22.82	-19.51	6.64	PASS
	2427/CH 4	-13.82	-23.17	-13.83	-23.18	-20.16	6.64	PASS
	2432/CH 5	-12.05	-21.40	-12.49	-21.84	-18.60	6.64	PASS
	2437/CH 6	-12.01	-21.36	-11.65	-21.00	-18.17	6.64	PASS
	2442/CH 7	-13.6	-22.95	-13.74	-23.09	-20.01	6.64	PASS
	2447/CH 8	-16.02	-25.37	-16.1	-25.45	-22.40	6.64	PASS
	2452/CH 9	-16.55	-25.90	-17.04	-26.39	-23.13	6.64	PASS
802.11ax HE20	2412/CH 1	-8.71	-18.28	-7.55	-17.12	-14.65	6.64	PASS
	2417/CH 2	-6.53	-16.10	-5.99	-15.56	-12.81	6.64	PASS
	2422/CH 3	-4.53	-14.10	-4.38	-13.95	-11.01	6.64	PASS
	2427/CH 4	-3.57	-13.14	-3.12	-12.69	-9.90	6.64	PASS
	2432/CH 5	-2.82	-12.39	-2.19	-11.76	-9.05	6.64	PASS
	2437/CH 6	-2.15	-11.72	-1.27	-10.84	-8.25	6.64	PASS
	2442/CH 7	-3.84	-13.41	-3.63	-13.20	-10.29	6.64	PASS
	2447/CH 8	-5.48	-15.05	-5.35	-14.92	-11.97	6.64	PASS
	2452/CH 9	-6.78	-16.35	-6.92	-16.49	-13.41	6.64	PASS
	2457/CH 10	-8.84	-18.41	-9.07	-18.64	-15.51	6.64	PASS
	2462/CH 11	-11.42	-20.99	-11.89	-21.46	-18.21	6.64	PASS
802.11ax HE40	2422/CH 3	-14.97	-24.19	-14.85	-24.07	-21.12	6.64	PASS
	2427/CH 4	-14.81	-24.03	-15.61	-24.83	-21.40	6.64	PASS
	2432/CH 5	-13.15	-22.37	-13.11	-22.33	-19.34	6.64	PASS
	2437/CH 6	-13.12	-22.34	-13.43	-22.65	-19.48	6.64	PASS
	2442/CH 7	-15.55	-24.77	-16.57	-25.79	-22.24	6.64	PASS
	2447/CH 8	-16.14	-25.36	-17.73	-26.95	-23.07	6.64	PASS
	2452/CH 9	-17.17	-26.39	-18.16	-27.38	-23.85	6.64	PASS

Note: 1.Power Spectral Density (dBm/3kHz) =Read Value+Duty cycle correction factor + 10*LOG10(3 / 30)


2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),
the power spectral density= $10\log(10^{(\text{PSD antenna1 in dBm}/10)}+10^{(\text{PSD antenna2 in dBm}/10)})$
3. The manufacturer declared that the directional gain = 7.36 >6dBi. So the PSD limit is 6.64 dBm.

SISO antenna 1


PSD 802.11ax(HE20) 2412MHz

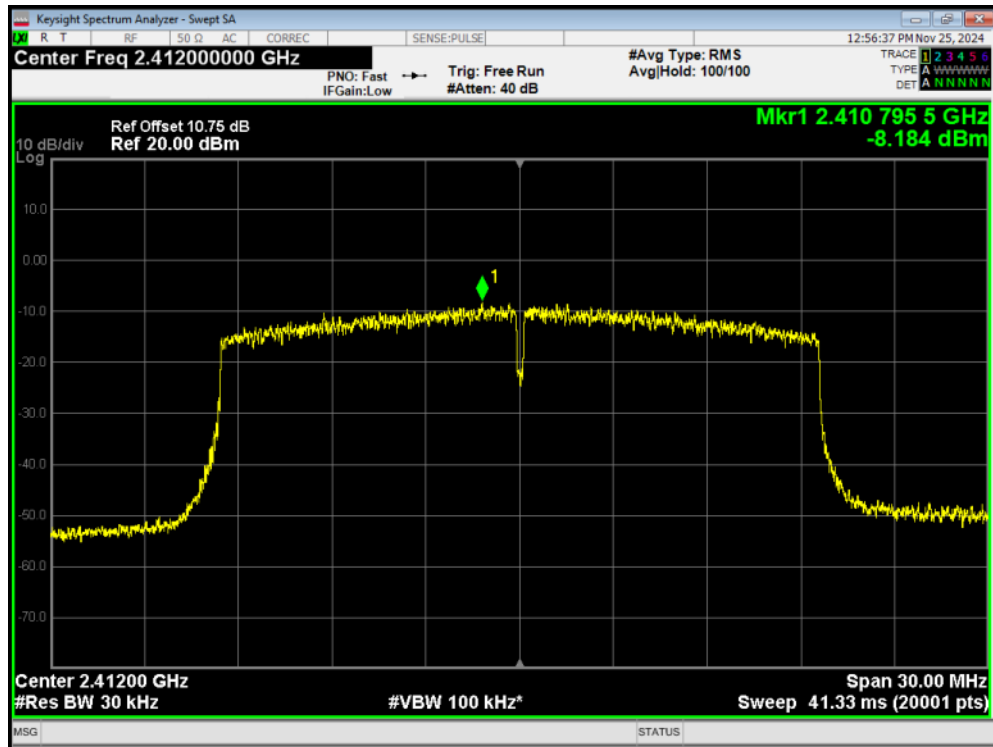


PSD 802.11ax(HE20) 2417MHz

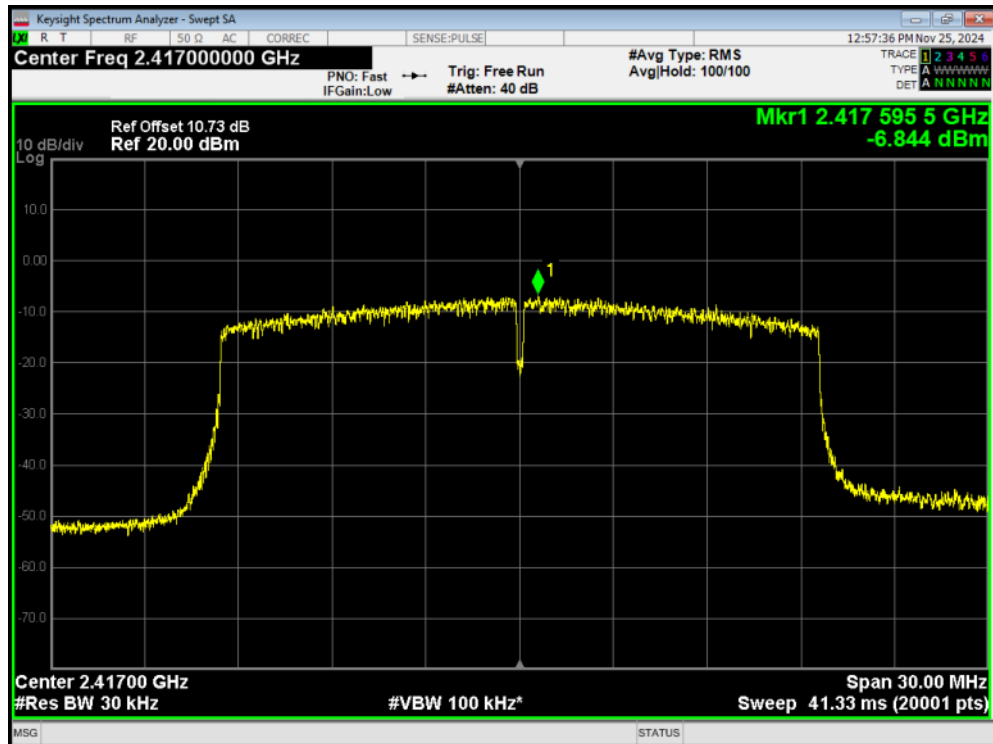


PSD 802.11ax(HE20) 2422MHz

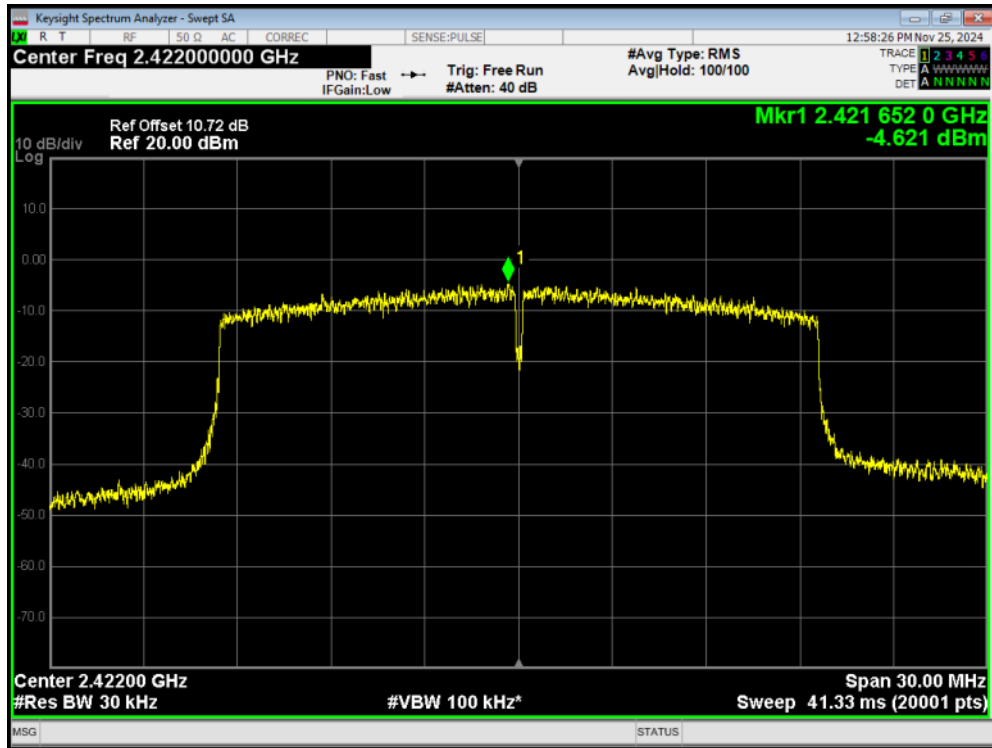


PSD 802.11ax(HE20) 2427MHz

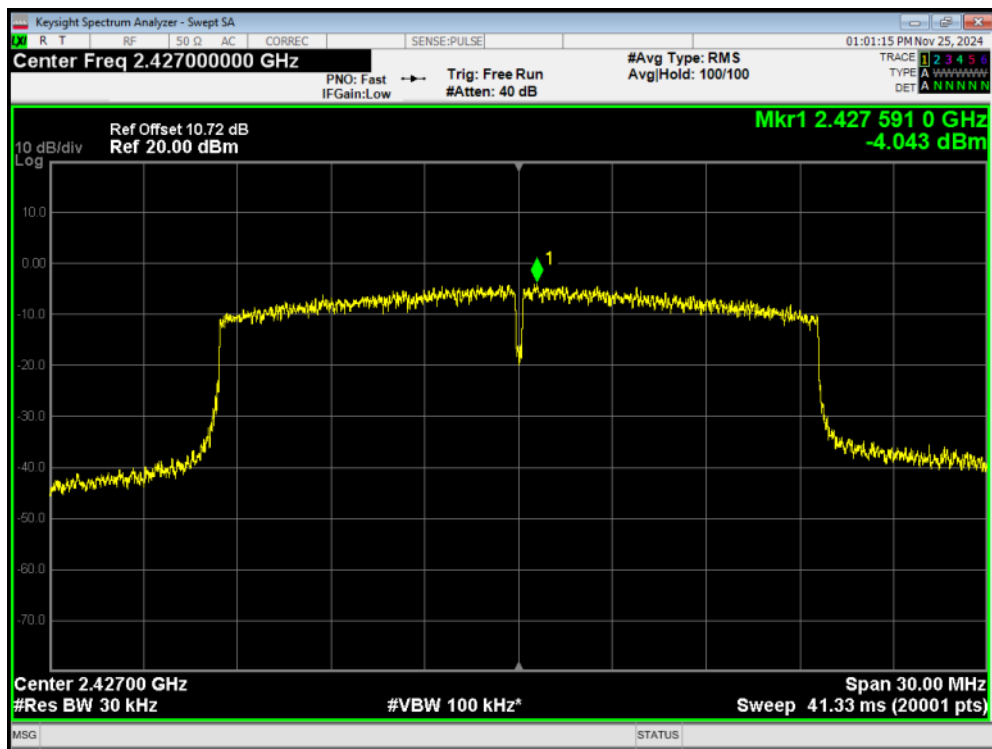


PSD 802.11ax(HE20) 2432MHz

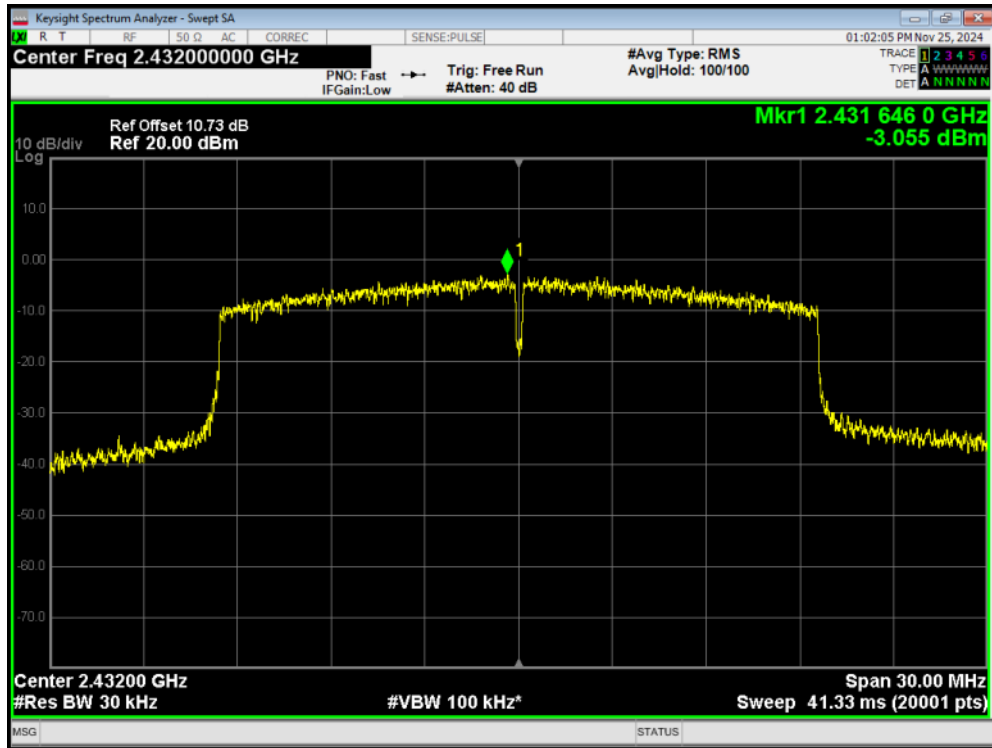


PSD 802.11ax(HE20) 2437MHz

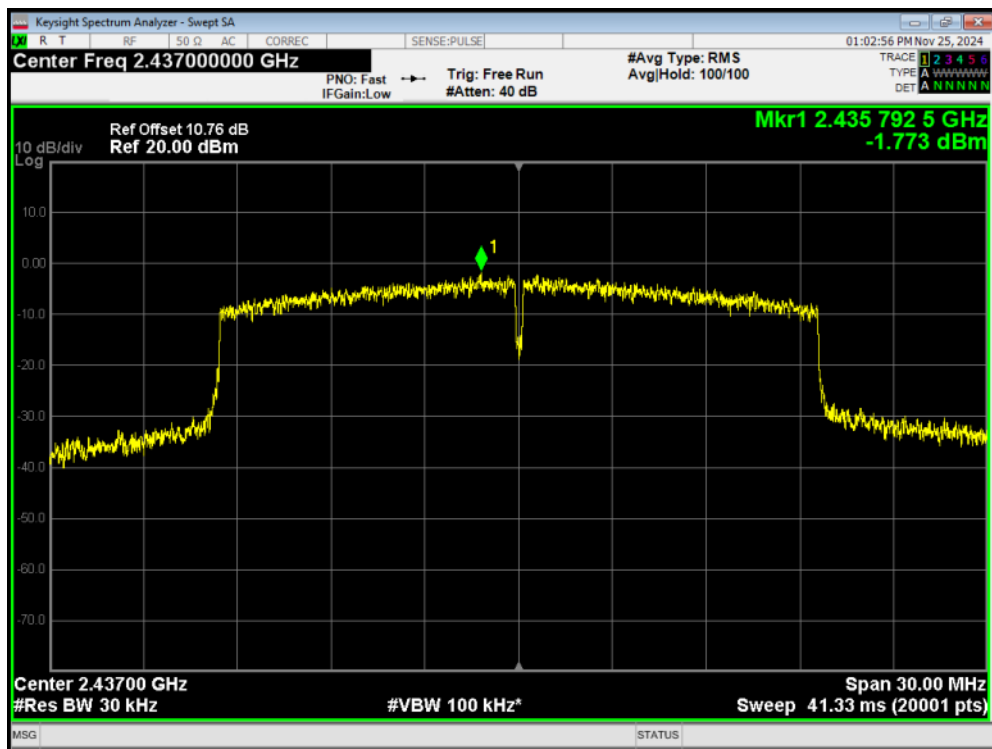


PSD 802.11ax(HE20) 2442MHz

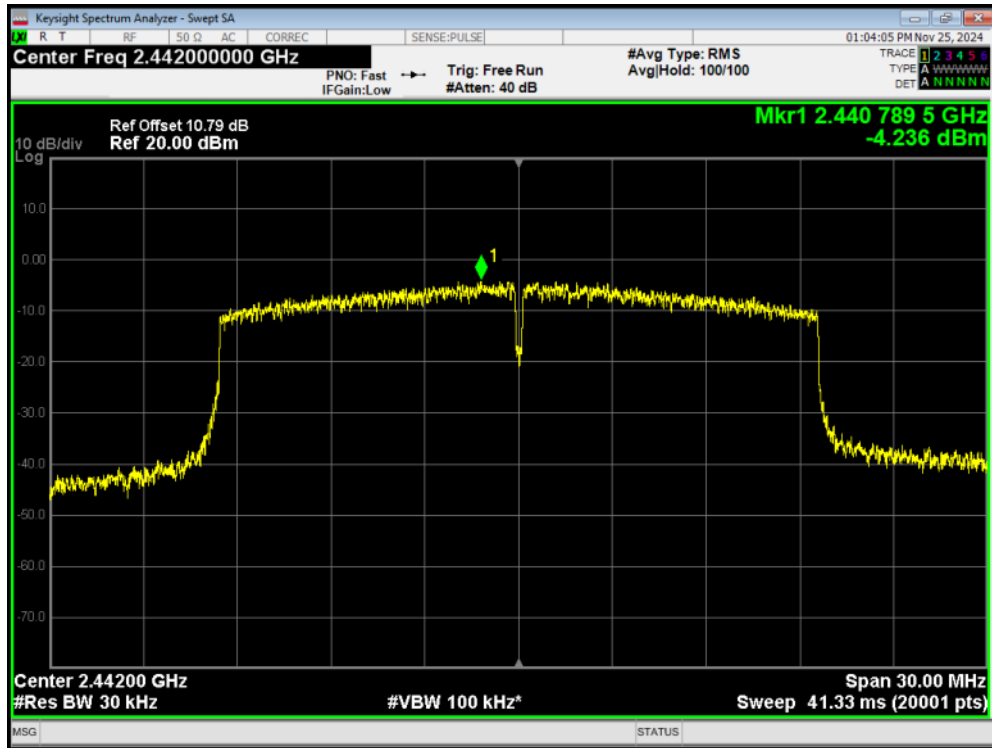


PSD 802.11ax(HE20) 2447MHz

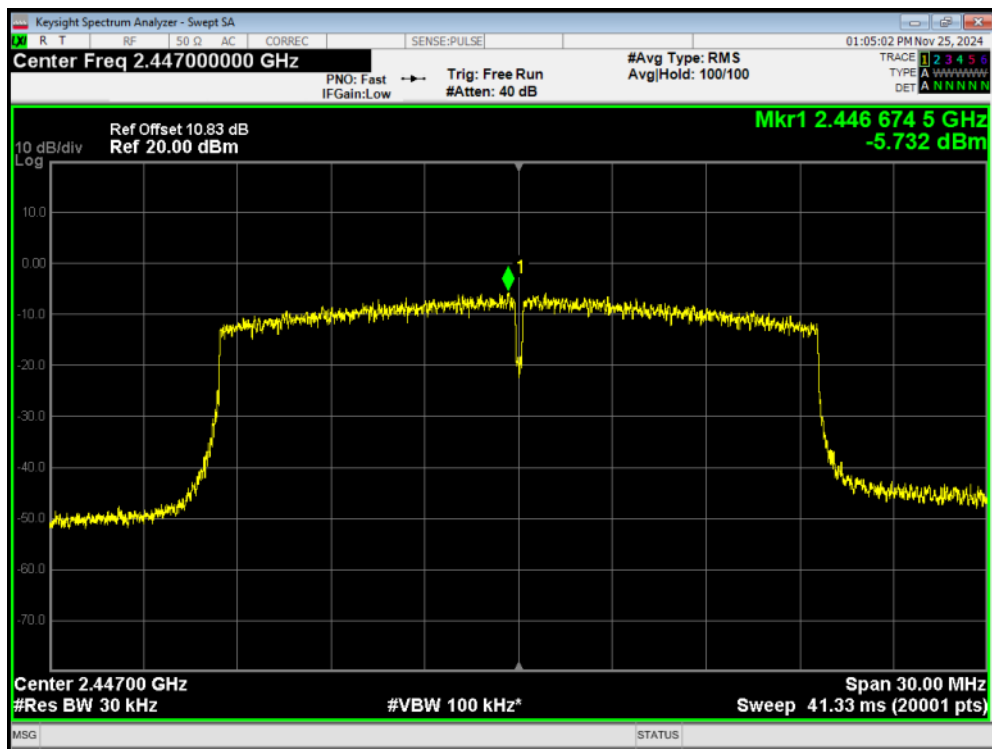


PSD 802.11ax(HE20) 2452MHz

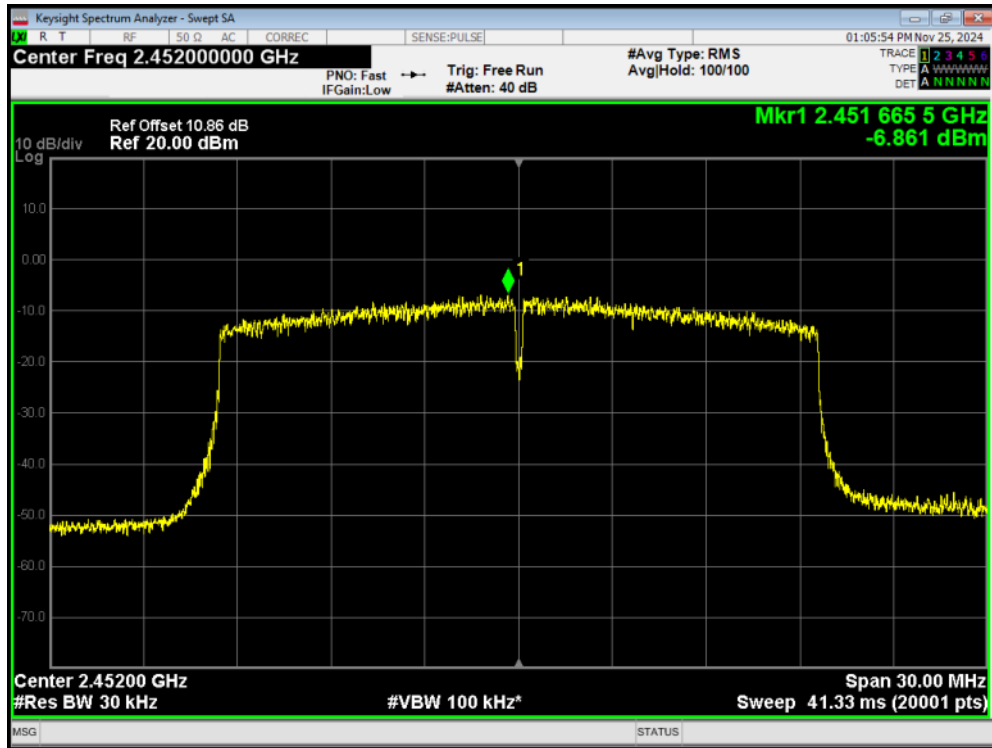


PSD 802.11ax(HE20) 2457MHz

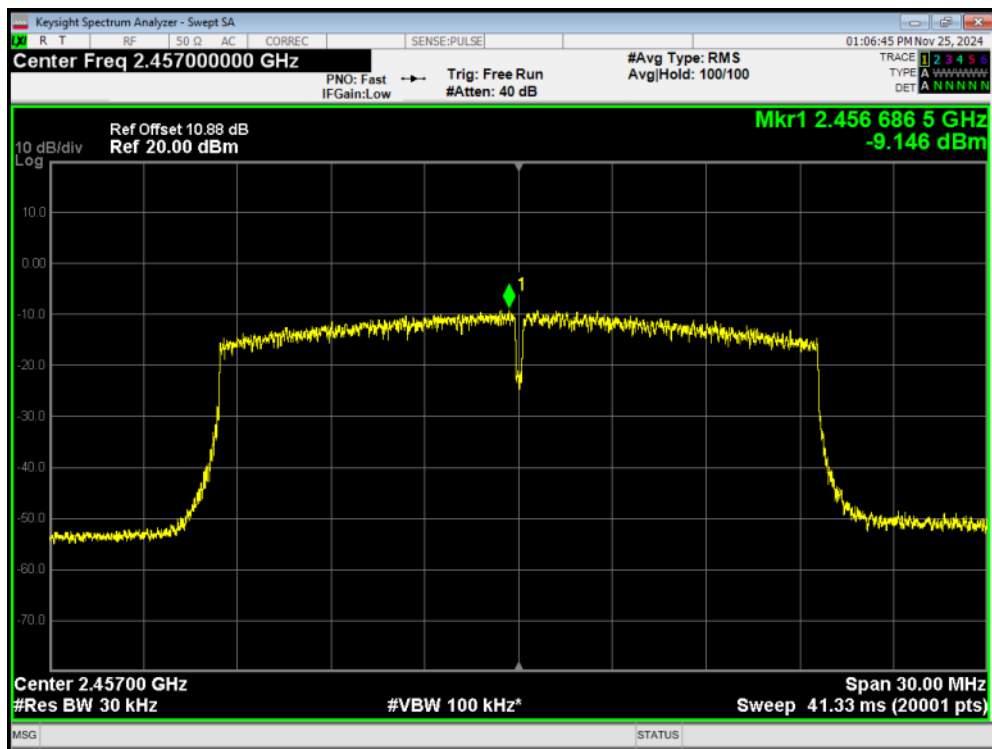


PSD 802.11ax(HE20) 2462MHz

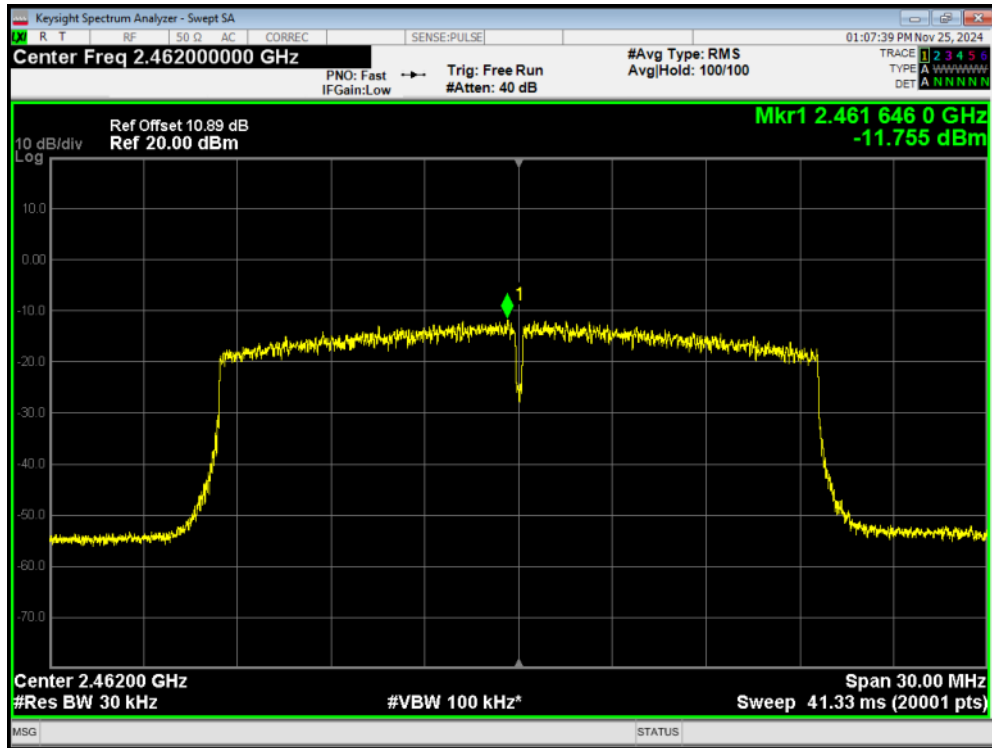


PSD 802.11ax(HE40) 2422MHz

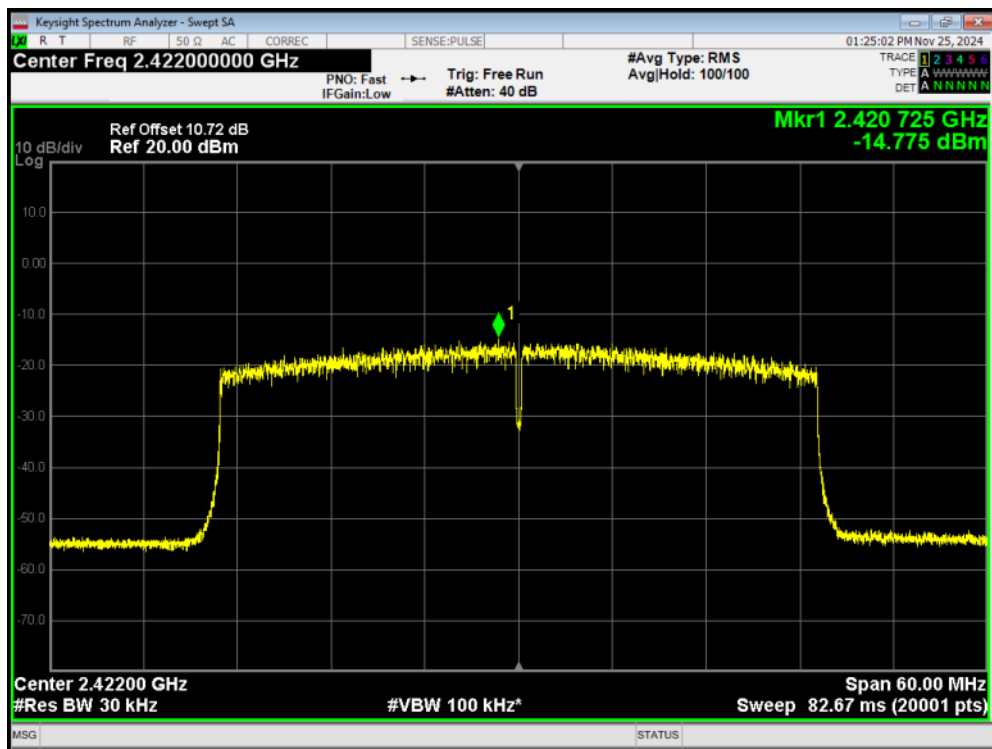


PSD 802.11ax(HE40) 2427MHz

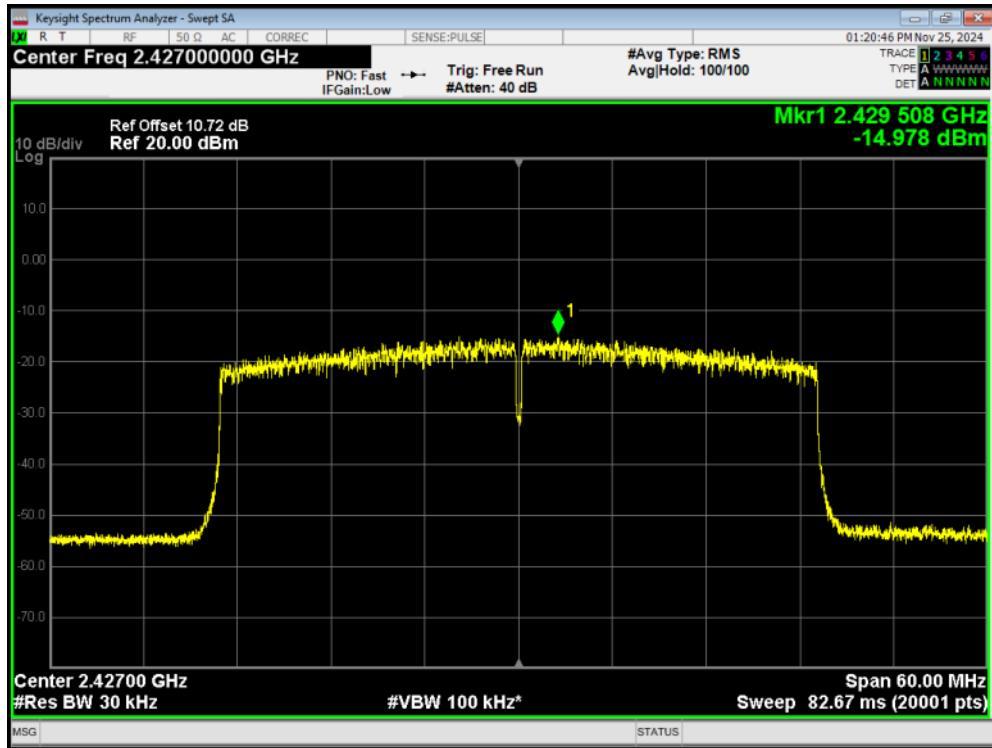


PSD 802.11ax(HE40) 2432MHz

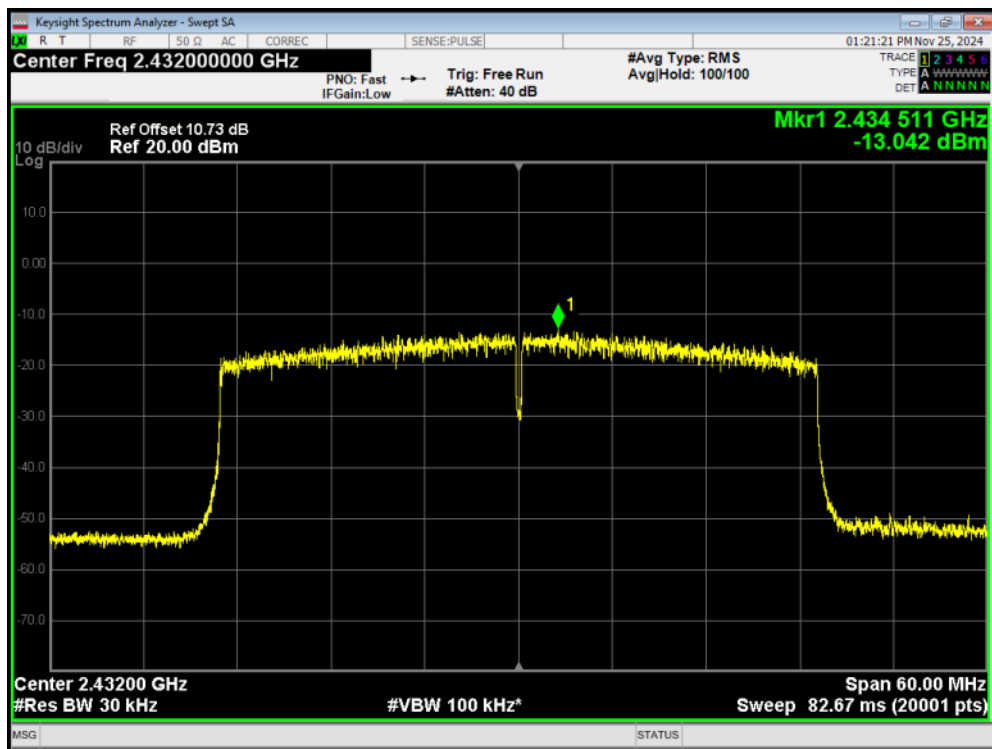


PSD 802.11ax(HE40) 2437MHz

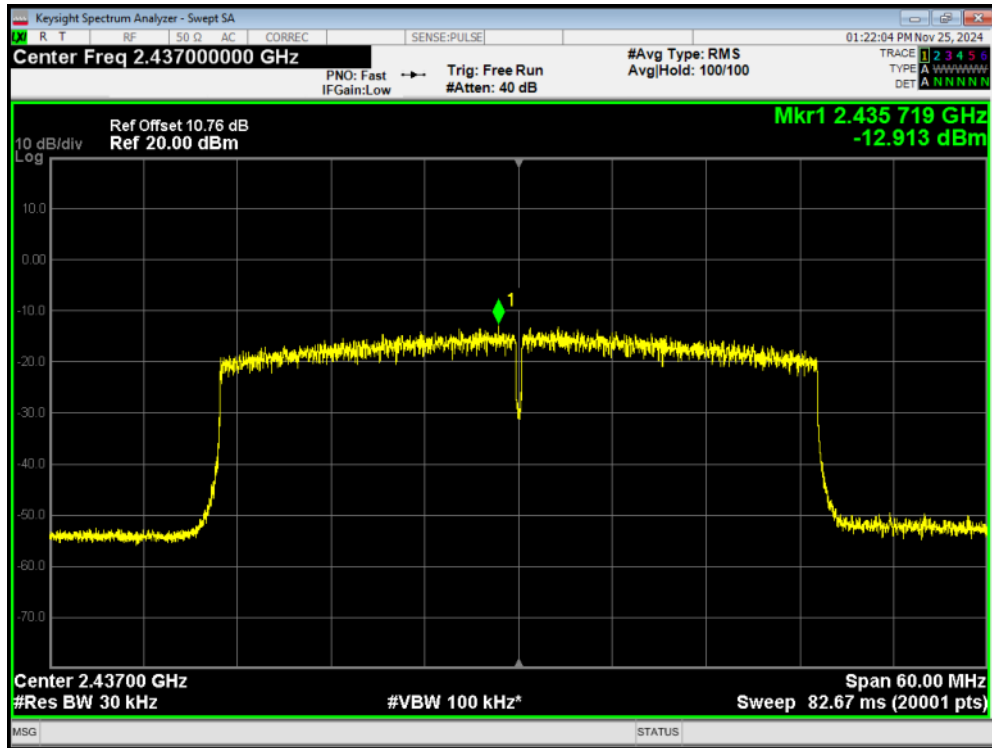

PSD 802.11ax(HE40) 2442MHz

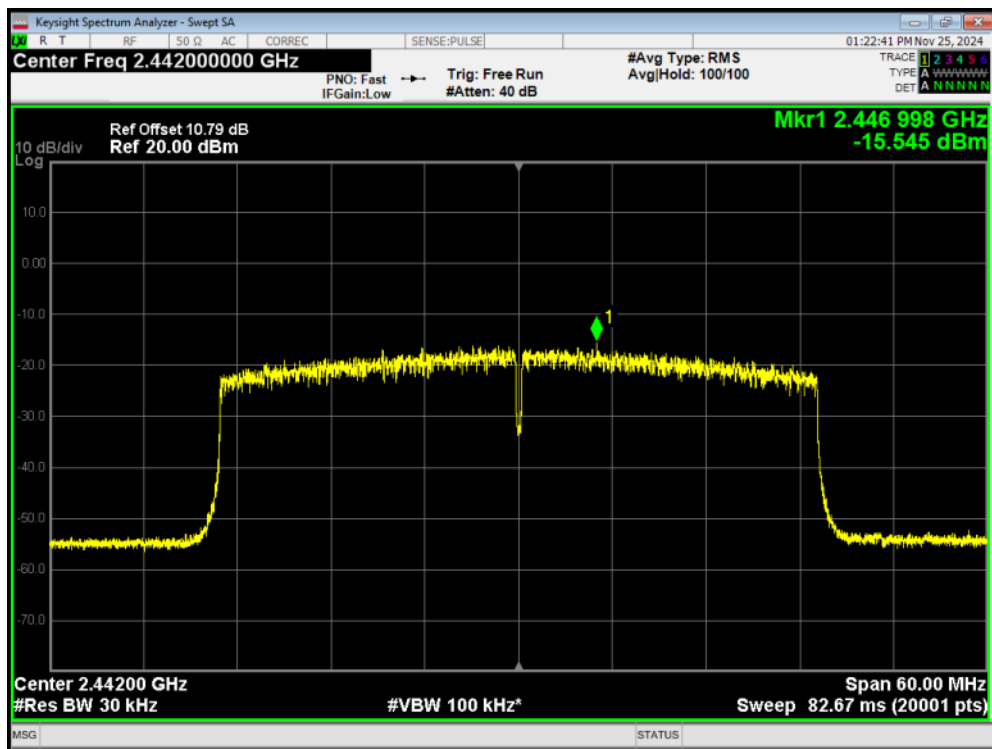

PSD 802.11ax(HE40) 2447MHz

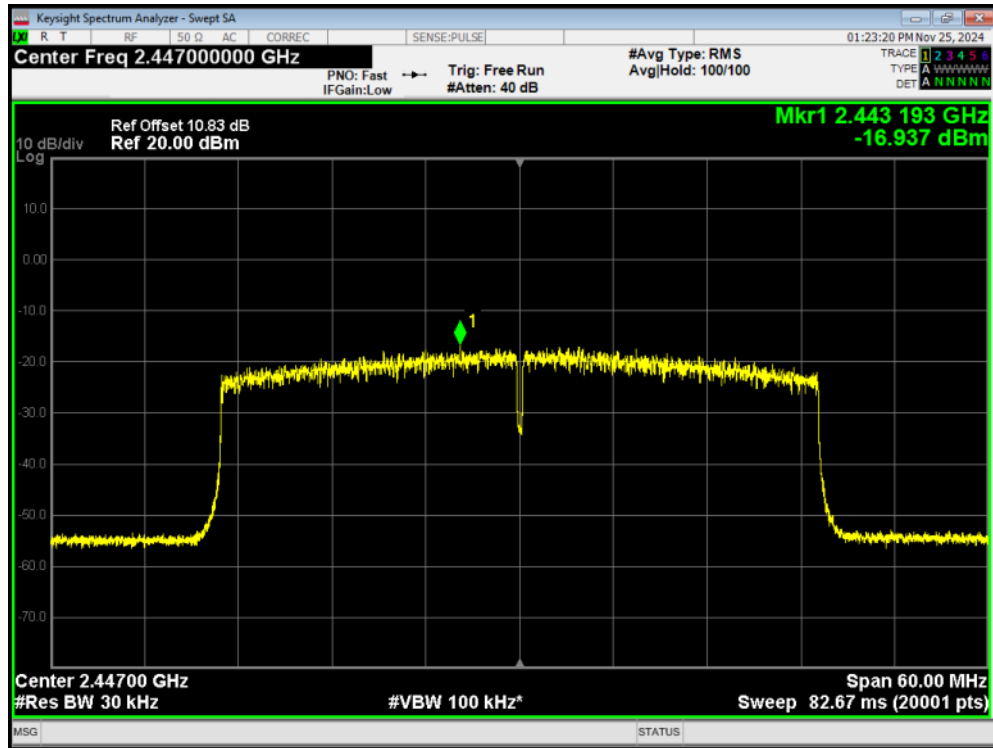

PSD 802.11ax(HE40) 2452MHz

