

Report No.: XEWM2309000451RG02

Rev.: 01

Page: 1 of 33

TEST REPORT

Application No: XEWM2309000451RG

Applicant: Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Address of Applicant:

NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,

Guangdong, China

Manufacturer: Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Address of Manufacturer: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,

Guangdong, China

EUT Description: Mobile Phone
Model No.: CPH2599
Trade Mark: OPPO

 FCC ID:
 R9C-CPH2599

 Standards:
 47 CFR Part 2

 47 CFR Part 22

47 CFR Part 22 47 CFR Part 27

Date of Receipt: 2023/09/08

Date of Test: 2023/09/13 to 2023/10/14

Date of Issue: 2023/10/20

Test Result: PASS *

Authorized Signature:

Peter Tan Regulatory Technical Manager



Unless otherwise agreed in Writing, fins local/ment is issued by the Lompany subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.px and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-Ferms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is clearly and the standard of the standard of

1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengolong New Town, X/an, Shazand, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

710086 t (86–29) 6282 7885 710086 t (86–29) 6282 7885

^{*} In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 2 of 33

1 Version

Revision Record					
Version	Chapter	Date	Modifier	Remark	
01		2023/10/20		Original	

Chen) / Test Engineer	
(Leah Chen) / Test Engineer Andy Yao) /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01 Page: 3 of 33

Content

1	Ver	sion	2
2	Tes	t Summary	5
	2.1	NR Band n5	
	2.2	NR Band n7 /NR Band n38 / NR Band n41	
	2.3	NR Band n66	
3	Ger	neral Information	8
	3.1	Client Information	8
	3.2	Test Location	8
	3.3	Test Facility	8
	3.4	General Description of EUT	9
	3.5	Test Mode	10
	3.6	Test Environment	10
	3.7	Description of Support Units	10
	3.8	Technical Specification	11
	3.9	Test Frequencies	13
4	Des	cription of Tests	18
	4.1	Conducted Output Power	18
	4.2	Effective (Isotropic) Radiated Power of Transmitter	19
	4.3	Occupied Bandwidth	20
	4.4	Band Edge at Antenna Terminals	21
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	22
	4.6	Peak-Average Ratio	23
	4.7	Field Strength of Spurious Radiation	24
	4.8	Frequency Stability / Temperature Variation	25
	4.9	Test Setups	26
	4.10	Test Conditions	28
5	Mai	n Test Instruments	30
6	Mea	asurement Uncertainty	32



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D. Building 1, Kanghong Charges Science Park, No. 137, Kepuan 3rd Road, Fengotong New Town, Xian, Straenul, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.:	XEWM2309000451RG02
-------------	--------------------

Rev.: 01

Page: 4 of 33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lare teached for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Natural Contents and the content of the content of

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 5 of 33

2 Test Summary

2.1 NR Band n5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 1 of Appendix B.18	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.18	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.18	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.18	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.18	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 6 of Appendix B.18	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	±2.5ppm.	Section 7 of Appendix B.18	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results of the company of the sample(s) tested and such sample(s) are retained for 30 days only.

To check the auther of the sample of the set of the set of the sample of the set of the set of the sample of the set of the

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 6 of 33

2.2 NR Band n7 /NR Band n38 / NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP≤2W	Section 1 of Appendix B.19&B.20&B.21	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.19&B.20&B.21	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.19&B.20&B.21	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 4 of Appendix B.19&B.20&B.21	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 9 5 MHz X=Max {6MHz, EBW}	Section 5 of Appendix B.19&B.20&B.21	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz × MHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.19&B.20&B.21	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.19&B.20&B.21	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and juryisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settent of the law. Unless otherwise stated the results of the company of the sample(s) tested and such sample(s) are retained for 30 days only.

To check the auther of the sample of the set of the set of the sample of the set of the set of the sample of the set of the

1/F, Unit D, Building 1, Kanylong Change Science Park, No. 177, Keyuan 3rd Road, Fengolong New Town, Xi'an, Shaenui, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 7 of 33

2.3 NR Band n66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.22	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.22	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.22	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 4 of Appendix B.22	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 5 of Appendix B.22	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 6 of Appendix B.22	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 7 of Appendix B.22	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 8 of 33

3 General Information

3.1 Client Information

Applicant:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.	
Address of Applicant:	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China	
Manufacturer:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.	
Address of Manufacturer:	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China	

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd.
Address:	1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi' an, Shaanxi China
Post code:	710086
Test engineer:	Bo Feng, Jacky Xue

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

•A2LA (Certificate No. 4854.01)

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0095.

IC#: 25613.

• FCC -Designation Number: CN1337

SGS-CSTC Standards Technical Services (Xi'an) Co., Ltd. has been recognized as an accredited testing

laboratory.

Designation Number: CN1337.

Test Firm Registration Number: 917410



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-and-Condition



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 9 of 33

3.4 General Description of EUT

EUT Description:	Mobile Phone					
Model No.:	CPH2599	CPH2599				
Trade Mark:	OPPO					
Hardware Version:	11					
Software Version:	ColosOS 14.0					
Power Supply:	Li-ion polymer Batte	ery(3.8	9V)			
IMEI:	RF Conducted			55060031018 55060031539		
	RSE		8650550600)29756		
Power Class:	Class 2: NR Band n	Class 2: NR Band n41				
Antenna Type:	Fixed Internal Antenna					
	NR Band n5:	-4.8dBi(Ant0)		-3.7dBi(Ant1)		
	NR Band n7:	-0.4dBi(Ant3)		-0.8dBi(Ant4)		-0.8dBi(Ant5)
	NR Band n38:	-0.4dBi(Ant3)		-0.8dBi(Ant4)		-0.8dBi(Ant5)
Antenna Gain:	NR Band n41:	-0.4dBi(Ant3)		-0.8dBi(Ant4)		-0.8dBi(Ant5)
	NR Band n66:	-0.8dBi(Ant3)		-1dBi(Ant4)		-1dBi(Ant5)
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.					
			00MHz ~ 2000MHz (0.8dB)			
RF Cable:	2000MHz ~ 4000MHz (1.2dB)		4000MHz ~ 6000MHz 60 (1.8dB)		600	00MHz ~ 12750MHz (2.6dB)
	Above 12750MHz (3.5dB)					
	·					

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clients' instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 137, Keyuan 3rd Road, Fengolong New Town, Xian, Shasanui, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 10 of 33

3.5 Test Mode

Test Mode	Test Modes Description			
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation			
NR/TM2	NR system, DFT-s-QPSK modulation			
NR/TM3	NR system, DFT-s-16QAM modulation			
NR/TM4	NR system, DFT-s-64QAM modulation			
NR/TM5	NR system, DFT-s-256QAM modulation			
NR/TM6	IR system, CP-QPSK modulation			
NR/TM7	NR system, CP-16QAM modulation			
NR/TM8	NR system, CP-64QAM modulation			
NR/TM9	NR/TM9 NR system, CP-256QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter		96~98 kPa Selected Values During Tests			
Relative Humidity		40-60 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~25	3.89		
LTLV		-30	3.6		
LTHV		-30	4.48		
HTLV		50	3.6		
HTHV		50	4.48		
Remark:					
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature		

3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 83071443,

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 11 of 33

3.8 Technical Specification

Characteristics	Description					
Radio System Type	⊠ SA ⊠ NSA					
	Band	TX	TX			
	NR Band n5	824 to 849 MI	824 to 849 MHz		Hz	
	NR Band n7	2500 to 2570	MHz	2620 to 2690	MHz	
	NR Band n38	2570 to 2620	MHz	2570 to 2620	MHz	
Supported Frequency	NR Band n41	2496 to 2690	MHz	2496 to 2690	MHz	
Range	NR Band n66	1710 to 1780	MHz	2110 to 2180	MHz	
	ENDC: DC_7A_n5; DC_66A_n5; DC_2A_n7; DC_5A_n7; DC_66A_n7; DC_66A_n38; DC_26A_n41; DC_66A_n41; DC_2A_n66; DC_5A_n66; DC_7A_n66; DC_12A_n66 Remark: ENDC only test RSE, report only show worst mode.					
	NR Band n5	SCS 15kHz:				
	INK Danu no	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	NR Band n7	SCS 15kHz:				
		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		⊠25 MHz	⊠30 MHz	⊠40 MHz		
		SCS 30kHz:				
Commonte d Observant	NR Band n38	⊠10 MHz	⊠15 MHz;	⊠20 MHz;	⊠30 MHz	
Supported Channel Bandwidth		⊠40 MHz				
		SCS 30kHz:				
	NR Band n41	⊠20 MHz	⊠30 MHz	⊠40 MHz	⊠50 MHz	
	NIX Ballu II41	⊠60 MHz	⊠70 MHz	⊠80 MHz	⊠90 MHz	
		⊠100 MHz				
		SCS 15kHz:				
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		⊠40 MHz				
Designation of Emissions		DFT-s-Pi/2- BPSK	CP-16QAM			
(Remark: the necessary	=	SCS 15kHz:				
bandwidth of which is	NR Band n5	4M48G7D	4M48W7D			
the worst value from		8M98G7D	9M26W7D			
the measured occupied		13M4G7D	14M1W7D			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration; forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, National Company and the content of the

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 12 of 33

bandwidths for each		17M9G7D	18M2W7D	
type of channel bandwidth		SCS 15kHz:		
configuration.)		4M48G7D	4M48W7D	
,		8M94G7D	9M28W7D	
		13M4G7D	14M1W7D	
	NR Band n7	17M9G7D	18M9W7D	
		22M9G7D	23M8W7D	
		28M6G7D	28M6W7D	
		38M6G7D	38M6W7D	
		SCS 30kHz:		
		8M64G7D	8M60W7D	
	NR Band n38	13M0G7D	13M6W7D	
	INR Band n38	17M9G7D	18M2W7D	
		27M0G7D	27M8W7D	
		36M0G7D	38M1W7D	
		SCS 30kHz:		
		17M9G7D	18M2W7D	
		27M0G7D	27M8W7D	
		36M0G7D	38M1W7D	
	NR Band n41	45M8G7D	47M6W7D	
	INK Ballu 1141	58M1G7D	57M8W7D	
		64M7G7D	67M8W7D	
		77M4G7D	78M1W7D	
		86M8G7D	87M8W7D	
		96M8G7D	97M6W7D	
		SCS 15kHz:		
		4M47G7D	4M47W7D	
	NR Band n66	8M96G7D	8M26W7D	
		13M4G7D	14M1W7D	
		17M9G7D	18M9W7D	
		38M5G7D	38M6W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanylong Change Science Park, No. 137, Keyuan 3rd Road, Fergotorg New Town, X/an, Shaznui, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.:

Page: 13 of 33

3.9 Test Frequencies

3.9.1 Reference test frequencies for NR operating band n5 3.9.1.1 Test frequencies for NR operating band n5 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
		Low	871.5	174300		
Ε	Downlink	Mid	881.5	176300	15	
5		High	891.5	178300		
3		Low	826.5	165300		
	Uplink	Mid	836.5	167300	-	
		High	846.5	169300		
		Low	874	174800		
	Downlink	Mid	881.5	176300	15	
10		High	889	177800		
10		Low	829	165800		
	Uplink	Mid	836.5	167300	-	
	•	High	844	168800		
		Low	876.5	175300	15	
	Downlink	Mid	881.5	176300		
15		High	886.5	177300		
15		Low	831.5	166300		
	Uplink	Mid	836.5	167300	-	
		High	841.5	168300		
		Low	879	175800		
20	Downlink	Mid	881.5	176300	15	
		High	884	176800		
20		Low	834	166800		
	Uplink	Mid	836.5	167300	-	
ĺ		High	839	167800		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, frogery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi'an, Shaarwi, China 710086 中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 14 of 33

3.9.2 Reference test frequencies for NR operating band n7

3.9.2.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth [MHz]	Rang	e	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
[1411 12]		Low	2622.5	524500	[KI12]	
	Downlink	Mid	2655	531000	15	
-	Downing	High	2687.5	537500	- "	
5		Low	2502.5	500500		
Uplink	Uplink	Mid	2535	507000		
	Op	High	2567.5	513500		
		Low	2625	525000		
	Downlink	Mid	2655	531000	15	
	2011111111	High	2685	537000	-	
10		Low	2505	501000		
	Uplink	Mid	2535	507000		
	- F	High	2565	513000	=	
		Low	2627.5	525500		
	Downlink	Mid	2655	531000	15	
		High	2682.5	536500	1	
15		Low	2507.5	501500		
	Uplink	Mid	2535	507000		
	- F	High	2562.5	512500		
		Low	2630	526000		
Downlink	Downlink	Mid	2655	531000	15	
		High	2680	536000		
20		Low	2510	502000		
	Uplink	Mid	2535	507000		
	•	High	2560	512000	1	
		Low	2632.5	526500		
	Downlink	Mid	2655	531000	15	
0.5		High	2677.5	535500	1	
25		Low	2512.5	502500		
	Uplink	Mid	2535	507000	- -	
	•	High	2557.5	511500		
		Low	2635	52700		
	Downlink	Mid	2655	531000	15	
00		High	2675	535000		
30		Low	2515	503000		
	Uplink	Mid	2535	507000		
	•	High	2555	511000		
		Low	2640	528000		
	Downlink	Mid	2655	531000	15	
	-	High	2670	534000	1	
40		Low	2520	504000		
	Uplink	Mid	2535	507000	-	
	Oplilik					
		High	2550	510000		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lare teached for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Natural Contents and the content of the content of

1/F, Unit D, Building 1, Kanylong Change Science Park, No. 177, Keyuan 3rd Road, Fengolong New Town, Xi'an, Shaenui, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 15 of 33

3.9.3 Reference test frequencies for NR operating band n38

3.9.3.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2575	515000	
10	&	Mid	2595	519000	30
	Uplink	High	2615	523000	
	Downlink	Low	2577.5	515500	
15	&	Mid	2595	519000	30
	Uplink	High	2612.5	522500	
	Downlink	Low	2580	516000	
20	&	Mid	2595	519000	30
	Uplink	High	2610	522000	
	Downlink	Low	2585	517000	
30	&	Mid	2595	519000	30
	Uplink	High	2605	521000	
40	Downlink	Low	2590	518000	
	&	Mid	2595	519000	30
	Uplink	High	2600	520000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 16 of 33

3.9.4 Reference test frequencies for NR operating band n41

3.9.4.1 Test frequencies for NR operating band n41 and SCS 30 kHz

CBW [MHz]	Range	•	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2511	502200	
30	&	Mid	2592.99	518598	30
	Uplink	High	2675	535000	
	Downlink	Low	2516.01	503202	
40	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2521.02	504204	
50	&	Mid	2592.99	518598	30
	Uplink	High	2664.99	532998	
	Downlink	Low	2526	505200	
60	&	Mid	2592.99	518598	30
	Uplink	High	2659.98	531996	
	Downlink	Low	2531	506200	
70	&	Mid	2592.29	518598	30
	Uplink	High	2655	531000	
	Downlink	Low	2536.02	507204	
80	&	Mid	2592.99	518598	30
	Uplink	High	2649.99	529998	
	Downlink	Low	2541	508200	
90	&	Mid	2592.99	518598	30
	Uplink	High	2644.98	528996	
	Downlink	Low	2546.01	509202	
100	&	Mid	2592.99	518598	30
	Uplink	High	2640	528000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 17 of 33

3.9.5 Reference test frequencies for NR operating band n66

3.9.5.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	2112.5	422500	
	Downlink	Mid	2145	429000	15
-		High	2177.5	435500	
5		Low	1712.5	342500	
	Uplink	Mid	1745	349000	-
		High	1777.5	355500	
		Low	2115	423000	
	Downlink	Mid	2145	429000	15
10		High	2175	435000	
10		Low	1715	343000	
	Uplink	Mid	1745	349000	-
		High	1775	355000	
		Low	2117.5	423500	15
	Downlink	Mid	2145	429000	
15		High	2172.5	434500	
15		Low	1717.5	343500	-
	Uplink	Mid	1745	349000	
		High	1772.5	354500	
		Low	2120	424000	
	Downlink	Mid	2145	429000	15
20		High	2170	434000	
20		Low	1720	344000	
	Uplink	Mid	1745	349000	-
		High	1770	354000	
		Low	2130	426000	
	Downlink	Mid	2145	429000	15
40		High	2160	432000	
40		Low	1730	346000	
	Uplink	Mid	1745	349000	-
	·	High	1760	352000	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 18 of 33

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



nless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer verleaf, available on request or accessible at http://www.sgs.com/nTerms-and-Conditions.aspx and, for electronic format documents ubject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx tention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits o lient's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ansaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content o pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the isults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Itention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443

1/F, Unit D, Building 1, Kanghong Change Science Park, No.137, Keyuan 3rd Read, Fengatong New Toum, Xi'an, Shaami, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编:710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 19 of 33

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 83071443,

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 137, Keyuan 3rd Road, Fengolong New Town, Xian, Shasanui, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 20 of 33

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request for accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-as-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Terms-e-Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-75) 83071443.

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 137, Keyuan 3rd Road, Fengotong New Town, Xian, Shazarui, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 21 of 33

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Counditions/Terms

1/F, Unit D, Building 1, Kanghong Change Science Park, No.137, Keyuan 3rd Read, Fengatong New Toum, Xi'an, Shaami, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编:710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 22 of 33

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.pxx and, for electronic forms tdocuments, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are referred for 30 days only.

1/F, Unit D, Bulding 1, Kanghang Orange Science Park, No.137, Keyuan 3rd Road, Fengolong New Town, X/an, Shaanci, China 710086 中国・西安・沣东新城科源三路137号康鴻橙方科技园1号楼D单元1层 邮第: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 23 of 33

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law Luless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 83071443, **Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 83071443,



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 24 of 33

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

 $E (dB\mu V/m) = Measured \ amplitude \ level \ (dB\mu V) + (Cable \ Loss \ (dB) + Antenna \ Factor \ (dB/m) - AMP(dB))$ $EIRP \ (dBm) = E \ (dB\mu V/m) + 20 \ log \ D - 104.8; \ where \ D \ is \ the \ measurement \ distance \ in \ meters$

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 25 of 33

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Counditions/Terms-en/Conditions/Terms-en/Counditions/Terms-

1/F, Unit D, Building 1, Kanghong Change Science Park, No.137, Keyuan 3rd Read, Fengatong New Toum, Xi'an, Shaami, China 710086 中国 • 西安 • 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编:710086 t (86-29) 6282 7885 t (86-29) 6282 7885




Report No.: XEWM2309000451RG02

Rev.:


Page: 26 of 33

4.9 Test Setups

Test Setup 1 4.9.1

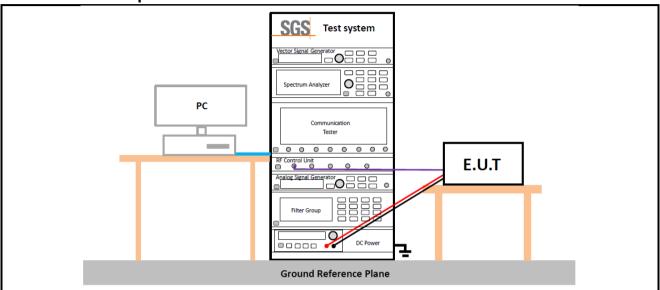

4.9.2 **Test Setup 2**

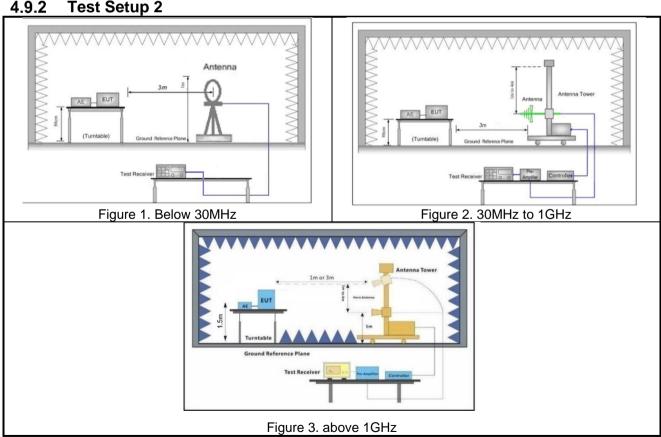



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law Luless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 83071443, **Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 83071443,

1/F, Unit D, Building 1, Kanghong Orange Science Park, No.137, Keyuan 3rd Road, Fengdong New Town, Xi'an, Shaanoi, China 710086 中国·西安·沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885




Report No.: XEWM2309000451RG02

Rev.: 01

Page: 27 of 33

4.9.3 Test Setup 3

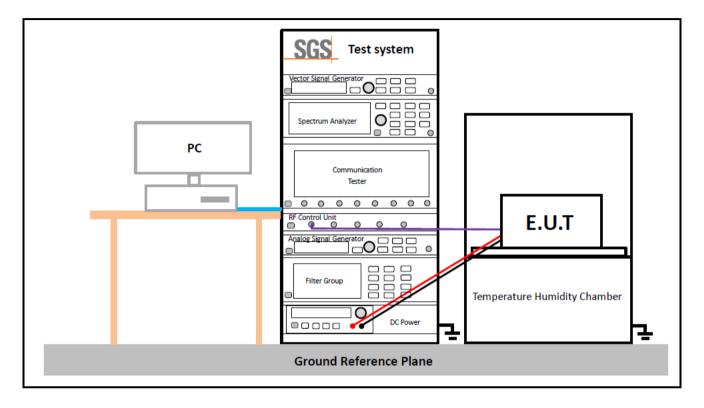



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086

t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 28 of 33

4.10Test Conditions

4.10 Tool Conditions				
	Transmit Output Power Data - Average Power, Total			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5			
	Peak-to-Average Ratio			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM5			
	Bandwidth - Occupied Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
	Bandwidth - Emission Bandwidth			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9			
	Band Edges Compliance			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, H (L= low channel, H= high channel)			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration; forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, National Company and the content of the

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 29 of 33

Test Mode	NR/TM1; NR/TM6			
Spurious Emission at Antenna Terminals				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1			
	Field Strength of Spurious Radiation			
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 2			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.			
	Frequency Stability			
Test Case	Test Conditions			
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage			
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.			
Test Setup	Test Setup 3			
RF Channels (TX)	M (M= middle channel)			
Tost Modo	NR/TM1; NR/TM6			
Test Mode	The report only show the bandwidth with the worst case.			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 30 of 33

Main Test Instruments

NR RF Test System						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Radio communication Analyzer	Keysight	UXM	XAW01-19-05	2023/02/06	2024/02/05	
Radio communication Analyzer	StarPoint	SP9500	XAW01-45-01	2023/02/16	2024/02/15	
Spectrum Analyzer	ROHDE&SCHWARZ	FSU	XAW01-13-02	2023/08/30	2024/08/29	
Filter bank	Tonscend	JS0806-F	XAW03-05-06	NCR	NCR	
RF control unit	Tonscend	JS0806-1	XAW03-37-03	NCR	NCR	
Test Software	Tonscend	JS1120 (2.4.1)	XAW02-16-01	NCR	NCR	
Temperature and humidity meter	MingGao	T809	XAW01-01-17	2023/09/04	2024/09/03	
temperature chamber	Votsch	VT4002	XAW01-18-01	2023/02/16	2024/02/15	
Power Supply	Agilent	66311B	XAW01-17-01	2023/02/16	2024/02/15	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86–29) 6282 7885 t (86–29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 31 of 33

		RSE Test Syster	m		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2021/09/09	2024/09/08
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2023/02/16	2024/02/15
Spectrum Analyzer	ROHDE& SCHWARZ	FSV3044	XAW01-13-05	2023/05/15	2024/05/14
Test receiver	ROHDE& SCHWARZ	ESR	XAW01-08-01	2023/08/30	2024/08/29
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2022/07/28	2024/07/27
Receiving antenna(1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2022/07/28	2024/07/27
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2022/07/23	2024/07/22
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR
Amplifier	Tonscend	TAP9K3G32	XAW01-41-01	2023/05/15	2024/05/14
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2023/08/30	2024/08/29
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2023/08/30	2024/08/29
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2023/08/30	2024/08/29
Temperature and humidity meter	MingGao	TH101B	XAW01-01-02	2023/09/04	2024/09/03
Wireless Test platform	StarPoint	SP9500	XAW01-45-01	2023/02/16	2024/02/15
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2023/02/16	2024/02/15
Measurement Software	Tonscend	TS+ V4.0.0.0	XAW02-05-01	NCR	NCR
Loop Antenna	Schwarzbeck	FMZB 1519B	XAW01-48-02	2022/05/26	2024/05/25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thite: <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-And

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 32 of 33

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.2dB
2	Spurious emissions, conducted	±0.4dB
3	Radio Frequency	±9.04 x 10 ⁻⁸ GHz
4	Duty Cycle	±0.30%
5	Occupied Bandwidth	±9.04 x 10 ⁻⁸ GHz
		± 4.6dB (9kHz to 30MHz)
		± 4.9dB (30MHz to 1GHz)
6	Radiated Emission	± 4.9dB (1GHz to 6GHz)
		± 4.7dB (6GHz to 18GHz)
		± 5.26dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than U_{cispr/ETSI} (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law longer of the lawful the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:** To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***



Report No.: XEWM2309000451RG02

Rev.: 01

Page: 33 of 33

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.18	NR Band n5
Appendix B.19	NR Band n7
Appendix B.20	NR Band n38
Appendix B.21	NR Band n41
Appendix B.22	NR Band n66

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, frogery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

1/F, Unit D, Building 1, Kanghong Change Science Park, No. 17. (Appen 3rd Road, Fengolong New Town, Xian, Shaanvi, China 710086 中国 - 西安 - 沣东新城科源三路137号康鸿橙方科技园1号楼D单元1层 邮编: 710086 t (86-29) 6282 7885 t (86-29) 6282 7885