



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-26828G

**Report Number: 12371351-S1V3
Issue Date: 7/30/2018**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	7/19/2018	Initial Issue	--
V2	7/24/2018	Added LTE Bands 7 and 41 retests Section 2: Updated TCB List Appendix C: Update test plots for LTE Bands 7 and 41	Coltyce Sanders
V3	7/30/2018	Section 9.5: Updated Table Section 9.6: Updated Table	Coltyce Sanders

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	13
6.3.	General LTE SAR Test and Reporting Considerations.....	14
6.4.	LTE (TDD) Considerations.....	17
6.5.	LTE Carrier Aggregation	18
7.	RF Exposure Conditions (Test Configurations).....	20
8.	Dielectric Property Measurements & System Check	21
8.1.	Dielectric Property Measurements	21
8.2.	System Check.....	24
9.	Conducted Output Power Measurements.....	26
9.1.	GSM	26
9.2.	W-CDMA	29
9.3.	LTE.....	35
9.4.	LTE Carrier Aggregation	49
9.5.	Wi-Fi 2.4GHz (DTS Band)	52
9.6.	Wi-Fi 5GHz (U-NII Bands).....	53
9.7.	Bluetooth	55
10.	Measured and Reported (Scaled) SAR Results.....	56
10.1.	GSM850.....	57
10.2.	GSM1900.....	57
10.3.	W-CDMA Band II.....	58
10.4.	W-CDMA Band IV	58
10.5.	W-CDMA Band V	58
10.6.	LTE Band 2 (20MHz Bandwidth)	59

10.7.	LTE Band 4 (20MHz Bandwidth)	59
10.8.	LTE Band 5 (10MHz Bandwidth)	59
10.9.	LTE Band 7 (20MHz Bandwidth)	60
10.10.	LTE Band 12 (10MHz Bandwidth)	60
10.11.	LTE Band 13 (10MHz Bandwidth)	61
10.12.	LTE Band 17 (10MHz Bandwidth)	61
10.13.	LTE Band 26 (15MHz Bandwidth)	62
10.14.	LTE Band 41 (20MHz Bandwidth)	63
10.15.	LTE Band 66 (20MHz Bandwidth)	64
10.16.	Wi-Fi (DTS Band)	65
10.17.	Wi-Fi (U-NII Band)	66
10.18.	Bluetooth	67
11.	SAR Measurement Variability	68
12.	Simultaneous Transmission Conditions	69
12.1.	Simultaneous transmission SAR test exclusion considerations	69
12.1.1.	Sum of SAR	69
12.2.	Sum of the SAR for WWAN & Wi-Fi & BT	69
Appendixes	70	
12371351-S1V1 Appendix A: SAR Setup Photos	70	
12371351-S1V1 Appendix B: SAR System Check Plots	70	
12371351-S1V2 Appendix C: Highest SAR Test Plots	70	
12371351-S1V1 Appendix D: SAR Liquid Tissue Ingredients	70	
12371351-S1V1 Appendix E: SAR Probe Calibration Certificates	70	
12371351-S1V1 Appendix F: SAR Dipole Calibration Certificates	70	

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-26828G			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.144	0.433	0.458	0.196
Body-worn	0.443	0.036	0.099	0.006
Hotspot/Wi-Fi Direct	0.851	0.141	N/A	0.062
Product Specific 10g SAR	N/A	N/A	0.669	N/A
Simultaneous TX	1.075	1.075	0.863	0.867
Date Tested	6/19/2018 to 7/6/2018 and 7/23/2018			
Test Results	Pass			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:		Prepared By:		
				
Dave Weaver Operations Leader UL Verification Services Inc.		Coltyce Sanders Test Engineer UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- o 248227 D01 802.11 Wi-Fi SAR v02r02
- o 447498 D01 General RF Exposure Guidance v06
- o 447498 D03 Supplement C Cross-Reference v01
- o 648474 D04 Handset SAR v01r03
- o 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- o 865664 D02 RF Exposure Reporting v01r02
- o 941225 D01 3G SAR Procedures v03r01
- o 941225 D05 SAR for LTE Devices v02r05
- o 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- o 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- o [TCB workshop](#) April 2015; Page 33, RF Exposure Procedures Update (Overlapping LTE Bands)
- o [TCB workshop](#) October 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- o [TCB workshop](#) October 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- o [TCB workshop](#) April 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation for DL)
- o [TCB workshop](#) October 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- o [TCB workshop](#) October 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)
- o [TCB workshop](#) May 2017; Page 9, Broadband Liquid Above 3 GHz

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 7
SAR Lab H	SAR Lab 8

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

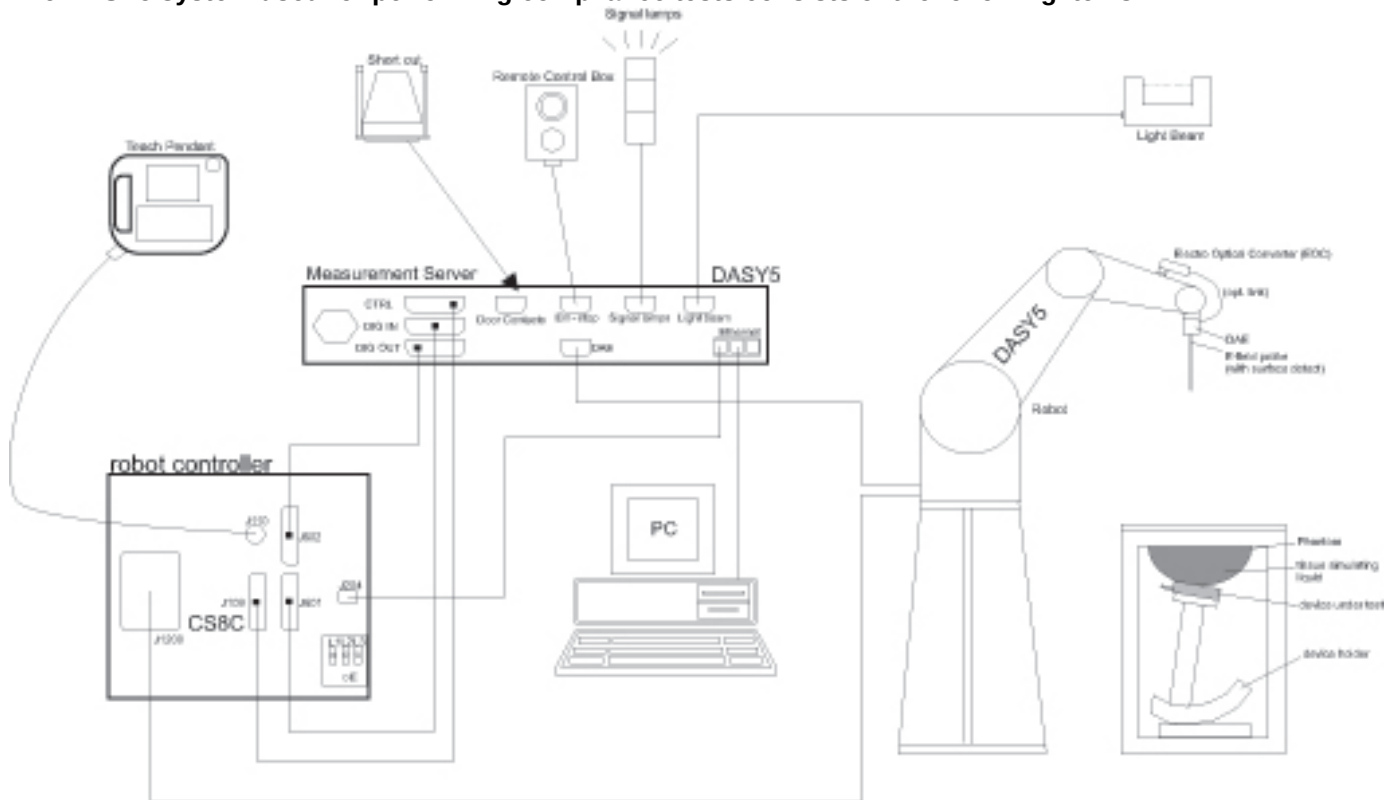

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/14/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	6/7/2019
Power Meter	Keysight	N1912A	MY55196004	7/14/2018
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY5226009	1/8/2019
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/25/2019
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U11347	8/15/2018
Power Sensor	HP	8481A	1926A27048	8/10/2018
Power Sensor	HP	8481A	3318A92374	8/15/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	7498	5/4/2019
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3885	10/24/2018
E-Field Probe (SAR Lab 7)	SPEAG	EX3DV4	7500	5/4/2019
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	7501	5/4/2019
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1546	5/3/2019
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1545	4/13/2019
Data Acquisition Electronics (SAR Lab 7)	SPEAG	DAE4	1547	5/3/2019
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1258	5/22/2019
System Validation Dipole	SPEAG	D750V3	1071	11/21/2018
System Validation Dipole	SPEAG	D835V2	4d002	11/21/2018
System Validation Dipole	SPEAG	D1750V2	1050	4/10/2019
System Validation Dipole	SPEAG	D1900V2	5d043	11/22/2018
System Validation Dipole	SPEAG	D2450V2	899	3/16/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/16/2019
System Validation Dipole	SPEAG	D5GHzV2	1003	3/13/2019
Thermometer (SAR Lab 5/6/7/8)	Fisher Scientific	Traceable	181062300	2/26/2019

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Keysight	N1912A	MY55196007	7/17/2018
Power Sensor	Agilent	N1921A	MY53260010	10/17/2018
Base Station Simulator	R & S	R & S	164541-CI	2/19/2019
Base Station Simulator	R & S	R & S	137875-DZ	2/21/2019
Base Station Simulator	Agilent	8960	GB47050526	3/22/2019

Test Equipment used for Test Date 7/23/2018:**Dielectric Property Measurements**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/14/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/25/2019
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U11347	8/15/2018
Power Sensor	HP	8481A	1926A27048	8/10/2018
Power Sensor	HP	8481A	3318A92374	8/15/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3885	10/24/2018
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1545	4/13/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/16/2019
Thermometer (SAR Lab 5/6/7/8)	Fisher Scientific	Traceable	181062300	2/26/2019

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A		
Back Cover	The Back Cover is not removable		
Battery Options	The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz)		
Test sample information	S/N	IMEI	Notes
	BH93002SD4	004402458837261	FCC Conducted #1
	BH93007GD4	004402458837303	FCC Conducted #2
	BH93005HD4	004402458837436	FCC SAR GSM/UMTS (conducted)
	BH93004FD4	004402458837386	FCC SAR LTE (LB/MB) (conducted)
	BH93001PD4	004402458837337	FCC SAR LTE (HB) (conducted)
	BH93008XD4	004402458837295	WLAN 2.4GHz (Conducted) #2
	BH930058D4	004402458837444	WLAN 5GHz (Conducted) #2
	BH930030D4	004402458837808	FCC/CE SAR - GSM/UMTS/HAC-M #1
	BH930064D4	004402458837782	FCC/CE SAR - GSM/UMTS/HAC-M #2
	BH930026D4	004402458837725	FCC/CE SAR - LTE(LB/MB)(Radiated) #1
	BH93005ZD4	004402458837766	FCC/CE SAR - LTE(LB/MB)(Radiated) #2
	BH930031D4	004402458837774	FCC SAR - LTE(HB)(Radiated) #1
	BH93005YD4	004402458837923	FCC SAR - LTE(HB)(Radiated) #2
	BH93008QD4	004402458837709	SAR/Radiated WLAN - 2.4GHz (Radiated) #2
	BH93001YD4	004402458837642	SAR/Radiated WLAN - 2.4GHz (Radiated) #3
	BH93002FD4	004402458837659	SAR/Radiated WLAN SAR - 5GHz (Radiated) #1
	BH930094D4	004402458837683	SAR/Radiated WLAN SAR - 5GHz (Radiated) #2
	BH93008HD4	004402458837717	SAR/Radiated WLAN SAR - 5GHz (Radiated) #3
	BH93006VD4	004402458837634	SAR/Radiated WLAN SAR - 5GHz (Radiated) #4
	BH93001TD4	004402458837733	SAR/Radiated WLAN SAR - 5GHz (Radiated) #5
Hardware Version	A		
Software Version	0.299		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class: Class 33 - 4 Up, 5 Down	GPRS: 4 Slots: 50%
Does this device support DTM (Dual Transfer Mode)? ☒ Yes ☐ No				
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7) DC-HSDPA (Rel. 8)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 26 FDD Band 29 (Rx Only) TDD Band 41 FDD Band 66	QPSK 16QAM 64QAM Rel. 12 Carrier Aggregation 4CC (1 Uplink and 4 Downlinks). Refer to §6.5.		100% (FDD) 63.3% (TDD) ³ Refer to §6.4
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No				
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		802.11b ¹ : 99.19%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		802.11n (HT40) ¹ : 93.96% 802.11ac (VHT80) ¹ : 88.48%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		GFSK ² : 77.03% EDR, LE: N/A ⁴

Notes:

1. Duty Cycles for Wi-Fi are referenced from the DTS report 12371351-E4 and U-NII report 12371351-E5.
2. Duty Cycle for Bluetooth GFSK mode is referenced from the BT report 12371351-E2.
3. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
4. Measured Duty Cycle is not required due to SAR test exemption.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4 ^{2,4}	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5 ^{2,5}	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12 ²	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13 ²	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			23230/ 782	23230/ 782		
	High				23255/ 784.5		

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 17 ^{2,6}	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High			23800/ 711	23825/ 713.5		
	Band 26 ²	Frequency range: 814 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low		26765/ 821.5	26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7
	Mid		26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5
	High		26965/ 841.5	26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3
	Band 41 ¹	Frequency range: 2496 - 2690 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	39750 / 2506.0					
	Low-Mid	40185 / 2549.5					
	Mid	40620 / 2593.0					
	Mid-High	41055 / 2636.5					
	High	41490 / 2680.0					
	Band 66	Frequency range: 1710 - 1780 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7
	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745
	High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3

General LTE SAR Test and Reporting Considerations (Continued)

LTE transmitter and antenna implementation	Refer to Appendix A.																																																														
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
Power reduction	No																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														

Notes:

1. LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
2. Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
3. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
4. LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.
5. LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.
6. LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
7. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: **Uplink-Downlink Configuration 0** at **63.3% duty cycle** and **Special Subframe 7**.

6.5. LTE Carrier Aggregation

Combination	CA configuration	Bandwidth (MHz)											
		PCC						SCC1					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4
Intra-Band contiguous	12B				√					√	√		
	7B		√								√		
	7C			√				√					
			√					√	√				
	41C	√						√	√	√			
					√			√					
			√					√	√				
		√						√	√	√	√		
	66B				√				√	√	√		
				√						√	√		
			√								√		
	66C				√			√					
				√				√	√				
			√					√	√	√			
		√						√	√	√	√		
Intra-Band non-contiguous	2A-2A	√	√	√	√			√	√	√	√		
	4A-4A	√	√	√	√			√	√	√	√		
	7A-7A	√	√	√	√			√	√	√	√		
	66A-66A	√	√	√	√			√	√	√	√		
Inter-Band non-contiguous	2A-4A	√	√	√	√	√	√	√	√	√	√		
	2A-5A	√	√	√	√					√	√		
	2A-7A	√	√	√	√			√	√	√	√		
	2A-12A	√	√	√	√					√	√	√	
	2A-13A	√	√	√	√					√			
	2A-17A			√	√					√	√		
	2A-29A	√	√	√	√					√	√		
	2A-66A	√	√	√	√	√	√	√	√	√	√		
	4A-5A	√	√	√	√					√	√		
	4A-7A	√	√	√	√			√	√	√	√		
	4A-12A	√	√	√	√	√	√			√	√	√	
	4A-13A	√	√	√	√					√			
	4A-17A			√	√					√	√		
	4A-29A	√	√	√	√					√	√		
	5A-7A			√	√	√	√	√	√	√			
	5A-12A			√	√	√	√			√	√	√	
	5A-29A			√	√	√	√			√	√		
	12A-66A			√	√			√	√	√	√	√	√

Note(s):

For supported channels, please refer to §6.3

Combination	CA configuration	Bandwidth (MHz)																	
		PCC						SCC1						SCC2					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4	20	15	10	5	3	1.4
Inter-Band non-contiguous	2A-2A-4A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	2A-2A-12A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	2A-2A-13A	✓	✓	✓	✓			✓	✓	✓	✓					✓			
	2A-4A-4A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	2A-4A-5A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	2A-4A-7A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	2A-4A-12A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	2A-4A-13A	✓	✓	✓	✓			✓	✓	✓	✓					✓			
	2A-4A-29A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	2A-5A-29A	✓	✓	✓	✓					✓	✓					✓	✓		
	2A-7C	✓	✓	✓	✓					✓				✓					
		✓	✓	✓	✓				✓					✓	✓				
		✓	✓	✓	✓			✓						✓	✓	✓			
	2A-7A-7A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	2A-12A-66A	✓	✓	✓	✓					✓	✓			✓	✓	✓	✓		
	2A-12B	✓	✓	✓	✓						✓					✓	✓		
	2A-66A-66A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	4A-4A-5A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	4A-4A-12A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	4A-4A-13A	✓	✓	✓	✓			✓	✓	✓	✓					✓			
	4A-4A-29A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	4A-5A-29A	✓	✓	✓	✓					✓	✓					✓	✓		
	4A-7A-7A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	4A-7C	✓	✓	✓	✓					✓				✓	✓				
		✓	✓	✓	✓				✓					✓	✓				
		✓	✓	✓	✓			✓						✓	✓	✓			
	4A-12B	✓	✓	✓	✓						✓					✓	✓		
	5A-7A-7A			✓	✓			✓	✓	✓				✓	✓	✓			
	5A-7C			✓	✓					✓				✓					
				✓	✓				✓					✓	✓				
				✓	✓			✓						✓	✓	✓			
	12A-66A-66A			✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		

Note(s):

For supported channels, please refer to §6.3

Combination	CA configuration	Bandwidth (MHz)																	
		PCC						SCC1						SCC2					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4	20	15	10	5	3	1.4
Inter-Band non-contiguous	2A-4A-5A-29A	✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
	2A-4A-7A-7A	✓	✓	✓	✓			✓	✓	✓	✓			✓	✓	✓	✓		
	2A-4A-7C	✓	✓	✓	✓			✓	✓	✓	✓					✓			
		✓	✓	✓	✓			✓	✓	✓	✓					✓	✓		
		✓	✓	✓	✓			✓	✓	✓	✓			✓	✓				

Note(s):

For supported channels, please refer to §6.3

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Main Ant. 1 & 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
WLAN/BT (Chain 0)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	
			Edge 3 (Bottom)	> 25 mm	No	
WLAN (Chain 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4 GHz only)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1
	Product Specific (5 GHz bands only)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	> 25 mm	No	
			Edge 2 (Right)	< 25 mm	Yes	2
			Edge 3 (Bottom)	> 25 mm	No	
			Edge 4 (Left)	> 25 mm	No	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: when Hotspot Mode is not supported, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- The WWAN Sub Antenna (AS-Div) does not support FCC bands.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
5	6/25/2018	1900	Head	1900	40.93	40.00	2.33	1.43	1.40	2.07
				1850	41.09	40.00	2.73	1.40	1.40	0.14
				1980	40.90	40.00	2.25	1.47	1.40	5.00
5	6/25/2018	1900	Body	1900	52.64	53.30	-1.24	1.54	1.52	1.32
				1850	52.77	53.30	-0.99	1.50	1.52	-1.05
				1920	52.61	53.30	-1.29	1.55	1.52	1.91
5	6/26/2018	1750	Body	1750	54.19	53.44	1.40	1.48	1.49	-0.21
				1710	54.22	53.54	1.26	1.45	1.46	-0.58
				1755	54.15	53.43	1.35	1.49	1.49	0.19
5	6/26/2018	1750	Head	1750	41.38	40.08	3.23	1.38	1.37	0.73
				1710	41.41	40.15	3.15	1.35	1.35	0.56
				1755	41.38	40.08	3.25	1.39	1.37	0.96
5	6/27/2018	2450	Head	2450	38.54	39.20	-1.68	1.79	1.80	-0.78
				2400	38.62	39.30	-1.72	1.75	1.75	0.13
				2480	38.51	39.16	-1.67	1.81	1.83	-1.22
5	6/27/2018	2450	Body	2450	51.95	52.70	-1.42	2.00	1.95	2.77
				2400	52.05	52.77	-1.37	1.96	1.90	3.32
				2480	51.92	52.66	-1.41	2.06	1.99	3.15
5	7/10/2018	2450	Head	2450	37.73	39.20	-3.75	1.79	1.80	-0.39
				2400	37.77	39.30	-3.89	1.76	1.75	0.42
				2480	37.69	39.16	-3.76	1.82	1.83	-0.95
6	6/29/2018	5250	Body	5250	47.00	48.95	-3.99	5.20	5.35	-2.82
				5150	47.09	49.09	-4.07	5.08	5.24	-2.95
				5350	46.79	48.82	-4.15	5.36	5.47	-2.08
6	6/29/2018	5600	Body	5600	46.42	48.48	-4.24	5.66	5.76	-1.72
				5500	46.60	48.61	-4.14	5.54	5.64	-1.89
				5725	46.13	48.31	-4.51	5.83	5.91	-1.33
6	7/2/2018	2600	Head	2600	38.82	39.01	-0.49	1.93	1.96	-1.84
				2495	39.00	39.14	-0.37	1.85	1.85	0.24
				2690	38.72	38.90	-0.46	1.98	2.06	-3.86
6	7/2/2018	2600	Body	2600	51.52	52.51	-1.89	2.15	2.16	-0.45
				2495	51.72	52.64	-1.75	2.07	2.01	2.72
				2690	51.47	52.40	-1.77	2.22	2.29	-3.12
6	7/23/2018	2600	Body	2600	50.30	52.51	-4.21	2.14	2.16	-1.01
				2495	50.50	52.64	-4.07	2.06	2.01	2.07
				2690	50.18	52.40	-4.23	2.23	2.29	-2.68
7	6/25/2018	835	Head	835	42.99	41.50	3.59	0.92	0.90	2.07
				805	42.93	41.68	3.00	0.91	0.90	1.49
				915	42.71	41.50	2.91	0.95	0.98	-2.89
7	6/25/2018	835	Body	835	54.68	55.20	-0.94	0.97	0.97	-0.39
				805	54.70	55.33	-1.15	0.96	0.97	-1.24
				905	54.53	55.00	-0.85	1.00	1.05	-4.80
7	6/27/2018	750	Head	750	42.58	41.96	1.47	0.89	0.89	-0.60
				695	42.60	42.24	0.84	0.87	0.89	-2.20
				790	42.51	41.76	1.80	0.90	0.90	0.26

Dielectric Property Measurements Results (continued):

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
7	6/27/2018	750	Body	750	54.77	55.55	-1.40	0.94	0.96	-2.54
				695	54.74	55.76	-1.83	0.92	0.96	-4.29
				790	54.68	55.39	-1.29	0.95	0.97	-1.38
7	6/29/2018	835	Body	835	55.25	55.20	0.09	0.99	0.97	1.87
				805	55.22	55.33	-0.21	0.98	0.97	1.59
				905	55.07	55.00	0.13	1.03	1.05	-2.52
7	7/5/2018	5250	Head	5250	35.17	35.93	-2.12	4.62	4.70	-1.73
				5150	35.28	36.05	-2.13	4.44	4.60	-3.45
				5350	34.98	35.82	-2.34	4.72	4.80	-1.80
7	7/5/2018	5600	Head	5600	34.55	35.53	-2.77	5.01	5.06	-0.95
				5500	34.78	35.65	-2.43	4.89	4.96	-1.47
				5725	34.16	35.39	-3.48	5.16	5.19	-0.54
7	7/10/2018	5250	Head	5250	35.34	35.93	-1.65	4.50	4.70	-4.28
				5150	35.47	36.05	-1.60	4.41	4.60	-4.19
				5350	35.14	35.82	-1.90	4.62	4.80	-3.88
8	7/3/2018	5250	Head	5250	35.25	35.93	-1.90	4.50	4.70	-4.28
				5150	35.38	36.05	-1.85	4.37	4.60	-4.91
				5350	34.98	35.82	-2.34	4.57	4.80	-4.84
8	7/3/2018	5600	Head	5600	34.59	35.53	-2.66	4.87	5.06	-3.70
				5500	34.82	35.65	-2.32	4.75	4.96	-4.29
				5725	34.36	35.39	-2.91	4.98	5.19	-4.07
8	7/3/2018	5750	Head	5750	34.38	35.36	-2.78	5.03	5.21	-3.62
				5700	34.53	35.42	-2.51	4.97	5.16	-3.77
				5850	34.25	35.30	-2.97	5.12	5.27	-2.85
8	7/3/2018	5250	Body	5250	47.00	48.95	-3.99	5.41	5.35	0.97
				5150	47.13	49.09	-3.99	5.23	5.24	-0.05
				5350	46.74	48.82	-4.25	5.50	5.47	0.57
8	7/3/2018	5600	Body	5600	46.27	48.48	-4.55	5.88	5.76	1.98
				5500	46.34	48.61	-4.68	5.81	5.64	2.99
				5725	45.99	48.31	-4.80	6.01	5.91	1.80
8	7/3/2018	5750	Body	5750	46.03	48.27	-4.65	6.07	5.94	2.31
				5700	46.19	48.34	-4.45	6.03	5.88	2.56
				5850	45.85	48.20	-4.88	6.21	6.00	3.48

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
5	6/25/2018	Head	D1900V2 SN:5d043	11/22/2018	4.020	40.20	42.99	-6.49	2.090	20.90	22.17	-5.73	1,2
5	6/25/2018	Body	D1900V2 SN:5d043	11/22/2018	4.120	41.20	41.00	0.49	2.160	21.60	20.90	3.35	
5	6/26/2018	Body	D1750V2 SN:1050	4/10/2019	3.500	35.00	37.18	-5.86	1.880	18.80	19.74	-4.76	3,4
5	6/26/2018	Head	D1750V2 SN:1050	4/10/2019	3.480	34.80	36.50	-4.66	1.850	18.50	19.42	-4.74	
5	6/27/2018	Head	D2450V2 SN:899	3/16/2019	4.830	48.30	51.75	-6.67	2.260	22.60	24.20	-6.61	5,6
5	6/27/2018	Body	D2450V2 SN:899	3/16/2019	5.080	50.80	50.55	0.49	2.370	23.70	23.20	2.16	
5	7/10/2018	Head	D2450V2 SN:899	3/16/2019	4.930	49.30	51.75	-4.73	2.300	23.00	24.20	-4.96	
6	6/29/2018	Body	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.760	77.60	73.60	5.43	2.210	22.10	20.50	7.80	7,8
6	6/29/2018	Body	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.240	82.40	77.70	6.05	2.260	22.60	21.70	4.15	9,10
6	7/2/2018	Head	D2600V2 SN:1036	3/16/2019	5.820	58.20	54.54	6.71	2.610	26.10	24.56	6.27	11,12
6	7/2/2018	Body	D2600V2 SN:1036	3/16/2019	5.390	53.90	56.13	-3.97	2.610	26.10	25.04	4.23	
6	7/23/2018	Body	D2600V2 SN:1036	3/16/2019	5.300	53.00	56.13	-5.58	2.350	23.50	25.04	-6.15	
7	6/25/2018	Head	D835V2 SN:4d002	11/21/2018	0.975	9.75	10.27	-5.06	0.639	6.39	6.76	-5.47	
7	6/25/2018	Body	D835V2 SN:4d002	11/21/2018	0.948	9.48	10.23	-7.33	0.627	6.27	6.80	-7.79	13,14
7	6/27/2018	Head	D750V3 SN:1071	11/21/2018	0.807	8.07	8.59	-6.05	0.533	5.33	5.73	-6.98	15,16
7	6/27/2018	Body	D750V3 SN:1071	11/21/2018	0.841	8.41	8.52	-1.29	0.561	5.61	5.69	-1.41	
7	6/29/2018	Body	D835V2 SN:4d002	11/21/2018	0.985	9.85	10.23	-3.71	0.652	6.52	6.80	-4.12	
7	7/5/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	8.050	80.50	80.60	-0.12	2.320	23.20	23.20	0.00	
7	7/5/2018	Head	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.590	85.90	84.50	1.66	2.430	24.30	24.00	1.25	17,18
7	7/10/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	8.010	80.10	80.60	-0.62	2.290	22.90	23.20	-1.29	19,20
8	7/3/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.260	72.60	80.60	-9.93	2.090	20.90	23.20	-9.91	21,22
8	7/3/2018	Head	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.040	80.40	84.50	-4.85	2.280	22.80	24.00	-5.00	23,24
8	7/3/2018	Head	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.170	71.70	78.40	-8.55	2.030	20.30	22.20	-8.56	25,26
8	7/3/2018	Body	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.110	71.10	73.60	-3.40	2.020	20.20	20.50	-1.46	
8	7/3/2018	Body	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	7.600	76.00	77.70	-2.19	2.120	21.20	21.70	-2.30	
8	7/3/2018	Body	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.190	71.90	73.90	-2.71	2.020	20.20	20.60	-1.94	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM/GPRS	CS1	1	128	824.2	31.46	22.43	32.20	23.17
			190	836.6	31.45	22.42		
			251	848.8	31.64	22.61		
GPRS (GMSK)		2	128	824.2	29.53	23.51	30.20	24.18
			190	836.6	29.50	23.48		
			251	848.8	29.66	23.64		
		3	128	824.2	27.52	23.26	28.20	23.94
			190	836.6	27.49	23.23		
			251	848.8	27.64	23.38		
		4	128	824.2	26.55	23.54	27.20	24.19
			190	836.6	26.52	23.51		
			251	848.8	26.60	23.59		
GSM/EDGE	MCS5	1	128	824.2	26.73	17.70	28.00	18.97
			190	836.6	26.71	17.68		
			251	848.8	26.68	17.65		
EDGE (8PSK)		2	128	824.2	24.77	18.75	26.50	20.48
			190	836.6	24.77	18.75		
			251	848.8	24.75	18.73		
		3	128	824.2	23.66	19.40	24.50	20.24
			190	836.6	23.73	19.47		
			251	848.8	23.70	19.44		
		4	128	824.2	21.64	18.63	23.50	20.49
			190	836.6	21.71	18.70		
			251	848.8	21.77	18.76		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is ≤ 1.2 W/kg.

GSM850 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS (GMSK)	CS1	1	128	824.2	31.62		22.59		32.20		23.17	
			190	836.6	31.61		22.58					
			251	848.8	31.57		22.54					
		2	128	824.2	29.30	29.47	23.28	23.45	30.20	30.20	24.2	24.2
			190	836.6	29.60	29.78	23.58	23.76				
			251	848.8	29.54	29.77	23.52	23.75				
		3	128	824.2	27.40	27.50	23.14	23.24	28.20	28.20	23.94	23.94
			190	836.6	27.40	27.60	23.14	23.34				
			251	848.8	27.50	27.70	23.24	23.44				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	31.62		22.59		32.20		23.17	
			190	836.6	31.61		22.58					
			251	848.8	31.57		22.54					
		2	128	824.2	29.40	24.70	23.38	18.68	30.20	26.50	24.2	20.48
			190	836.6	29.40	24.60	23.38	18.58				
			251	848.8	29.60	24.70	23.58	18.68				
		3	128	824.2	27.45	23.80	23.19	19.54	28.20	24.50	23.94	20.24
			190	836.6	27.40	23.66	23.14	19.40				
			251	848.8	27.55	23.70	23.29	19.44				

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM/GPRS	CS1	1	512	1850.2	28.96	19.93	29.70	20.67
			661	1880.0	28.98	19.95		
			810	1909.8	28.95	19.92		
GPRS (GMSK)		2	512	1850.2	26.96	20.94	27.70	21.68
			661	1880.0	26.90	20.88		
			810	1909.8	26.96	20.94		
		3	512	1850.2	24.97	20.71	25.70	21.44
			661	1880.0	24.90	20.64		
			810	1909.8	24.91	20.65		
		4	512	1850.2	24.08	21.07	24.70	21.69
			661	1880.0	24.00	20.99		
			810	1909.8	23.99	20.98		
GSM/EDGE	MCS5	1	512	1850.2	25.74	16.71	27.00	17.97
			661	1880.0	25.67	16.64		
			810	1909.8	25.61	16.58		
EDGE (8PSK)		2	512	1850.2	23.70	17.68	25.50	19.48
			661	1880.0	23.64	17.62		
			810	1909.8	23.55	17.53		
		3	512	1850.2	22.55	18.29	23.50	19.24
			661	1880.0	22.46	18.20		
			810	1909.8	22.46	18.20		
		4	512	1850.2	21.56	18.55	22.50	19.49
			661	1880.0	21.65	18.64		
			810	1909.8	21.53	18.52		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS (GMSK) is ≤ 1.2 W/kg.

GSM1900 DTM Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS (GMSK)	CS1	1	512	1850.2	28.96		19.93		29.70		20.67	
			661	1880.0	28.94		19.91					
			810	1909.8	28.91		19.88					
		2	512	1850.2	26.90	27.00	20.88	20.98	27.70	27.70	21.7	21.7
			661	1880.0	27.00	27.10	20.98	21.08				
			810	1909.8	26.90	27.10	20.88	21.08				
		3	512	1850.2	25.00	25.10	20.74	20.84	25.70	25.70	21.44	21.44
			661	1880.0	25.00	25.20	20.74	20.94				
			810	1909.8	25.00	25.10	20.74	20.84				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	28.96		19.93		29.70		20.67	
			661	1880.0	28.94		19.91					
			810	1909.8	28.91		19.88					
		2	512	1850.2	26.90	24.00	20.88	17.98	27.70	25.50	21.7	19.48
			661	1880.0	26.90	23.70	20.88	17.68				
			810	1909.8	27.00	23.80	20.98	17.78				
		3	512	1850.2	24.97	22.77	20.71	18.51	25.70	23.50	21.44	19.24
			661	1880.0	25.00	22.50	20.74	18.24				
			810	1909.8	24.90	22.70	20.64	18.44				

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) + GPRS (GMSK) with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for GSM(Voice) + EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than that of GSM(Voice) + GPRS (GMSK) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GPRS (GMSK) is ≤ 1.2 W/kg.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings is illustrated below:

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1

A summary of these settings is illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108. A summary of these settings is illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

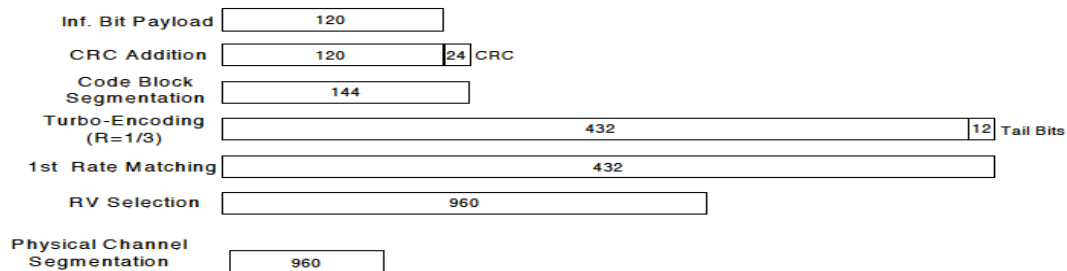**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings is illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+ Release 7

Since 16QAM is not used for uplink, RF conducted power measurements are not required for HSPA+.

W-CDMA Band II Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	20.33	N/A	20.70
		9400	1880.0	20.44		
		9538	1907.6	20.40		
HSDPA	Subtest 1	9262	1852.4	19.26	0	20.00
		9400	1880.0	19.41		
		9538	1907.6	19.34		
	Subtest 2	9262	1852.4	19.28	0	20.00
		9400	1880.0	19.43		
		9538	1907.6	19.39		
	Subtest 3	9262	1852.4	18.78	0.5	19.50
		9400	1880.0	18.90		
		9538	1907.6	18.85		
	Subtest 4	9262	1852.4	18.81	0.5	19.50
		9400	1880.0	18.94		
		9538	1907.6	18.86		
HSUPA	Subtest 1	9262	1852.4	19.27	0	20.00
		9400	1880.0	19.43		
		9538	1907.6	19.35		
	Subtest 2	9262	1852.4	17.83	2	18.00
		9400	1880.0	17.42		
		9538	1907.6	17.36		
	Subtest 3	9262	1852.4	18.30	1	19.00
		9400	1880.0	18.39		
		9538	1907.6	18.36		
	Subtest 4	9262	1852.4	17.26	2	18.00
		9400	1880.0	17.41		
		9538	1907.6	17.34		
	Subtest 5	9262	1852.4	19.32	0	20.00
		9400	1880.0	19.44		
		9538	1907.6	19.37		
DC-HSDPA	Subtest 1	9262	1852.4	19.26	0	20.00
		9400	1880.0	19.41		
		9538	1907.6	19.34		
	Subtest 2	9262	1852.4	19.28	0	20.00
		9400	1880.0	19.43		
		9538	1907.6	19.39		
	Subtest 3	9262	1852.4	18.78	0.5	19.50
		9400	1880.0	18.90		
		9538	1907.6	18.85		
	Subtest 4	9262	1852.4	18.81	0.5	19.50
		9400	1880.0	18.94		
		9538	1907.6	18.86		

W-CDMA Band IV Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	20.83	N/A	21.20
		1413	1732.6	20.85		
		1513	1752.6	20.93		
HSDPA	Subtest 1	1312	1712.4	19.79	0	20.50
		1413	1732.6	19.79		
		1513	1752.6	19.87		
	Subtest 2	1312	1712.4	19.80	0	20.50
		1413	1732.6	19.81		
		1513	1752.6	19.89		
	Subtest 3	1312	1712.4	19.32	0.5	20.00
		1413	1732.6	19.36		
		1513	1752.6	19.37		
	Subtest 4	1312	1712.4	19.30	0.5	20.00
		1413	1732.6	19.30		
		1513	1752.6	19.35		
HSUPA	Subtest 1	1312	1712.4	19.76	0	20.50
		1413	1732.6	19.77		
		1513	1752.6	19.83		
	Subtest 2	1312	1712.4	17.74	2	18.50
		1413	1732.6	17.80		
		1513	1752.6	17.86		
	Subtest 3	1312	1712.4	18.76	1	19.50
		1413	1732.6	18.79		
		1513	1752.6	18.86		
	Subtest 4	1312	1712.4	17.77	2	18.50
		1413	1732.6	17.79		
		1513	1752.6	17.86		
	Subtest 5	1312	1712.4	19.75	0	20.50
		1413	1732.6	19.79		
		1513	1752.6	19.86		
DC-HSDPA	Subtest 1	1312	1712.4	19.79	0	20.50
		1413	1732.6	19.79		
		1513	1752.6	19.87		
	Subtest 2	1312	1712.4	19.80	0	20.50
		1413	1732.6	19.81		
		1513	1752.6	19.89		
	Subtest 3	1312	1712.4	19.32	0.5	20.00
		1413	1732.6	19.36		
		1513	1752.6	19.37		
	Subtest 4	1312	1712.4	19.30	0.5	20.00
		1413	1732.6	19.30		
		1513	1752.6	19.35		

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.30	N/A	23.70
		4183	836.6	23.20		
		4233	846.6	23.17		
HSDPA	Subtest 1	4132	826.4	22.30	0	23.00
		4183	836.6	22.22		
		4233	846.6	22.60		
	Subtest 2	4132	826.4	22.28	0	23.00
		4183	836.6	22.22		
		4233	846.6	22.18		
	Subtest 3	4132	826.4	21.77	0.5	22.50
		4183	836.6	21.69		
		4233	846.6	21.66		
	Subtest 4	4132	826.4	21.77	0.5	22.50
		4183	836.6	21.72		
		4233	846.6	21.66		
HSUPA	Subtest 1	4132	826.4	22.25	0	23.00
		4183	836.6	22.21		
		4233	846.6	22.18		
	Subtest 2	4132	826.4	20.26	2	21.00
		4183	836.6	20.22		
		4233	846.6	20.17		
	Subtest 3	4132	826.4	21.26	1	22.00
		4183	836.6	21.24		
		4233	846.6	21.20		
	Subtest 4	4132	826.4	20.27	2	21.00
		4183	836.6	20.21		
		4233	846.6	20.15		
	Subtest 5	4132	826.4	22.25	0	23.00
		4183	836.6	22.22		
		4233	846.6	22.19		
DC-HSDPA	Subtest 1	4132	826.4	22.30	0	23.00
		4183	836.6	22.22		
		4233	846.6	22.60		
	Subtest 2	4132	826.4	22.28	0	23.00
		4183	836.6	22.22		
		4233	846.6	22.18		
	Subtest 3	4132	826.4	21.77	0.5	22.50
		4183	836.6	21.69		
		4233	846.6	21.66		
	Subtest 4	4132	826.4	21.77	0.5	22.50
		4183	836.6	21.72		
		4233	846.6	21.66		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>8	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
			10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10	6.6.2.2.1	20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.6.2.2.1	23	5, 10, 15, 20	Table 6.2.4-15	
NS_21	6.6.2.2.1	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18700	18900	19100	MPR	Tune-up Limit
				1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	20.08	20.25	20.30	0	20.5
		1	49	19.97	20.15	20.13	0	20.5
		1	99	20.23	20.03	20.23	0	20.5
		50	0	20.18	20.24	20.28	0	20.5
		50	24	20.12	20.20	20.23	0	20.5
		50	50	20.20	20.18	20.28	0	20.5
	16QAM	100	0	20.13	20.23	20.34	0	20.5
		1	0	19.90	20.45	20.13	0	20.5
		1	49	19.80	20.28	19.92	0	20.5
		1	99	20.07	20.20	20.03	0	20.5
		50	0	19.78	19.84	19.82	0	20.5
		50	24	19.72	19.77	19.76	0	20.5
	64QAM	50	50	19.81	19.73	19.85	0	20.5
		100	0	19.72	19.77	19.89	0	20.5
		1	0	20.27	20.14	20.09	0	20.5
		1	49	20.12	20.04	19.89	0	20.5
		1	99	20.42	19.91	20.00	0	20.5
		50	0	19.75	19.87	19.84	0	20.5
15 MHz	QPSK	50	24	19.74	19.83	19.79	0	20.5
		50	50	19.81	19.79	19.88	0	20.5
		100	0	19.69	19.78	19.87	0	20.5
	16QAM	1	0	19.98	20.32	20.40	0	20.5
		1	37	19.92	20.15	20.26	0	20.5
		1	74	19.92	20.08	20.33	0	20.5
		36	0	20.00	20.16	20.30	0	20.5
		36	20	19.96	20.16	20.26	0	20.5
		36	39	19.94	20.13	20.31	0	20.5
	64QAM	75	0	19.98	20.14	20.35	0	20.5
		1	0	19.41	20.22	20.30	0	20.5
		1	37	19.40	19.98	20.14	0	20.5
		1	74	19.44	19.99	20.22	0	20.5
		36	0	19.59	19.72	19.95	0	20.5
		36	20	19.57	19.71	19.90	0	20.5
10 MHz	QPSK	36	39	19.54	19.68	19.93	0	20.5
		75	0	19.58	19.72	19.98	0	20.5
		1	0	20.18	19.99	20.17	0	20.5
		1	37	20.08	19.79	19.98	0	20.5
		1	74	20.16	19.75	20.11	0	20.5
		36	0	19.65	19.87	19.93	0	20.5
	16QAM	36	20	19.63	19.86	19.91	0	20.5
		36	39	19.59	19.85	19.97	0	20.5
		75	0	19.66	19.80	19.98	0	20.5
		1	0	20.41	20.11	20.27	0	20.5
		1	25	20.46	20.08	20.17	0	20.5
		1	49	20.33	20.03	20.25	0	20.5
	64QAM	25	0	20.44	20.14	20.27	0	20.5
		25	12	20.48	20.15	20.37	0	20.5
		25	25	20.43	20.11	20.33	0	20.5
		50	0	20.46	20.14	20.33	0	20.5
		1	0	20.30	19.61	19.82	0	20.5
		1	25	20.31	19.52	19.75	0	20.5
10 MHz	QPSK	1	49	20.22	19.45	19.82	0	20.5
		25	0	20.09	19.71	19.90	0	20.5
		25	12	20.09	19.72	20.00	0	20.5
		25	25	20.02	19.68	19.95	0	20.5
		50	0	20.04	19.69	19.91	0	20.5
		1	0	20.12	20.03	19.93	0	20.5
	16QAM	1	25	20.18	19.97	19.82	0	20.5
		1	49	20.06	19.84	19.91	0	20.5
		25	0	20.17	19.76	19.79	0	20.5
		25	12	20.18	19.80	19.90	0	20.5
		25	25	20.13	19.73	19.87	0	20.5
		50	0	20.14	19.74	19.83	0	20.5

LTE Band 2 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18625	18900	19175	MPR	Tune-up Limit
				1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	20.35	20.20	20.31	0	20.5
		1	12	20.34	20.21	20.34	0	20.5
		1	24	20.43	20.15	20.37	0	20.5
		12	0	20.38	20.09	20.33	0	20.5
		12	7	20.42	20.12	20.33	0	20.5
		12	13	20.45	20.12	20.33	0	20.5
		25	0	20.50	20.14	20.33	0	20.5
		25	0	20.50	20.14	20.33	0	20.5
	16QAM	1	0	20.46	19.77	19.91	0	20.5
		1	12	20.41	19.78	19.89	0	20.5
		1	24	20.48	19.79	19.95	0	20.5
		12	0	20.08	19.73	19.94	0	20.5
		12	7	20.08	19.77	19.93	0	20.5
		12	13	20.17	19.73	19.93	0	20.5
		25	0	20.09	19.67	19.83	0	20.5
		25	0	20.09	19.67	19.83	0	20.5
	64QAM	1	0	20.27	19.62	19.95	0	20.5
		1	12	20.25	19.60	20.00	0	20.5
		1	24	20.32	19.61	20.05	0	20.5
		12	0	19.94	19.74	19.85	0	20.5
		12	7	19.95	19.76	19.87	0	20.5
		12	13	19.99	19.74	19.87	0	20.5
		25	0	20.02	19.69	19.82	0	20.5
		25	0	20.02	19.69	19.82	0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18615	18900	19185	MPR	Tune-up Limit
				1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	20.35	20.09	20.22	0	20.5
		1	8	20.47	20.18	20.32	0	20.5
		1	14	20.33	20.05	20.22	0	20.5
		8	0	20.40	20.13	20.29	0	20.5
		8	4	20.40	20.13	20.32	0	20.5
		8	7	20.37	20.13	20.34	0	20.5
		15	0	20.38	20.11	20.30	0	20.5
		15	0	20.38	20.11	20.30	0	20.5
	16QAM	1	0	20.29	19.50	19.83	0	20.5
		1	8	20.38	19.61	19.91	0	20.5
		1	14	20.24	19.51	19.82	0	20.5
		8	0	20.03	19.80	19.88	0	20.5
		8	4	20.03	19.80	19.93	0	20.5
		8	7	20.05	19.79	19.92	0	20.5
		15	0	19.99	19.69	19.80	0	20.5
		15	0	19.99	19.69	19.80	0	20.5
	64QAM	1	0	20.22	19.89	19.83	0	20.5
		1	8	20.32	19.94	19.93	0	20.5
		1	14	20.20	19.83	19.83	0	20.5
		8	0	20.05	19.69	19.82	0	20.5
		8	4	20.04	19.70	19.86	0	20.5
		8	7	20.03	19.69	19.88	0	20.5
		15	0	19.92	19.69	19.83	0	20.5
		15	0	19.92	19.69	19.83	0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18607	18900	19193	MPR	Tune-up Limit
				1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	20.13	19.99	20.22	0	20.5
		1	3	20.18	20.06	20.25	0	20.5
		1	5	20.11	19.98	20.20	0	20.5
		3	0	20.11	19.99	20.10	0	20.5
		3	1	20.17	20.04	20.17	0	20.5
		3	3	20.17	20.05	20.16	0	20.5
		6	0	20.18	20.01	20.20	0	20.5
		6	0	20.18	20.01	20.20	0	20.5
	16QAM	1	0	19.74	19.88	19.79	0	20.5
		1	3	19.76	19.91	19.84	0	20.5
		1	5	19.74	19.90	19.78	0	20.5
		3	0	19.87	19.71	19.74	0	20.5
		3	1	19.92	19.75	19.79	0	20.5
		3	3	19.93	19.75	19.78	0	20.5
		6	0	19.95	19.50	19.88	0	20.5
		6	0	19.95	19.50	19.88	0	20.5
	64QAM	1	0	19.95	19.71	20.03	0	20.5
		1	3	20.01	19.78	20.14	0	20.5
		1	5	19.97	19.68	20.01	0	20.5
		3	0	19.72	19.73	19.98	0	20.5
		3	1	19.77	19.77	20.04	0	20.5
		3	3	19.76	19.78	20.04	0	20.5
		6	0	19.91	19.94	19.70	0	20.5
		6	0	19.91	19.94	19.70	0	20.5

LTE Band 4 Measured Results

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5 Measured Results

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 7 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20850	21100	21350	MPR	Tune-up Limit
				2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	20.06	20.07	20.07	0	20.5
		1	49	20.02	20.00	19.98	0	20.5
		1	99	19.96	19.90	20.03	0	20.5
		50	0	20.17	20.16	20.08	0	20.5
		50	24	20.12	20.12	20.17	0	20.5
		50	50	20.07	20.07	20.13	0	20.5
		100	0	20.08	20.05	20.16	0	20.5
	16QAM	1	0	20.10	20.18	20.08	0	20.5
		1	49	19.95	20.08	19.90	0	20.5
		1	99	19.90	19.96	20.02	0	20.5
		50	0	19.76	19.73	19.66	0	20.5
		50	24	19.72	19.72	19.80	0	20.5
		50	50	19.66	19.64	19.71	0	20.5
		100	0	19.66	19.70	19.79	0	20.5
	64QAM	1	0	20.33	19.97	20.08	0	20.5
		1	49	20.19	19.92	19.77	0	20.5
		1	99	20.19	19.82	19.82	0	20.5
		50	0	19.77	19.79	19.76	0	20.5
		50	24	19.75	19.75	19.82	0	20.5
		50	50	19.67	19.71	19.76	0	20.5
		100	0	19.66	19.70	19.78	0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20825	21100	21375	MPR	Tune-up Limit
				2507.5 MHz	2535 MHz	2562.5 MHz		
15 MHz	QPSK	1	0	20.10	20.02	20.18	0	20.5
		1	37	20.10	20.04	20.06	0	20.5
		1	74	20.06	19.89	20.08	0	20.5
		36	0	20.15	20.11	20.08	0	20.5
		36	20	20.10	20.08	20.12	0	20.5
		36	39	20.07	20.03	20.10	0	20.5
		75	0	20.09	20.02	20.16	0	20.5
	16QAM	1	0	20.01	19.54	20.12	0	20.5
		1	37	20.02	19.46	19.97	0	20.5
		1	74	19.89	19.35	20.04	0	20.5
		36	0	19.79	19.65	19.62	0	20.5
		36	20	19.75	19.66	19.76	0	20.5
		36	39	19.69	19.61	19.69	0	20.5
		75	0	19.71	19.63	19.75	0	20.5
	64QAM	1	0	19.81	19.93	20.24	0	20.5
		1	37	19.78	19.92	20.12	0	20.5
		1	74	19.74	19.80	20.18	0	20.5
		36	0	19.83	19.74	19.66	0	20.5
		36	20	19.79	19.71	19.75	0	20.5
		36	39	19.74	19.66	19.73	0	20.5
		75	0	19.72	19.68	19.77	0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20800	21100	21400	MPR	Tune-up Limit
				2505 MHz	2535 MHz	2565 MHz		
10 MHz	QPSK	1	0	20.07	19.97	20.01	0	20.5
		1	25	20.10	20.01	20.07	0	20.5
		1	49	20.10	19.92	20.06	0	20.5
		25	0	20.14	20.12	20.14	0	20.5
		25	12	20.11	20.08	20.14	0	20.5
		25	25	20.09	20.03	20.13	0	20.5
		50	0	20.12	20.07	20.14	0	20.5
	16QAM	1	0	19.97	19.49	19.67	0	20.5
		1	25	19.99	19.49	19.72	0	20.5
		1	49	19.98	19.35	19.67	0	20.5
		25	0	19.73	19.66	19.85	0	20.5
		25	12	19.75	19.65	19.86	0	20.5
		25	25	19.69	19.61	19.80	0	20.5
		50	0	19.71	19.61	19.78	0	20.5
	64QAM	1	0	19.77	19.85	19.81	0	20.5
		1	25	19.79	19.92	19.84	0	20.5
		1	49	19.81	19.80	19.79	0	20.5
		25	0	19.81	19.76	19.85	0	20.5
		25	12	19.81	19.71	19.81	0	20.5
		25	25	19.74	19.66	19.77	0	20.5
		50	0	19.78	19.67	19.77	0	20.5

LTE Band 7 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20775	21100	21425	MPR	Tune-up Limit
				2502.5 MHz	2535 MHz	2567.5 MHz		
5 MHz	QPSK	1	0	20.19	19.94	20.22	0	20.5
		1	12	20.26	20.01	20.18	0	20.5
		1	24	20.25	20.02	20.16	0	20.5
		12	0	20.24	20.08	20.10	0	20.5
		12	7	20.25	20.05	20.11	0	20.5
		12	13	20.23	20.05	20.11	0	20.5
		25	0	20.21	20.05	20.14	0	20.5
	16QAM	1	0	19.81	20.01	19.86	0	20.5
		1	12	19.88	20.07	19.84	0	20.5
		1	24	19.84	20.07	19.84	0	20.5
		12	0	19.84	19.75	19.78	0	20.5
		12	7	19.85	19.78	19.79	0	20.5
		12	13	19.81	19.75	19.78	0	20.5
		25	0	19.75	19.67	19.75	0	20.5
	64QAM	1	0	19.99	19.79	19.73	0	20.5
		1	12	20.00	19.92	19.61	0	20.5
		1	24	19.99	19.85	19.58	0	20.5
		12	0	19.88	19.57	19.79	0	20.5
		12	7	19.91	19.61	19.78	0	20.5
		12	13	19.89	19.57	19.78	0	20.5
		25	0	19.83	19.59	19.72	0	20.5

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0		24.31		0	25
		1	25		24.37		0	25
		1	49		24.39		0	25
		25	0		23.43		1	24
		25	12		23.44		1	24
		25	25		23.36		1	24
		50	0		23.39		1	24
		50	12		23.39		1	24
	16QAM	1	0		22.86		1	24
		1	25		22.87		1	24
		1	49		22.87		1	24
		25	0		22.05		2	23
		25	12		22.02		2	23
		25	25		22.01		2	23
		50	0		21.99		2	23
		50	12		21.99		2	23
	64QAM	1	0		22.25		2	23
		1	25		22.29		2	23
		1	49		22.33		2	23
		25	0		21.13		3	22
		25	12		21.12		3	22
		25	25		21.07		3	22
		50	0		21.07		3	22
		50	12		21.07		3	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0		24.42	24.44	0	25
		1	12		24.36	24.46	0	25
		1	24		24.35	24.47	0	25
		12	0		23.44	23.38	1	24
		12	7		23.40	23.38	1	24
		12	13		23.39	23.36	1	24
		25	0		23.45	23.41	1	24
		25	12		23.45	23.41	1	24
	16QAM	1	0		23.53	23.17	1	24
		1	12		23.47	23.09	1	24
		1	24		23.43	23.09	1	24
		12	0		22.15	22.08	2	23
		12	7		22.12	22.09	2	23
		12	13		22.13	22.07	2	23
		25	0		22.06	22.03	2	23
		25	12		22.06	22.03	2	23
	64QAM	1	0		22.35	21.97	2	23
		1	12		22.29	21.92	2	23
		1	24		22.24	21.91	2	23
		12	0		21.02	21.09	3	22
		12	7		21.00	21.11	3	22
		12	13		20.99	21.09	3	22
		25	0		21.00	21.04	3	22
		25	12		21.00	21.04	3	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0		24.59	24.47	0	25
		1	8		24.63	24.46	0	25
		1	14		24.53	24.40	0	25
		8	0		23.51	23.36	1	24
		8	4		23.52	23.42	1	24
		8	7		23.52	23.41	1	24
		15	0		23.51	23.37	1	24
		15	8		23.51	23.37	1	24
	16QAM	1	0		23.47	22.93	1	24
		1	8		23.52	22.95	1	24
		1	14		23.43	22.81	1	24
		8	0		22.17	22.08	2	23
		8	4		22.19	22.09	2	23
		8	7		22.19	22.10	2	23
		15	0		22.16	22.02	2	23
		15	8		22.16	22.02	2	23
	64QAM	1	0		22.15	22.32	2	23
		1	8		22.24	22.39	2	23
		1	14		22.13	22.27	2	23
		8	0		21.10	21.09	3	22
		8	4		21.12	21.14	3	22
		8	7		21.11	21.13	3	22
		15	0		21.10	21.05	3	22
		15	8		21.10	21.05	3	22

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.38	24.41	24.25	0	25
		1	3	24.41	24.42	24.33	0	25
		1	5	24.33	24.37	24.24	0	25
		3	0	24.40	24.31	24.27	0	25
		3	1	24.41	24.36	24.34	0	25
		3	3	24.43	24.38	24.32	0	25
	16QAM	6	0	23.31	23.29	23.33	1	24
		1	0	23.30	23.00	22.87	1	24
		1	3	23.33	23.06	22.93	1	24
		1	5	23.28	22.98	22.88	1	24
		3	0	23.15	22.98	23.06	1	24
		3	1	23.19	23.02	23.11	1	24
	64QAM	3	3	23.20	23.02	23.11	1	24
		6	0	21.86	22.03	22.07	2	23
		1	0	22.29	22.15	22.08	2	23
		1	3	22.40	22.20	22.16	2	23
		1	5	22.26	22.18	22.06	2	23
		3	0	22.24	21.95	22.12	2	23
		3	1	22.31	22.02	22.20	2	23
		3	3	22.30	22.02	22.19	2	23
		6	0	20.89	21.07	21.27	3	22

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				23230 782 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	24.52		0	25
		1	25	24.45		0	25
		1	49	24.51		0	25
		25	0	23.50		1	24
		25	12	23.64		1	24
		25	25	23.57		1	24
		50	0	23.59		1	24
	16QAM	1	0	23.39		1	24
		1	25	23.37		1	24
		1	49	23.42		1	24
		25	0	22.12		2	23
		25	12	22.24		2	23
		25	25	22.18		2	23
		50	0	22.17		2	23
	64QAM	1	0	22.18		2	23
		1	25	22.17		2	23
		1	49	22.21		2	23
		25	0	21.18		3	22
		25	12	21.25		3	22
		25	25	21.25		3	22
		50	0	21.22		3	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			
				23230 782 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	24.51		0	25
		1	12	24.50		0	25
		1	24	24.57		0	25
		12	0	23.51		1	24
		12	7	23.61		1	24
		12	13	23.57		1	24
		25	0	23.58		1	24
	16QAM	1	0	23.23		1	24
		1	12	23.16		1	24
		1	24	23.26		1	24
		12	0	22.16		2	23
		12	7	22.23		2	23
		12	13	22.22		2	23
		25	0	22.13		2	23
	64QAM	1	0	21.18		2	23
		1	12	22.26		2	23
		1	24	22.40		2	23
		12	0	21.14		3	22
		12	7	21.24		3	22
		12	13	21.21		3	22
		25	0	21.20		3	22

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 26 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				26765	26865	26965	MPR	Tune-up Limit
				821.5 MHz	831.5 MHz	841.5 MHz		
15 MHz	QPSK	1	0		23.07		0	23.5
		1	37		22.98		0	23.5
		1	74		22.81		0	23.5
		36	0		23.04		0	23.5
		36	20		23.04		0	23.5
		36	39		22.94		0	23.5
		75	0		22.94		0	23.5
	16QAM	1	0		23.02		0	23.5
		1	37		22.87		0	23.5
		1	74		22.84		0	23.5
		36	0		22.18		0.5	23
		36	20		22.14		0.5	23
		36	39		22.05		0.5	23
		75	0		22.10		0.5	23
	64QAM	1	0		22.44		0.5	23
		1	37		22.38		0.5	23
		1	74		22.22		0.5	23
		36	0		21.19		1.5	22
		36	20		21.20		1.5	22
		36	39		21.11		1.5	22
		75	0		21.11		1.5	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				26740	26865	26990	MPR	Tune-up Limit
				819 MHz	831.5 MHz	844 MHz		
10 MHz	QPSK	1	0	23.13	23.00	23.11	0	23.5
		1	25	23.16	22.99	22.93	0	23.5
		1	49	23.12	22.85	22.87	0	23.5
		25	0	23.21	23.02	23.11	0	23.5
		25	12	23.24	23.04	23.04	0	23.5
		25	25	23.15	22.97	22.97	0	23.5
		50	0	23.19	22.97	23.02	0	23.5
	16QAM	1	0	23.12	22.56	22.62	0	23.5
		1	25	23.11	22.40	22.62	0	23.5
		1	49	23.04	22.41	22.44	0	23.5
		25	0	22.33	22.10	22.25	0.5	23
		25	12	22.31	22.08	22.27	0.5	23
		25	25	22.27	22.00	22.23	0.5	23
		50	0	22.29	22.05	22.15	0.5	23
	64QAM	1	0	22.39	22.46	22.32	0.5	23
		1	25	22.38	22.29	22.26	0.5	23
		1	49	22.32	22.30	22.13	0.5	23
		25	0	21.41	21.17	21.24	1.5	22
		25	12	21.41	21.10	21.24	1.5	22
		25	25	21.34	21.08	21.25	1.5	22
		50	0	21.34	21.08	21.16	1.5	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				26715	26865	27015	MPR	Tune-up Limit
				816.5 MHz	831.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	23.29	23.08	23.07	0	23.5
		1	12	23.20	23.02	23.02	0	23.5
		1	24	23.21	22.99	22.98	0	23.5
		12	0	23.13	23.01	23.01	0	23.5
		12	7	23.12	23.01	23.02	0	23.5
		12	13	23.13	22.97	23.00	0	23.5
		25	0	23.17	23.02	23.01	0	23.5
	16QAM	1	0	22.88	22.72	22.69	0	23.5
		1	12	22.81	22.65	22.61	0	23.5
		1	24	22.80	22.64	22.60	0	23.5
		12	0	22.25	22.11	22.11	0.5	23
		12	7	22.27	22.10	22.14	0.5	23
		12	13	22.26	22.10	22.11	0.5	23
		25	0	22.20	22.00	22.04	0.5	23
	64QAM	1	0	22.52	22.04	22.35	0.5	23
		1	12	22.47	21.94	22.28	0.5	23
		1	24	22.45	21.91	22.27	0.5	23
		12	0	21.18	21.12	21.16	1.5	22
		12	7	21.18	21.11	21.17	1.5	22
		12	13	21.16	21.08	21.15	1.5	22
		25	0	21.18	21.03	21.13	1.5	22

Note(s):

15 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 26 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				26705	26865	27025	MPR	Tune-up Limit
				815.5 MHz	831.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.12	22.94	22.97	0	23.5
		1	8	23.22	23.03	23.00	0	23.5
		1	14	23.07	22.96	22.93	0	23.5
		8	0	23.13	22.97	22.97	0	23.5
		8	4	23.12	23.00	23.01	0	23.5
		8	7	23.15	22.99	23.01	0	23.5
		15	0	23.10	22.95	22.98	0	23.5
		15	0	23.10	22.95	22.98	0	23.5
	16QAM	1	0	23.02	22.47	22.55	0	23.5
		1	8	23.10	22.51	22.59	0	23.5
		1	14	22.97	22.40	22.48	0	23.5
		8	0	22.24	22.14	22.08	0.5	23
		8	4	22.29	22.17	22.09	0.5	23
		8	7	22.27	22.16	22.12	0.5	23
		15	0	22.18	22.06	22.01	0.5	23
		15	0	22.18	22.06	22.01	0.5	23
	64QAM	1	0	22.28	22.33	22.25	0.5	23
		1	8	22.36	22.42	22.30	0.5	23
		1	14	22.26	22.30	22.19	0.5	23
		8	0	21.24	21.14	21.04	1.5	22
		8	4	21.28	21.16	21.06	1.5	22
		8	7	21.28	21.15	21.05	1.5	22
		15	0	21.22	21.05	21.12	1.5	22
		15	0	21.22	21.05	21.12	1.5	22
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				26697	26865	27033	MPR	Tune-up Limit
				814.7 MHz	831.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	22.97	22.91	22.97	0	23.5
		1	3	23.03	22.94	23.00	0	23.5
		1	5	22.97	22.88	22.93	0	23.5
		3	0	22.93	22.88	22.83	0	23.5
		3	1	22.97	22.90	22.89	0	23.5
		3	3	22.99	22.91	22.90	0	23.5
		6	0	23.02	22.87	22.94	0	23.5
		6	0	23.02	22.87	22.94	0	23.5
	16QAM	1	0	22.56	22.82	22.51	0	23.5
		1	3	22.61	22.87	22.58	0	23.5
		1	5	22.59	22.78	22.52	0	23.5
		3	0	22.65	22.60	22.47	0	23.5
		3	1	22.75	22.64	22.50	0	23.5
		3	3	22.72	22.65	22.50	0	23.5
		6	0	22.23	21.85	22.12	0.5	23
		6	0	22.23	21.85	22.12	0.5	23
	64QAM	1	0	22.23	22.36	22.10	0.5	23
		1	3	22.31	22.46	22.16	0.5	23
		1	5	22.21	22.33	22.11	0.5	23
		3	0	22.22	22.29	21.87	0.5	23
		3	1	22.31	22.36	21.93	0.5	23
		3	3	22.31	22.33	21.95	0.5	23
		6	0	21.44	20.94	21.06	1.5	22
		6	0	21.44	20.94	21.06	1.5	22

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	24.10	24.30	24.18	24.16	24.36	0	24.5
		1	49	24.04	24.12	24.00	24.20	24.18	0	24.5
		1	99	24.10	24.06	24.07	24.15	24.10	0	24.5
		50	0	23.59	23.70	23.63	23.64	23.74	0.5	24
		50	24	23.64	23.66	23.56	23.62	23.70	0.5	24
		50	50	23.62	23.63	23.50	23.64	23.63	0.5	24
		100	0	23.63	23.38	23.47	23.61	23.69	0.5	24
	16QAM	1	0	22.99	23.42	23.18	23.05	23.53	0.5	24
		1	49	22.93	23.26	23.03	23.09	23.32	0.5	24
		1	99	23.00	23.21	23.12	23.02	23.23	0.5	24
		50	0	22.18	22.33	22.17	22.24	22.36	1.5	23
		50	24	22.22	22.29	22.17	22.20	22.31	1.5	23
		50	50	22.16	22.23	22.06	22.23	22.25	1.5	23
		100	0	22.18	22.20	22.12	22.21	22.26	1.5	23
	64QAM	1	0	22.20	22.70	22.15	22.24	22.76	1.5	23
		1	49	22.12	22.53	21.99	22.28	22.57	1.5	23
		1	99	22.20	22.47	22.07	22.21	22.52	1.5	23
		50	0	21.22	21.33	21.20	21.29	21.34	2.5	22
		50	24	21.26	21.27	21.18	21.24	21.30	2.5	22
		50	50	21.22	21.19	21.14	21.28	21.24	2.5	22
		100	0	21.27	21.23	21.17	21.26	21.26	2.5	22
15 MHz	QPSK	1	0	24.02	24.23	24.12	24.21	24.27	0	24.5
		1	37	24.01	24.10	23.97	24.15	24.12	0	24.5
		1	74	24.07	24.07	24.04	24.08	24.06	0	24.5
		36	0	23.56	23.65	23.60	23.64	23.69	0.5	24
		36	20	23.64	23.63	23.57	23.62	23.67	0.5	24
		36	39	23.58	23.55	23.49	23.67	23.62	0.5	24
		75	0	23.60	23.50	23.56	23.59	23.66	0.5	24
	16QAM	1	0	23.09	23.32	23.14	23.22	23.38	0.5	24
		1	37	23.06	23.20	23.02	23.18	23.22	0.5	24
		1	74	23.10	23.15	23.09	23.16	23.16	0.5	24
		36	0	22.13	22.23	22.15	22.19	22.27	1.5	23
		36	20	22.19	22.25	22.13	22.15	22.27	1.5	23
		36	39	22.16	22.17	22.08	22.20	22.21	1.5	23
		75	0	22.19	22.22	22.12	22.17	22.24	1.5	23
	64QAM	1	0	22.37	22.13	21.76	22.49	22.19	1.5	23
		1	37	22.31	21.99	21.64	22.41	22.03	1.5	23
		1	74	22.37	21.96	21.69	22.41	21.98	1.5	23
		36	0	21.21	21.22	21.23	21.25	21.26	2.5	22
		36	20	21.27	21.21	21.21	21.25	21.22	2.5	22
		36	39	21.22	21.17	21.17	21.26	21.17	2.5	22
		75	0	21.22	21.23	21.12	21.20	21.28	2.5	22
10 MHz	QPSK	1	0	24.09	24.14	24.07	24.12	24.21	0	24.5
		1	25	24.01	24.09	23.99	24.17	24.13	0	24.5
		1	49	24.10	24.07	23.97	24.12	24.13	0	24.5
		25	0	23.56	23.70	23.58	23.59	23.71	0.5	24
		25	12	23.68	23.63	23.60	23.65	23.67	0.5	24
		25	25	23.63	23.65	23.57	23.66	23.62	0.5	24
		50	0	23.63	23.62	23.56	23.60	23.67	0.5	24
	16QAM	1	0	23.15	23.33	23.11	23.17	23.40	0.5	24
		1	25	23.06	23.26	23.03	23.20	23.31	0.5	24
		1	49	23.12	23.23	23.02	23.13	23.33	0.5	24
		25	0	22.11	22.24	22.14	22.20	22.28	1.5	23
		25	12	22.22	22.25	22.16	22.20	22.24	1.5	23
		25	25	22.17	22.21	22.13	22.20	22.21	1.5	23
		50	0	22.22	22.28	22.12	22.20	22.26	1.5	23
	64QAM	1	0	22.39	22.26	21.72	22.46	22.38	1.5	23
		1	25	22.32	22.22	21.66	22.48	22.26	1.5	23
		1	49	22.38	22.19	21.64	22.44	22.26	1.5	23
		25	0	21.10	21.18	21.19	21.15	21.21	2.5	22
		25	12	21.18	21.16	21.17	21.15	21.19	2.5	22
		25	25	21.13	21.15	21.16	21.17	21.15	2.5	22
		50	0	21.16	21.22	21.10	21.15	21.22	2.5	22

LTE Band 41 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	23.97	24.12	24.01	24.02	24.14	0	24.5
		1	12	23.93	24.10	23.99	24.07	24.12	0	24.5
		1	24	24.00	24.09	23.99	24.06	24.10	0	24.5
		12	0	23.57	23.65	23.57	23.59	23.66	0.5	24
		12	7	23.63	23.66	23.59	23.70	23.67	0.5	24
		12	13	23.61	23.65	23.56	23.68	23.66	0.5	24
		25	0	23.64	23.64	23.53	23.61	23.64	0.5	24
	16QAM	1	0	23.00	23.11	23.15	23.08	23.15	0.5	24
		1	12	23.00	23.13	23.15	23.11	23.14	0.5	24
		1	24	23.07	23.09	23.16	23.09	23.12	0.5	24
		12	0	22.11	22.17	22.16	22.15	22.16	1.5	23
		12	7	22.21	22.17	22.18	22.27	22.20	1.5	23
		12	13	22.22	22.14	22.14	22.24	22.16	1.5	23
		25	0	22.20	22.23	22.09	22.14	22.25	1.5	23
	64QAM	1	0	21.79	22.64	22.19	21.84	22.57	1.5	23
		1	12	21.78	22.62	22.21	21.92	22.56	1.5	23
		1	24	21.83	22.62	22.15	21.90	22.56	1.5	23
		12	0	21.06	21.39	21.06	21.15	21.29	2.5	22
		12	7	21.18	21.41	21.06	21.22	21.32	2.5	22
		12	13	21.14	21.37	21.05	21.20	21.28	2.5	22
		25	0	21.19	21.24	21.00	21.15	21.16	2.5	22

LTE Band 66 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	20.90	20.86	20.92	0	21
		1	49	20.72	20.66	20.70	0	21
		1	99	20.81	20.56	20.69	0	21
		50	0	20.88	20.81	20.87	0	21
		50	24	20.91	20.80	20.81	0	21
		50	50	20.91	20.74	20.77	0	21
		100	0	20.91	20.78	20.81	0	21
	16QAM	1	0	20.97	20.91	20.87	0	21
		1	49	20.65	20.73	20.62	0	21
		1	99	20.72	20.64	20.61	0	21
		50	0	20.48	20.44	20.43	0	21
		50	24	20.55	20.38	20.37	0	21
		50	50	20.48	20.38	20.31	0	21
		100	0	20.52	20.40	20.40	0	21
	64QAM	1	0	21.00	20.78	20.71	0	21
		1	49	20.93	20.60	20.52	0	21
		1	99	21.00	20.53	20.50	0	21
		50	0	20.46	20.49	20.50	0	21
		50	24	20.52	20.45	20.42	0	21
		50	50	20.47	20.41	20.41	0	21
		100	0	20.47	20.41	20.42	0	21
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				132047	132322	132597	MPR	Tune-up Limit
				1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	20.93	20.83	20.71	0	21
		1	37	20.78	20.68	20.67	0	21
		1	74	20.89	20.57	20.63	0	21
		36	0	20.83	20.78	20.70	0	21
		36	20	20.79	20.72	20.64	0	21
		36	39	20.84	20.70	20.62	0	21
		75	0	20.90	20.70	20.67	0	21
	16QAM	1	0	20.88	20.25	20.54	0	21
		1	37	20.73	20.13	20.53	0	21
		1	74	20.77	20.05	20.51	0	21
		36	0	20.49	20.35	20.27	0	21
		36	20	20.47	20.33	20.23	0	21
		36	39	20.50	20.28	20.19	0	21
		75	0	20.54	20.34	20.26	0	21
	64QAM	1	0	20.60	20.74	20.87	0	21
		1	37	20.45	20.59	20.83	0	21
		1	74	20.53	20.48	20.83	0	21
		36	0	20.49	20.41	20.30	0	21
		36	20	20.45	20.38	20.29	0	21
		36	39	20.50	20.36	20.23	0	21
		75	0	20.50	20.38	20.31	0	21
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	20.80	20.75	20.74	0	21
		1	25	20.71	20.64	20.66	0	21
		1	49	20.72	20.69	20.64	0	21
		25	0	20.78	20.75	20.78	0	21
		25	12	20.80	20.77	20.77	0	21
		25	25	20.72	20.69	20.74	0	21
		50	0	20.74	20.76	20.74	0	21
	16QAM	1	0	20.73	20.16	20.27	0	21
		1	25	20.65	20.10	20.26	0	21
		1	49	20.59	20.06	20.22	0	21
		25	0	20.40	20.35	20.44	0	21
		25	12	20.43	20.36	20.35	0	21
		25	25	20.36	20.34	20.33	0	21
		50	0	20.39	20.34	20.28	0	21
	64QAM	1	0	20.52	20.67	20.57	0	21
		1	25	20.45	20.56	20.46	0	21
		1	49	20.45	20.57	20.46	0	21
		25	0	20.49	20.41	20.43	0	21
		25	12	20.50	20.43	20.47	0	21
		25	25	20.46	20.37	20.39	0	21
		50	0	20.47	20.37	20.36	0	21

LTE Band 66 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				131997	132322	132647	MPR	Tune-up Limit
				1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	20.75	20.83	20.77	0	21
		1	12	20.69	20.77	20.74	0	21
		1	24	20.72	20.79	20.74	0	21
		12	0	20.77	20.71	20.71	0	21
		12	7	20.77	20.73	20.72	0	21
		12	13	20.74	20.72	20.73	0	21
		25	0	20.77	20.75	20.72	0	21
		25	0	20.77	20.75	20.72	0	21
	16QAM	1	0	20.85	20.42	20.40	0	21
		1	12	20.82	20.37	20.34	0	21
		1	24	20.83	20.37	20.31	0	21
		12	0	20.47	20.38	20.34	0	21
		12	7	20.49	20.40	20.38	0	21
		12	13	20.47	20.39	20.36	0	21
		25	0	20.43	20.34	20.26	0	21
		25	0	20.43	20.34	20.26	0	21
	64QAM	1	0	20.66	20.28	20.56	0	21
		1	12	20.63	20.20	20.50	0	21
		1	24	20.62	20.22	20.56	0	21
		12	0	20.32	20.36	20.35	0	21
		12	7	20.34	20.38	20.38	0	21
		12	13	20.32	20.37	20.35	0	21
		25	0	20.35	20.31	20.33	0	21
		25	0	20.35	20.31	20.33	0	21
3 MHz	QPSK	1	0	20.74	20.68	20.65	0	21
		1	8	20.82	20.75	20.73	0	21
		1	14	20.69	20.68	20.64	0	21
		8	0	20.68	20.67	20.66	0	21
		8	4	20.74	20.69	20.70	0	21
		8	7	20.70	20.69	20.68	0	21
		15	0	20.72	20.70	20.68	0	21
		15	0	20.72	20.70	20.68	0	21
	16QAM	1	0	20.69	20.10	20.29	0	21
		1	8	20.76	20.18	20.32	0	21
		1	14	20.66	20.06	20.18	0	21
		8	0	20.36	20.37	20.28	0	21
		8	4	20.42	20.39	20.32	0	21
		8	7	20.38	20.38	20.31	0	21
		15	0	20.36	20.32	20.22	0	21
		15	0	20.36	20.32	20.22	0	21
	64QAM	1	0	20.43	20.57	20.48	0	21
		1	8	20.53	20.65	20.51	0	21
		1	14	20.41	20.52	20.41	0	21
		8	0	20.36	20.33	20.23	0	21
		8	4	20.41	20.38	20.25	0	21
		8	7	20.40	20.36	20.24	0	21
		15	0	20.39	20.28	20.29	0	21
		15	0	20.39	20.28	20.29	0	21
1.4 MHz	QPSK	1	0	20.67	20.56	20.61	0	21
		1	3	20.70	20.62	20.66	0	21
		1	5	20.61	20.55	20.58	0	21
		3	0	20.61	20.56	20.60	0	21
		3	1	20.67	20.63	20.66	0	21
		3	3	20.68	20.63	20.68	0	21
		6	0	20.62	20.60	20.59	0	21
		6	0	20.62	20.60	20.59	0	21
	16QAM	1	0	20.32	20.14	20.52	0	21
		1	3	20.39	20.20	20.56	0	21
		1	5	20.32	20.14	20.48	0	21
		3	0	20.29	20.29	20.33	0	21
		3	1	20.35	20.35	20.38	0	21
		3	3	20.34	20.34	20.37	0	21
		6	0	20.37	20.37	20.10	0	21
		6	0	20.37	20.37	20.10	0	21
	64QAM	1	0	20.36	20.57	20.30	0	21
		1	3	20.44	20.68	20.39	0	21
		1	5	20.32	20.54	20.33	0	21
		3	0	20.38	20.51	20.09	0	21
		3	1	20.48	20.60	20.18	0	21
		3	3	20.47	20.58	20.19	0	21
		6	0	20.57	20.20	20.24	0	21
		6	0	20.57	20.20	20.24	0	21

9.4. LTE Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPKD modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL} \{ \min(M_A, M_{IM5}), 0.5 \}$$

Where M_A is defined as follows

$$M_A = \begin{array}{ll} 8.2 & ; 0 \leq A < 0.025 \\ 9.2 - 40A & ; 0.025 \leq A < 0.05 \\ 8 - 16A & ; 0.05 \leq A < 0.25 \\ 4.83 - 3.33A & ; 0.25 \leq A \leq 0.4 \\ 3.83 - 0.83A & ; 0.4 \leq A \leq 1 \end{array}$$

and M_{IM5} is defined as follows

$$M_{IM5} = \begin{array}{ll} 4.5 & ; \Delta_{IM5} < 1.5 * \text{BW}_{\text{Channel_CA}} \\ 6.0 & ; 1.5 * \text{BW}_{\text{Channel_CA}} \leq \Delta_{IM5} < \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \\ M_A & ; \Delta_{IM5} \geq \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \end{array}$$

Where

$$A = N_{RB_alloc} / N_{RB_agg}$$

$$\Delta_{IM5} = \max(|F_{C_agg} - (3 * F_{agg_alloc_low} - 2 * F_{agg_alloc_high})|, |F_{C_agg} - (3 * F_{agg_alloc_high} - 2 * F_{agg_alloc_low})|)$$

$\text{CEIL}\{M_A, 0.5\}$ means rounding upwards to closest 0.5dB, i.e. $\text{MPR} \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible $W_{\text{GAP}} \leq 42.2$ MHz as follows

$$\text{MPR} = \text{CEIL}\{M_N, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{array}{ll} -0.125N + 18.25 & ; 2 \leq N \leq 50 \\ -0.0333N + 13.67 & ; 50 < N \leq 200 \end{array}$$

Where $N = N_{RB_alloc}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

LTE Carrier Aggregation Measured Results

The following power measurements were performed with a single carrier uplink. CA is only supported in the downlinks. The DUT supports downlink CA combinations up to one (1) Uplink and four (4) Downlinks.

Type	LTE CA combinations			PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 12 Tx. Power [dBm]	Delta
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)			
Intra-Band Contiguous	12B			QPSK	5	23035	701.5	1,0	10	5107	738.7	24.60	24.53	-0.3%
	7B			QPSK	15	21076	2532.6	1,0	5	3169	2661.9	19.58	19.65	0.4%
	7C			QPSK	20	21001	2525.1	1,0	20	3199	2664.9	19.66	19.75	0.5%
	41C			QPSK	20	39750	2506.0	1,0	20	39948	2525.8	23.90	23.91	0.0%
	66B			QPSK	15	132597	1772.5	75,0	5	67154	2181.8	20.62	20.60	-0.1%
	66C			QPSK	20	132072	1720.0	100,0	20	66734	2139.8	20.91	20.93	0.1%
Intra-Band Non-Contiguous	2A	+	2A	QPSK	20	18700	1860.0	1,0	20	1100	1980.0	20.08	20.05	-0.1%
	4A	+	4A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	21.00	21.00	0.0%
	7A	+	7A	QPSK	20	20850	2510.0	1,0	20	3350	2680.0	19.47	19.56	0.5%
	66A	+	66A	QPSK	20	132572	1770.0	1,0	20	66536	2120.0	20.92	20.96	0.2%
Inter-Band Non-Contiguous	2A	+	4A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	20.25	20.44	0.9%
	2A	+	5A	QPSK	20	18700	1860.0	1,0	10	2600	889.0	20.08	20.22	0.7%
	2A	+	7A	QPSK	20	18900	1880.0	1,0	20	3350	2680.0	20.25	20.24	0.0%
	2A	+	12A	QPSK	20	18700	1860.0	1,0	10	5095	737.5	20.08	20.22	0.7%
	2A	+	13A	QPSK	20	18900	1880.0	1,0	10	5230	751.0	20.25	20.25	0.0%
	2A	+	17A	QPSK	10	19150	1905.0	1,0	10	5790	740.0	20.29	20.38	0.4%
	2A	+	29A	QPSK	20	18900	1880.0	1,0	10	9715	722.5	20.25	20.40	0.7%
	2A	+	66A	QPSK	20	18900	1880.0	1,0	20	66886	2155.0	20.25	20.49	1.2%
	4A	+	5A	QPSK	20	20175	1732.5	1,0	10	2525	881.5	20.95	21.00	0.2%
	4A	+	7A	QPSK	20	20175	1732.5	1,0	20	3100	2655.0	20.95	21.00	0.2%
	4A	+	12A	QPSK	20	20175	1732.5	1,0	10	5095	737.5	20.95	21.00	0.2%
	4A	+	13A	QPSK	20	20175	1732.5	1,0	10	5230	751.0	20.95	21.00	0.2%
	4A	+	17A	QPSK	10	20000	1715.0	1,0	10	5790	740.0	20.85	20.89	0.2%
	4A	+	29A	QPSK	20	20175	1732.5	1,0	10	9715	722.5	20.95	21.00	0.2%
	5A	+	7A	QPSK	10	20525	836.5	1,0	20	3350	2680.0	23.07	23.21	0.6%
	5A	+	12A	QPSK	10	20525	836.5	1,0	10	5095	737.5	23.07	23.20	0.6%
	5A	+	29A	QPSK	10	20525	836.5	1,0	10	9720	723.0	23.07	23.25	0.8%
	12A	+	66A	QPSK	10	23095	707.5	1,0	20	66886	2155.0	24.31	24.33	0.1%

Type	LTE CA combinations				PCC (UL)					SCC1 (DL)			SCC2 (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 12 Tx. Power [dBm]	Delta	
	PCC	+	SCC1	+	SCC2	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)	Channel	Freq. (MHz)			
Inter-Band Non-Contiguous	2A	+	2A	+	4A	QPSK	20	18900	1880.0	1,0	20	1100	1980.0	20	2175	2132.5	19.52	19.74	1.1%
	2A	+	2A	+	12A	QPSK	20	18900	1880.0	1,0	20	1100	1980.0	10	5095	737.5	19.52	19.59	0.4%
	2A	+	2A	+	13A	QPSK	20	18900	1880.0	1,0	20	1100	1980.0	10	5230	751.0	19.52	19.63	0.6%
	2A	+	4A	+	4A	QPSK	20	18900	1880.0	100,0	20	2300	2145.0	20	2050	2120.0	19.85	20.05	1.0%
	2A	+	4A	+	5A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	10	2525	881.5	19.52	19.60	0.4%
	2A	+	4A	+	7A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	20	3350	2680.0	19.52	19.74	1.1%
	2A	+	4A	+	12A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	10	5095	737.5	19.52	19.61	0.5%
	2A	+	4A	+	13A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	10	5230	751.0	19.52	19.61	0.5%
	2A	+	4A	+	29A	QPSK	20	18900	1880.0	1,0	20	2300	2145.0	10	9715	722.5	19.52	19.60	0.4%
	2A	+	5A	+	29A	QPSK	20	18900	1880.0	1,0	10	2450	874.0	10	9715	722.5	19.52	19.61	0.5%
	2A	+	7A	+	7A	QPSK	20	18900	1880.0	1,0	20	2850	2630.0	20	3350	2680.0	19.52	19.72	1.0%
	2A	+			7C	QPSK	20	18900	1880.0	1,0	20	3001	2645.1	20	3199	2664.9	19.52	19.72	1.0%
	2A	+	12A	+	66A	QPSK	20	18900	1880.0	1,0	10	5095	737.5	20	66886	2155.0	19.52	19.76	1.2%
	2A	+			12B	QPSK	20	18900	1880.0	1,0	5	5035	731.5	10	5107	738.7	19.52	19.62	0.5%
	2A	+	66A	+	66A	QPSK	20	18900	1880.0	100,0	20	66536	2120.0	20	66886	2155.0	19.84	20.07	1.2%
	4A	+	4A	+	5A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	10	2525	881.5	19.92	20.01	0.5%
	4A	+	4A	+	12A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	10	5095	737.5	19.92	19.95	0.2%
	4A	+	4A	+	13A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	10	5230	751.0	19.92	20.00	0.4%
	4A	+	4A	+	29A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	10	9715	722.5	19.92	19.96	0.2%
	4A	+	5A	+	29A	QPSK	20	20050	1720.0	1,0	10	2450	874.0	10	9715	722.5	19.92	19.98	0.3%
	4A	+	7A	+	7A	QPSK	20	20050	1720.0	1,0	20	2850	2630.0	20	3350	2680.0	19.92	20.02	0.5%
	4A	+			7C	QPSK	20	20050	1720.0	1,0	20	3001	2645.1	20	3199	2664.9	19.92	20.01	0.5%
	4A	+			12B	QPSK	20	20050	1720.0	1,0	5	5035	731.5	10	5107	738.7	19.92	20.01	0.5%
	5A	+	7A	+	7A	QPSK	10	20525	836.5	1,0	20	2850	2630.0	20	3350	2680.0	22.48	22.69	0.9%
	5A	+			7C	QPSK	10	20525	836.5	1,0	20	3001	2645.1	20	3199	2664.9	22.48	22.70	0.9%
	12A	+	66A	+	66A	QPSK	10	23095	707.5	1,0	20	66536	2120.0	20	67236	2190.0	23.89	23.87	-0.1%

Note:

Per KDB 941225 D05A LTE Rel. 10 KDB Inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a $\frac{1}{4}$ dBm

LTE Carrier Aggregation Measured Results (continued)

Type	LTE CA combinations						PCC (UL)					SCC1 (DL)			SCC2 (DL)			SCC3 (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 12 Tx. Power [dBm]	Delta	
	PCC	+	SCC1	+	SCC2	+	SCC3	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)	Channel				Freq. (MHz)
Inter-Band Non-Contiguous	2A	+	4A	+	5A	+	29A	QPSK	20	18900	1880.0	1.0	20	2175	2132.5	10	2525	881.5	10	9715	722.5	19.67	19.82	0.8%
	2A	+	4A	+	7A	+	7A	QPSK	20	18900	1880.0	1.0	20	2175	2132.5	20	3100	2655.0	20	3350	2680.0	19.67	19.81	0.7%
	2A	+	4A	+			7C	QPSK	20	18900	1880.0	1.0	20	2175	2132.5	20	3001	2645.1	20	3199	2664.9	19.67	19.81	0.7%

Note:

Per KDB 941225 D05A LTE Rel. 10 KDB Inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a $\frac{1}{4}$ dBm

9.5. Wi-Fi 2.4GHz (DTS Band)**Wi-Fi 2.4GHz Measured Results**

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	16.00	17.00	Yes	14.40	15.50	Yes
			6	2437	16.00	17.00		14.50	15.50	
			11	2462	16.10	17.00		14.30	15.50	
			12	2467	Not Required	16.23		Not Required	14.55	
			13	2472		13.23		11.55		
OFDM 2.4 GHz	802.11g	6 Mbps	1	2412	Not Required	9.26	No	Not Required	7.21	No
			2	2417		16.26		Not Required	14.21	
			3	2422	16.00	17.00		14.50	15.50	
			6	2437	16.10	17.00		14.50	15.50	
			10	2457	16.10	17.00		14.40	15.50	
			11	2462	Not Required	15.26		Not Required	13.21	
			12	2467		10.76		Not Required	8.71	
			13	2472		4.76		2.71		
	802.11n (HT20)	6.5 Mbps	1	2412	Not Required	9.16	No	Not Required	7.20	No
			2	2417		16.80		Not Required	15.20	
			3	2422	16.20	17.00		14.50	15.50	
			6	2437	16.00	17.00		14.50	15.50	
			10	2457	16.00	17.00		14.40	15.50	
			11	2462	Not Required	14.66		Not Required	12.70	
			12	2467		9.16		Not Required	7.20	
			13	2472		2.66		0.70		

Note(s):

1. SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
2. For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
3. SAR is not required for Channels 12 and 13 because the tune-up limit for these two channels are lower than those for the default test channels.

9.6. Wi-Fi 5GHz (U-NII Bands)

Wi-Fi 5 GHz Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 1 5.2 GHz	802.11a	6 Mbps	36	5180	Not Required	16.00	No	Not Required	13.36	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11n (HT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	13.23	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11ac (VHT20)	6.5 Mbps	36	5180	Not Required	16.00	No	Not Required	13.11	No
			40	5200		16.00			14.00	
			44	5220		16.00			14.00	
			48	5240		16.00			14.00	
	802.11n (HT40)	13.5 Mbps	38	5190	13.30	14.45	Yes	8.40	9.42	Yes
			46	5230	15.30	16.00		13.30	14.00	
	802.11ac (VHT40)	13.5 Mbps	38	5190	13.30	14.36	No	8.40	9.46	No
			46	5230	15.30	16.00		13.30	14.00	
	802.11ac (VHT80)	29.3 Mbps	42	5210	Not Required	13.67	No	Not Required	8.61	No
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 2A 5.3 GHz	802.11a	6 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
			64	5320		16.00			13.37	
	802.11n (HT20)	6.5 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
			64	5320		16.00			13.26	
	802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	16.00	No	Not Required	14.00	No
			56	5280		16.00			14.00	
			60	5300		16.00			14.00	
			64	5320		16.00			13.26	
	802.11n (HT40)	13.5 Mbps	54	5270	14.90	16.00	Yes	12.40	14.00	Yes
			62	5310	12.60	14.39		8.60	10.16	
	802.11ac (VHT40)	13.5 Mbps	54	5270	14.90	16.00	No	12.40	14.00	No
			62	5310	12.70	14.39		8.60	10.16	
	802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	13.26	No	Not Required	9.16	No

Note(s):

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both U-NII band I and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for U-NII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

Wi-Fi 5 GHz Measured Results (continued)

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)			
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)	
U-NII 2C 5.5 GHz	802.11a	6 Mbps	100	5500	Not Required	16.00	No	Not Required	12.92	No	
			116	5580		16.00			14.00		
			124	5620		16.00			14.00		
			140	5700		14.21			12.08		
			144	5720		16.00			14.00		
	802.11n (HT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	12.86	No	
			116	5580		16.00			14.00		
			124	5620		16.00			14.00		
			140	5700		14.11			11.95		
			144	5720		16.00			14.00		
	802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	16.00	No	Not Required	12.68	No	
			116	5580		16.00			14.00		
			124	5620		16.00			14.00		
			140	5700		13.95			11.77		
			144	5720		16.00			14.00		
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	14.11	No	10.50	11.26	Yes	
			118	5590		16.00		12.80	14.00		
			126	5630		16.00		13.20	14.00		
			142	5710		16.00		12.30	14.00		
	802.11ac (VHT40)	13.5 Mbps	102	5510	Not Required	13.95	No	10.90	11.78	No	
			118	5590		16.00		12.90	14.00		
			126	5630		16.00		13.10	14.00		
			142	5710		16.00		12.40	14.00		
	802.11ac (VHT80)	29.3 Mbps	106	5530	12.80	13.95	Yes	Not Required	10.78	No	
			122	5610	15.30	16.00			12.68		
			138	5690	14.00	16.00			12.68		
	Band	Mode	Data Rate	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)			Chain 1 Average Power (dBm)		
						Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
U-NII 3 5.8 GHz	802.11a	6 Mbps	149	5745	Not Required	12.76	No	Not Required	10.48	No	
			157	5785		16.00			14.00		
			165	5825		12.76			10.48		
	802.11n (HT20)	6.5 Mbps	149	5745	Not Required	12.59	No	Not Required	10.34	No	
			157	5785		16.00			14.00		
			165	5825		12.59			10.34		
	802.11ac (VHT20)	6.5 Mbps	149	5745	Not Required	12.54	No	Not Required	9.89	No	
			157	5785		16.00			14.00		
			165	5825		12.54			9.89		
	802.11n (HT40)	13.5 Mbps	151	5755	11.10	12.59	Yes	7.40	8.71	Yes	
			159	5795	14.00	16.00		12.80	14.00		
	802.11ac (VHT40)	13.5 Mbps	151	5755	11.10	12.58	No	7.50	9.32	No	
			159	5795	14.00	16.00		12.80	14.00		
	802.11ac (VHT80)	29.3 Mbps	155	5775	Not Required	12.54	No	Not Required	9.50	No	

Note(s):

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

9.7. Bluetooth

Bluetooth Measured Results

Band	Mode	Ch #	Freq. (MHz)	Chain 0 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	GFSK	0	2402	9.86	11.71	Yes
		39	2441	11.31	12.37	
		78	2480	10.20	11.43	
	EDR, $\pi/4$ DQPSK	0	2402	7.28	9.30	No
		39	2441	8.90	10.00	
		78	2480	7.89	9.07	
	EDR, 8-DPSK	0	2402	7.33	9.30	No
		39	2441	8.88	10.00	
		78	2480	7.85	9.07	
	LE, GFSK 1 Mbps	0	2402	3.69	5.66	No
		19	2440	5.67	6.83	
		39	2480	5.19	5.93	
	LE, GFSK 2 Mbps	0	2402	3.68	5.66	No
		19	2440	5.71	6.83	
		39	2480	5.21	5.93	

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR * Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode

configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). Initial Test Position SAR Test Reduction Procedure is outlined in KDB 248227 D01 §5.1.1. To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	190	836.6	27.2	26.5	0.085	0.099	
			Left Tilt	190	836.6	27.2	26.5	0.031	0.036	
			Right Touch	190	836.6	27.2	26.5	0.123	0.144	1
			Right Tilt	190	836.6	27.2	26.5	0.041	0.048	
Body-worn	GPRS 4 Slots	15	Rear	190	836.6	27.2	26.5	0.354	0.414	
			Front	190	836.6	27.2	26.5	0.379	0.443	2
Hotspot	GPRS 4 Slots	10	Rear	128	824.2	27.2	26.6	0.523	0.607	
				190	836.6	27.2	26.5	0.686	0.802	
				251	848.8	27.2	26.6	0.589	0.676	
			Front	128	824.2	27.2	26.6	0.588	0.683	
				190	836.6	27.2	26.5	0.723	0.846	
				251	848.8	27.2	26.6	0.719	0.826	
			Edge 2	190	836.6	27.2	26.5	0.212	0.248	
			Edge 3	190	836.6	27.2	26.5	0.452	0.529	
			Edge 4	190	836.6	27.2	26.5	0.155	0.181	
Hotspot	DTM 2 Slots	10	Front	128	824.2	30.2	29.5	0.601	0.711	
				190	836.6	30.2	29.8	0.770	0.848	3
				251	848.8	30.2	29.8	0.679	0.750	

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	661	1880.0	24.7	24.0	0.066	0.077	4
			Left Tilt	661	1880.0	24.7	24.0	0.029	0.034	
			Right Touch	661	1880.0	24.7	24.0	0.038	0.045	
			Right Tilt	661	1880.0	24.7	24.0	0.021	0.025	
Body-worn	GPRS 4 Slots	15	Rear	661	1880.0	24.7	24.0	0.196	0.230	
			Front	661	1880.0	24.7	24.0	0.269	0.316	5
Hotspot	GPRS 4 Slots	10	Rear	661	1880.0	24.7	24.0	0.384	0.451	
			Front	661	1880.0	24.7	24.0	0.429	0.504	
			Edge 2	661	1880.0	24.7	24.0	0.053	0.063	
			Edge 3	512	1850.2	24.7	24.1	0.616	0.711	
				661	1880.0	24.7	24.0	0.712	0.837	
				810	1909.8	24.7	24.0	0.723	0.851	6
Hotspot	DTM 2 Slots	10	Edge 3	661	1880.0	24.7	24.0	0.206	0.242	
				512	1850.2	27.7	27.0	0.655	0.770	
				661	1880.0	27.7	27.1	0.702	0.806	
				810	1909.8	27.7	27.1	0.566	0.650	

10.3. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	20.7	20.4	0.054	0.057	7
			Left Tilt	9400	1880.0	20.7	20.4	0.023	0.024	
			Right Touch	9400	1880.0	20.7	20.4	0.039	0.041	
			Right Tilt	9400	1880.0	20.7	20.4	0.021	0.022	
Body-worn	Rel 99 RMC	15	Rear	9400	1880.0	20.7	20.4	0.123	0.131	
			Front	9400	1880.0	20.7	20.4	0.192	0.204	8
Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	20.7	20.4	0.247	0.262	
			Front	9400	1880.0	20.7	20.4	0.367	0.390	
			Edge 2	9400	1880.0	20.7	20.4	0.050	0.053	
			Edge 3	9400	1880.0	20.7	20.4	0.562	0.597	9
			Edge 4	9400	1880.0	20.7	20.4	0.163	0.173	

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	21.2	20.9	0.062	0.067	10
			Left Tilt	1413	1732.6	21.2	20.9	0.022	0.024	
			Right Touch	1413	1732.6	21.2	20.9	0.038	0.041	
			Right Tilt	1413	1732.6	21.2	20.9	0.017	0.018	
Body-worn	Rel 99 RMC	15	Rear	1413	1732.6	21.2	20.9	0.217	0.235	
			Front	1413	1732.6	21.2	20.9	0.264	0.286	11
Hotspot	Rel 99 RMC	10	Rear	1413	1732.6	21.2	20.9	0.421	0.456	
			Front	1413	1732.6	21.2	20.9	0.540	0.585	
			Edge 2	1413	1732.6	21.2	20.9	0.021	0.023	
			Edge 3	1413	1732.6	21.2	20.9	0.576	0.624	12
			Edge 4	1413	1732.6	21.2	20.9	0.175	0.190	

10.5. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.7	23.2	0.037	0.042	13
			Left Tilt	4183	836.6	23.7	23.2	0.011	0.012	
			Right Touch	4183	836.6	23.7	23.2	0.015	0.017	
			Right Tilt	4183	836.6	23.7	23.2	0.006	0.007	
Body-worn	Rel 99 RMC	15	Rear	4183	836.6	23.7	23.2	0.342	0.384	
			Front	4183	836.6	23.7	23.2	0.382	0.429	14
Hotspot	Rel 99 RMC	10	Rear	4183	836.6	23.7	23.2	0.649	0.728	
			Front	4183	836.6	23.7	23.2	0.655	0.735	15
			Edge 2	4183	836.6	23.7	23.2	0.190	0.213	
			Edge 3	4183	836.6	23.7	23.2	0.512	0.574	
			Edge 4	4183	836.6	23.7	23.2	0.144	0.162	

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	20.5	20.3	0.052	0.055	16
						50	0	20.5	20.2	0.057	0.061	
			Left Tilt	18900	1880.0	1	0	20.5	20.3	0.019	0.020	
						50	0	20.5	20.2	0.021	0.022	
			Right Touch	18900	1880.0	1	0	20.5	20.3	0.037	0.039	
						50	0	20.5	20.2	0.028	0.030	
			Right Tilt	18900	1880.0	1	0	20.5	20.3	0.016	0.017	
						50	0	20.5	20.2	0.015	0.016	
Body-worn	QPSK	15	Rear	18900	1880.0	1	0	20.5	20.3	0.150	0.159	
						50	0	20.5	20.2	0.151	0.160	
			Front	18900	1880.0	1	0	20.5	20.3	0.175	0.185	
						50	0	20.5	20.2	0.178	0.189	17
Hotspot	QPSK	10	Rear	18900	1880.0	1	0	20.5	20.3	0.259	0.274	
						50	0	20.5	20.2	0.261	0.277	
			Front	18900	1880.0	1	0	20.5	20.3	0.356	0.377	
						50	0	20.5	20.2	0.358	0.380	
			Edge 2	18900	1880.0	1	0	20.5	20.3	0.044	0.047	
						50	0	20.5	20.2	0.046	0.049	
			Edge 3	18900	1880.0	1	0	20.5	20.3	0.506	0.536	
						50	0	20.5	20.2	0.511	0.543	
			Edge 4	18900	1880.0	1	0	20.5	20.3	0.138	0.146	
						50	0	20.5	20.2	0.140	0.149	

10.7. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

10.8. LTE Band 5 (10MHz Bandwidth)

SAR for LTE Band 5 (Frequency Range: 824-849 MHz) is covered by LTE Band 26 (Frequency Range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.9. LTE Band 7 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	21100	2535.0	1	0	20.5	20.1	0.029	0.032	
						50	0	20.5	20.2	0.029	0.031	
			Left Tilt	21100	2535.0	1	0	20.5	20.1	0.015	0.017	
						50	0	20.5	20.2	0.015	0.016	
			Right Touch	21100	2535.0	1	0	20.5	20.1	0.048	0.053	19
						50	0	20.5	20.2	0.034	0.037	
			Right Tilt	21100	2535.0	1	0	20.5	20.1	0.008	0.009	
						50	0	20.5	20.2	<0.001	<0.001	
Body-worn	QPSK	15	Rear	21100	2535.0	1	0	20.5	20.1	0.084	0.093	
						50	0	20.5	20.2	0.088	0.095	
			Front	21100	2535.0	1	0	20.5	20.1	0.105	0.116	
						50	0	20.5	20.2	0.109	0.118	20
Hotspot	QPSK	10	Rear	21100	2535.0	1	0	20.5	20.1	0.160	0.177	
						50	0	20.5	20.2	0.166	0.180	
			Front	21100	2535.0	1	0	20.5	20.1	0.211	0.233	
						50	0	20.5	20.2	0.218	0.236	
			Edge 2	21100	2535.0	1	0	20.5	20.1	0.178	0.197	
						50	0	20.5	20.2	0.181	0.196	
			Edge 3	21100	2535.0	1	0	20.5	20.1	0.520	0.574	
						50	0	20.5	20.2	0.538	0.582	21
			Edge 4	21100	2535.0	1	0	20.5	20.1	0.021	0.023	
						50	0	20.5	20.2	0.022	0.024	

10.10. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	49	25.0	24.4	0.048	0.055	
						25	12	24.0	23.4	0.039	0.044	
			Left Tilt	23095	707.5	1	49	25.0	24.4	0.031	0.036	
						25	12	24.0	23.4	0.025	0.028	
			Right Touch	23095	707.5	1	49	25.0	24.4	0.061	0.070	22
						25	12	24.0	23.4	0.049	0.056	
			Right Tilt	23095	707.5	1	49	25.0	24.4	0.025	0.029	
						25	12	24.0	23.4	0.020	0.023	
Body-worn	QPSK	15	Rear	23095	707.5	1	49	25.0	24.4	0.112	0.129	
						25	12	24.0	23.4	0.090	0.102	
			Front	23095	707.5	1	49	25.0	24.4	0.140	0.161	23
						25	12	24.0	23.4	0.111	0.126	
Hotspot	QPSK	10	Rear	23095	707.5	1	49	25.0	24.4	0.183	0.211	
						25	12	24.0	23.4	0.144	0.164	
			Front	23095	707.5	1	49	25.0	24.4	0.227	0.261	24
						25	12	24.0	23.4	0.176	0.200	
			Edge 2	23095	707.5	1	49	25.0	24.4	0.158	0.182	
						25	12	24.0	23.4	0.126	0.143	
			Edge 3	23095	707.5	1	49	25.0	24.4	0.160	0.184	
						25	12	24.0	23.4	0.121	0.138	
			Edge 4	23095	707.5	1	49	25.0	24.4	0.059	0.068	
						25	12	24.0	23.4	0.051	0.058	

10.11. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23230	782.0	1	0	25.0	24.5	0.047	0.052	
						25	12	24.0	23.6	0.039	0.042	
			Left Tilt	23230	782.0	1	0	25.0	24.5	0.027	0.030	
						25	12	24.0	23.6	0.021	0.023	
			Right Touch	23230	782.0	1	0	25.0	24.5	0.071	0.079	25
						25	12	24.0	23.6	0.061	0.066	
			Right Tilt	23230	782.0	1	0	25.0	24.5	0.027	0.030	
						25	12	24.0	23.6	0.022	0.024	
Body-worn	QPSK	15	Rear	23230	782.0	1	0	25.0	24.5	0.181	0.202	
						25	12	24.0	23.6	0.160	0.174	
			Front	23230	782.0	1	0	25.0	24.5	0.189	0.211	26
						25	12	24.0	23.6	0.168	0.183	
Hotspot	QPSK	10	Rear	23230	782.0	1	0	25.0	24.5	0.304	0.340	
						25	12	24.0	23.6	0.267	0.290	
			Front	23230	782.0	1	0	25.0	24.5	0.381	0.426	27
						25	12	24.0	23.6	0.353	0.384	
			Edge 2	23230	782.0	1	0	25.0	24.5	0.135	0.151	
						25	12	24.0	23.6	0.115	0.125	
			Edge 3	23230	782.0	1	0	25.0	24.5	0.273	0.305	
						25	12	24.0	23.6	0.249	0.271	
			Edge 4	23230	782.0	1	0	25.0	24.5	0.058	0.065	
						25	12	24.0	23.6	0.054	0.059	

10.12. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.13. LTE Band 26 (15MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	0	23.5	23.1	0.080	0.088	
						36	0	23.5	23.0	0.084	0.093	
			Left Tilt	26865	831.5	1	0	23.5	23.1	0.028	0.031	
						36	0	23.5	23.0	0.029	0.032	
			Right Touch	26865	831.5	1	0	23.5	23.1	0.095	0.105	
						36	0	23.5	23.0	0.099	0.110	28
			Right Tilt	26865	831.5	1	0	23.5	23.1	0.035	0.039	
						36	0	23.5	23.0	0.036	0.040	
Body-worn	QPSK	15	Rear	26865	831.5	1	0	23.5	23.1	0.282	0.311	
						36	0	23.5	23.0	0.298	0.331	
			Front	26865	831.5	1	0	23.5	23.1	0.323	0.357	
						36	0	23.5	23.0	0.342	0.380	29
Hotspot	QPSK	10	Rear	26865	831.5	1	0	23.5	23.1	0.542	0.598	
						36	0	23.5	23.0	0.569	0.633	
			Front	26865	831.5	1	0	23.5	23.1	0.551	0.608	
						36	0	23.5	23.0	0.576	0.640	30
			Edge 2	26865	831.5	1	0	23.5	23.1	0.157	0.173	
						36	0	23.5	23.0	0.168	0.187	
			Edge 3	26865	831.5	1	0	23.5	23.1	0.394	0.435	
						36	0	23.5	23.0	0.407	0.452	
			Edge 4	26865	831.5	1	0	23.5	23.1	0.119	0.131	
						36	0	23.5	23.0	0.126	0.140	

10.14. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	0	24.5	24.2	0.066	0.071	
						50	0	24.0	23.6	0.055	0.060	
			Left Tilt	40620	2593.0	1	0	24.5	24.2	0.028	0.030	
						50	0	24.0	23.6	0.026	0.028	
			Right Touch	40620	2593.0	1	0	24.5	24.2	0.092	0.099	31
						50	0	24.0	23.6	0.081	0.088	
			Right Tilt	40620	2593.0	1	0	24.5	24.2	0.008	0.009	
						50	0	24.0	23.6	0.010	0.010	
Body-worn	QPSK	15	Rear	40620	2593.0	1	0	24.5	24.2	0.162	0.174	32
						50	0	24.0	23.6	0.128	0.139	
			Front	40620	2593.0	1	0	24.5	24.2	0.158	0.170	
						50	0	24.0	23.6	0.128	0.139	
Hotspot	QPSK	10	Rear	40620	2593.0	1	0	24.5	24.2	0.322	0.347	
						50	0	24.0	23.6	0.257	0.280	
			Front	40620	2593.0	1	0	24.5	24.2	0.364	0.392	
						50	0	24.0	23.6	0.297	0.323	
			Edge 2	40620	2593.0	1	0	24.5	24.2	0.261	0.281	
						50	0	24.0	23.6	0.220	0.240	
			Edge 3	39750	2506.0	1	0	24.5	24.1	0.623	0.683	
				40185	2549.5	1	0	24.5	24.3	0.786	0.823	33
				40620	2593.0	1	0	24.5	24.2	0.761	0.819	
						50	0	24.0	23.6	0.646	0.703	
				41055	2636.5	1	49	24.5	24.2	0.564	0.604	
				41490	2680.0	1	0	24.5	24.36	0.483	0.499	
			Edge 4	40620	2593.0	1	0	24.5	24.2	0.054	0.058	
						50	0	24.0	23.6	0.047	0.051	

10.15. LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	132322	1745.0	1	0	21.0	20.9	0.058	0.060	34
						50	0	21.0	20.8	0.058	0.061	
			Left Tilt	132322	1745.0	1	0	21.0	20.9	0.021	0.022	
						50	0	21.0	20.8	0.021	0.022	
			Right Touch	132322	1745.0	1	0	21.0	20.9	0.042	0.043	
						50	0	21.0	20.8	0.041	0.043	
			Right Tilt	132322	1745.0	1	0	21.0	20.9	0.017	0.018	
						50	0	21.0	20.8	0.018	0.019	
Body-worn	QPSK	15	Rear	132322	1745.0	1	0	21.0	20.9	0.195	0.201	
						50	0	21.0	20.8	0.194	0.203	
			Front	132322	1745.0	1	0	21.0	20.9	0.230	0.238	35
						50	0	21.0	20.8	0.225	0.235	
Hotspot	QPSK	10	Rear	132322	1745.0	1	0	21.0	20.9	0.393	0.406	
						50	0	21.0	20.8	0.385	0.402	
			Front	132322	1745.0	1	0	21.0	20.9	0.503	0.519	
						50	0	21.0	20.8	0.497	0.519	
			Edge 2	132322	1745.0	1	0	21.0	20.9	0.021	0.022	
						50	0	21.0	20.8	0.021	0.022	
			Edge 3	132322	1745.0	1	0	21.0	20.9	0.604	0.624	36
						50	0	21.0	20.8	0.570	0.595	
			Edge 4	132322	1745.0	1	0	21.0	20.9	0.169	0.175	
						50	0	21.0	20.8	0.167	0.174	

10.16. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	11	2462.0	99.19%	0.117	17.0	16.1			
					Left Tilt	11	2462.0	99.19%	0.140	17.0	16.1			
					Right Touch	11	2462.0	99.19%	0.587	17.0	16.1	0.349	0.433	37
					Right Tilt	11	2462.0	99.19%	0.412	17.0	16.1	0.262	0.325	
			Body-worn	15	Rear	11	2462.0	99.19%	0.029	17.0	16.1			
					Front	11	2462.0	99.19%	0.041	17.0	16.1	0.029	0.036	38
			Hotspot & Wi-Fi Direct	10	Rear	11	2462.0	99.19%	0.051	17.0	16.1			
					Front	11	2462.0	99.19%	0.082	17.0	16.1			
					Edge 1	11	2462.0	99.19%	0.043	17.0	16.1			
					Edge 4	11	2462.0	99.19%	0.169	17.0	16.1	0.114	0.141	39
2.4 GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	99.19%	0.027	15.5	14.5			
					Left Tilt	6	2437.0	99.19%	0.011	15.5	14.5			
					Right Touch	6	2437.0	99.19%	0.038	15.5	14.5	0.036	0.046	40
					Right Tilt	6	2437.0	99.19%	0.003	15.5	14.5			
			Body-worn	15	Rear	6	2437.0	99.19%	0.038	15.5	14.5	0.024	0.031	41
					Front	6	2437.0	99.19%	0.007	15.5	14.5			
			Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	99.19%	0.093	15.5	14.5	0.068	0.086	42
					Front	6	2437.0	99.19%	0.014	15.5	14.5			
					Edge 2	6	2437.0	99.19%	0.037	15.5	14.5			

Adjusted SAR for OFDM Modes:

Antenna	802.11b Max. Power		802.11g Max. Power		802.11n HT20 Max. Power		Highest Reported SAR for 802.11b (W/kg)	Adjusted SAR for 802.11g (W/kg)	Adjusted SAR for 802.11n HT20 (W/kg)
	dBm	mW	dBm	mW	dBm	mW			
Chain 0	17.0	50	17.0	50	17.0	50	0.301	0.301	0.301
Chain 1	15.5	35.5	15.5	35.5	15.5	35.5	0.086	0.086	0.086

Note(s):

Adjusted SAR for OFDM modes is < 1.2 W/kg, therefore SAR testing is not required for OFDM modes.

10.17. Wi-Fi (U-NII Band)

U-NII 1 & 2A

When the specified maximum output power is the same for both U-NII band 1 and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is

- o ≤ 1.2 W/kg, SAR is not required for U-NII band 1
- o > 1.2 W/kg, both bands should be tested independently for SAR.

Per KDB 248227 D01 §1: While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Head	0	Left Touch	54	5270.0	93.96%	0.185	16.0	14.9			
					Left Tilt	54	5270.0	93.96%	0.207	16.0	14.9			
					Right Touch	54	5270.0	93.96%	0.671	16.0	14.9	0.334	0.458	43
					Right Tilt	54	5270.0	93.96%	0.412	16.0	14.9	0.178	0.244	
			Body-worn	15	Rear	54	5270.0	93.96%	0.065	16.0	14.9	0.029	0.040	44
					Front	54	5270.0	93.96%	0.062	16.0	14.9			
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Head	0	Left Touch	54	5270.0	93.96%	0.112	14.0	12.4	0.042	0.065	45
					Left Tilt	54	5270.0	93.96%	0.013	14.0	12.4			
					Right Touch	54	5270.0	93.96%	0.051	14.0	12.4			
					Right Tilt	54	5270.0	93.96%	0.008	14.0	12.4			
			Body-worn	15	Rear	54	5270.0	93.96%	0.069	14.0	12.4	0.027	0.042	46
					Front	54	5270.0	93.96%	0.002	14.0	12.4			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.96%	1.140	16.0	14.9			
					Front	54	5270.0	93.96%	0.984	16.0	14.9			
					Edge 1	54	5270.0	93.96%	0.529	16.0	14.9			
					Edge 4	54	5270.0	93.96%	2.680	16.0	14.9	0.252	0.346	47
5.3 GHz U-NII 2A	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	54	5270.0	93.96%	3.020	14.0	12.4	0.107	0.165	48
					Front	54	5270.0	93.96%	0.271	14.0	12.4			
					Edge 2	54	5270.0	93.96%	0.649	14.0	12.4			

Note(s):

1. Highest Reported 1-g SAR for U-NII 2A mode is < 1.2 W/kg, therefore SAR testing is not required for U-NII 1 mode.
2. Highest Reported 10-g SAR for U-NII 2A mode is < 3.0 W/kg, therefore SAR testing is not required for U-NII 1 mode.

U-NII 2C

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Head	0	Left Touch	122	5610.0	88.48%	0.188	16.0	15.3			
					Left Tilt	122	5610.0	88.48%	0.192	16.0	15.3			
					Right Touch	122	5610.0	88.48%	0.347	16.0	15.3	0.165	0.219	49
					Right Tilt	122	5610.0	88.48%	0.314	16.0	15.3			
			Body-worn	15	Rear	122	5610.0	88.48%	0.171	16.0	15.3	0.061	0.081	50
					Front	122	5610.0	88.48%	0.060	16.0	15.3			
5.6 GHz U-NII 2C	Chain 1	802.11n HT40	Head	0	Left Touch	126	5630.0	93.96%	0.041	14.0	13.2	0.006	0.008	51
					Left Tilt	126	5630.0	93.96%	0.009	14.0	13.2			
					Right Touch	126	5630.0	93.96%	0.022	14.0	13.2			
					Right Tilt	126	5630.0	93.96%	0.013	14.0	13.2			
			Body-worn	15	Rear	126	5630.0	93.96%	0.208	14.0	13.2	0.077	0.099	52
					Front	126	5630.0	93.96%	0.018	14.0	13.2			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.6 GHz U-NII 2C	Chain 0	802.11ac VHT80	Product Specific 10g	0	Rear	122	5610.0	88.48%	0.963	16.0	15.3			
					Front	122	5610.0	88.48%	0.592	16.0	15.3			
					Edge 1	122	5610.0	88.48%	0.717	16.0	15.3			
					Edge 4	122	5610.0	88.48%	9.220	16.0	15.3	0.504	0.669	53
5.6 GHz U-NII 2C	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	126	5630.0	93.96%	1.930	14.0	13.2	0.110	0.141	54
					Front	126	5630.0	93.96%	0.057	14.0	13.2			
					Edge 2	126	5630.0	93.96%	0.564	14.0	13.2			

U-NII 3

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Head	0	Left Touch	159	5795.0	93.96%	0.219	16.0	14.0			
					Left Tilt	159	5795.0	93.96%	0.140	16.0	14.0			
					Right Touch	159	5795.0	93.96%	0.284	16.0	14.0	0.113	0.191	55
					Right Tilt	159	5795.0	93.96%	0.264	16.0	14.0			
			Body-worn	15	Rear	159	5795.0	93.96%	0.130	16.0	14.0	0.036	0.060	56
					Front	159	5795.0	93.96%	0.064	16.0	14.0			
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Head	0	Left Touch	159	5795.0	93.96%	0.017	14.0	12.8			
					Left Tilt	159	5795.0	93.96%	0.014	14.0	12.8			
					Right Touch	159	5795.0	93.96%	0.034	14.0	12.8	0.011	0.015	57
					Right Tilt	159	5795.0	93.96%	0.013	14.0	12.8			
			Body-worn	15	Rear	159	5795.0	93.96%	0.254	14.0	12.8	0.042	0.059	58
					Front	159	5795.0	93.96%	0.033	14.0	12.8			

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.96%	0.687	16.0	14.0			
					Front	159	5795.0	93.96%	0.508	16.0	14.0			
					Edge 1	159	5795.0	93.96%	0.435	16.0	14.0			
					Edge 4	159	5795.0	93.96%	4.270	16.0	14.0	0.333	0.562	59
5.8 GHz U-NII 3	Chain 1	802.11n HT40	Product Specific 10g	0	Rear	159	5795.0	93.96%	1.260	14.0	12.8	0.113	0.159	60
					Front	159	5795.0	93.96%	0.123	14.0	12.8			
					Edge 2	159	5795.0	93.96%	0.466	14.0	12.8			

10.18. Bluetooth

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Chain 0	GFSK	Head	0	Left Touch	39	2441.0	77.03%	12.4	11.3	0.033	0.055	
					Left Tilt	39	2441.0	77.03%	12.4	11.3	0.038	0.063	
					Right Touch	39	2441.0	77.03%	12.4	11.3	0.118	0.196	61
					Right Tilt	39	2441.0	77.03%	12.4	11.3	0.100	0.166	
			Body-worn	15	Rear	39	2441.0	77.03%	12.4	11.3	0.003	0.005	
					Front	39	2441.0	77.03%	12.4	11.3	0.004	0.006	62
			Hotspot	10	Rear	39	2441.0	77.03%	12.4	11.3	0.018	0.030	
					Front	39	2441.0	77.03%	12.4	11.3	0.012	0.019	
					Edge 1	39	2441.0	77.03%	12.4	11.3	0.005	0.008	
					Edge 4	39	2441.0	77.03%	12.4	11.3	0.037	0.062	63

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR	Highest Measured
700	LTE Band 12	Hotspot	Front	No	0.227
	LTE Band 13	Hotspot	Front	No	0.381
850	GSM 850	Hotspot	Front	No	0.770
	WCDMA Band V	Hotspot	Front	No	0.655
	LTE Band 26	Hotspot	Front	No	0.576
1700	WCDMA Band IV	Hotspot	Edge 3	No	0.576
	LTE Band 66	Hotspot	Edge 3	No	0.604
1900	GSM 1900	Hotspot	Edge 3	No	0.723
	WCDMA Band II	Hotspot	Edge 3	No	0.562
	LTE Band 2	Hotspot	Edge 3	No	0.511
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.243
	BT	Head	Right Touch	No	0.118
2500	LTE Band 7	Hotspot	Edge 3	No	0.538
2600	LTE Band 41	Hotspot	Edge 3	No	0.786
5300	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.303
5500	Wi-Fi 802.11ac VHT80	Head	Right Touch	No	0.165
5800	Wi-Fi 802.11n HT40	Head	Right Touch	No	0.113

Note(s):

Repeated Measurement is not required since the Highest measured SAR is < 0.8 W/kg.

Product Specific 10g SAR:

Frequency Band	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR	Highest Measured
5300	Wi-Fi 802.11n HT40	Product Specific	Edge 4	No	0.252
5500	Wi-Fi 802.11ac VHT80	Product Specific	Edge 4	No	0.504
5800	Wi-Fi 802.11n HT40	Product Specific	Edge 4	No	0.333

Note(s):

Repeated Measurement is not required since the Highest measured SAR is < 2.0 W/kg.

12. Simultaneous Transmission Conditions

Case	Cellular	WLAN Chain0 / BT	WLAN Chain1
1	GSM/GPRS/EDGE	BT/BLE	(None)
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G
4	UMTS/HSPA	BT/BLE	(None)
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
6	UMTS/HSPA	WLAN 5G	WLAN 5G
7	LTE	BT/BLE	(None)
8	LTE	WLAN 2.4G	WLAN 2.4G
9	LTE	WLAN 5G	WLAN 5G
10	(None)	BT/BLE WLAN 5G	WLAN 5G
11	GSM/GPRS/EDGE	BT/BLE WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT/BLE WLAN 5G	WLAN 5G
13	LTE	BT/BLE WLAN 5G	WLAN 5G
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G
15	UMTS/HSPA	WLAN 2.4G	WLAN 5G
16	LTE	WLAN 2.4G	WLAN 5G

Note(s):

1. BT and WLAN 2.4G function can be used at the same time, but the antenna switch is shared for both RF paths.
2. Simultaneous cases other than Cases 1-16 (in above table) are not supported in this device.

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

12.1.1. Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)					
		WWAN	DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS + U-NII	WWAN + U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	Chain 0 ⑥	① + ⑥	① + ② + ③	① + ② + ⑤	① + ④ + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥
Head	Left Touch	0.099	0.301	0.046	0.415	0.065	0.055	0.154	0.446	0.465	0.579	0.634	0.535
	Left Tilt	0.036	0.301	0.046	0.415	0.065	0.063	0.099	0.383	0.402	0.516	0.579	0.543
	Right Touch	0.144	0.433	0.046	0.458	0.065	0.196	0.340	0.623	0.642	0.667	0.863	0.719
	Right Tilt	0.048	0.325	0.046	0.244	0.065	0.166	0.214	0.419	0.438	0.357	0.523	0.475
Body-worn	Rear	0.414	0.036	0.031	0.081	0.099	0.005	0.419	0.481	0.549	0.594	0.599	0.185
	Front	0.443	0.036	0.031	0.081	0.099	0.006	0.449	0.510	0.578	0.623	0.629	0.186
Hotspot	Rear	0.802	0.141	0.086			0.030	0.832	1.029				
	Front	0.848	0.141	0.086			0.019	0.867	1.075				
	Edge 1		0.141				0.008		0.141				
	Edge 2	0.281		0.086					0.367				
	Edge 3	0.851											
	Edge 4	0.242	0.141				0.062	0.304					

Appendixes

Refer to separated files for the following appendixes.

12371351-S1V1 Appendix A: SAR Setup Photos

12371351-S1V1 Appendix B: SAR System Check Plots

12371351-S1V2 Appendix C: Highest SAR Test Plots

12371351-S1V1 Appendix D: SAR Liquid Tissue Ingredients

12371351-S1V1 Appendix E: SAR Probe Calibration Certificates

12371351-S1V1 Appendix F: SAR Dipole Calibration Certificates

END OF REPORT