



# SAR EVALUATION REPORT

For

## ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, FL 518048, USA

**FCC ID: YPVITALCOMNOBAII**

|                                                                                                                                                                                                                                                                                                                   |                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                            | <b>Product Type:</b><br>Mobile Phone |
| <b>Test Engineer:</b> <u>Wilson Chen</u>                                                                                                                                                                                      |                                      |
| <b>Report Number:</b> <u>RSZ140304016-20</u>                                                                                                                                                                                                                                                                      |                                      |
| <b>Report Date:</b> <u>2014-03-27</u>                                                                                                                                                                                                                                                                             |                                      |
| <b>Reviewed By:</b> <u>SAR Engineer</u>                                                                                                                                                                                       |                                      |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building,<br>ShiHua Road, FuTian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                      |

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

| Attestation of Test Results                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                        |             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------|
| EUT Information                                                                                                                                                                                                                                                                                                                                                                                                                                     | Company Name                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ITALCOM GROUP          |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | EUT Description                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Mobile Phone           |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                | YPVITALCOMNOBAIL       |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Model Number                                                                                                                                                                                                                                                                                                                                                                                                                                                          | noba II                |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Test Date                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 2014-3-25 to 2014-3-26 |             |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                           | Max. SAR Level(s) Reported                                                                                                                                                                                                                                                                                                                                                                                                                                            |                        | Limit(W/Kg) |
| GSM850                                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.726 W/kg 1g Head SAR<br>1.300 W/kg 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                      |                        | 1.6         |
| PCS1900                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0.686 W/kg 1g Head SAR<br>0.989 W/kg 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |             |
| WCDMA850                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.392 W/kg 1g Head SAR<br>0.647 W/kg 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |             |
| WCDMA1900                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.383 W/kg 1g Head SAR<br>0.601 W/kg 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |             |
| Simultaneous                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.098 W/kg 1g Head SAR<br>1.487 W/kg 1g Body SAR                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |             |
| Applicable Standards                                                                                                                                                                                                                                                                                                                                                                                                                                | ANSI/IEEE C95.1: 2005<br>IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds,3 kHz to 300 GHz.                                                                                                                                                                                                                                                                                                                   |                        |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ANSI/IEEE C95.3: 2002<br>IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.                                                                                                                                                                                                                                                                          |                        |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | IEEE1528: 2003<br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques                                                                                                                                                                                                                                                                    |                        |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                     | KDB procedures<br>KDB 447498 D01 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.<br>KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets<br>KDB 865664 D01 SAR Measurement Requirements for 100 MHz to 6 GHz<br>KDB 941225 D01 SAR Measurement Procedures for 3G Devices-CDMA 2000/EV-Do WCDMA/HSDPA/HSUPA<br>KDB 941225 D06 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities. |                        |             |
| <b>Note:</b> This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2003 and RF exposure KDB procedures.<br><b>The results and statements contained in this report pertain only to the device(s) evaluated.</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                        |             |

## **TABLE OF CONTENTS**

|                                                                  |            |
|------------------------------------------------------------------|------------|
| <b>DOCUMENT REVISION HISTORY .....</b>                           | <b>5</b>   |
| <b>EUT DESCRIPTION.....</b>                                      | <b>6</b>   |
| TECHNICAL SPECIFICATION.....                                     | 6          |
| <b>REFERENCE, STANDARDS, AND GUIDELINES .....</b>                | <b>7</b>   |
| SAR LIMITS.....                                                  | 8          |
| <b>FACILITIES.....</b>                                           | <b>9</b>   |
| <b>DESCRIPTION OF TEST SYSTEM.....</b>                           | <b>10</b>  |
| <b>EQUIPMENT LIST AND CALIBRATION.....</b>                       | <b>17</b>  |
| EQUIPMENTS LIST & CALIBRATION INFORMATION .....                  | 17         |
| <b>SAR MEASUREMENT SYSTEM VERIFICATION .....</b>                 | <b>18</b>  |
| LIQUID VERIFICATION .....                                        | 18         |
| SYSTEM ACCURACY VERIFICATION.....                                | 21         |
| SAR SYSTEM VALIDATION DATA.....                                  | 22         |
| <b>EUT TEST STRATEGY AND METHODOLOGY.....</b>                    | <b>30</b>  |
| TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR ..... | 30         |
| CHEEK/TOUCH POSITION .....                                       | 31         |
| EAR/TILT POSITION .....                                          | 31         |
| TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....       | 32         |
| SAR EVALUATION PROCEDURE .....                                   | 33         |
| <b>CONDUCTED OUTPUT POWER MEASUREMENT .....</b>                  | <b>34</b>  |
| PROVISION APPLICABLE.....                                        | 34         |
| TEST PROCEDURE.....                                              | 34         |
| MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS .....                | 34         |
| TEST RESULTS:.....                                               | 35         |
| <b>SAR MEASUREMENT RESULTS.....</b>                              | <b>42</b>  |
| SAR TEST DATA .....                                              | 42         |
| <b>SAR SIMULTANEOUS TRANSMISSION DESCRIPTION .....</b>           | <b>49</b>  |
| EUT SCAN RESULTS.....                                            | 54         |
| <b>APPENDIX A MEASUREMENT UNCERTAINTY .....</b>                  | <b>106</b> |
| <b>APPENDIX B – PROBE CALIBRATION CERTIFICATES.....</b>          | <b>107</b> |
| <b>APPENDIX C DIPOLE CALIBRATION CERTIFICATES.....</b>           | <b>117</b> |
| <b>APPENDIX D EUT TEST POSITION PHOTOS.....</b>                  | <b>137</b> |
| LIQUID DEPTH $\geq$ 15CM.....                                    | 137        |
| BODY-WORN FRONT SETUP PHOTO (10MM).....                          | 137        |
| BODY-WORN BACK SETUP PHOTO (10MM).....                           | 138        |
| BODY-WORN LEFT SETUP PHOTO (10MM).....                           | 138        |
| BODY-WORN RIGHT SETUP PHOTO (10MM).....                          | 139        |
| BODY-WORN BOTTOM SETUP PHOTO (10MM).....                         | 139        |
| LEFT HEAD TOUCH SETUP PHOTO .....                                | 140        |
| LEFT HEAD TILT SETUP PHOTO .....                                 | 140        |
| RIGHT HEAD TOUCH SETUP PHOTO .....                               | 141        |
| RIGHT HEAD TILT SETUP PHOTO .....                                | 141        |
| <b>APPENDIX E EUT PHOTOS .....</b>                               | <b>142</b> |
| EUT – FRONT VIEW .....                                           | 142        |
| EUT – BACK VIEW.....                                             | 142        |

EUT – LEFT SIDE VIEW.....143

EUT – RIGHT SIDE VIEW .....143

EUT – TOP VIEW.....144

EUT – BOTTOM VIEW .....144

EUT – BATTERY OFF VIEW .....145

**APPENDIX F INFORMATIVE REFERENCES.....146**

DOCUMENT REVISION HISTORY

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 0               | RSZ140304016-20 | Original Report         | 2014-03-27       |

## EUT DESCRIPTION

This report has been prepared on behalf of ITALCOM GROUP and their product, FCC ID: YPVITALCOMNOBAII , Model: noba II or the EUT (Equipment under Test) as referred to in the rest of this report. The EUT is a mobile phone.

### Technical Specification

|                               |                                                                                                                                                                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Type</b>           | Portable                                                                                                                                                                                                                                                               |
| <b>Exposure Category:</b>     | Population/Uncontrolled                                                                                                                                                                                                                                                |
| <b>Antenna Type(s):</b>       | Internal Antenna                                                                                                                                                                                                                                                       |
| <b>Body-Worn Accessories:</b> | Headset                                                                                                                                                                                                                                                                |
| <b>Face-Head Accessories:</b> | None                                                                                                                                                                                                                                                                   |
| <b>Multi-slot Class:</b>      | Class 12                                                                                                                                                                                                                                                               |
| <b>Operation Mode :</b>       | GSM Voice, GPRS, EGPRS, WCDMA, Wi-Fi and Bluetooth                                                                                                                                                                                                                     |
| <b>Frequency Band:</b>        | GSM850: 824-849 MHz (TX); 869-894 MHz (RX)<br>PCS1900: 1850-1910 MHz (TX); 1930-1990 MHz (RX)<br>WCDMA850: 824-849 MHz (TX); 869-894 MHz (RX)<br>WCDMA1900: 1850-1910 MHz (TX); 1930-1990 MHz (RX)<br>Wi-Fi: 2412-2462 MHz, 2422-2452 MHz<br>Bluetooth : 2402-2480 MHz |
| <b>Conducted RF Power:</b>    | GSM850: 32.68 dBm (GMSK), 27.43 dBm (8PSK)<br>PCS1900: 29.45 dBm (GMSK), 24.73 dBm (8PSK)<br>WCDMA850: 22.53 dBm<br>WCDMA1900: 21.95 dBm<br>Wi-Fi: 9.18 dBm<br>Bluetooth: 6.25 dBm                                                                                     |
| <b>Dimensions (L*W*H):</b>    | 123 mm (L) × 64 mm (W) × 13 mm (H)                                                                                                                                                                                                                                     |
| <b>Power Source:</b>          | 3.7 V <sub>DC</sub> Rechargeable Battery                                                                                                                                                                                                                               |
| <b>Normal Operation:</b>      | Head and Body-worn                                                                                                                                                                                                                                                     |

## REFERENCE, STANDARDS, AND GUIDELINES

---

### **FCC:**

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

### **CE:**

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

**SAR Limits****FCC Limit (1g Tissue)**

| <b>EXPOSURE LIMITS</b>                                           | <b>SAR (W/kg)</b>                                              |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | 1.60                                                           | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

**CE Limit (10g Tissue)**

| <b>EXPOSURE LIMITS</b>                                           | <b>SAR (W/kg)</b>                                              |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 10 g of tissue)               | 2.0                                                            | 10                                                     |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

## **FACILITIES**

---

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

## DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

### ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

### Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

### Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

### Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.



## ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left( e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

## Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

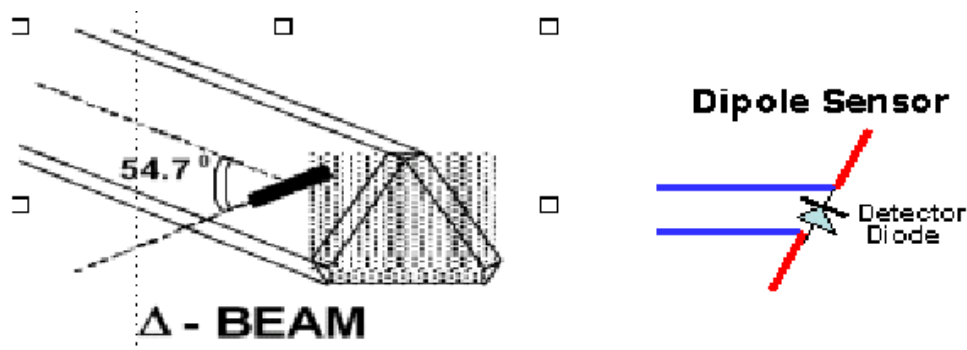

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

## Isotropic E-Field Probe Specification

|                                      |                                                                                                                                                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Calibration Method</b>            | Frequency Dependent<br>Below 1 GHz Calibration in air performed in a TEM Cell<br>Above 1 GHz Calibration in air performed in waveguide                          |
| <b>Sensitivity</b>                   | $0.70 \mu\text{V}/(\text{V}/\text{m})^2$ to $0.85 \mu\text{V}/(\text{V}/\text{m})^2$                                                                            |
| <b>Dynamic Range</b>                 | 0.0005 W/kg to 100 W/kg                                                                                                                                         |
| <b>Isotropic Response</b>            | Better than 0.1 dB                                                                                                                                              |
| <b>Diode Compression Point (DCP)</b> | Calibration for Specific Frequency                                                                                                                              |
| <b>Probe Tip Diameter</b>            | < 2.9 mm                                                                                                                                                        |
| <b>Sensor Offset</b>                 | 1.56 (+/- 0.02 mm)                                                                                                                                              |
| <b>Probe Length</b>                  | 289 mm                                                                                                                                                          |
| <b>Video Bandwidth</b>               | @ 500 Hz: 1 dB<br>@ 1.02 kHz: 3 dB                                                                                                                              |
| <b>Boundary Effect</b>               | Less than 2.1% for distance greater than 0.58 mm                                                                                                                |
| <b>Spatial Resolution</b>            | The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe.<br>The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe |

## Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

## Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 $\mu\text{V}$  to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| <b>ADC</b>                      | 12 Bit                                                          |
| <b>Amplifier Range</b>          | 20 mV to 200 mV and 150 mV to 800 mV                            |
| <b>Field Integration</b>        | Local Co-Processor utilizing proprietary integration algorithms |
| <b>Number of Input Channels</b> | 4 in total 3 dedicated and 1 spare                              |
| <b>Communication</b>            | Packet data via RS232                                           |

### Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



|                                      |                                   |
|--------------------------------------|-----------------------------------|
| <b>Robot/Controller Manufacturer</b> | Thermo CRS                        |
| <b>Number of Axis</b>                | Six independently controlled axis |
| <b>Positioning Repeatability</b>     | 0.05 mm                           |
| <b>Controller Type</b>               | Single phase Pentium based C500C  |
| <b>Robot Reach</b>                   | 710 mm                            |
| <b>Communication</b>                 | RS232 and LAN compatible          |

### ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

### Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




### Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

### APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

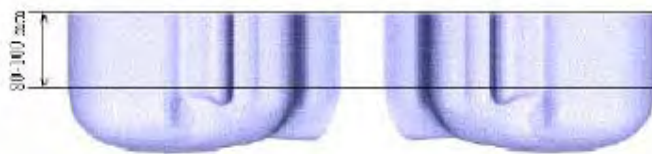

**APREL Laboratories Universal Phantom**

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



### Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

| Ingredients<br>(% by weight) | Frequency (MHz) |       |       |      |       |       |       |      |      |      |
|------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
|                              | 450             |       | 835   |      | 915   |       | 1900  |      | 2450 |      |
| Tissue Type                  | Head            | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body |
| Water                        | 38.56           | 51.16 | 41.45 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 |
| Salt (Nacl)                  | 3.95            | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 |
| Sugar                        | 56.32           | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  |
| HEC                          | 0.98            | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  |
| Bactericide                  | 0.19            | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  |
| Triton x-100                 | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  |
| DGBE                         | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 |
| Dielectric Constant          | 43.42           | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.8 | 52.5 |
| Conductivity (s/m)           | 0.85            | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.88 | 1.78 |

### Recommended Tissue Dielectric Parameters for Head and Body

| Frequency<br>(MHz) | Head Tissue  |                | Body Tissue  |                |
|--------------------|--------------|----------------|--------------|----------------|
|                    | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150                | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450               | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610               | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800-2000          | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450               | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000               | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800               | 35.3         | 5.27           | 48.2         | 6.00           |


## EQUIPMENT LIST AND CALIBRATION

### Equipments List & Calibration Information

| Equipment                                                | Model          | Calibration Date | S/N        |
|----------------------------------------------------------|----------------|------------------|------------|
| CRS F3 robot                                             | ALS-F3         | N/A              | RAF0805352 |
| CRS F3 Software                                          | ALS-F3-SW      | N/A              | N/A        |
| CRS C500C controller                                     | ALS-C500       | N/A              | RCF0805379 |
| Probe mounting device & Boundary Detection Sensor System | ALS-PMDPS-3    | N/A              | 120-00270  |
| Universal Work Station                                   | ALS-UWS        | N/A              | 100-00157  |
| Data Acquisition Package                                 | ALS-DAQ-PAQ-3  | 2013-10-08       | 110-00212  |
| Miniature E-Field Probe                                  | ALS-E-020      | 2013-10-08       | 500-00283  |
| Dipole, 835MHz                                           | ALS-D-835-S-2  | 2011-08-25       | 180-00558  |
| Dipole, 1900MHz                                          | ALS-D-1900-S-2 | 2011-08-25       | 210-00710  |
| Dipole, 2450MHz                                          | ALS-D-2450-S-2 | 2011-08-25       | 220-00758  |
| Dipole Spacer                                            | ALS-DS-U       | N/A              | 250-00907  |
| Device holder/Positioner                                 | ALS-H-E-SET-2  | N/A              | 170-00510  |
| Left ear SAM phantom                                     | ALS-P-SAM-L    | N/A              | 130-00311  |
| Right ear SAM phantom                                    | ALS-P-SAM-R    | N/A              | 140-00359  |
| UniPhantom                                               | ALS-P-UP-1     | N/A              | 150-00413  |
| Simulated Tissue 835 MHz Head                            | ALS-TS-835-H   | Each Time        | 270-01002  |
| Simulated Tissue 835 MHz Body                            | ALS-TS-835-B   | Each Time        | 270-02101  |
| Simulated Tissue 1900 MHz Head                           | ALS-TS-1900-H  | Each Time        | 295-01103  |
| Simulated Tissue 1900 MHz Body                           | ALS-TS-1900-B  | Each Time        | 295-02102  |
| Simulated Tissue 2450 MHz Head                           | ALS-TS-2450-H  | Each Time        | 296-01001  |
| Simulated Tissue 2450 MHz Body                           | ALS-TS-2450-B  | Each Time        | 290-01109  |
| Power Amplifier                                          | 5S1G4          | N/A              | 71377      |
| Synthesized Sweeper                                      | HP 8341B       | 2013-05-09       | 2624A00116 |
| UNIVERSAL RADIO COMMUNICATION TESTER                     | CMU200         | 2013-11-23       | 106891     |
| EMI Test Receiver                                        | ESCI           | 2013-11-12       | 101120     |

## SAR MEASUREMENT SYSTEM VERIFICATION

### Liquid Verification

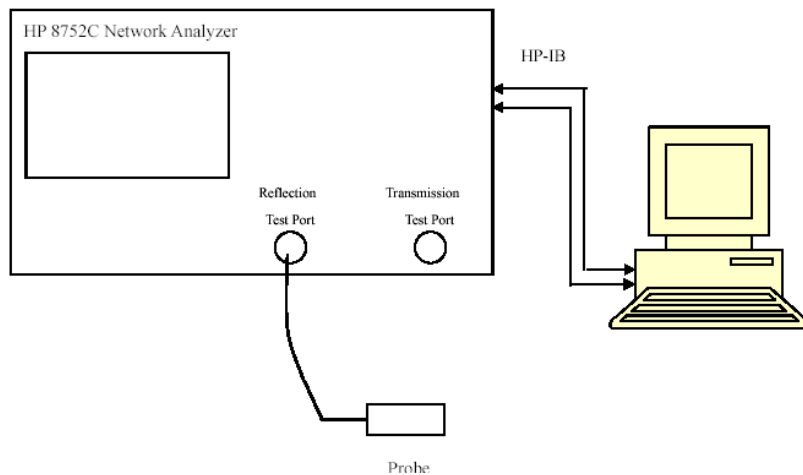

Liquid Verification Setup Block Diagram

### Liquid Verification Results

| Frequency | Liquid Type | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------|-------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|           |             | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 824.2     | Head        | 41.39            | 0.91           | 41.50        | 0.90           | -0.265             | 1.111                | $\pm 5$       |
|           | Body        | 55.06            | 0.95           | 55.20        | 0.97           | -0.254             | -2.062               | $\pm 5$       |
| 826.4     | Head        | 41.28            | 0.91           | 41.50        | 0.90           | -0.530             | 1.111                | $\pm 5$       |
|           | Body        | 55.08            | 0.96           | 55.20        | 0.97           | -0.217             | -1.031               | $\pm 5$       |
| 836.6     | Head        | 41.35            | 0.92           | 41.50        | 0.90           | -0.361             | 2.222                | $\pm 5$       |
|           | Body        | 55.13            | 0.97           | 55.20        | 0.97           | -0.127             | 0.000                | $\pm 5$       |
| 846.6     | Head        | 41.20            | 0.92           | 41.50        | 0.90           | -0.723             | 2.222                | $\pm 5$       |
|           | Body        | 55.20            | 0.99           | 55.20        | 0.97           | 0.000              | 2.062                | $\pm 5$       |
| 848.8     | Head        | 41.14            | 0.92           | 41.50        | 0.90           | -0.867             | 2.222                | $\pm 5$       |
|           | Body        | 55.22            | 0.99           | 55.20        | 0.97           | 0.036              | 2.062                | $\pm 5$       |
| 1850.2    | Head        | 39.99            | 1.42           | 40.00        | 1.40           | -0.025             | 1.429                | $\pm 5$       |
|           | Body        | 52.99            | 1.50           | 53.30        | 1.52           | -0.582             | -1.316               | $\pm 5$       |
| 1852.4    | Head        | 40.00            | 1.42           | 40.00        | 1.40           | 0.000              | 1.429                | $\pm 5$       |
|           | Body        | 52.97            | 1.50           | 53.30        | 1.52           | -0.619             | -1.316               | $\pm 5$       |
| 1880.0    | Head        | 40.00            | 1.40           | 40.00        | 1.40           | 0.000              | 0.000                | $\pm 5$       |
|           | Body        | 52.78            | 1.54           | 53.30        | 1.52           | -0.976             | 1.316                | $\pm 5$       |
| 1907.6    | Head        | 40.00            | 1.42           | 40.00        | 1.40           | 0.000              | 1.429                | $\pm 5$       |
|           | Body        | 52.74            | 1.56           | 53.30        | 1.52           | -1.051             | 2.632                | $\pm 5$       |
| 1909.8    | Head        | 40.01            | 1.42           | 40.00        | 1.40           | 0.025              | 1.429                | $\pm 5$       |
|           | Body        | 52.84            | 1.55           | 53.30        | 1.52           | -0.863             | 1.974                | $\pm 5$       |

\*Liquid Verification was performed on 2014-3-25.

Please refer to the following tables.


| 835 MHz Head    |         |         |  | 835 MHz Body    |         |         |
|-----------------|---------|---------|--|-----------------|---------|---------|
| Frequency (MHz) | e'      | e''     |  | Frequency (MHz) | e'      | e''     |
| 824.0           | 41.4051 | 19.8317 |  | 824.0           | 55.0600 | 20.7246 |
| 824.5           | 41.3741 | 19.8322 |  | 824.5           | 55.0632 | 20.6241 |
| 825.0           | 41.3574 | 19.8328 |  | 825.0           | 55.0663 | 20.6366 |
| 825.5           | 41.2523 | 19.8333 |  | 825.5           | 55.0694 | 20.6491 |
| 826.0           | 41.2706 | 19.8339 |  | 826.0           | 55.0726 | 20.7841 |
| 826.5           | 41.2925 | 19.8344 |  | 826.5           | 55.0757 | 20.8479 |
| 827.0           | 41.2690 | 19.8350 |  | 827.0           | 55.0788 | 20.7624 |
| 827.5           | 41.3163 | 19.8355 |  | 827.5           | 55.0820 | 20.6405 |
| 828.0           | 41.3359 | 19.8361 |  | 828.0           | 55.0851 | 20.6751 |
| 828.5           | 41.3423 | 19.8367 |  | 828.5           | 55.0883 | 20.6325 |
| 829.0           | 41.3933 | 19.8372 |  | 829.0           | 55.0914 | 20.7366 |
| 829.5           | 41.3418 | 19.8378 |  | 829.5           | 55.0945 | 20.6795 |
| 830.0           | 41.3781 | 19.8383 |  | 830.0           | 55.0977 | 20.5574 |
| 830.5           | 41.3382 | 19.8389 |  | 830.5           | 55.1008 | 20.6218 |
| 831.0           | 41.3112 | 19.8394 |  | 831.0           | 55.1040 | 20.6069 |
| 831.5           | 41.3307 | 19.8400 |  | 831.5           | 55.1071 | 20.8143 |
| 832.0           | 41.2925 | 19.8405 |  | 832.0           | 55.1102 | 20.7920 |
| 832.5           | 41.2674 | 19.8411 |  | 832.5           | 55.1134 | 20.5687 |
| 833.0           | 41.3079 | 19.8416 |  | 833.0           | 55.1165 | 20.5021 |
| 833.5           | 41.3393 | 19.8422 |  | 833.5           | 55.1196 | 20.6135 |
| 834.0           | 41.3367 | 19.8427 |  | 834.0           | 55.1228 | 20.7654 |
| 834.5           | 41.3353 | 19.8433 |  | 834.5           | 55.1259 | 20.6584 |
| 835.0           | 41.3601 | 19.8439 |  | 835.0           | 55.1291 | 20.6018 |
| 835.5           | 41.3611 | 19.8447 |  | 835.5           | 55.1322 | 20.8495 |
| 836.0           | 41.3647 | 19.8456 |  | 836.0           | 55.1353 | 20.8565 |
| 836.5           | 41.3498 | 19.8464 |  | 836.5           | 55.1385 | 20.7143 |
| 837.0           | 41.3366 | 19.8473 |  | 837.0           | 55.1416 | 20.5413 |
| 837.5           | 41.3308 | 19.8481 |  | 837.5           | 55.1447 | 20.5776 |
| 838.0           | 41.3540 | 19.8490 |  | 838.0           | 55.1479 | 20.8619 |
| 838.5           | 41.3125 | 19.8498 |  | 838.5           | 55.1510 | 20.8771 |
| 839.0           | 41.3024 | 19.8507 |  | 839.0           | 55.1542 | 20.7991 |
| 839.5           | 41.3049 | 19.8516 |  | 839.5           | 55.1573 | 20.7341 |
| 840.0           | 41.3160 | 19.5524 |  | 840.0           | 55.1604 | 20.8012 |
| 840.5           | 41.3053 | 19.5533 |  | 840.5           | 55.1636 | 20.8466 |
| 841.0           | 41.2886 | 19.5541 |  | 841.0           | 55.1667 | 20.8017 |
| 841.5           | 41.3180 | 19.5550 |  | 841.5           | 55.1699 | 20.7384 |
| 842.0           | 41.3197 | 19.5558 |  | 842.0           | 55.1730 | 20.9143 |
| 842.5           | 41.3234 | 19.5567 |  | 842.5           | 55.1761 | 20.8828 |
| 843.0           | 41.3175 | 19.5475 |  | 843.0           | 55.1793 | 20.8432 |
| 843.5           | 41.2412 | 19.5484 |  | 843.5           | 55.1824 | 20.7987 |
| 844.0           | 41.3175 | 19.5492 |  | 844.0           | 55.1855 | 20.8164 |
| 844.5           | 41.2718 | 19.5501 |  | 844.5           | 55.1887 | 20.8423 |
| 845.0           | 41.1978 | 19.5509 |  | 845.0           | 55.1918 | 20.7517 |
| 845.5           | 41.2131 | 19.5518 |  | 845.5           | 55.1950 | 20.6981 |
| 846.0           | 41.1677 | 19.5727 |  | 846.0           | 55.1981 | 20.8711 |
| 846.5           | 41.2086 | 19.5736 |  | 846.5           | 55.2012 | 20.9325 |
| 847.0           | 41.1889 | 19.5744 |  | 847.0           | 55.2044 | 20.8813 |
| 847.5           | 41.1921 | 19.5753 |  | 847.5           | 55.2075 | 20.8016 |
| 848.0           | 41.1657 | 19.5761 |  | 848.0           | 55.2106 | 20.8918 |
| 848.5           | 41.1703 | 19.5770 |  | 848.5           | 55.2138 | 20.9699 |
| 849.0           | 41.1305 | 19.5778 |  | 849.0           | 55.2169 | 20.9701 |

| 1900 MHz Head   |         |         |  | 1900 MHz Body   |         |         |
|-----------------|---------|---------|--|-----------------|---------|---------|
| Frequency (MHz) | e'      | e''     |  | Frequency (MHz) | e'      | e''     |
| 1850.0          | 39.9938 | 13.8220 |  | 1850.0          | 53.0230 | 14.5890 |
| 1851.2          | 39.9960 | 13.7920 |  | 1851.2          | 52.9549 | 14.5464 |
| 1852.4          | 39.9963 | 13.7593 |  | 1852.4          | 52.9738 | 14.5475 |
| 1853.6          | 39.9965 | 13.7827 |  | 1853.6          | 52.9503 | 14.5238 |
| 1854.8          | 39.9968 | 13.7766 |  | 1854.8          | 52.8532 | 14.5432 |
| 1856.0          | 39.9970 | 13.7007 |  | 1856.0          | 52.9562 | 14.5797 |
| 1857.2          | 39.9973 | 13.8406 |  | 1857.2          | 52.9494 | 14.6056 |
| 1858.4          | 39.9975 | 13.7368 |  | 1858.4          | 52.9314 | 14.5269 |
| 1859.6          | 39.9978 | 13.7907 |  | 1859.6          | 52.9131 | 14.5212 |
| 1860.8          | 39.9980 | 13.7920 |  | 1860.8          | 52.8088 | 14.5740 |
| 1862.0          | 39.9983 | 13.8086 |  | 1862.0          | 52.8365 | 14.4012 |
| 1863.2          | 39.9985 | 13.8310 |  | 1863.2          | 52.7825 | 14.4140 |
| 1864.4          | 39.9988 | 13.8660 |  | 1864.4          | 52.8173 | 14.4311 |
| 1865.6          | 39.9990 | 13.4606 |  | 1865.6          | 52.8237 | 14.4021 |
| 1866.8          | 39.9993 | 13.4494 |  | 1866.8          | 52.8987 | 14.3927 |
| 1868.0          | 39.9996 | 13.4679 |  | 1868.0          | 52.9672 | 14.4088 |
| 1869.2          | 39.9998 | 13.5287 |  | 1869.2          | 52.9762 | 14.4312 |
| 1870.4          | 40.0000 | 13.5214 |  | 1870.4          | 52.8897 | 14.4826 |
| 1871.6          | 40.0003 | 13.4953 |  | 1871.6          | 52.8321 | 14.4834 |
| 1872.8          | 40.0005 | 13.5254 |  | 1872.8          | 52.8706 | 14.5123 |
| 1874.0          | 40.0008 | 13.4680 |  | 1874.0          | 52.7970 | 14.5207 |
| 1875.2          | 40.0010 | 13.5021 |  | 1875.2          | 52.8602 | 14.5839 |
| 1876.4          | 40.0013 | 13.5001 |  | 1876.4          | 52.7633 | 14.5067 |
| 1877.6          | 40.0015 | 13.5646 |  | 1877.6          | 52.8656 | 14.5867 |
| 1878.8          | 40.0018 | 13.4602 |  | 1878.8          | 52.8934 | 14.7186 |
| 1880.0          | 40.0020 | 13.4054 |  | 1880.0          | 52.7757 | 14.7375 |
| 1881.2          | 40.0023 | 13.4541 |  | 1881.2          | 52.7339 | 14.7346 |
| 1882.4          | 40.0025 | 13.4767 |  | 1882.4          | 52.8295 | 14.7059 |
| 1883.6          | 40.0028 | 13.4455 |  | 1883.6          | 52.7950 | 14.6620 |
| 1884.8          | 40.0030 | 13.4461 |  | 1884.8          | 52.8199 | 14.6847 |
| 1886.0          | 40.0033 | 13.4454 |  | 1886.0          | 52.8551 | 14.6169 |
| 1887.2          | 40.0035 | 13.4406 |  | 1887.2          | 52.8359 | 14.5931 |
| 1888.4          | 40.0038 | 13.4356 |  | 1888.4          | 52.9256 | 14.6274 |
| 1889.6          | 40.0040 | 13.4309 |  | 1889.6          | 52.8561 | 14.6320 |
| 1890.8          | 40.0043 | 13.4260 |  | 1890.8          | 52.9018 | 14.6888 |
| 1892.0          | 40.0045 | 13.4212 |  | 1892.0          | 52.8898 | 14.4850 |
| 1893.2          | 40.0048 | 13.4163 |  | 1893.2          | 52.8622 | 14.4459 |
| 1894.4          | 40.0050 | 13.4115 |  | 1894.4          | 52.8349 | 14.4950 |
| 1895.6          | 40.0053 | 13.4066 |  | 1895.6          | 52.8277 | 14.8288 |
| 1896.8          | 40.0055 | 13.4018 |  | 1896.8          | 52.8176 | 14.8269 |
| 1898.0          | 40.0058 | 13.3969 |  | 1898.0          | 52.8179 | 14.8075 |
| 1899.2          | 40.0060 | 13.3921 |  | 1899.2          | 52.8949 | 14.8079 |
| 1900.4          | 40.0063 | 13.3872 |  | 1900.4          | 52.8599 | 14.7066 |
| 1901.6          | 40.0065 | 13.3824 |  | 1901.6          | 52.8633 | 14.7959 |
| 1902.8          | 40.0068 | 13.3775 |  | 1902.8          | 52.8324 | 14.7559 |
| 1904.0          | 40.0070 | 13.3727 |  | 1904.0          | 52.9141 | 14.7247 |
| 1905.2          | 40.0073 | 13.3678 |  | 1905.2          | 52.8259 | 14.6933 |
| 1906.4          | 40.0075 | 13.3630 |  | 1906.4          | 52.8158 | 14.6182 |
| 1907.6          | 40.0078 | 13.3582 |  | 1907.6          | 52.7415 | 14.7350 |
| 1908.8          | 40.0080 | 13.3533 |  | 1908.8          | 52.8258 | 14.6704 |
| 1910.0          | 40.0083 | 13.3485 |  | 1910.0          | 52.8523 | 14.6340 |

## System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### System Verification Setup Block Diagram

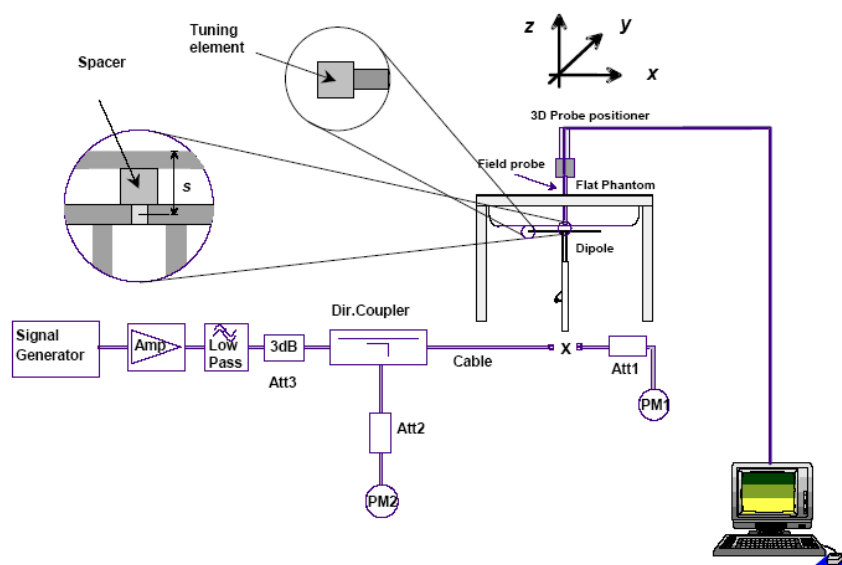

### Probe and dipole antenna List and Detail

| Manufacturer | Description             | Model          | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------------|----------------|---------------|------------------|----------------------|
| APREL        | Probe                   | ALS-E-020      | 500-00283     | 2013-10-08       | 2014-10-07           |
| APREL        | Dipole antenna(850MHz)  | ALS-D-835-S-2  | 180-00558     | 2011-08-25       | 2014-08-24           |
| APREL        | Dipole antenna(1900MHz) | ALS-D-1900-S-2 | 210-00710     | 2011-08-25       | 2014-08-24           |

### System Accuracy Check Results

| Date      | Frequency Band | Liquid Type | Measured SAR (W/Kg) |        | Target Value (W/Kg) | Delta (%) | Tolerance (%) |
|-----------|----------------|-------------|---------------------|--------|---------------------|-----------|---------------|
| 2014-3-25 | 835            | Head        | 1g                  | 9.725  | 9.59                | 1.408     | $\pm 10$      |
|           |                | Body        | 1g                  | 9.529  | 9.684               | -1.601    | $\pm 10$      |
|           | 1900           | Head        | 1g                  | 39.901 | 39.648              | 0.638     | $\pm 10$      |
|           |                | Body        | 1g                  | 39.489 | 39.769              | -0.704    | $\pm 10$      |

\*All SAR values are normalized to 1 Watt forward power.

**SAR SYSTEM VALIDATION DATA****Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 835 MHz Head Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558****Product Data**

Device Name : Dipole 835 MHz  
Serial No. : 180-00558  
Type : Dipole  
Model : ALS-D-835-S-2  
Frequency Band : 835  
Max. Transmit Pwr : 1 W  
Drift Time : 3 min(s)  
Power Drift-Start : 9.859 W/kg  
Power Drift-Finish : 9.804 W/kg  
Power Drift (%) : -0.576

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Default  
Phantom Data

**Tissue Data**

Type : Head  
Serial No. : 270-01002  
Frequency : 835.0 MHz  
Last Calib. Date : 25-Mar-2014  
Temperature : 20.00 °C  
Ambient Temp. : 21.00 °C  
Humidity : 56.00 RH%  
Epsilon : 41.36 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m


**Probe Data**

Name : E-Field  
Model : E-020  
Type : E-Field Triangle  
Serial No. : 500-00283  
Last Calib. Date : 08-Oct-2013  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

**Measurement Data**

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 21.00 °C  
Ambient Temp. : 21.00 °C  
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.725 W/kg  
10 gram SAR value : 6.617 W/kg  
Area Scan Peak SAR : 12.277 W/kg  
Zoom Scan Peak SAR : 15.128 W/kg

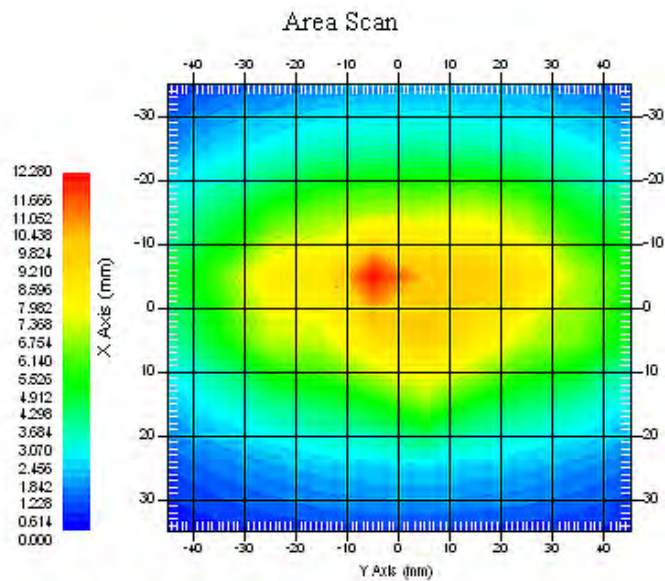

835 MHz System Validation with Head Tissue

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 835 MHz Body Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558****Product Data**

Device Name : Dipole 835 MHz  
Serial No. : 180-00558  
Type : Dipole  
Model : ALS-D-835-S-2  
Frequency Band : 835  
Max. Transmit Pwr : 1 W  
Drift Time : 3 min(s)  
Power Drift-Start : 10.021 W/kg  
Power Drift-Finish : 10.125 W/kg  
Power Drift (%) : 1.017

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Default  
Phantom Data

**Tissue Data**

Type : Body  
Serial No. : 270-02101  
Frequency : 835.0 MHz  
Last Calib. Date : 25-Mar-2014  
Temperature : 20.00 °C  
Ambient Temp. : 21.00 °C  
Humidity : 56.00 RH%  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m


**Probe Data**

Name : E-Field  
Model : E-020  
Type : E-Field Triangle  
Serial No. : 500-00283  
Last Calib. Date : 08-Oct-2013  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

**Measurement Data**

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 21.00 °C  
Ambient Temp. : 21.00 °C  
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.529 W/kg  
10 gram SAR value : 6.317 W/kg  
Area Scan Peak SAR : 10.755 W/kg  
Zoom Scan Peak SAR : 15.924 W/kg

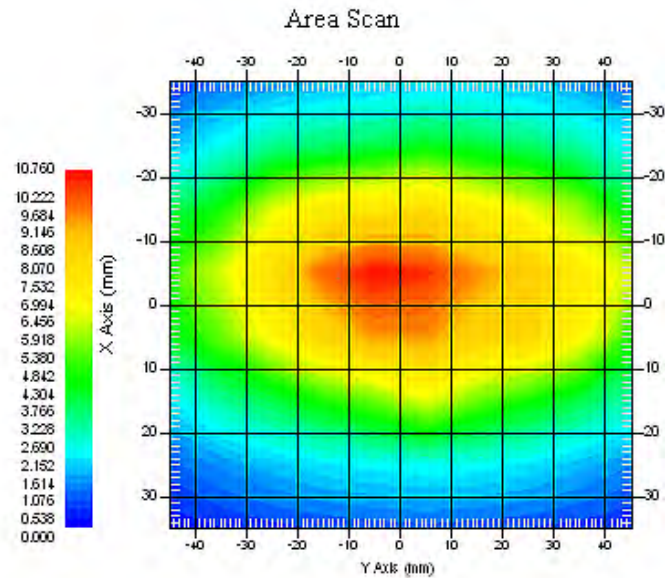

835 MHz System Validation with Body Tissue

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 1900 MHz Head Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710****Product Data**

Device Name : Dipole 1900MHz  
Serial No. : 210-00710  
Type : Dipole  
Model : ALS-D-1900-S-2  
Frequency Band : 1900  
Max. Transmit Pwr : 1 W  
Drift Time : 3 min(s)  
Power Drift-Start : 40.528 W/kg  
Power Drift-Finish : 40.001 W/kg  
Power Drift (%) : -1.257

**Phantom Data**

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Default

**Tissue Data**

Type : Head  
Serial No. : 295-01103  
Frequency : 1900.00 MHz  
Last Calib. Date : 25-Mar-2014  
Temperature : 20.00 °C  
Ambient Temp. : 21.00 °C  
Humidity : 56.00 RH%  
Epsilon : 40.01 F/m  
Sigma : 1.41 S/m  
Density : 1000.00 kg/cu. M


**Probe Data**

Name : E-Field  
Model : E-020  
Type : E-Field Triangle  
Serial No. : 500-00283  
Last Calib. Date : 08-Oct-2013  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 5.2  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

**Measurement Data**

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 20.00 °C  
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.901 W/kg  
10 gram SAR value : 20.418 W/kg  
Area Scan Peak SAR : 44.837 W/kg  
Zoom Scan Peak SAR : 89.025 W/kg

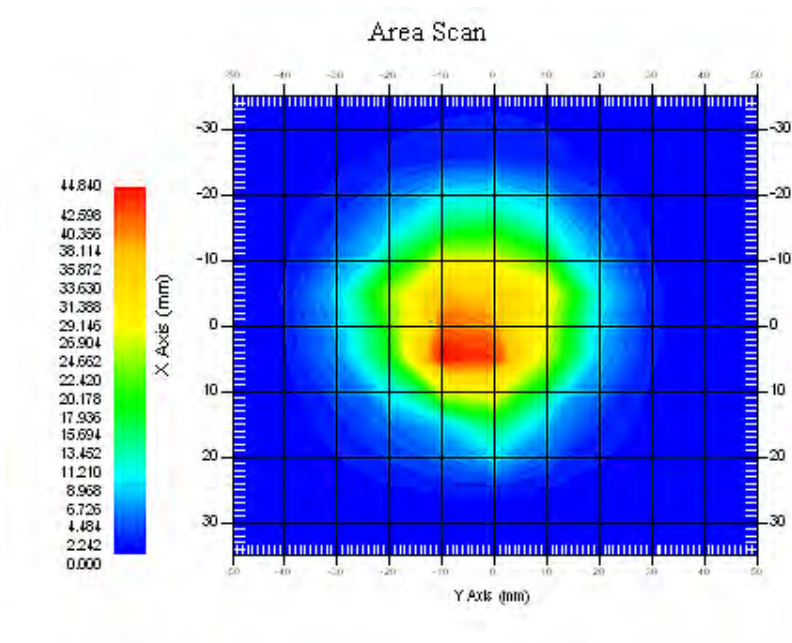

**1900 MHz System Validation with Head Tissue**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 1900 MHz Body Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

## Product Data

Device Name : Dipole 1900MHz  
Serial No. : 210-00710  
Type : Dipole  
Model : ALS-D-1900-S-2  
Frequency Band : 1900  
Max. Transmit Pwr : 1 W  
Drift Time : 3 min(s)  
Power Drift-Start : 39.685 W/kg  
Power Drift-Finish : 39.102 W/kg  
Power Drift (%) : -1.387

## Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : Default

## Tissue Data

Type : Body  
Serial No. : 295-02102  
Frequency : 1900.00 MHz  
Last Calib. Date : 25-Mar-2014  
Temperature : 20.00 °C  
Ambient Temp. : 21.00 °C  
Humidity : 56.00 RH%  
Epsilon : 52.86 F/m  
Sigma : 1.55 S/m  
Density : 1000.00 kg/cu. m


## Probe Data

Name : E-Field  
Model : E-020  
Type : E-Field Triangle  
Serial No. : 500-00283  
Last Calib. Date : 08-Oct-2013  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 5.0  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

## Measurement Data

Crest Factor : 1  
Scan Type : Complete  
Tissue Temp. : 20.00 °C  
Ambient Temp. : 21.00 °C  
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.489 W/kg  
10 gram SAR value : 20.577 W/kg  
Area Scan Peak SAR : 42.836 W/kg  
Zoom Scan Peak SAR : 81.065 W/kg

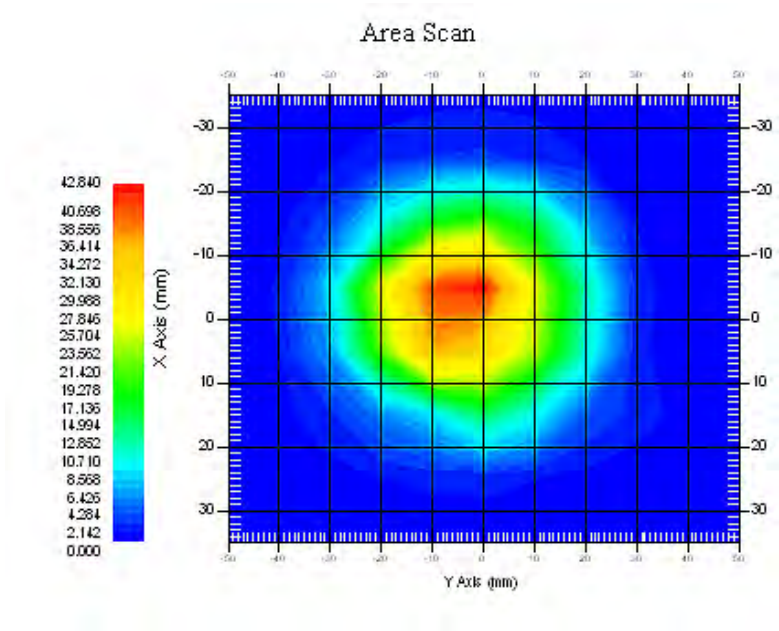



**1900 MHz System Validation with Body Tissue**

## EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper  $\frac{1}{4}$  of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

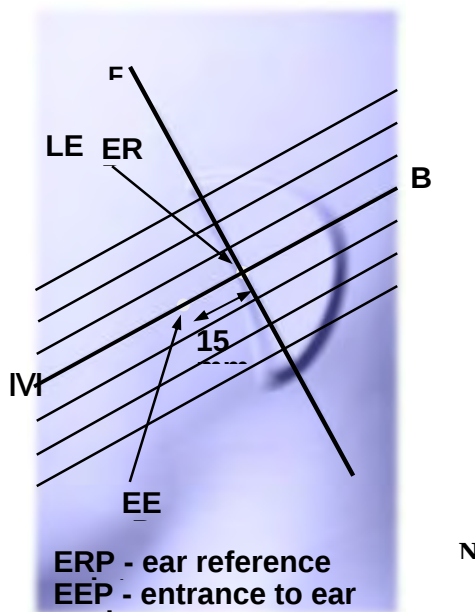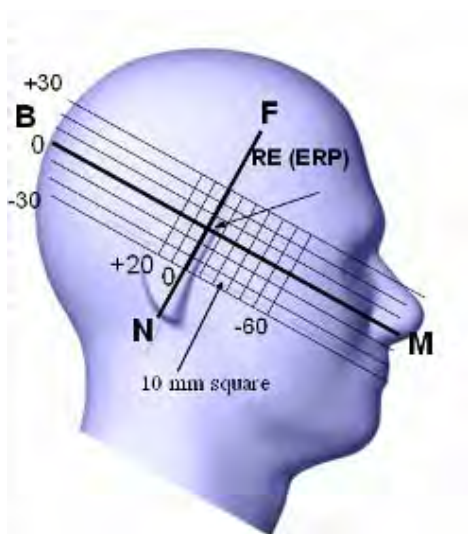

## Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- o When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

### Cheek /Touch Position

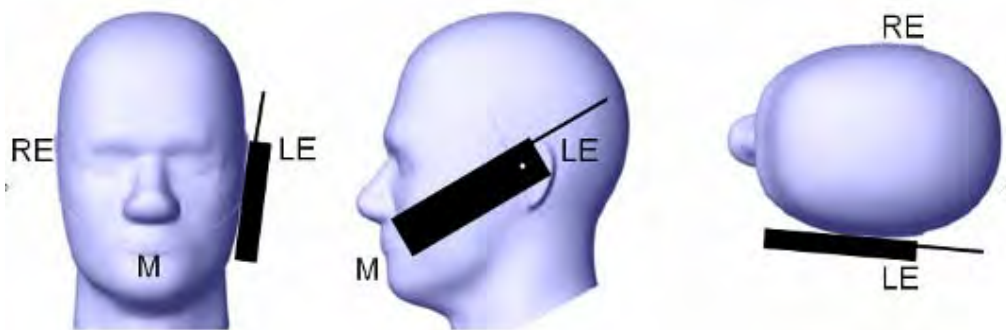

## Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

#### **Ear /Tilt 15° Position**

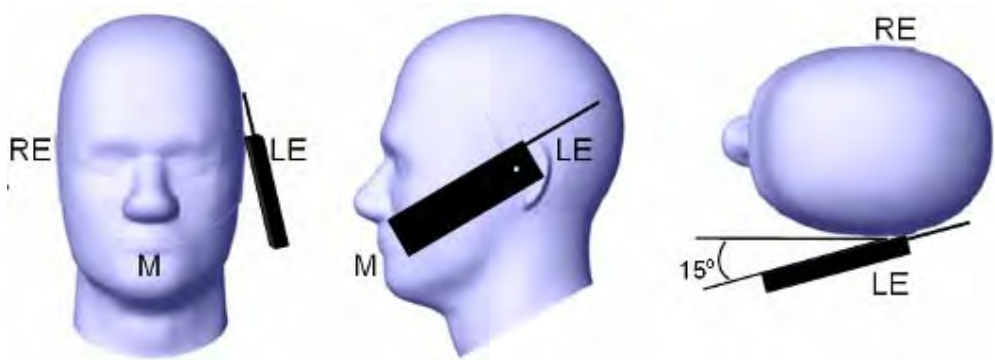

#### **Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

## SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


## CONDUCTED OUTPUT POWER MEASUREMENT

### Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

### Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

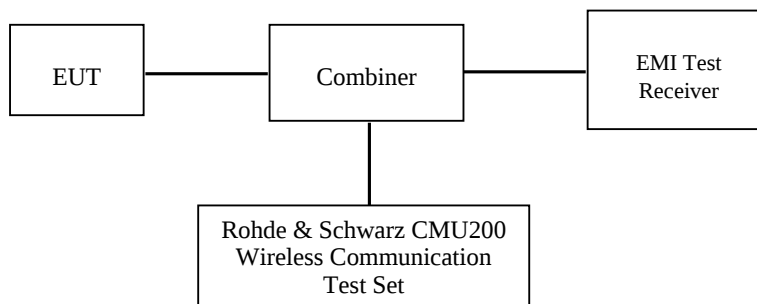

**GSM&3G**

### Maximum Output Power among production units

| Max Target Power for Production Unit (dBm) |         |        |       |
|--------------------------------------------|---------|--------|-------|
| Mode/Band                                  | Channel |        |       |
|                                            | Low     | Middle | High  |
| GSM 850                                    | 33.00   | 33.00  | 33.00 |
| GPRS 1 slot                                | 32.50   | 32.50  | 32.50 |
| GPRS 2 slot                                | 32.00   | 32.00  | 32.00 |
| GPRS 3 slot                                | 30.00   | 30.00  | 30.00 |
| GPRS 4 slot                                | 29.00   | 29.00  | 29.00 |
| PCS 1900                                   | 29.50   | 29.50  | 29.50 |
| GPRS 1 slot                                | 29.50   | 29.50  | 29.50 |
| GPRS 2 slot                                | 29.00   | 29.00  | 29.50 |
| GPRS 3 slot                                | 28.00   | 28.00  | 28.00 |
| GPRS 4 slot                                | 27.50   | 27.50  | 27.50 |
| WCDMA850                                   | 22.60   | 22.60  | 22.60 |
| WCDMA1900                                  | 22.00   | 22.00  | 22.00 |
| WiFi                                       | 9.50    | 9.50   | 9.50  |
| Bluetooth                                  | 6.50    | 6.50   | 6.50  |

**Test Results:****GSM**

| Band     | Frequency (MHz) | Conducted Output Power |                 |
|----------|-----------------|------------------------|-----------------|
|          |                 | Meas. Power (dBm)      | Meas. Power (W) |
| GSM 850  | 824.2           | 32.65                  | 1.841           |
|          | 836.6           | 32.68                  | 1.854           |
|          | 848.8           | 32.64                  | 1.837           |
| PCS 1900 | 1850.2          | 29.09                  | 0.811           |
|          | 1880.0          | 29.18                  | 0.828           |
|          | 1909.8          | 29.45                  | 0.881           |

**GPRS**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |        |         |         |
|----------|-------------|-----------------|-----------------------|--------|---------|---------|
|          |             |                 | 1 slot                | 2 slot | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 32.44                 | 31.72  | 29.97   | 28.69   |
|          | 190         | 836.6           | 32.45                 | 31.67  | 29.91   | 28.59   |
|          | 251         | 848.8           | 32.43                 | 31.65  | 29.80   | 28.45   |
| PCS 1900 | 512         | 1850.2          | 29.09                 | 28.78  | 27.62   | 27.22   |
|          | 661         | 1880.0          | 29.15                 | 28.80  | 27.64   | 27.20   |
|          | 810         | 1909.8          | 29.40                 | 29.01  | 27.68   | 27.20   |

**EGPRS**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |        |         |         |
|----------|-------------|-----------------|-----------------------|--------|---------|---------|
|          |             |                 | 1 slot                | 2 slot | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 27.43                 | 26.10  | 23.79   | 22.27   |
|          | 190         | 836.6           | 27.20                 | 25.79  | 23.44   | 21.91   |
|          | 251         | 848.8           | 26.83                 | 25.47  | 23.04   | 21.49   |
| PCS 1900 | 512         | 1850.2          | 24.73                 | 23.19  | 20.74   | 19.10   |
|          | 661         | 1880.0          | 24.50                 | 22.86  | 20.32   | 18.77   |
|          | 810         | 1909.8          | 23.93                 | 22.21  | 19.53   | 18.09   |

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot                                  | 1     | 2     | 3        | 4     |
|------------------------------------------------------|-------|-------|----------|-------|
| Duty Cycle                                           | 1:8   | 1:4   | 1:2.66   | 1:2   |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor                                         | 8     | 4     | 2.66     | 2     |

**The time based average power for GPRS**

| Band     | Channel No. | Frequency (MHz) | Time based average Power (dBm) |              |         |              |
|----------|-------------|-----------------|--------------------------------|--------------|---------|--------------|
|          |             |                 | 1 slot                         | 2 slot       | 3 slots | 4 slots      |
| GSM 850  | 128         | 824.2           | 23.44                          | 25.72        | 25.72   | 25.69        |
|          | 190         | 836.6           | 23.45                          | <b>25.67</b> | 25.66   | 25.59        |
|          | 251         | 848.8           | 23.43                          | 25.65        | 25.55   | 25.45        |
| PCS 1900 | 512         | 1850.2          | 20.09                          | 22.78        | 23.37   | 24.22        |
|          | 661         | 1880.0          | 20.15                          | 22.80        | 23.39   | <b>24.20</b> |
|          | 810         | 1909.8          | 20.40                          | 23.01        | 23.43   | 24.20        |

**The time based average power for EGPRS**

| Band     | Channel No. | Frequency (MHz) | Time based average Power (dBm) |        |         |         |
|----------|-------------|-----------------|--------------------------------|--------|---------|---------|
|          |             |                 | 1 slot                         | 2 slot | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 18.43                          | 20.10  | 19.54   | 19.27   |
|          | 190         | 836.6           | 18.20                          | 19.79  | 19.19   | 18.91   |
|          | 251         | 848.8           | 17.83                          | 19.47  | 18.79   | 18.49   |
| PCS 1900 | 512         | 1850.2          | 15.73                          | 17.19  | 16.49   | 16.10   |
|          | 661         | 1880.0          | 15.50                          | 16.86  | 16.07   | 15.77   |
|          | 810         | 1909.8          | 14.93                          | 16.21  | 15.28   | 15.09   |

**Note:**

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2 timeslots has been activated separately with power level 5(850 MHz band) and 0(1900 MHz band).
4. For E-GRPS, 1, 2, 3 and 4 timeslots has been activated separately with power control level 8(850 MHz band) and 2(1900 MHz band).
5. The max average output power of the GPRS mode is more than 2 dB higher than the EGPRS measured in the same frequency band, according to IEEE1528, the SAR of EGPRS mode is not required.

**WCDMA-Release 99:**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                       |                                       |              |
|---------------------------------------|---------------------------------------|--------------|
| <b>WCDMA<br/>General<br/>Settings</b> | <b>Loopback Mode</b>                  | Test Mode 1  |
|                                       | <b>Rel99 RMC</b>                      | 12.2kbps RMC |
|                                       | <b>Power Control<br/>Algorithm</b>    | Algorithm2   |
|                                       | <b><math>\beta_c / \beta_d</math></b> | 8/15         |

**Results (12.2kbps RMC)**

| <b>Band</b> | <b>Frequency<br/>(MHz)</b> | <b>Channel NO.</b> | <b>Conducted Output Power</b> |               |
|-------------|----------------------------|--------------------|-------------------------------|---------------|
|             |                            |                    | <b>(dBm)</b>                  | <b>(Watt)</b> |
| WCDMA 850   | 826.4                      | 4132               | 22.28                         | 0.169         |
|             | 836.6                      | 4183               | 22.53                         | 0.179         |
|             | 846.6                      | 4233               | 22.32                         | 0.171         |
| WCDMA 1900  | 1852.4                     | 9262               | 21.95                         | 0.157         |
|             | 1880.0                     | 9400               | 21.93                         | 0.156         |
|             | 1907.6                     | 9538               | 21.72                         | 0.149         |

**WCDMA HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                               | Mode                            | HSDPA        | HSDPA | HSDPA | HSDPA |
|-------------------------------|---------------------------------|--------------|-------|-------|-------|
|                               | Subset                          | 1            | 2     | 3     | 4     |
| WCDMA<br>General<br>Settings  | Loopback Mode                   | Test Mode 1  |       |       |       |
|                               | Rel99 RMC                       | 12.2kbps RMC |       |       |       |
|                               | HSDPA FRC                       | H-Set1       |       |       |       |
|                               | Power Control Algorithm         | Algorithm2   |       |       |       |
|                               | $\beta_c$                       | 2/15         | 12/15 | 15/15 | 15/15 |
|                               | $\beta_d$                       | 15/15        | 15/15 | 8/15  | 4/15  |
|                               | $\beta_d$ (SF)                  | 64           |       |       |       |
|                               | $\beta_c / \beta_d$             | 2/15         | 12/15 | 15/8  | 15/4  |
|                               | $\beta_{hs}$                    | 4/15         | 24/15 | 30/15 | 30/15 |
|                               | MPR(dB)                         | 0            | 0     | 0.5   | 0.5   |
| HSDPA<br>Specific<br>Settings | $D_{ACK}$                       | 8            |       |       |       |
|                               | $D_{NAK}$                       | 8            |       |       |       |
|                               | $D_{CQI}$                       | 8            |       |       |       |
|                               | Ack-Nack repetition factor      | 3            |       |       |       |
|                               | CQI Feedback                    | 4ms          |       |       |       |
|                               | CQI Repetition Factor           | 2            |       |       |       |
|                               | $A_{hs} = \beta_{hs} / \beta_c$ | 30/15        |       |       |       |

**Results (HSDPA)**

| Band          | Frequency<br>(MHz) | Channel NO. | Conducted Output Power (dBm) |          |          |          |
|---------------|--------------------|-------------|------------------------------|----------|----------|----------|
|               |                    |             | Subset 1                     | Subset 2 | Subset 3 | Subset 4 |
| WCDMA<br>850  | 826.4              | 4132        | 21.15                        | 21.13    | 21.08    | 21.19    |
|               | 836.6              | 4183        | 21.43                        | 21.46    | 21.33    | 21.45    |
|               | 846.6              | 4233        | 21.29                        | 21.24    | 20.99    | 21.20    |
| WCDMA<br>1900 | 1852.4             | 9262        | 20.86                        | 20.73    | 20.65    | 20.89    |
|               | 1880.0             | 9400        | 20.95                        | 20.91    | 20.87    | 20.92    |
|               | 1907.6             | 9538        | 20.71                        | 20.68    | 20.64    | 20.73    |

# WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                         | Mode                             | HSUPA                                                                                                                                        | HSUPA | HSUPA                                                | HSUPA                                                                                                                                        | HSUPA |
|-------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------|
|                         | Subset                           | 1                                                                                                                                            | 2     | 3                                                    | 4                                                                                                                                            | 5     |
| WCDMA General Settings  | Loopback Mode                    | Test Mode 1                                                                                                                                  |       |                                                      |                                                                                                                                              |       |
|                         | Rel99 RMC                        | 12.2kbps RMC                                                                                                                                 |       |                                                      |                                                                                                                                              |       |
|                         | HSDPA FRC                        | H-Set1                                                                                                                                       |       |                                                      |                                                                                                                                              |       |
|                         | HSUPA Test                       | HSUPA Loopback                                                                                                                               |       |                                                      |                                                                                                                                              |       |
|                         | Power Control Algorithm          | Algorithm2                                                                                                                                   |       |                                                      |                                                                                                                                              |       |
|                         | $\beta_c$                        | 11/15                                                                                                                                        | 6/15  | 15/15                                                | 2/15                                                                                                                                         | 15/15 |
|                         | $\beta_d$                        | 15/15                                                                                                                                        | 15/15 | 9/15                                                 | 15/15                                                                                                                                        | 0     |
|                         | $\beta_{ec}$                     | 209/225                                                                                                                                      | 12/15 | 30/15                                                | 2/15                                                                                                                                         | 5/15  |
|                         | $\beta_c / \beta_d$              | 11/15                                                                                                                                        | 6/15  | 15/9                                                 | 2/15                                                                                                                                         | -     |
|                         | $\beta_{hs}$                     | 22/15                                                                                                                                        | 12/15 | 30/15                                                | 4/15                                                                                                                                         | 5/15  |
|                         | CM(dB)                           | 1.0                                                                                                                                          | 3.0   | 2.0                                                  | 3.0                                                                                                                                          | 1.0   |
|                         | MPR(dB)                          | 0                                                                                                                                            | 2     | 1                                                    | 2                                                                                                                                            | 0     |
| HSDPA Specific Settings | DACK                             | 8                                                                                                                                            |       |                                                      |                                                                                                                                              |       |
|                         | DNAK                             | 8                                                                                                                                            |       |                                                      |                                                                                                                                              |       |
|                         | DCQI                             | 8                                                                                                                                            |       |                                                      |                                                                                                                                              |       |
|                         | Ack-Nack repetition factor       | 3                                                                                                                                            |       |                                                      |                                                                                                                                              |       |
|                         | CQI Feedback                     | 4ms                                                                                                                                          |       |                                                      |                                                                                                                                              |       |
|                         | CQI Repetition Factor            | 2                                                                                                                                            |       |                                                      |                                                                                                                                              |       |
|                         | $A_{hs} = \beta_{hs} / \beta_c$  | 30/15                                                                                                                                        |       |                                                      |                                                                                                                                              |       |
| HSUPA Specific Settings | DE-DPCCH                         | 6                                                                                                                                            | 8     | 8                                                    | 5                                                                                                                                            | 7     |
|                         | DHARQ                            | 0                                                                                                                                            | 0     | 0                                                    | 0                                                                                                                                            | 0     |
|                         | AG Index                         | 20                                                                                                                                           | 12    | 15                                                   | 17                                                                                                                                           | 21    |
|                         | ETFCI                            | 75                                                                                                                                           | 67    | 92                                                   | 71                                                                                                                                           | 81    |
|                         | Associated Max UL Data Rate kbps | 242.1                                                                                                                                        | 174.9 | 482.8                                                | 205.8                                                                                                                                        | 308.9 |
|                         | Reference E_FCI                  | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |       | E-TFCI 11<br>E-TFCI PO4<br>E-TFCI 92<br>E-TFCI PO 18 | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |       |
|                         |                                  |                                                                                                                                              |       |                                                      |                                                                                                                                              |       |

**Results (HSUPA)**

| Band       | Frequency (MHz) | Channel NO. | Conducted Output Power (dBm) |          |          |          |          |
|------------|-----------------|-------------|------------------------------|----------|----------|----------|----------|
|            |                 |             | Subset 1                     | Subset 2 | Subset 3 | Subset 4 | Subset 5 |
| WCDMA 850  | 826.4           | 4132        | 21.15                        | 21.12    | 21.17    | 21.14    | 21.13    |
|            | 836.6           | 4183        | 21.42                        | 21.35    | 21.26    | 21.47    | 21.43    |
|            | 846.6           | 4233        | 21.27                        | 21.25    | 21.28    | 21.26    | 21.18    |
| WCDMA 1900 | 1852.4          | 9262        | 20.90                        | 20.85    | 20.79    | 20.92    | 20.89    |
|            | 1880.0          | 9400        | 20.93                        | 20.92    | 20.84    | 20.90    | 20.91    |
|            | 1907.6          | 9538        | 20.71                        | 20.69    | 20.68    | 20.65    | 20.67    |

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
3. KDB 941225 D01-Body SAR is not required for HSUPA when the maximum average output of each RF channel with HSUPA active is less than ¼ dB higher than measured without HSUPA using 12.2kbps RMC and the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

**Bluetooth**

| Mode         | Channel frequency (MHz) | Reading power (dBm) | Power output (mw) |
|--------------|-------------------------|---------------------|-------------------|
| BDR(GFSK)    | (Low)2402               | 5.57                | 3.606             |
|              | (Middle)2441            | 6.12                | 4.093             |
|              | (High)2480              | 6.23                | 4.180             |
| EDR(4-DQPSK) | (Low)2402               | 5.26                | 3.357             |
|              | (Middle)2441            | 5.81                | 3.811             |
|              | (High)2480              | 5.87                | 3.864             |
| EDR-8DPSK    | (Low)2402               | 5.56                | 3.597             |
|              | (Middle)2441            | 6.08                | 4.055             |
|              | (High)2480              | 6.25                | 4.217             |

**WiFi**

| Band         | Frequency<br>(MHz) | Conducted Output Power |       |
|--------------|--------------------|------------------------|-------|
|              |                    | (dBm)                  | (mw)  |
| 802.11b      | 2412               | 9.10                   | 8.128 |
|              | 2437               | 9.18                   | 8.279 |
|              | 2462               | 9.18                   | 8.279 |
| 802.11g      | 2412               | 8.9                    | 7.762 |
|              | 2437               | 9.09                   | 8.110 |
|              | 2462               | 9.07                   | 8.072 |
| 802.11n-HT20 | 2412               | 8.95                   | 7.852 |
|              | 2437               | 9.09                   | 8.110 |
|              | 2462               | 9.09                   | 8.110 |
| 802.11n-HT40 | 2422               | 8.37                   | 6.871 |
|              | 2437               | 8.38                   | 6.887 |
|              | 2452               | 8.49                   | 7.063 |

**Note:**

1. The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n-HT20, 13.5Mbps for 802.11n-HT40.

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

### SAR Test Data

#### Environmental Conditions

|                    |                |
|--------------------|----------------|
| Temperature:       | 21-24 °C       |
| Relative Humidity: | 50-53 %        |
| ATM Pressure:      | 1001-1002 mbar |

Testing was performed by Wilson Chen from 2014-3-25 to 2014-3-26.

#### GSM 850:

| EUT Position                   | Frequency (MHz) |       | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------------------|-----------------|-------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                                | Channel         | MHz   |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Left Head Cheek                | 128(Low)        | 824.2 | GSM       | -2.745          | 32.65                  | 33.00                  | 1.084             | 0.659     | 0.714        |
|                                | 190(Middle)     | 836.6 | GSM       | 1.958           | 32.68                  | 33.00                  | 1.076             | 0.675     | <b>0.726</b> |
|                                | 251(High)       | 848.8 | GSM       | -0.848          | 32.64                  | 33.00                  | 1.086             | 0.667     | 0.724        |
| Left Head Tilt                 | 128(Low)        | 824.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 190(Middle)     | 836.6 | GSM       | -2.084          | 32.68                  | 33.00                  | 1.076             | 0.376     | 0.405        |
|                                | 251(High)       | 848.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Right Head Cheek               | 128(Low)        | 824.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 190(Middle)     | 836.6 | GSM       | -0.792          | 32.68                  | 33.00                  | 1.076             | 0.639     | 0.688        |
|                                | 251(High)       | 848.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Right Head Tilt                | 128(Low)        | 824.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 190(Middle)     | 836.6 | GSM       | 1.558           | 32.68                  | 33.00                  | 1.076             | 0.359     | 0.386        |
|                                | 251(High)       | 848.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Body-Front With Headset (10mm) | 128(Low)        | 824.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 190(Middle)     | 836.6 | GSM       | -1.753          | 32.68                  | 33.00                  | 1.076             | 0.488     | 0.525        |
|                                | 251(High)       | 848.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Body-Back With Headset (10mm)  | 128(Low)        | 824.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 190(Middle)     | 836.6 | GSM       | 2.327           | 32.68                  | 33.00                  | 1.076             | 0.728     | <b>0.783</b> |
|                                | 251(High)       | 848.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |

**PCS Band:**

| EUT Position                   | Frequency (MHz) |        | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------------------|-----------------|--------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                                | Channel         | MHz    |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Left Head Cheek                | 512(Low)        | 1850.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 661(Middle)     | 1880.0 | GSM       | -2.174          | 29.18                  | 29.50                  | 1.076             | 0.612     | 0.659        |
|                                | 810(High)       | 1909.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Left Head Tilt                 | 512(Low)        | 1850.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 661(Middle)     | 1880.0 | GSM       | 1.054           | 29.18                  | 29.50                  | 1.076             | 0.305     | 0.328        |
|                                | 810(High)       | 1909.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Right Head Cheek               | 512(Low)        | 1850.2 | GSM       | -0.789          | 29.09                  | 29.50                  | 1.117             | 0.598     | 0.668        |
|                                | 661(Middle)     | 1880.0 | GSM       | 1.097           | 29.18                  | 29.50                  | 1.076             | 0.638     | <b>0.686</b> |
|                                | 810(High)       | 1909.8 | GSM       | -1.188          | 29.45                  | 29.50                  | 1.012             | 0.625     | 0.633        |
| Right Head Tilt                | 512(Low)        | 1850.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 661(Middle)     | 1880.0 | GSM       | -1.938          | 29.18                  | 29.50                  | 1.076             | 0.312     | 0.336        |
|                                | 810(High)       | 1909.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Body-Front With Headset (10mm) | 512(Low)        | 1850.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 661(Middle)     | 1880.0 | GSM       | -1.829          | 29.18                  | 29.50                  | 1.076             | 0.412     | 0.443        |
|                                | 810(High)       | 1909.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |
| Body-Back With Headset (10mm)  | 512(Low)        | 1850.2 | GSM       | /               | /                      | /                      | /                 | /         | /            |
|                                | 661(Middle)     | 1880.0 | GSM       | 1.233           | 29.18                  | 29.50                  | 1.076             | 0.609     | <b>0.655</b> |
|                                | 810(High)       | 1909.8 | GSM       | /               | /                      | /                      | /                 | /         | /            |

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. KDB447498D01-When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.

**WCDMA 850**

| EUT Position     | Frequency (MHz) |       | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|------------------|-----------------|-------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                  | Channel         | MHz   |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Left Head Cheek  | 4132            | 826.4 | WCDMA 850 | -1.957          | 22.28                  | 22.60                  | 1.084             | 0.362     | <b>0.392</b> |
|                  | 4183            | 836.6 | WCDMA 850 | 1.108           | 22.53                  | 22.60                  | 1.076             | 0.347     | 0.373        |
|                  | 4233            | 846.6 | WCDMA 850 | 1.825           | 22.32                  | 22.60                  | 1.086             | 0.353     | 0.383        |
| Left Head Tilt   | 4132            | 826.4 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |
|                  | 4183            | 836.6 | WCDMA 850 | 0.859           | 22.53                  | 22.60                  | 1.076             | 0.155     | 0.167        |
|                  | 4233            | 846.6 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |
| Right Head Cheek | 4132            | 826.4 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |
|                  | 4183            | 836.6 | WCDMA 850 | -0.781          | 22.53                  | 22.60                  | 1.076             | 0.325     | 0.350        |
|                  | 4233            | 846.6 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |
| Right Head Tilt  | 4132            | 826.4 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |
|                  | 4183            | 836.6 | WCDMA 850 | 1.339           | 22.53                  | 22.60                  | 1.076             | 0.149     | 0.160        |
|                  | 4233            | 846.6 | WCDMA 850 | /               | /                      | /                      | /                 | /         | /            |

**WCDMA1900**

| EUT Position     | Frequency (MHz) |        | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|------------------|-----------------|--------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                  | Channel         | MHz    |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Left Head Cheek  | 9262            | 1852.4 | WCDMA1900 | 1.553           | 21.95                  | 22.00                  | 1.012             | 0.327     | 0.331        |
|                  | 9400            | 1880.0 | WCDMA1900 | 0.758           | 21.93                  | 22.00                  | 1.016             | 0.340     | 0.345        |
|                  | 9538            | 1907.6 | WCDMA1900 | -2.074          | 21.72                  | 22.00                  | 1.067             | 0.359     | <b>0.383</b> |
| Left Head Tilt   | 9262            | 1852.4 | WCDMA1900 | 1.639           | 21.95                  | 22.00                  | 1.012             | 0.151     | 0.153        |
|                  | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                  | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Right Head Cheek | 9262            | 1852.4 | WCDMA1900 | 1.567           | 21.95                  | 22.00                  | 1.012             | 0.329     | 0.333        |
|                  | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                  | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Right Head Tilt  | 9262            | 1852.4 | WCDMA1900 | -0.668          | 21.95                  | 22.00                  | 1.012             | 0.143     | 0.145        |
|                  | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                  | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |

Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
3. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than  $\frac{1}{4}$  dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.

4. KDB 941225 D01-Body SAR is not required for HSUPA when the maximum average output of each RF channel with HSUPA active is less than ¼ dB higher than measured without HSUPA using 12.2kbps RMC and the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. KDB447498D01-When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.

### Mobile Hot-Spot Test Result

The DUT is capable of functioning as a WiFi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

### Hot spot-GPRS (Frequency Band: 835)

| EUT Position       | Frequency (MHz) |       | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------|-----------------|-------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                    | Channel         | MHz   |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Body-Front (10mm)  | 128(Low)        | 824.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 190(Middle)     | 836.6 | GPRS      | 1.102           | 25.67                  | 26.00                  | 1.079             | 0.714     | 0.770        |
|                    | 251(High)       | 848.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Back (10mm)   | 128(Low)        | 824.2 | GPRS      | 1.915           | 25.72                  | 26.00                  | 1.067             | 1.185     | 1.264        |
|                    | 190(Middle)     | 836.6 | GPRS      | -1.859          | 25.67                  | 26.00                  | 1.079             | 1.205     | <b>1.300</b> |
|                    | 251(High)       | 848.8 | GPRS      | -1.375          | 25.65                  | 26.00                  | 1.084             | 1.153     | 1.250        |
| Body-Left (10mm)   | 128(Low)        | 824.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 190(Middle)     | 836.6 | GPRS      | -1.329          | 25.67                  | 26.00                  | 1.079             | 0.724     | 0.781        |
|                    | 251(High)       | 848.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Right (10mm)  | 128(Low)        | 824.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 190(Middle)     | 836.6 | GPRS      | 1.219           | 25.67                  | 26.00                  | 1.079             | 0.698     | 0.753        |
|                    | 251(High)       | 848.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Bottom (10mm) | 128(Low)        | 824.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 190(Middle)     | 836.6 | GPRS      | -0.859          | 25.67                  | 26.00                  | 1.079             | 0.701     | 0.756        |
|                    | 251(High)       | 848.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |

### Note:

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
3. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

**Hot spot-GPRS (Frequency Band: 1900)**

| EUT Position       | Frequency (MHz) |        | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------|-----------------|--------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                    | Channel         | MHz    |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Body-Front (10mm)  | 512(Low)        | 1850.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 661(Middle)     | 1880.0 | GPRS      | -1.629          | 24.20                  | 24.50                  | 1.072             | 0.559     | 0.599        |
|                    | 810(High)       | 1909.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Back (10mm)   | 512(Low)        | 1850.2 | GPRS      | -0.912          | 24.22                  | 24.50                  | 1.067             | 0.901     | 0.961        |
|                    | 661(Middle)     | 1880.0 | GPRS      | 1.293           | 24.20                  | 24.50                  | 1.072             | 0.923     | <b>0.989</b> |
|                    | 810(High)       | 1909.8 | GPRS      | 0.891           | 24.20                  | 24.50                  | 1.072             | 0.897     | 0.962        |
| Body-Left (10mm)   | 512(Low)        | 1850.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 661(Middle)     | 1880.0 | GPRS      | -1.134          | 24.20                  | 24.50                  | 1.072             | 0.625     | 0.670        |
|                    | 810(High)       | 1909.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Right (10mm)  | 512(Low)        | 1850.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 661(Middle)     | 1880.0 | GPRS      | -1.309          | 24.20                  | 24.50                  | 1.072             | 0.438     | 0.470        |
|                    | 810(High)       | 1909.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
| Body-Bottom (10mm) | 512(Low)        | 1850.2 | GPRS      | /               | /                      | /                      | /                 | /         | /            |
|                    | 661(Middle)     | 1880.0 | GPRS      | 0.686           | 24.20                  | 24.50                  | 1.072             | 0.501     | 0.537        |
|                    | 810(High)       | 1909.8 | GPRS      | /               | /                      | /                      | /                 | /         | /            |

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
3. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

**Hot Spot-WCDMA850**

| EUT Position       | Frequency (MHz) |       | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------|-----------------|-------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                    | Channel         | MHz   |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Body-Front (10mm)  | 4132            | 826.4 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
|                    | 4183            | 836.6 | WCDMA850  | -1.859          | 22.53                  | 22.60                  | 1.016             | 0.419     | 0.426        |
|                    | 4233            | 846.6 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
| Body-Back (10mm)   | 4132            | 826.4 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
|                    | 4183            | 836.6 | WCDMA850  | -2.139          | 22.53                  | 22.60                  | 1.016             | 0.637     | <b>0.647</b> |
|                    | 4233            | 846.6 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
| Body-Left (10mm)   | 4132            | 826.4 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
|                    | 4183            | 836.6 | WCDMA850  | 1.367           | 22.53                  | 22.60                  | 1.016             | 0.351     | 0.357        |
|                    | 4233            | 846.6 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
| Body-Right (10mm)  | 4132            | 826.4 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
|                    | 4183            | 836.6 | WCDMA850  | -0.986          | 22.53                  | 22.60                  | 1.016             | 0.295     | 0.300        |
|                    | 4233            | 846.6 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
| Body-Bottom (10mm) | 4132            | 826.4 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |
|                    | 4183            | 836.6 | WCDMA850  | -1.845          | 22.53                  | 22.60                  | 1.016             | 0.346     | 0.352        |
|                    | 4233            | 846.6 | WCDMA850  | /               | /                      | /                      | /                 | /         | /            |

**Hot Spot-WCDMA1900**

| EUT Position       | Frequency (MHz) |        | Test Mode | Power Drift (%) | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | FCC 1g SAR (W/Kg) |           |              |
|--------------------|-----------------|--------|-----------|-----------------|------------------------|------------------------|-------------------|-----------|--------------|
|                    | Channel         | MHz    |           |                 |                        |                        | Scaled Factor     | Meas. SAR | Scaled SAR   |
| Body-Front (10mm)  | 9262            | 1852.4 | WCDMA1900 | 1.352           | 21.95                  | 22.00                  | 1.012             | 0.386     | 0.390        |
|                    | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                    | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Body-Back (10mm)   | 9262            | 1852.4 | WCDMA1900 | 1.477           | 21.95                  | 22.00                  | 1.012             | 0.594     | <b>0.601</b> |
|                    | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                    | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Body-Left (10mm)   | 9262            | 1852.4 | WCDMA1900 | -2.345          | 21.95                  | 22.00                  | 1.012             | 0.339     | 0.343        |
|                    | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                    | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Body-Right (10mm)  | 9262            | 1852.4 | WCDMA1900 | -1.713          | 21.95                  | 22.00                  | 1.012             | 0.286     | 0.289        |
|                    | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                    | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
| Body-Bottom (10mm) | 9262            | 1852.4 | WCDMA1900 | -2.129          | 21.95                  | 22.00                  | 1.012             | 0.291     | 0.294        |
|                    | 9400            | 1880.0 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |
|                    | 9538            | 1907.6 | WCDMA1900 | /               | /                      | /                      | /                 | /         | /            |

**Note:**


1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
3. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than  $\frac{1}{4}$  dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.
4. KDB 941225 D01-Body SAR is not required for HSUPA when the maximum average output of each RF channel with HSUPA active is less than  $\frac{1}{4}$  dB higher than measured without HSUPA using 12.2kbps RMC and the maximum SAR for 12.2kbps RMC is  $< 75\%$  of SAR limit.

## SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### KDB 447498D01 General RF Exposure Guidance v05r02

Stand-alone and simultaneous SAR evaluation for a cell phone with multiple transmitters is base on the antennas distance of each radio.

#### BT, WiFi, GSM and 3G Antenna Location:

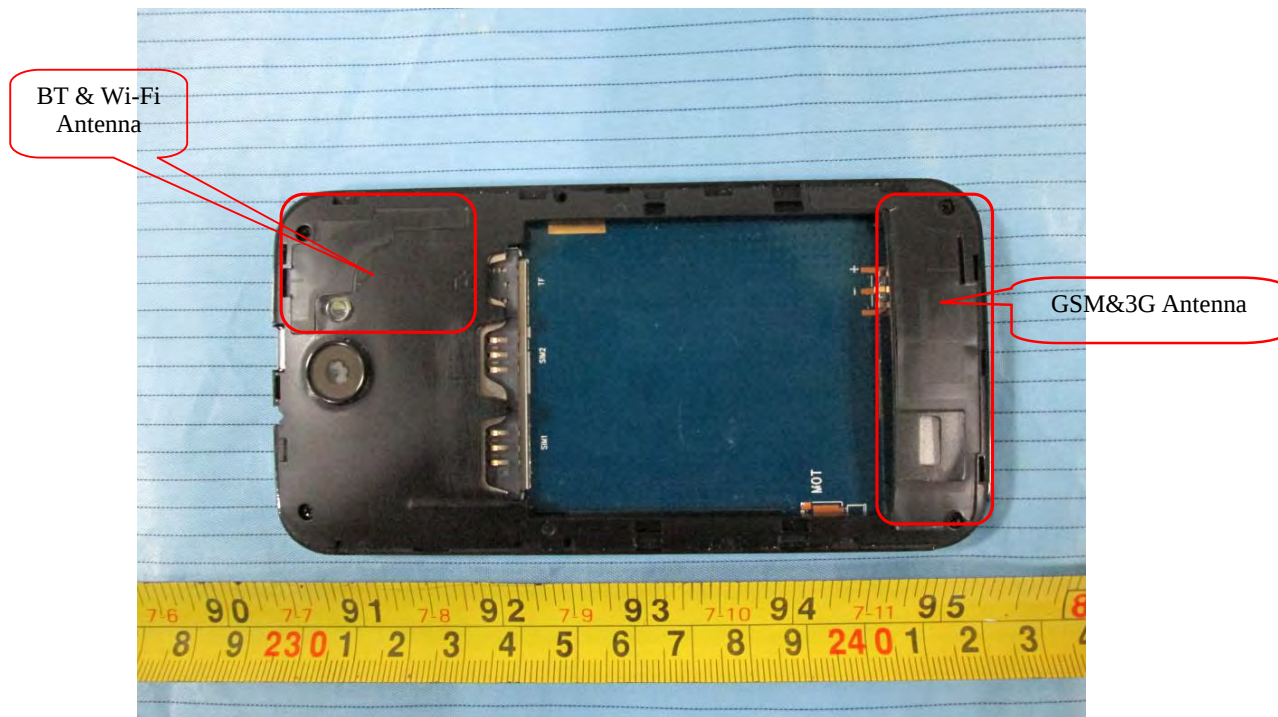

#### Antenna Information:

| Description of Simultaneous Transmit Capabilities |               |          | Antennas Distance (mm) |
|---------------------------------------------------|---------------|----------|------------------------|
| Transmitter Combination                           | Simultaneous? | Hotspot? |                        |
| GSM + GPRS                                        | ×             | ×        | 0                      |
| GSM + WCDMA                                       | ×             | ×        | 0                      |
| GSM + Bluetooth                                   | √             | ×        | 58                     |
| GSM + Wi-Fi                                       | √             | √        | 58                     |
| GPRS + WCDMA                                      | ×             | ×        | 0                      |
| GPRS + Bluetooth                                  | √             | ×        | 58                     |
| GPRS + Wi-Fi                                      | √             | √        | 58                     |
| WCDMA + Bluetooth                                 | √             | ×        | 58                     |
| WCDMA + Wi-Fi                                     | √             | √        | 58                     |

**Standalone SAR test exclusion considerations**

Head Position:

| Mode       | Frequency (MHz) | P <sub>avg</sub> (dBm) | P <sub>avg</sub> (mW) | Distance (mm) | Calculated value | Threshold (1-g) | SAR Test Exclusion |
|------------|-----------------|------------------------|-----------------------|---------------|------------------|-----------------|--------------------|
| GSM850     | 850             | 23.68                  | 233.346               | 0             | 43.0             | 3.0             | No                 |
| PCS1900    | 1900            | 20.45                  | 110.917               | 0             | 30.6             | 3.0             | No                 |
| WCDMSA850  | 850             | 22.53                  | 179.061               | 0             | 33.0             | 3.0             | No                 |
| WCDMSA1900 | 1900            | 21.95                  | 156.675               | 0             | 43.2             | 3.0             | No                 |
| WiFi       | 2450            | 9.18                   | 8.279                 | 0             | 2.6              | 3.0             | Yes                |
| Bluetooth  | 2450            | 6.25                   | 4.217                 | 0             | 1.3              | 3.0             | Yes                |

Body Position:

| Mode       | Frequency (MHz) | P <sub>avg</sub> (dBm) | P <sub>avg</sub> (mW) | Distance (mm) | Calculated value | Threshold (1-g) | SAR Test Exclusion |
|------------|-----------------|------------------------|-----------------------|---------------|------------------|-----------------|--------------------|
| GSM850     | 850             | 25.72                  | 373.250               | 10.00         | 34.4             | 3.0             | No                 |
| PCS1900    | 1900            | 24.22                  | 264.241               | 10.00         | 36.4             | 3.0             | No                 |
| WCDMSA850  | 850             | 22.53                  | 179.061               | 10.00         | 16.5             | 3.0             | No                 |
| WCDMSA1900 | 1900            | 21.95                  | 156.675               | 10.00         | 21.6             | 3.0             | No                 |
| WiFi       | 2450            | 9.18                   | 8.279                 | 10.00         | 1.3              | 3.0             | Yes                |
| Bluetooth  | 2450            | 6.25                   | 4.217                 | 10.00         | 0.7              | 3.0             | Yes                |

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**Simultaneous SAR test exclusion considerations:****GSM with BT:**

| Mode    | Position           | Reported SAR (W/kg) |       | $\Sigma$ SAR (W/kg) |
|---------|--------------------|---------------------|-------|---------------------|
|         |                    | GSM                 | BT    |                     |
| GSM850  | Left Head Cheek    | 0.726               | 0.187 | 0.913               |
|         | Left Head Tile     | 0.405               | 0.187 | 0.592               |
|         | Right Head Cheek   | 0.688               | 0.187 | 0.875               |
|         | Right Head Tilt    | 0.386               | 0.187 | 0.573               |
|         | Body-Headset-Front | 0.525               | 0.093 | 0.618               |
|         | Body-Headset-Back  | 0.783               | 0.093 | 0.876               |
| PCS1900 | Left Head Cheek    | 0.659               | 0.187 | 0.846               |
|         | Left Head Tile     | 0.328               | 0.187 | 0.515               |
|         | Right Head Cheek   | 0.686               | 0.187 | 0.873               |
|         | Right Head Tilt    | 0.336               | 0.187 | 0.523               |
|         | Body-Headset-Front | 0.443               | 0.093 | 0.536               |
|         | Body-Headset-Back  | 0.655               | 0.093 | 0.748               |

**WCDMA with BT:**

| Mode       | Position           | Reported SAR (W/kg) |       | $\Sigma$ SAR (W/kg) |
|------------|--------------------|---------------------|-------|---------------------|
|            |                    | WCDMA               | BT    |                     |
| WCDMA850   | Left Head Cheek    | 0.392               | 0.187 | 0.579               |
|            | Left Head Tile     | 0.167               | 0.187 | 0.354               |
|            | Right Head Cheek   | 0.350               | 0.187 | 0.537               |
|            | Right Head Tilt    | 0.160               | 0.187 | 0.347               |
|            | Body-Headset-Front | 0.426               | 0.093 | 0.519               |
|            | Body-Headset-Back  | 0.647               | 0.093 | 0.740               |
| WCDMA 1900 | Left Head Cheek    | 0.383               | 0.187 | 0.57                |
|            | Left Head Tile     | 0.153               | 0.187 | 0.34                |
|            | Right Head Cheek   | 0.333               | 0.187 | 0.520               |
|            | Right Head Tilt    | 0.145               | 0.187 | 0.332               |
|            | Body-Headset-Front | 0.390               | 0.093 | 0.483               |
|            | Body-Headset-Back  | 0.601               | 0.093 | 0.694               |

**GSM with Wi-Fi:**

| Mode    | Position           | Reported SAR (W/kg) |       | $\Sigma$ SAR<br>(W//kg) |
|---------|--------------------|---------------------|-------|-------------------------|
|         |                    | GSM                 | Wi-Fi |                         |
| GSM850  | Left Head Cheek    | 0.726               | 0.372 | 1.098                   |
|         | Left Head Tile     | 0.405               | 0.372 | 0.777                   |
|         | Right Head Cheek   | 0.688               | 0.372 | 1.060                   |
|         | Right Head Tilt    | 0.386               | 0.372 | 0.758                   |
|         | Body–Headset-Front | 0.525               | 0.187 | 0.712                   |
|         | Body–Headset-Back  | 0.783               | 0.187 | 0.970                   |
| PCS1900 | Left Head Cheek    | 0.659               | 0.372 | 1.031                   |
|         | Left Head Tile     | 0.328               | 0.372 | 0.700                   |
|         | Right Head Cheek   | 0.686               | 0.372 | 1.058                   |
|         | Right Head Tilt    | 0.336               | 0.372 | 0.708                   |
|         | Body–Headset-Front | 0.443               | 0.187 | 0.630                   |
|         | Body–Headset-Back  | 0.655               | 0.187 | 0.842                   |

**WCDMA with Wi-Fi:**

| Mode       | Position           | Reported SAR (W/kg) |       | $\Sigma$ SAR<br>(W//kg) |
|------------|--------------------|---------------------|-------|-------------------------|
|            |                    | WCDMA               | Wi-Fi |                         |
| WCDMA850   | Left Head Cheek    | 0.392               | 0.372 | 0.764                   |
|            | Left Head Tile     | 0.167               | 0.372 | 0.539                   |
|            | Right Head Cheek   | 0.350               | 0.372 | 0.722                   |
|            | Right Head Tilt    | 0.160               | 0.372 | 0.532                   |
|            | Body–Headset-Front | 0.426               | 0.187 | 0.613                   |
|            | Body–Headset-Back  | 0.647               | 0.187 | 0.834                   |
| WCDMA 1900 | Left Head Cheek    | 0.383               | 0.372 | 0.755                   |
|            | Left Head Tile     | 0.153               | 0.372 | 0.525                   |
|            | Right Head Cheek   | 0.333               | 0.372 | 0.705                   |
|            | Right Head Tilt    | 0.145               | 0.372 | 0.517                   |
|            | Body–Headset-Front | 0.390               | 0.187 | 0.577                   |
|            | Body–Headset-Back  | 0.601               | 0.187 | 0.788                   |

| Mode       | Frequency<br>(GHz) | Distance<br>(mm) | P <sub>avg</sub><br>(dBm) | P <sub>avg</sub><br>(mW) | Estimated <sub>1-g</sub><br>(W/kg) |
|------------|--------------------|------------------|---------------------------|--------------------------|------------------------------------|
| BT Head    | 2.45               | 0                | 6.50                      | 4.47                     | 0.187                              |
| BT Body    | 2.45               | 10               | 6.50                      | 4.47                     | 0.093                              |
| Wi-Fi Head | 2.45               | 0                | 9.50                      | 8.91                     | 0.372                              |
| Wi-Fi Body | 2.45               | 10               | 9.50                      | 8.91                     | 0.187                              |

**Note:**

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ;

where  $x = 7.5$  for 1-g SAR.

When the minimum test separation distance is  $< 5 \text{ mm}$ , a distance of  $5 \text{ mm}$  is applied to determine SAR test Exclusion

**Conclusion:**

**ΣSAR < 1.6 W/kg** therefore simultaneous transmission SAR with Volume Scans is **not** required.

**Hotspot:**

| Evaluations for Simultaneous SAR, Mobile Hot Spot Positions |                            |                      |                      |                       |                        |                     |
|-------------------------------------------------------------|----------------------------|----------------------|----------------------|-----------------------|------------------------|---------------------|
| Test Position                                               | Body-Front<br>(1.0cm)      | Body-Back<br>(1.0cm) | Body-Left<br>(1.0cm) | Body-Right<br>(1.0cm) | Body-Bottom<br>(1.0cm) | Body-Top<br>(1.0cm) |
| Mode                                                        | Stand Alone 1-g SAR (W/Kg) |                      |                      |                       |                        |                     |
| GSM850                                                      | 0.770                      | 1.300                | 0.781                | 0.753                 | 0.756                  | /                   |
| PCS1900                                                     | 0.599                      | 0.989                | 0.670                | 0.470                 | 0.537                  | /                   |
| WCDMA850                                                    | 0.426                      | 0.647                | 0.357                | 0.300                 | 0.352                  | /                   |
| WCDMA1900                                                   | 0.390                      | 0.601                | 0.343                | 0.289                 | 0.294                  | /                   |
| Wi-Fi                                                       | 0.187                      | 0.187                | 0.187                | /                     | /                      | 0.187               |
|                                                             | Σ 1-g SAR (W/Kg)           |                      |                      |                       |                        |                     |
| GSM850 + Wi-Fi                                              | 0.957                      | <b>1.487</b>         | 0.968                | /                     | /                      | /                   |
| PCS 1900 + Wi-Fi                                            | 0.786                      | 1.176                | 0.857                | /                     | /                      | /                   |
| WCDMA850 + Wi-Fi                                            | 0.613                      | 0.834                | 0.544                | /                     | /                      | /                   |
| WCDMA 1900 + Wi-Fi                                          | 0.577                      | 0.788                | 0.53                 | /                     | /                      | /                   |

**Note:**

If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.

EUT SCAN RESULTS

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (824.2 MHz Low Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.003 W/kg  
Power Drift-Finish : 0.003 W/kg  
Power Drift (%) : -2.745

Tissue Data  
Type : Head  
Frequency : 824.2 MHz  
Epsilon : 41.39 F/m  
Sigma : 0.91 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.659 W/kg  
10 gram SAR value : 0.357 W/kg  
Area Scan Peak SAR : 0.768 W/kg  
Zoom Scan Peak SAR : 1.105 W/kg

Plot 1#

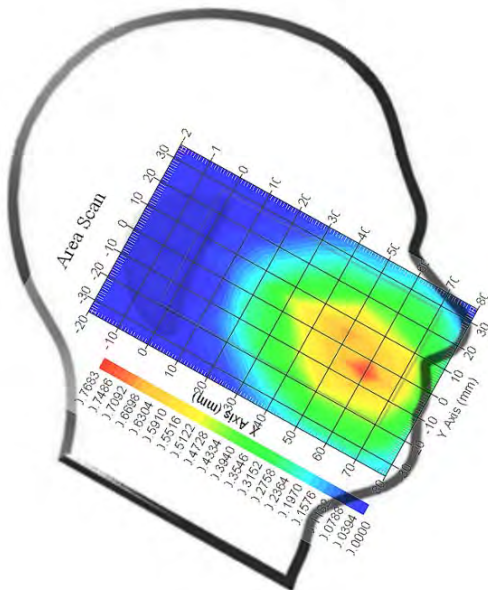

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.005 W/kg  
Power Drift-Finish : 0.005 W/kg  
Power Drift (%) : 1.958

Tissue Data  
Type : Head  
Frequency : 836.6 MHz  
Epsilon : 41.35 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.675 W/kg  
10 gram SAR value : 0.369 W/kg  
Area Scan Peak SAR : 0.755 W/kg  
Zoom Scan Peak SAR : 1.207 W/kg

Plot 2#

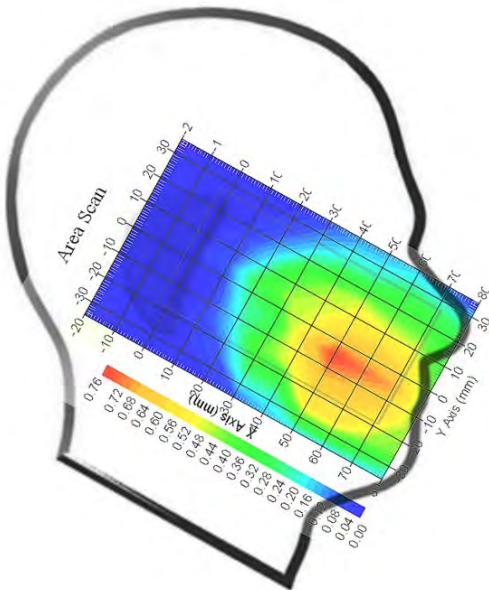

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (848.8 MHz High Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : -0.848

Tissue Data  
Type : Head  
Frequency : 848.8 MHz  
Epsilon : 41.14 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.667 W/kg  
10 gram SAR value : 0.371 W/kg  
Area Scan Peak SAR : 0.710 W/kg  
Zoom Scan Peak SAR : 1.091 W/kg

Plot 3#

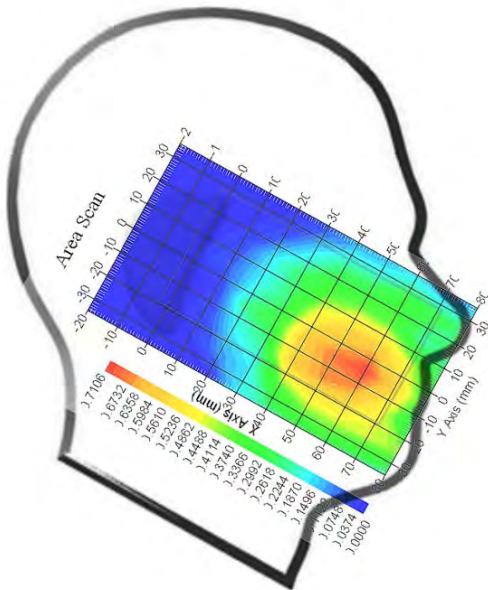

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**Left Head Tilt (836.6 MHz Middle Channel)**

Measurement Data

Test mode : GSM  
 Crest Factor : 8  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.001 W/kg  
 Power Drift-Finish : 0.001 W/kg  
 Power Drift (%) : -2.084

Tissue Data


Type : Head  
 Frequency : 836.6 MHz  
 Epsilon : 41.35 F/m  
 Sigma : 0.92 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 8  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.376 W/kg  
 10 gram SAR value : 0.234 W/kg  
 Area Scan Peak SAR : 0.395 W/kg  
 Zoom Scan Peak SAR : 0.610 W/kg

**Plot 4#**

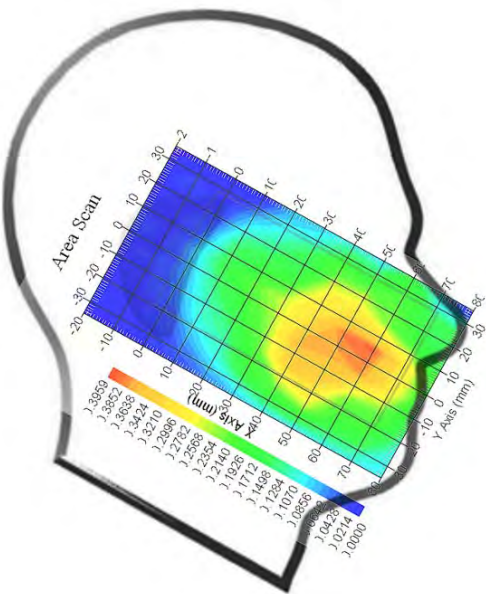

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (836.6 MHz Middle Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : -0.792

Tissue Data  
Type : Head  
Frequency : 836.6 MHz  
Epsilon : 41.35 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.639 W/kg  
10 gram SAR value : 0.337 W/kg  
Area Scan Peak SAR : 0.610 W/kg  
Zoom Scan Peak SAR : 0.918 W/kg

Plot 5#

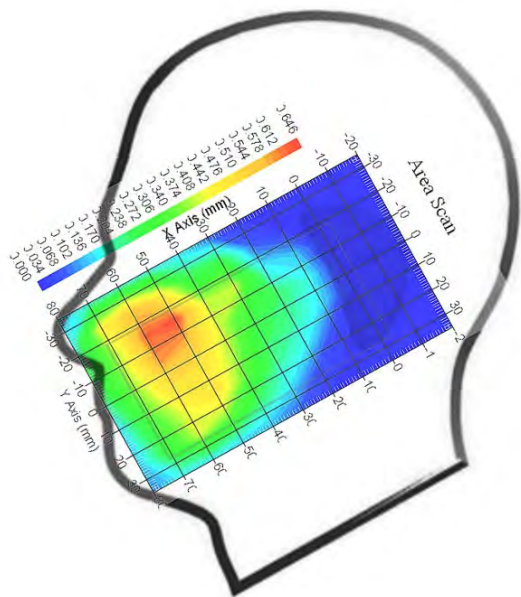

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**Right Head Tilt (836.6 MHz Middle Channel)**

Measurement Data

Test mode : GSM  
 Crest Factor : 8  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.001 W/kg  
 Power Drift-Finish : 0.001 W/kg  
 Power Drift (%) : 1.558

Tissue Data


Type : Head  
 Frequency : 836.6 MHz  
 Epsilon : 41.35 F/m  
 Sigma : 0.92 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 8  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.359 W/kg  
 10 gram SAR value : 0.225 W/kg  
 Area Scan Peak SAR : 0.384 W/kg  
 Zoom Scan Peak SAR : 0.573 W/kg

**Plot 6#**

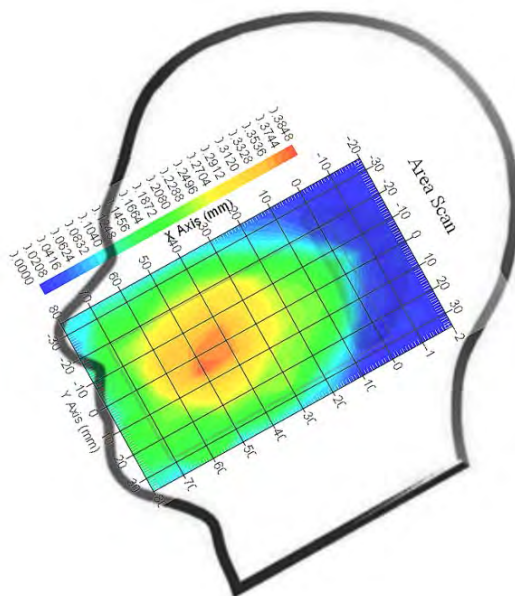

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn Front-Headset (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.419 W/kg  
Power Drift-Finish : 0.412 W/kg  
Power Drift (%) : -1.753


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.488 W/kg  
10 gram SAR value : 0.302 W/kg  
Area Scan Peak SAR : 0.539 W/kg  
Zoom Scan Peak SAR : 0.715 W/kg

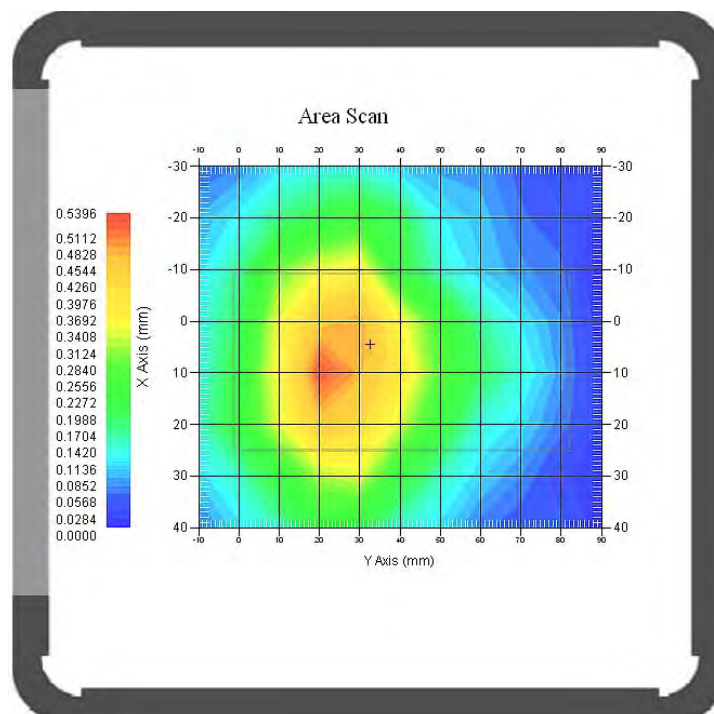**Plot 7#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn Back-Headset (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.588 W/kg  
Power Drift-Finish : 0.601 W/kg  
Power Drift (%) : 2.327


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 8  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.728 W/kg  
10 gram SAR value : 0.429 W/kg  
Area Scan Peak SAR : 0.885 W/kg  
Zoom Scan Peak SAR : 1.235 W/kg

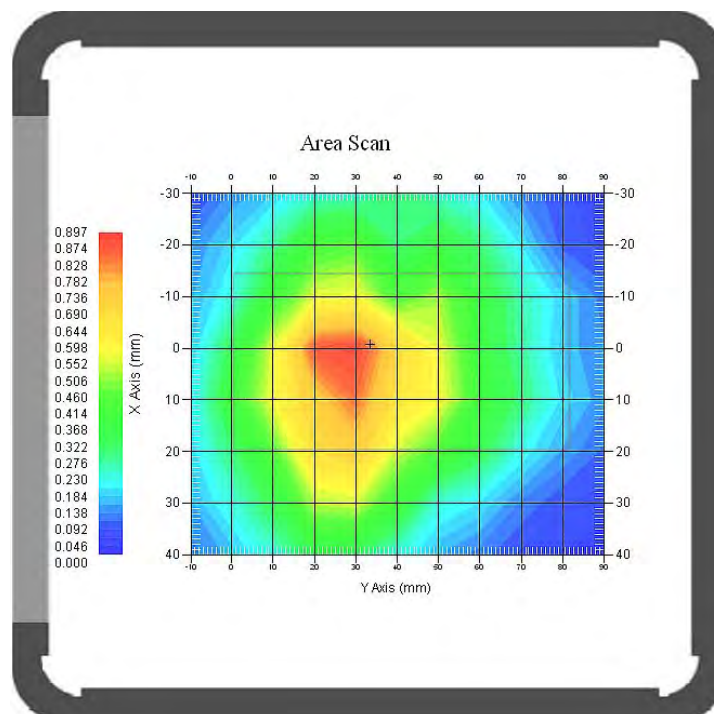**Plot 8#**

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (1880 MHz Middle Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : -2.174

Tissue Data  
Type : Head  
Frequency : 1880 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.40 S/m  
Density : 1000.00 kg/cu. M

Probe Data  
Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.612 W/kg  
10 gram SAR value : 0.359 W/kg  
Area Scan Peak SAR : 0.661 W/kg  
Zoom Scan Peak SAR : 0.914 W/kg

Plot 9#

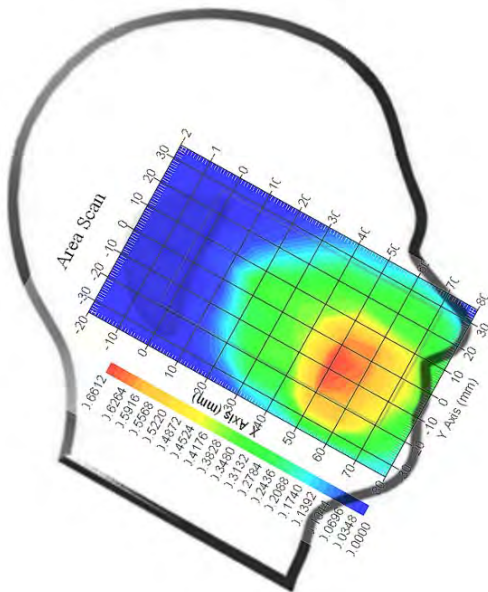

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Tilt (1880 MHz Middle Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 1.054

Tissue Data  
Type : Head  
Frequency : 1880 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.40 S/m  
Density : 1000.00 kg/cu. M

Probe Data  
Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.305 W/kg  
10 gram SAR value : 0.195 W/kg  
Area Scan Peak SAR : 0.334 W/kg  
Zoom Scan Peak SAR : 0.418 W/kg

Plot 10#

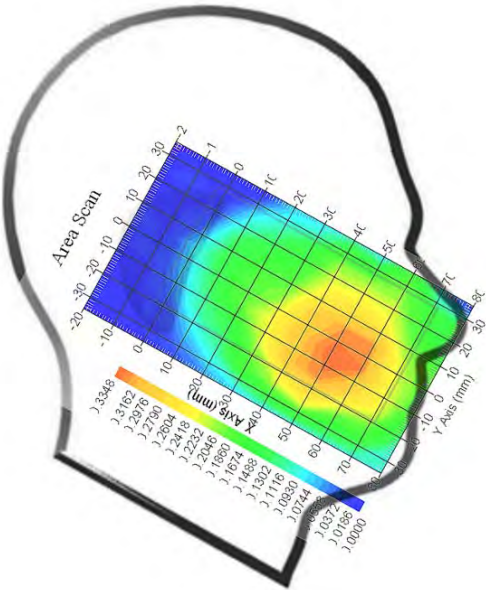

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (1850.2 MHz Low Channel)


Measurement Data  
Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : -0.789

Tissue Data  
Type : Head  
Frequency : 1850.2 MHz  
Epsilon : 39.99 F/m  
Sigma : 1.42 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.598 W/kg  
10 gram SAR value : 0.337 W/kg  
Area Scan Peak SAR : 0.634 W/kg  
Zoom Scan Peak SAR : 0.920 W/kg

Plot 11#

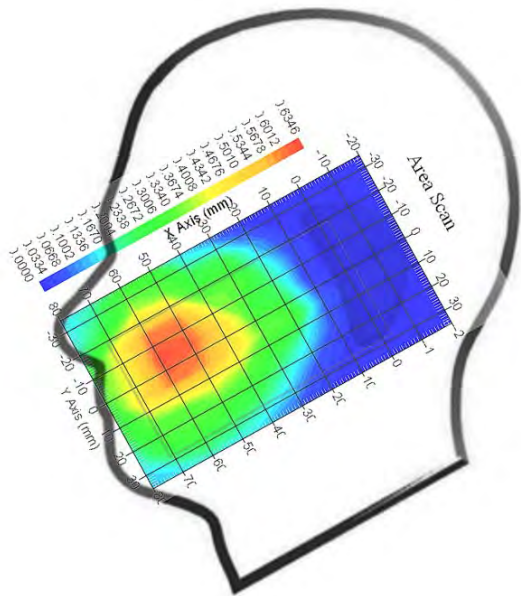

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Right Head Cheek (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 1.097


## Tissue Data

Type : Head  
Frequency : 1880 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.40 S/m  
Density : 1000.00 kg/cu. M

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.638 W/kg  
10 gram SAR value : 0.375 W/kg  
Area Scan Peak SAR : 0.695 W/kg  
Zoom Scan Peak SAR : 1.003 W/kg

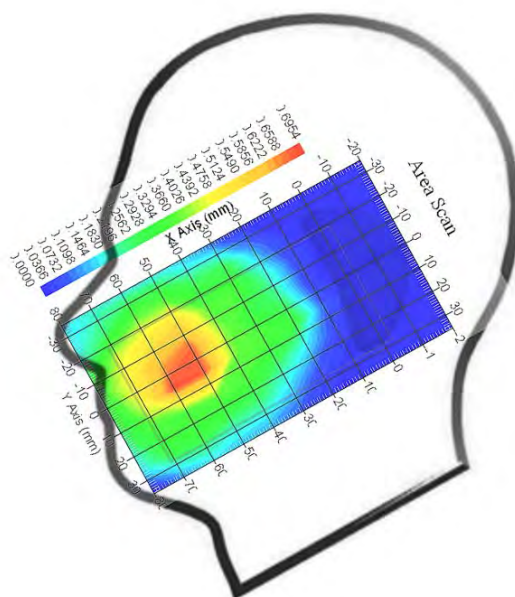**Plot 12#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Right Head Check (1909.8 MHz High Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : -1.188


## Tissue Data

Type : Head  
Frequency : 1909.8 MHz  
Epsilon : 40.01 F/m  
Sigma : 1.42 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.625 W/kg  
10 gram SAR value : 0.349 W/kg  
Area Scan Peak SAR : 0.681 W/kg  
Zoom Scan Peak SAR : 0.960 W/kg

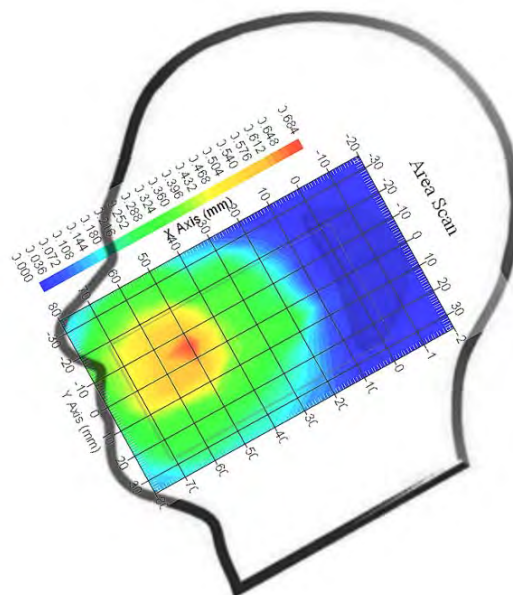**Plot 13#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Right Head Tilt (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.011 W/kg  
Power Drift-Finish : 0.011 W/kg  
Power Drift (%) : -1.938


## Tissue Data

Type : Head  
Frequency : 1880 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.40 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.312 W/kg  
10 gram SAR value : 0.189 W/kg  
Area Scan Peak SAR : 0.345 W/kg  
Zoom Scan Peak SAR : 0.518 W/kg

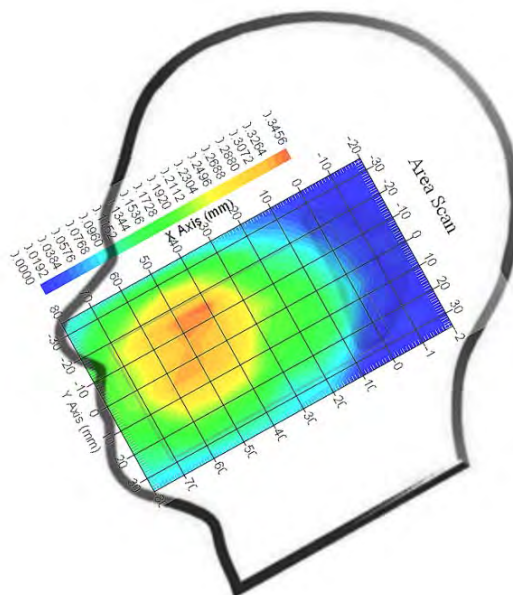**Plot 14#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn Front-Headset (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.377 W/kg  
Power Drift-Finish : 0.370 W/kg  
Power Drift (%) : -1.829


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 52.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.412 W/kg  
10 gram SAR value : 0.267 W/kg  
Area Scan Peak SAR : 0.436 W/kg  
Zoom Scan Peak SAR : 0.629 W/kg

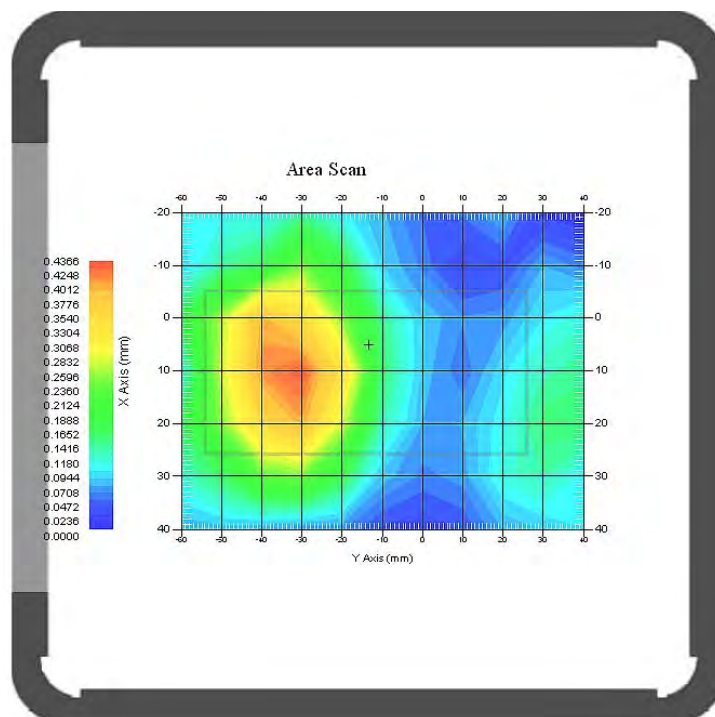**Plot 15#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn Back- Headset (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GSM  
Crest Factor : 8  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.495 W/kg  
Power Drift-Finish : 0.501W/kg  
Power Drift (%) : 1.233


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 52.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 8  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.609 W/kg  
10 gram SAR value : 0.376 W/kg  
Area Scan Peak SAR : 0.677 W/kg  
Zoom Scan Peak SAR : 1.121 W/kg

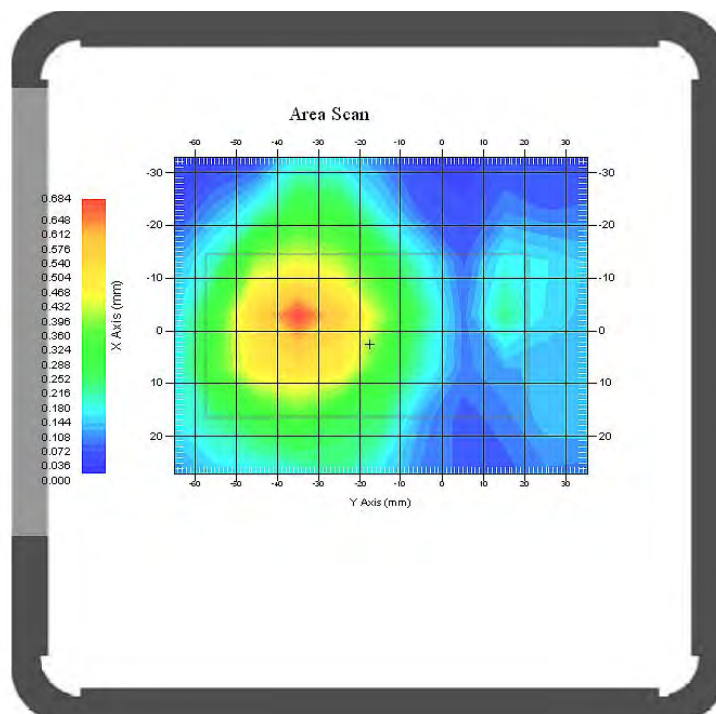**Plot 16#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA850; Left Head Cheek (826.4 MHz Low Channel)**


Measurement Data  
 Test mode : WCDMA850  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.001 W/kg  
 Power Drift-Finish : 0.001 W/kg  
 Power Drift (%) : -1.957

Tissue Data  
 Type : Head  
 Frequency : 826.4 MHz  
 Epsilon : 41.28 F/m  
 Sigma : 0.91 S/m  
 Density : 1000.00 kg/cu. m

Probe Data  
 Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 1  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.362 W/kg  
 10 gram SAR value : 0.275 W/kg  
 Area Scan Peak SAR : 0.399 W/kg  
 Zoom Scan Peak SAR : 0.520 W/kg

**Plot 17#**

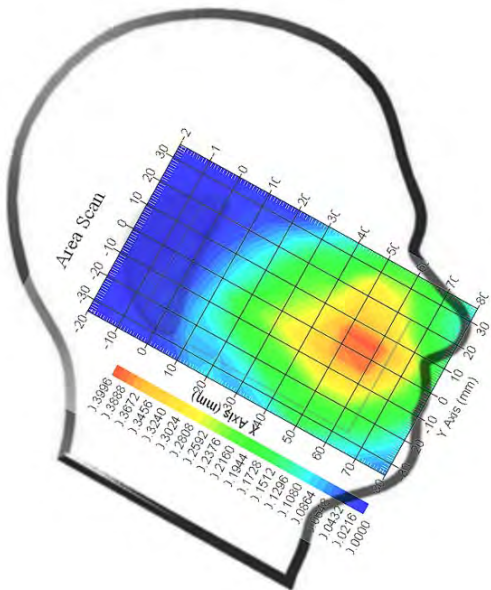

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Left Head Cheek (836.6 MHz Middle Channel)


Measurement Data  
Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.002 W/kg  
Power Drift-Finish : 0.002 W/kg  
Power Drift (%) : 1.108

Tissue Data  
Type : Head  
Frequency : 836.6 MHz  
Epsilon : 41.35 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.347 W/kg  
10 gram SAR value : 0.245 W/kg  
Area Scan Peak SAR : 0.381 W/kg  
Zoom Scan Peak SAR : 0.495 W/kg

Plot 18#

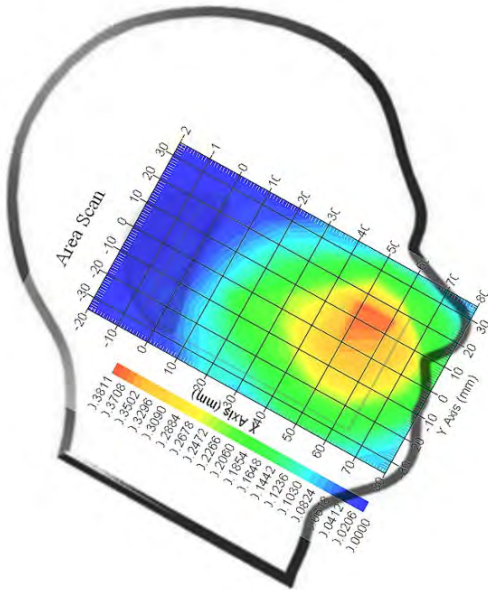

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA850; Left Head Cheek (846.6 MHz High Channel)**

## Measurement Data

Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 1.825


## Tissue Data

Type : Head  
Frequency : 846.6 MHz  
Epsilon : 41.20 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.353 W/kg  
10 gram SAR value : 0.264 W/kg  
Area Scan Peak SAR : 0.395 W/kg  
Zoom Scan Peak SAR : 0.511 W/kg

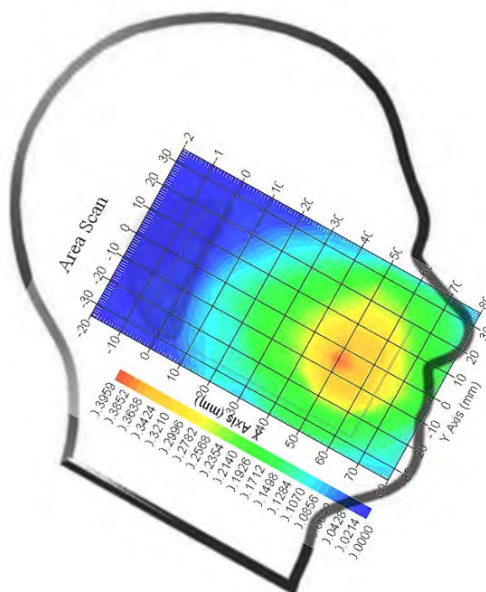**Plot 19#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA850; Left Head Tilt (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 0.859


## Tissue Data

Type : Head  
Frequency : 836.6 MHz  
Epsilon : 41.35 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.155 W/kg  
10 gram SAR value : 0.095 W/kg  
Area Scan Peak SAR : 0.178 W/kg  
Zoom Scan Peak SAR : 0.270 W/kg

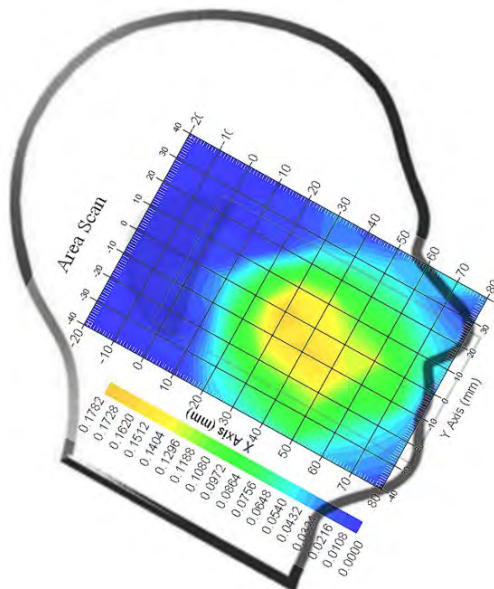**Plot 20#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA850; Right Head Cheek (836.6 MHz Middle Channel)**

Measurement Data

Test mode : WCDMA850  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.002 W/kg  
 Power Drift-Finish : 0.002 W/kg  
 Power Drift (%) : -0.781

Tissue Data


Type : Head  
 Frequency : 836.6 MHz  
 Epsilon : 41.35 F/m  
 Sigma : 0.92 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 1  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.325 W/kg  
 10 gram SAR value : 0.224 W/kg  
 Area Scan Peak SAR : 0.355 W/kg  
 Zoom Scan Peak SAR : 0.518 W/kg

**Plot 21#**

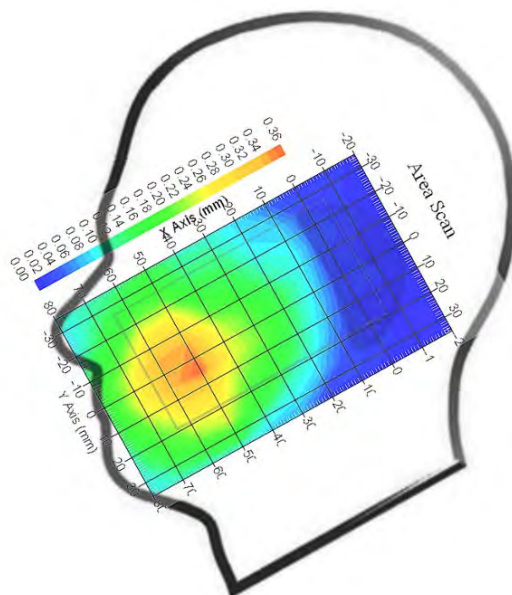

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Right Head Cheek (836.6 MHz Middle Channel)


Measurement Data  
Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.002 W/kg  
Power Drift-Finish : 0.002 W/kg  
Power Drift (%) : 1.339

Tissue Data  
Type : Head  
Frequency : 836.6 MHz  
Epsilon : 41.35 F/m  
Sigma : 0.92 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.149 W/kg  
10 gram SAR value : 0.091 W/kg  
Area Scan Peak SAR : 0.174 W/kg  
Zoom Scan Peak SAR : 0.258 W/kg

Plot 22#

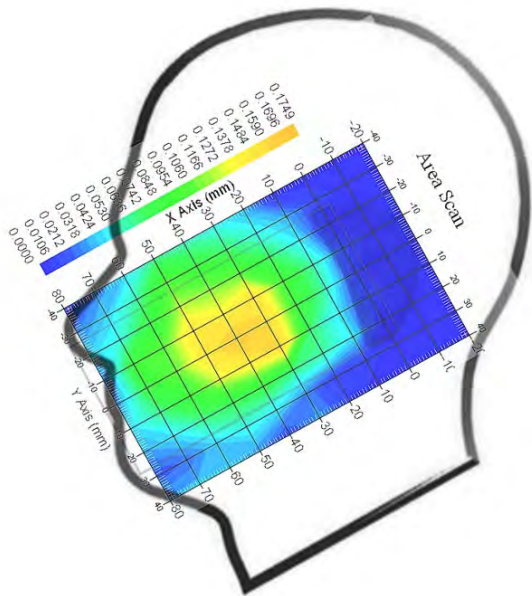

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA1900; Left Head Cheek (1852.4 MHz Low Channel)**

Measurement Data

Test mode : WCDMA1900  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.002 W/kg  
 Power Drift-Finish : 0.002 W/kg  
 Power Drift (%) : 1.553

Tissue Data


Type : Head  
 Frequency : 1852.4 MHz  
 Epsilon : 40.00 F/m  
 Sigma : 1.42 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 1900  
 Duty Cycle Factor : 1  
 Conversion Factor : 4.8  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.327 W/kg  
 10 gram SAR value : 0.186 W/kg  
 Area Scan Peak SAR : 0.363 W/kg  
 Zoom Scan Peak SAR : 0.499 W/kg

**Plot 23#**

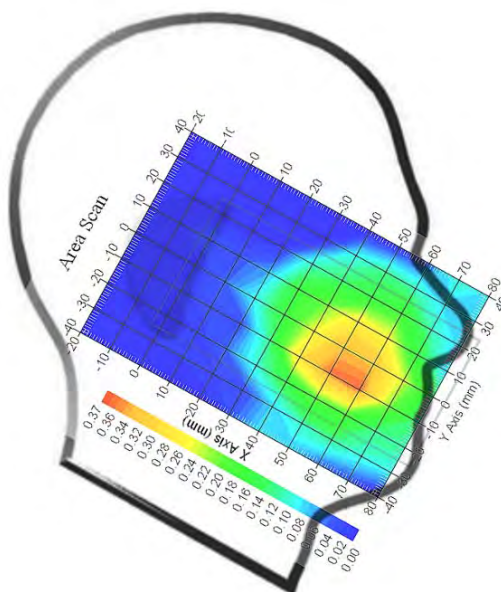

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA1900; Left Head Cheek (1880 MHz Middle Channel)**

Measurement Data

Test mode : WCDMA1900  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.005 W/kg  
 Power Drift-Finish : 0.005 W/kg  
 Power Drift (%) : 0.758

Tissue Data


Type : Head  
 Frequency : 1880 MHz  
 Epsilon : 40.00 F/m  
 Sigma : 1.40 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 1900  
 Duty Cycle Factor : 1  
 Conversion Factor : 4.8  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.340 W/kg  
 10 gram SAR value : 0.215 W/kg  
 Area Scan Peak SAR : 0.384 W/kg  
 Zoom Scan Peak SAR : 0.507 W/kg

**Plot 24#**

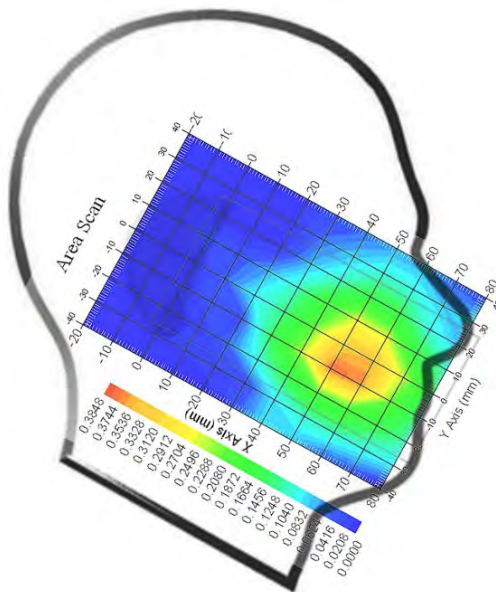

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA1900; Left Head Cheek (1907.6 MHz High Channel)**

Measurement Data

Test mode : WCDMA1900  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.001 W/kg  
 Power Drift-Finish : 0.001 W/kg  
 Power Drift (%) : -2.074

Tissue Data


Type : Head  
 Frequency : 1907.6 MHz  
 Epsilon : 40.01 F/m  
 Sigma : 1.42 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 1900  
 Duty Cycle Factor : 1  
 Conversion Factor : 4.8  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V/m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.359 W/kg  
 10 gram SAR value : 0.226 W/kg  
 Area Scan Peak SAR : 0.395 W/kg  
 Zoom Scan Peak SAR : 0.537 W/kg

**Plot 25#**

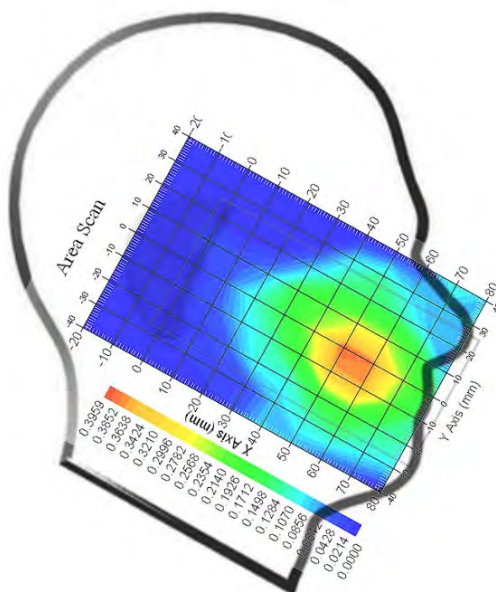

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Left Head Tilt (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 1.639


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.42 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.151 W/kg  
10 gram SAR value : 0.086 W/kg  
Area Scan Peak SAR : 0.178 W/kg  
Zoom Scan Peak SAR : 0.239 W/kg

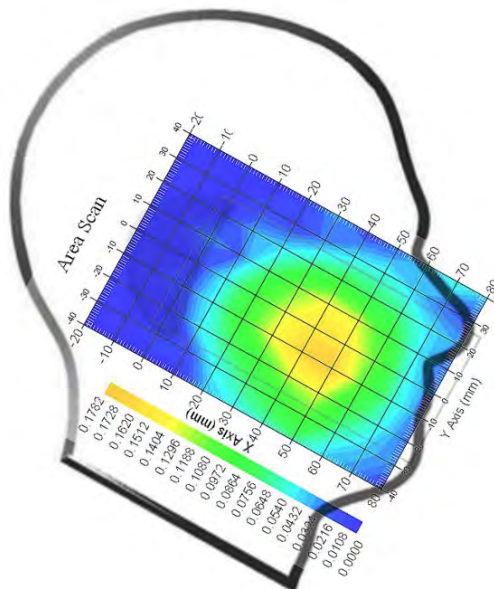**Plot 26#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Right Head Cheek (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.001 W/kg  
Power Drift-Finish : 0.001 W/kg  
Power Drift (%) : 1.567


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.42 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.329 W/kg  
10 gram SAR value : 0.201 W/kg  
Area Scan Peak SAR : 0.377 W/kg  
Zoom Scan Peak SAR : 0.480 W/kg

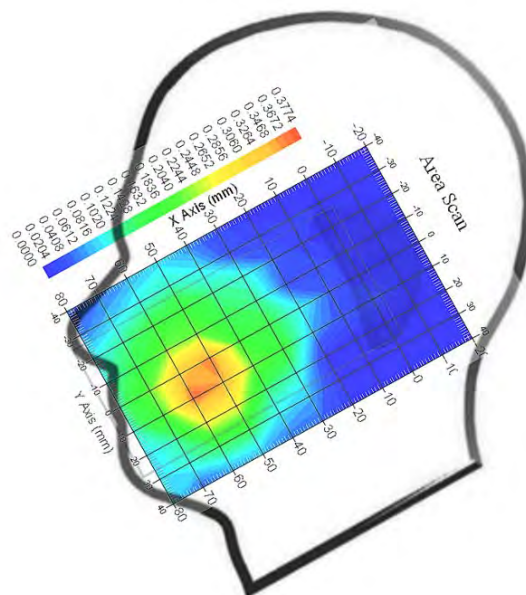**Plot 27#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Right Head Tilt (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.002 W/kg  
Power Drift-Finish : 0.002 W/kg  
Power Drift (%) : -0.668


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 40.00 F/m  
Sigma : 1.42 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.143 W/kg  
10 gram SAR value : 0.080 W/kg  
Area Scan Peak SAR : 0.168 W/kg  
Zoom Scan Peak SAR : 0.219 W/kg

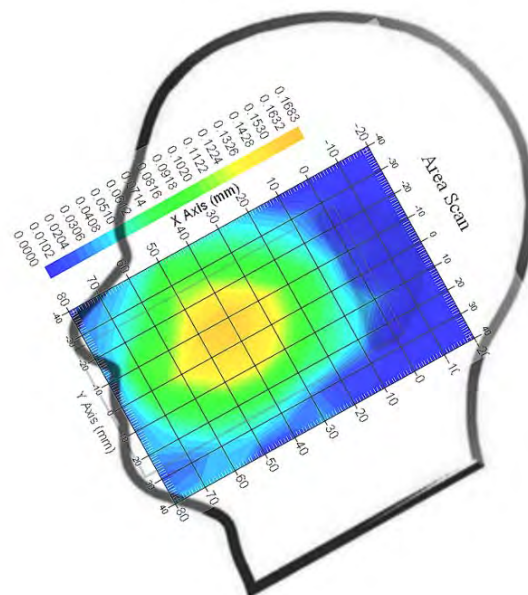**Plot 28#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Front (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.688 W/kg  
Power Drift-Finish : 0.695 W/kg  
Power Drift (%) : 1.102


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.714 W/kg  
10 gram SAR value : 0.429 W/kg  
Area Scan Peak SAR : 0.756 W/kg  
Zoom Scan Peak SAR : 1.128 W/kg

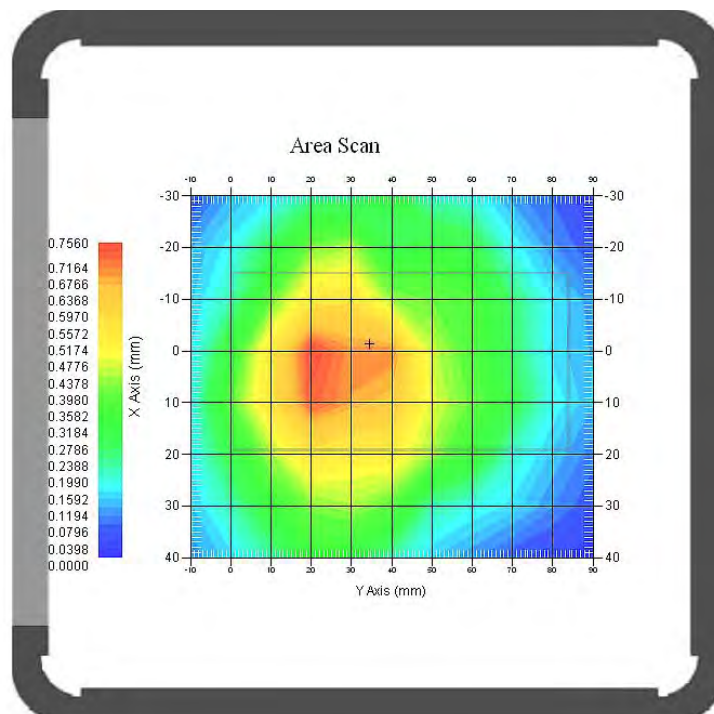**Plot 29#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Back (824.2 MHz Low Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 1.102 W/kg  
Power Drift-Finish : 1.123 W/kg  
Power Drift (%) : 1.915


## Tissue Data

Type : Body  
Frequency : 824.2 MHz  
Epsilon : 55.06 F/m  
Sigma : 0.95 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 1.185 W/kg  
10 gram SAR value : 0.702 W/kg  
Area Scan Peak SAR : 1.361 W/kg  
Zoom Scan Peak SAR : 1.933 W/kg

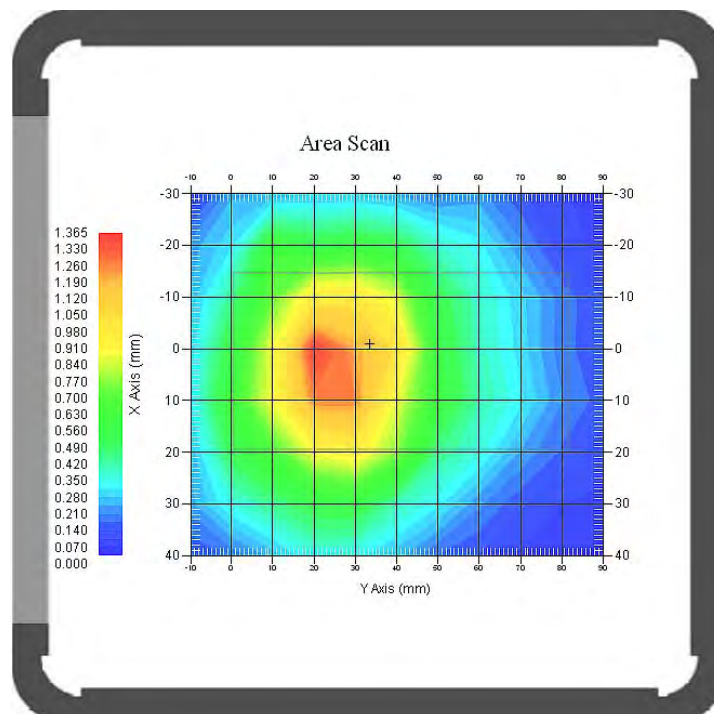**Plot 30#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Back (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 1.052 W/kg  
Power Drift-Finish : 1.030 W/kg  
Power Drift (%) : -1.859


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 1.205 W/kg  
10 gram SAR value : 0.736 W/kg  
Area Scan Peak SAR : 1.517 W/kg  
Zoom Scan Peak SAR : 2.629 W/kg

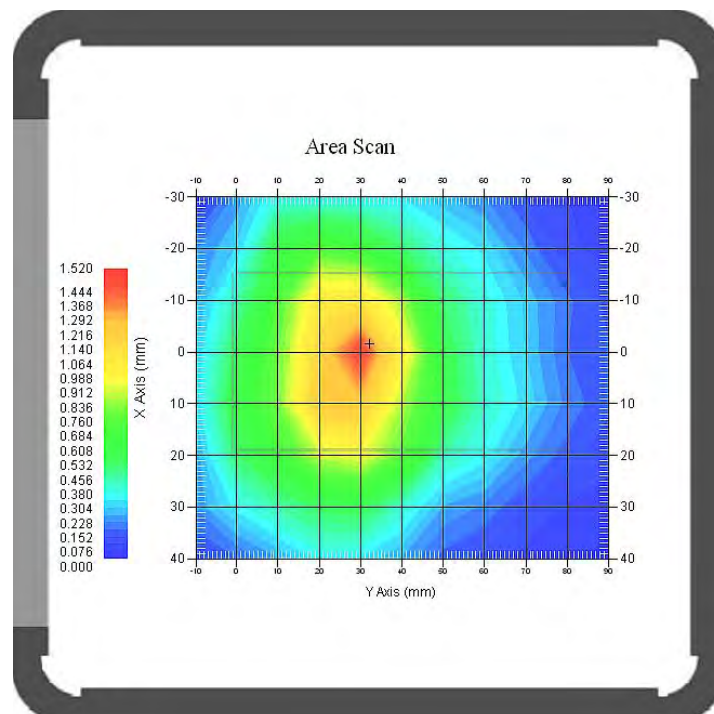**Plot 31#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Back (848.8 MHz High Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.988 W/kg  
Power Drift-Finish : 0.975 W/kg  
Power Drift (%) : -1.375


## Tissue Data

Type : Body  
Frequency : 848.8 MHz  
Epsilon : 55.22 F/m  
Sigma : 0.99 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 1.153 W/kg  
10 gram SAR value : 0.695 W/kg  
Area Scan Peak SAR : 1.243 W/kg  
Zoom Scan Peak SAR : 1.905 W/kg

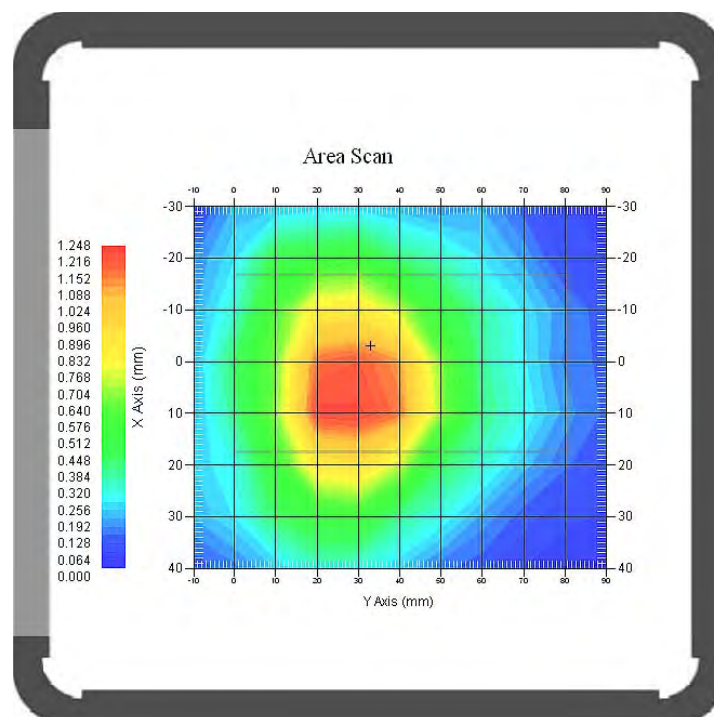**Plot 32#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Left (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.518 W/kg  
Power Drift-Finish : 0.512 W/kg  
Power Drift (%) : -1.329


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.724 W/kg  
10 gram SAR value : 0.475 W/kg  
Area Scan Peak SAR : 0.851 W/kg  
Zoom Scan Peak SAR : 1.142 W/kg

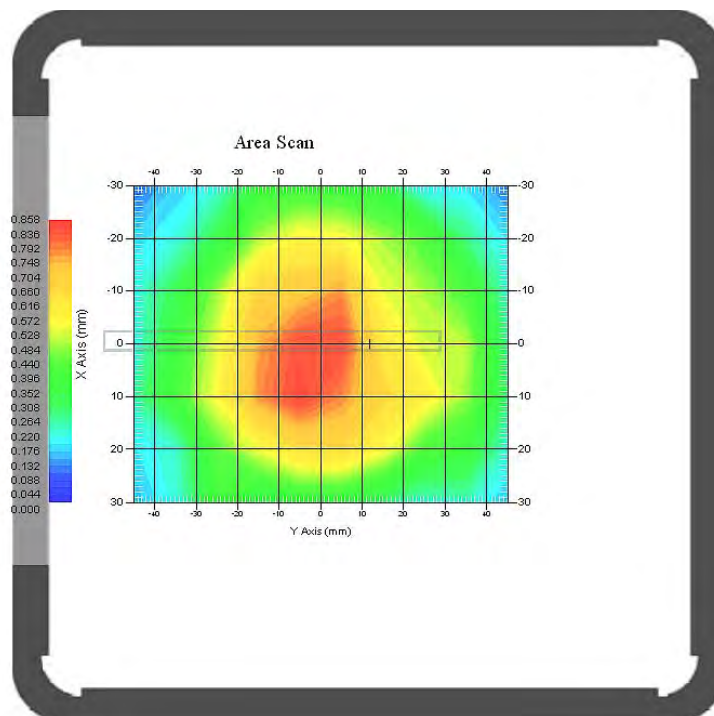**Plot 33#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Right (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.495 W/kg  
Power Drift-Finish : 0.501 W/kg  
Power Drift (%) : 1.219


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.698 W/kg  
10 gram SAR value : 0.385 W/kg  
Area Scan Peak SAR : 0.851 W/kg  
Zoom Scan Peak SAR : 1.008 W/kg

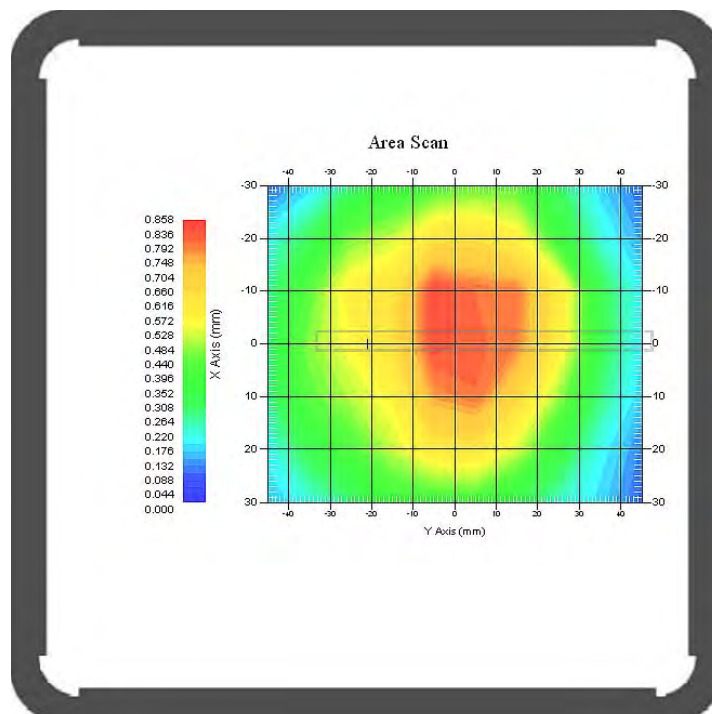**Plot 34#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Bottom (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 4  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.625 W/kg  
Power Drift-Finish : 0.620 W/kg  
Power Drift (%) : -0.859


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 4  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.701 W/kg  
10 gram SAR value : 0.411 W/kg  
Area Scan Peak SAR : 0.815 W/kg  
Zoom Scan Peak SAR : 1.360 W/kg

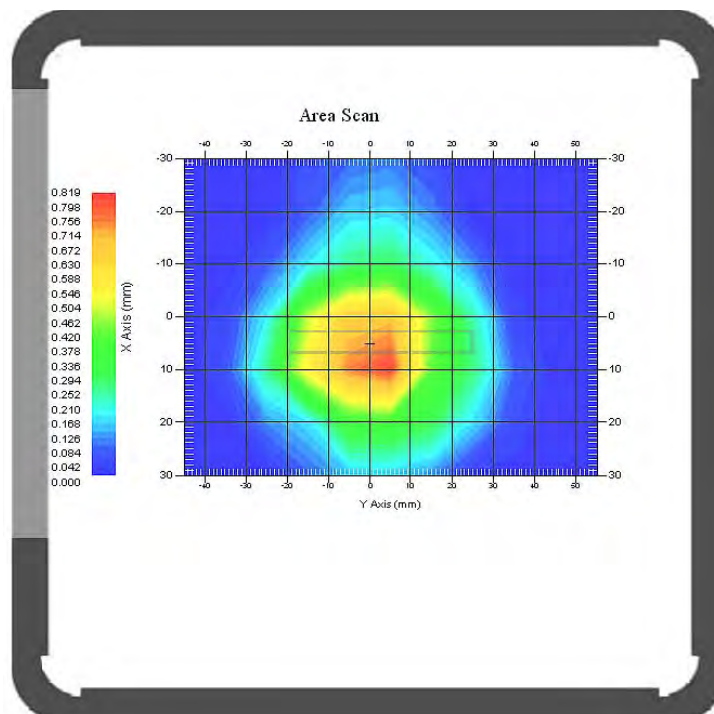**Plot 35#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Front (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.513 W/kg  
Power Drift-Finish : 0.505 W/kg  
Power Drift (%) : -1.629


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 53.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.559 W/kg  
10 gram SAR value : 0.348 W/kg  
Area Scan Peak SAR : 0.620 W/kg  
Zoom Scan Peak SAR : 0.929 W/kg

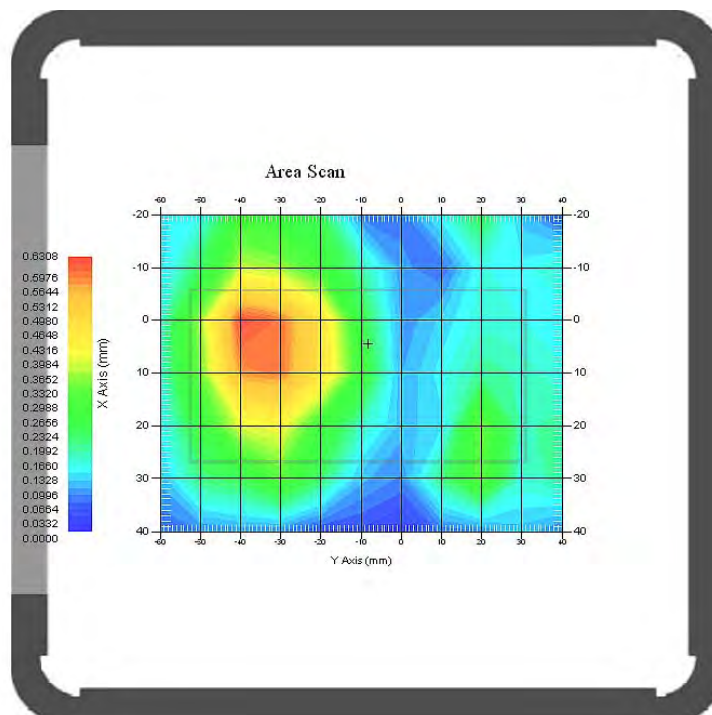**Plot 36#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**Body-worn-Back (1850.2 MHz Low Channel)**

Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.859 W/kg  
Power Drift-Finish : 0.851 W/kg  
Power Drift (%) : -0.912

Tissue Data


Type : Body  
Frequency : 1850.2 MHz  
Epsilon : 52.99 F/m  
Sigma : 1.50 S/m  
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.901 W/kg  
10 gram SAR value : 0.539 W/kg  
Area Scan Peak SAR : 0.997 W/kg  
Zoom Scan Peak SAR : 1.593 W/kg

**Plot 37#**

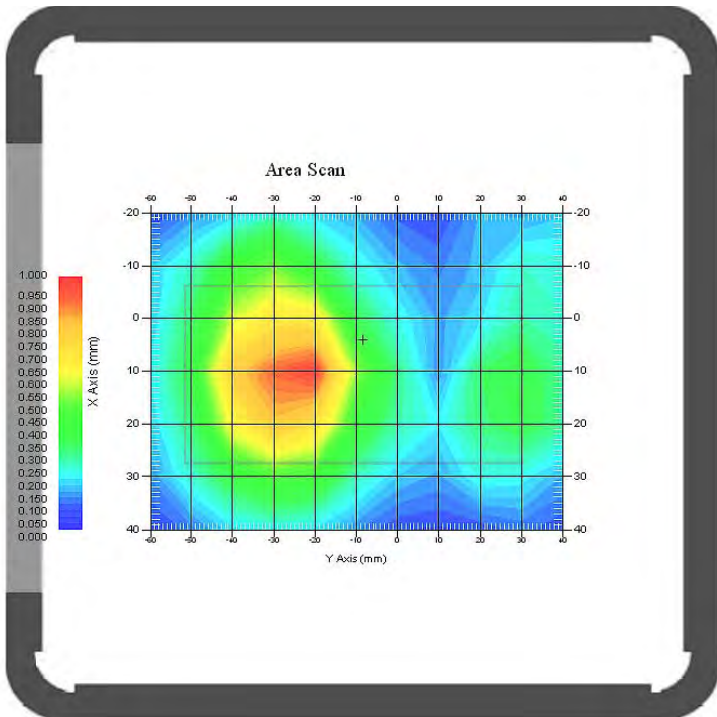

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Back (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.936 W/kg  
Power Drift-Finish : 0.948 W/kg  
Power Drift (%) : 1.293


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 52.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.923 W/kg  
10 gram SAR value : 0.561 W/kg  
Area Scan Peak SAR : 1.011 W/kg  
Zoom Scan Peak SAR : 1.700 W/kg

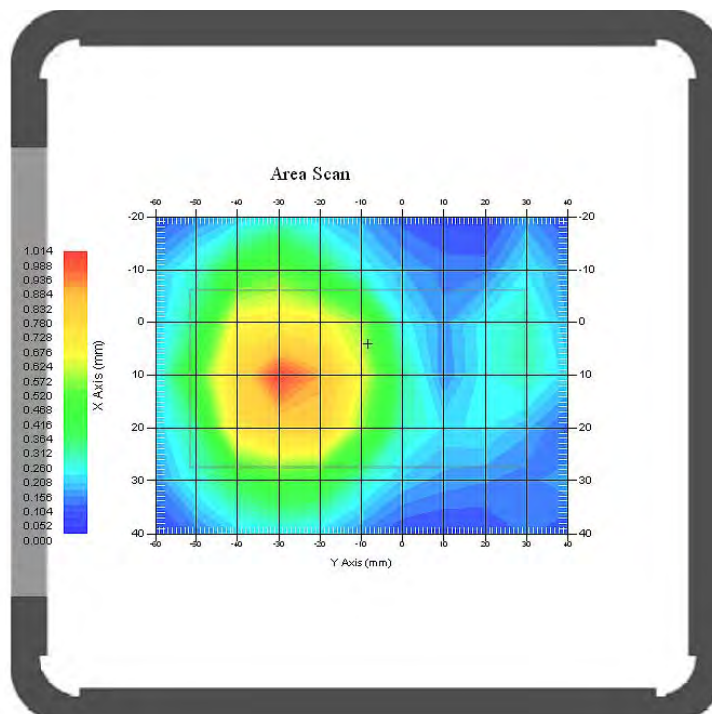**Plot 38#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Back (1909.8 MHz High Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.893 W/kg  
Power Drift-Finish : 0.901 W/kg  
Power Drift (%) : 0.891


## Tissue Data

Type : Body  
Frequency : 1909.8 MHz  
Epsilon : 52.84 F/m  
Sigma : 1.55 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.897 W/kg  
10 gram SAR value : 0.524 W/kg  
Area Scan Peak SAR : 0.993 W/kg  
Zoom Scan Peak SAR : 1.421 W/kg

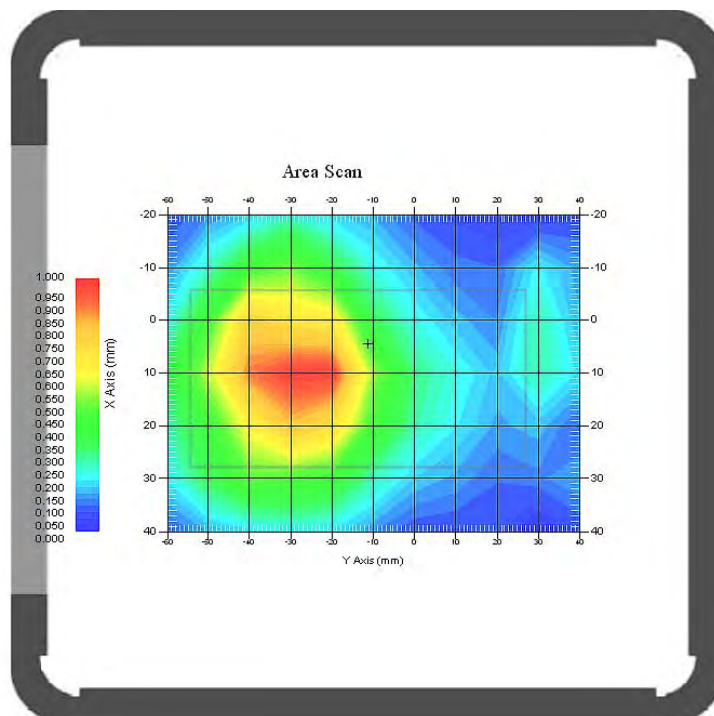**Plot 39#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**Body-worn-Left (1880 MHz Middle Channel)**

Measurement Data

Test mode : GPRS  
 Crest Factor : 2  
 Scan Type : Complete  
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.553 W/kg  
 Power Drift-Finish : 0.547 W/kg  
 Power Drift (%) : -1.134

Tissue Data


Type : Body  
 Frequency : 1880 MHz  
 Epsilon : 52.78 F/m  
 Sigma : 1.54 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 1900  
 Duty Cycle Factor : 2  
 Conversion Factor : 4.5  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.625 W/kg  
 10 gram SAR value : 0.346 W/kg  
 Area Scan Peak SAR : 0.676 W/kg  
 Zoom Scan Peak SAR : 0.971 W/kg

**Plot 40#**

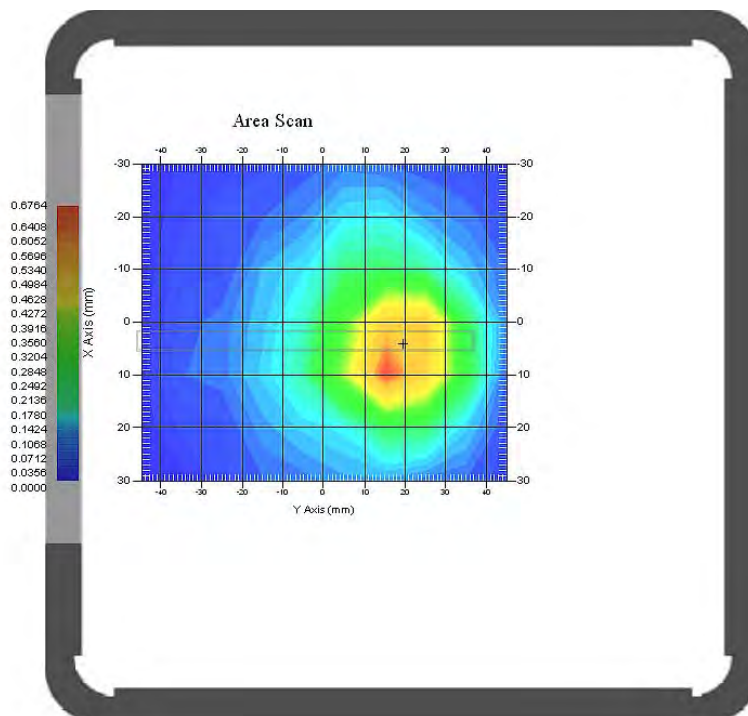

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Right (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.396 W/kg  
Power Drift-Finish : 0.391 W/kg  
Power Drift (%) : -1.309


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 52.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.438 W/kg  
10 gram SAR value : 0.276 W/kg  
Area Scan Peak SAR : 0.499 W/kg  
Zoom Scan Peak SAR : 0.716 W/kg

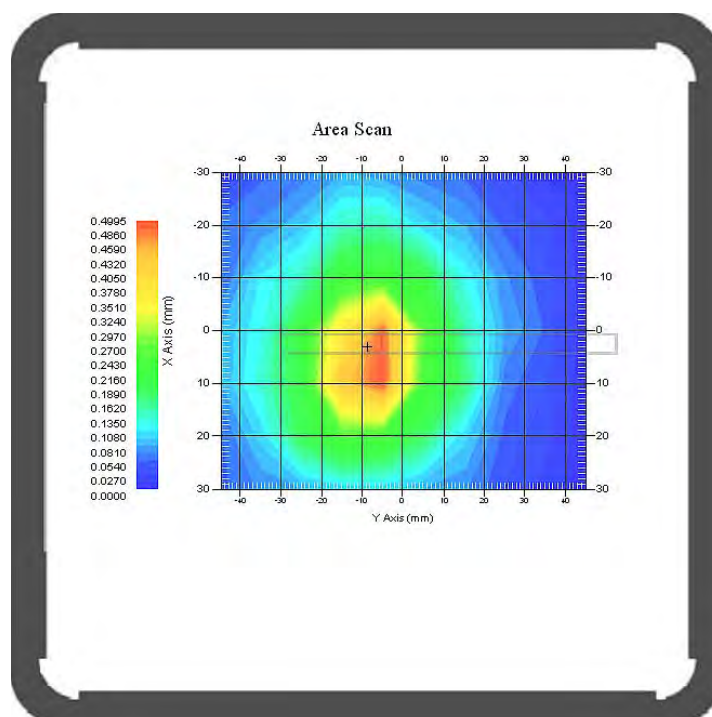**Plot 41#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Body-worn-Bottom (1880 MHz Middle Channel)**

## Measurement Data

Test mode : GPRS  
Crest Factor : 2  
Scan Type : Complete  
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.426 W/kg  
Power Drift-Finish : 0.429 W/kg  
Power Drift (%) : 0.686


## Tissue Data

Type : Body  
Frequency : 1880 MHz  
Epsilon : 52.78 F/m  
Sigma : 1.54 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 2  
Conversion Factor : 4.5  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.501 W/kg  
10 gram SAR value : 0.230 W/kg  
Area Scan Peak SAR : 0.543 W/kg  
Zoom Scan Peak SAR : 0.819 W/kg

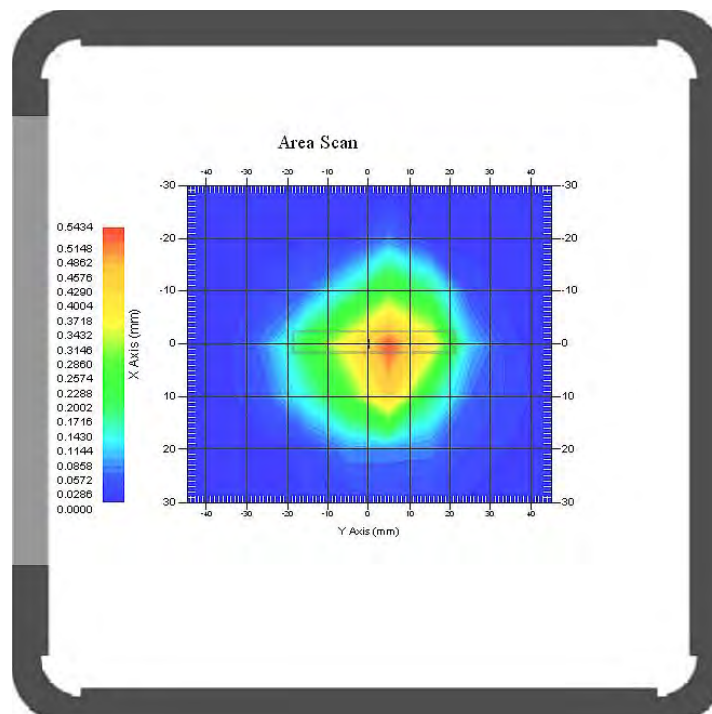**Plot 42#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA850; Body-Worn-Front (836.6 MHz Middle Channel)**

Measurement Data

Test mode : WCDMA850  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.361 W/kg  
 Power Drift-Finish : 0.354 W/kg  
 Power Drift (%) : -1.859

Tissue Data


Type : Body  
 Frequency : 836.6 MHz  
 Epsilon : 55.13 F/m  
 Sigma : 0.97 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 1  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.439 W/kg  
 10 gram SAR value : 0.219 W/kg  
 Area Scan Peak SAR : 0.436 W/kg  
 Zoom Scan Peak SAR : 0.582 W/kg

**Plot 43#**

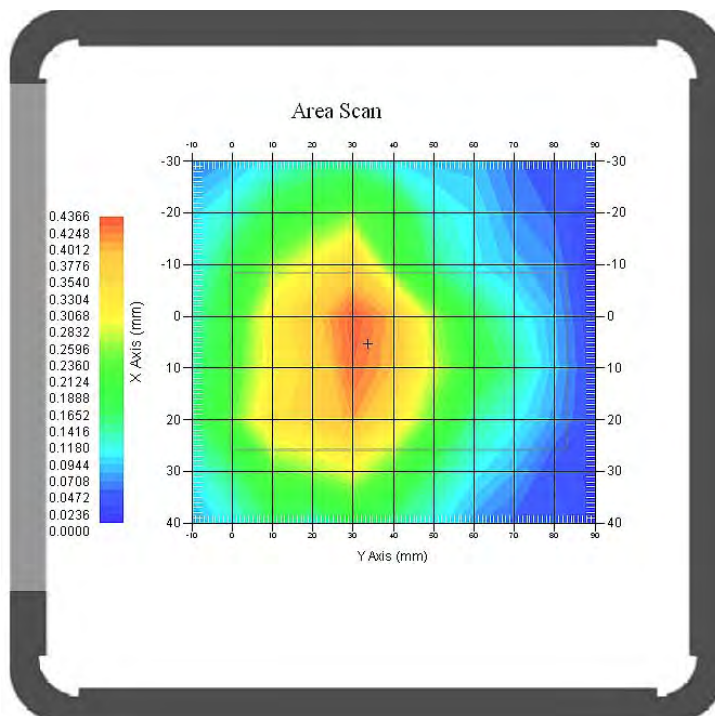

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA850; Body-Worn-Back (836.6 MHz Middle Channel)**

Measurement Data

Test mode : WCDMA850  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.602 W/kg  
 Power Drift-Finish : 0.589 W/kg  
 Power Drift (%) : -2.139

Tissue Data


Type : Body  
 Frequency : 836.6 MHz  
 Epsilon : 55.13 F/m  
 Sigma : 0.97 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 1  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.637 W/kg  
 10 gram SAR value : 0.379 W/kg  
 Area Scan Peak SAR : 0.695 W/kg  
 Zoom Scan Peak SAR : 1.126 W/kg

**Plot 44#**

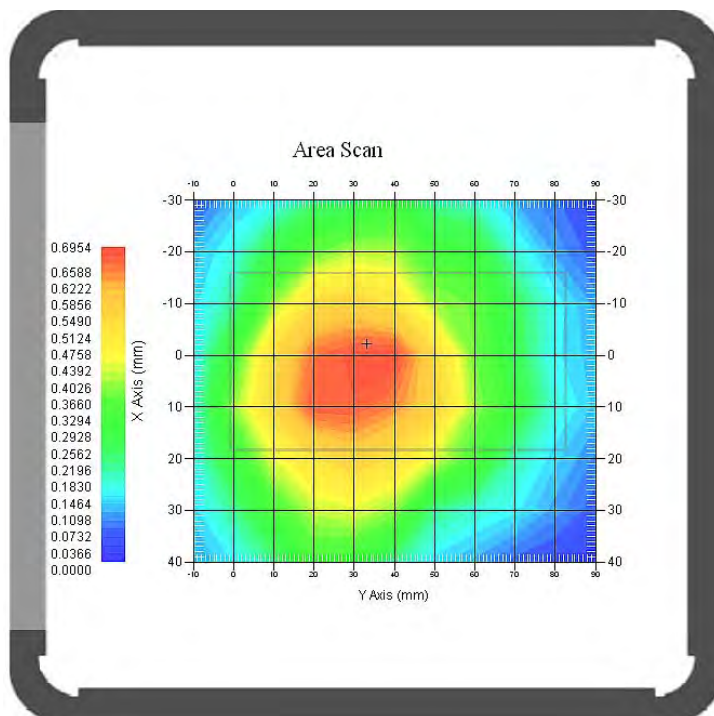

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA850; Body-Worn-Left (836.6 MHz Middle Channel)**

Measurement Data

Test mode : WCDMA850  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.326 W/kg  
 Power Drift-Finish : 0.331 W/kg  
 Power Drift (%) : 1.367

Tissue Data


Type : Body  
 Frequency : 836.6 MHz  
 Epsilon : 55.13 F/m  
 Sigma : 0.97 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 835  
 Duty Cycle Factor : 1  
 Conversion Factor : 5.9  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.351 W/kg  
 10 gram SAR value : 0.212 W/kg  
 Area Scan Peak SAR : 0.388 W/kg  
 Zoom Scan Peak SAR : 0.518 W/kg

**Plot 45#**

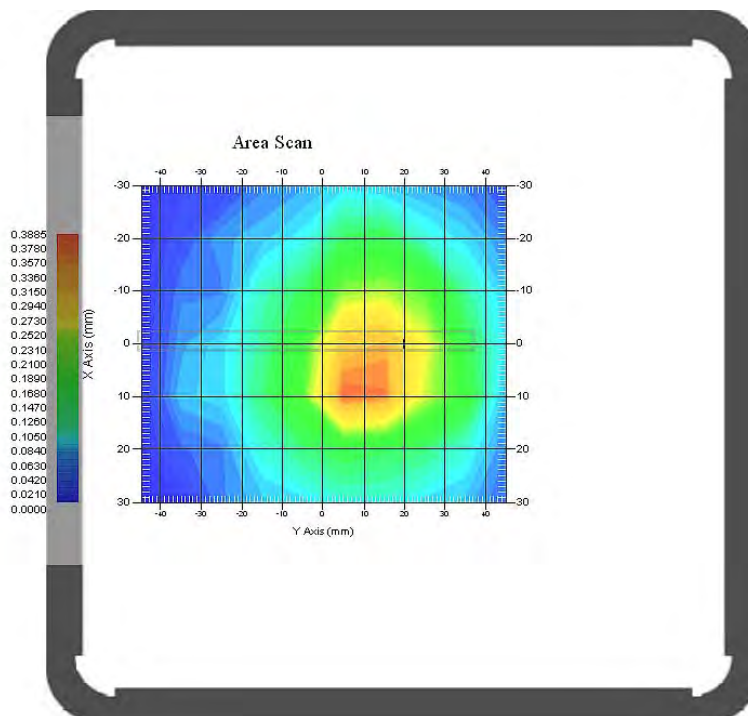

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA850; Body-Worn-Right (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.302 W/kg  
Power Drift-Finish : 0.299 W/kg  
Power Drift (%) : -0.986


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.295 W/kg  
10 gram SAR value : 0.168 W/kg  
Area Scan Peak SAR : 0.331 W/kg  
Zoom Scan Peak SAR : 0.429 W/kg

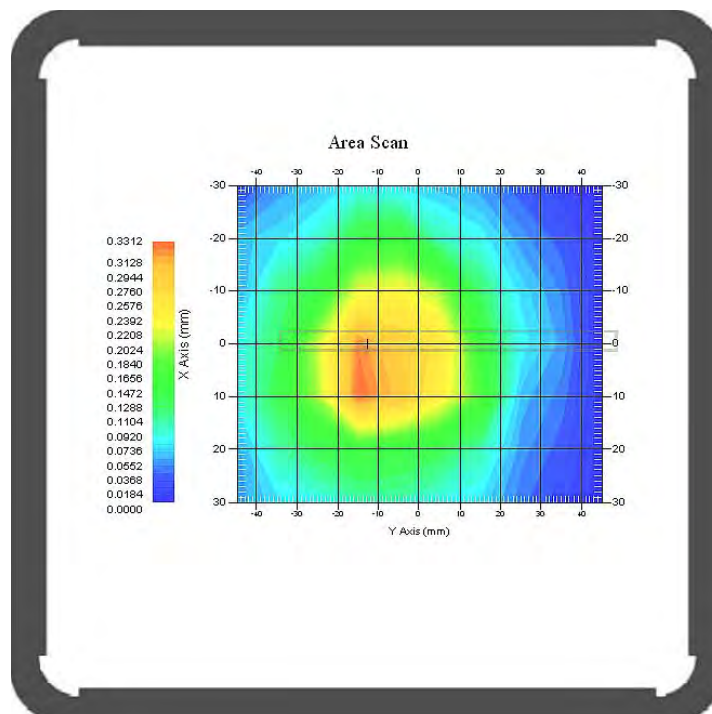**Plot 46#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA850; Body-Worn- Bottom (836.6 MHz Middle Channel)**

## Measurement Data

Test mode : WCDMA850  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.269 W/kg  
Power Drift-Finish : 0.265 W/kg  
Power Drift (%) : -1.845


## Tissue Data

Type : Body  
Frequency : 836.6 MHz  
Epsilon : 55.13 F/m  
Sigma : 0.97 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 835  
Duty Cycle Factor : 1  
Conversion Factor : 5.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.346 W/kg  
10 gram SAR value : 0.175 W/kg  
Area Scan Peak SAR : 0.395 W/kg  
Zoom Scan Peak SAR : 0.558 W/kg

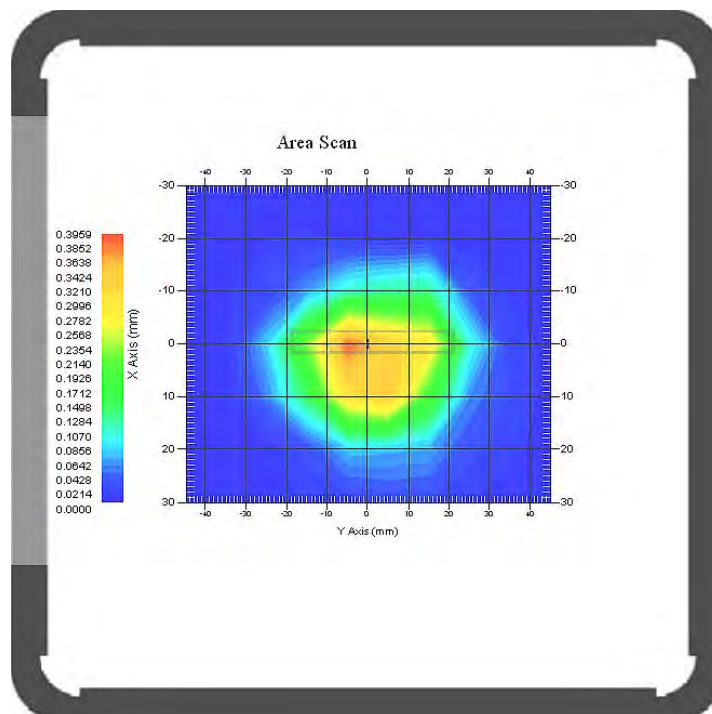**Plot 47#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**

**WCDMA1900; Body-Worn-Front (1852.4 MHz Low Channel)**

Measurement Data

Test mode : WCDMA1900  
 Crest Factor : 1  
 Scan Type : Complete  
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
 Power Drift-Start : 0.305 W/kg  
 Power Drift-Finish : 0.309 W/kg  
 Power Drift (%) : 1.352

Tissue Data


Type : Head  
 Frequency : 1852.4 MHz  
 Epsilon : 52.97 F/m  
 Sigma : 1.50 S/m  
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283  
 Frequency Band : 1900  
 Duty Cycle Factor : 1  
 Conversion Factor : 4.8  
 Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
 Compression Point : 95.00 mV  
 Offset : 1.56 mm

1 gram SAR value : 0.386 W/kg  
 10 gram SAR value : 0.213 W/kg  
 Area Scan Peak SAR : 0.403 W/kg  
 Zoom Scan Peak SAR : 0.659 W/kg

**Plot 48#**

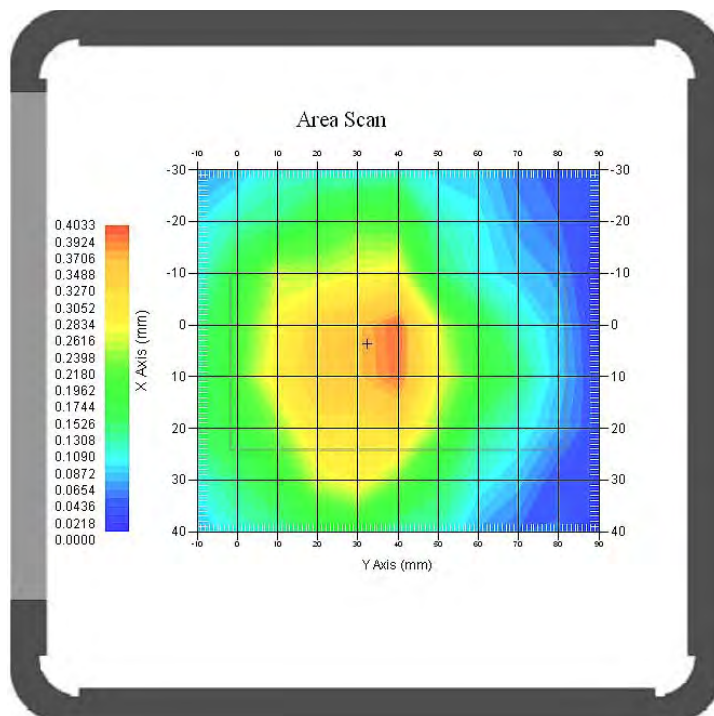

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Body-Worn-Back (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.425 W/kg  
Power Drift-Finish : 0.431 W/kg  
Power Drift (%) : 1.477


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 52.97 F/m  
Sigma : 1.50 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.594 W/kg  
10 gram SAR value : 0.346 W/kg  
Area Scan Peak SAR : 0.634 W/kg  
Zoom Scan Peak SAR : 0.959 W/kg

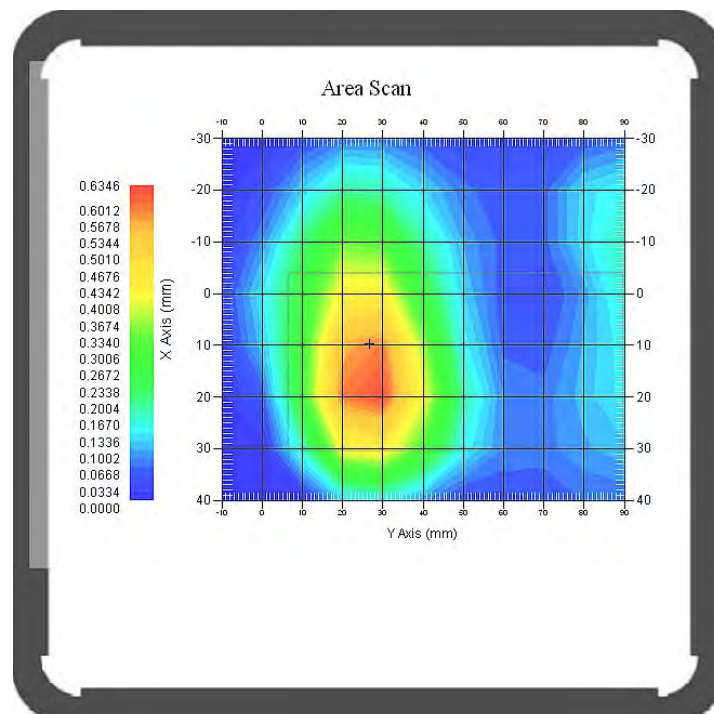**Plot 49#**

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Body-Worn-Left (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.329 W/kg  
Power Drift-Finish : 0.321 W/kg  
Power Drift (%) : -2.345


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 52.97 F/m  
Sigma : 1.50 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.339 W/kg  
10 gram SAR value : 0.152 W/kg  
Area Scan Peak SAR : 0.388 W/kg  
Zoom Scan Peak SAR : 0.501 W/kg

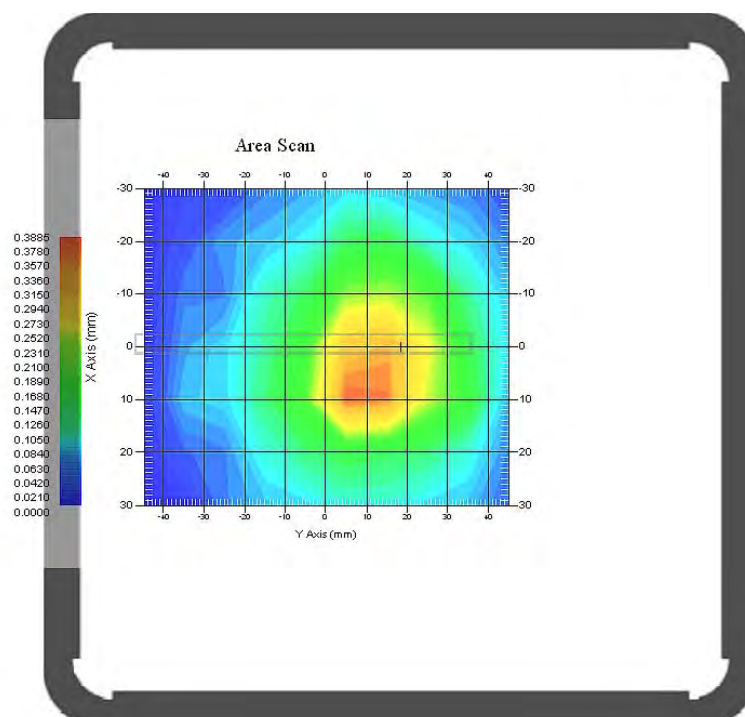**Plot 50#**

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Body-Worn-Right (1852.4 MHz Low Channel)


Measurement Data  
Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.255 W/kg  
Power Drift-Finish : 0.250 W/kg  
Power Drift (%) : -1.713

Tissue Data  
Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 52.97 F/m  
Sigma : 1.50 S/m  
Density : 1000.00 kg/cu. m

Probe Data  
Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.286 W/kg  
10 gram SAR value : 0.165 W/kg  
Area Scan Peak SAR : 0.306 W/kg  
Zoom Scan Peak SAR : 0.418 W/kg

Plot 51#

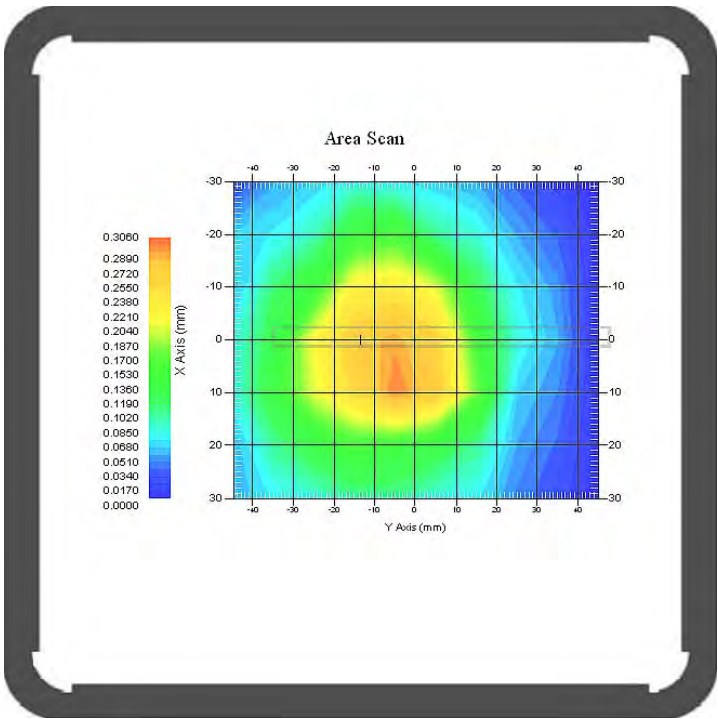

**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****WCDMA1900; Body-Worn-Bottom (1852.4 MHz Low Channel)**

## Measurement Data

Test mode : WCDMA1900  
Crest Factor : 1  
Scan Type : Complete  
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm  
Power Drift-Start : 0.195 W/kg  
Power Drift-Finish : 0.191 W/kg  
Power Drift (%) : -2.129


## Tissue Data

Type : Head  
Frequency : 1852.4 MHz  
Epsilon : 52.97 F/m  
Sigma : 1.50 S/m  
Density : 1000.00 kg/cu. m

## Probe Data

Serial No. : 500-00283  
Frequency Band : 1900  
Duty Cycle Factor : 1  
Conversion Factor : 4.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

1 gram SAR value : 0.291 W/kg  
10 gram SAR value : 0.163 W/kg  
Area Scan Peak SAR : 0.338 W/kg  
Zoom Scan Peak SAR : 0.631 W/kg

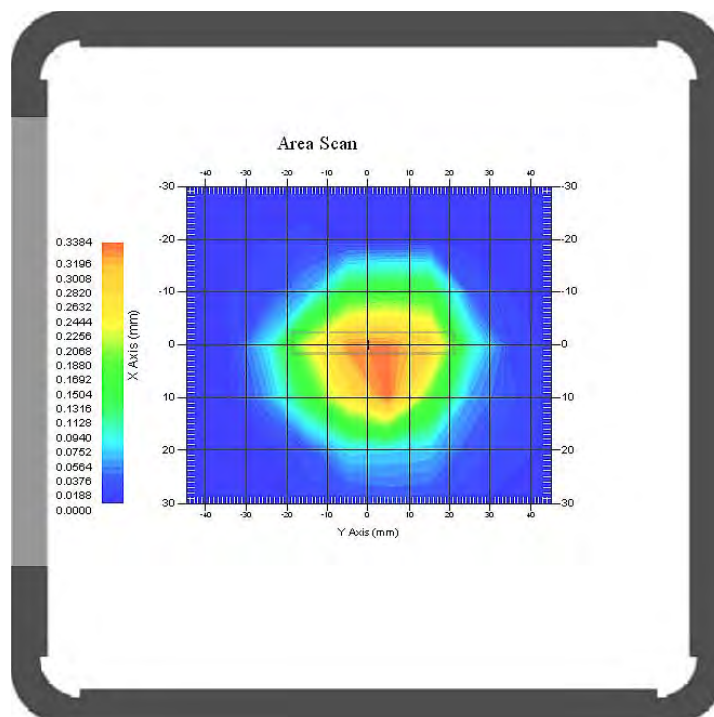**Plot 52#**

## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

### Measurement Uncertainty for 300MHz to 3GHz

| Source of Uncertainty                            | Tolerance Value | Probability Distribution | Divisor    | $c_i^1$<br>(1-g) | $c_i^1$<br>(10-g) | Standard Uncertainty<br>(1-g) % | Standard Uncertainty<br>(10-g) % |
|--------------------------------------------------|-----------------|--------------------------|------------|------------------|-------------------|---------------------------------|----------------------------------|
| <b>Measurement System</b>                        |                 |                          |            |                  |                   |                                 |                                  |
| Probe Calibration                                | 3.5             | normal                   | 1          | 1                | 1                 | 3.5                             | 3.5                              |
| Axial Isotropy                                   | 3.7             | rectangular              | $\sqrt{3}$ | $(1-cp)^{1/2}$   | $(1-cp)^{1/2}$    | 1.5                             | 1.5                              |
| Hemispherical Isotropy                           | 10.9            | rectangular              | $\sqrt{3}$ | $\sqrt{cp}$      | $\sqrt{cp}$       | 4.4                             | 4.4                              |
| Boundary Effect                                  | 1.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.6                             | 0.6                              |
| Linearity                                        | 4.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.7                             | 2.7                              |
| Detection Limit                                  | 1.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.6                             | 0.6                              |
| Readout Electronics                              | 1.0             | normal                   | 1          | 1                | 1                 | 1.0                             | 1.0                              |
| Response Time                                    | 0.8             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.5                             | 0.5                              |
| Integration Time                                 | 1.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.0                             | 1.0                              |
| RF Ambient Condition -Noise                      | 0.006           | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.003                           | 0.003                            |
| RF Ambient Condition - Reflections               | 3.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.7                             | 1.7                              |
| Probe Positioner Mech. Restrictions              | 0.4             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.2                             | 0.2                              |
| <b>Restriction</b>                               |                 |                          |            |                  |                   |                                 |                                  |
| Probe Positioning with respect to Phantom Shell  | 2.9             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.7                             | 1.7                              |
| Extrapolation and Integration                    | 3.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.1                             | 2.1                              |
| Test Sample Positioning                          | 0.023           | normal                   | 1          | 1                | 1                 | 0.023                           | 0.023                            |
| Device Holder Uncertainty                        | 6.215           | normal                   | 1          | 1                | 1                 | 6.215                           | 6.215                            |
| Drift of Output Power                            | 4.627           | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.67                            | 2.67                             |
| <b>Phantom and Setup</b>                         |                 |                          |            |                  |                   |                                 |                                  |
| Phantom Uncertainty(shape & thickness tolerance) | 3.4             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.0                             | 2.0                              |
| Liquid Conductivity(target)                      | 5.0             | rectangular              | $\sqrt{3}$ | 0.7              | 0.5               | 2.0                             | 1.4                              |
| Liquid Conductivity(meas.)                       | 1.938           | normal                   | 1          | 0.7              | 0.5               | 1.36                            | 0.97                             |
| Liquid Permittivity(target)                      | 5.0             | rectangular              | $\sqrt{3}$ | 0.6              | 0.5               | 1.7                             | 1.4                              |
| Liquid Permittivity(meas.)                       | 3.093           | normal                   | 1          | 0.6              | 0.5               | 1.86                            | 1.55                             |
| Combined Uncertainty                             |                 | RSS                      |            |                  |                   | 10.78                           | 10.55                            |
| Expanded uncertainty (coverage factor=2)         |                 | Normal(k=2)              |            |                  |                   | 21.56                           | 21.10                            |

## APPENDIX B – PROBE CALIBRATION CERTIFICATES

### NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1537

Task No: BACL-5745

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe

Record of Calibration

Head and Body

Manufacturer: APREL Laboratories

Model No.: E-020


Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole  
Project No: BACL-5745

Calibrated: 8<sup>th</sup> October 2013  
Released on: 8<sup>th</sup> October 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

### **NCL** CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,  
OTTAWA, ONTARIO  
CANADA K2K 3J1

Division of APREL Lab.  
TEL: (613) 435-8300  
FAX: (613) 435-8306

**NCL Calibration Laboratories**

Division of APREL Inc.

**Introduction**

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification of the probe through metrological practices.

**Calibration Method**

Probes are calibrated using the following methods.

&lt;1000MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

&gt;1000MHz

Waveguide\* method to determine sensitivity in air and tissue

\*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

**References**

- IEEE Standard 1528  
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- EN 62209-1  
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures-Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- IEC 62209-2  
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

**NCL Calibration Laboratories**

Division of APREL Inc.

**Conditions**

Probe 500-00283 was a recalibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 1.5°C  
**Temperature of the Tissue:** 21 °C +/- 1.5°C  
**Relative Humidity:** < 60%

**Primary Measurement Standards**

| Instrument                 | Serial Number | Cal due date |
|----------------------------|---------------|--------------|
| Tektronix USB Power Meter  | 11C940        | May 14, 2015 |
| Signal Generator HP 83640B | 3844A00689    | Feb 12, 2015 |

**Secondary Measurement Standards**

|                                 |        |               |
|---------------------------------|--------|---------------|
| Network Analyzer Anritsu 37347C | 002106 | Feb. 20, 2015 |
|---------------------------------|--------|---------------|

**Attestation**

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

**We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.**



Art Brennan, Quality Manager



Dan Brooks, Test Engineer

Page 3 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

**NCL Calibration Laboratories**

Division of APREL Inc.

**Probe Summary**

|                |                        |
|----------------|------------------------|
| Probe Type:    | E-Field Probe E020     |
| Serial Number: | 500-00283              |
| Frequency:     | As presented on page 5 |
| Sensor Offset: | 1.56                   |
| Sensor Length: | 2.5                    |
| Tip Enclosure: | Composite*             |
| Tip Diameter:  | < 2.9 mm               |
| Tip Length:    | 55 mm                  |
| Total Length:  | 289 mm                 |

\*Resistive to recommended tissue recipes per IEEE-1528

**Sensitivity in Air**

|                          |                                         |
|--------------------------|-----------------------------------------|
| Channel X:               | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Y:               | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Channel Z:               | $1.2 \mu\text{V}/(\text{V}/\text{m})^2$ |
| Diode Compression Point: | 95 mV                                   |

Page 4 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

**NCL Calibration Laboratories**

Division of APREL Inc.

## Calibration for Tissue (Head H, Body B)

| Frequency | Tissue Type | Measured Epsilon | Measured Sigma | Standard Uncertainty (%) | Calibration Frequency Range (MHz) | Conversion Factor |
|-----------|-------------|------------------|----------------|--------------------------|-----------------------------------|-------------------|
| 450 H     | Head        | 44.29            | 0.86           | 3.5                      | ±50                               | 5.7               |
| 450 B     | Body        | 56.6             | 0.94           | 3.5                      | ±50                               | 5.8               |
| 750 H     | Head        | 42.7             | 0.85           | 3.5                      | ±50                               | 5.6               |
| 750 B     | Body        | 56.6             | 0.94           | 3.5                      | ±50                               | 5.5               |
| 835 H     | Head        | 42.35            | 0.938          | 3.5                      | ±50                               | 5.9               |
| 835 B     | Body        | 56.65            | 1.018          | 3.5                      | ±50                               | 5.9               |
| 900 H     | Head        | X                | X              | X                        | X                                 | X                 |
| 900 B     | Body        | X                | X              | X                        | X                                 | X                 |
| 1450 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 1450 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 1500 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 1500 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 1640 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 1640 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 1750 H    | Head        | 38.51            | 1.36           | 3.5                      | ±75                               | 5.4               |
| 1750 B    | Body        | 51.79            | 1.53           | 3.5                      | ±75                               | 5.3               |
| 1800 H    | Head        | 38.26            | 1.41           | 3.5                      | ±75                               | 5.0               |
| 1800 B    | Body        | 51.61            | 1.58           | 3.5                      | ±75                               | 5.0               |
| 1900 H    | Head        | 38.03            | 1.36           | 3.5                      | ±75                               | 4.8               |
| 1900 B    | Body        | 53.13            | 1.58           | 3.5                      | ±75                               | 4.5               |
| 2000 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 2000 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 2100 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 2100 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 2300 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 2300 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 2450 H    | Head        | 37.64            | 1.88           | 3.5                      | ±75                               | 4.9               |
| 2450 B    | Body        | 50.7             | 2.03           | 3.5                      | ±75                               | 4.3               |
| 2600 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 2600 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 3000 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 3000 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 3600 H    | Head        | X                | X              | X                        | X                                 | X                 |
| 3600 B    | Body        | X                | X              | X                        | X                                 | X                 |
| 5250 H    | Head        | 34.65            | 4.8            | 3.5                      | ±100                              | 2.7               |
| 5250 B    | Body        | 47.6             | 5.3            | 3.5                      | ±100                              | 2.6               |
| 5600 H    | Head        | 33.2             | 5.15           | 3.5                      | ±100                              | 2.5               |
| 5600 B    | Body        | 45.21            | 5.57           | 3.5                      | ±100                              | 2.2               |
| 5800 H    | Head        | 32.72            | 5.38           | 3.5                      | ±100                              | 3.2               |
| 5800 B    | Body        | 44.28            | 6.04           | 3.5                      | ±100                              | 2.5               |

Page 5 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

**NCL Calibration Laboratories**

---

Division of APREL Inc.

**Boundary Effect:**

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

**Spatial Resolution:**

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe.  
The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

**DAQ-PAQ Contribution**

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 M $\Omega$ .


---

Page 6 of 10

This page has been reviewed for content and attested to on Page 2 of this document.



**NCL Calibration Laboratories**  
Division of APREL Inc.

**Receiving Pattern Air**

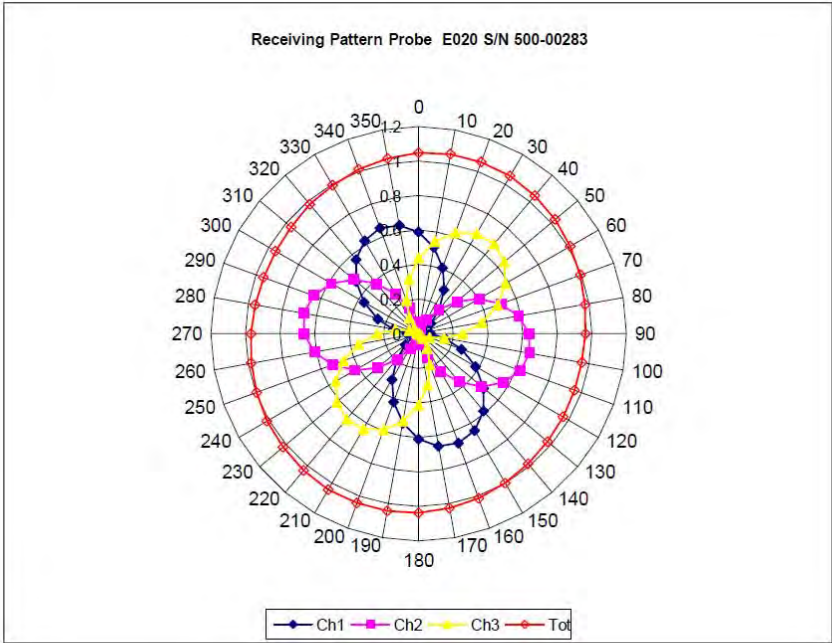

**NCL Calibration Laboratories**  
Division of APREL Inc.

**Isotropy Error Air**

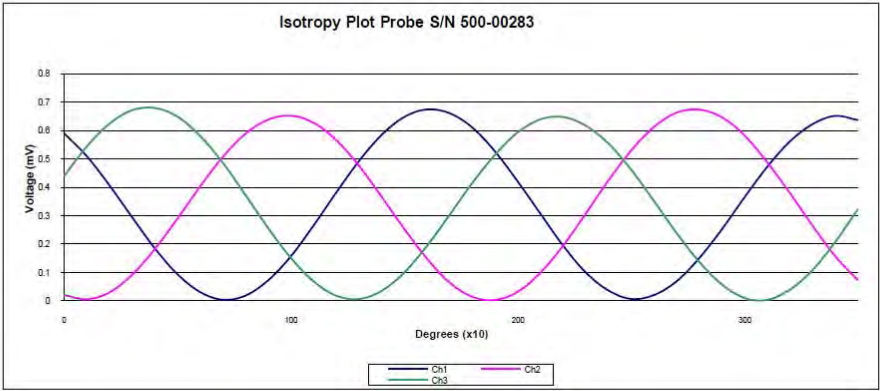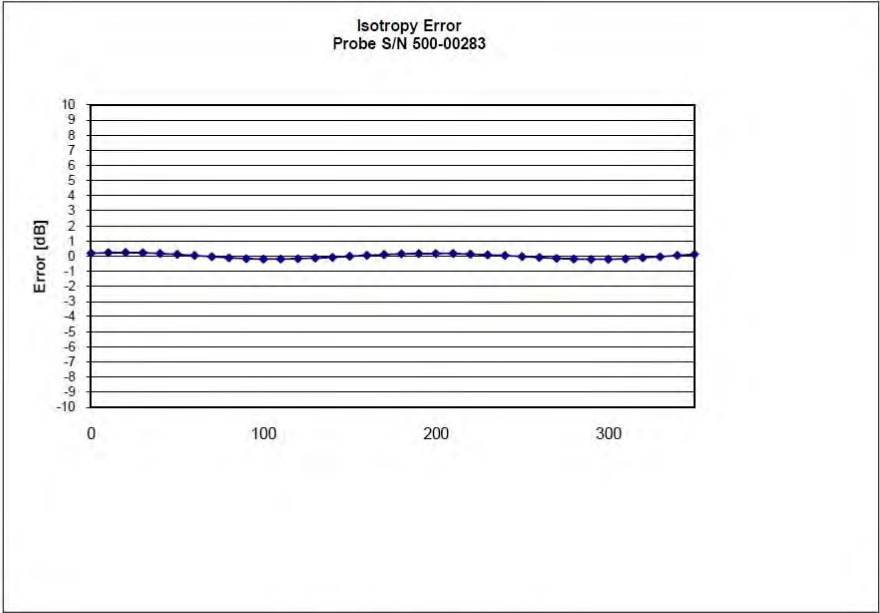

**Isotropicity Tissue:** 0.10 dB

**NCL Calibration Laboratories**  
Division of APREL Inc.

**Dynamic Range**




Page 9 of 10  
This page has been reviewed for content and attested to on Page 2 of this document.

**NCL Calibration Laboratories**

Division of APREL Inc.

**Video Bandwidth**

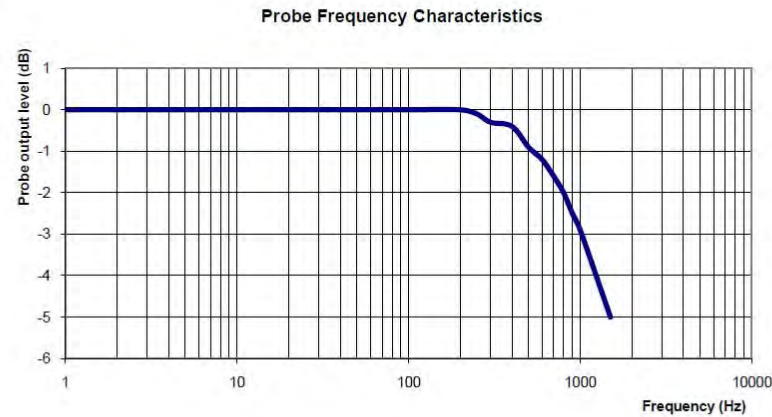

Video Bandwidth at 500 Hz                      1 dB  
Video Bandwidth at 1.02 KHz:                3 dB

**Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2013.

## APPENDIX C DIPOLE CALIBRATION CERTIFICATES

### NCL CALIBRATION LABORATORIES

Calibration File No: DC-1327  
Project Number: BAC-dipole-cal-5618

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole(Head and Body)

Manufacturer: APREL Laboratories

Part number: ALS-D-835-S-2

Frequency: 835 MHz

Serial No: 180-00558

Customer: Bay Area Compliance Laboratory

Calibrated: 25<sup>th</sup> August 2011  
Released on: 25<sup>th</sup> August 2011

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

**NCL** CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.  
Kanata, ONTARIO  
CANADA K2K 3J1

Division of APREL Lab.  
TEL: (613) 435-8300  
FAX: (613)435-8306

**NCL Calibration Laboratories**


Division of APREL Laboratories.

**Conditions**

Dipole 180-00558 was received in good condition and a re-calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C**Temperature of the Tissue:** 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.



Stuart Nicol



C. Teodorian

**Primary Measurement Standards**

| Instrument                      | Serial Number | Cal due date |
|---------------------------------|---------------|--------------|
| Power meter Anritsu MA2408A     | 245025437     | Nov.4, 2011  |
| Power Sensor Anritsu MA2481D    | 103555        | Nov 4, 2011  |
| Attenuator HP 8495A (70dB) 1    | 944A10711     | Aug.8, 2012  |
| Network Analyzer Agilent E5071C | 1334746J      | Feb. 8, 2012 |

**Secondary Measurement Standards**

|                                 |                 |              |
|---------------------------------|-----------------|--------------|
| Signal Generator Agilent E4438C | -506 MY55182336 | June 7, 2012 |
|---------------------------------|-----------------|--------------|

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 162.2 mm  
Height: 89.4 mm

Electrical Specification

| Tissue | Frequency | SWR:     | Return Loss | Impedance |
|--------|-----------|----------|-------------|-----------|
| Head   | 835 MHz   | 1.0417 U | -35.395dB   | 49.020 Ω  |
| Body   | 835 MHz   | 1.1177 U | -25.424dB   | 55.435 Ω  |

System Validation Results

| Tissue | Frequency | 1 Gram | 10 Gram | Peak   |
|--------|-----------|--------|---------|--------|
| Head   | 835 MHz   | 9.590  | 6.003   | 15.013 |
| Body   | 835 MHz   | 9.684  | 6.263   | 14.23  |

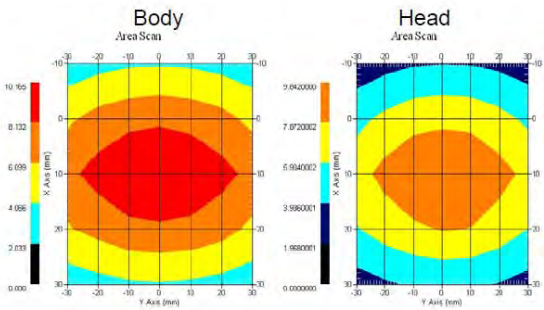

This page has been reviewed for content and attested to by signature within this document. 3

**NCL Calibration Laboratories**

Division of APREL Laboratories.

**Introduction**

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00558. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 130 MHz to 26 GHz E-Field Probe Serial Number 212.

**References**

SSI-TP-018-ALSAS Dipole Calibration Procedure

SSI-TP-016 Tissue Calibration Procedure

IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

**Conditions**

Dipole 180-00558 was new taken from stock.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C**Temperature of the Tissue:** 20 °C +/- 0.5°C**Dipole Calibration uncertainty**

The calibration uncertainty for the dipole is made up of various parameters presented below.

|                          |                           |
|--------------------------|---------------------------|
| <b>Mechanical</b>        | 1%                        |
| <b>Positioning Error</b> | 1.22%                     |
| <b>Electrical</b>        | 1.7%                      |
| <b>Tissue</b>            | 2.2%                      |
| <b>Dipole Validation</b> | 2.2%                      |
| <b>TOTAL</b>             | <b>8.32% (16.64% K=2)</b> |

This page has been reviewed for content and attested to by signature within this document.

4

**NCL Calibration Laboratories**

Division of APREL Laboratories.

**Dipole Calibration Results****Mechanical Verification**

| APREL Length | APREL Height | Measured Length | Measured Height |
|--------------|--------------|-----------------|-----------------|
| 161.0 mm     | 89.8 mm      | 162.2 mm        | 89.4 mm         |

| Tissue Type | Return Loss: | SWR:     | Impedance: |
|-------------|--------------|----------|------------|
| Head        | -35.395 dB   | 1.0417 U | 49.020Ω    |
| Body        | -25.454 dB   | 1.1177 U | 55.435Ω    |

**Tissue Validation**

|                    | Dielectric constant, $\epsilon_r$ | Conductivity, $\sigma$ [S/m] |
|--------------------|-----------------------------------|------------------------------|
| Head Tissue 835MHz | 41.78                             | 0.92                         |
| Body Tissue 835MHz | 56.37                             | 0.95                         |

This page has been reviewed for content and attested to by signature within this document.

5


**NCL Calibration Laboratories**

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

**S11 Parameter Return Loss**

**Head Tissue**

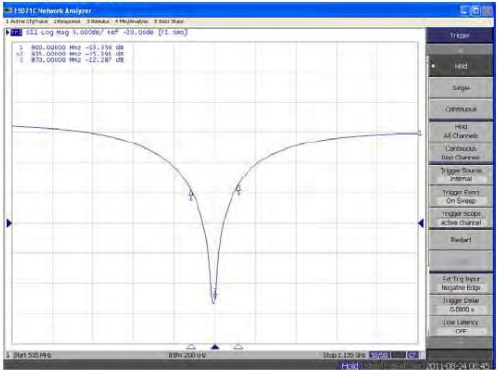

**Body Tissue**

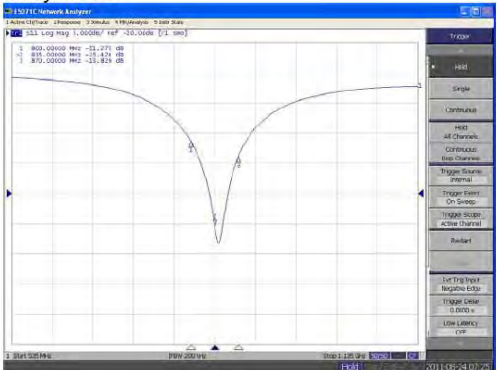


This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.

SWR  
Head

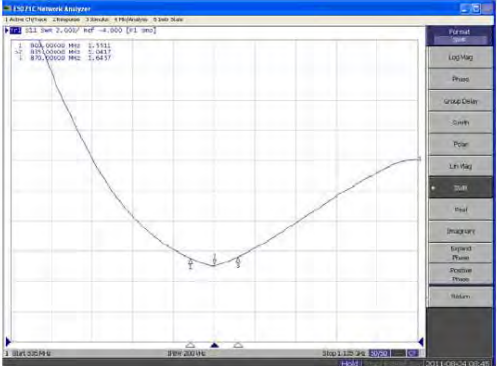



Body

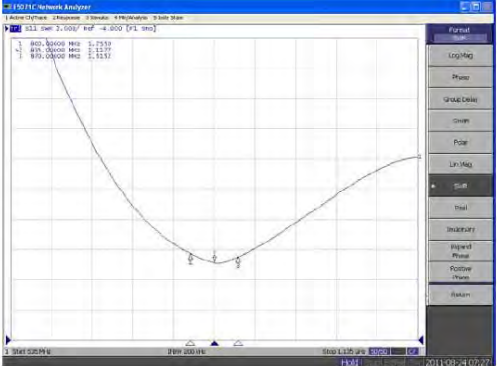

This page has been reviewed for content and attested to by signature within this document.

**NCL Calibration Laboratories**  
Division of APREL Laboratories.

**Smith Chart Dipole Impedance**

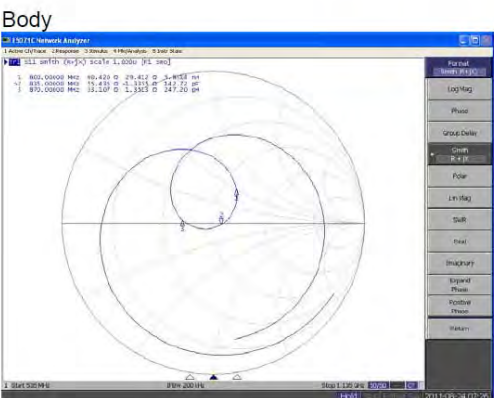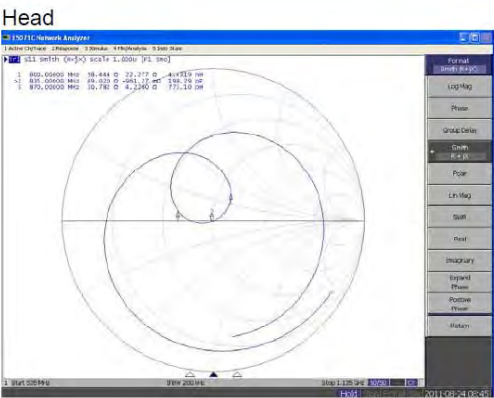

This page has been reviewed for content and attested to by signature within this document.

**NCL Calibration Laboratories**

Division of APREL Laboratories.

**Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2011.

This page has been reviewed for content and attested to by signature within this document.

9

835MHz Dipole Calibration By BACL at 2013-12-20

Mechanical Verification


| APREL Length | APREL Height | Measured Length | Measured Height |
|--------------|--------------|-----------------|-----------------|
| 161.0 mm     | 89.8 mm      | 161.1 mm        | 89.7 mm         |

| Tissue Type | Measured Return Loss | Measured Impedance |
|-------------|----------------------|--------------------|
| Head        | -33.135 dB           | 51.898 $\Omega$    |
| Body        | -25.362 dB           | 50.604 $\Omega$    |


Test Graphs:

Head Tissue

Return Loss :

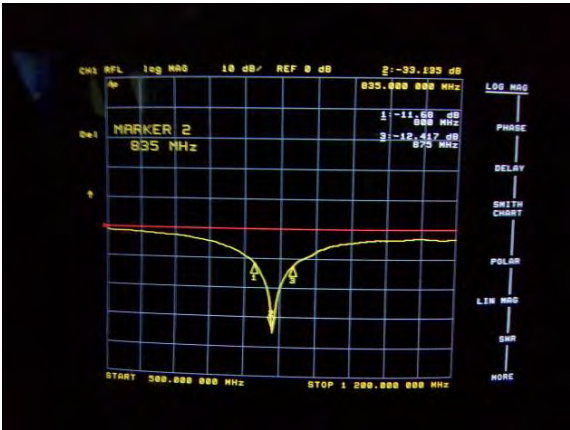


Impedance :

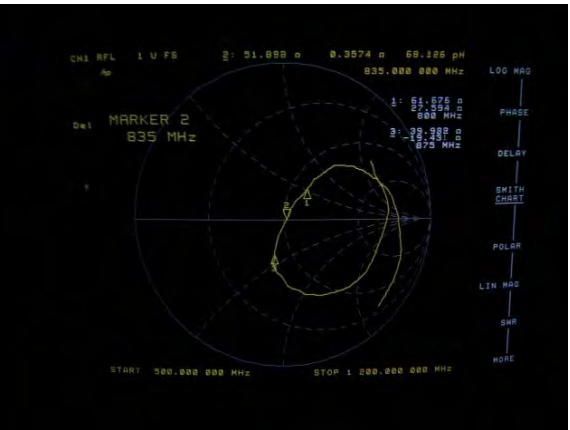

Body Tissue

Return Loss :

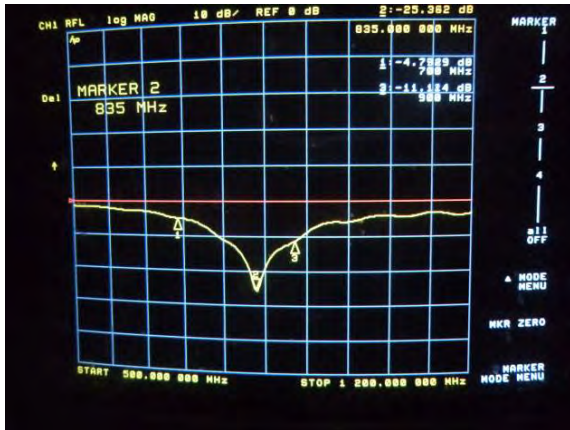

Impedance :



## NCL CALIBRATION LABORATORIES

Calibration File No: DC-1331  
Project Number: BAC-dipole -cal-5615

## CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the  
**NCL CALIBRATION LABORATORIES** by qualified personnel following recognized  
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole (Head & Body)

Manufacturer: APREL Laboratories

Part number: ALS-D-1900-S-2

Frequency: 1900 MHz

Serial No: 210-00710

Customer: Bay Area Compliance Laboratory

Calibrated: 25<sup>th</sup> August, 2011  
Released on: 25<sup>th</sup> August, 2011

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: \_\_\_\_\_

**NCL** CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr.  
Kanata, ONTARIO  
CANADA K2K 3J1

Division of APREL Lab.  
TEL: (613) 435-8300  
FAX: (613) 435-8306

**NCL Calibration Laboratories**

Division of APREL Laboratories.


**Conditions**

Dipole 210-00710 was received in good condition and was a re-calibration.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.



Stuart Nicol



C. Teodorian

**Primary Measurement Standards  
Instrument**

Power meter Anritsu MA2408A

Power Sensor Anritsu MA2481D

Attenuator HP 8495A (70dB) 1

Network Analyzer Agilent E5071C

**Secondary Measurement Standards**

Signal Generator Agilent E4438C

**Serial Number**

245025437

103555

944A10711

1334746J

**Cal due date**

Nov.4, 2011

Nov 4, 2011

Aug.8, 2012

Feb. 8, 2012

-506 MY55182336

June 7, 2012

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 67.1 mm  
Height: 38.9 mm

Electrical Specification

| Tissue | Frequency | SWR:     | Return Loss | Impedance |
|--------|-----------|----------|-------------|-----------|
| Head   | 1900MHz   | 1.0417 U | -35.395dB   | 49.020 Ω  |
| Body   | 1900MHz   | 1.1177 U | -25.424dB   | 55.435 Ω  |

System Validation Results

| Tissue | Frequency | 1 Gram | 10 Gram | Peak   |
|--------|-----------|--------|---------|--------|
| Head   | 1900 MHz  | 39.648 | 20.311  | 73.365 |
| Body   | 1900 MHz  | 39.769 | 20.176  | 75.866 |

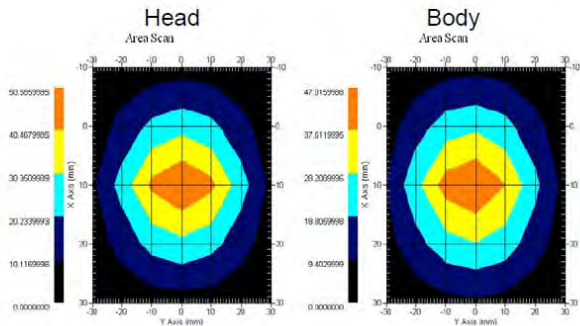

This page has been reviewed for content and attested to by signature within this document.

**NCL Calibration Laboratories**

Division of APREL Laboratories.

**Introduction**

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00710. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 130 MHz to 26 GHz E-Field Probe Serial Number 212.

**References**

SSI-TP-018-ALSAS Dipole Calibration Procedure  
SSI-TP-016 Tissue Calibration Procedure  
IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

**Conditions**

Dipole 210-00710 was new taken from stock.

**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C

**Temperature of the Tissue:** 20 °C +/- 0.5°C

**Dipole Calibration uncertainty**

The calibration uncertainty for the dipole is made up of various parameters presented below.

|                          |                           |
|--------------------------|---------------------------|
| <b>Mechanical</b>        | 1%                        |
| <b>Positioning Error</b> | 1.22%                     |
| <b>Electrical</b>        | 1.7%                      |
| <b>Tissue</b>            | 2.2%                      |
| <b>Dipole Validation</b> | 2.2%                      |
| <b>TOTAL</b>             | <b>8.32% (16.64% K=2)</b> |

This page has been reviewed for content and attested to by signature within this document.

4

**NCL Calibration Laboratories**

Division of APREL Laboratories.

**Dipole Calibration Results****Mechanical Verification**

| APREL Length | APREL Height | Measured Length | Measured Height |
|--------------|--------------|-----------------|-----------------|
| 68.0 mm      | 39.5 mm      | 67.1mm          | 38.9 mm         |

**Electrical Validation**

| Tissue Type | Return Loss: | SWR:     | Impedance:      |
|-------------|--------------|----------|-----------------|
| Head        | -29.360 dB   | 1.0732 U | 47.869 $\Omega$ |
| Body        | -22.799 dB   | 1.1566 U | 48.022 $\Omega$ |

**Tissue Validation**

|                     | Dielectric constant, $\epsilon_r$ | Conductivity, $\sigma$ [S/m] |
|---------------------|-----------------------------------|------------------------------|
| Head Tissue 1900MHz | 38.4                              | 1.43                         |
| Body Tissue 1900MHz | 51.87                             | 1.59                         |

This page has been reviewed for content and attested to by signature within this document.

5


NCL Calibration Laboratories

Division of APREL Laboratories.


The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

Head

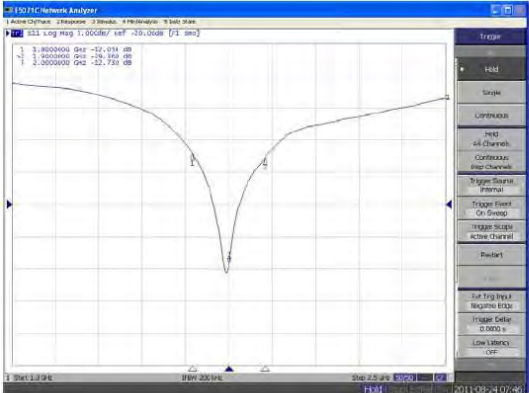


Body

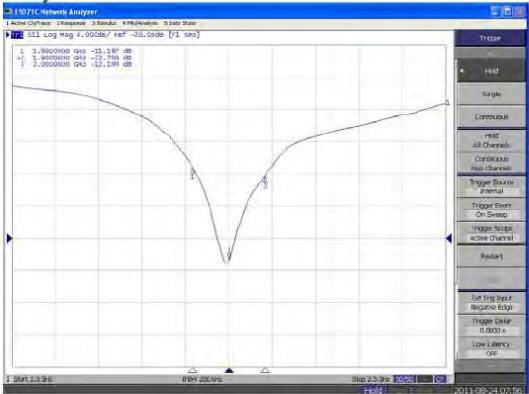

This page has been reviewed for content and attested to by signature within this document.

## Division of APREL Laboratories.

Head

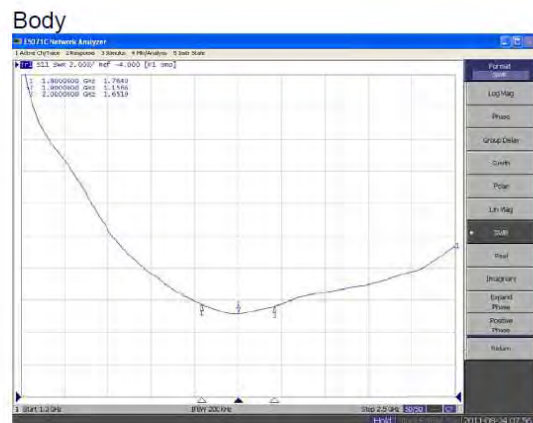


7


NCL Calibration Laboratories  
Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

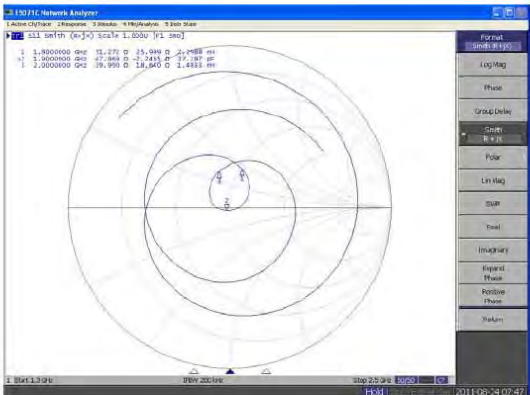

Body

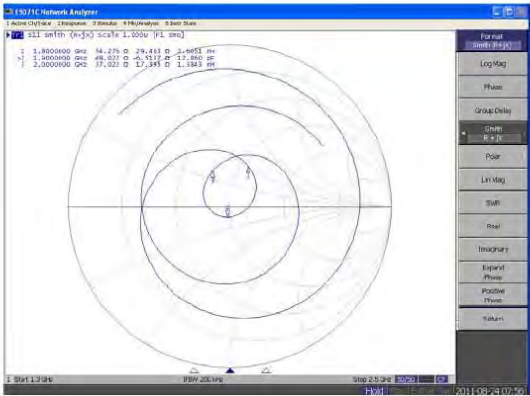

This page has been reviewed for content and attested to by signature within this document.

**NCL Calibration Laboratories**

---

Division of APREL Laboratories.

**Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List 2011

This page has been reviewed for content and attested to by signature within this document.

9

# 1900MHz Dipole Calibration By BACL at 2013-12-20

## Mechanical Verification


| APREL Length | APREL Height | Measured Length | Measured Height |
|--------------|--------------|-----------------|-----------------|
| 68.0 mm      | 39.4 mm      | 68.3 mm         | 39.2 mm         |

| Tissue Type | Measured Return Loss | Measured Impedance |
|-------------|----------------------|--------------------|
| Head        | -28.083 dB           | 47.477 $\Omega$    |
| Body        | -22.022 dB           | 48.076 $\Omega$    |

## Test Graphs:

Head Tissue

Return Loss :

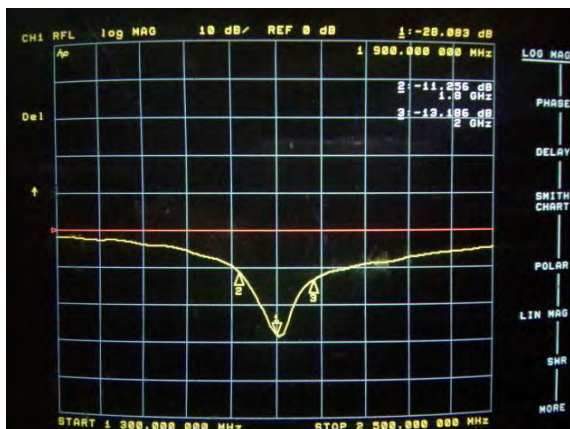


Impedance :



Body Tissue

Return Loss :

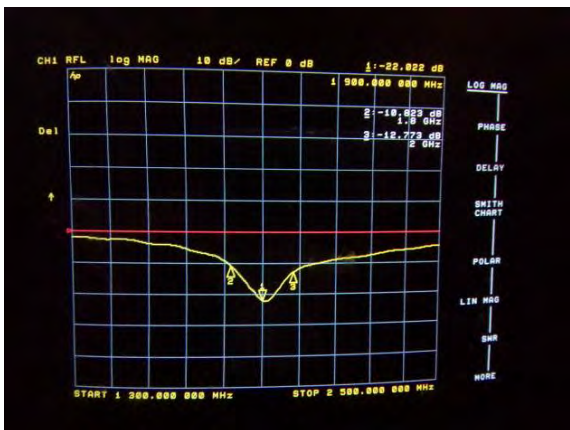


Impedance :



## APPENDIX D EUT TEST POSITION PHOTOS


Liquid depth  $\geq 15\text{cm}$

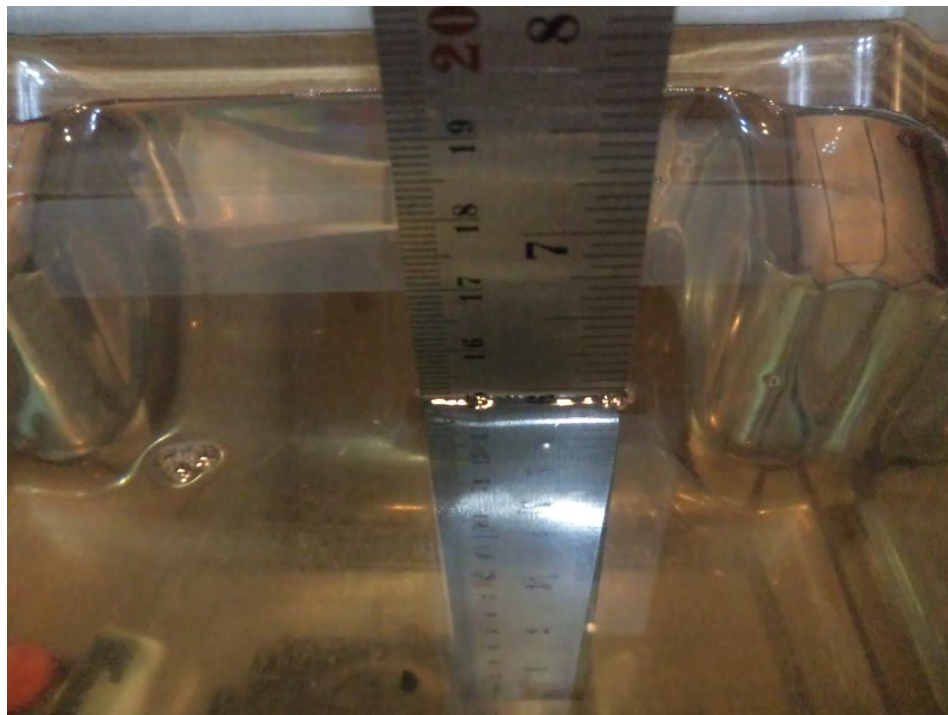

Body-worn Front Setup Photo (10mm)



**Body-worn Back Setup Photo (10mm)**

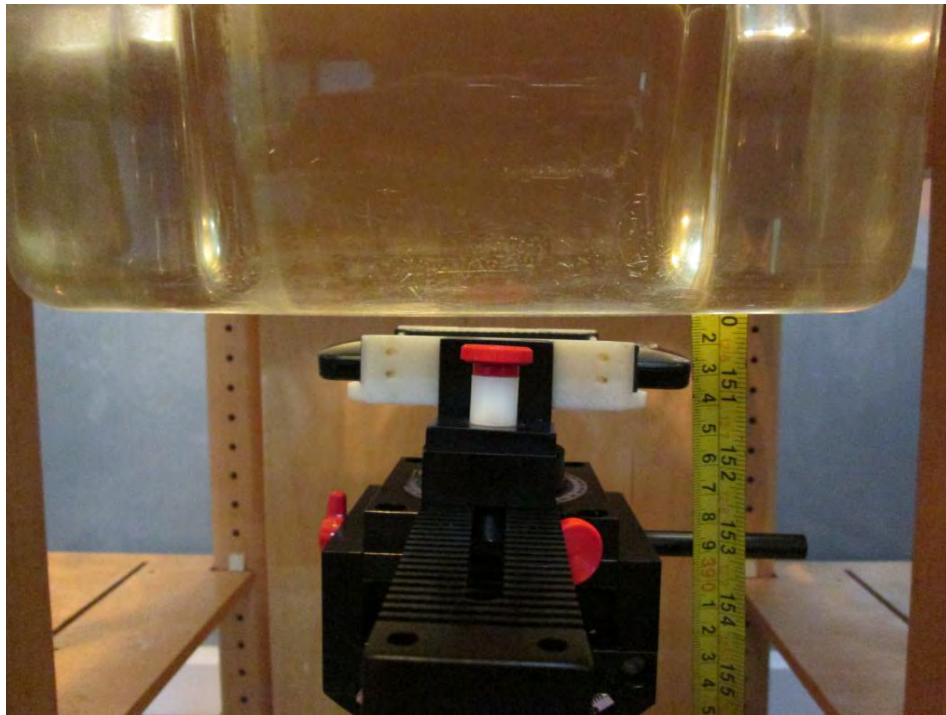

**Body-worn Left Setup Photo (10mm)**




**Body-worn Right Setup Photo (10mm)**




**Body-worn Bottom Setup Photo (10mm)**




**Left Head Touch Setup Photo**

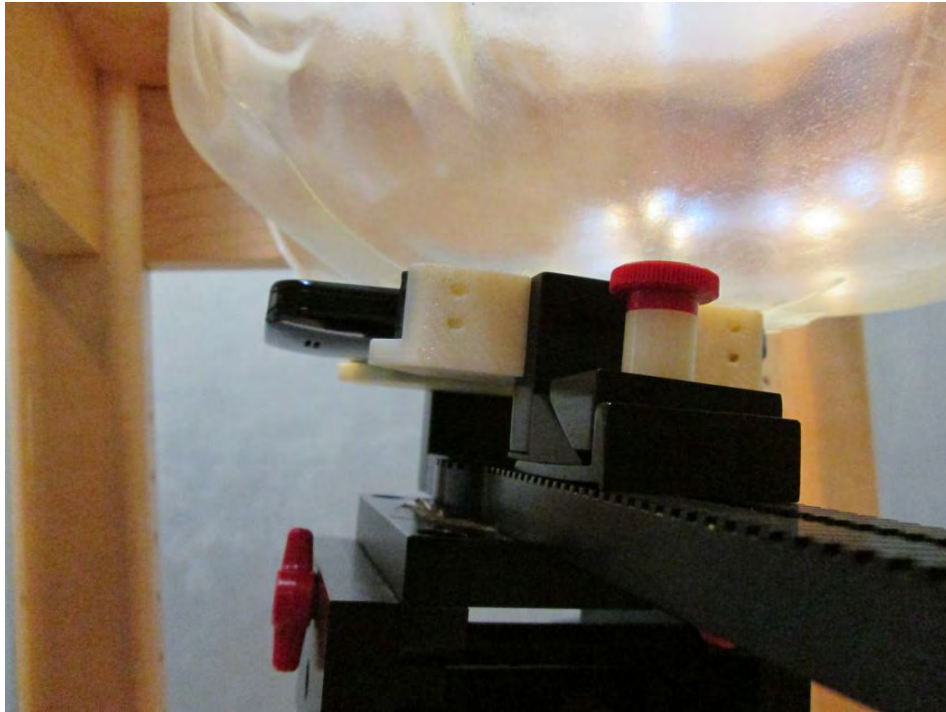

**Left Head Tilt Setup Photo**

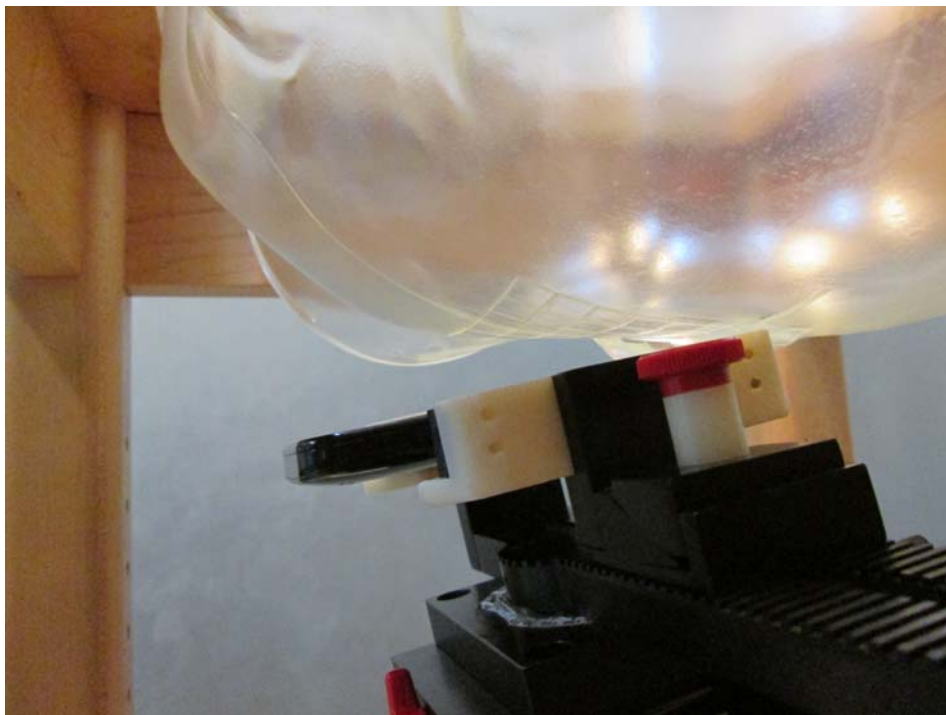

**Right Head Touch Setup Photo**

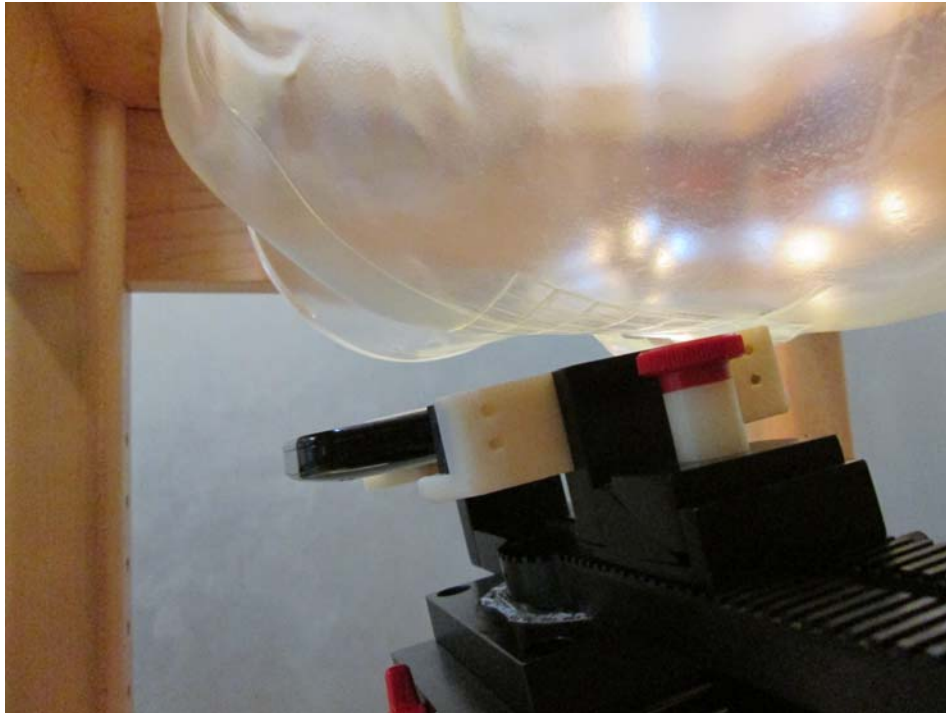

**Right Head Tilt Setup Photo**



## APPENDIX E EUT PHOTOS

**EUT – Front View**



**EUT – Back View**



**EUT – Left Side View**



**EUT – Right Side View**



**EUT – Top View**



**EUT – Bottom View**



**EUT – Battery off View**



## APPENDIX F INFORMATIVE REFERENCES

---

- [1] Federal Communications Commission, "Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, "Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transactions on Communications, vol. E80-B, no. 5, pp. 645-652, May 1997.
- [5] CENELEC, "Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, "The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

\*\*\*\*\* END OF REPORT \*\*\*\*\*