Report No.: ZEWA2310000147RG07

Page: 1 of 28

TEST REPORT

Application No.: ZEWA2310000147RG

Applicant: Quectel Wireless Solutions Co., Ltd.

Address of Applicant: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road,

Minhang District, Shanghai, China 200233

Manufacturer: Quectel Wireless Solutions Co., Ltd.

Address of Manufacturer: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road,

Minhang District, Shanghai, China 200233

EUT Description: 5G Sub-6 GHz M.2 Module

Model No.: RM520N-GL
Trade Mark: Quectel

FCC ID: XMR2023RM520NGLM

Standards: 47 CFR Part 2

47 CFR Part 96

Date of Receipt: 2022/05/15 (for report FYCR220600021101)

2023/04/19 (for report ZEWM2306000841RG01) 2023/09/26 (for report ZEWA2310000147RG01) 2023/11/10 (for report ZEWA2310000147RG07)

Date of Test: 2022/05/22 to 2022/07/22 (for report FYCR220600021101)

2023/05/09 to 2023/06/19 (for report ZEWM2306000841RG01) 2023/10/04 to 2023/10/30 (for report ZEWA2310000147RG01)

Date of Issue: 2023/11/10

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Keny Xu Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excented parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlauly and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

to the fullest extent or the land, which was sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, October 1886, Section 1886, Sectio

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053 sgs.ch

Report No.: ZEWA2310000147RG07

Page: 2 of 28

Version

Revision Record					
Version Chapter Date Modifier Remark					
01		2023/11/10		Original	

Prepared By	Jall Huang (Jack Huang) / Test Engineer
Checked By	Flora Wang (Flora Wang) / Reviewer





Report No.: ZEWA2310000147RG07

Page: 3 of 28

Contents

1	Versi	on	2
2	Test :	Summary	4
	2.1	LTE Band 48/ LTE CA_48C	4
3	Gene	ral Information	7
	3.1	Details of Client	7
	3.2	Test Location	7
	3.3	Test Facility	7
	3.4	General Description of EUT	3
	3.5	Test Mode	g
	3.6	Test Environment	g
	3.7	Description of Support Units	g
	3.8	Technical Specification	10
	3.9	Test Frequencies	11
4	Desc	ription of Tests	13
	4.1	Conducted Output Power	13
	4.2	Effective (Isotropic) Radiated Power of Transmitter	14
	4.3	Occupied Bandwidth	15
	4.4	Band Edge at Antenna Terminals	16
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	17
	4.6	Peak-Average Ratio	18
	4.7	Field Strength of Spurious Radiation	19
	4.8	Frequency Stability / Temperature Variation	20
	4.9	Test Setups	21
	4	4.9.1 Test Setup 1	21
	4	4.9.2 Test Setup 2	21
	4	4.9.3 Test Setup 3	22
	4.10	Test Conditions	23
5	Main	Test Instruments	24
6	Meas	surement Uncertainty	25
7	Appe	ndixes	28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 邮编: 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

t (86-755) 26012053

www.sgsgroup.com.cn sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 4 of 28

2 **Test Summary**

2.1 LTE Band 48/ LTE CA 48C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm	Section 1 of Appendix B.48&B.49	Pass
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB	Reference report FYCR220600021101	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference report FYCR220600021101	Pass
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	Reference report FYCR220600021101	Pass
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge.	Reference report FYCR220600021101	Pass
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz.	Reference report FYCR220600021101	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"

OF CHAIR IN LOCATION CONTROL OF CHAIR IN AUGUST AND CONTROL



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: ZEWA2310000147RG07

Page: 5 of 28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 www.sgsgroup.com.cn

Report No.: ZEWA2310000147RG07

Page: 6 of 28

Remark for report ZEWM2306000841RG01 issue on 2023/06/21:

This test report (Report No.: ZEWM2306000841RG01 issue on 2023/06/21) is based on the original test report (Report No.: FYCR220600021101 issue on 2022/07/24).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

The Effective (Isotropic) Radiated Power Output Data were fully tested in this report, and other items data please refer to the test report FYCR220600021101. The FCC ID is XMR2022RM520NGL has been certified, and the test report issued by Compliance Certification Services (Kunshan) Inc. Shenzhen branch. on 2022/07/24.

Remark for report ZEWA2310000147RG01 issue on 2023/10/31:

This test report (Report No.: ZEWA2310000147RG01 issue on 2023/10/31) is based on the original test report (Report No.: ZEWM2306000841RG01 issue on 2023/06/21).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Therefore in this report the Field Strength of Spurious Radiation of LTE Band 48 and Power of LTE Band 48/48C were tested, and other test data in this report are based on the previous report with report number ZEWM2306000841RG01 issue on 2023/06/21.

Remark for report ZEWA2310000147RG07 issue on 2023/11/10:

This test report (Report No.: ZEWA2310000147RG07 issue on 2023/11/10) is based on the original test report (Report No.: ZEWA2310000147RG01 issue on 2023/10/31).

Review this report and original report, this report just changing FCC ID.

Therefore in this report all items do not need to retest and all test data in this report are based on the previous report with report number ZEWA2310000147RG01 issue on 2023/10/31.

中国・广东・深圳市南山区科技园中区M-10栋1号厂房



邮编: 518057

Report No.: ZEWA2310000147RG07

Page: 7 of 28

3 General Information

3.1 Details of Client

Applicant:	Quectel Wireless Solutions Co., Ltd.	
Address of Applicant:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233	
Manufacturer:	Quectel Wireless Solutions Co., Ltd.	
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233	

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Jinhua Wei

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCC

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized as an

accredited testing laboratory. Designation Number: CN1336.

Test Firm Registration Number: 787754



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excented parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlauful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained froz 30 days only.

to the fullest extent or the teath of the teath of the fullest extent or the teath of the fullest extent or the teath of the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CO Noccheck@scs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10株1号厂房 邮編: 518057

t (86–755) 26012053 www.sgsgroup.com t (86–755) 26012053 sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 8 of 28

3.4 General Description of EUT

EUT Description:	5G Sub-6 GHz M.2 Module				
Model No.:	RM520N-GL	RM520N-GL			
Trade Mark:	Quectel				
Hardware Version:	R1.0				
Software Version:	RM520NGLAAR03A	\01M40	3		
Power Supply:	DC 3.7V				
IMEI:	RF Conducted	86837	1050414016		
IIVIEI:	RSE	86971	710030002900		
Antenna Type:	PIFA Antenna				
	LTE Band 48: 1dBi (Ant2) LTE CA_48C:		: 1dBi (Ant2)		
Antenna Gain:	Note: The antenna gain are derived from the gain information report provided by the manufacturer.				
	9kHz ~ 30MHz (0.3dB)			1000MHz idB)	1000MHz ~ 2000MHz (0.8dB)
RF Cable:	2000MHz ~ 4000MHz (1.1dB)		4000MHz ^ (1.8	~ 6000MHz sdB)	6000MHz ~ 12750MHz (2.6dB)
	Above 12750MHz (3.5dB)				

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 9 of 28

3.5 Test Mode

Test Mode	Test Modes Description	
LTE/TM1	LTE system, QPSK modulation	
LTE/TM2	LTE system, 16QAM modulation	
LTE/TM3	LTE system, 64QAM modulation	
LTE/TM4	LTE system, 256QAM modulation	
Remark: The test mode(s) are selected according to relevant radio technology specifications.		

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests		
Relative Humidity	44-46 % RH Ambient		
Value	Temperature(°C) Voltage(V)		
NTNV	22~23	3.7	

Remark:

NV: Normal Voltage NT: Normal Temperature

3.7 Description of Support Units

Description	Manufacturer	Model No.		
Test auxiliary PCB board	Quectel	N/A		
Remark: all above the information of table are provided by client.				



sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 10 of 28

3.8 Technical Specification

Characteristics	Description			
Radio System Type	□ LTE			
	Band	TX	RX	
Supported Frequency Range	LTE Band 48	3550 to 3700 MHz	3550 to 3700 MHz	
	LTE CA_48C	3550 to 3700 MHz	3550 to 3700 MHz	
	LTE Band48	⊠5 MHz ⊠10 MHz [☑15 MHz ☑20 MHz	
		⊠5MHz+20MHz	☑20MHz+5MHz	
Supported Channel Bandwidth	LTE Band CA_48C	⊠10MHz+20MHz	⊠20MHz+10MHz	
		⊠15MHz+20MHz	⊠20MHz+15MHz	
		⊠20MHz+20MHz		





Report No.: ZEWA2310000147RG07

Page: 11 of 28

3.9 Test Frequencies

Test Mode	Bandwidth	TX / RX	RF Channel			
i est ivioue			Low (L)	Middle (M)	High (H)	
	5MHz	TX/RX	Channel 55265	Channel55990	Channel 56715	
			3552.5 MHz	3625.0 MHz	3697.5 MHz	
LTE Band 48	10MHz	TX/RX	Channel 55290	Channel55990	Channel 56690	
			3555.0 MHz	3625.0 MHz	3695.0 MHz	
	15MHz	TX/RX	Channel 55315	Channel55990	Channel 56665	
			3557.5 MHz	3625.0 MHz	3692.5 MHz	
	20MHz TX/RX	TV/DV	Channel 55340	Channel55990	Channel 56640	
		TA/RX	3560.0 MHz	3625.0 MHz	3690.0 MHz	



邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

t (86-755) 26012053

sgs.china@sgs.com



Report No.: ZEWA2310000147RG07

Page: 12 of 28

LTE CA 48C(3550-3700):

LIL OA	_ 4 6C(3550-3700).		001			CC2	
Range	CC-Combo / NRB_agg [RB]		CC1 Note1		Note1		
		BW [RB]	NUL/DL	fUL/DL [MHz]	BW [RB]	NUL/DL	fUL/DL [MHz]
	05:400	25	55273	3553.3	100	55390	3565
	25+100	100	55340	3560	25	55457	3571.7
	F0 : 100	50	55295	3555.5	100	55439	3569.9
Low	50+100	100	55340	3560	50	55484	3574.4
	75 : 100	75	55318	3557.8	100	55489	3574.9
	75+100	100	55340	3560	75	55511	3577.1
	100+100	100	55340	3560	100	55538	3579.8
Mid	25.400	25	55898	3615.8	100	56015	3627.5
	25+100	100	55965	3622.5	25	56082	3634.2
	50+100	50	55896	3615.6	100	56040	3630
		100	55941	3620.1	50	56085	3634.5
	75+100	75	55893	3615.3	100	56064	3632.4
	75+100	100	55916	3617.6	75	56087	3634.7
	100+100	100	55891	3615.1	100	56089	3634.9
	25 : 100	25	56523	3678.3	100	56640	3690
High	25+100	100	56590	3685	25	56707	3696.7
	F0 : 100	50	56496	3675.6	100	56640	3690
	50+100	100	56541	3680.1	50	56685	3694.5
	75 400	75	56469	3672.9	100	56640	3690
	75+100	100	56491	3675.1	75	56662	3692.2
	100+100	100	56442	3670.2	100	56640	3690
Note 1: Ca	Note 1: Carriers in increasing frequency order.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 www.sgsgroup.com.cn 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 t (86-755) 26012053 sgs.china@sgs.com

邮编: 518057

Report No.: ZEWA2310000147RG07

Page: 13 of 28

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excented parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

to the fullest extent or the law. Journal of the state of the fullest extent or the law. Journal of the state of the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sgs.com

Not Workshop, M-10, Middle Seding, Science & Technology Park, Nanshan Districk, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn

sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 14 of 28

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excented parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

to the fullest extent of the law. Unless supermore statement of the full state of the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443,

邮编: 518057

Report No.: ZEWA2310000147RG07

Page: 15 of 28

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.
Indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unally and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Report No.: ZEWA2310000147RG07

Page: 16 of 28

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Report No.: ZEWA2310000147RG07

Page: 17 of 28

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.
Indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unally and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Report No.: ZEWA2310000147RG07

Page: 18 of 28

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



ZEWA2310000147RG07 Report No.:

19 of 28 Page:

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel, the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exciting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlauf and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. to the fullest extent of the law. Online was a sample(s) are retained for 3 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053

Report No.: ZEWA2310000147RG07

Page: 20 of 28

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3




Report No.: ZEWA2310000147RG07


Page: 21 of 28

4.9 Test Setups

4.9.1 **Test Setup 1**

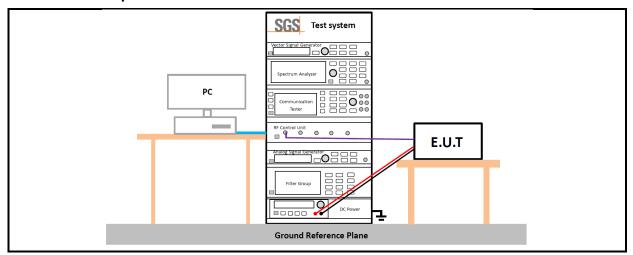

4.9.2 **Test Setup 2**

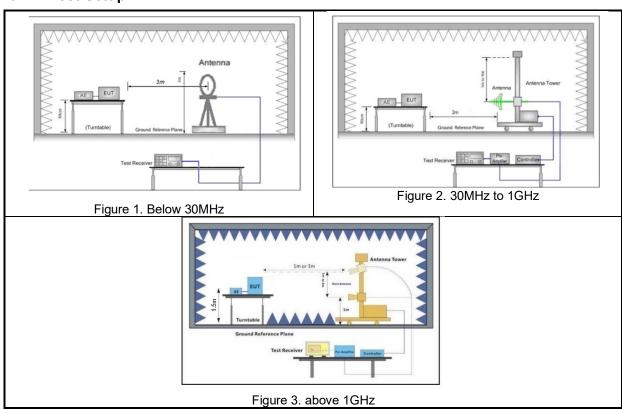



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that Information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from execting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CAD Doccheck@sus.com"

t (86-755) 26012053 www.sgsgroup.com.cn


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057



Report No.: ZEWA2310000147RG07

Page: 22 of 28

4.9.3 **Test Setup 3**

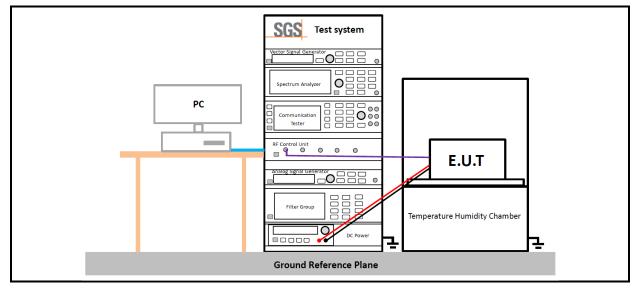



Report No.: ZEWA2310000147RG07

Page: 23 of 28

4.10 Test Conditions

Transmit Output Power Data - Average Power, Total				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 1			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	LTE/TM1;LTE/TM2;LTE/TM3;LTE/TM4			
Field Strength of Spurious Radiation				
Test Case	Test Conditions			
Test Environment	Ambient Climate & Rated Voltage			
Test Setup	Test Setup 2			
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Mode	LTE/TM1 Remark: All bandwidth and modulation of LTE have been pre tested, and only the worst results are reflected in the report.			



sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 24 of 28

5 **Main Test Instruments**

RF conducted test (for report ZEWM2306000841RG01)					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-032	2023/02/17	2024/02/16
Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-012	2023/02/16	2024/02/15
DC power supply	HYELEC	HY3005B	SZ-WRG-M-044	2022/09/22	2023/09/21
Digital Multimeter	VICTOR	VC890C	SZ-WRG-M-071	2023/02/16	2024/02/15
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	SZ-WRG-M-033	2023/02/16	2024/02/15
Wideband Radio	A	MT00040	C7 WDC M 040	2022/05/31	2023/05/30
Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2023/05/25	2024/05/24
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-077	2022/07/06	2023/07/05
Signal Generator	KEYSIGHT	N5182A	SZ-WRG-M-041	2023/02/16	2024/02/15
Signal &Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2023/02/16	2024/02/15



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CVD.Doccheck@sos.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053



Report No.: ZEWA2310000147RG07

Page: 25 of 28

RF conducted test (for report ZEWA2310000147RG01)						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-032	2023/02/17	2024/02/16	
Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-012	2023/02/16	2024/02/15	
DC power supply	HYELEC	HY3005B	SZ-WRG-M-044	2023/09/14	2024/09/13	
Digital Multimeter	VICTOR	VC890C	374464013173	2023/02/06	2024/02/05	
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	SZ-WRG-M-033	2023/02/16	2024/02/15	
Wideband Radio Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2023/05/25	2024/05/24	
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SZ-WRG-M-017	2022/12/22	2023/12/21	
Signal Generator	KEYSIGHT	N5182A	SZ-WRG-M-041	2023/02/16	2024/02/15	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-032	2023/02/17	2024/02/16	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CVD.Doccheck@sos.com"

t (86-755) 26012053 www.sgsgroup.com.cn



Report No.: ZEWA2310000147RG07

Page: 26 of 28

Radiated spurious emissions (for report ZEWA2310000147RG01)						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
EMI TEST RECEIVER	Rohde & Schwarz	ESR	SZ-WRG-M-047	2023/02/16	2024/02/15	
Signal &Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2023/02/16	2024/02/15	
Low Noise Amplifier 9K-3GHz	Tonscend	TAP9K3G32	SZ-WRG-M-049	2023/02/16	2024/02/15	
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2023/02/16	2024/02/15	
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2023/02/16	2024/02/15	
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2023/02/16	2024/02/15	
Active Loop Antenna 9kHz-30MHz	SCHWARZBECK	FMZB 1519B	SZ-WRG-M-053	2022/01/16	2024/01/15	
TRILOG Breitband Antenne 30MHz-1GHz	SCHWARZBECK	VULB 9168	SZ-WRG-M-054	2022/01/16	2024/01/15	
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2022/01/16	2024/01/15	
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2022/01/16	2024/01/15	
RSE Test Software	Tonscend	JS32-RSE V4.0.0	SZ-WRG-S-058	NCR	NCR	
RE Test Software	Tonscend	JS36-RSE V5.0.0.1	SZ-WRG-S-059	NCR	NCR	
Radio Communication Tester	Anritsu	MT8821C	SZ-WRG-M-042	2023/05/25	2024/05/24	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 www.sgsgroup.com.cn

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 27 of 28

Measurement Uncertainty 6

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	RF conducted power	± 0.42dB
	Radiated Spurious emission test(UE)	±4.8dB (30MHz-1GHz)
0		±4.68dB (1GHz-6GHz)
2		±4.52dB (6GHz-18GHz)
		±5.26dB (18GHz-40GHz)

The U_{lab} (lab Uncertainty) is less than U_{cispt/ETSI} (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

sgs.china@sgs.com

Report No.: ZEWA2310000147RG07

Page: 28 of 28

7 Appendixes

Appendix A.3	WWAN Setup Photos-part96	
Appendix B.48	LTE Band 48(3550-3700)	
Appendix B.49	LTE CA_48C(3550-3700)	

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from excising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unique and printeders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sos.com"