

RF TEST REPORT

FCC / ISED

Socket Mobile, Inc.

MODEL NAME

S370

FCC ID

LUBS370

ISED ID

2529A-S370

REPORT NUMBER

HA230602-SOC-001-R01-1

TEST REPORT

Date of Issue
September 22, 2023

Test Site
Hyundai C-Tech, Inc. dba HCT America, Inc.
1726 Ringwood Ave, San Jose, CA 95131, USA

Applicant	Socket Mobile, Inc.
Applicant Address	40675 Encyclopedia Cir., Fremont, CA 94538, U.S.A.
FCC ID	LUBS370
ISED ID	2529A-S370
Model Name	S370
EUT Type	Contactless Membership Card Reader / Writer
Modulation Type	13.56 MHz (ASK)
FCC Classification	Low Power Communication Device Transmitter (DXX)
FCC Rule Part(s)	Part 15.225
ISED Rule Part(s)	RSS-210 Issue 10 (April 2020)

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech, Inc. dba HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Tim Lee

Test Engineer

Reviewed By

Yongsoo Park

Technical Manager

REVISION HISTORY

The revision history for this document is shown in table.

TEST REPORT NO.	DATE	DESCRIPTION
HA230602-SOC-001-R01	July 19, 2023	Initial Issue
HA230602-SOC-001-R01-1	September 22, 2023	Replacement of related test results according to change in test conditions of charging mode - 9.3 Radiated Spurious Emissions - 9.4 Powerline Conducted Emissions

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. METHODOLOGY	5
3. INSTRUMENT CALIBRATION	5
4. FACILITIES AND ACCREDITATIONS	6
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY OF TEST RESULTS	15
9. TEST RESULT	20
9.1 20 dB BANDWIDTH / 99% BANDWIDTH	20
9.2 FREQUENCY STABILITY	21
9.3 RADIATED SPURIOUS EMISSIONS	22
9.4. POWERLINE CONDUCTED EMISSIONS	34
10. LIST OF TEST EQUIPMENT	40
APPENDIX A. TEST SETUP PHOTOS	41
APPENDIX B. PHOTOGRAPHS OF EUT	42

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	S370
EUT Type	Contactless Membership Card Reader / Writer
Serial Number	23188550002920017
Power Supply	5 V d.c. (USB Port) Li Polymer Battery : 3.7 VDC (4.2 VDC max), 1800 mAh
RF Specification	13.56 MHz : ASK Bluetooth LE V4.2 (1Mbps) : GFSK
Operating Environment	Indoor
Operating Temperature ¹⁾	-20 °C ~ 70 °C

RF SPECIFICATION SUBJECT TO THE REPORT

Frequency Range	13.56 MHz
Max. RF Output Power	74.1 dBuV/m @3m
Modulation Type	ASK
Number of Channels	1 channel
Antenna Specification	Loop antenna
Firmware Version ²⁾	v1.17 (Build 213)
Hardware Version ²⁾	E2/F0 (Rev C)
Date(s) of Tests	June 19, 2023 ~ July 13, 2023, September 21, 2023 ~ September 22, 2023

Note :

1. Operating temperature is declared by the manufacturer.
2. Firmware and Hardware Version are as received by the client.

2. METHODOLOGY

The measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C and RSS-GEN issue 5, RSS-210 issue 10.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. To find out the maximum emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested per test setup instruction provided by the manufacturer under continuous Tx operating condition. Testing was performed at the Tx mode using the key card provided by the manufacturer.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

According to RSS-Gen Issue 5 (Section 6.8) :

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Occupied Bandwidth	± 16.78 kHz
Radiated Emissions (below 1 GHz)	± 5.70 dB

7. DESCRIPTION OF TESTS


7.1. 20 dB BANDWIDTH / 99 % BANDWIDTH

Limit

20 dB bandwidth : According to §15.215(c), the bandwidth at 20 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

99% Bandwidth : Section 6.7, RSS-Gen Issue 5

Test Configuration

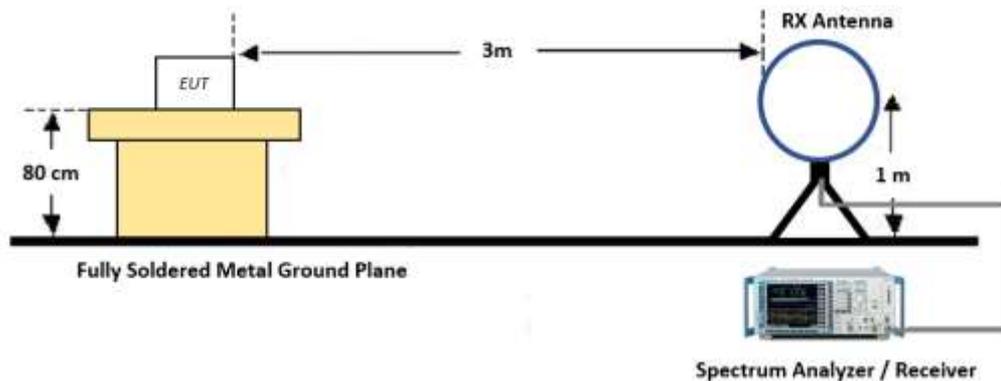

Test Procedure (20 dB Bandwidth)

The Spectrum Analyzer setting :

- RBW = 1 kHz
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Test Procedure (99 % Bandwidth)

The transmitter output is connected to the spectrum analyzer.

- RBW = 1 kHz
- VBW $\approx 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Note :

Bandwidth measurement feature in the spectrum analyzer was used to measure 20 dB bandwidth (X dB bandwidth function) and 99 % bandwidth.


7.2. FREQUENCY STABILITY

Limit

§15.225 (e), RSS-210 Issue 10

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

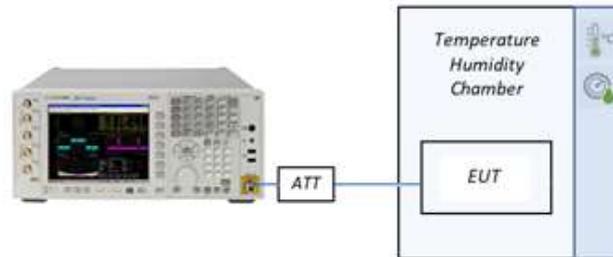

Test Procedure

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Note:

- Temperature humidity chamber is used to adjust the temperature between -20°C and $+50^{\circ}\text{C}$
- The primary supply voltage was adjusted between 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.3. RADIATED EMISSION

RADIATION EMISSION LIMIT

FCC : 47 CFR § 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


ISED : RSS-GEN Section 8.9		
Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Operation within the band 13.110 MHz – 14.010 MHz

FCC : 47 CFR § 15.225 (a), (b), (c), (d) / ISED : RSS-210 ANNEX B.6		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 ≤ f ≤ 13.553 13.567 ≤ f ≤ 13.710	334	30
13.110 ≤ f ≤ 13.410 13.710 ≤ f ≤ 14.010	106	30

Test Configuration

Below 30 MHz

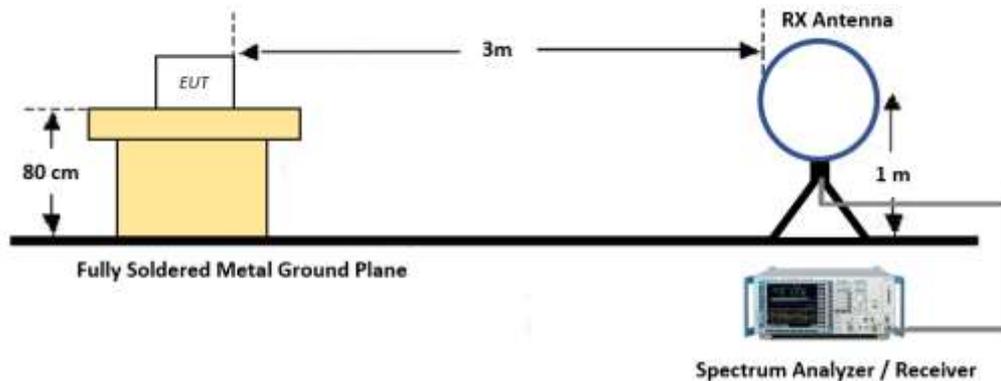

Test Procedure of Radiated spurious emissions (Below 30 MHz)


1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L) + Distance Factor (D.F)

Adequate comparison measurements were confirmed against an open field site since the test was performed at alternative site (3m SAC) other than the open area test site. Sufficient test was made to demonstrate that the alternative site produces result that correlate with the one of test made at the open field site based on KDB 414788.

30 MHz - 1 GHz

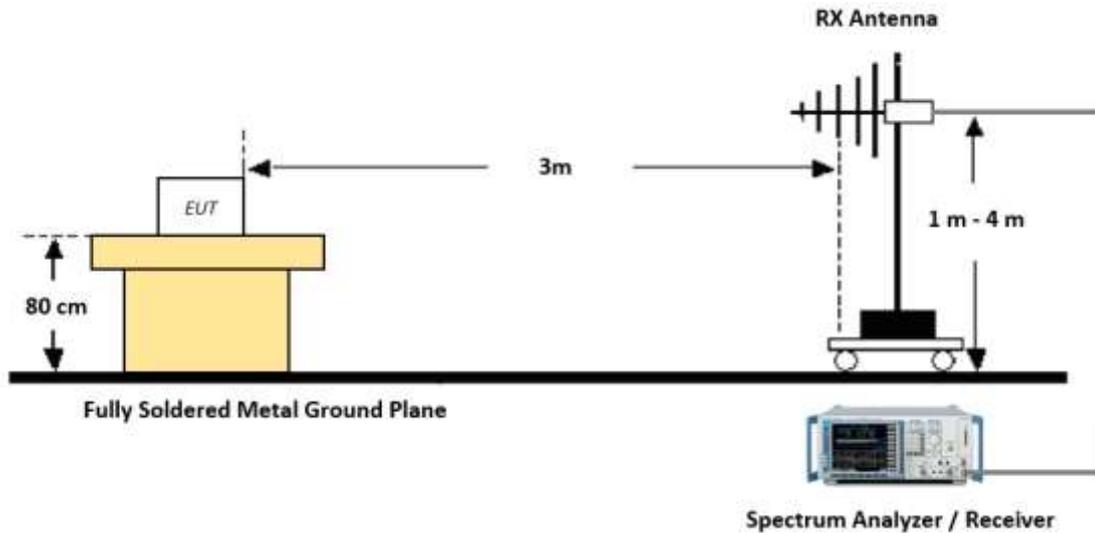

Test Procedure of Radiated spurious emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type (Peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW ≥ 3*RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, the method (1) is mainly used

6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

7.4. AC LINE CONDUCTED EMISSIONS

LIMIT

47 CFR § 15.207, RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

According to FCC KDB 174176 D01 Line Conducted FAQ v01r01 :

Devices Operating Above 30 MHz

For a device with a permanent or detachable antenna operating above 30 MHz, measurements must be performed with the antenna connected as specified in clause 6.2 of ANSI C63.10-2013.

Devices Operating Below 30 MHz

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band. All measurements must be performed as specified in clause 6.2 of ANSI C63.10-2013.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	IC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.215 (c)	-	N/A	Radiated	PASS
Occupied Bandwidth	-	Section 6.7 RSS-GEN	N/A		PASS
Radiated E-Field Emissions 13.553 MHz - 13.567 MHz	§15.225 (a)	Annex B.6 (a)(i) RSS-210	cf. Section 7.3		PASS
Radiated E-Field Emissions 13.410 MHz ≤ f ≤ 13.553 MHz 13.567 MHz ≤ f ≤ 13.710 MHz	§15.225 (b)	Annex B.6 (a)(ii) RSS-210	cf. Section 7.3		PASS
Radiated E-Field Emissions 13.110 MHz ≤ f ≤ 13.410 MHz 13.710 MHz ≤ f ≤ 14.010 MHz	§15.225 (c)	Annex B.6 (a)(iii) RSS-210	cf. Section 7.3		PASS
Radiated Spurious Emissions	15.209	Section 8.9 RSS-GEN	cf. Section 7.3		PASS
Frequency Stability	§15.225 (e)	RSS-210, B.6	cf. Section 7.2		PASS
AC Power line Conducted Emissions	§15.207	RSS-GEN, 8.8	cf. Section 7.4	Conducted	PASS

WORST CASE CONFIGURATION

RADIATED TEST

All X, Y, and Z positions for horizontal / vertical antenna polarization were investigated to find the worst-case position. Y position was selected for the final evaluation.

The device contains Li Polymer rechargeable battery at the bottom of the product. Both charging mode and battery discharging operating mode were tested.


Conducted test

AC Line conducted emission test was performed in two modes because the EUT operates below 30 MHz


- (1) Ante Device with antenna connected
- (2) Device with antenna terminated with dummy load

Both charging mode and battery discharging operating mode were tested.


TEST CONFIGURATION

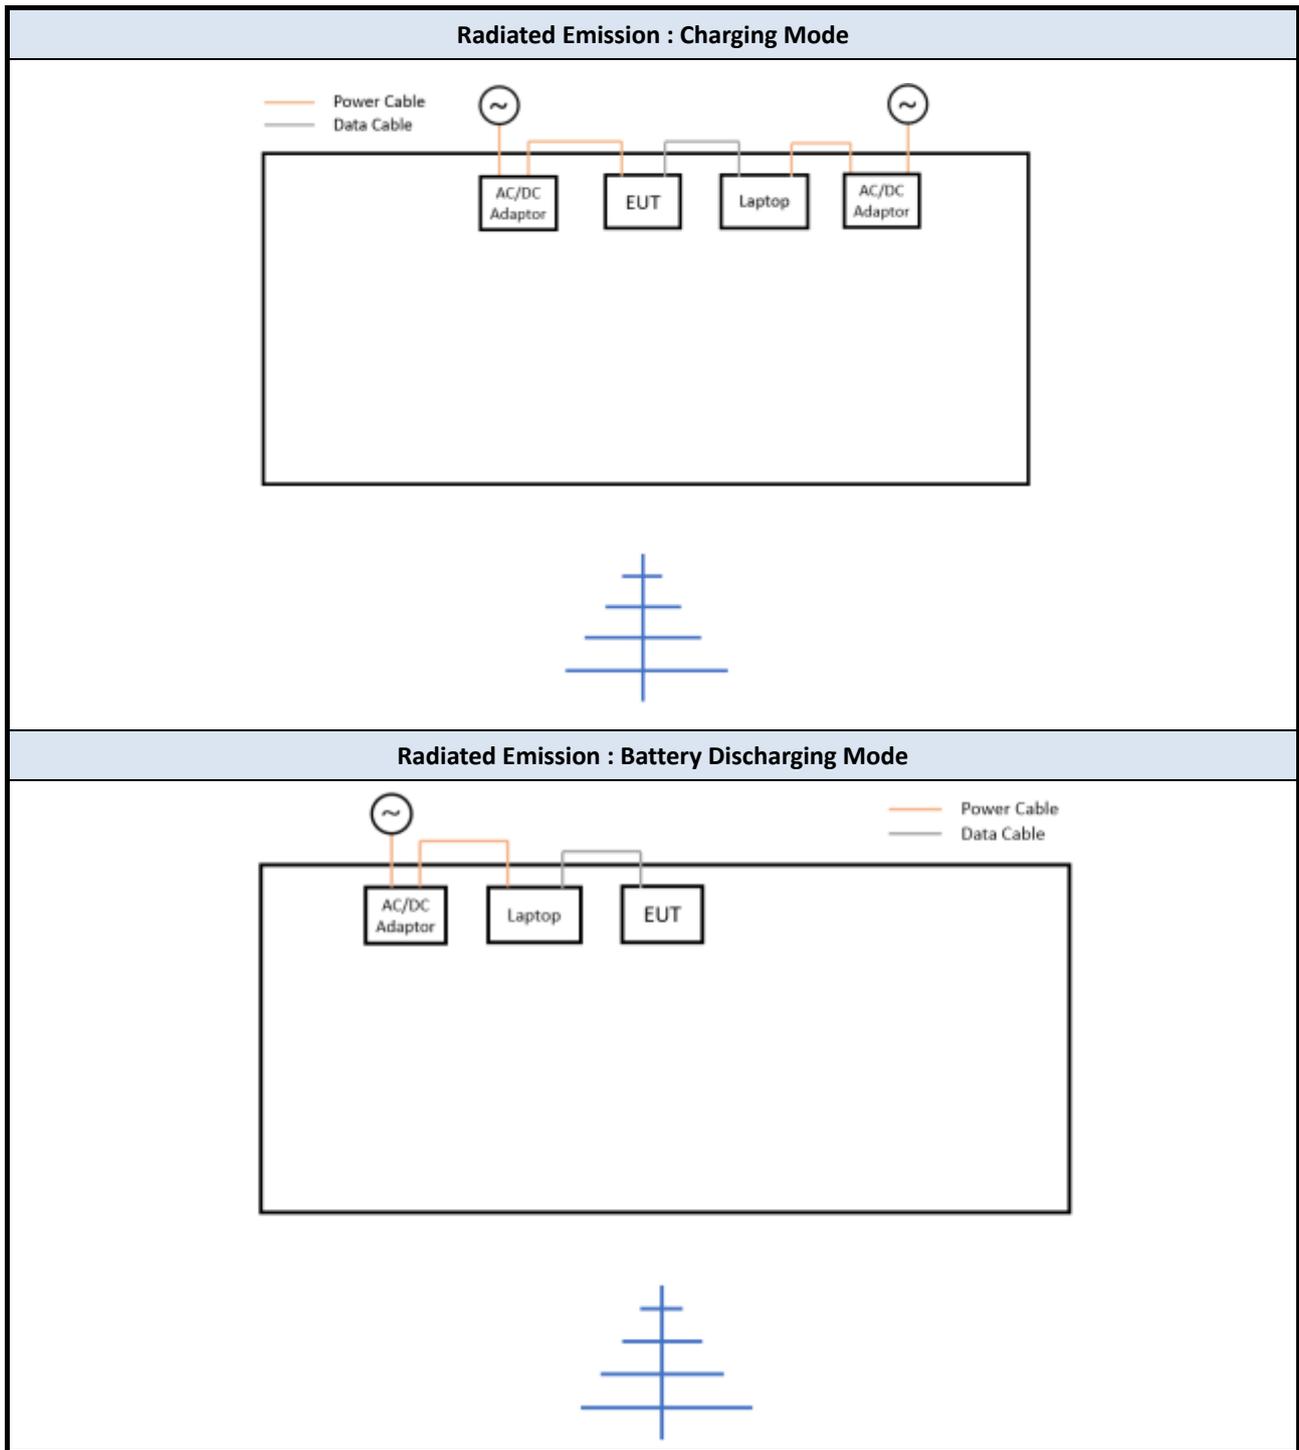

Conducted Emission : Charging Mode

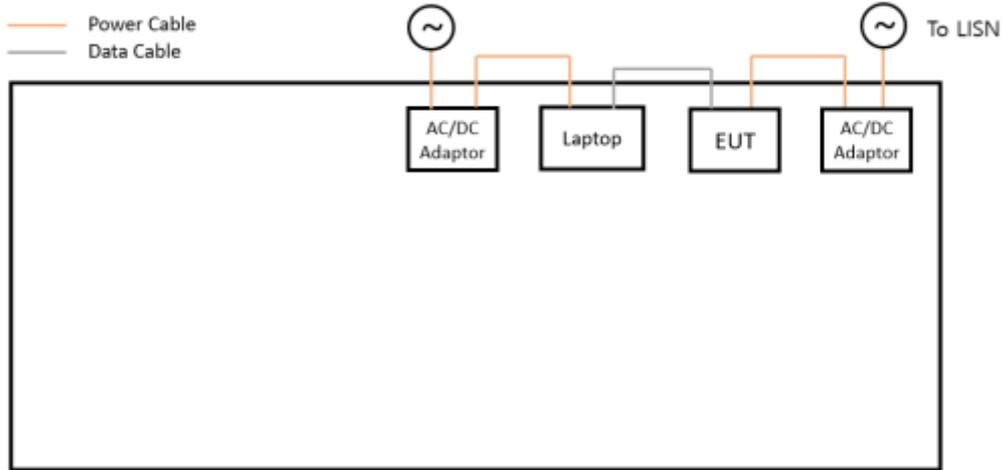

Conducted Emission : Battery Discharging Mode

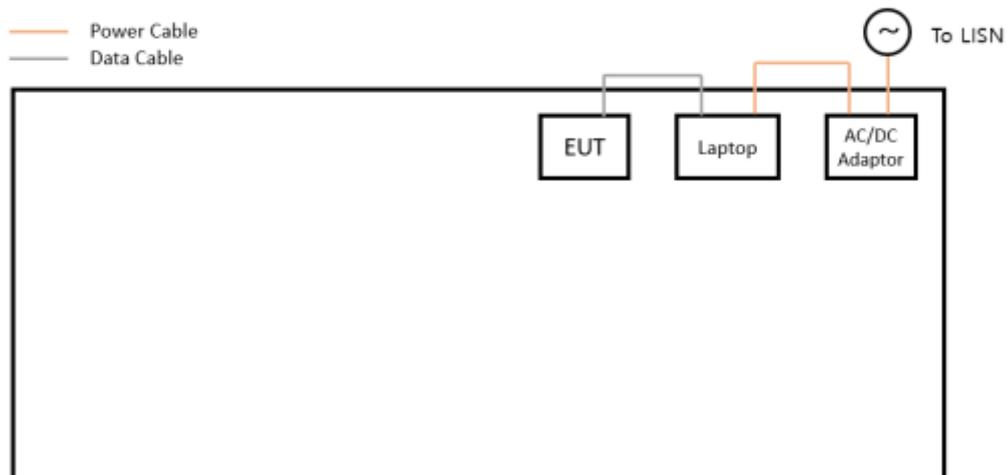

LIST OF SUPPORT EQUIPMENT

Equipment Type	Model No.	Serial Number	Manufacturer	Qty	Note
Laptop	15-dy2073dx	5CD224DN6	HP	1	-
AC/DC Adaptor for Laptop	TPN-DA16	9900000005135	HP	1	Input : 100-240 V a.c., 1.4 A, 50-60 Hz Output : 19.5 V d.c., 2.31 A, 45.0 W
AC/DC Adaptor for EUT	ZAU-F050100A-02	1811	ShenZhen Zhongling Electronics Technology Co., Ltd.	1	Input : 100-240 V a.c., 1.4 A, 50/60 Hz Output : 5.0 V d.c., 1000 mA

9. TEST RESULT

9.1 20 dB BANDWIDTH / 99% BANDWIDTH

HF		20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit
Frequency (MHz)	Modulation	Result	Result	
13.56	ASK	0.369	0.319	N/A

TEST PLOTS



9.2 FREQUENCY STABILITY

Operating Frequency 13.56 MHz
 Reference Voltage 5.0 VDC
 Limit 100 PPM = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency [MHz]	Frequency Dev. (Hz)	Frequency (ppm)
100%	5.0	-20	13.560446	446.49	32.93
100%		-10	13.560446	445.76	32.87
100%		0	13.560430	429.73	31.69
100%		+10	13.560411	410.70	30.29
100%		+20 (Ref.)	13.560402	402.13	29.66
100%		+30	13.560406	405.69	29.92
100%		+40	13.560398	397.90	29.34
100%		+50	13.560419	419.16	30.91
115%		5.75	+20	13.560401	401.19
85%	4.25	+20	13.560401	400.69	29.55

9.3 RADIATED SPURIOUS EMISSIONS

Radiated Electric Field Emission within band 13.110 – 14.010 MHz

Test Mode Charging Mode
 Operating Frequency 13.56 MHz

13.553 MHz-13.567 MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.560	B	47.9	19.9	40	27.8	84.0	56.2	QP
13.560	H	54.2	19.9	40	34.1	84.0	49.9	QP
13.560	V	51.5	19.9	40	31.4	84.0	52.6	QP

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.455	B	17.2	19.9	40	-2.9	50.5	53.4	QP
13.455	H	23.2	19.9	40	3.1	50.5	47.4	QP
13.551	V	26.0	19.9	40	5.9	50.5	44.6	QP
13.585	V	23.1	19.9	40	3.0	50.5	47.5	QP
13.666	H	24.0	19.9	40	3.9	50.5	46.6	QP
13.667	B	16.0	19.9	40	-4.1	50.5	54.6	QP

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.348	B	20.4	19.9	40	0.3	40.5	40.2	QP
13.348	H	26.3	19.9	40	6.2	40.5	34.3	QP
13.349	V	24.2	19.9	40	4.1	40.5	36.4	QP
13.772	B	15.6	19.9	40	-4.5	40.5	45.0	QP
13.773	H	27.6	19.9	40	7.5	40.5	33.0	QP
13.773	V	22.8	19.9	40	2.7	40.5	37.8	QP

Notes:

- Correction Factor: Antenna Factor + Cable loss
- Total = Reading (dBuV) + Correction Factor (dB) + Distance extrapolation factor (dB)
 - The measurement distance is 3 meters.
 - Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB) = $40 \log(30/3) = 40$ dB
- Max. fundamental level at 3 m is 74.1 dBuV/m (13.56 MHz at H)

Radiated Electric Field Emission within band 13.110 – 14.010 MHz (CON'T)

Test Mode Battery Discharging Mode
 Operating Frequency 13.56 MHz

13.553 MHz-13.567 MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.560	H	52.9	19.6	40	32.5	84.0	51.5	QP
13.560	B	45.4	19.6	40	25.0	84.0	59.0	QP
13.561	V	48.3	19.6	40	27.9	84.0	56.1	QP

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.432	B	15.6	19.6	40	-4.8	50.5	55.3	QP
13.475	H	24.5	19.6	40	4.1	50.5	46.4	QP
13.475	V	20.0	19.6	40	-0.4	50.5	50.9	QP
13.644	B	17.5	19.6	40	-2.9	50.5	53.4	QP
13.646	H	22.1	19.6	40	1.7	50.5	48.8	QP
13.686	V	4.5	19.6	40	-15.9	50.5	66.4	QP

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz


Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
13.348	H	26.7	19.6	40	6.3	40.5	34.2	QP
13.348	V	22.0	19.6	40	1.6	40.5	38.9	QP
13.349	B	19.2	19.6	40	-1.2	40.5	41.7	QP
13.771	B	17.1	19.6	40	-3.3	40.5	43.8	QP
13.772	H	26.4	19.6	40	6.0	40.5	34.5	QP
13.772	V	21.0	19.6	40	0.6	40.5	39.9	QP

Notes:


1. Correction Factor: Antenna Factor + Cable loss
2. Total = Reading (dBuV) + Correction Factor (dB) + Distance extrapolation factor (dB)
 - The measurement distance is 3 meters.
 - Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance}) \text{ (dB)} = 40 \log (30/3) = 40 \text{ dB}$

▣ TEST PLOTS


Radiated E-Field Emission (Antenna Position 180°) : 13.110 – 14.010 MHz, Charging Mode

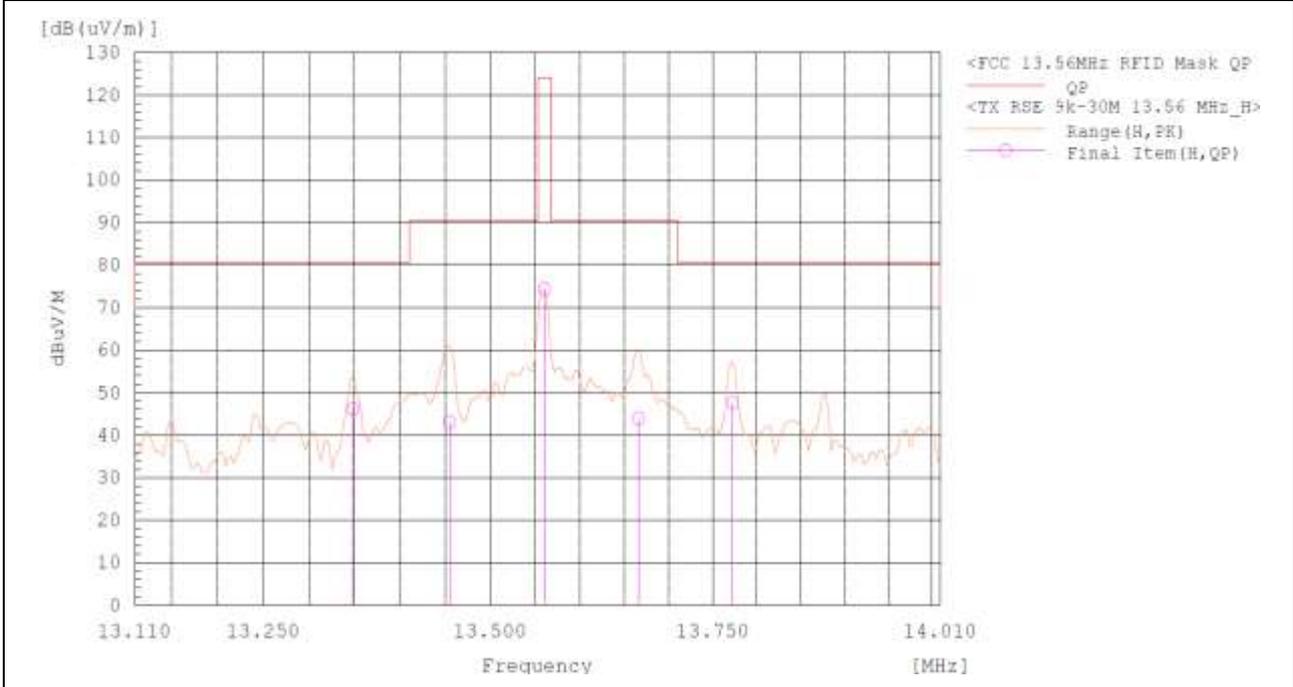

Radiated E-Field Emission (Antenna Position 90°) : 13.110 – 14.010 MHz, Charging Mode

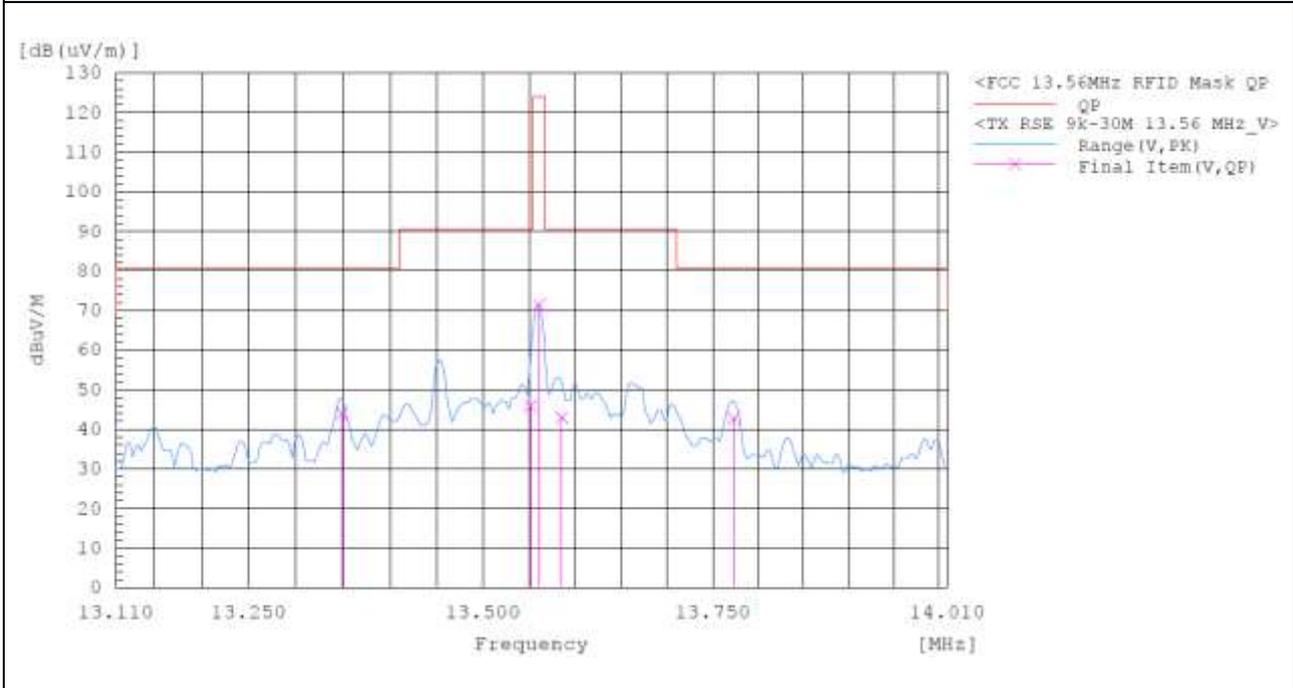


▣ TEST PLOTS

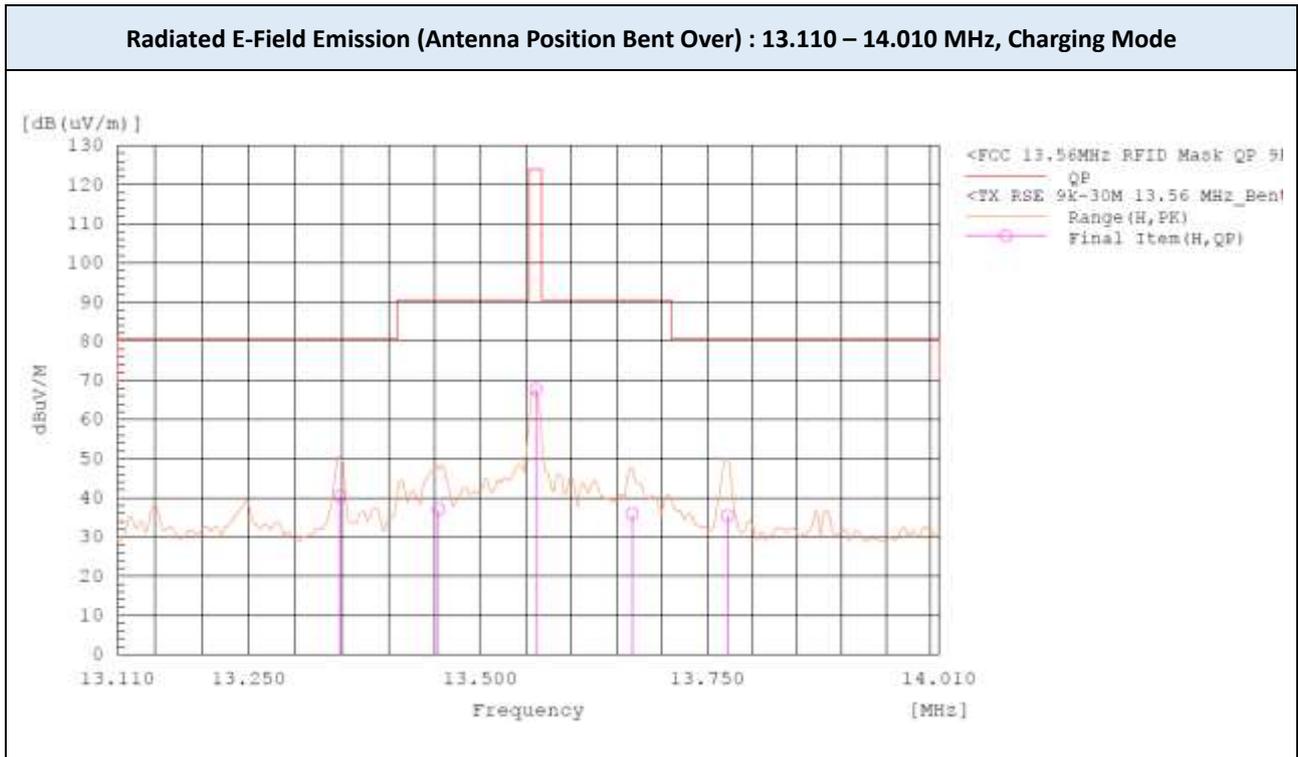


▣ TEST PLOTS


Radiated E-Field Emission (Antenna Position 180°) : 13.110 – 14.010 MHz, Battery Discharging Mode

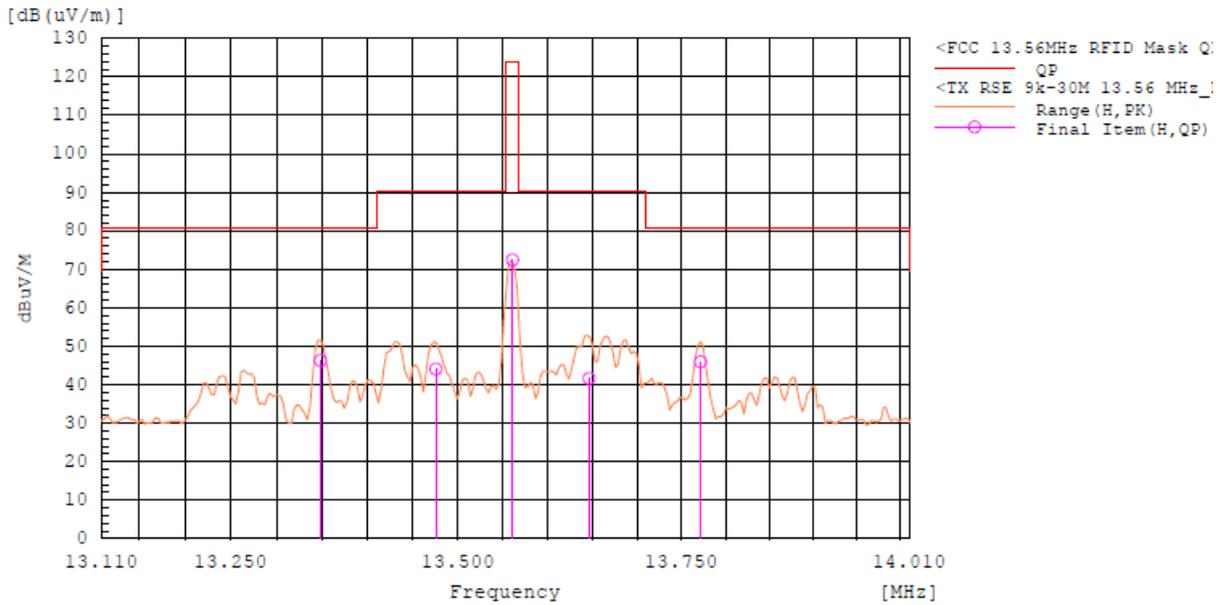

Radiated E-Field Emission (Antenna Position 90°) : 13.110 – 14.010 MHz, Battery Discharging Mode

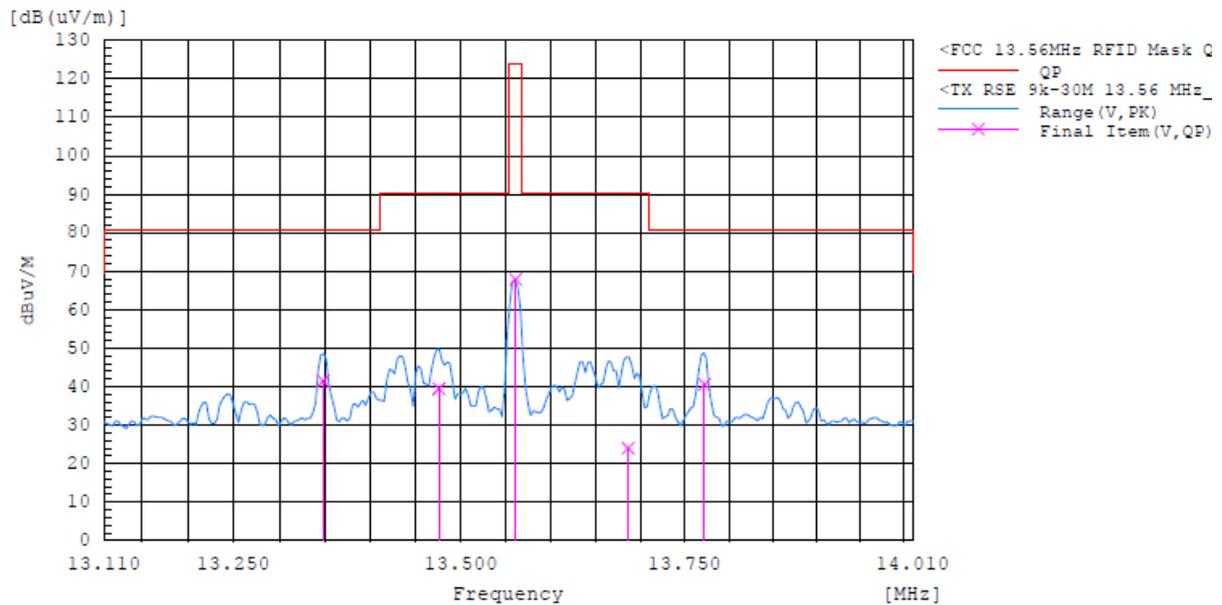

▣ TEST PLOTS

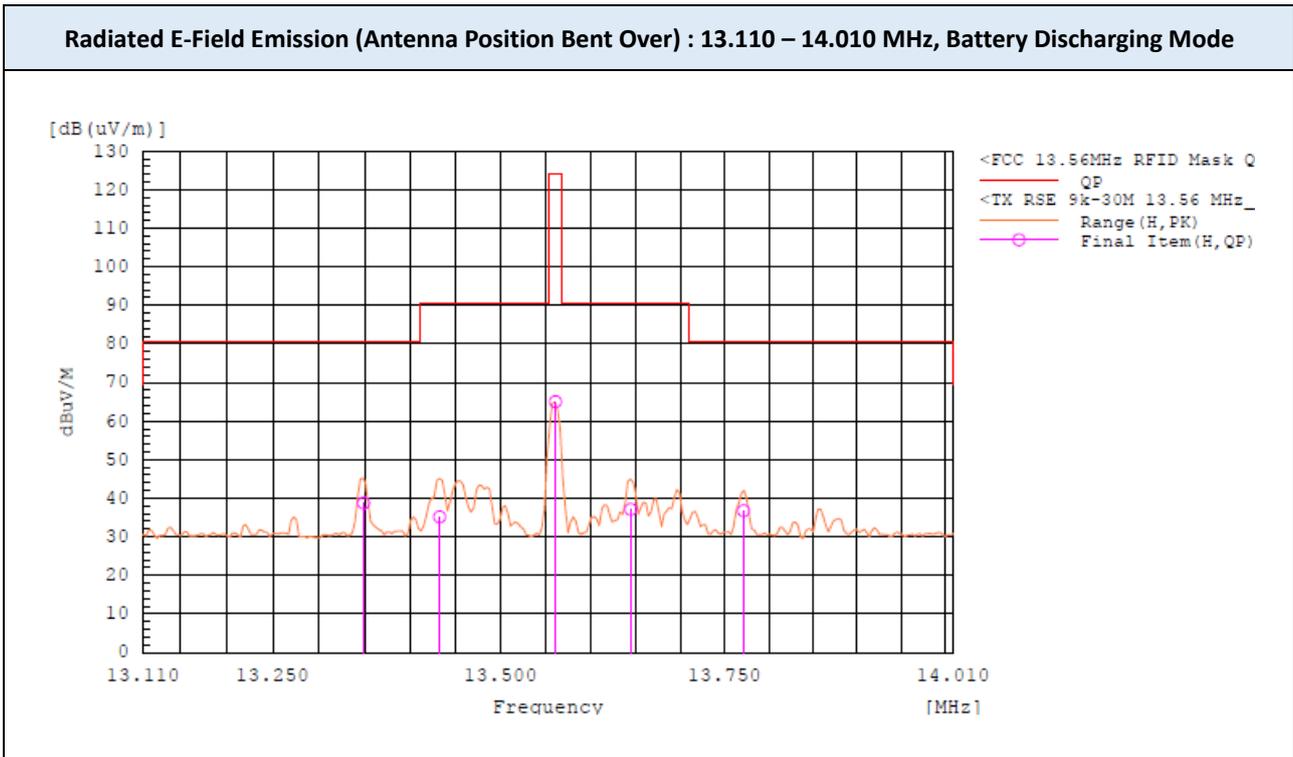

Radiated Spurious Emission

Test Mode Charging Mode
 Operating Frequency 13.56 MHz

Frequency Range : 9 kHz – 30MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m) ²⁾	Margin (dB)	Measurement Type
0.503	B	20.5	21	40	1.5	33.6	32.1	QP
0.800	H	14.5	21	40	-4.5	29.5	34.0	QP
0.801	V	10.4	21	40	-8.6	29.5	38.1	QP

Notes:

- Correction Factor: Antenna Factor + Cable loss
- Total = Reading (dBuV) + Correction Factor (dB) + Distance extrapolation factor (dB)
 - The measurement distance is 3 meters.
 - Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB) = $40 \log(30/3) = 40$ dB

Frequency Range : 30 MHz – 1 GHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
33.427	V	0.1	24.8	24.9	40	15.1	QP
48.008	V	16.0	15.0	31.0	40	9.0	QP
59.954	H	12.1	13.9	26.0	40	14.0	QP
59.998	V	25.1	13.9	39.0	40	1.0	QP
83.882	V	13.6	13.9	27.5	40	12.5	QP
101.997	H	12.0	17.0	29.0	43.5	14.5	QP
144.022	H	11.7	19.5	31.2	43.5	12.3	QP
149.192	V	12.0	19.1	31.1	43.5	12.4	QP
371.028	H	18.1	21.8	39.9	46	6.1	QP
455.998	V	12.9	24.0	36.9	46	9.1	QP
480.022	H	14.3	24.7	39.0	46	7.0	QP
504.014	V	13.6	24.7	38.3	46	7.7	QP
504.026	H	14.3	24.7	39.0	46	7.0	QP

Notes:

- Correction Factor: Antenna Factor + Cable loss

Radiated Spurious Emission (CON'T)

Test Mode Battery Discharging Mode
 Operating Frequency 13.56 MHz

Frequency Range : 9 kHz – 30MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Dis. ²⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m) ²⁾	Margin (dB)	Measurement Type
0.510	H	16.0	19.3	40	-4.7	33.5	38.2	QP
0.617	B	11.4	19.3	40	-9.3	31.8	41.1	QP
0.675	V	13.3	19.3	40	-7.4	31.0	38.4	QP

Notes:

1. Correction Factor: Antenna Factor + Cable loss
2. Total = Reading (dBuV) + Correction Factor (dB) + Distance extrapolation factor (dB)
 - The measurement distance is 3 meters.
 - Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB) = $40 \log(30/3) = 40$ dB



Frequency Range : 30 MHz – 1 GHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
40.686	V	41.2	-8.1	33.1	40	6.9	QP
62.462	V	51.9	-13.7	38.2	40	1.8	QP
62.483	H	51.8	-13.7	38.1	40	1.9	QP
62.514	V	52.6	-13.7	38.9	40	1.1	QP
151.473	V	34.3	-8.5	25.8	43.5	17.7	QP
155.858	H	40.7	-8.7	32.0	43.5	11.5	QP
366.675	V	42.4	-5.5	36.9	46	9.1	QP
370.826	H	43.3	-5.5	37.8	46	8.2	QP
480.007	H	38.2	-3.3	34.9	46	11.1	QP
492.013	V	38.7	-3.3	35.4	46	10.6	QP



Notes:

1. Correction Factor: Antenna Factor + Cable loss



▣ TEST PLOTS

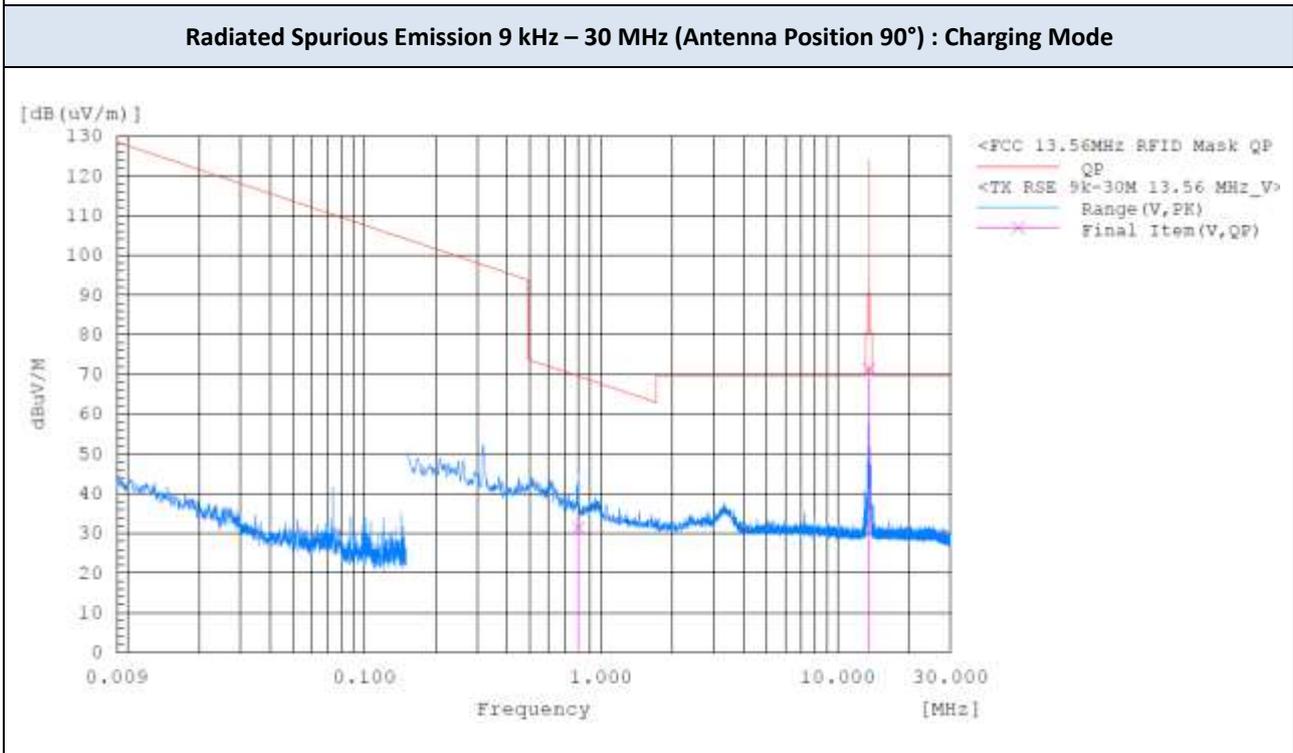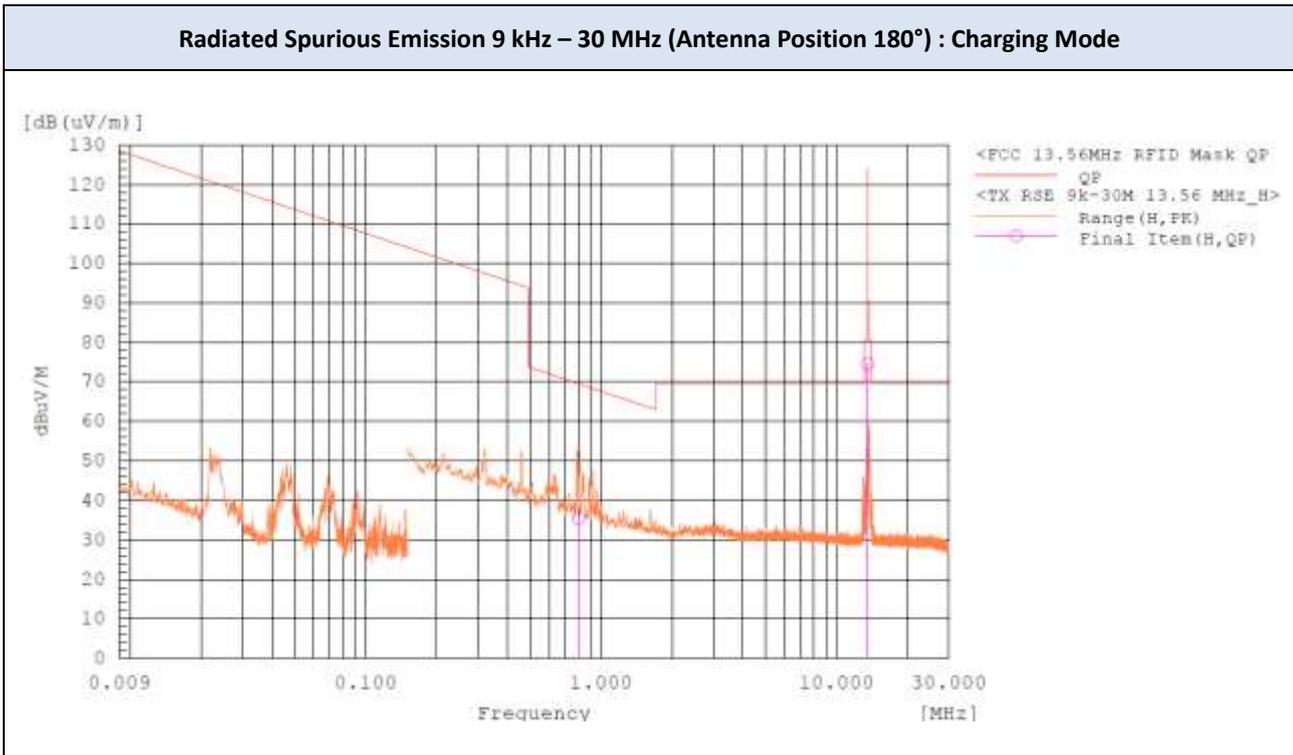

▣ TEST PLOTS

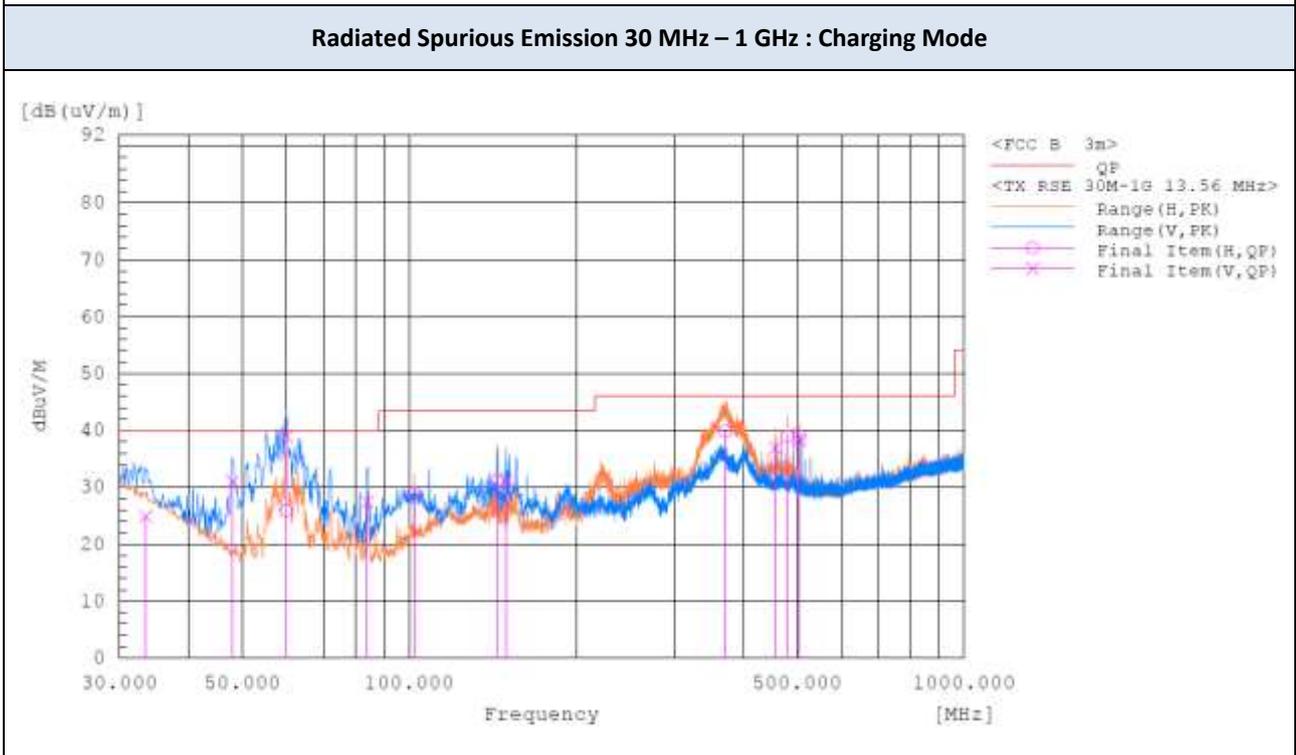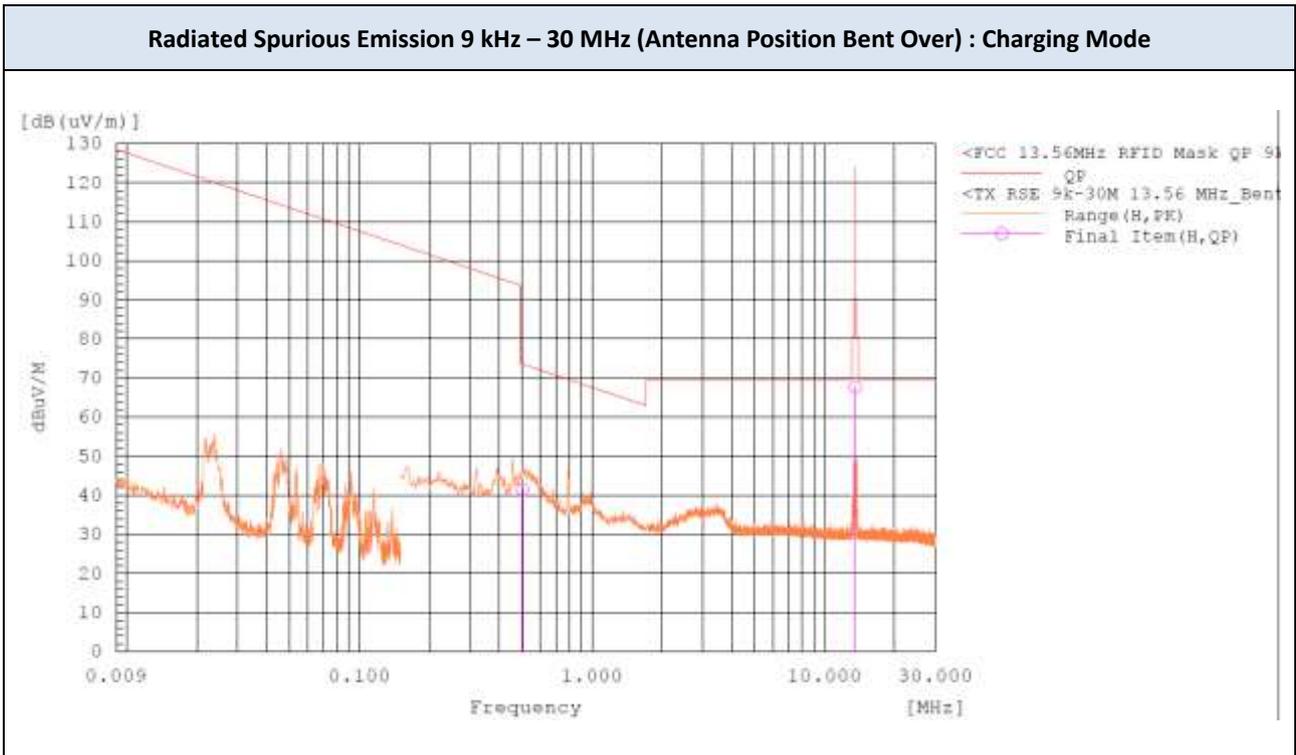


▣ TEST PLOTS

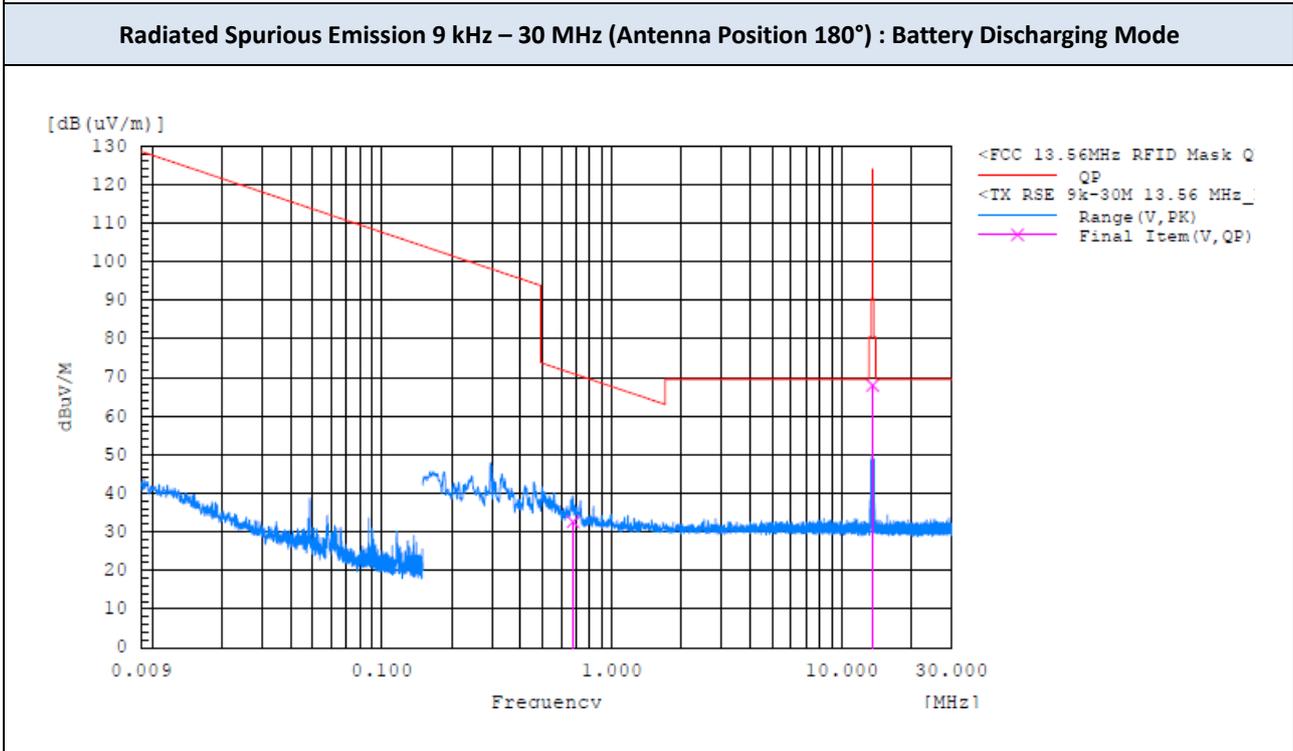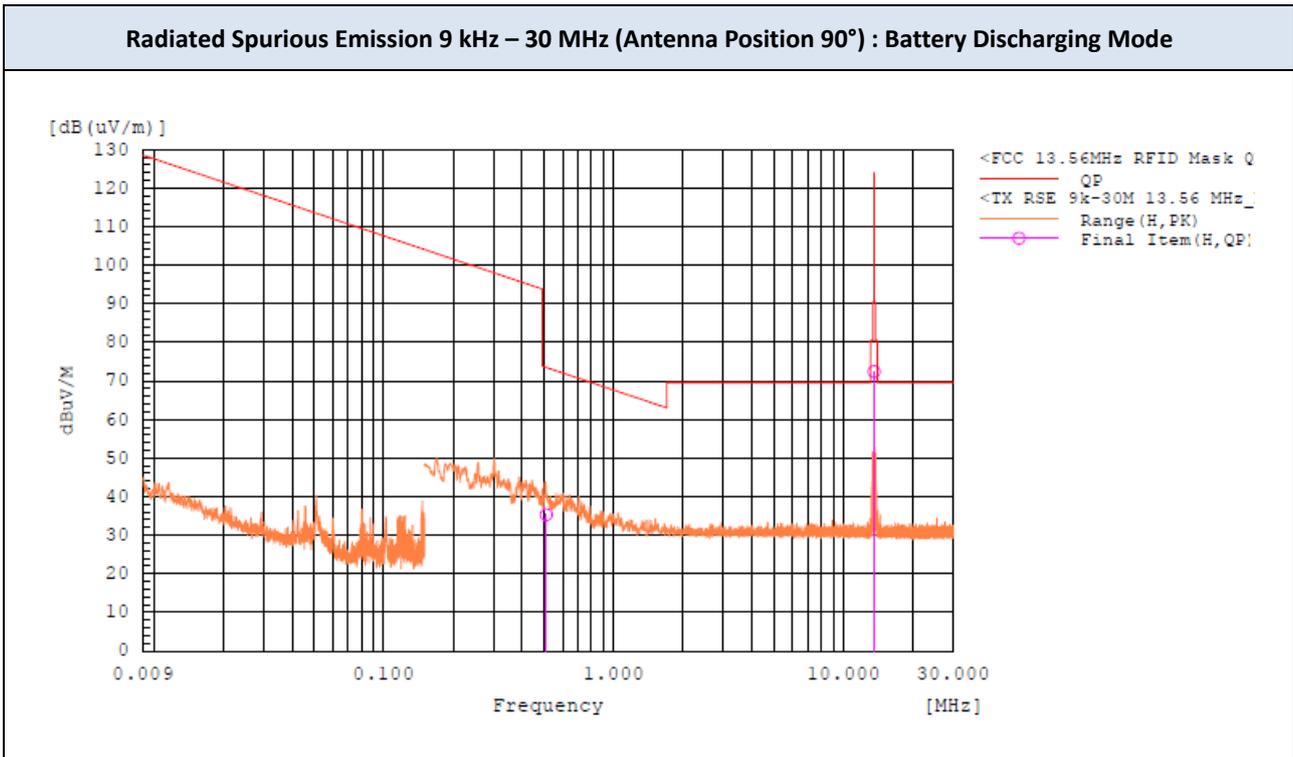


▣ TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position Bent Over) : Battery Discharging Mode

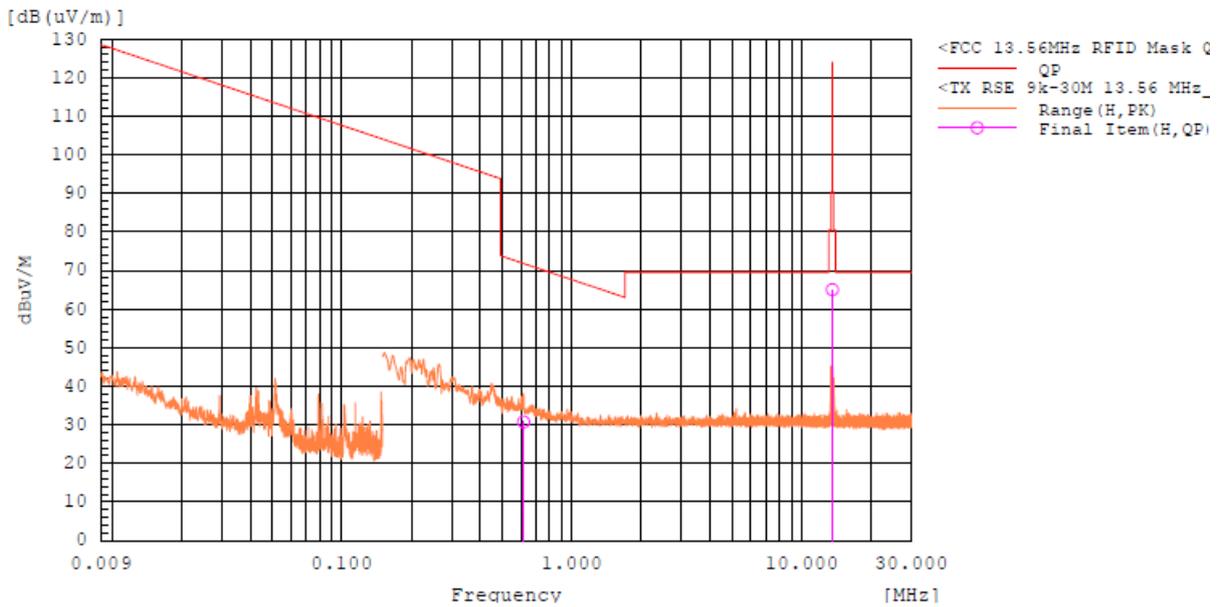

Radiated Spurious Emission 30 MHz – 1 GHz : Battery Discharging Mode

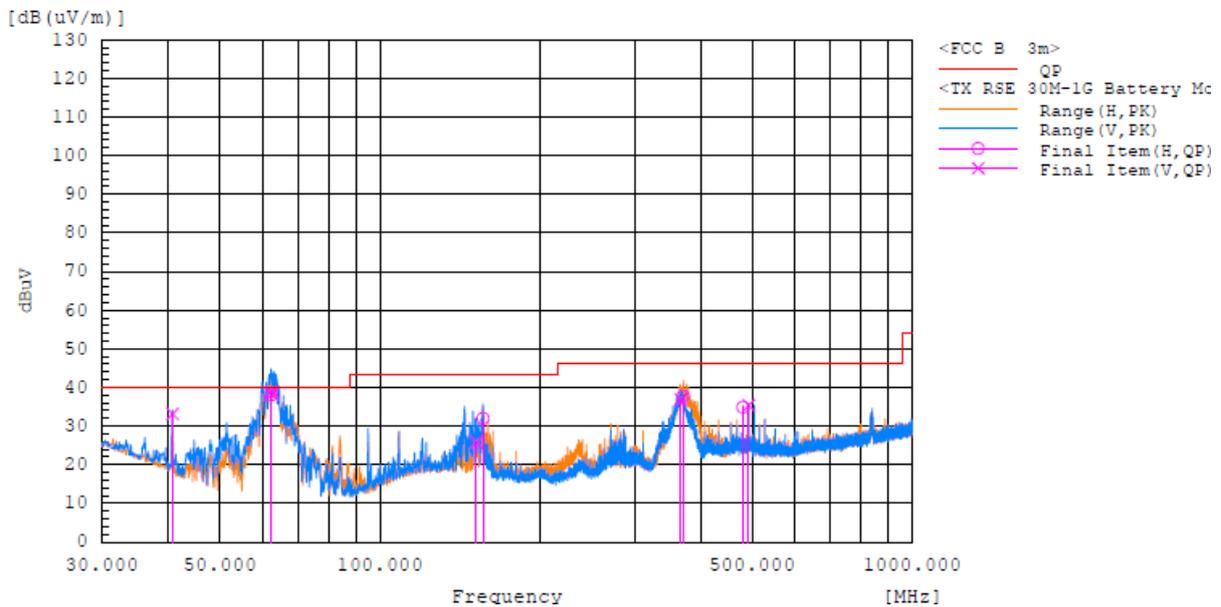

Test Mode Battery Discharging Mode
Via adapter for laptop

Device with antenna connected

Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.153	L1	37.0	18.8	9.6	46.6	28.4	65.9	55.9	19.3	27.5
0.400	L1	21.6	14.9	9.6	31.2	24.5	57.9	47.9	26.7	23.4
4.791	L1	19.3	10.2	9.8	29.1	20.0	56.0	46.0	26.9	26.0
5.460	L1	22.7	8.7	9.8	32.5	18.5	60.0	50.0	27.5	31.5
13.560	L1	27.0	27.0	10.1	37.1	37.1	-	-	-	-

Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.153	N	37.6	20.5	9.6	47.2	30.1	65.8	55.8	18.6	25.7
0.392	N	27.4	23.8	9.6	37.0	33.4	58.0	48.0	21.0	14.6
4.408	N	25.5	14.7	9.8	35.3	24.5	56.0	46.0	20.7	21.5
5.359	N	27.2	13.3	9.8	37.0	23.1	60.0	50.0	23.0	26.9
13.560	N	27.1	27.2	10.1	37.2	37.3	-	-	-	-

AC Main : Device with dummy load



Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.152	L1	36.9	18.4	9.6	46.5	28.0	65.9	55.9	19.4	27.9
0.393	L1	21.9	17.5	9.6	31.5	27.1	58.0	48.0	26.5	20.9
4.383	L1	23.9	14.5	9.8	33.7	24.3	56.0	46.0	22.3	21.7
5.389	L1	23.0	8.9	9.8	32.8	18.7	60.0	50.0	27.2	31.3
7.962	L1	15.9	9.7	10.0	25.9	19.7	60.0	50.0	34.1	30.3
0.152	L1	36.9	18.4	9.6	46.5	28.0	65.9	55.9	19.4	27.9

Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.397	N	27.4	22.9	9.6	37.0	32.5	57.9	47.9	20.9	15.4
0.152	N	37.7	20.1	9.6	47.3	29.7	65.9	55.9	18.6	26.2
4.357	N	25.3	14.9	9.8	35.1	24.7	56.0	46.0	20.9	21.3
5.550	N	23.6	10.1	9.8	33.4	19.9	60.0	50.0	26.6	30.1
7.864	N	14.3	8.6	10.0	24.3	18.6	60.0	50.0	35.7	31.4
0.397	N	27.4	22.9	9.6	37.0	32.5	57.9	47.9	20.9	15.4

Note :



1. Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ TEST PLOTS

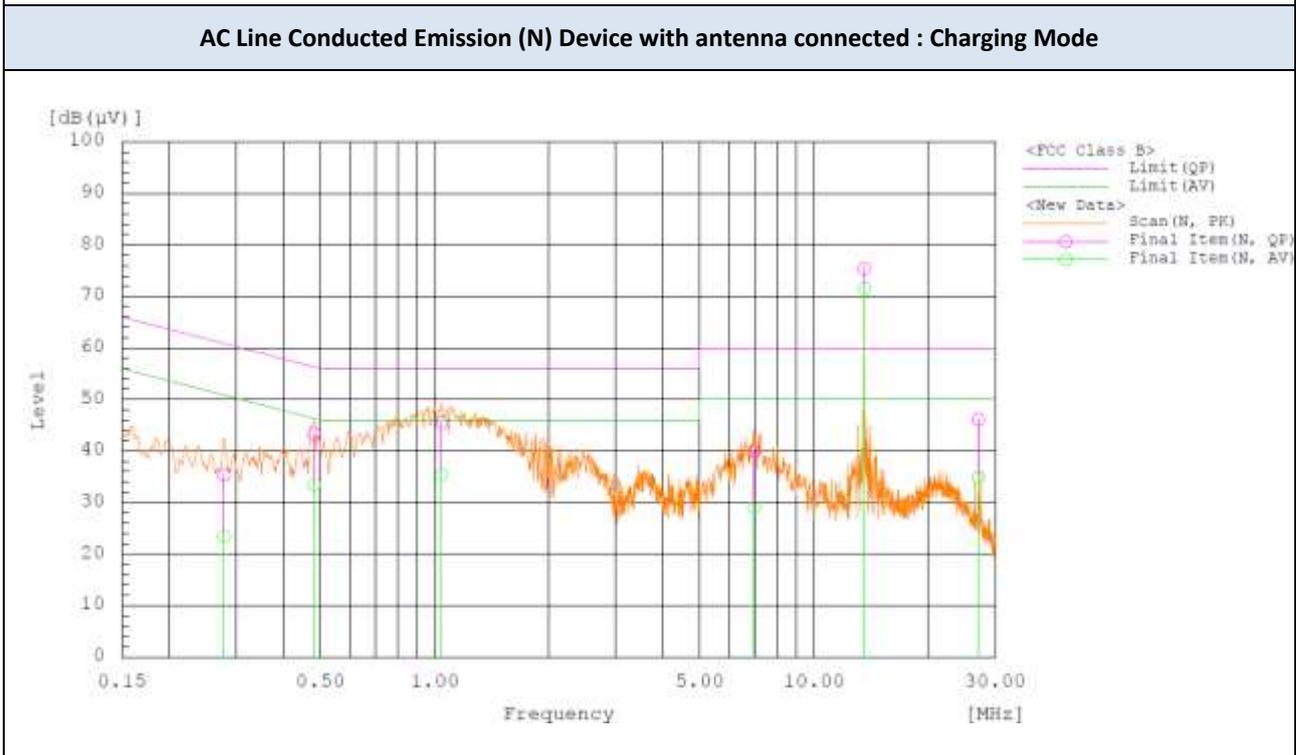
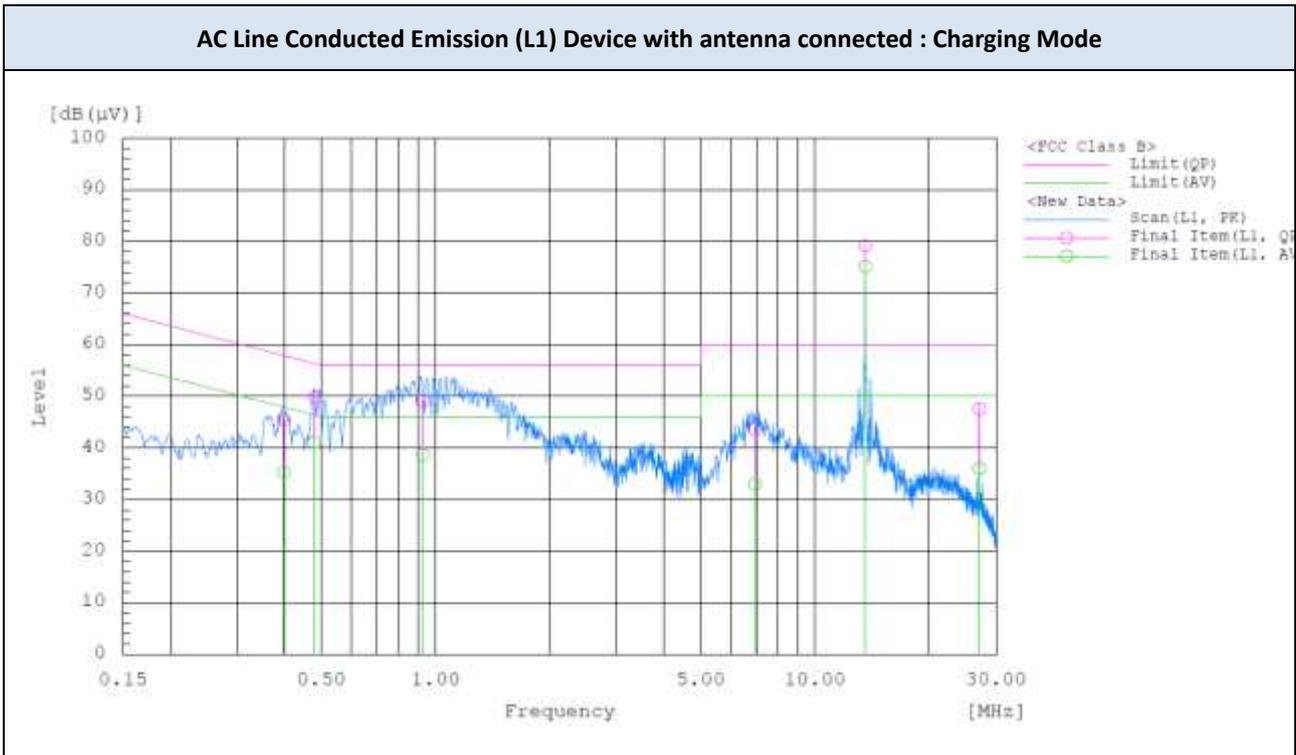


Note :
Peak at 13.56 MHz is a fundamental frequency of HF.

▣ TEST PLOTS

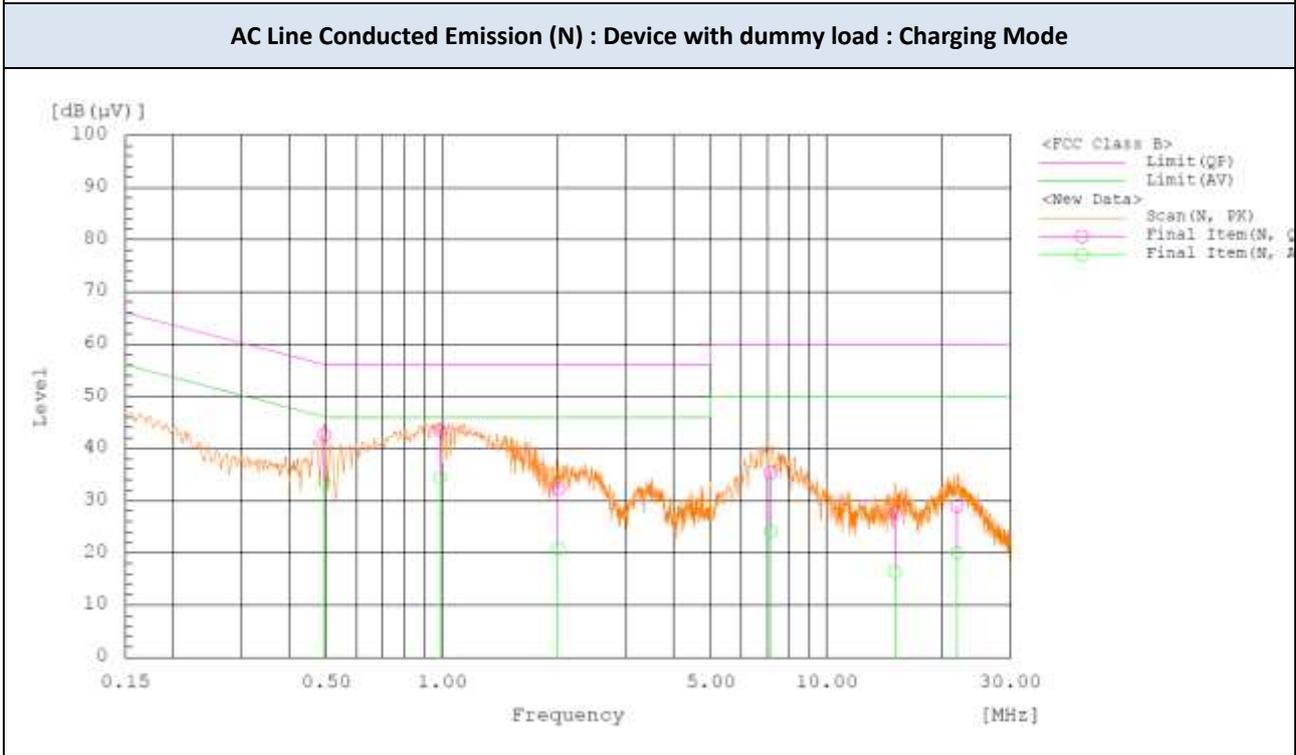
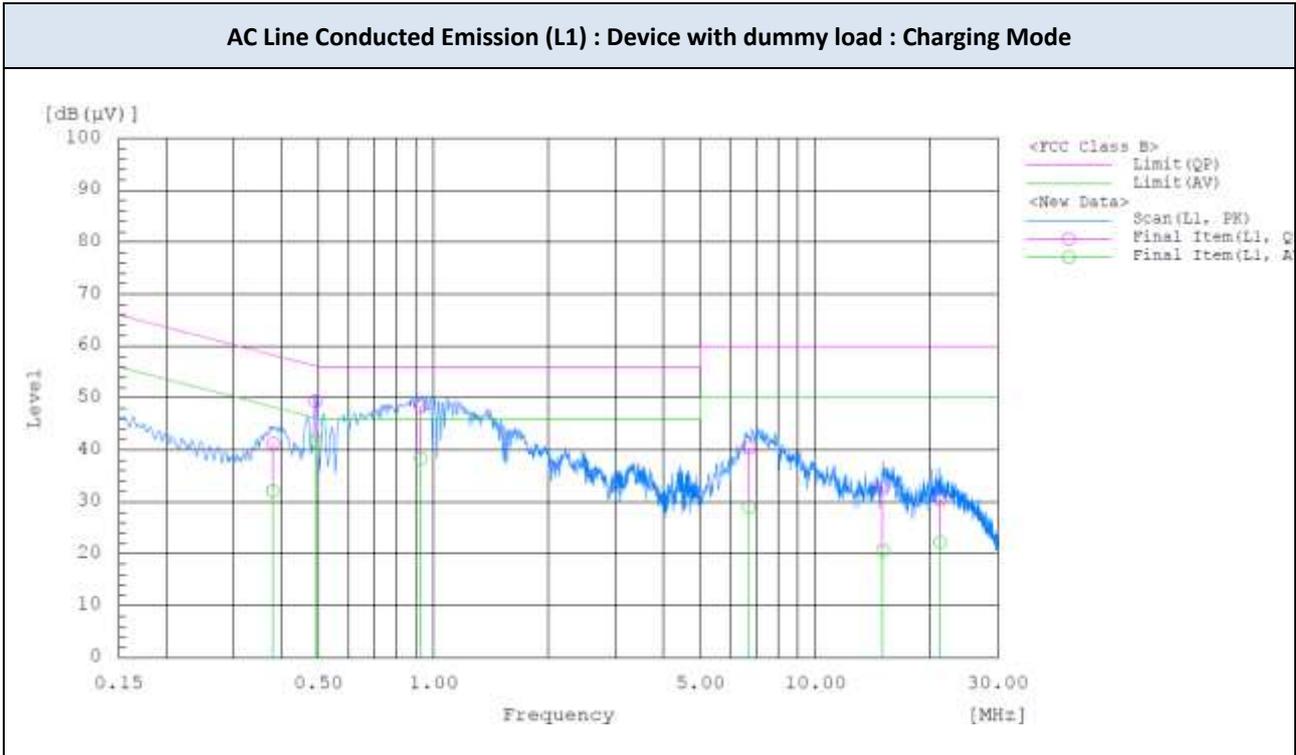


▣ TEST PLOTS

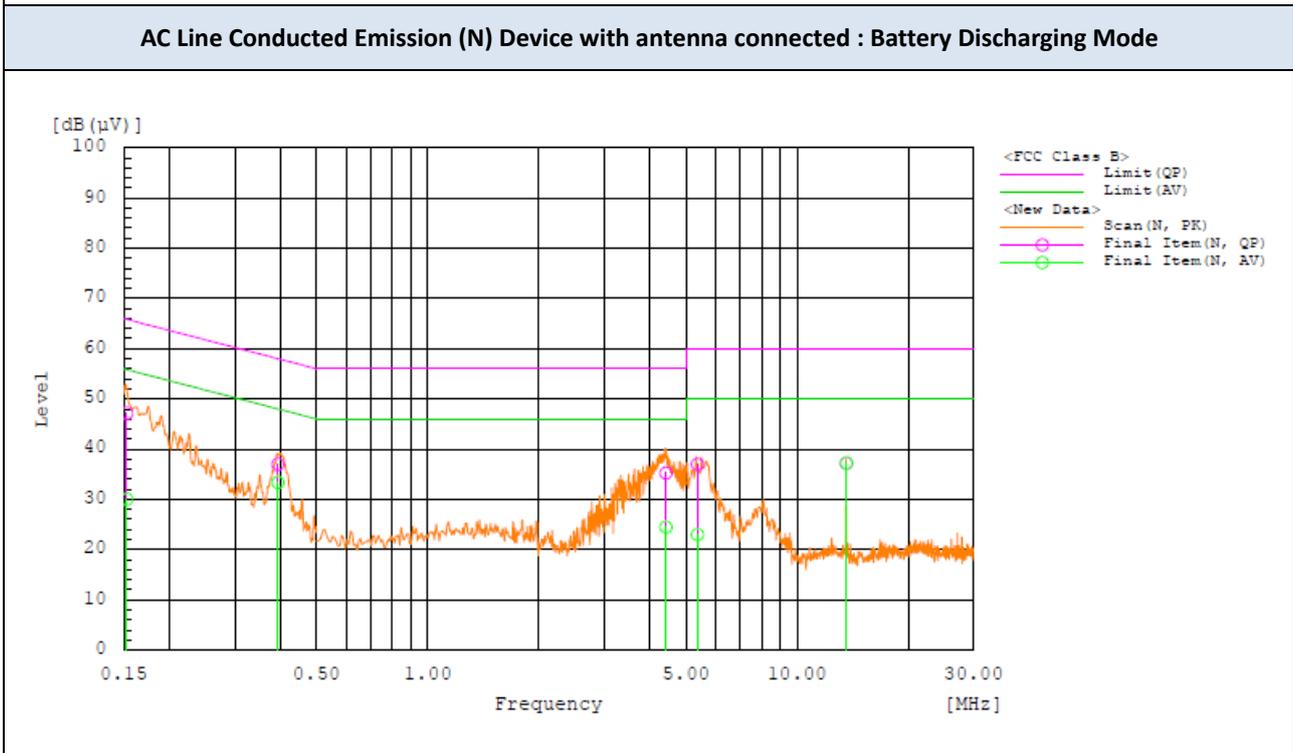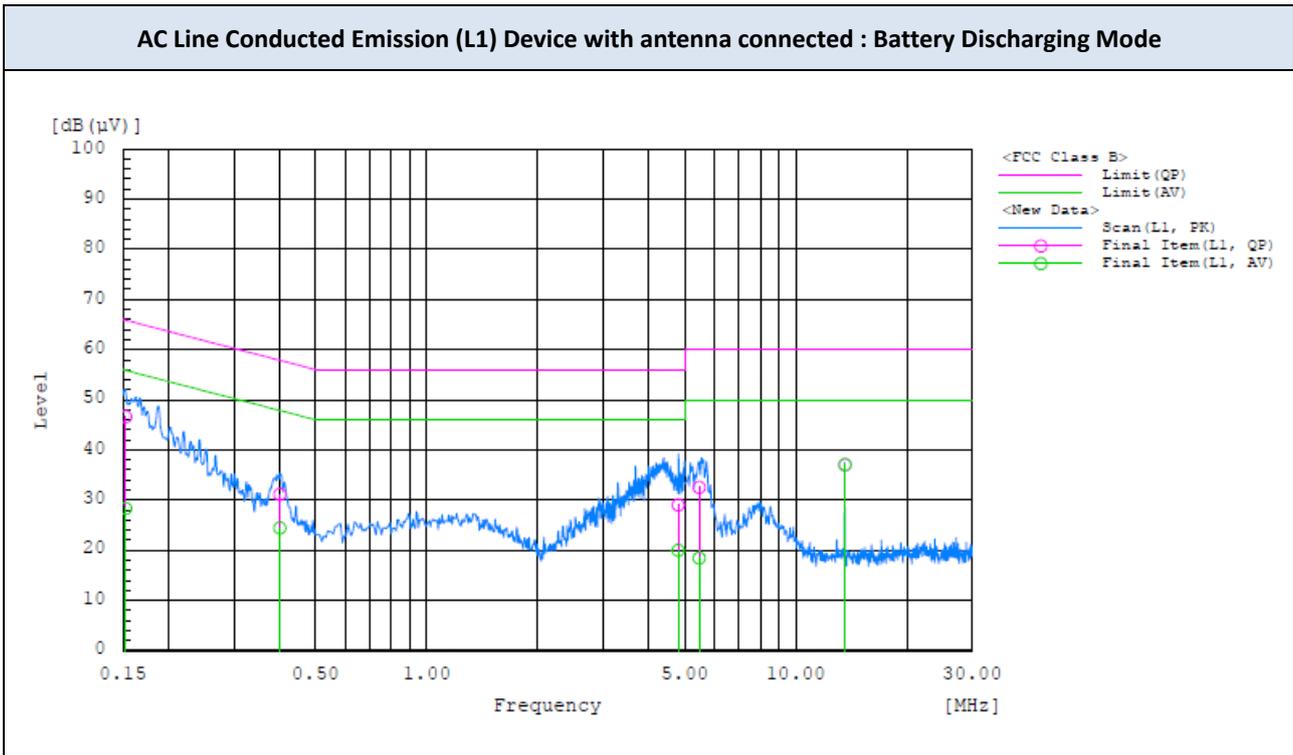

Note :
Peak at 13.56 MHz is a fundamental frequency of HF.

▣ TEST PLOTS

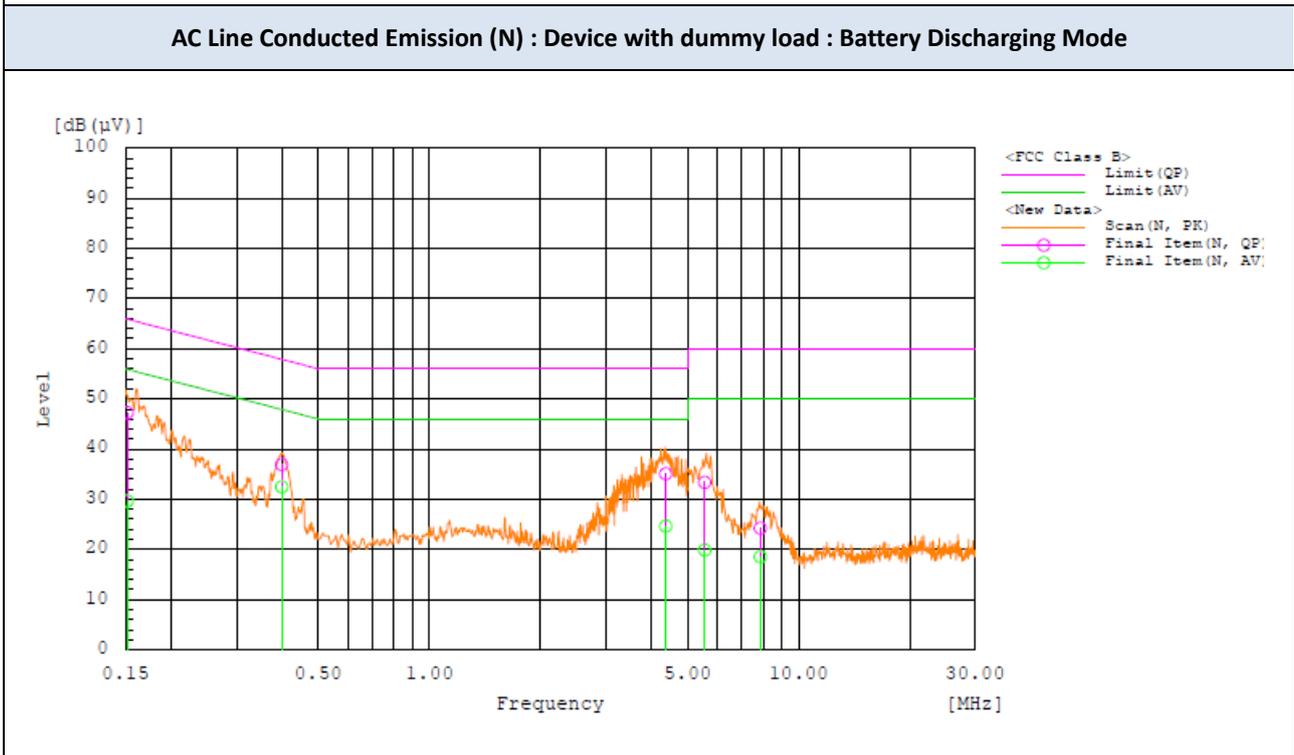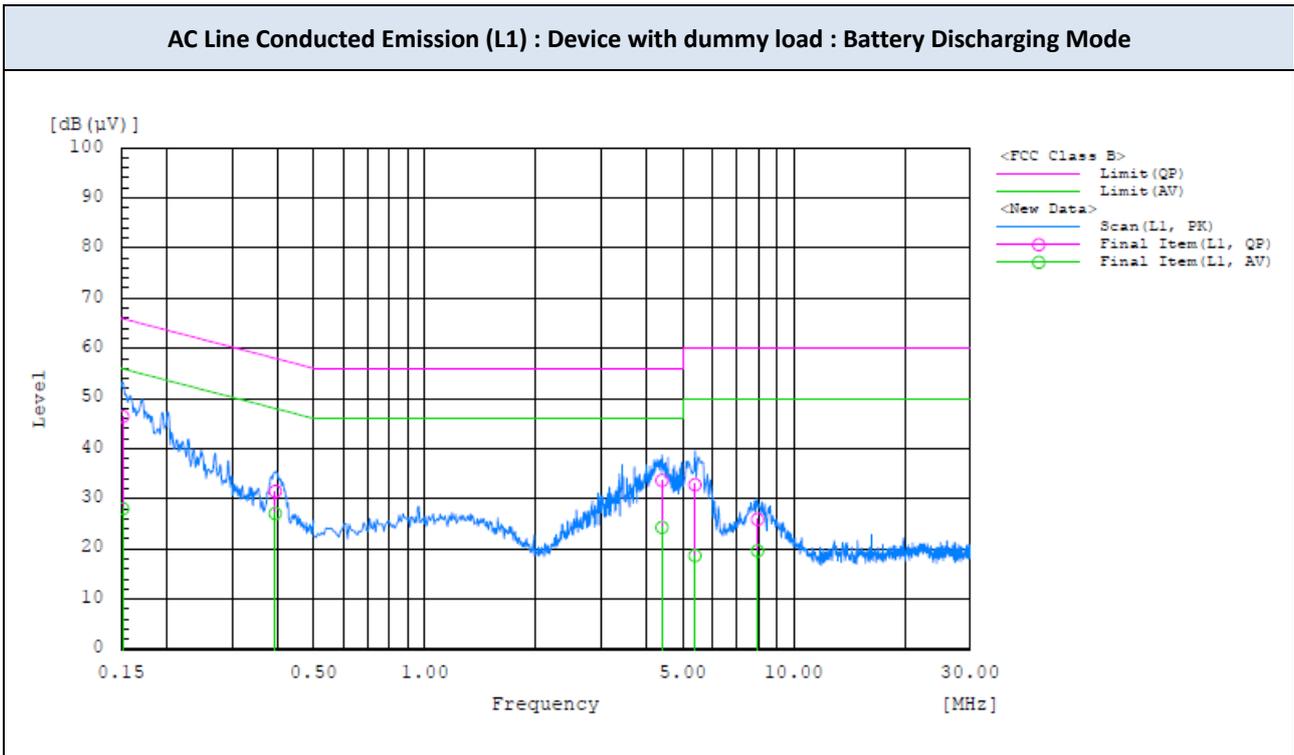

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Calibration Due (mm/dd/yy)	Manufacture	Serial No.
<input checked="" type="checkbox"/>	Signal Analyzer (1 Hz ~ 44 GHz)	ESW44	10/25/2023	Rohde & Schwarz	102015
<input checked="" type="checkbox"/>	Signal Analyzer (10 Hz ~ 40.0 GHz)	ESU40	12/02/2023	Rohde & Schwarz	100529
<input checked="" type="checkbox"/>	Signal Analyzer (10 Hz ~ 26.5 GHz)	N9020A	12/05/2023	Keysight	MY52091291
<input type="checkbox"/>	Attenuator (20 dB, DC ~ 26.5 GHz)	CFADC262002	12/19/2023	CERNEX	None
<input type="checkbox"/>	Attenuator (10 dB, DC ~ 26.5 GHz)	CFADC261002	01/10/2024	CERNEX	None
<input checked="" type="checkbox"/>	Loop Antenna (0.009 ~ 30 MHz)	HLA 6121	09/12/2025	TESEQ	43964
<input checked="" type="checkbox"/>	BI-LOG Antenna (30 MHz ~ 6 GHz)	JB6	10/28/2024	Sunol	A071116
<input checked="" type="checkbox"/>	LNA (30 MHz ~ 1GHz)	8447D	09/23/2023	HP	2944A07773
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	12/02/2023	Rohde & Schwarz	102363
<input checked="" type="checkbox"/>	LISN	ENV216	01/17/2024	Rohde & Schwarz	101349
<input checked="" type="checkbox"/>	Temp & Humidity Chamber	SH-662	10/20/2023	ESPEC	93019836

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date

APPENDIX A. TEST SETUP PHOTOS

The setup photos are provided as a separate document

APPENDIX B. PHOTOGRAPHS OF EUT

B.1. EXTERNAL PHOTOS

The external photos are provided as a separate document

B.2. INTERNAL PHOTOS

The internal photos are provided as a separate document

END OF TEST REPORT