

# **USER'S MANUAL**

## **Draft Version**

### **Analog Two Way Radio**

- DOT-MATRIX LCD DISPLAY • DTMF encoding and decoding
- Multiple types for keys lock setting • Multi-Display mode • Remote stun / kill / activate
- Dual band, dual wait, dual standby • 30 channels • Battery saving • Scrambler
- 1750Hz tone • 2 Tone/5 Tone • CTCSS/DCS

UV88



# TO CUSTOMERS

Thank you very much for using our GMRS radio .  
This radio of modern design is reasonable structure  
with stable functions. It is designed to meet different  
customers'need for high quality with easy operation  
and perfect capability. We believe you are pleased with  
its nice shape and excellent performance.

**Welcome to use two-way radio**

### **Main Functions**

Dual band, dual display, dual standby

DOT-MATRIX LCD display

A/B band independent operation

30 channels storage and scanning

FM Radio and 24 stations memory

CTCSS/DCS and scanning

1750Hz tone

Shortcut menu operation mode

Emergency alert

DTMF and remote stun/kill/activate

ANI function

8 group of scrambler

2/5 tone

Multi types for keys lock setting

Multi display mode

CONTENTS

USING TIPS -----

02

UNPACKING AND CHECKING EQUIPMENT -----

03

Supplied Items -----

03

CHARGING BATTERY PACK -----

05

Charging Preparation -----

05

Charging Operation -----

06

INSTALLATION OF ACCESSORIES -----

07

Installation of Battery Pack -----

07

Antenna Installation -----

08

Installing Belt Clip -----

09

Installing External Micro/Speaker -----

10

GETTING FAMILIAR -----

11

Radio Illustration -----

12

LCD Display -----

14

Keypad Function -----

16

MODEL VERSION -----

19

WORKING MODE -----

20

Frequency Mode(VFO) -----

20

Frequency-Channel Mode(MR) -----

20

Channel Mode(CH) -----

20

FM Radio Mode -----

20

MENU Mode -----

21

RESET Mode -----

21

SET MENU MODE -----

22

SHORTCUT MENU OPERATION -----

25

DETAILED FUNCTION DESCRIPTION -----

30

Scan & Scan Mode setting -----

30

Priority Transmit -----

31

VOX Level & VOX Switch -----

31

TX Power setting -----

32

Squelch Adjustment -----

32

Dual Wait/Standby -----

32

LED Display Mode -----

33

Background light -----

33

Keypad Beeper setting -----

33

DTMF/2T &5T setting -----

33

Transmitter Timer-Out Timer -----

34

Busy Channel Lock-out -----

34

Transmit Over Beeper -----

34

Receive Saver -----

35

Auto Keypad Lock -----

35

Voice Prompt -----

35

Power-on Display setting	36
Repeater Shift setting	36
Display Channel Name	36
Tone coder & Tone Search Scanning & Tone calling	36
VFO Step setting	40
Voice Mode and Scrambler	41
ADVANCED FUNCTIONS	42
Emergency Alert	42
Keypad Lock setting	42
Tone Calling(1750Hz)	42
Channel Storage/Delete	44
FM Radio Function	44
OPTIONAL SIGNALINGS	47
DTMF Part	47
2-Tone Part	50
5-Tone Part	51
TECHNICAL PARAMETERS	53
GUARANTEE	55

USING TIPS  
UNPACKING AND CHECKING EQUIPMENT





USING TIPS

- Please read the following brief instructions, non-compliance with these rules may cause danger or violate the law.
- Obey the local government regulation before using this radio, improper use may violate the law and be punished.
  - Turn off the radio before entering flammable or explosive areas.
  - Do not charge or change the battery in flammable or explosive areas.
  - Turn off the radio before getting close to the blasting zone or detonator areas.
  - Do not use radio whose antenna is damaged, touching of damaged antenna will cause heat injury.
  - Do not attempt to open the radio; the maintenance work should be done by technical expert only.
  - To avoid troubles caused by electromagnetic interference or electromagnetic compatibility, please turn off the radio in places where have the banner "Do not use wireless equipment", such as hospital and other healthcare places.
  - In the car with an airbag, do not put the radio within the scope of the airbag deployment.
  - Do not store the radio under the direct sunshine or in hot areas.
  - When you transmit with the radio, do keep away from its antenna for 5cm at least.
  - If the radio appears smelly or smoke, please shut off its power immediately and contact with your local dealer.
  - Do not transmit too long, for the radio may heat and hurt the user.





UNPACKING AND CHECKING EQUIPMENT

Please check if any damage to the package when you receive it. Carefully unpack the transceiver. We recommend that you check the items listed in the following table. If any items are missing or damaged during shipment, please contact with your local dealer immediately.

Supplied Items:

			
Body	Li-ion battery(1400mAh)	Charger Kit	Belt Clip

Optional Items:

			
User's Manual	Charger	Li-ion battery(3200mAh)	Adaptor

CHARGING BATTERY PACK  
INSTALLATION OF ACCESSORIES

CHARGING BATTERY PACK

Charging Precaution


The supplied battery pack of this radio is a high –performance Li-ion with 7.4V standard voltage 1400mAh high capacity in a very compact package. Under normal use, the battery pack may be used for approximately 500 charge cycles and more, after which operating time maybe expected to decrease. If you have an old battery pack which is displaying capacity which has become diminished, you should replace the pack with a new one.

- Notice:
- Please do not short-circuit the battery terminals or expose of in fire. Do not disassemble the battery unauthorized.
  - Charge the battery between temperature 0℃ and 45℃. The battery can not be normally charged beyond this temperature range.
  - Please turn off the transceiver when you charge it. Transmitting with the transceiver in charge will affect its normal charge.
  - Do not unplug the Power Adapter or battery when it is charged.
  - If the battery pack lasts shortly even it is full of power, it shows that the battery is depleted, please change the battery pack.
  - Please do not charge when the battery or the radio is wet. Please dry it with a cloth before charging to avoid any danger.

**Warning:** When the conductive metals such as jewelery, key or decorative chains touch the

battery terminals, all the batteries are likely to cause damage to the items or personal injury. These conductive metals may form a short circuit and generates much heat. Do deal with any battery carefully, especially when put it into pocket, wallet or other metallic containers.

Charging Operation

After installing the battery pack, if the battery icon shows  , it means that the battery pack is out of power, Please charge it.

Indicator light of charger will show charging condition

Indicator Display	Status
Red	Charging
Green	Completed


Battery Tips:

- The battery is not fully charged in factory, please charge before using it.
- charge and discharge the battery for two or three times, the battery capacity will reach the best condition. When the battery capacity is low, please charge or change the battery.
- The battery lasts shortly even if it is fully charged, the battery is depleted, please contact your local dealer to buy a new authentic battery.


INSTALLATION OF ACCESSORIES

Installation of Battery Pack

- 1)Align the two grooves of battery and the guide rail on the back of aluminum shell, ensure full contact and in parallel, then push the battery up to the radio base along the rail on the back of aluminum shell, until the battery latch locks up. (picture 1)
- 2)To remove the battery, please make sure the radio is closed ,push the battery latch down, and make sure the radio and battery is on the releasing state, and then push the battery out from the radio.(picture 2)




Picture 1



Picture 2






#### Installing Belt Clip

Align the two holds of belt clip and the two holes of the radios, fix them with the supplied M2.5x5 screws. loosen the screw set to remove belt clip.

Picture 5

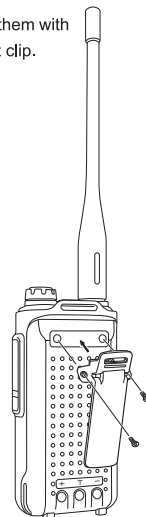


Picture 5

Installing External Micro/Speaker

Open the cover of the Mic/speaker jack and insert the microphone/speaker plugs into the jack. Picture 7



- Note:**
- Using the external headset or Mic/speaker will affect the water-tightness performance of radio.
  - If the external headset is not workable, please use the headset case.

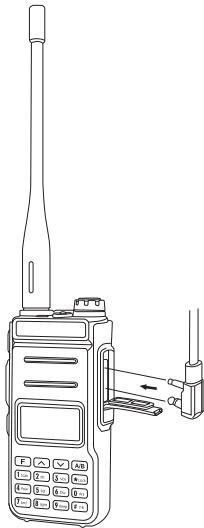

Picture 7


GETTING FAMILIAR

RADIO ILLUSTRATION

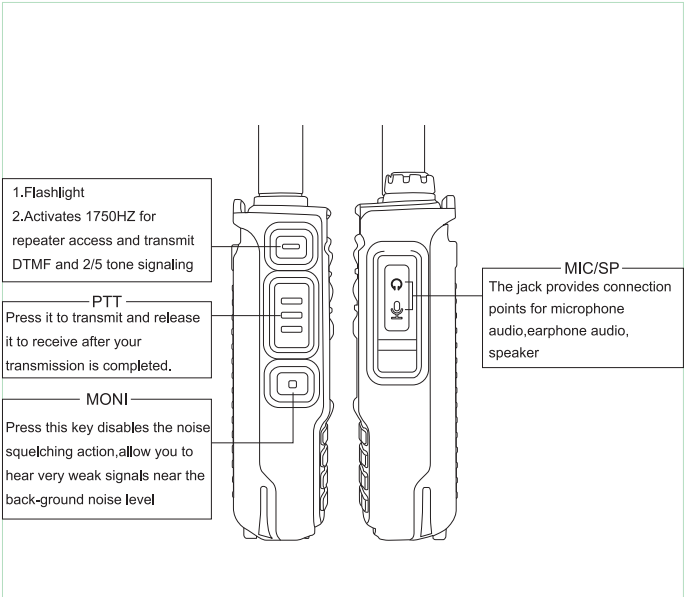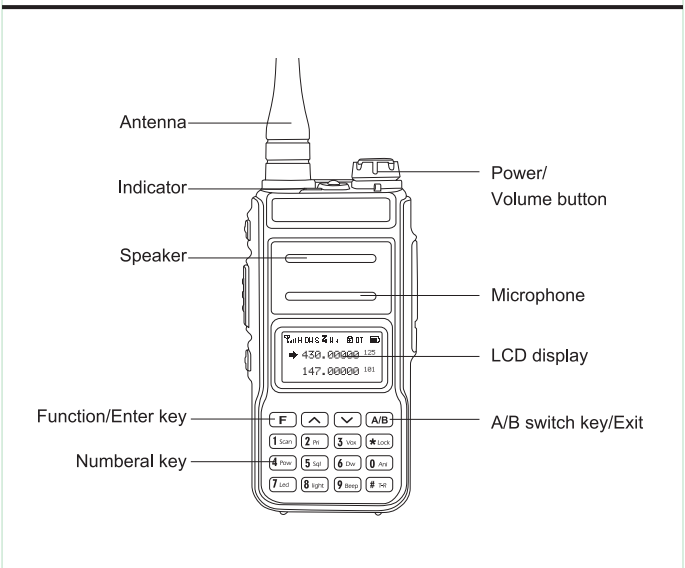

LCD DISPLAY

You will see various icons shown on the screen when power on. The following table can help you identify icons' meaning which display on LCD

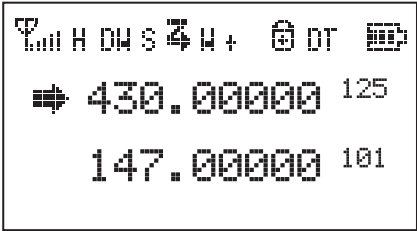

Icons	Description of functions
	Operating band signal & power meter
H	High TX power active
DW	Dual watch/standby active
S	RX power save active
Z	Scanning active
+	Narrow/wide band mode active
K	Repeater shift direction
K	Keypad lock
DT	DTMF signal active
2T	2 Tone signaling active
5T	5 Tone signaling active
	Battery power indicator
125	Channel number/Menu items number indicator

KEYPAD FUNCTIONS

	[ F ]	[ A/B ]	[ ^ ]	[ v ]
Press key	Enter menu mode/confirm the setting	(1)Switch the A or B frequency to be the "Operating" Band (2)EXIT function	Upper menu item, channel or frequency	Lower menu item, channel or frequency

	[ 1 Scan ]	[ 2 Pri ]	[ 3 Vox ]	[ 4 Power ]	[ 5 Squ ]
Press key	Frequency/ Channel No. entry "1"	Frequency/ Channel No. entry "2"	Frequency/ Channel No. entry "3"	Frequency/ Channel No. entry "4"	Frequency/ Channel No. entry "5"
Press [ F ] +	Enter scan item	Enter priority TX mode item	Enter VOX level item	Enter high/low power item	Enter squelch level item

	[ 6 Dsc ]	[ 7 LED ]	[ 8 Color ]	[ 9 Beep ]	[ 0 DTMF ]
Press key	Frequency/ Channel No. entry "6"	Frequency/ Channel No. entry "7"	Frequency/ Channel No. entry "8"	Frequency/ Channel No. entry "9"	Frequency/ Channel No. entry "10"
Press [ F ] +	Enter dual wait/standby item	Enter LED item	Enter color item	Enter beep item	Enter DTMF 2T & 5T

	[ * LOCK ]	[ # CH ]	
Press key	Press and hold key to start keypad lock	Switch CH mode and VFO mode Long press [#] to enter FM radio	
	Enter TX/RX Tone coder	Press [F] +[#] to start emergency alert	

MODEL VERSION

WORKING MODE

SET MENU MODE

SHORTCUT MENU OPERATION

MODEL VERSION

This transceiver has 3 version in total :  
1) Simple version      2)DTMF version      3)5T & 2T version  
Set Menu 20<sup>th</sup> OPNSET—OFF, you will find your model version information when you switch the transceiver power on.  
DTMF and 5 TONE version will be with remote kill/stun/activate/revive function.  
Only 2T version will be with 8 groups of scrambler function.  
Please choose the right model type when you use software to program it. If not, it will affect some function operation.

WORKING MODE

1) Frequency Mode (VFO)

Under this mode, you can use [ ▲ ] / [ ▼ ] key to change the frequency or input the frequency by keypad directly and store channels.

2)Frequency –Channel Mode(MR)

When you have stored a memory channel at least and under VFO mode, press [ F MR ] key to enter MR mode.

The frequency will be indicated on the display and the channel No. will be indicated at the right side. If the transceiver display name option is ON and channel name edited, it will show the name of the channel.

Please see Shortcut Menu Operation item 22<sup>nd</sup> &33<sup>rd</sup>.Page 37.

3) Channel Mode(CH)

When you have stored a memory channel at least, power on the radio, press [ F ]+33RD to enter DIS MD and choosing CH mode. Channel No. will be indicated on the display and if the transceiver display mode option is on, it will show the name and the channel.

Please see Shortcut Menu Operation item 22<sup>nd</sup> &33<sup>rd</sup>. Page 37.

4)FM Radio Mode

The transceiver provides frequency 88.00-108.00MHz FM radio.

Under this mode, you can choose FM frequency you need directly. Scan frequency range

and store your favorite channels. Long press [ F FM ] to enter and exit FM radio mode.

5) MENU Mode

Press [ F ] KEY to enter MENU mode, there are 36 items in total. Please see SET MENU MODE. 22.Page.

6)RESET Mode

Press [ F ]+[3] [5] key to enter Reset mode, then press [ F ] key to enter.

[ ▲ ] or [ ▼ ] key to select ALL/VFO/FULL

1.ALL:initialize all setting.

2.VFO:initialize all setting under frequency mode.

3.FULL:initialize all setting under frequency and channel mode.

SET MENU MODE

No.	LCD Display	Available Values	Description of Function
1	SCAN	/	Frequency/ Channel Scan
2	TX-SEL	EDIT/BUSY	Priority Transmit
3	VOX LEV	/	* GMRS Version not support
4	POWER	LOW/HIGH	High/Low TX Power
5	SQL	0-9	SQL level setting
6	D.WAIT	ON/OFF	Dual Wait/Standby
7	LED	ON/AUTO/OFF	LED Display mode
8	LIGHT	1-7	Backgroud Light Color
9	BEEP	ON/OFF	Keypad Beeper Setting
10	DT/2T/5T CH	1-16	Preset Channel Selection
11	TOT	OFF/30/60/.../270	Transmitter Timer-out Timer
12	BCLO	OFF/WAVE/CALL	Busy Channel Lock-Out
13	VOX.SW	ON/OFF	VOX Switch ON/OFF
14	ROGER	ON/OFF	Transmit Over Beeper
16	RX.SAV	1:1/1:2/1:4/OFF	Receive Saver

No.	LCD Display	Available Values	Description of Function
17	SCAN.S	TO/CO/SE	Scan Mode
18	AUTOLK	ON/OFF	Auto Keypad Lock
19	VOICE	ON/OFF	Voice Prompt
20	OPENSET	OFF/DC/MSG	Power-on Display
21	DC VOLT	/	Battery Power Voltage
22A	OFFSET	0.000-99.995MHz	Repeater Shift(Under VFO mode)
22B	DIS.NM	ON/OFF	Display Channel Name(Under CH mode)
23	C-CDC	OFF/67.0/D023N	TX/RX Tone coder
24	R-CDC	OFF/67.0/D023N	RX Tone coder
25	T-CDC	OFF/67.0/D023N	TX tone coder
26	S-D	+/-/OFF	Shift Direction
27	STEP	5K/6.25K/.../25K	VFO Step
28	N	NARROW	Narrow Band
29	SEEK 67.0	/	CTCSS Scanning
30	SEEK D023N	/	DCS Scanning
31	SCR.N0	1-8/OFF	Voice Scrambler



No.	LCD Display	Available Values	Description of Function
32	LOCK MD	ALL/PTT/KEY/KEY+S	
33	DIS MD	FRE/CH/MR	Working mode setting
34	DW	ON/OFF	Dual Watch/monitor
35	Reset	ALL/VFO/FULL	Reset function
36	Radio Ver	MCU B1.07	Radio Version

Menu Operation

1) Under standby mode, press [ F ] to enter menu setting, LCD displays "MENU".

2) Press [ ▲ ] or [ ▼ ] to select the desired menu item, LCD display current setting of selected item.

3) Press [ F ] to enter and then press [ ▲ ] or [ ▼ ] to select the desired setting.

4) Press [ F ] to confirm.

5) Press [ A/B ] twice to exit and then return the standby mode.

Tx

MENU

01

SHORTCUT MENU OPERATION

Item No.	Item Name	Enter item	Screen Display	Select parameter	Parameter Explanation	Confirm Return Standby
1)	Frequency /Channel scan	<b>F</b> + <b>1</b> sec	Tx SCAN 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to change scan direction	Press [ F ] key to start scanning	→ <b>F</b> → A/B
2)	Priority Transmit	<b>F</b> + <b>2</b> sec	Tx TX SEL EDIT 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	EDIT / BUSY	→ <b>F</b> → A/B
3)	VOX level setting	<b>F</b> + <b>3</b> sec	Tx VOX 4 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	* GMRS Version not support	→ <b>F</b> → A/B
4)	TX power setting	<b>F</b> + <b>4</b> sec	Tx POW LOW 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	High / Low	→ <b>F</b> → A/B
5)	SQL level setting	<b>F</b> + <b>5</b> sec	Tx SQL 5 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	SQL level: 0~9	→ <b>F</b> → A/B
6)	Dual wait/standby	<b>F</b> + <b>6</b> sec	Tx D. WAIT ON 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	ON / OFF	→ <b>F</b> → A/B
7)	LED display mode	<b>F</b> + <b>7</b> sec	Tx LED AUTO 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	ON / AUTO / OFF	→ <b>F</b> → A/B
8)	Background light color	<b>F</b> + <b>8</b> sec	Tx LIGHT COLOR1 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	COLOR1 / COLOR2 / COLOR3	→ <b>F</b> → A/B
9)	Keypad beeper	<b>F</b> + <b>9</b> sec	Tx BEEP ON 01	<b>F</b> → Press [ ▲ ] or [ ▼ ] to select available values	ON / OFF	→ <b>F</b> → A/B

Item No.	Item Name	Enter item	Screen Display	Select parameter	Parameter Explanation	Confirm	Return Standby
10)	Automatic Number Identity	<b>F</b> + <b>0</b> <b>sec</b>	DT CH 1	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available value	1-16	<b>F</b>	A/B
11)	Transmitter time-out timer	<b>F</b> + <b>1</b> <b>sec</b> / <b>1</b> <b>sec</b>	TOT OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / 30... / 270s	<b>F</b>	A/B
12)	Busy channel lock-out	<b>F</b> + <b>1</b> <b>sec</b> / <b>2</b> <b>sec</b>	BCLD OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / WAVE / CALL	<b>F</b>	A/B
13)	VOX switch	<b>F</b> + <b>1</b> <b>sec</b> / <b>3</b> <b>sec</b>	VOX SW OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	* GMRS Version not support	<b>F</b>	A/B
14)	Transmit over beeper	<b>F</b> + <b>1</b> <b>sec</b> / <b>4</b> <b>sec</b>	ROBER OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	ON / OFF	<b>F</b>	A/B
16)	Receive saver	<b>F</b> + <b>1</b> <b>sec</b> / <b>6</b> <b>sec</b>	RX SW ON	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	ON / OFF	<b>F</b>	A/B
17)	Scan mode	<b>F</b> + <b>1</b> <b>sec</b> / <b>7</b> <b>sec</b>	SCANS CO	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	TO / CO / SE	<b>F</b>	A/B
18)	Auto keypad lock	<b>F</b> + <b>1</b> <b>sec</b> / <b>8</b> <b>sec</b>	AUTOLK OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	ON / OFF	<b>F</b>	A/B

Item No.	Item Name	Enter item	Screen Display	Select parameter	Parameter Explanation	Confirm	Return Standby
19)	Voice prompt	<b>F</b> + <b>1</b> <b>sec</b> / <b>9</b> <b>sec</b>	VOICE ON	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	ON / OFF	<b>F</b>	A/B
20)	Power-on display	<b>F</b> + <b>2</b> <b>sec</b> / <b>0</b> <b>sec</b>	POW SET OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / DC / MSG	<b>F</b>	A/B
21)	Battery power voltage	<b>F</b> + <b>2</b> <b>sec</b> / <b>1</b> <b>sec</b>	ULT 7.6V	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	Show current voltage	<b>F</b>	A/B
22) A.	Repeater shift	<b>F</b> + <b>2</b> <b>sec</b> / <b>2</b> <b>sec</b>	OFFSET 2.000	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	0,000-99,995MHz	<b>F</b>	A/B
B.	Display channel name	<b>F</b> + <b>2</b> <b>sec</b> / <b>2</b> <b>sec</b>	DIS. NM ON	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	ON / OFF	<b>F</b>	A/B
23)	TX/RX tone coder	<b>F</b> + <b>2</b> <b>sec</b> / <b>3</b> <b>sec</b>	C-CDC 254.1	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / QT / DCS	<b>F</b>	A/B
24)	RX tone coder	<b>F</b> + <b>2</b> <b>sec</b> / <b>4</b> <b>sec</b>	R-CDC 254.1	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / QT / DCS	<b>F</b>	A/B
25)	TX tone coder	<b>F</b> + <b>2</b> <b>sec</b> / <b>5</b> <b>sec</b>	T-CDC 254.1	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	OFF / QT / DCS	<b>F</b>	A/B
26)	Shift direction	<b>F</b> + <b>2</b> <b>sec</b> / <b>6</b> <b>sec</b>	S-D OFF	<b>F</b> → Press <b>[OK]</b> or <b>[↵]</b> to select available values	+ / -	<b>F</b>	A/B

Item No.	Item Name	Enter item	Screen Display	Select parameter	Parameter Explanation	Confirm	Return Standby
27)	VFO step	<b>F</b> + <b>2nd</b> <b>7</b>	STEP 25K	<b>F</b> →  or  to select available values	5K / 6.25K / 10K...100K	→ <b>F</b>	→ <b>A/B</b>
28)	Wide/ Narrow band	<b>F</b> + <b>2nd</b> <b>8</b>	W-W WIDE	<b>F</b> →  or  to select available values	Wide/Narrow	→ <b>F</b>	→ <b>A/B</b>
29)	CTCSS scan	<b>F</b> + <b>2nd</b> <b>9</b>	-SEBK 67.0	<b>F</b> →  or  to change scan direction	Press [  ] key to start scan	→ <b>F</b>	→ <b>A/B</b>
30)	DCS scan	<b>F</b> + <b>3rd</b> <b>0</b>	-SEBK 0623H	<b>F</b> →  or  to change scan direction	Press [  ] key to start scan	→ <b>F</b>	→ <b>A/B</b>
31)	Voice scrambler	<b>F</b> + <b>3rd</b> <b>1</b>	-SCR No 7	<b>F</b> →  or  to select available values	1~8	→ <b>F</b>	→ <b>A/B</b>
32)	Lock MD	<b>F</b> + <b>3rd</b> <b>2</b>	Lock MD KEY	<b>F</b> →  or  to select available values	ALL/PTT/KEY/KEY+S	→ <b>F</b>	→ <b>A/B</b>
33)	DIS Mode	<b>F</b> + <b>3rd</b> <b>3</b>	-DIS Mode CH	<b>F</b> →  or  to select available values	CH/FRE/MR	→ <b>F</b>	→ <b>A/B</b>
34)	Dual watch/ monitor	<b>F</b> + <b>3rd</b> <b>4</b>	CW OFF	<b>F</b> →  or  to select available values	ON/OFF	→ <b>F</b>	→ <b>A/B</b>
35)	Reset	<b>F</b> + <b>3rd</b> <b>5</b>	Reset All	<b>F</b> →  or  to select available values	ALL/VFO/FULL	→ <b>F</b>	→ <b>A/B</b>
36)	Radio Version	<b>F</b> + <b>3rd</b> <b>6</b>	RADIO VER B1.07	<b>F</b> →  or  to select available values	MCU B1.07/Time	→ <b>F</b>	→ <b>A/B</b>

DETAILED FUNCTION DESCRIPTIONS  
ADVANCED FUNCTIONS

DETAILED FUNCTION DESCRIPTIONS

1) Scan & Scan Mode setting (SCAN&SCANS--MENU 1&17)

**Functions:** under VFO/MR/CH mode, the transceiver allows you to scan the entire current operating band and memory channels.

**Enter Menu 1<sup>st</sup> and press [ F ] key to start scanning.**

When you have started scanning, press [ ^ ] / [ v ] key to change direction.And it will halt on a signal it encounters, press [ F ] key to stop scanning

Scanning operation is basically the same in each of the above modes. Before you begin, take a moment to select the way in which you would like the scanner to halt on a signal.

**Enter Menu 17<sup>th</sup> to set scan mode. Default: TO.**

Three options for the scan mode are available under VFO mode:

TO: In this mode, the scanner will halt on a signal it encounters, and will hold there for some time. If you do not take action to disable the scanner within the time period, the scanner will resume even if the stations are still active.

CO: In this mode, the scanner will halt on a signal it encounters, and will hold there if the stations are still active. And after the carrier has dropped, the scanner will resume.

SE: In this mode, the scanner will halt on a signal it encounter, it will not restart automatically; you must manually re-initiate scanning if you wish to resume.

2) Priority Transmit (TX.SEL--MENU 2)

**Functions:** This transceiver allows you to transmit on the sub band even if you are working on the operating band.

**Enter Menu 2<sup>nd</sup> to select priority transmit band. Default: EDIT.**

EDIT: It will transmit on the operating band.

BUSY: It will transmit on the band last talking used.

3) VOX Level & VOX Switch (VOX&VOX.SW--MENU 3&13)

**Functions:** the VOX function provides automatic transmit/receive switching based on voice input to the microphone. With the VOX switch ON, you do not need to press PTT switch in order to transmit, and it is not necessary to use a VOX headset in order to utilize VOX operation.

**Enter Menu 13<sup>th</sup> to set VOX switch. Default: OFF.**

**Enter Menu 3<sup>rd</sup> to set VOX level, it has 7 grades.**

The higher level is, the more sensitive will be.

This transceiver provides for adjustment of “ Hang- Time” of the VOX (the transmit-receive delay after the cessation of speech) via program software.

**Default: 2s.**

**Note : GMRS Version not support**

#### 4) TX Power setting (POW—MENU 4)

**Functions:** you can select high/low TX power according to your talking environment and need. When you store memories, you can store High and Low power settings separately in each memory.

**Enter Menu 4<sup>th</sup> to set TX power.**

High: 2W

Low: 0.5W, when you select Low power, the "L" icon will appear on the display.

#### 5) Squelch Adjustment (SQL—MENU 5)

**Functions:** Squelch system allows you to mute the background noise when no signal is being received. Not only does the Squelch system "standby" operation more pleasant, it also significantly reduce battery current consumption.

**Enter Menu 5<sup>th</sup> to set SQL level. Default: 5.**

#### 6) Dual Wait/Standby (D.WAIT—MENU 6)

**Functions:** This transceiver allows you to receive the sub band signal even if you are working on the operating band. It could monitor the signal under both master and sub band at the same time.

**Enter Menu 6<sup>th</sup> to set Dual Wait. Default: ON.**

#### 7) LED Display Mode (LED—MENU 7)

**Function:** select the LED/Keypad Lamp mode.

**Enter Menu 7<sup>th</sup> to select LED display mode. Default: AUTO.**

ON: LED display lights all the time.

AUTO: Illuminates the LED when any key is pressed and after 3s the light is off.

OFF: Disable the LED lamp.

#### 8) Background Light Color (LIGHT—MENU 8)

**Functions:** choose LED background light color.

**Enter Menu 8<sup>th</sup> to select background light color. Default: 7.**

#### 9) Keypad Beeper setting (BEEP—MENU 9)

**Functions:** enable/disable the keypad beeper.

**Enter Menu 9<sup>th</sup> to set keypad beeper. Default: ON.**

#### 10) Preset Channel Selection(DT/2T/5T CH—MENU 10)

**Functions:** Preset the signal type(OFF/DTMF/2T/5T) at software,by choosing 1-16 channel to achieve remote kill/stun/activate/revive function.

**Enter Menu 10<sup>th</sup> to choose 1-16 channel.**

#### 11) Transmitter Time-Out Timer (TOT—MENU 11)

**Functions:** the TOT feature provides a safety switch which limits transmission to a pre-programmed value. This will promote battery conservation by not allowing you to make excessively-long transmissions, and in the event of a stuck PTT switch it can prevent interference to other users as well as battery depletion.

**Enter Menu 11<sup>th</sup> to set TOT. Default: OFF.**

#### 12) Busy Channel Lock-Out (BCLO—MENU 12)

**Functions:** the BCLO feature prevents the radio's transmitter from being activated if a signal strong enough to break through the "noise" squelch is present. On a frequency where stations using different CTCSS or DCS codes may be active, BCLO prevents you from disrupting their communications accidentally (because your radio may be muted by its own tone decoder).

**Enter Menu 12<sup>th</sup> to set BCLO. Default: OFF.**

OFF: Disable BCLO feature.

WAVE: the radio's PTT will be prevented only if the frequency is busy used.

CALL: the radio's PTT will be prevented only the frequency and tone coder is the same.

#### 13) Transmit Over Beeper (ROGER—MENU 14)

**Functions:** sending a beeper to inform the receiver TX is over.

**Enter Menu 14<sup>th</sup> to set ROGER. Default: OFF.**

#### 14) Receive Saver (RX.SAV—MENU 16)

**Functions:** this feature significantly reduces quiescent battery drain, and you may not receive the full data burst.



**Enter Menu 16<sup>th</sup> to set RX.SAV. Default: OFF.**

#### 15) Auto Keypad Lock(AUTOLK & LOCK MD—MENU 18 &MENU 32)

**Functions:** in order to prevent accidental frequency change or inadvertent transmission. Various aspects of the radio's keys and switches may be locked out.

**Enter Menu 32<sup>th</sup> to set LOCK MD, you can choose to lock All/K+S/KEY/PTT.**

When you switch AUTOLK ON, the keypad will be locked automatically if there is no key operation for 5 second.

If the radio is locked, press [  ] key to unlock it. Also you can lock it using [  ] key by manual.

#### 16) Voice Prompt (VOICE—MENU 19)

**Functions:** enable/disable voice prompt.

**Enter Menu 19<sup>th</sup> to set VOICE. Default: ON.**

17) Power-on Display setting (OPN.SET&VLT—MENU 20&21)

**Functions:** choose power-on display mode and edit power-on message

**Enter Menu 20<sup>th</sup> to set OPN.SET. Default: OFF.**

OFF: display model version

DC: battery power voltage

MSG: power-on message

**Enter Menu 21<sup>st</sup> to check battery voltage.**

18) Repeater Shift setting (OFFSET&S-D—MENU 22&26)

**Functions:** repeater stations, usually located on mountaintops or other high locations, provide a dramatic extension of the communication range for low-powered hand-held or mobile transceivers.

Under VFO mode, you can set the magnitude and direction of the repeater shift.

**Enter Menu 22<sup>nd</sup> to set magnitude of the repeater shift.**

Available values: 0.00 ~ 99.95 MHz

**Enter Menu 26<sup>th</sup> to set the repeater shift direction. Default: OFF.**

19) Display Channel Name (DIS.NAME—MENU 22)

**Functions:** switch channel name display ON/ OFF under MR/CH mode.

**Enter Menu 22<sup>nd</sup> to switch display channel name ON/OFF.**




**You can edit the channel name directly by programming software.**


20) Tone coder & Tone Search Scanning & Tone calling (C-CDC & R-CDC & T-CDC&SEEK 67.0 & D023N—MENU 23&24&25&29&30).

**Function 1: CTCSS/DCS Operation**

Many repeater systems require that a very-low-frequency audio tone be superimposed on your FM carrier in order to activate the repeater. This helps prevent false activation of the repeater by radar or spurious signals from other transmitters.

**Enter Menu 23<sup>th</sup>/24<sup>th</sup>/25<sup>th</sup> to set TX&RX Tone coder/ RX Tone coder/ TX Tone coder.**

1) Press [  ] key to select CTCSS/ DCS/ OFF. After you choose CTCSS/ DCS, press [  ] / [  ] key to choose the right group you need.

2) Press [  ] key to select DCS direction.

This transceiver has 50 groups CTCSS, 104 groups normal/inverted DCS.

CTCSS TONE FREQUENCY (Hz)					
67.0	69.3	71.9	74.4	77.0	79.7
8.25	85.4	88.5	91.5	94.8	97.4
100.0	103.5	107.2	110.9	114.8	118.8
123.0	127.3	131.8	136.5	141.3	146.2
151.4	156.7	159.8	162.2	165.5	167.9
171.3	173.8	177.3	179.9	183.5	186.2
189.9	192.8	196.6	199.5	203.5	206.5
210.7	218.1	225.7	229.1	233.6	241.8
250.3	254.1	-	-	-	-

DCS CODE						
023	074	172	265	371	503	662
025	114	174	266	411	506	664
026	115	205	271	412	516	703
031	116	212	274	413	523	712
032	122	223	306	423	526	723
036	125	225	311	431	532	731
043	131	226	315	432	546	732
047	132	243	325	445	565	734
050	134	244	331	446	606	743
051	143	245	332	452	612	754
053	145	246	343	454	624	-
054	152	251	346	455	627	-
065	155	252	351	462	631	-
071	156	255	356	464	632	-
072	162	261	364	465	645	-
073	165	263	365	466	654	-



**Function 2: TONE Search Scanning**

In operating situations where you don't know the CTCSS/DCS tone being used by another station or stations, you can command the radio to listen to the incoming signal and scan in search of the tone being used.

**Enter Menu 29<sup>th</sup>/30<sup>nd</sup> to start CTCSS/DCS searching.**

If the Tone scan feature does not detect a tone or code, it will continue to scan indefinitely. When this happens, it may be that the other station is not sending any tone. You can press **PTT** key to halt the scan at any time.

You also can press **MONI** key during Tone scanning to listen to the (muted) signal from the other station. When you release the **MONI** key, Tone scanning will resume.

Tone Scanning works either in the VFO or MR modes.

**Function 3: TONE Calling (1750Hz)**

If the repeaters in your country require a 1750Hz burst tone for access (typically in Europe), you can press and hold Side Key 1 for 2S and transmitter will automatically be activated, and a 1750Hz audio tone will be superimposed on the carrier. Once access to the repeater has been gained, you may release Side Key 1 and use PTT key for activating. The transmitter.

**21) VFO Step setting (STEP—MENU 27)**

**Functions:** setting of the synthesizer steps

**Enter Menu 27<sup>th</sup> to set VFO step.**

Available Values: 2.5/6.25/10/12.5/25/50/100kHz.

If you would like to set a frequency like 449.4250 as transmit frequency, there are two method to achieve.

Method 1: Under VFO Mode, press MONI key and hold on, input the desire frequency 449.4250, then release the MONI key, the frequency would be stored to current transmission frequency.

Method 2: Under VFO mode, enter menu 22<sup>nd</sup> to set magnitude of the repeater shift, synthesizer steps can be changed through menu item 27<sup>th</sup>.

Note: You do not need to hold down the monitor button when changing the receiving frequency.

**22) Wide/Narrow band selecting (N/W—MENU 28)**

**Functions:** setting of wide/narrow bandwidth

**Enter Menu 28<sup>th</sup> to set bandwidth.**

Available Values: Wide—25kHz/Narrow—12.5kHz

**23) Scrambler(SCR—MENU 31)**

**Functions:** only 2/5 tone version has this function.

This transceiver has 8 groups of scrambler. It is accomplished by the addition of components to the original signal in order to make a extraction of the original signal difficult. And its voice compand technology will make the voice more clearly in the noise environment.

**Enter Menu 31<sup>st</sup> to set scrambler group.**

**24) Dual Watch/Monitor(DW—MENU 34)**

Function: Dual Watch feature makes transceiver can monitor the calling signal when FM radio is on and you won't miss any calling.

**Enter Menu 34<sup>th</sup> to set DW. Default: OFF.**

ADVANCED FUNCTIONS

1)EMERGENCY ALERT [ F ] + [ # 34 ]

Under standby mode, press [ F ] to enter menu setting. LCD display "MENU", then press [ # 34 ] to turn on emergency alert function, radio will transmit emergency ring for 20S and then receive for 10s, until you press PTT, it will exit.



2)KEYPAD LOCK SETTING

Under standby mode, press [ # 34 ] for 2 S to lock to unlock the keypad. " " will be displayed at the top of LCD when keypad is locked.

And you can Enter Menu 32<sup>th</sup> [LOCK MD] to set Keypad lock method:

ALL/PTT/KEY/KEY+S lock.

3)TONE CALLING (1750 TONE)

To access a repeater, press and hold in [Side key 1] for the amount of time specified by the repeater. The transmitter will automatically be activated, and a 1750Hz audio tone will be superimposed on the carrier. Once access to the repeater has been gained, you may release [Side key 1] and use PTT for activating the transmission.

4)CHANNEL STORAGE AND DELETE

Channel Storage

Under VFO mode, input desired frequency by keypad directly or select one by pressing [ ^ ] or [ v ] and then long press [ F ] , the digits blinks at the right top of LCD, press number to input desired channel directly, or press [ ^ ] or [ v ] to choose desired one, then press [ # 34 ] for storage.

**Note:** after you input desired channel number, if it blinks, it means that this channel is already occupied, you can choose another one.

e.g.: to store the frequency: 450.325MHz with CTCSS: 151.4 to the channel 05, the step are as follows:

- 1) Under VFO mode, input 4-5-0-3-2-5
- 2) Press [ F ]+[ 2nd ][ 3rd ] or press [ F ] +[ # 34 ],then press [ F ] to enter.
- 3) Press [ # 34 ] to choose CTCSS mode, LCD displays C-CDC 67.0
- 4) Press [ ^ ] or [ v ] to choose 151.4, then press [ F ] to confirm
- 5)Press [ A/B ] to exit
- 6)Long press [ F ], the digit blinks at the right top of LCD
- 7)Press [ ^ ] or [ v ] to choose 05 directly
- 8)Press[ # 34 ] for storage. LCD displays MR mode and currently stored channel



#### Channel delete

- 1) Under VFO mode, long press [ **F** ], the digit blinks at the right top of LCD
- 2) Press [ **▲** ] or [ **▼** ] or input channel number you want to delete, then press [ **ENT** ] to confirm
- 3) After delete, it will skip into next channel, if you want to delete it, repeat above operation.

#### 5) FM RADIO FUNCTION

##### 1) On/off radio receiver

Under standby mode, press [ **FM** ] to open FM radio function, LCD display "88.00M", then press [ **ENT** ] again, radios receiver is off.

**Note:** under FM radio mode, if receiving the signal, the radio will be out of FM mode, after 5S, it will be back to FM mode when the signals disappear.

##### 2) Mode selection:

Under FM radio mode, press [ **MEM** ] to switch between FM memory mode and FM frequency mode (this function is unavailable when there is not FM memory channel)

##### 3) Frequency selecting

Under FM frequency mode, input the digits directly by keypad or press [ **▲** ] or [ **▼** ] to choose the desired frequency. Under FM



memory mode, press [ **▲** ] or [ **▼** ] to choose the desired channel.

##### 4) FM radio storage

Under FM frequency mode, long press [ **F** ], the channel number for storage blinks at the right of the screen. Press [ **▲** ] or [ **▼** ] to select the desired channel number, press [ **ENT** ] to confirm and then back to the receiving mode.

##### 5) FM radio channel delete:

Under FM frequency mode, long press [ **F** ], the channel number blinks, press [ **▲** ] or [ **▼** ] to choose the channel number you want to delete, Press [ **ENT** ] to confirm. Repeat this operation, you can delete all memory channel 24 in maximum.

## OPTIONAL SIGNALINGS

### OPTIONAL SIGNAL:

Selected channel call:

Press PTT and at the same time press side key 1 to achieve remote kill/stun/activate.

## DTMF operation

### DTMF decoding(In programming software)

Select the DTMF encode type



1) "OFF", users can input the desired DTMF code directly

DTMF MENU		
Edit Mode		
No.	Type	Code
1	OFF	123456789

2)"ANI", users only should input the call ID, which is called radio ID.

Special Call

No.

1

Call Type

ANI

Call ID

123456789

Save


Cancel

DTMF setting

Stun code: when the radio receives the corresponding DTMF code, the radio will be remote stunned and disabled transit.  
Kill code: when the radio receives the corresponding DTMF code, the radio will be remote killed And disabled receive and transmit.  
Select Ch: the default channel when the DTMF is calling

DTMF operating:  
When the signaling of the channel selects the DTMF, press PTT and at the same time press side key 1, the current channel will automatically check if the DTMF signaling is received and decoding it. And achieve a corresponding function according to the received code. The function including: turn on the squelch, ANI display, remote stun, remote kill.  
Note: when the radio is remote stunned or killed, it can be released by programming.

2 TONE Operation

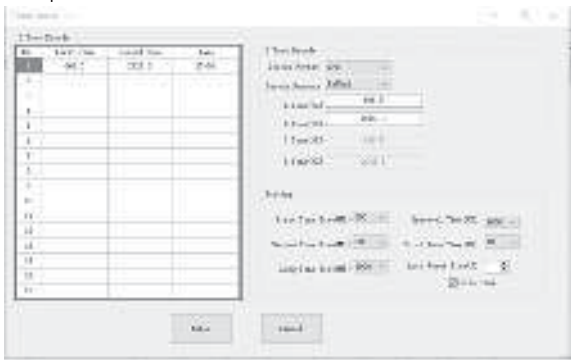

2 Tone encode


Input: the frequency of first tone and second tone

Note: the frequency between of the first tone and second tone should not too similar to avoid the decoding is wrong.

2 Tone decode

Decode Format: the combination of decode, for example: A-B, you should make sure the frequency of first tone is A, and second tone is B. Other combination is similar.

5 Tone Operation

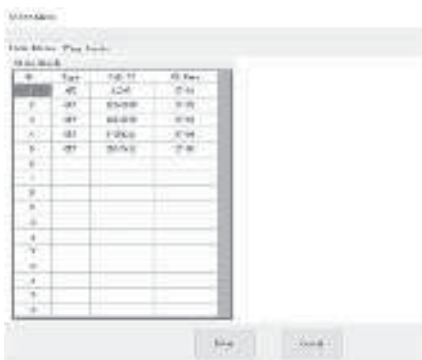

5 Tone encode

The write way is same with the DTMF.

5 Tone decode

Function: The function will be achieved when the radio receives the corresponding code.

Select: Turn on squelch

Stun/kill: same with DTMF

Wake: release the state of stun/kill

TECHNICAL PARAMETERS  
GUARANTEE

TECHNICAL PARAMETERS	
General	
Channel	30
Operating Voltage	7.4VDC
Operating Temperature	-10° C ~ +50° C
weight	106g ( battery and antenna included )
Dimension	116x53x36mm
Transmitter	
Frequency	Rx:136-174 & 400-480MHz Tx:GMRS
power	2W
Modulation Type	FM
Spurious Power	≤ -15db
Modulation Noise	< -40dB
Modulation Distortion	<5%
Frequency Stability	5ppm
Max Fr. Deviation	≤ ± 5KHz
Current	≤ 1600mA
Audio response ( 300-3400Hz )	+6.5~-14dB
Adjacent Ch Power	≥ 65dB

Receiver

Frequency	Rx:136-174 & 400-480MHz Tx:GMRS
Sensitivity	≤0.2 μ V
Occupied Bandwidth	≤16KHz
Selectivity	≥65dB
Intermediation	≥55dB
Audio powe	> 500m W
Audio distortion	≤10%
Frequency Stability	5ppm
Current	standby: 60mA working:250Ma
Audio response ( 300–3400Hz )	+7~–12.5dB

GMRS Frequency Chart (MHz)

Ch	Freq	Ch	Freq	Ch	Freq
1	462.0125	31	467.9875	46	468.0125
2	462.0375	32	467.9625	47	468.0375
3	462.0625	33	467.9375	48	468.0625
4	462.0875	34	467.9125	49	468.0875
5	462.1125	35	467.8875	50	468.1125
6	462.1375	36	467.8625	51	468.1375
7	462.1625	37	467.8375	52	468.1625
8	462.1875	38	467.8125	53	468.1875
9	462.2125	39	467.7875	54	468.2125
10	462.2375	40	467.7625	55	468.2375
11	462.2625	41	467.7375	56	468.2625
12	462.2875	42	467.7125	57	468.2875
13	462.3125	43	467.6875	58	468.3125
14	462.3375	44	467.6625	59	468.3375
15	462.3625	45	467.6375	60	468.3625

Guarantee

Model Number: \_\_\_\_\_

Serial Number: \_\_\_\_\_

Purchasing Date: \_\_\_\_\_

Dealer: \_\_\_\_\_ Telephone: \_\_\_\_\_

User's Name: \_\_\_\_\_ Telephone: \_\_\_\_\_

Address: \_\_\_\_\_ Post Code: \_\_\_\_\_

- Remarks:
- 1 This guarantee card to be kept by the user, no replenishment if lost.
  - 2 This guarantee card to be filled & chopped by the dealer, or it is invalid.
  - 3 Don't alter the guarantee card, please coufirm the serial number on the guarantee card is same as that on the machine.
  - 4 One-year guarantee, charger, battery, ear-phone, antenna and cable are not under guarantee.
  - 5 The user can get repairing service from the followingways:
    - Go to the shop where you buy the machine.
    - Our local repairing agents.
    - Send back to our company.

Please cut along with this line





#### ■Licensing Information

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determind by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the follwing measuress:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### Attention:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

This radio complieswith IEEE and ICNIRP exposure limits for occupational/controlled RF exposure environment at operating duty factors of up to 50% and is authorized by the FCC for occupational use only. An appropriate warning lable is affixed to all units. In order to comply with RF exposure requirements, a minimum distance of 2.5 cm must be maintained when held-to-face, and body-worn operations are restricted to the approved original accessories (belt clip), a minimum distance of 0 cm. Do not use this device when antenna shows obvious damages.

#### ■ Warnings

Use of radio in Canada/USA is subject to the rules & regulations of IC/FCC. IC/FCC requires no license when operated in Canada/USA. Changes or modifications not expressly approved by our may void the user authority granted by the IC/FCC to operate this radio and should not be made. To comply with IC/FCC requirements, transmitter adjustments should be made only by or under the supervision of a person certified as technically qualified to perform transmitter maintenance and repairs in the private land mobile and fixed services as certified by an organization representative of the user of those services. Replacement of any transmitter component (crystal, semiconductor, etc) not authorized by the IC/FCC equipment authorization for this radio could violate IC/ FCC rules.

**Note:** Use of this radio outside the country where it was intended to be distributed is subject to government regulations and may be prohibited.

**Important:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this device. Your radio is set up to transmit a regulated signal on an assigned frequency. It is against the law to alter or adjust the settings inside the radio to exceed those limitations. Any adjustments to your radio must be made by qualified technicians.

To be safe and sure:

- Never open your radio's case.
- Never change or replace anything in your radio except the battery.

**WARNING :** MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBIITED UNDER FCC RULES AND FEDERRAL LAW.