


Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-02-02 ~ 2024-02-03	Test Mode	802.11ax-HE40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7647.000	32.1	11.4	43.5	74.0	-30.5	Peak	Horizontal
	11531.500	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
	12228.500	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
	7647.000	32.1	11.4	43.5	74.0	-30.5	Peak	Vertical
	8182.500	32.8	11.5	44.3	74.0	-29.7	Peak	Vertical
	11523.000	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical
06	8199.500	33.1	11.4	44.5	74.0	-29.5	Peak	Horizontal
	11081.000	31.3	16.7	48.0	74.0	-26.0	Peak	Horizontal
	11523.000	31.8	17.2	49.0	74.0	-25.0	Peak	Horizontal
	7630.000	32.0	11.7	43.7	74.0	-30.3	Peak	Vertical
	8182.500	32.4	11.5	43.9	74.0	-30.1	Peak	Vertical
	11642.000	30.4	17.9	48.3	74.0	-25.7	Peak	Vertical
09	7638.500	32.6	11.5	44.1	74.0	-29.9	Peak	Horizontal
	11489.000	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
	12194.500	30.2	17.8	48.0	74.0	-26.0	Peak	Horizontal
	7536.500	30.3	11.9	42.2	74.0	-31.8	Peak	Vertical
	11055.500	31.0	16.3	47.3	74.0	-26.7	Peak	Vertical
	11548.500	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

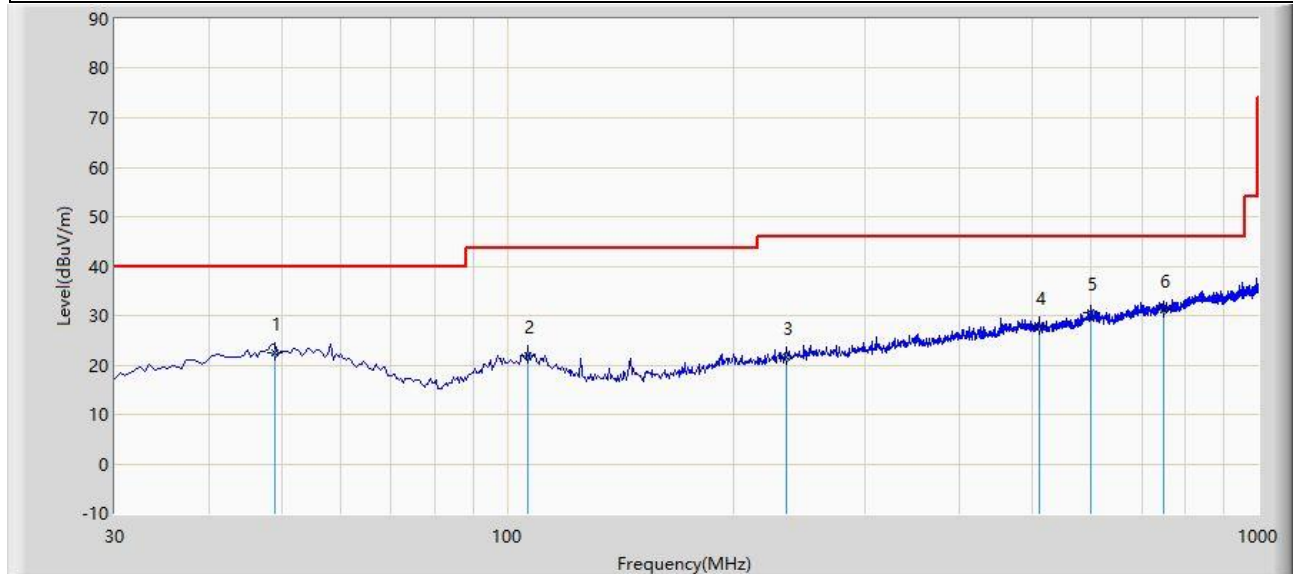

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		48.915	22.575	2.012	-17.425	40.000	20.563	QP
2		106.630	21.964	3.515	-21.536	43.500	18.449	QP
3		235.155	21.734	2.131	-24.266	46.000	19.603	QP
4		511.120	27.612	2.200	-18.388	46.000	25.412	QP
5		599.875	30.692	3.134	-15.308	46.000	27.559	QP
6	*	748.285	31.033	1.788	-14.967	46.000	29.245	QP

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

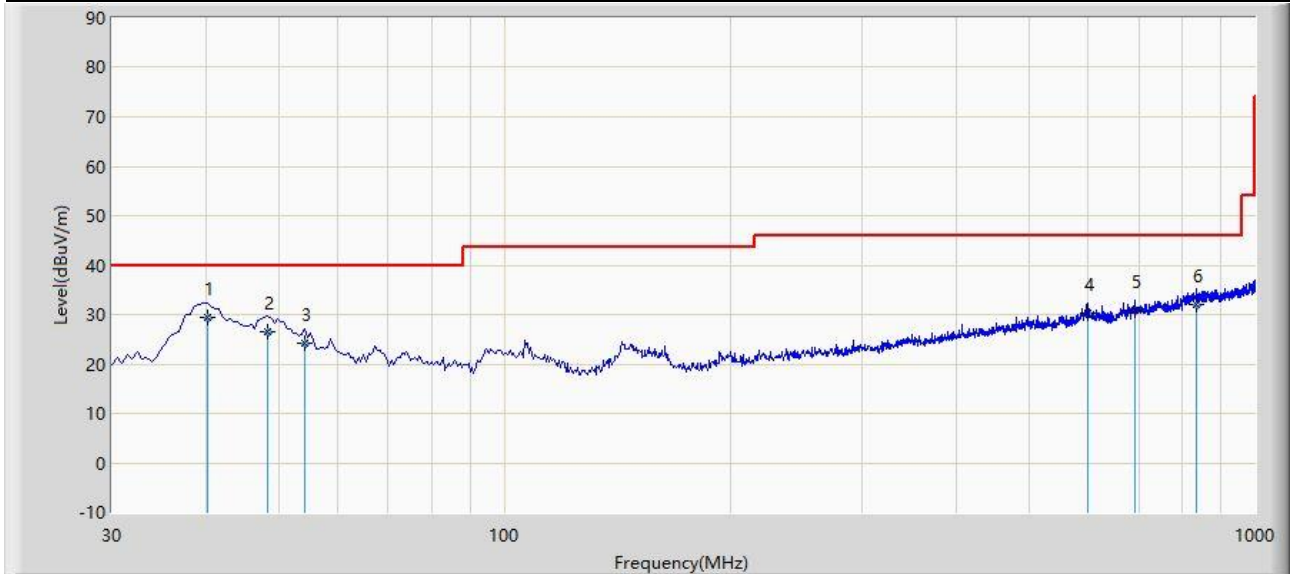

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	40.185	29.292	10.106	-10.708	40.000	19.186	QP
2		48.430	26.618	6.059	-13.382	40.000	20.559	QP
3		54.250	24.171	3.933	-15.829	40.000	20.238	QP
4		599.875	30.392	2.834	-15.608	46.000	27.559	QP
5		691.055	30.822	2.124	-15.178	46.000	28.698	QP
6		837.040	32.133	1.177	-13.867	46.000	30.956	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

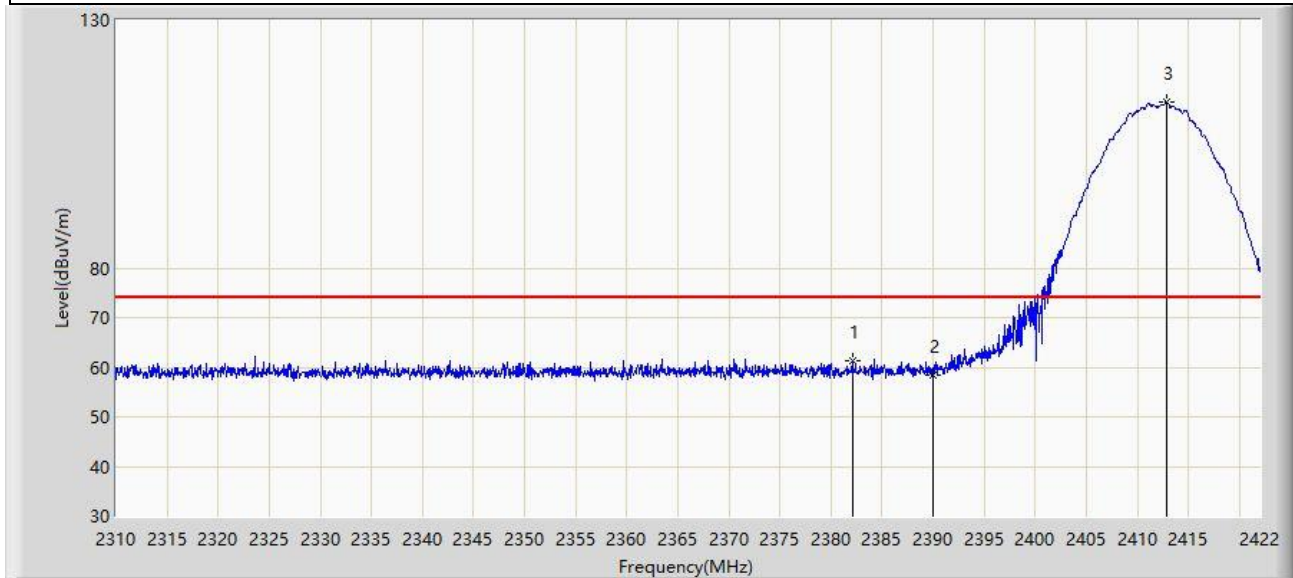


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2382.072	61.391	29.501	-12.609	74.000	31.890	PK
2		2390.000	58.439	26.586	-15.561	74.000	31.853	PK
3		2412.816	113.411	81.663	N/A	N/A	31.748	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

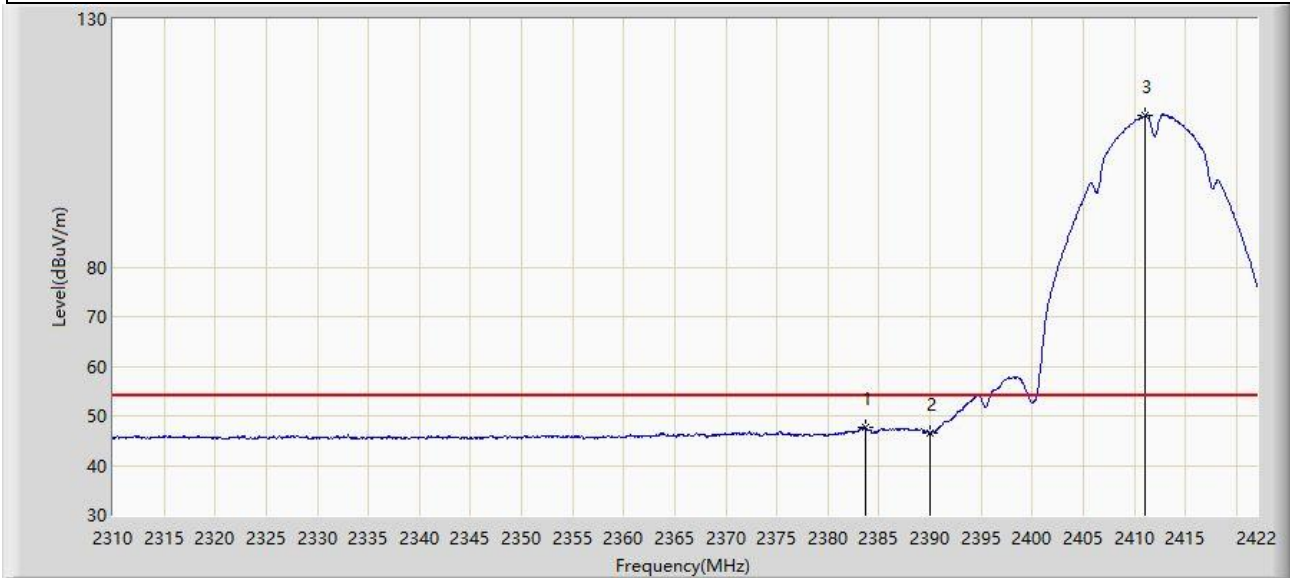


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.640	47.548	15.661	-6.452	54.000	31.887	AV
2		2390.000	46.647	14.794	-7.353	54.000	31.853	AV
3		2411.080	110.636	78.883	N/A	N/A	31.753	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

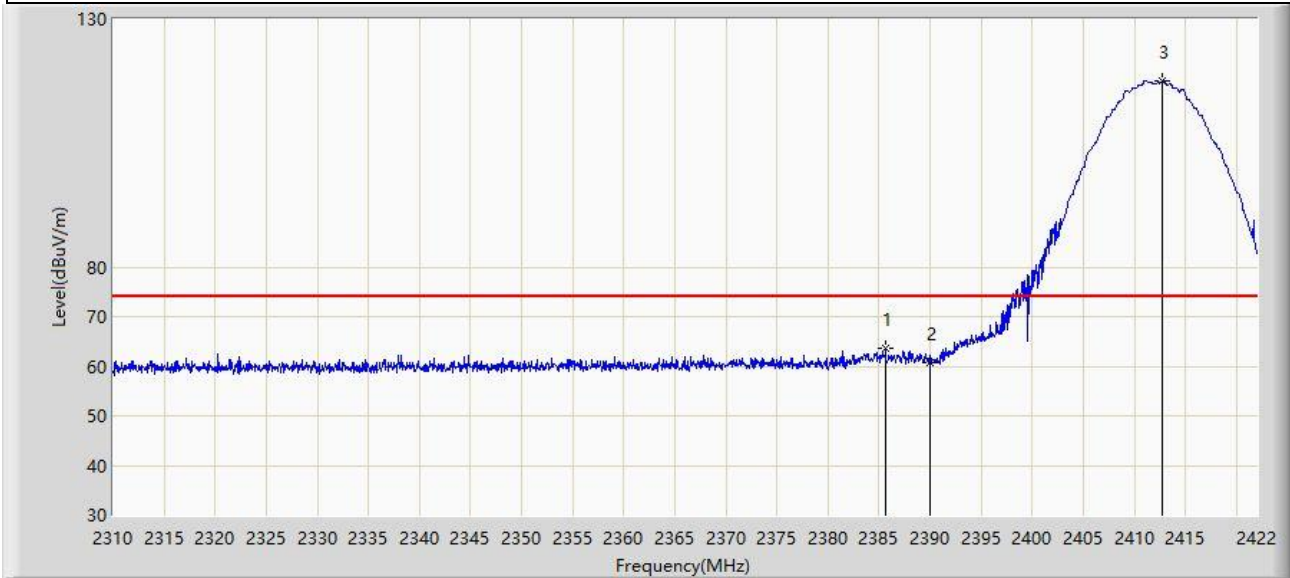


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2385.656	63.705	31.828	-10.295	74.000	31.877	PK
2		2390.000	60.651	28.798	-13.349	74.000	31.853	PK
3		2412.704	117.491	85.743	N/A	N/A	31.748	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

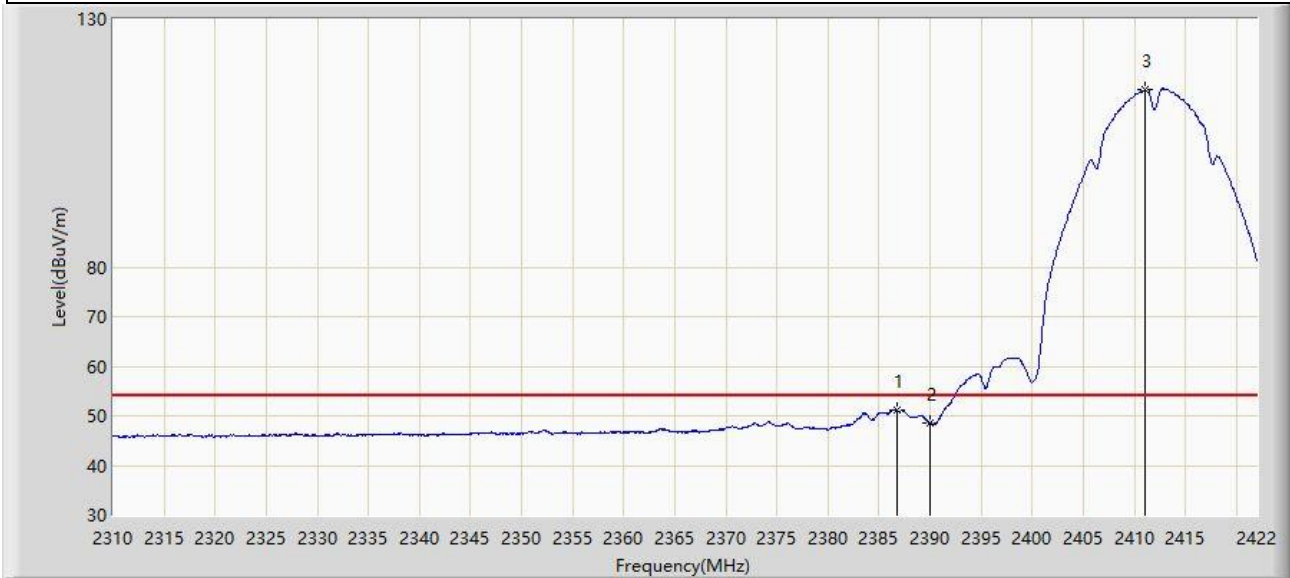


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.776	51.293	19.422	-2.707	54.000	31.871	AV
2		2390.000	48.457	16.604	-5.543	54.000	31.853	AV
3		2411.080	115.877	84.124	N/A	N/A	31.753	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

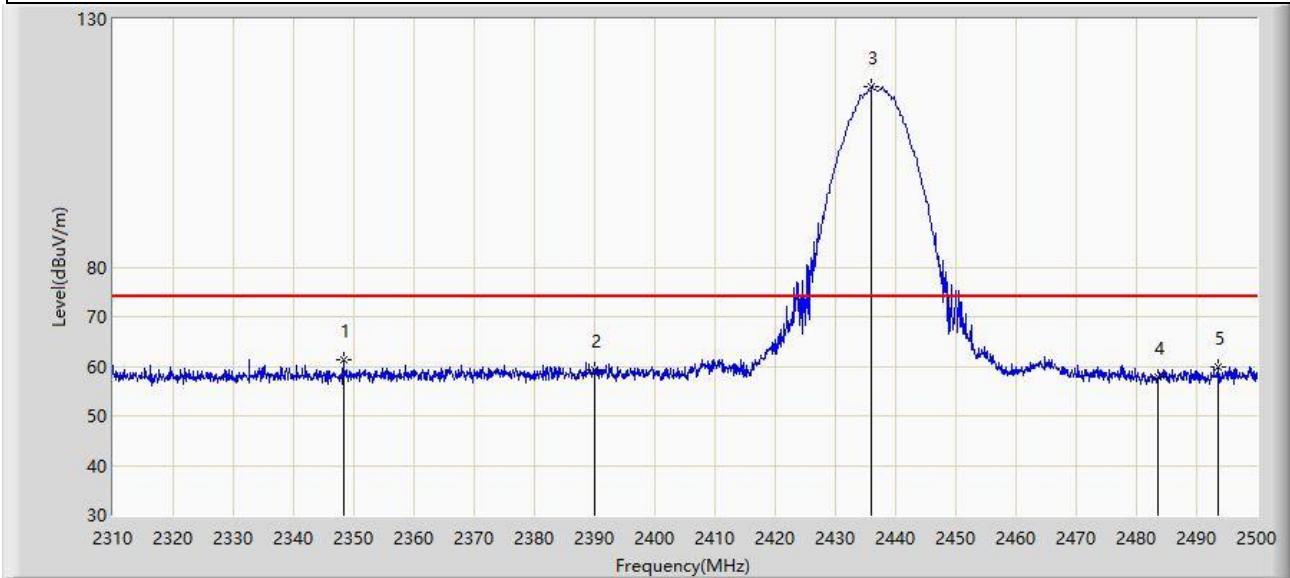


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2348.285	61.280	29.327	-12.720	74.000	31.953	PK
2		2390.000	59.365	27.512	-14.635	74.000	31.853	PK
3		2436.065	116.383	84.665	N/A	N/A	31.719	PK
4		2483.500	57.788	26.091	-16.212	74.000	31.696	PK
5		2493.540	59.803	28.109	-14.197	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

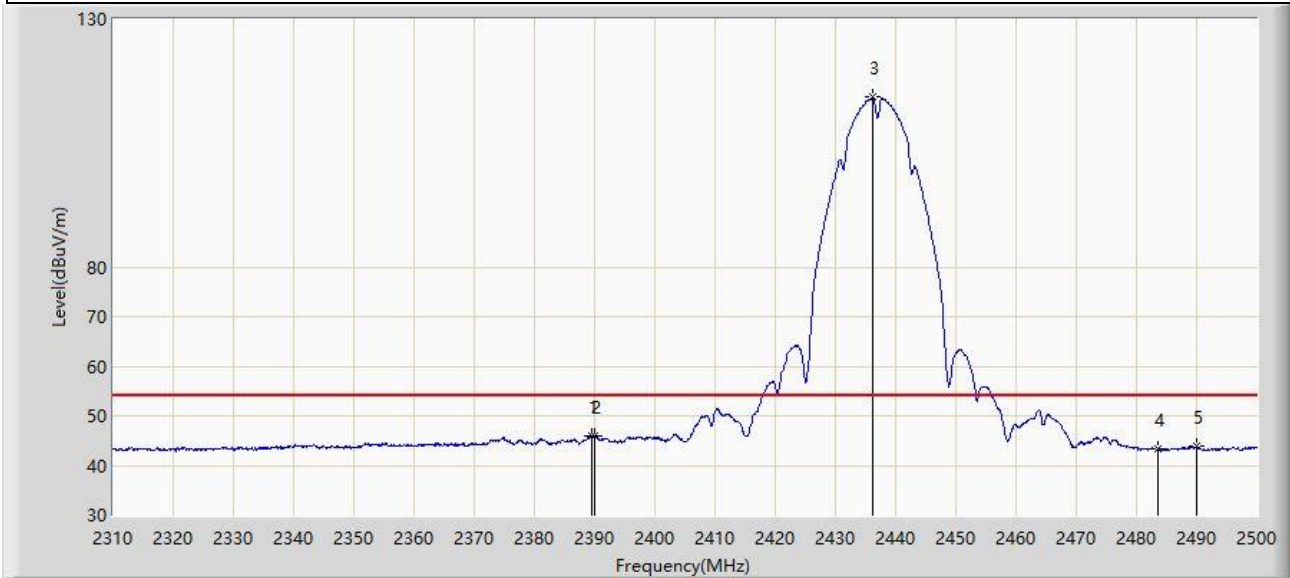


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.610	46.067	14.212	-7.933	54.000	31.855	AV
2		2390.000	45.861	14.008	-8.139	54.000	31.853	AV
3		2436.255	114.258	82.540	N/A	N/A	31.719	AV
4		2483.500	43.349	11.652	-10.651	54.000	31.696	AV
5		2489.930	43.832	12.139	-10.168	54.000	31.693	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

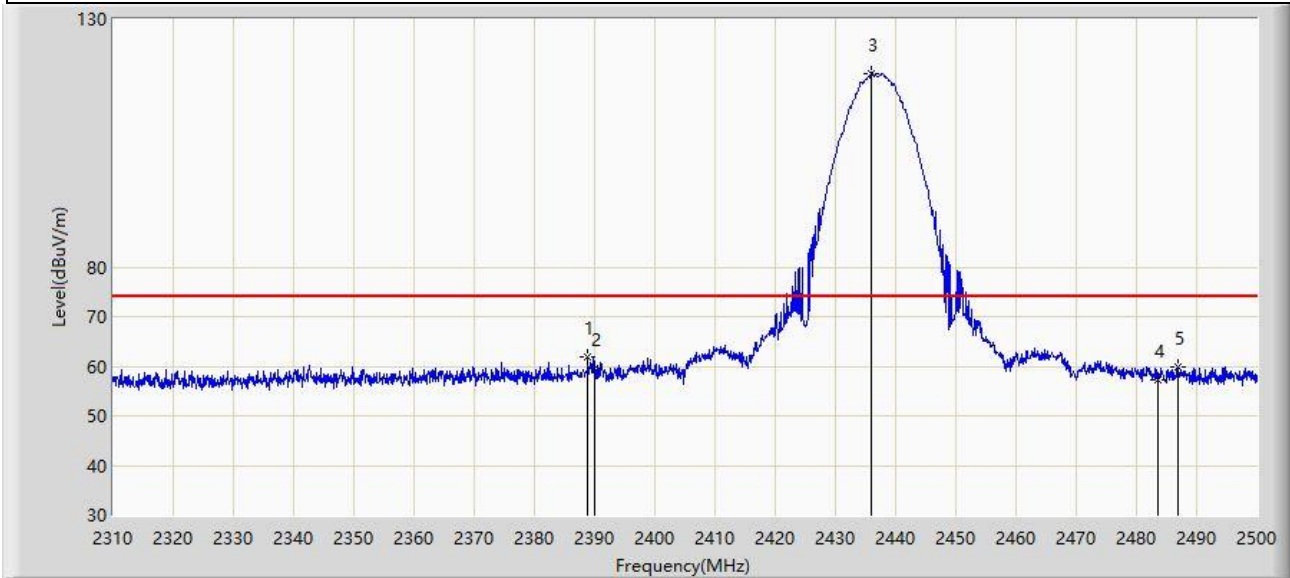


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.850	61.885	30.026	-12.115	74.000	31.860	PK
2		2390.000	59.687	27.834	-14.313	74.000	31.853	PK
3		2435.970	119.070	87.352	N/A	N/A	31.718	PK
4		2483.500	57.385	25.688	-16.615	74.000	31.696	PK
5		2486.795	59.800	28.105	-14.200	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2437MHz	

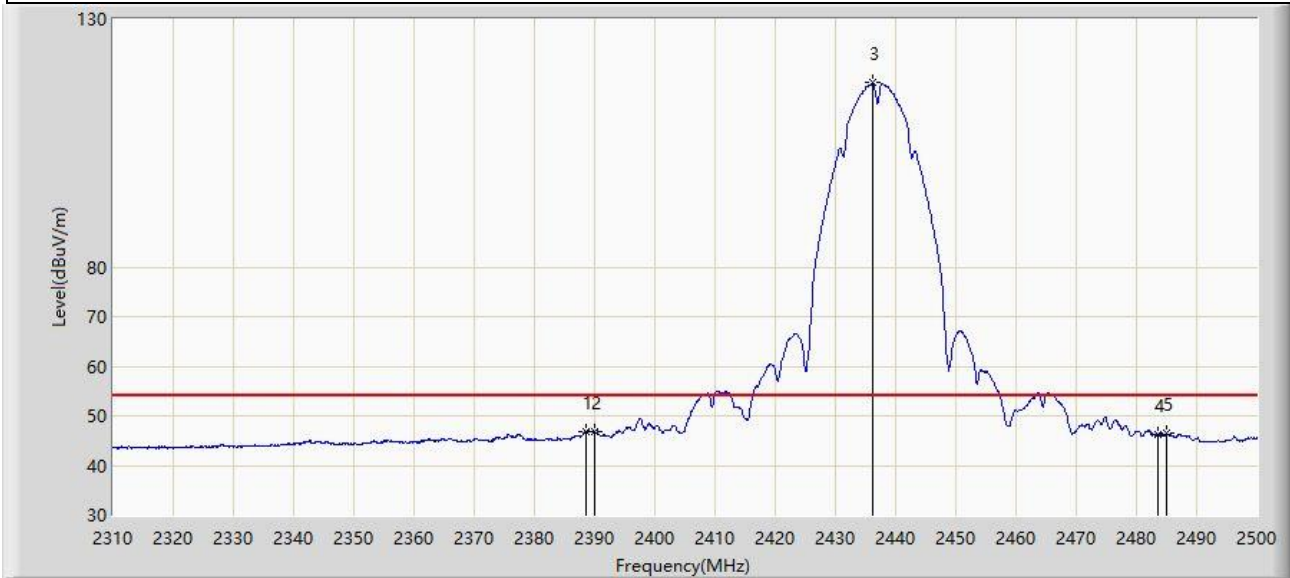


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.470	46.902	15.041	-7.098	54.000	31.862	AV
2		2390.000	46.757	14.904	-7.243	54.000	31.853	AV
3		2436.160	117.161	85.443	N/A	N/A	31.719	AV
4		2483.500	46.268	14.571	-7.732	54.000	31.696	AV
5		2485.085	46.446	14.750	-7.554	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

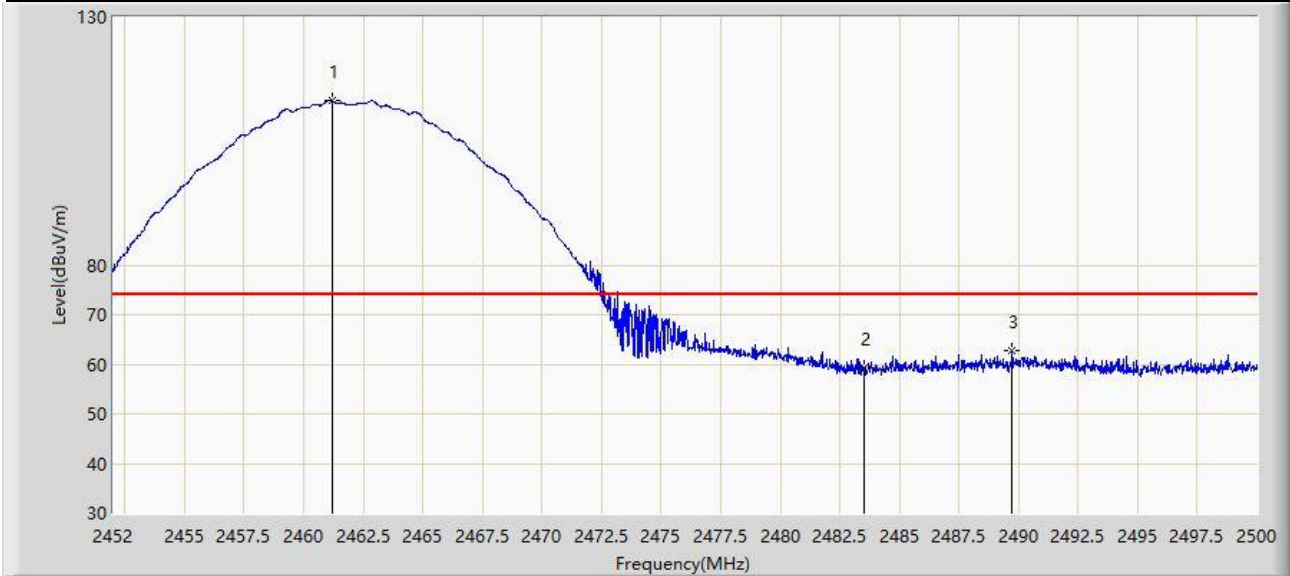

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.175	113.176	81.486	N/A	N/A	31.690	PK
2		2483.500	59.296	27.599	-14.704	74.000	31.696	PK
3	*	2489.725	62.626	30.933	-11.374	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.100	110.918	79.228	N/A	N/A	31.689	AV
2		2483.500	45.320	13.623	-8.680	54.000	31.696	AV
3	*	2490.325	48.107	16.414	-5.893	54.000	31.693	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.250	117.184	85.494	N/A	N/A	31.690	PK
2		2483.500	60.386	28.689	-13.614	74.000	31.696	PK
3	*	2487.000	63.856	32.161	-10.144	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

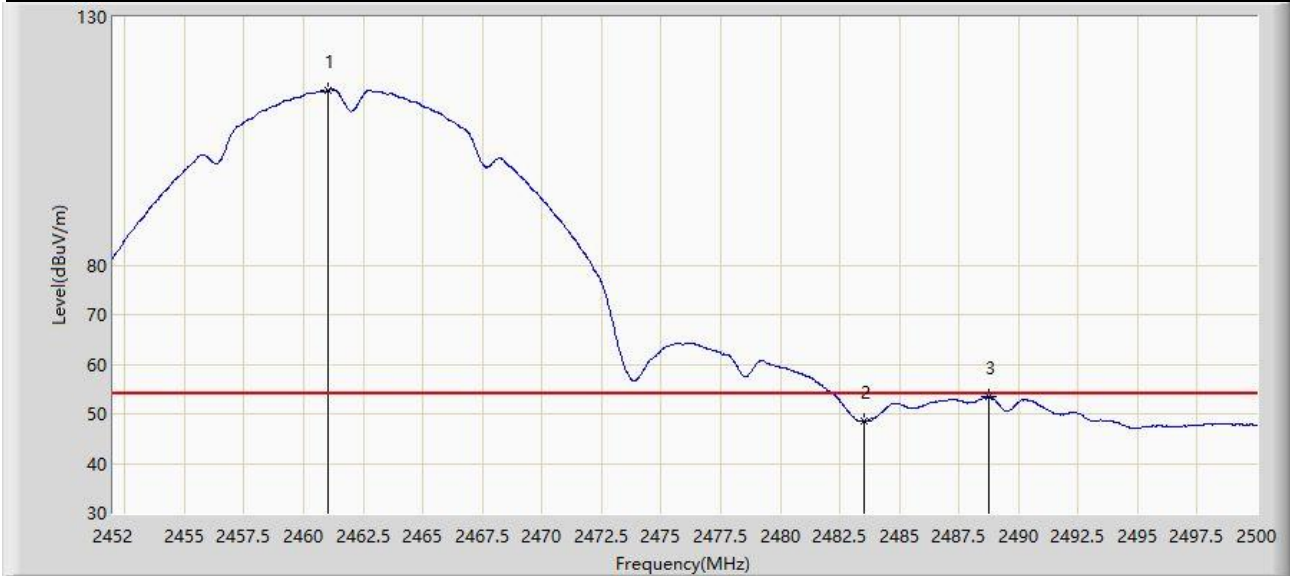


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.050	115.257	83.567	N/A	N/A	31.689	AV
2		2483.500	48.496	16.799	-5.504	54.000	31.696	AV
3	*	2488.750	53.480	21.786	-0.520	54.000	31.694	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

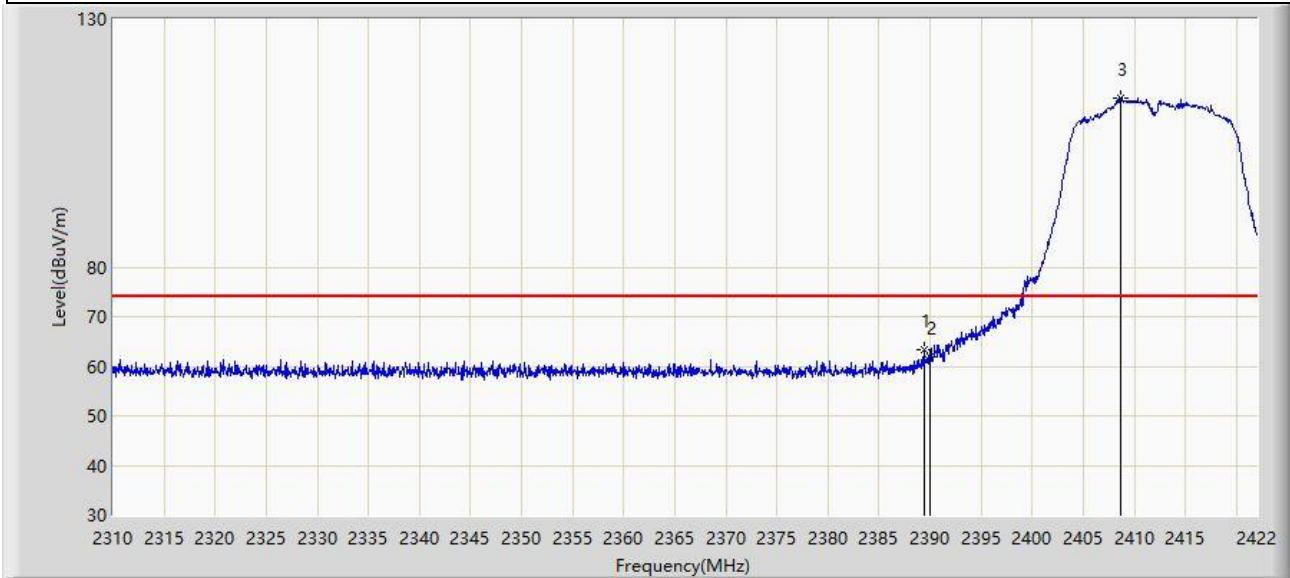


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.408	63.318	31.462	-10.682	74.000	31.856	PK
2		2390.000	61.969	30.116	-12.031	74.000	31.853	PK
3		2408.616	114.042	82.280	N/A	N/A	31.762	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

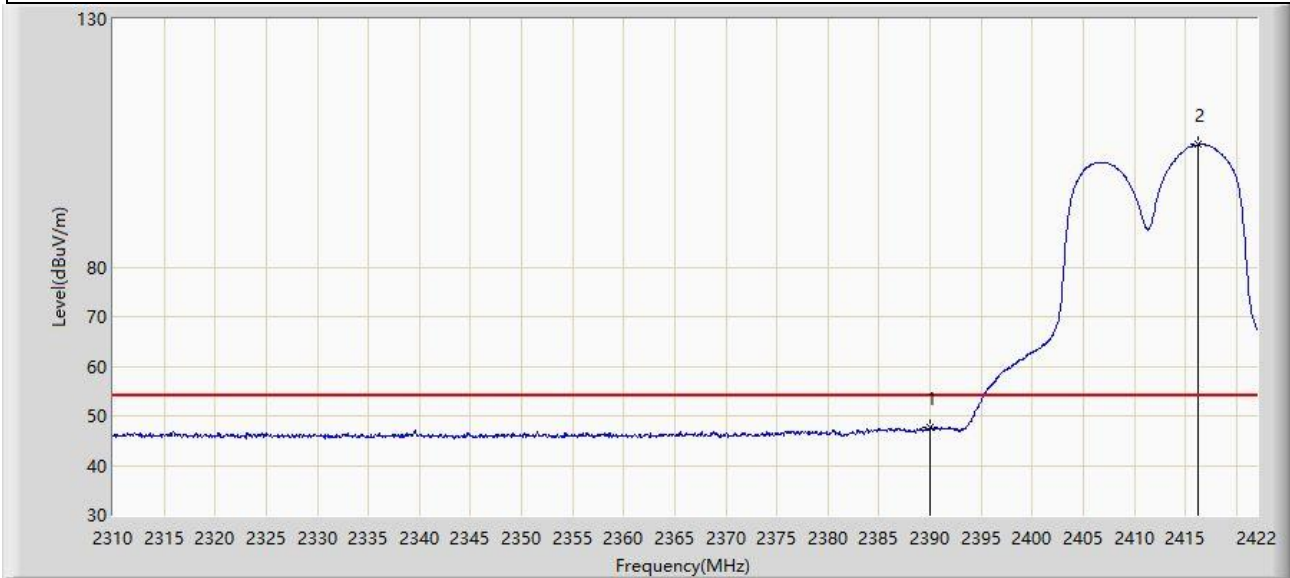


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	47.571	15.718	-6.429	54.000	31.853	AV
2		2416.288	104.702	72.965	N/A	N/A	31.737	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

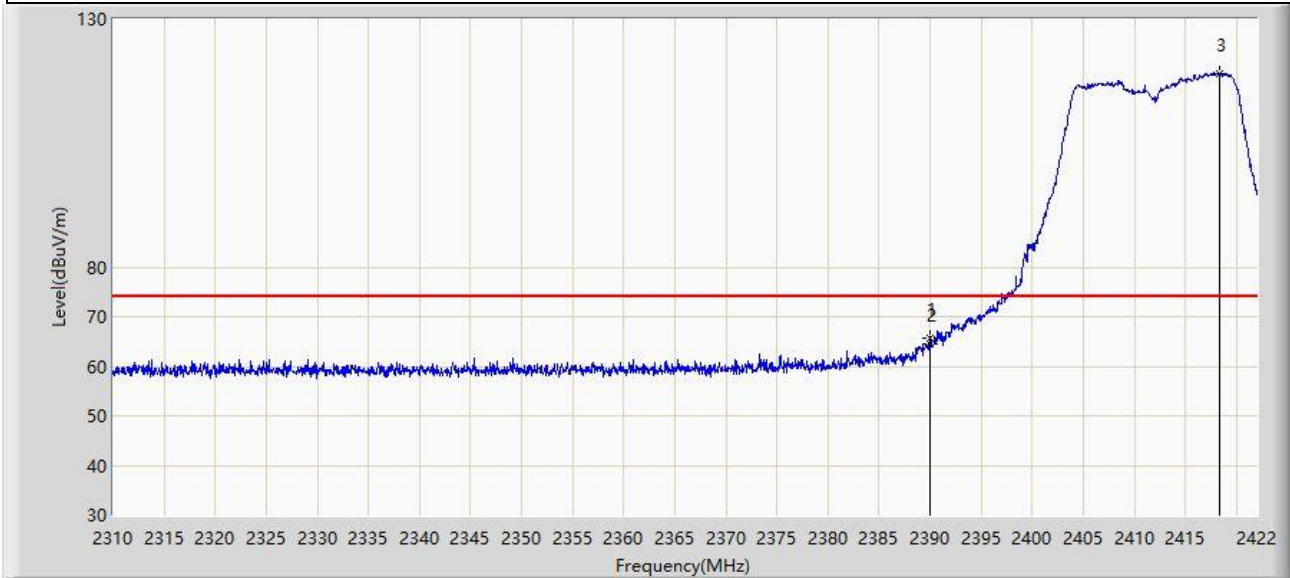


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.968	65.723	33.870	-8.277	74.000	31.853	PK
2		2390.000	64.540	32.687	-9.460	74.000	31.853	PK
3		2418.304	119.081	87.351	N/A	N/A	31.730	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

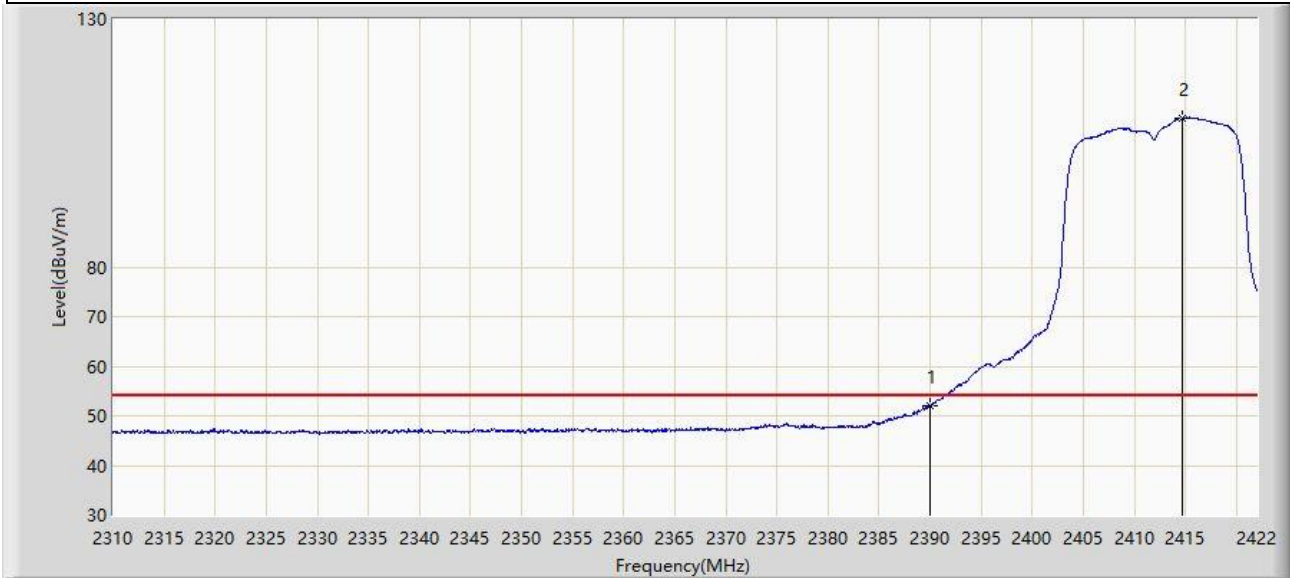


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	51.967	20.114	-2.033	54.000	31.853	AV
2		2414.720	110.018	78.276	N/A	N/A	31.742	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2417MHz	

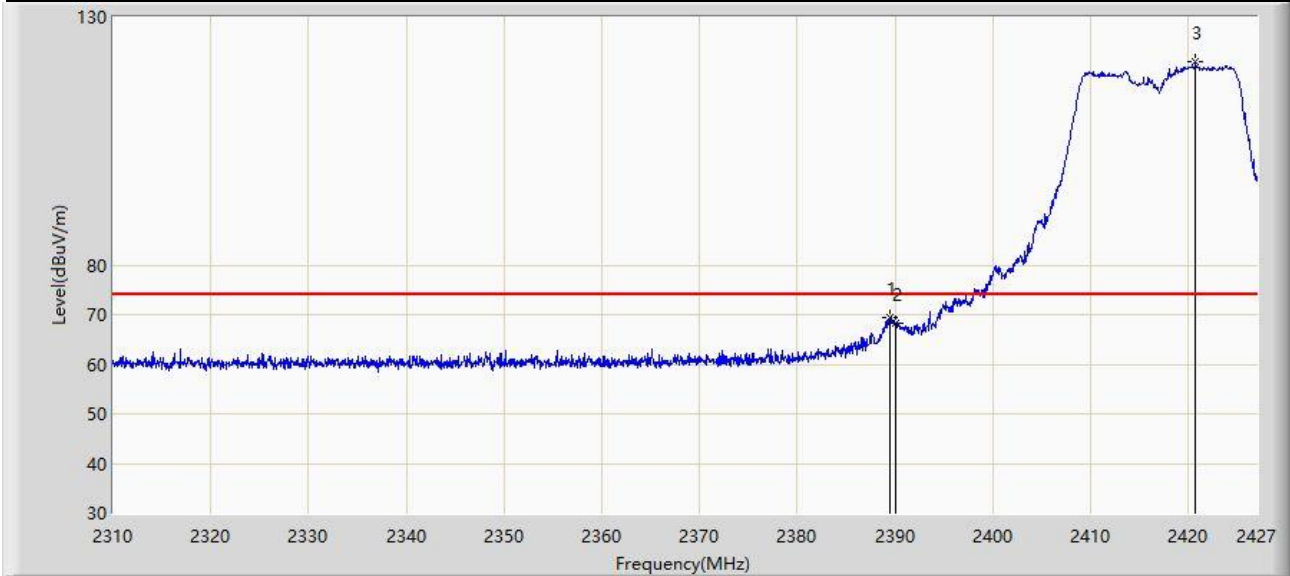


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.501	69.409	37.553	-4.591	74.000	31.855	PK
2		2390.000	68.220	36.367	-5.780	74.000	31.853	PK
3		2420.740	120.971	89.247	N/A	N/A	31.725	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2417MHz	

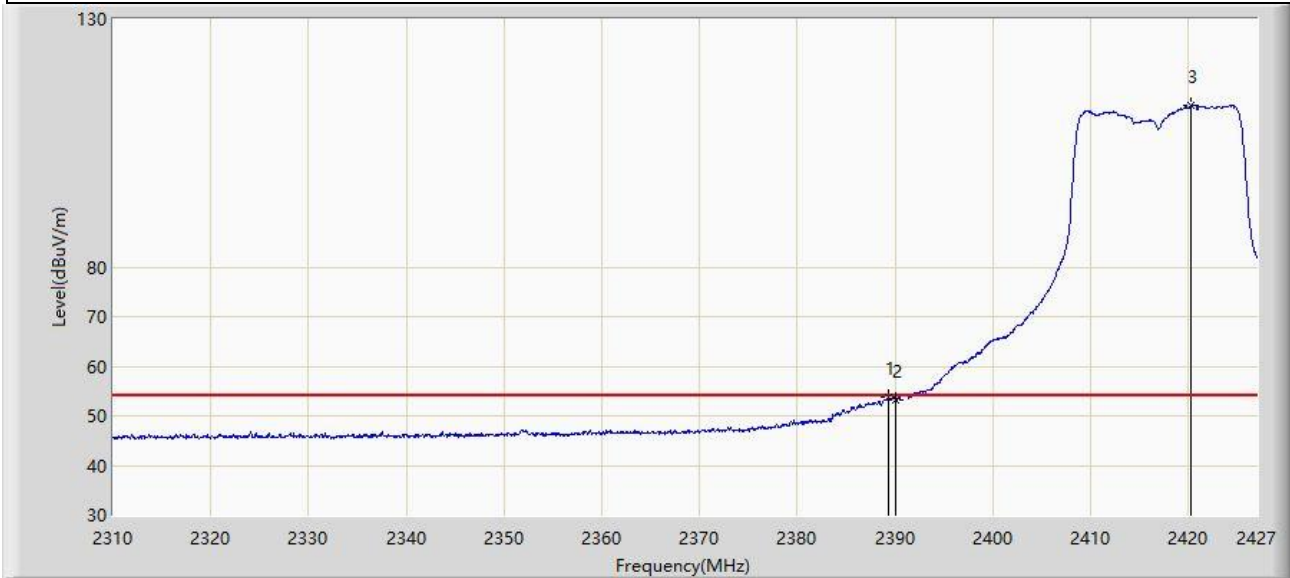


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.326	53.672	21.815	-0.328	54.000	31.857	AV
2		2390.000	53.307	21.454	-0.693	54.000	31.853	AV
3		2420.272	112.489	80.764	N/A	N/A	31.725	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

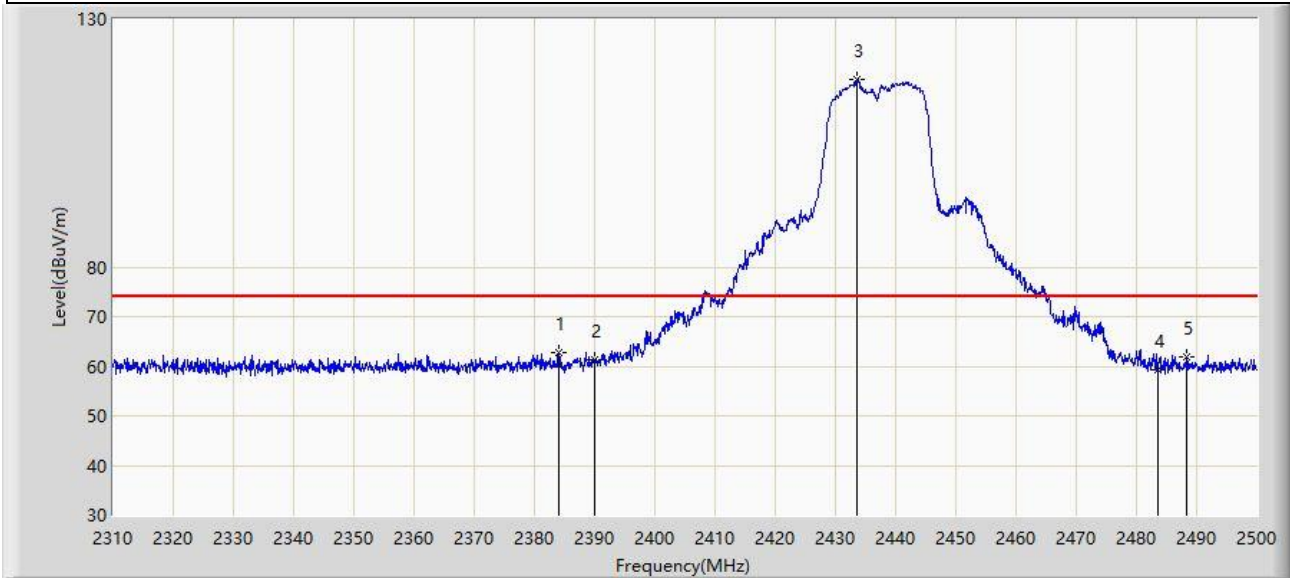


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.100	62.878	30.992	-11.122	74.000	31.887	PK
2		2390.000	61.225	29.372	-12.775	74.000	31.853	PK
3		2433.690	117.925	86.207	N/A	N/A	31.718	PK
4		2483.500	59.201	27.504	-14.799	74.000	31.696	PK
5		2488.220	61.922	30.228	-12.078	74.000	31.694	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

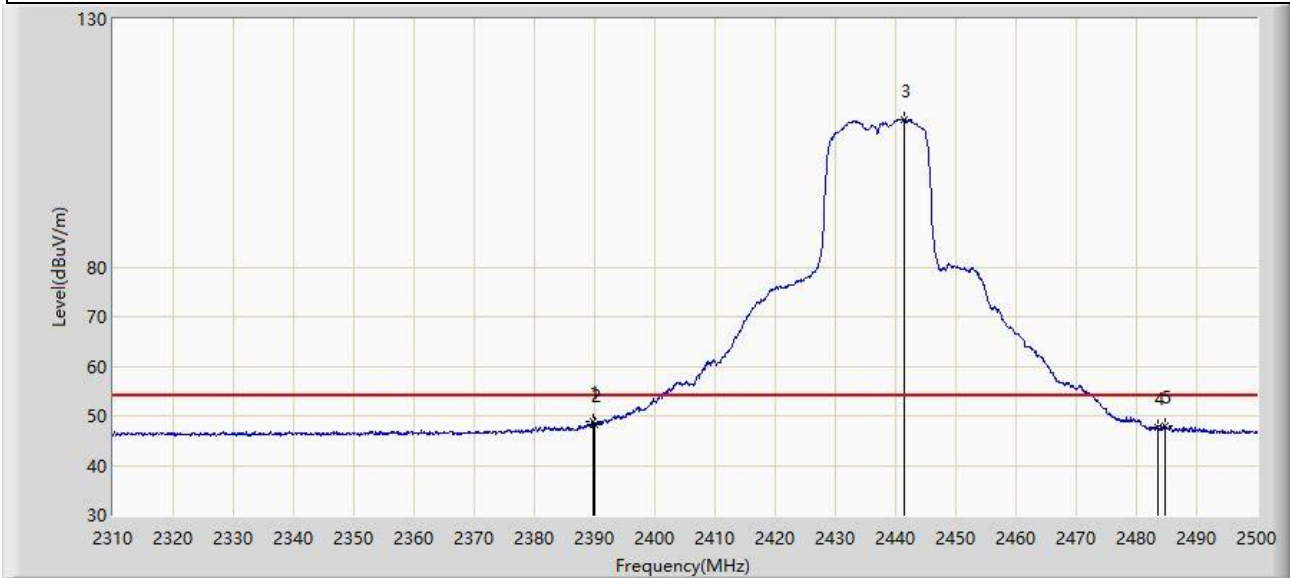


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.705	48.696	16.842	-5.304	54.000	31.855	AV
2		2390.000	48.253	16.400	-5.747	54.000	31.853	AV
3		2441.385	109.784	78.070	N/A	N/A	31.714	AV
4		2483.500	47.790	16.093	-6.210	54.000	31.696	AV
5		2484.705	47.978	16.282	-6.022	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

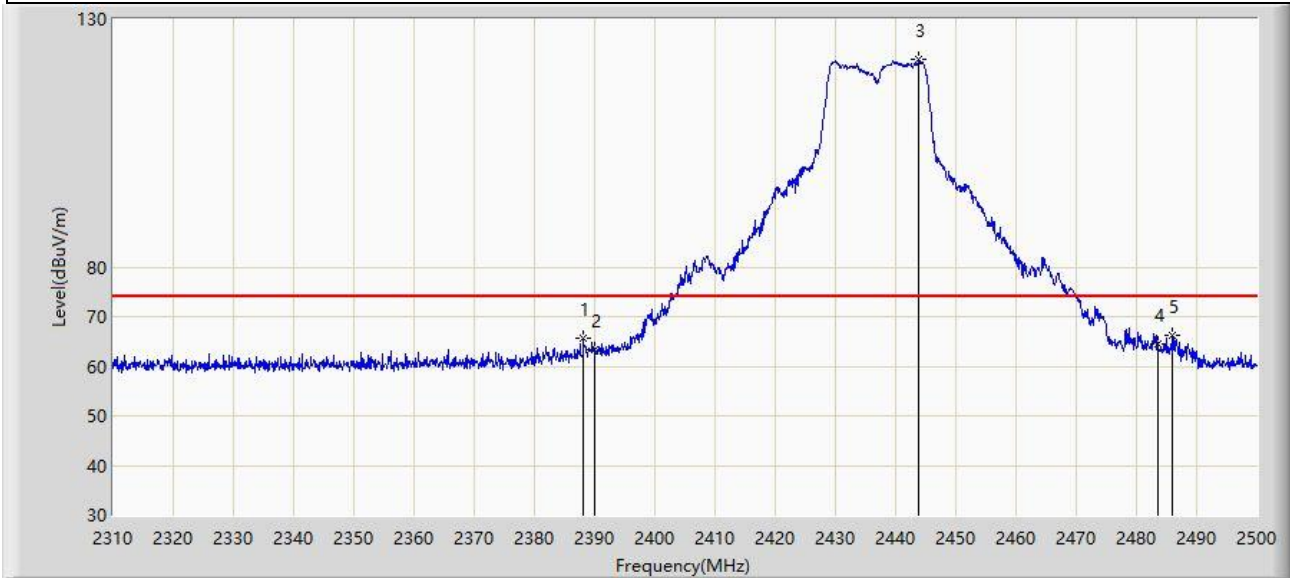


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.090	65.607	33.743	-8.393	74.000	31.863	PK
2		2390.000	63.457	31.604	-10.543	74.000	31.853	PK
3		2443.855	122.024	90.313	N/A	N/A	31.710	PK
4		2483.500	64.513	32.816	-9.487	74.000	31.696	PK
5	*	2485.940	66.181	34.485	-7.819	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

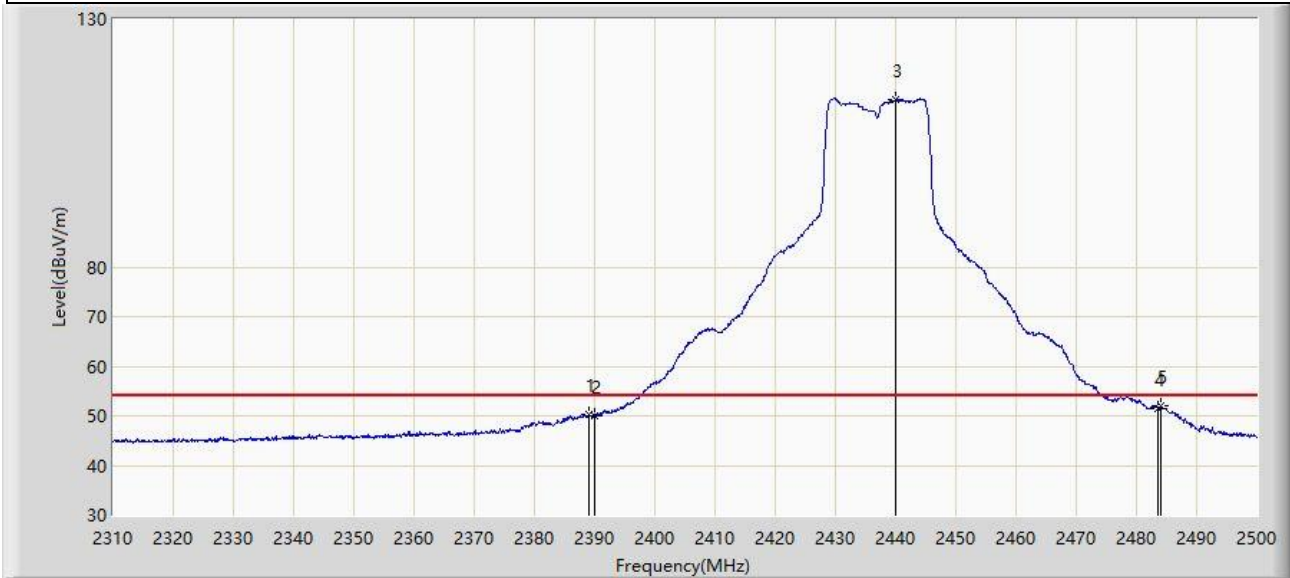


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.135	50.226	18.368	-3.774	54.000	31.858	AV
2		2390.000	50.127	18.274	-3.873	54.000	31.853	AV
3		2440.055	113.780	82.064	N/A	N/A	31.715	AV
4		2483.500	51.567	19.870	-2.433	54.000	31.696	AV
5	*	2484.135	51.933	20.236	-2.067	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

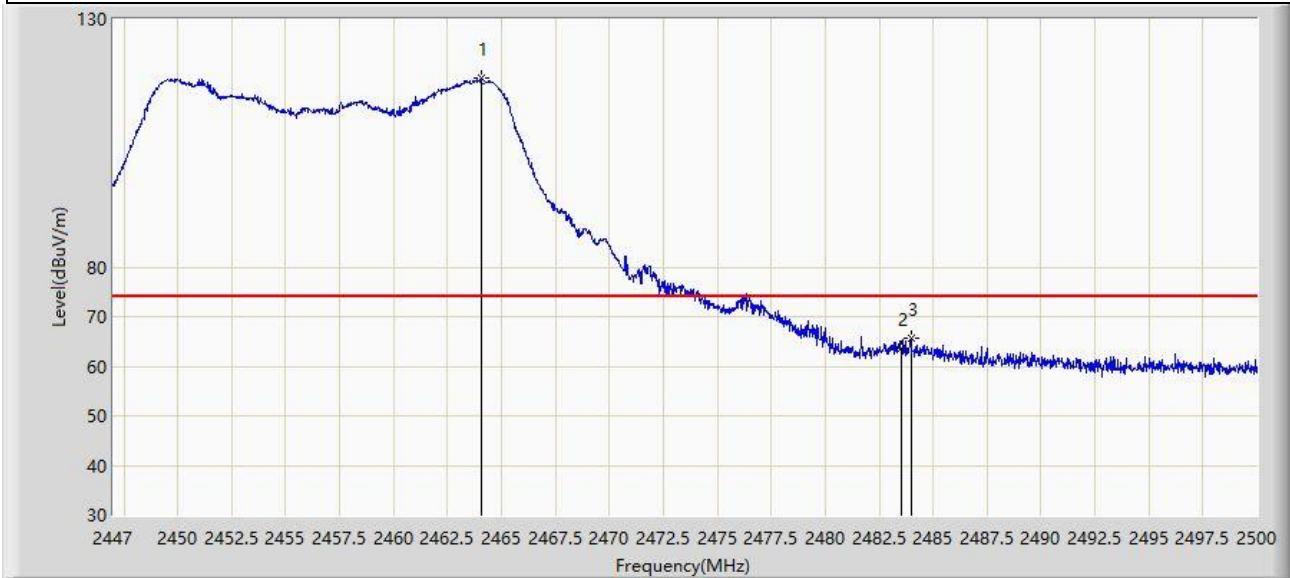


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.066	118.220	86.528	N/A	N/A	31.692	PK
2		2483.500	63.479	31.782	-10.521	74.000	31.696	PK
3	*	2483.968	65.521	33.824	-8.479	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

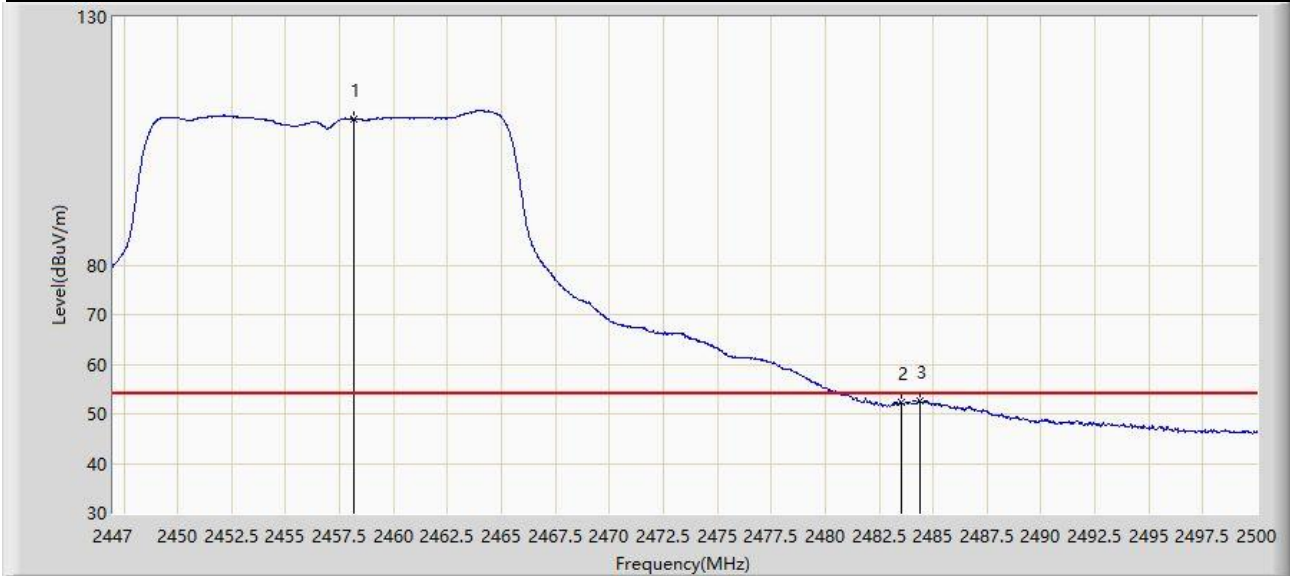


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.183	109.412	77.721	N/A	N/A	31.690	AV
2		2483.500	52.270	20.573	-1.730	54.000	31.696	AV
3	*	2484.392	52.621	20.925	-1.379	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

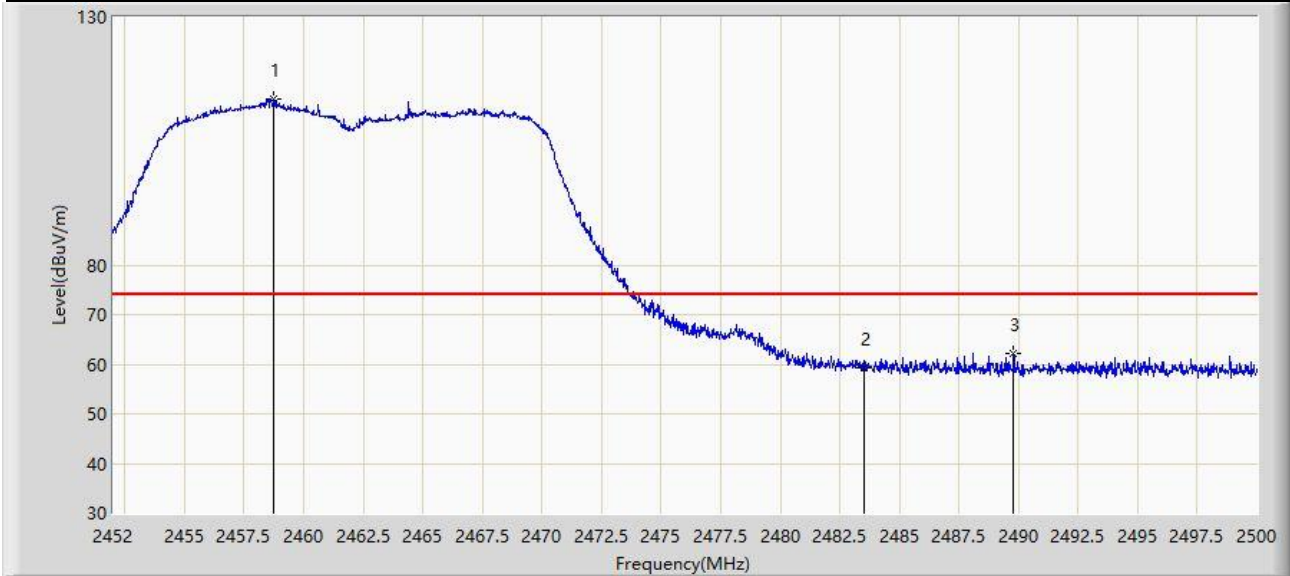


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.720	113.482	81.792	N/A	N/A	31.690	PK
2		2483.500	59.387	27.690	-14.613	74.000	31.696	PK
3	*	2489.800	62.185	30.492	-11.815	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

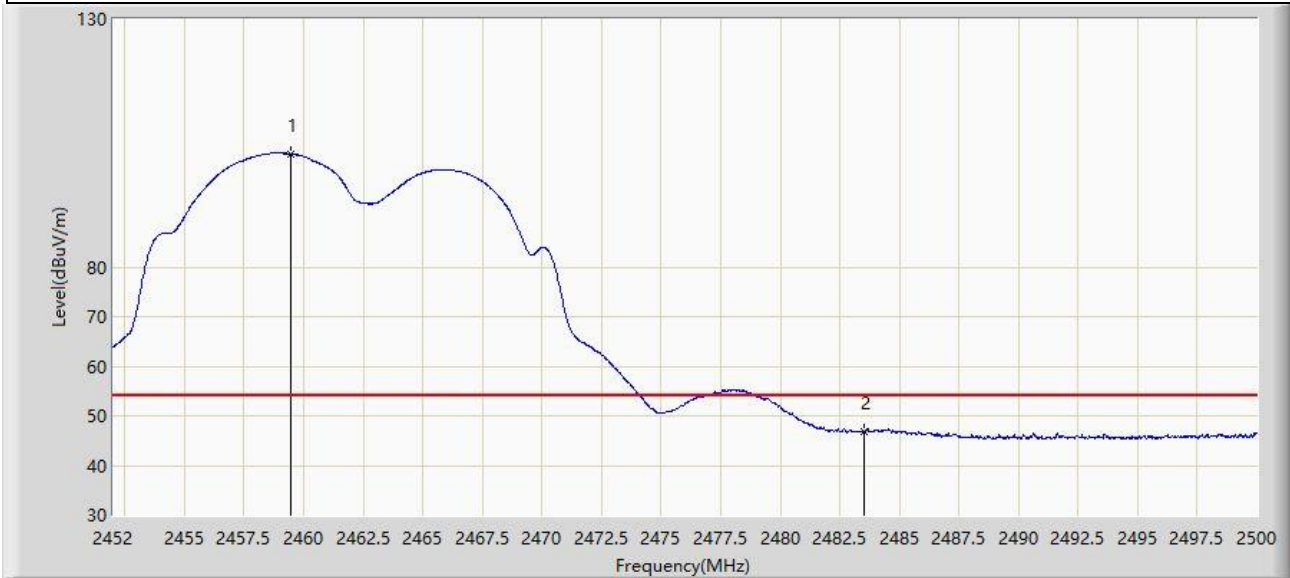


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.440	102.846	71.156	N/A	N/A	31.690	AV
2	*	2483.500	46.954	15.257	-7.046	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

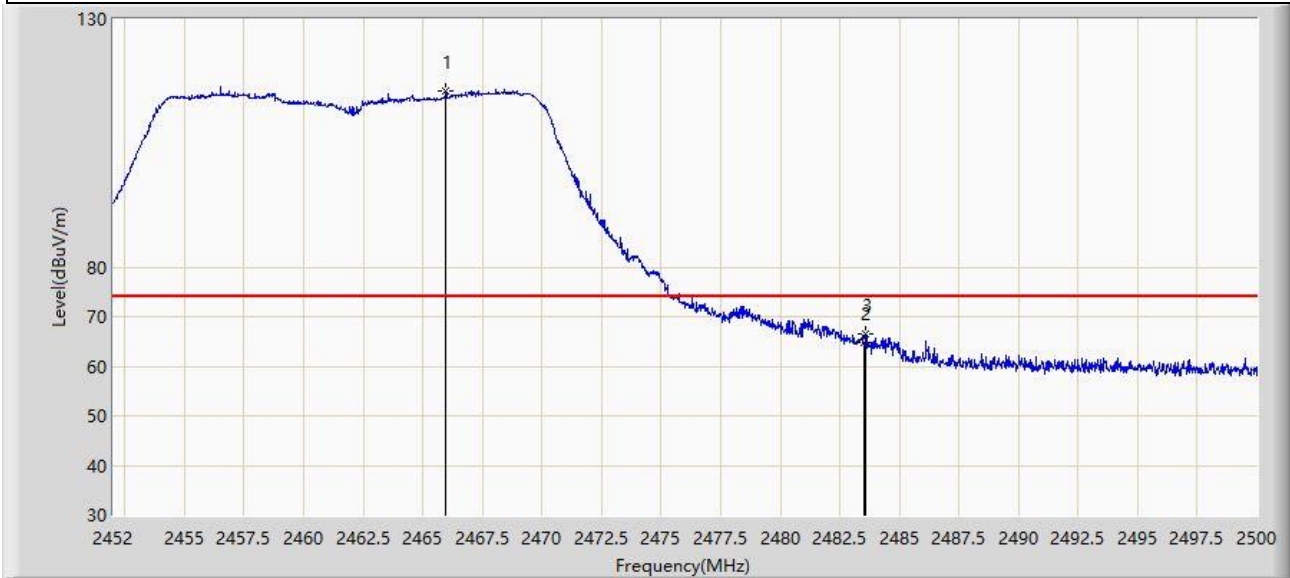


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2465.968	115.599	83.905	N/A	N/A	31.694	PK
2		2483.500	64.709	33.012	-9.291	74.000	31.696	PK
3	*	2483.608	66.476	34.779	-7.524	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

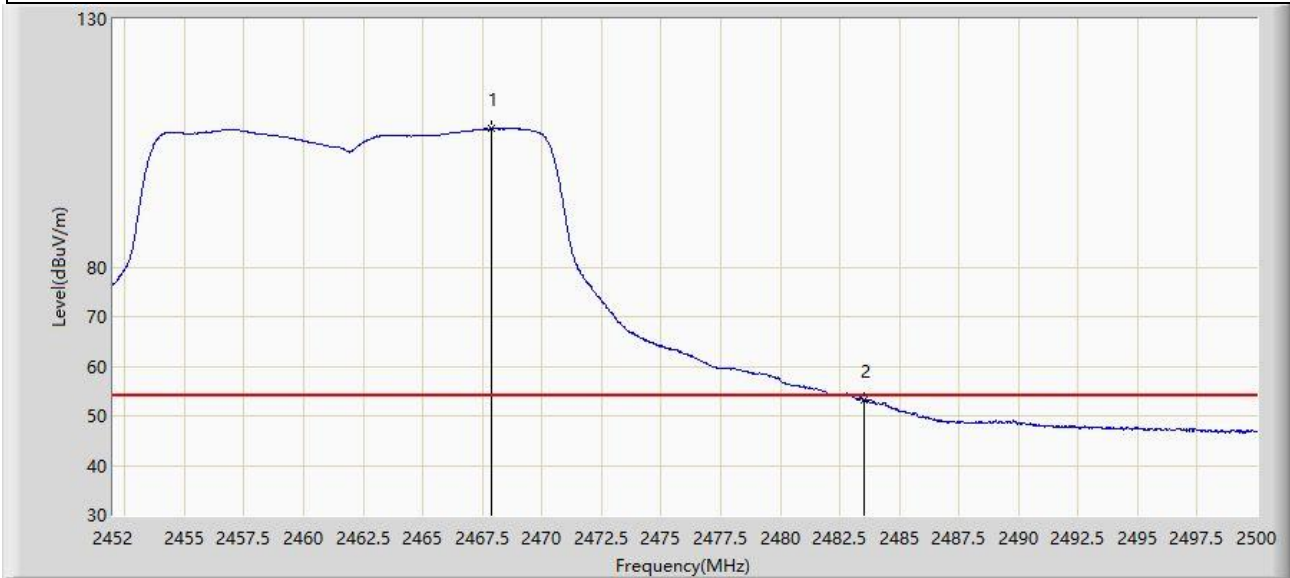


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.864	107.827	76.131	N/A	N/A	31.696	AV
2	*	2483.500	53.232	21.535	-0.768	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

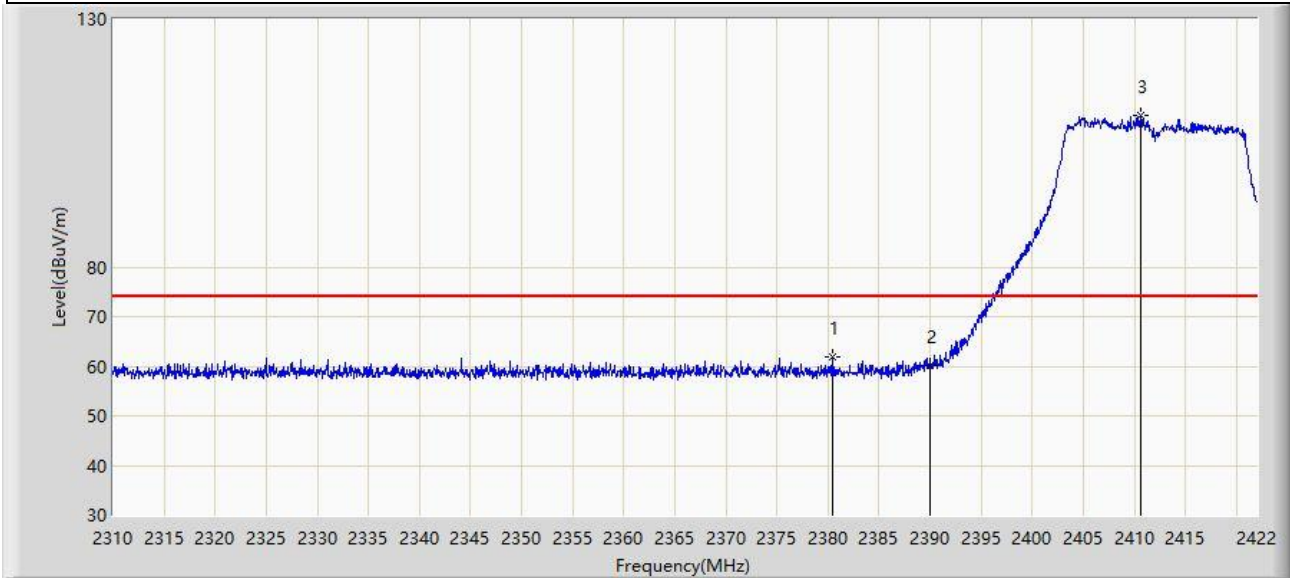


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.392	61.808	29.916	-12.192	74.000	31.892	PK
2		2390.000	60.207	28.354	-13.793	74.000	31.853	PK
3		2410.688	110.666	78.912	N/A	N/A	31.754	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

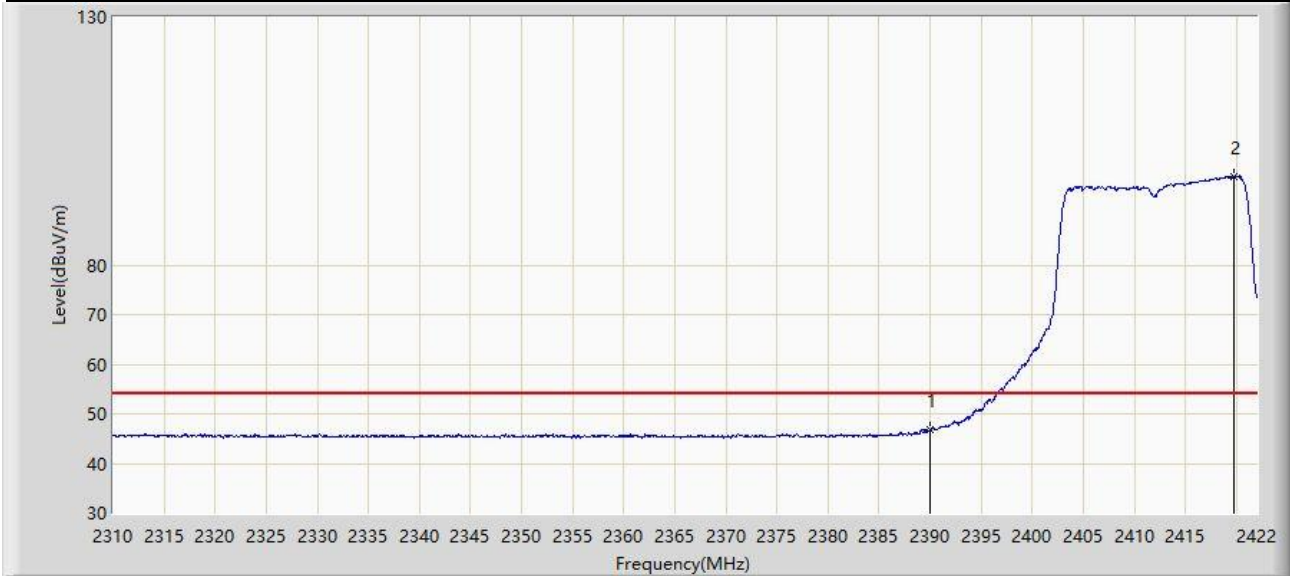


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	46.796	14.943	-7.204	54.000	31.853	AV
2		2419.816	97.865	66.139	N/A	N/A	31.726	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

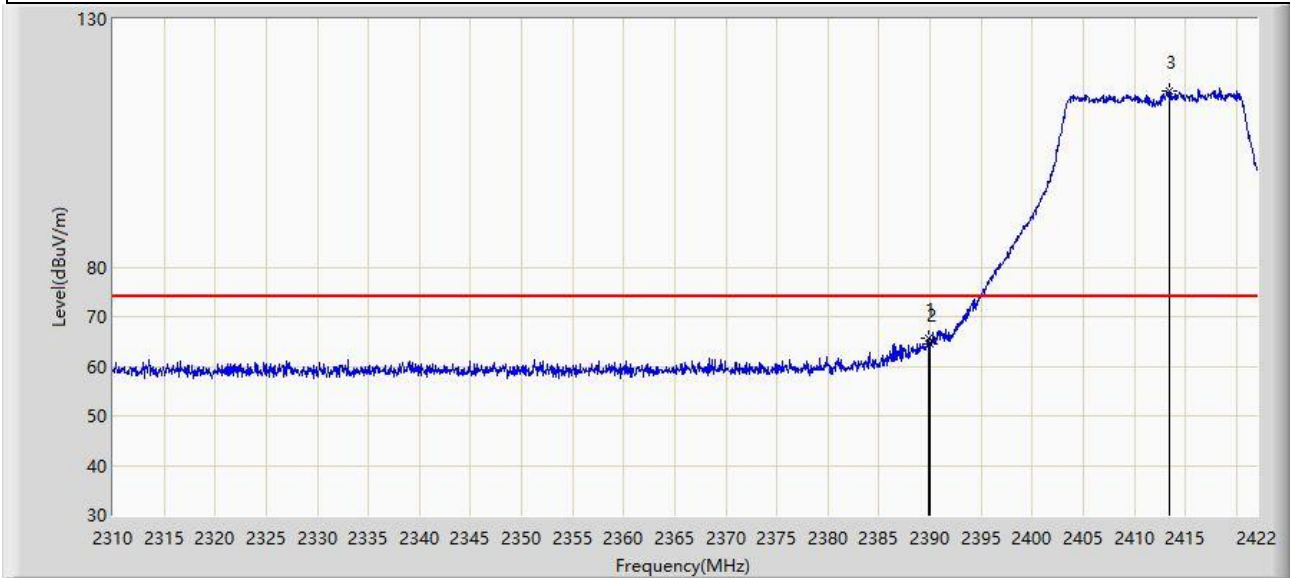


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	65.710	33.856	-8.290	74.000	31.854	PK
2		2390.000	64.573	32.720	-9.427	74.000	31.853	PK
3		2413.376	115.567	83.821	N/A	N/A	31.746	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

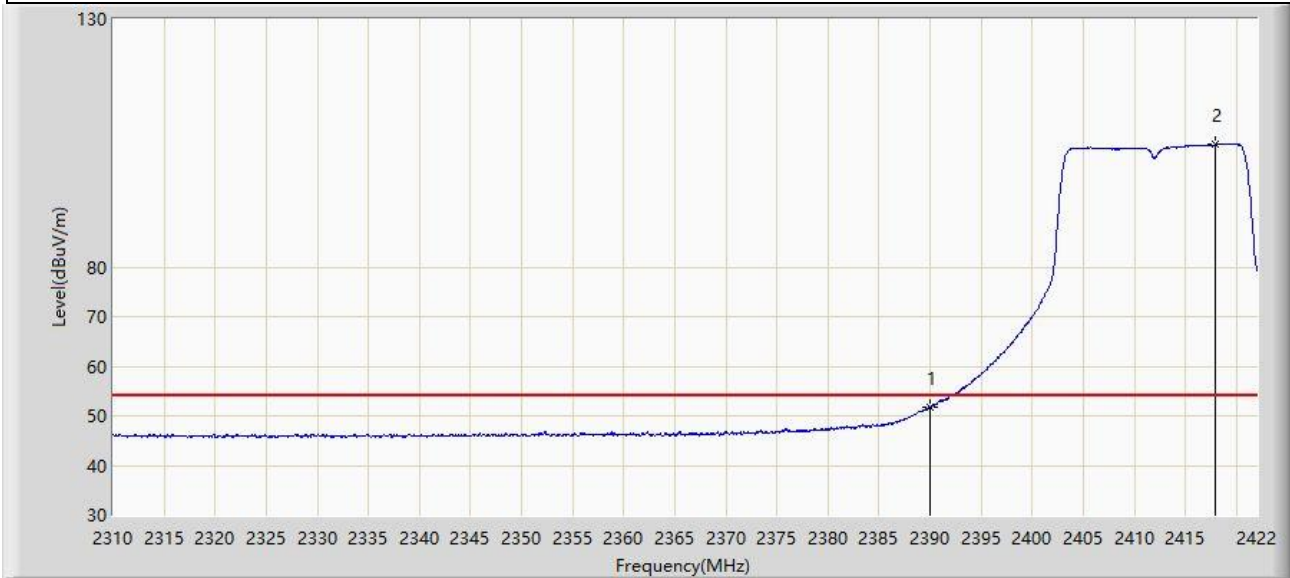


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	51.793	19.940	-2.207	54.000	31.853	AV
2		2417.968	104.721	72.990	N/A	N/A	31.731	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

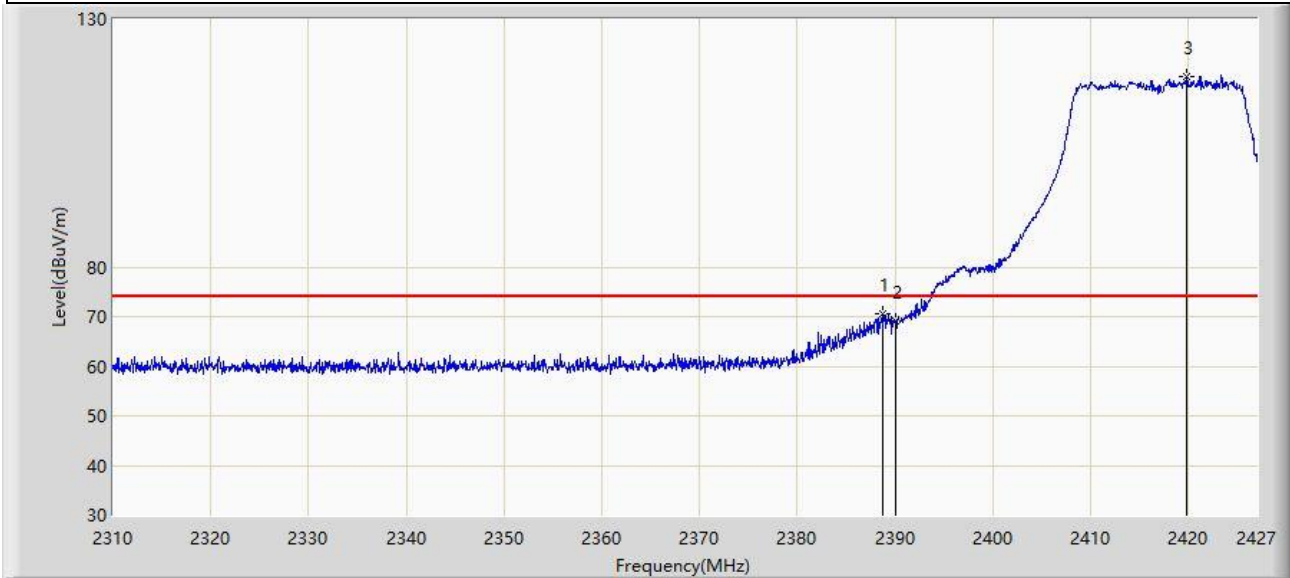


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.683	70.466	38.606	-3.534	74.000	31.860	PK
2		2390.000	69.008	37.155	-4.992	74.000	31.853	PK
3		2419.746	118.262	86.536	N/A	N/A	31.726	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

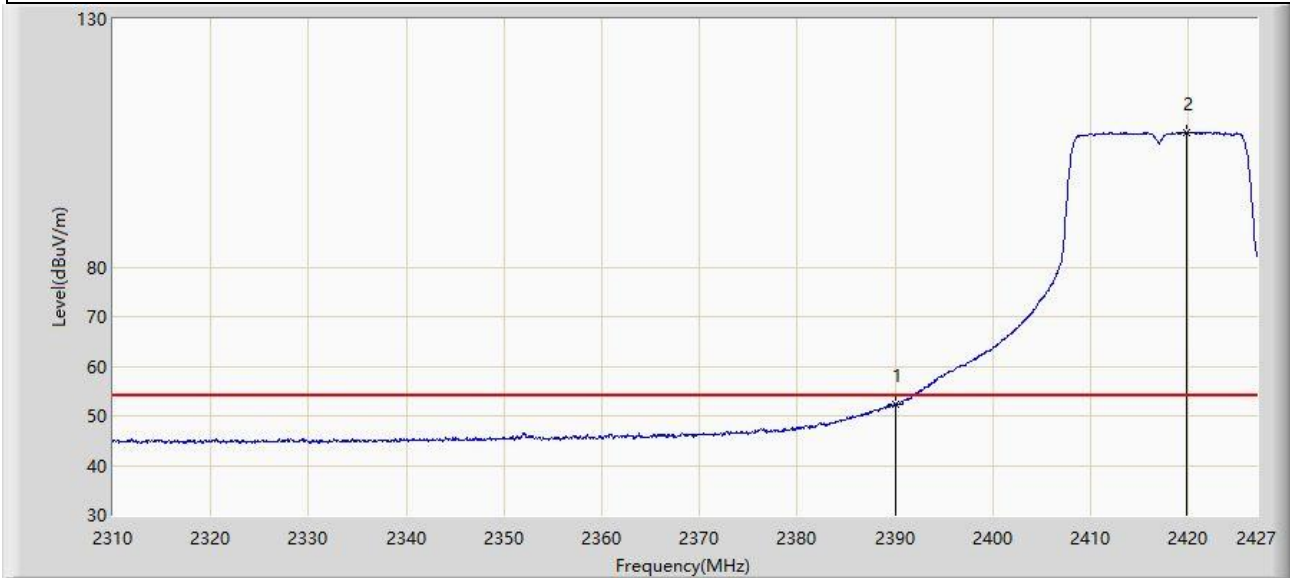


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.270	20.417	-1.730	54.000	31.853	AV
2		2419.863	107.176	75.451	N/A	N/A	31.725	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-19
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

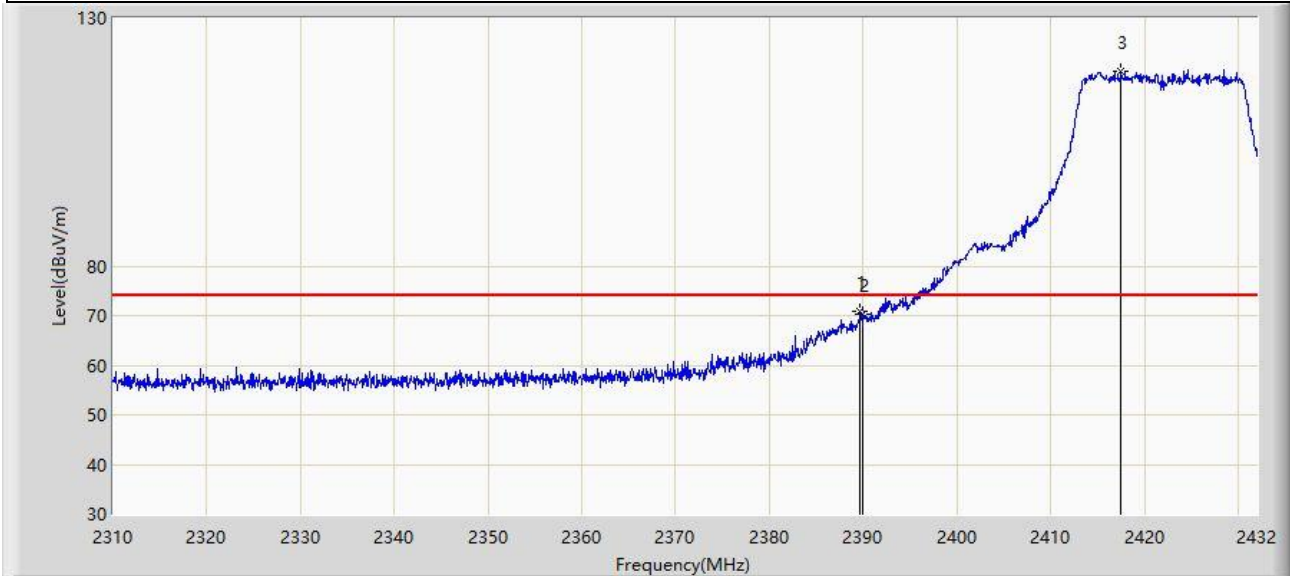


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.727	70.849	38.995	-3.151	74.000	31.855	PK
2		2390.000	70.208	38.355	-3.792	74.000	31.853	PK
3		2417.482	119.300	87.567	N/A	N/A	31.733	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-19
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2422MHz	

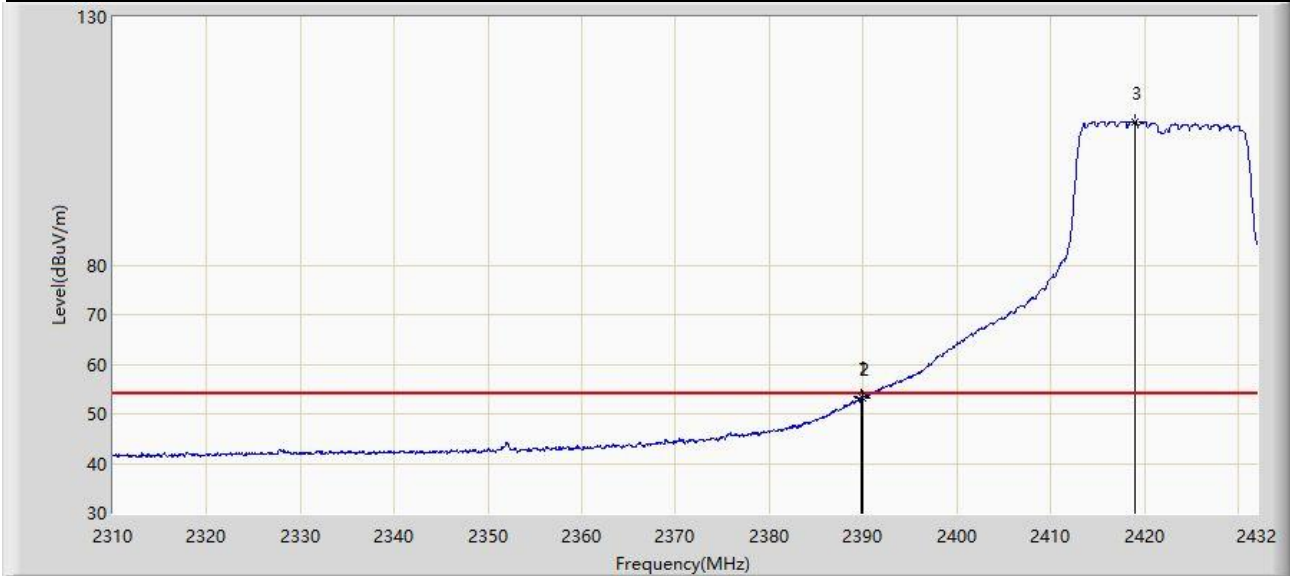


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.849	53.348	21.494	-0.652	54.000	31.853	AV
2		2390.000	53.263	21.410	-0.737	54.000	31.853	AV
3		2419.007	108.900	77.172	N/A	N/A	31.728	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

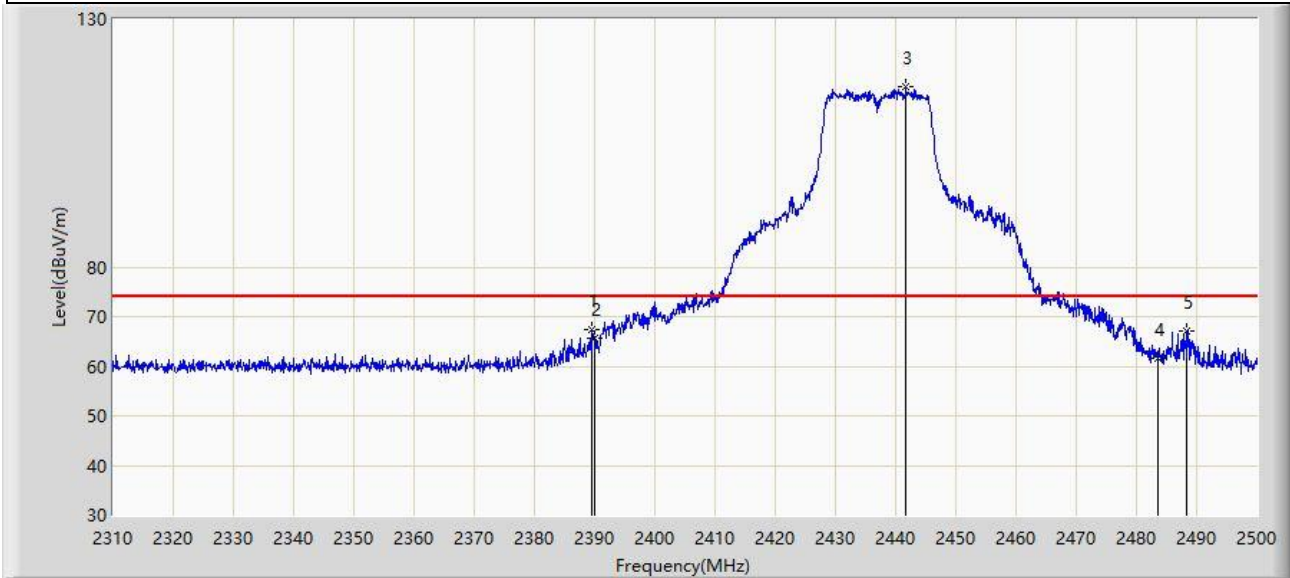


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.420	67.505	35.649	-6.495	74.000	31.856	PK
2		2390.000	65.583	33.730	-8.417	74.000	31.853	PK
3		2441.765	116.247	84.533	N/A	N/A	31.714	PK
4		2483.500	61.520	29.823	-12.480	74.000	31.696	PK
5		2488.315	67.181	35.487	-6.819	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

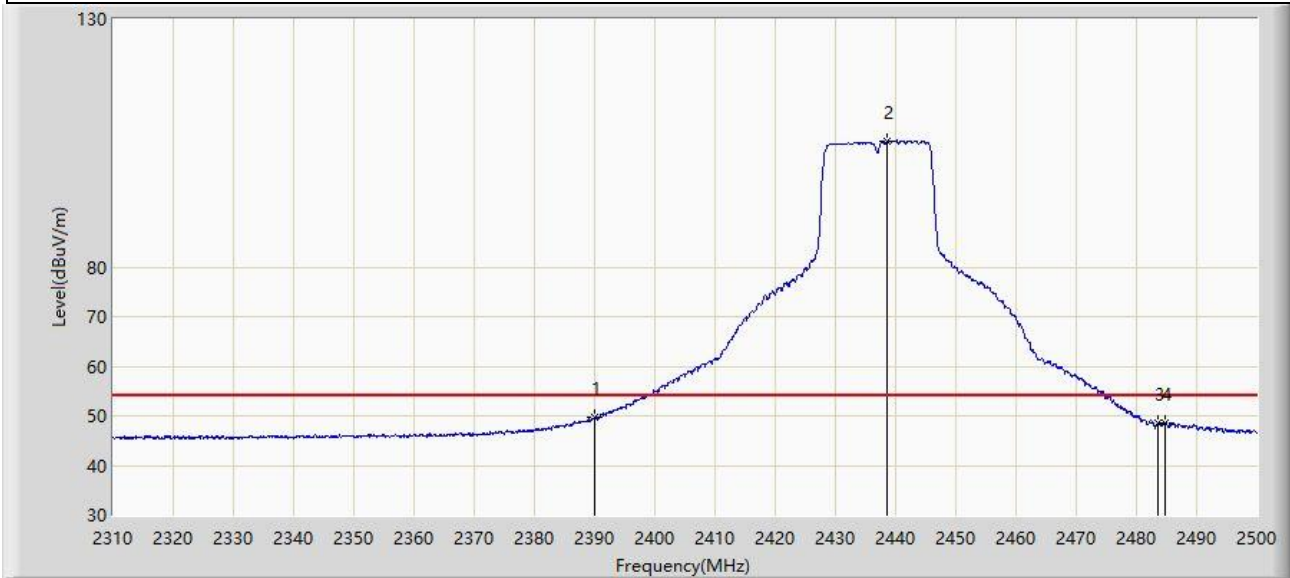


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.688	17.835	-4.312	54.000	31.853	AV
2		2438.535	105.318	73.600	N/A	N/A	31.718	AV
3		2483.500	48.519	16.822	-5.481	54.000	31.696	AV
4		2484.705	48.614	16.918	-5.386	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

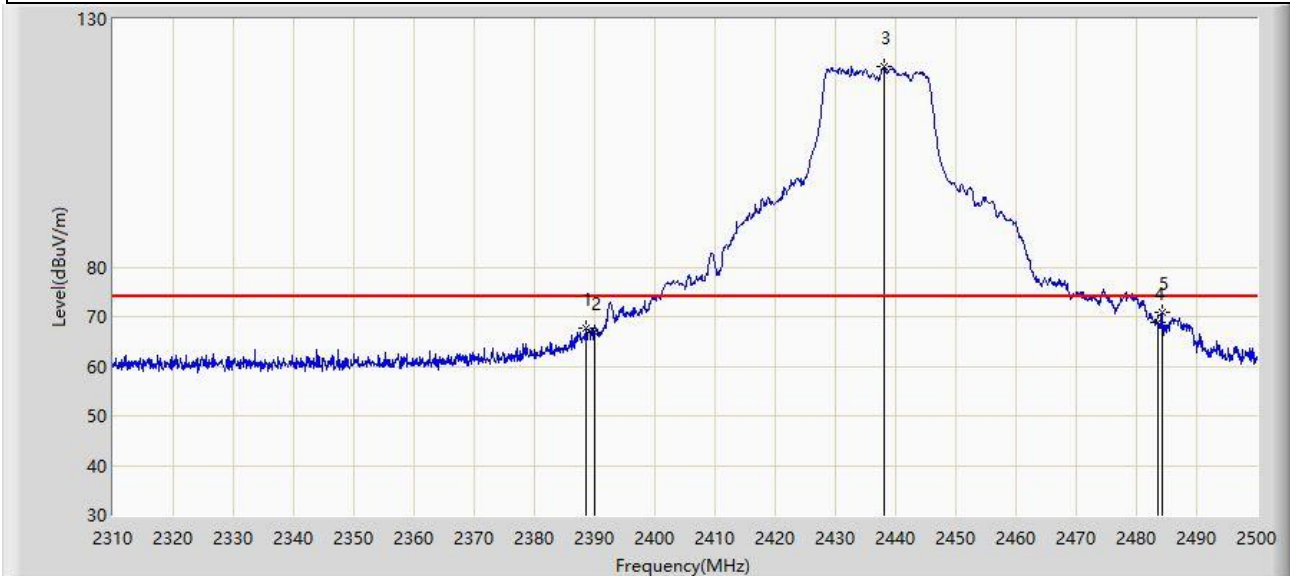


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2388.470	67.542	35.681	-6.458	74.000	31.862	PK
2		2390.000	66.944	35.091	-7.056	74.000	31.853	PK
3		2438.155	120.338	88.620	N/A	N/A	31.718	PK
4		2483.500	68.777	37.080	-5.223	74.000	31.696	PK
5	*	2484.230	70.848	39.151	-3.152	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

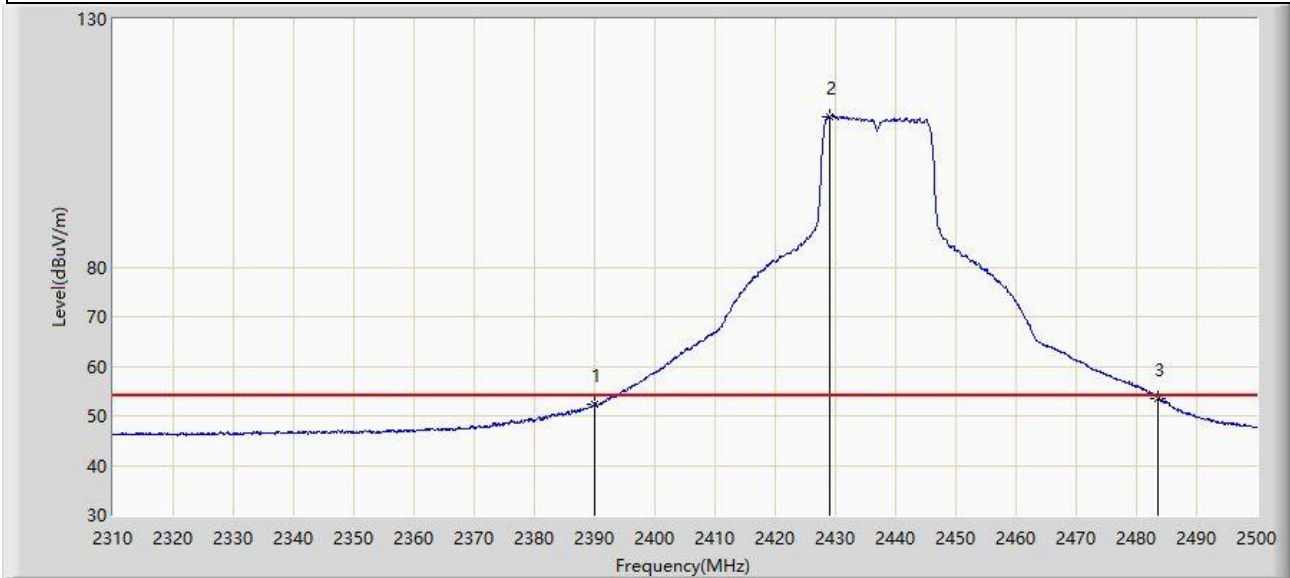


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	52.403	20.550	-1.597	54.000	31.853	AV
2		2429.130	110.336	78.618	N/A	N/A	31.719	AV
3	*	2483.500	53.572	21.875	-0.428	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

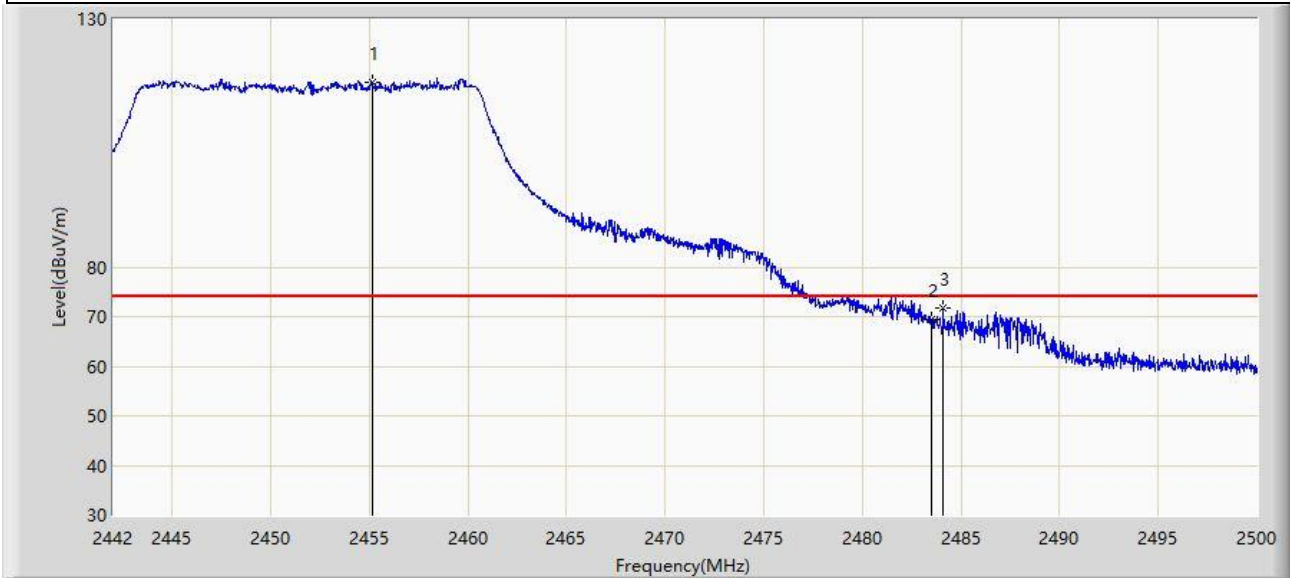


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.166	117.115	85.422	N/A	N/A	31.693	PK
2		2483.500	69.512	37.815	-4.488	74.000	31.696	PK
3	*	2484.108	71.639	39.942	-2.361	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2452MHz	

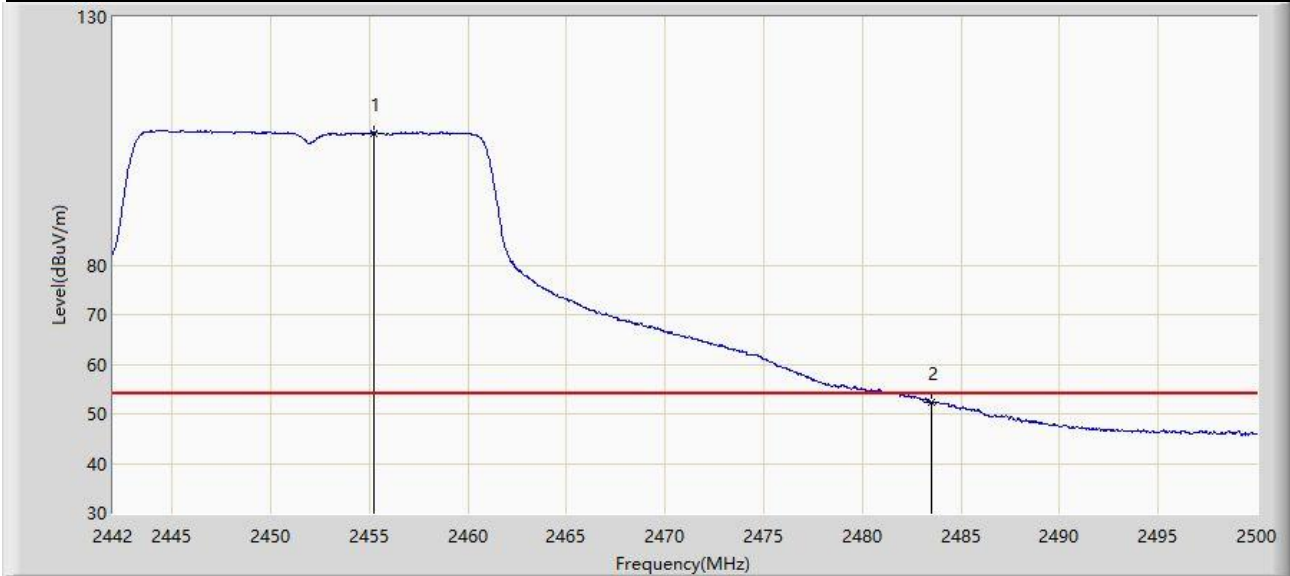


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.224	106.652	74.959	N/A	N/A	31.693	AV
2	*	2483.500	52.313	20.616	-1.687	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

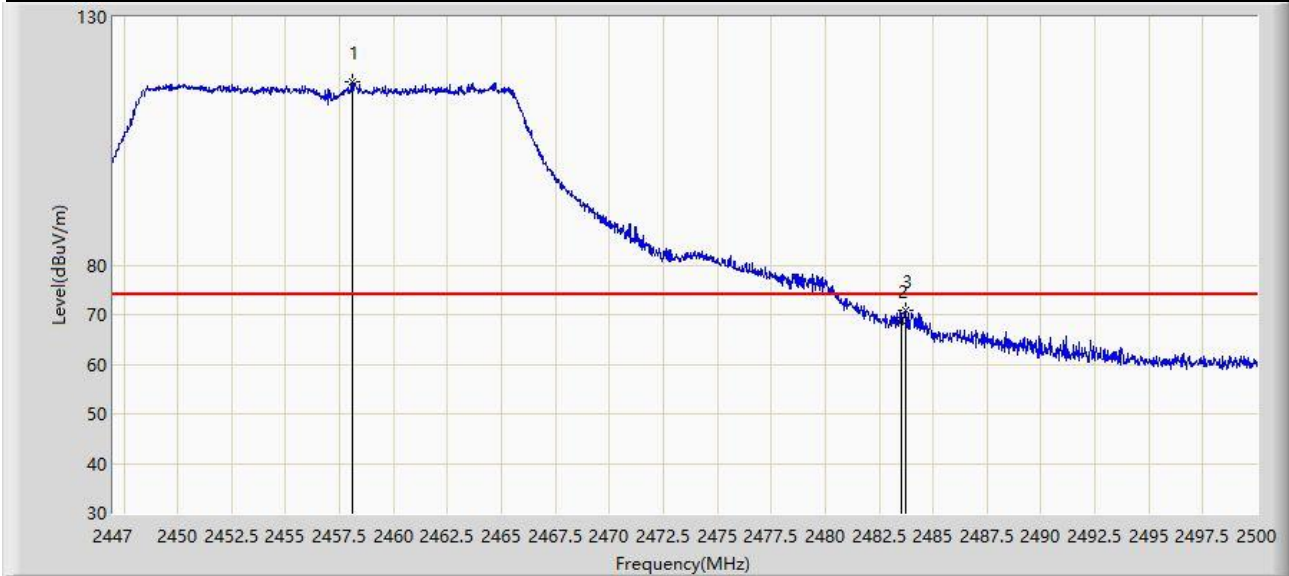


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.077	117.018	85.327	N/A	N/A	31.691	PK
2		2483.500	68.768	37.071	-5.232	74.000	31.696	PK
3	*	2483.702	70.842	39.145	-3.158	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

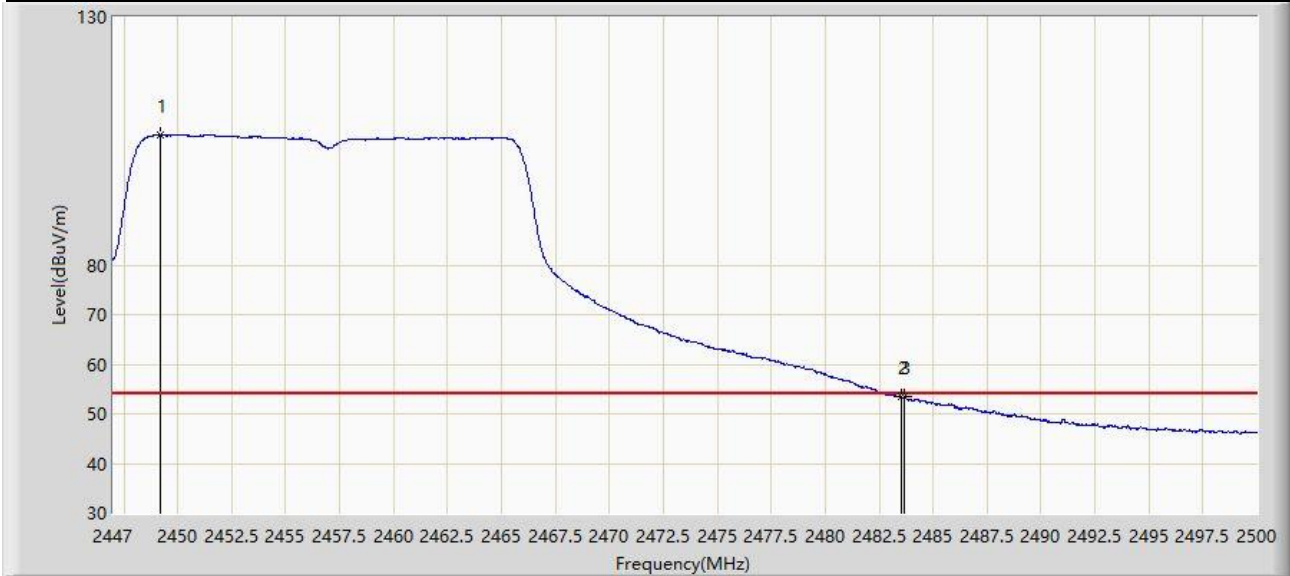


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.173	106.268	74.565	N/A	N/A	31.703	AV
2		2483.500	53.364	21.667	-0.636	54.000	31.696	AV
3	*	2483.676	53.534	21.837	-0.466	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

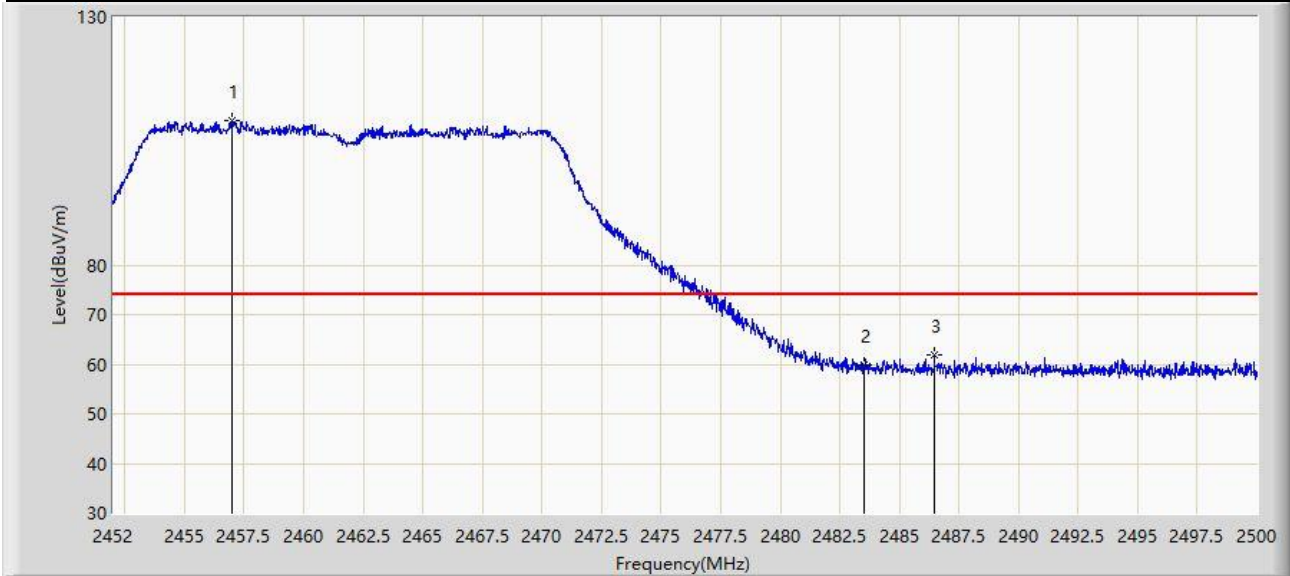


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.968	109.119	77.428	N/A	N/A	31.691	PK
2		2483.500	59.762	28.065	-14.238	74.000	31.696	PK
3	*	2486.464	62.022	30.327	-11.978	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

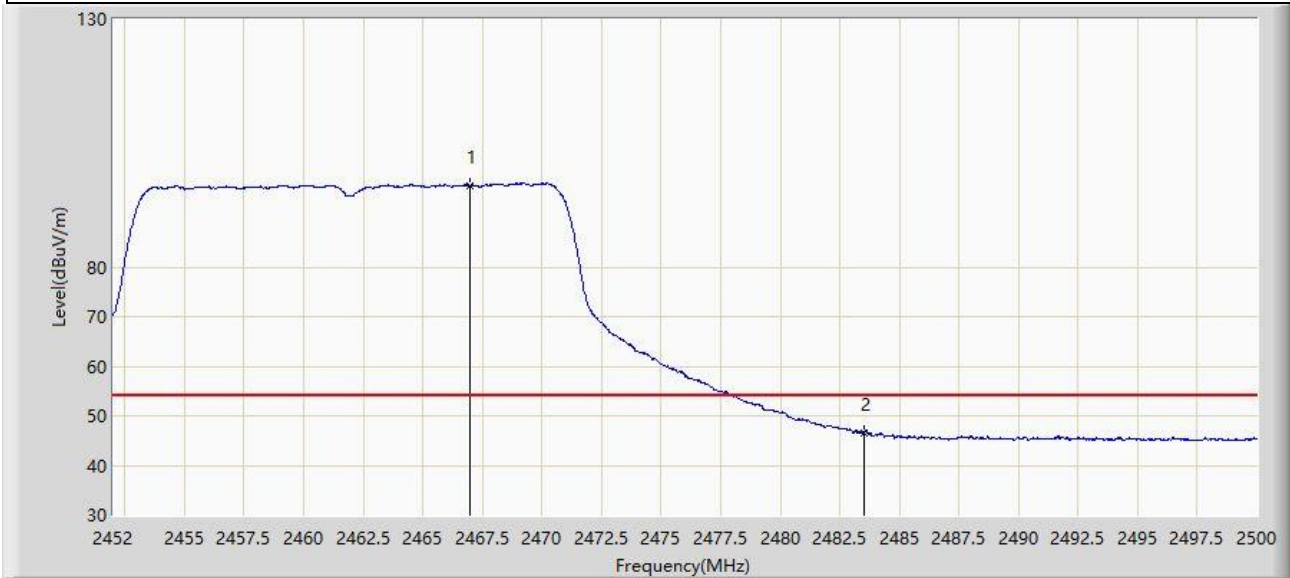


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2466.976	96.462	64.767	N/A	N/A	31.695	AV
2	*	2483.500	46.594	14.897	-7.406	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

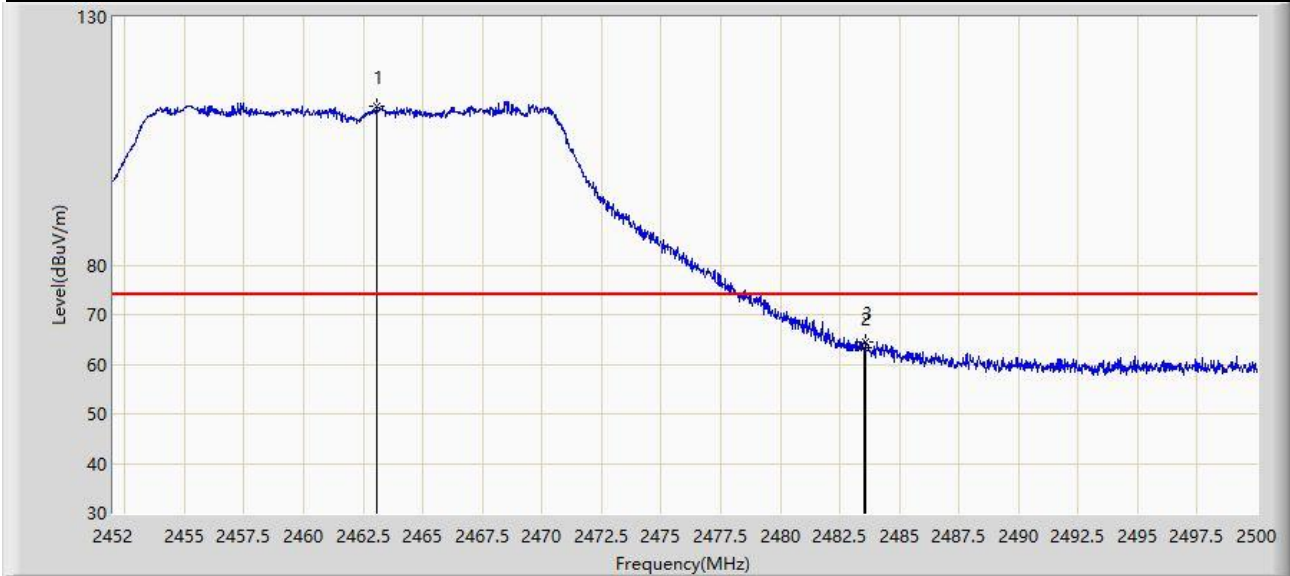


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2463.040	112.022	80.332	N/A	N/A	31.690	PK
2		2483.500	63.192	31.495	-10.808	74.000	31.696	PK
3	*	2483.584	64.620	32.923	-9.380	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

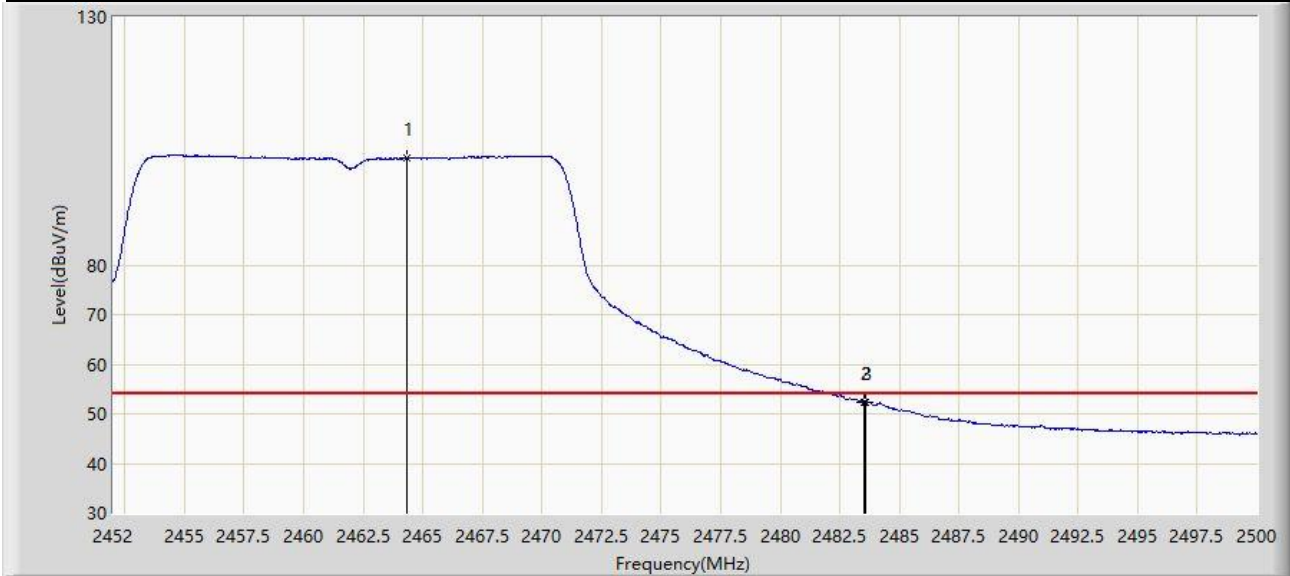


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.336	101.613	69.921	N/A	N/A	31.692	AV
2		2483.500	52.376	20.679	-1.624	54.000	31.696	AV
3	*	2483.608	52.458	20.761	-1.542	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

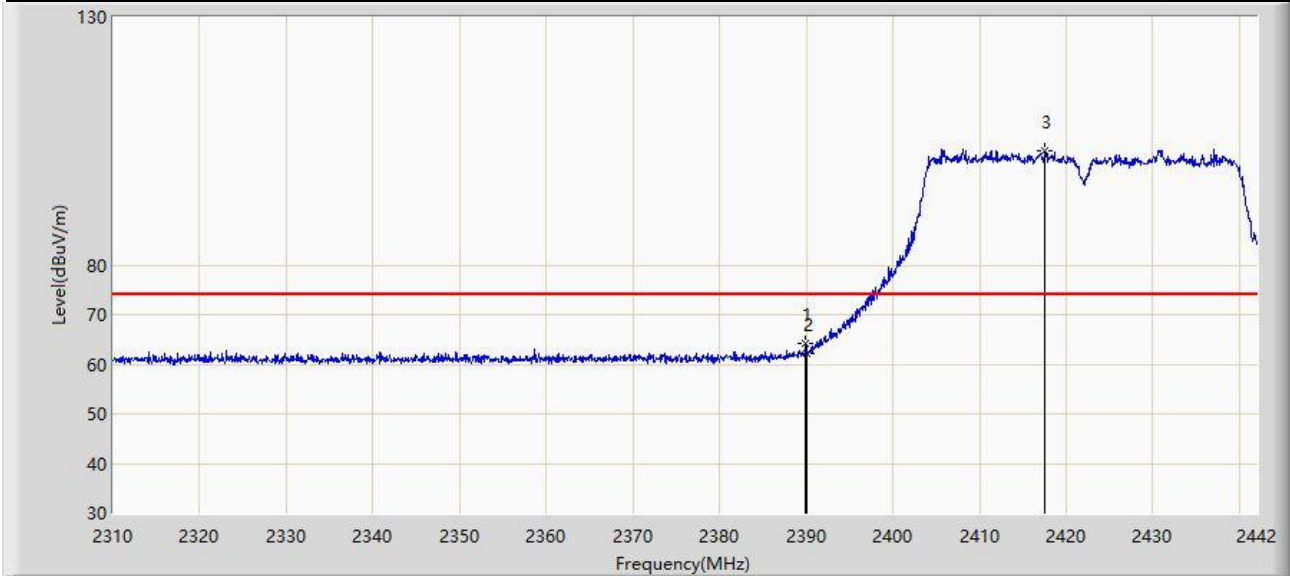


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	64.156	32.303	-9.844	74.000	31.853	PK
2		2390.000	62.053	30.200	-11.947	74.000	31.853	PK
3		2417.580	102.942	71.209	N/A	N/A	31.732	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

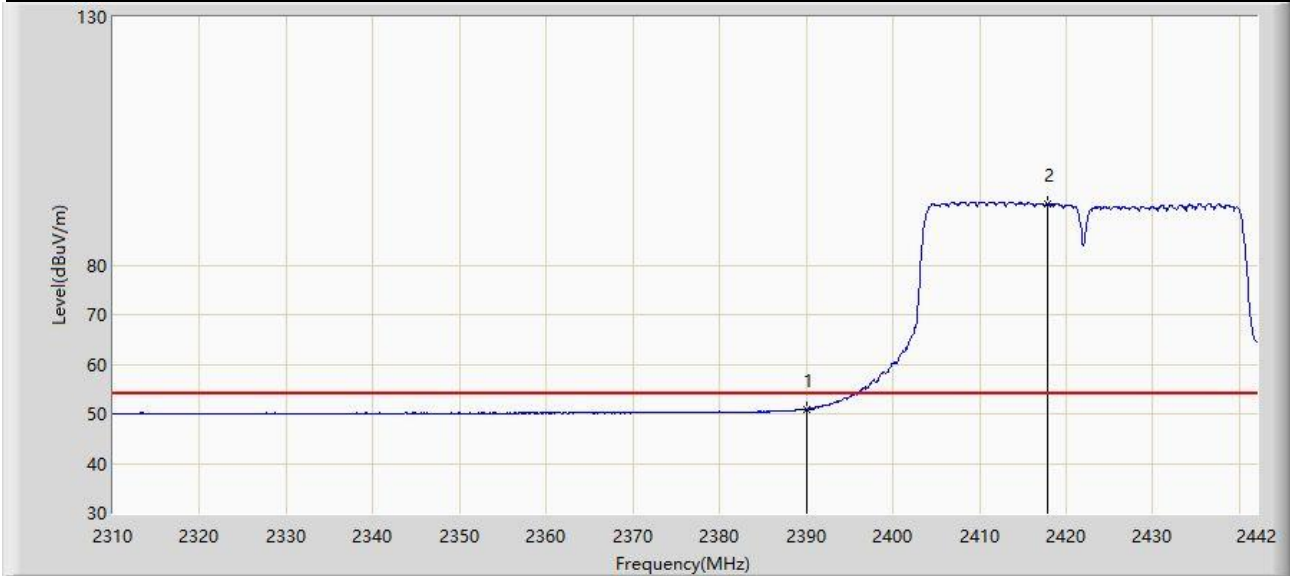


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	50.958	19.105	-3.042	54.000	31.853	AV
2		2417.910	92.297	60.565	N/A	N/A	31.731	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

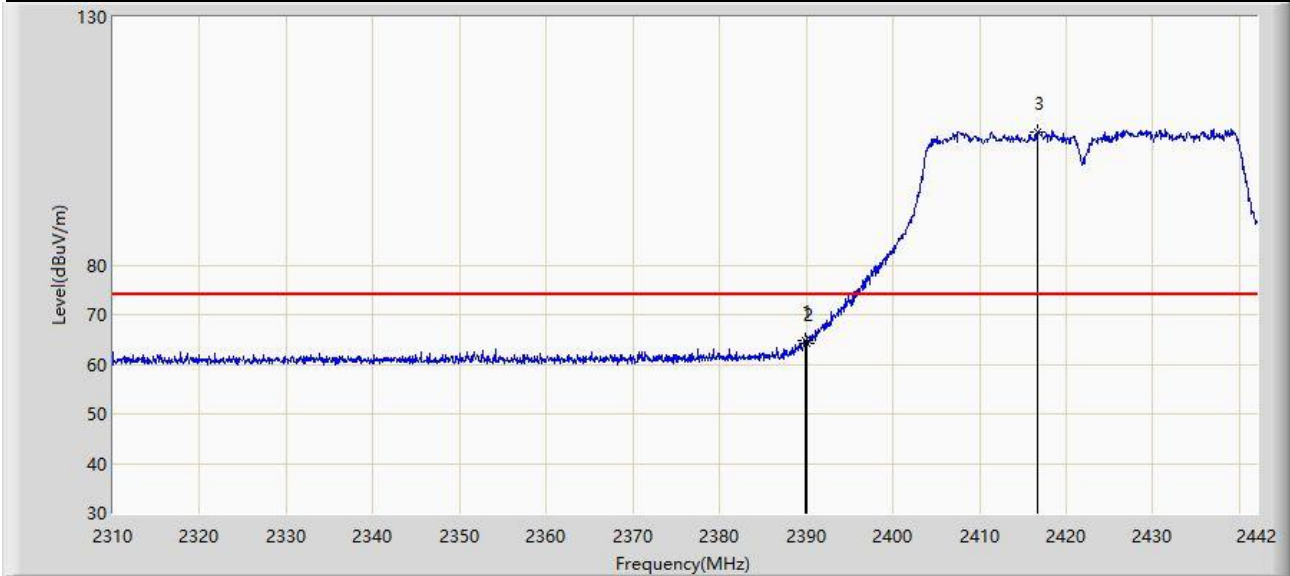


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.860	64.802	32.948	-9.198	74.000	31.853	PK
2		2390.000	64.299	32.446	-9.701	74.000	31.853	PK
3		2416.722	106.923	75.188	N/A	N/A	31.735	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

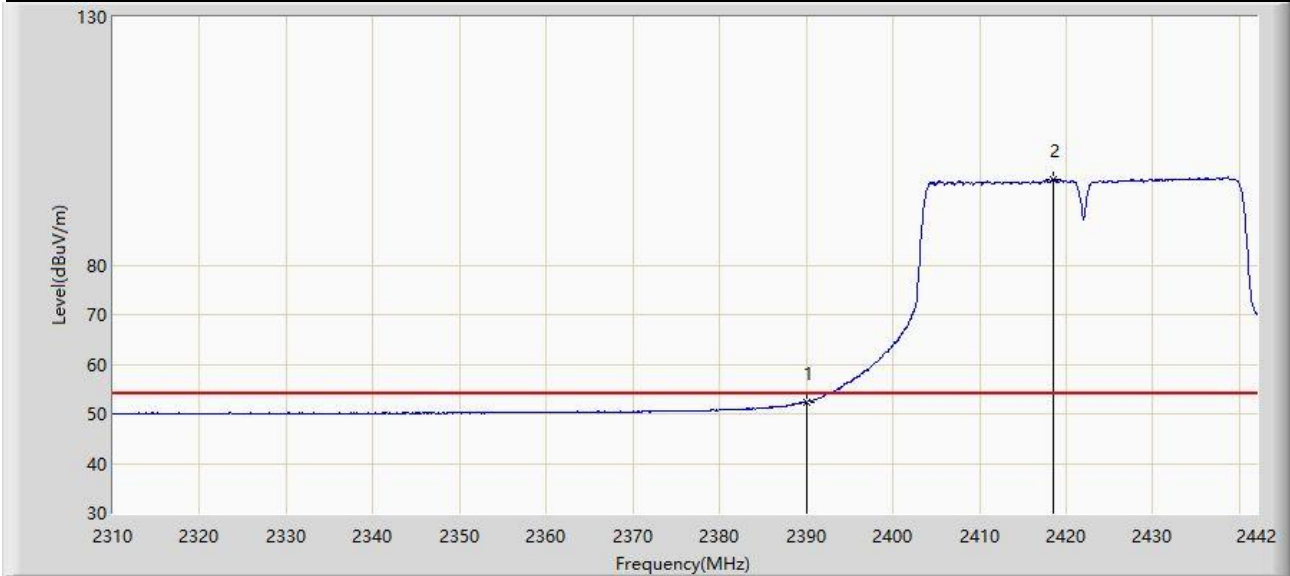


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.383	20.530	-1.617	54.000	31.853	AV
2		2418.438	97.342	65.612	N/A	N/A	31.730	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

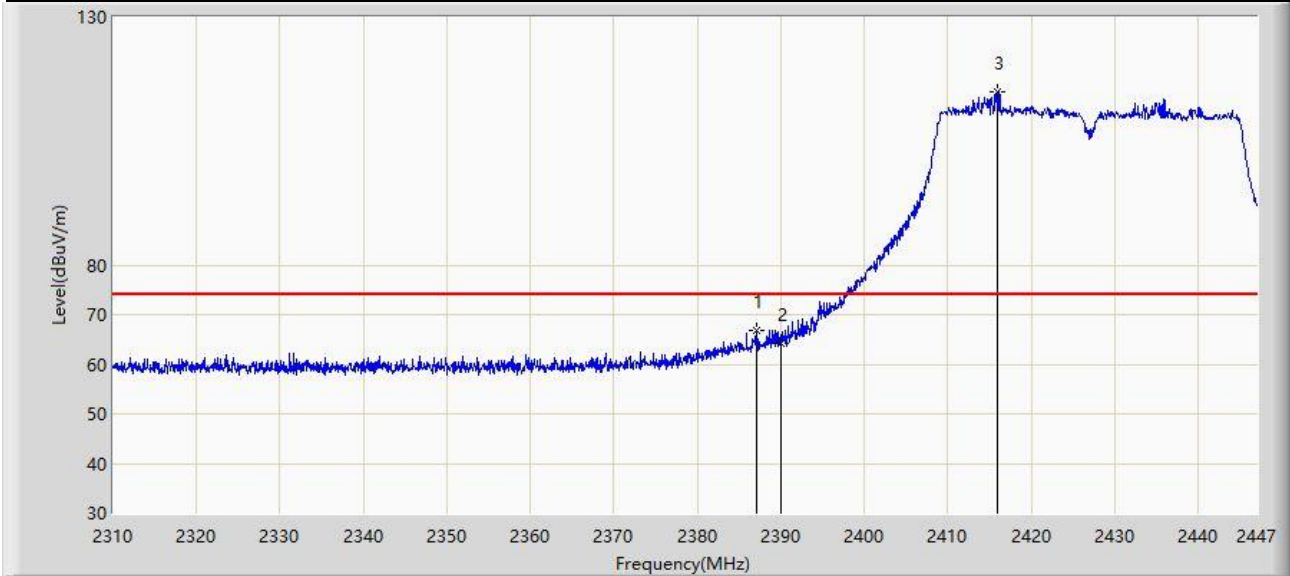


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.062	66.688	34.819	-7.312	74.000	31.870	PK
2		2390.000	64.177	32.324	-9.823	74.000	31.853	PK
3		2415.969	114.947	83.209	N/A	N/A	31.738	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

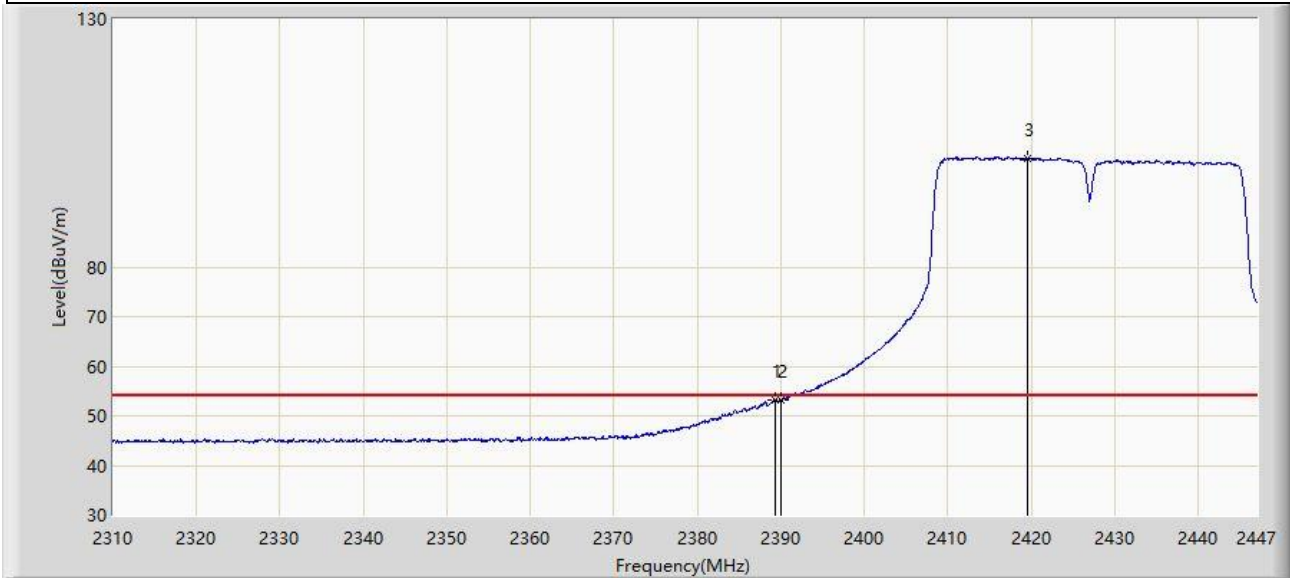


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.323	53.238	21.381	-0.762	54.000	31.857	AV
2		2390.000	53.101	21.248	-0.899	54.000	31.853	AV
3		2419.463	101.942	70.215	N/A	N/A	31.727	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

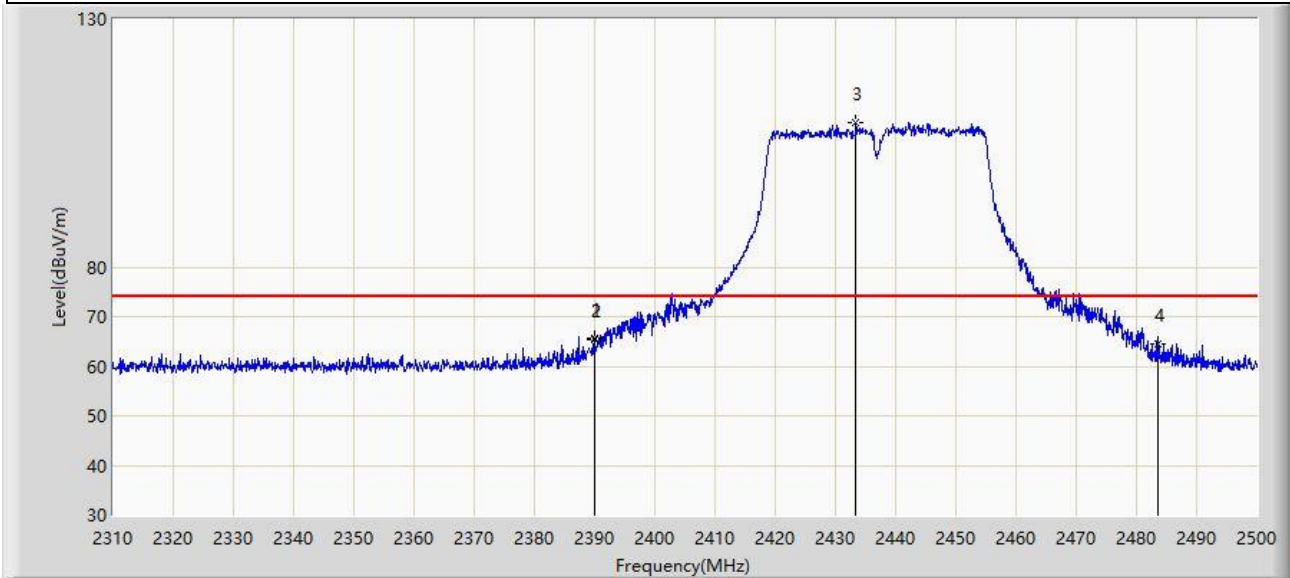


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.990	65.584	33.731	-8.416	74.000	31.853	PK
2		2390.000	65.383	33.530	-8.617	74.000	31.853	PK
3		2433.405	109.055	77.337	N/A	N/A	31.719	PK
4		2483.500	64.405	32.708	-9.595	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

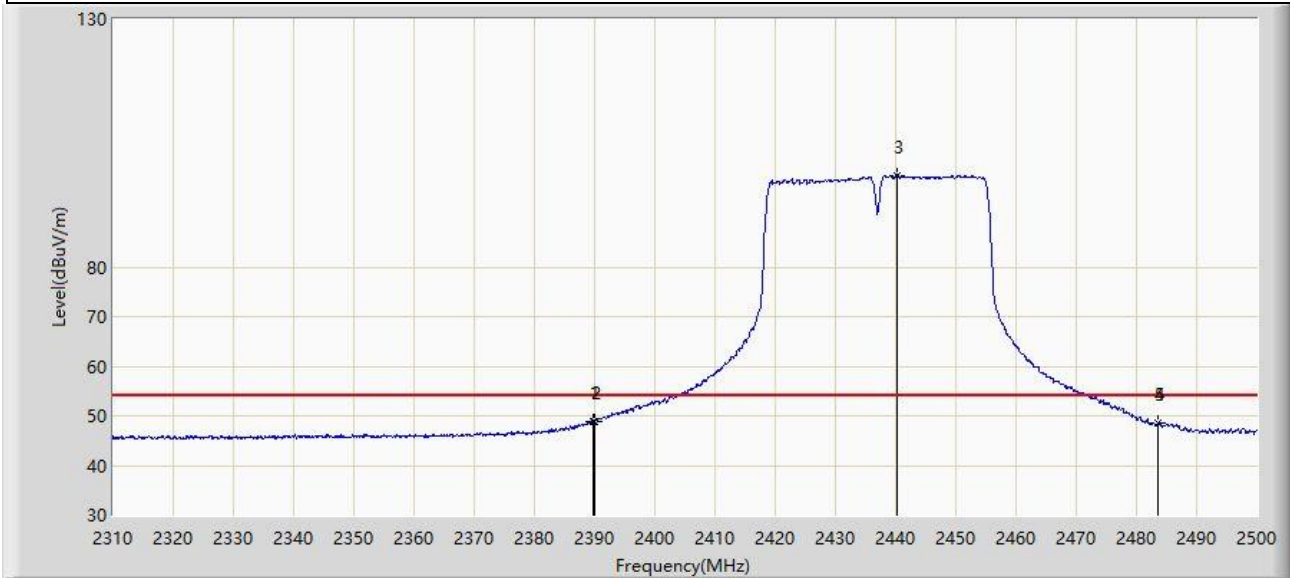


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	48.952	17.098	-5.048	54.000	31.854	AV
2		2390.000	48.861	17.008	-5.139	54.000	31.853	AV
3		2440.245	98.530	66.814	N/A	N/A	31.715	AV
4		2483.500	48.453	16.756	-5.547	54.000	31.696	AV
5		2483.565	48.605	16.908	-5.395	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

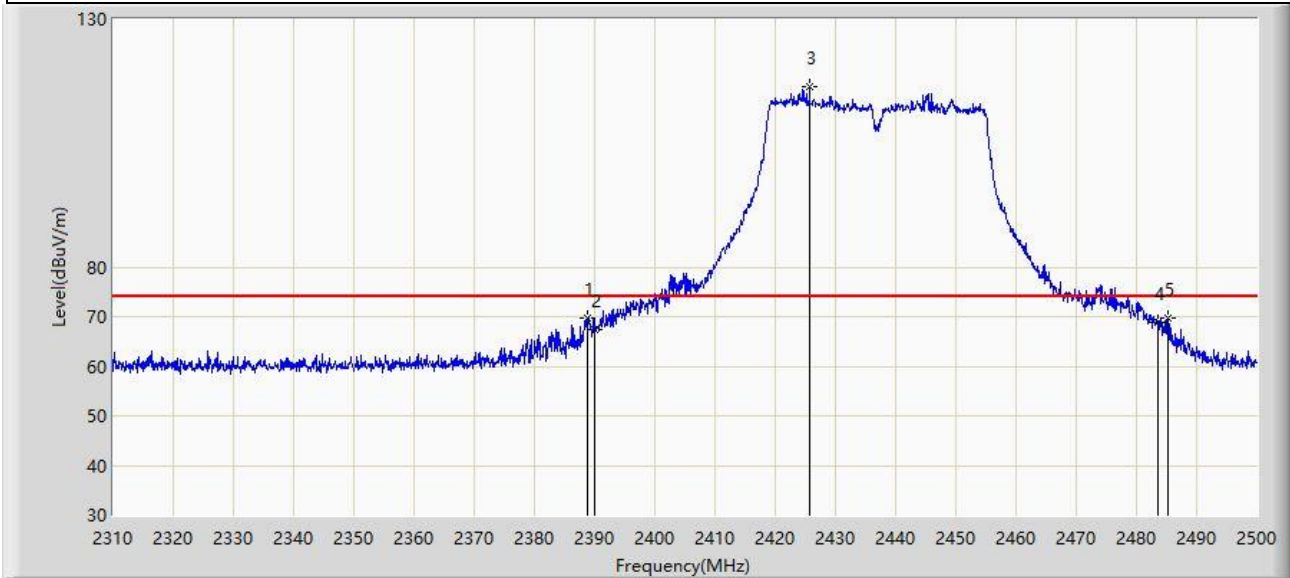


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.850	69.841	37.982	-4.159	74.000	31.860	PK
2		2390.000	67.453	35.600	-6.547	74.000	31.853	PK
3		2425.710	116.444	84.724	N/A	N/A	31.720	PK
4		2483.500	68.707	37.010	-5.293	74.000	31.696	PK
5		2485.180	69.662	37.966	-4.338	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

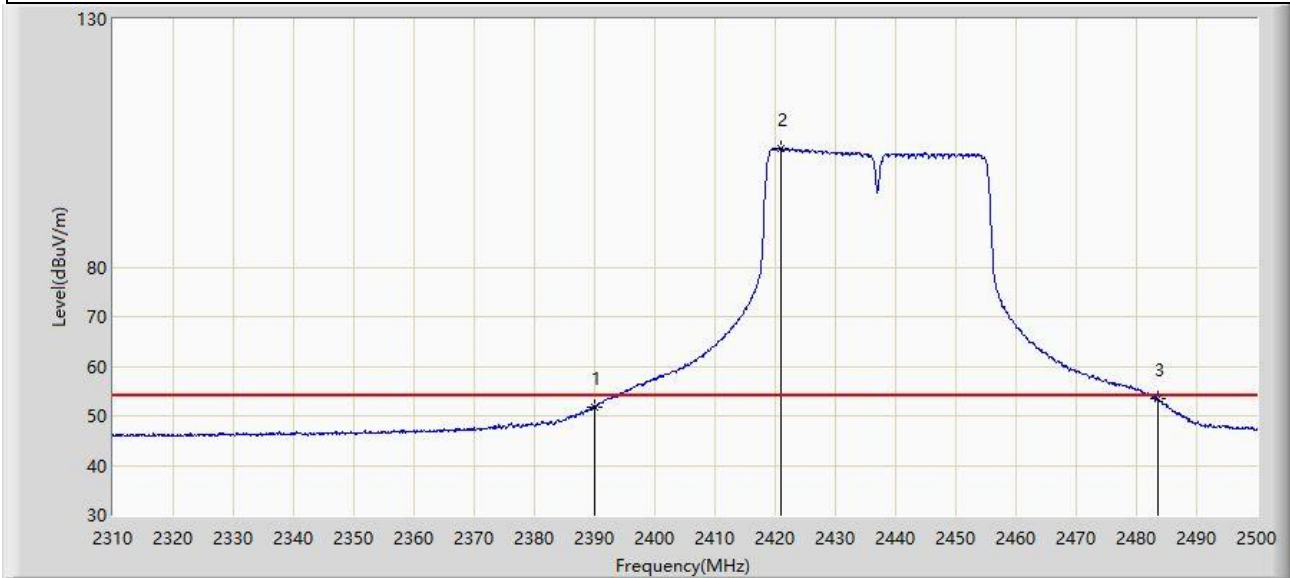


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	51.774	19.921	-2.226	54.000	31.853	AV
2		2420.960	103.863	72.139	N/A	N/A	31.724	AV
3	*	2483.500	53.419	21.722	-0.581	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

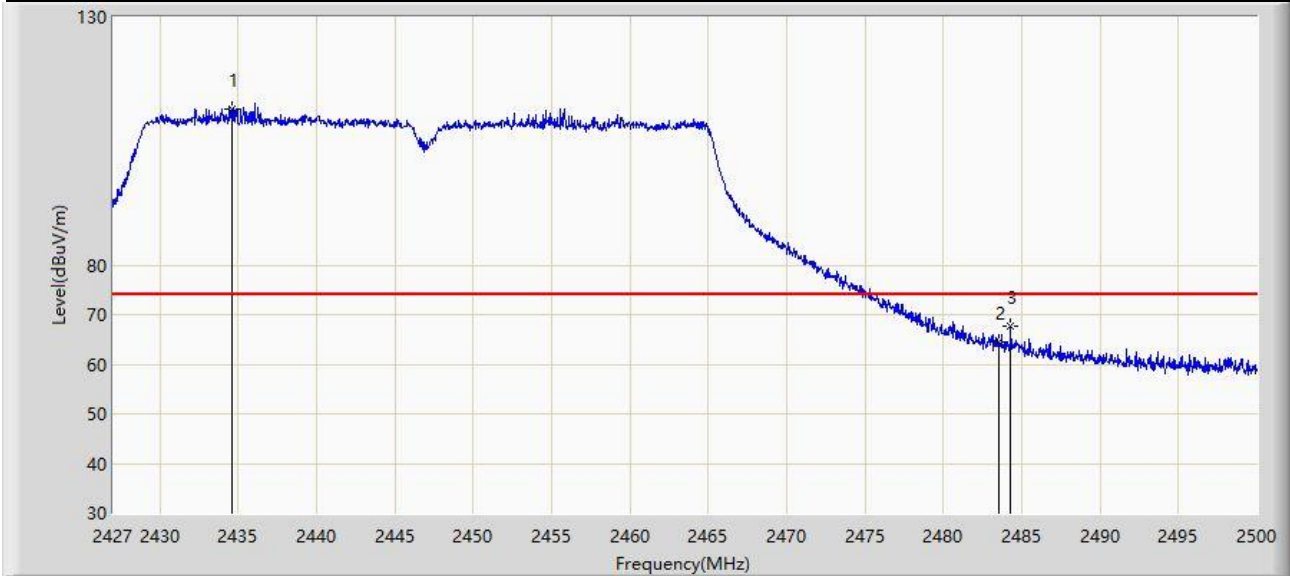

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2434.628	111.586	79.868	N/A	N/A	31.718	PK
2		2483.500	64.532	32.835	-9.468	74.000	31.696	PK
3	*	2484.305	67.642	35.945	-6.358	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2439.666	99.748	68.032	N/A	N/A	31.716	AV
2	*	2483.500	52.630	20.933	-1.370	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

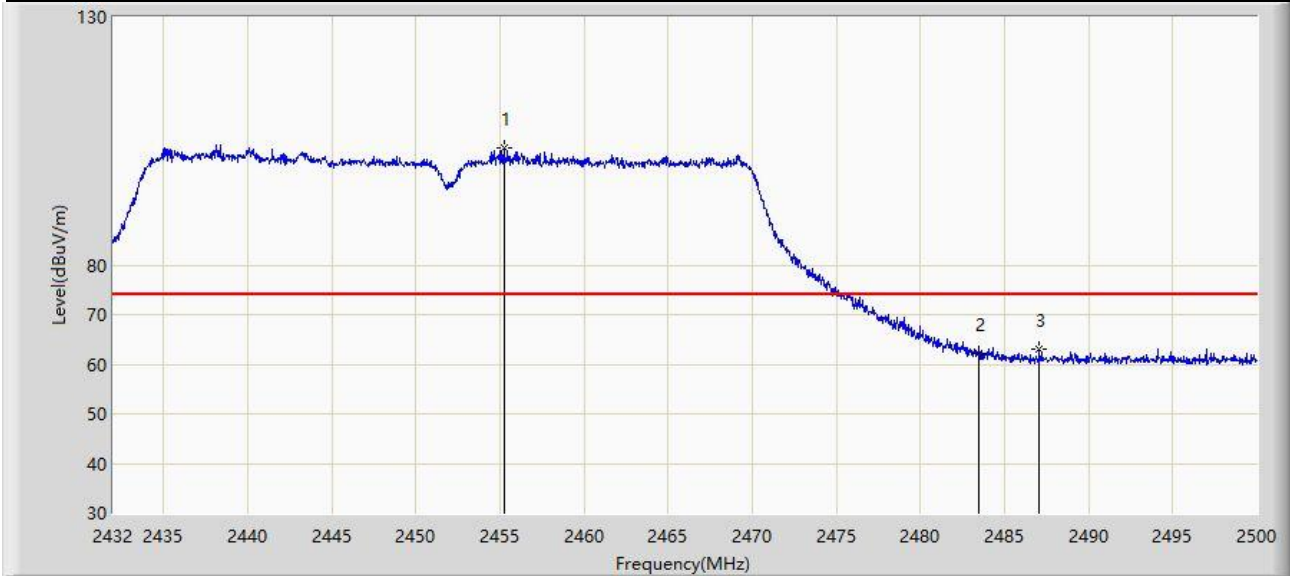


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.222	103.521	71.828	N/A	N/A	31.693	PK
2		2483.500	62.106	30.409	-11.894	74.000	31.696	PK
3	*	2487.080	62.917	31.222	-11.083	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

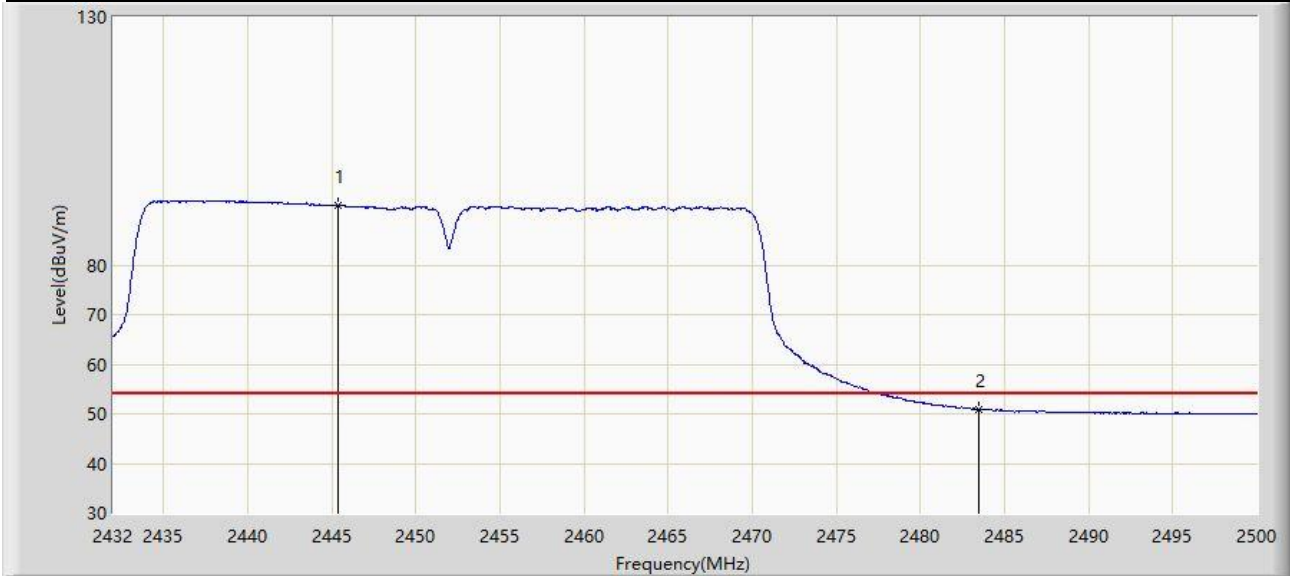


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.396	92.052	60.343	N/A	N/A	31.709	AV
2	*	2483.500	50.944	19.247	-3.056	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

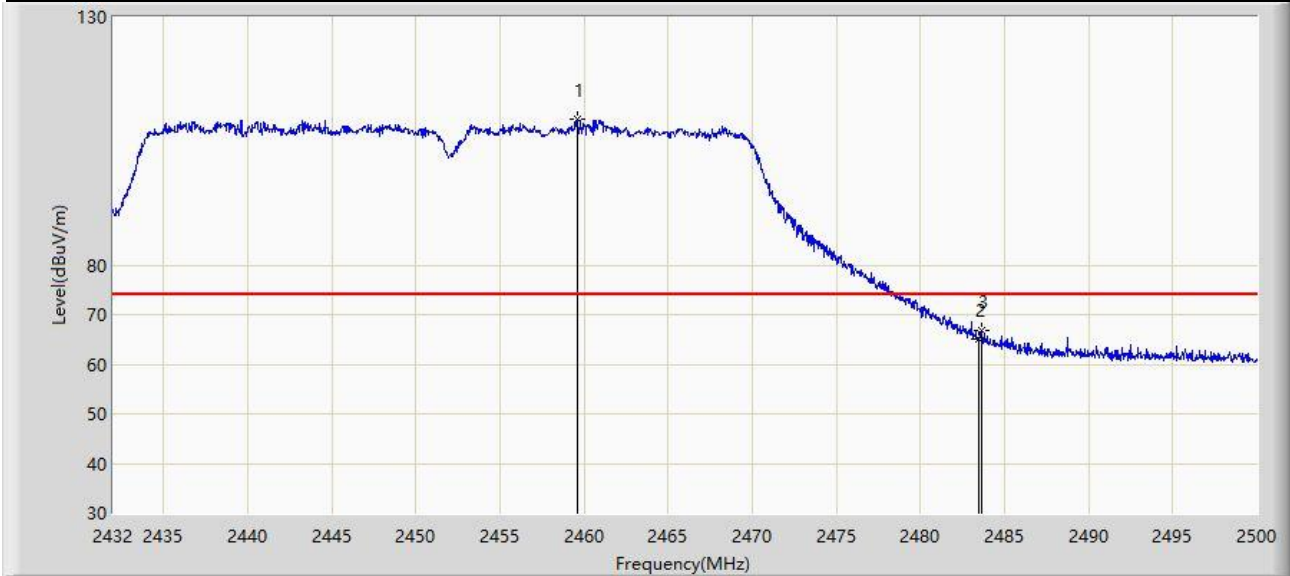


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.608	109.376	77.686	N/A	N/A	31.690	PK
2		2483.500	65.014	33.317	-8.986	74.000	31.696	PK
3	*	2483.646	66.731	35.034	-7.269	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

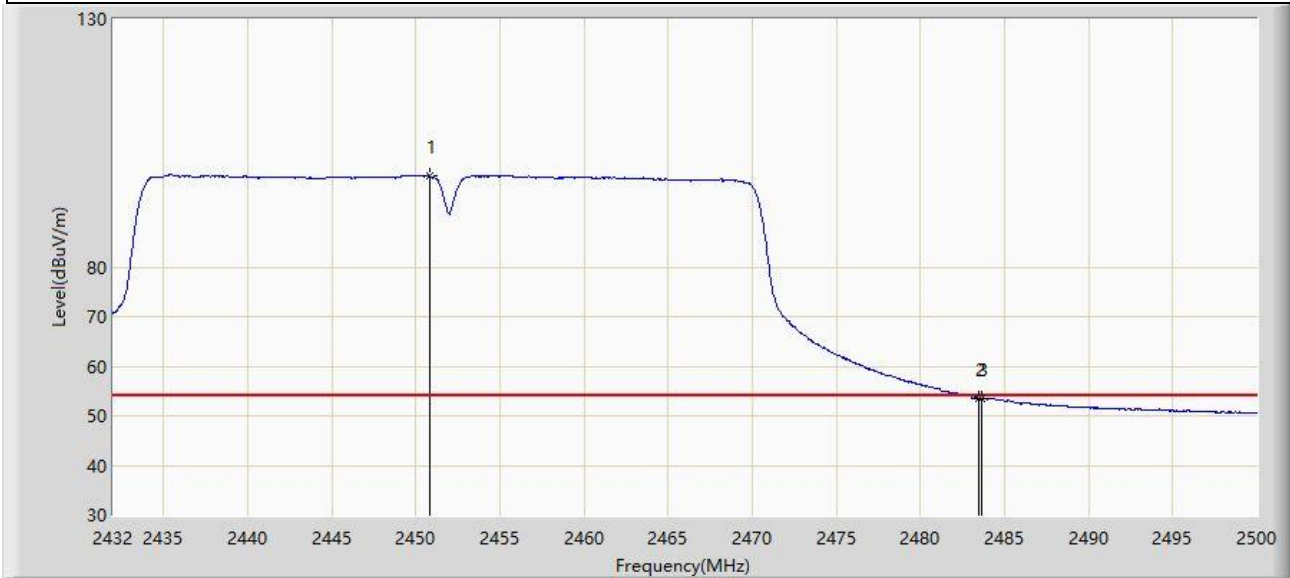


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.802	98.288	66.588	N/A	N/A	31.700	AV
2		2483.500	53.460	21.763	-0.540	54.000	31.696	AV
3	*	2483.680	53.561	21.864	-0.439	54.000	31.697	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

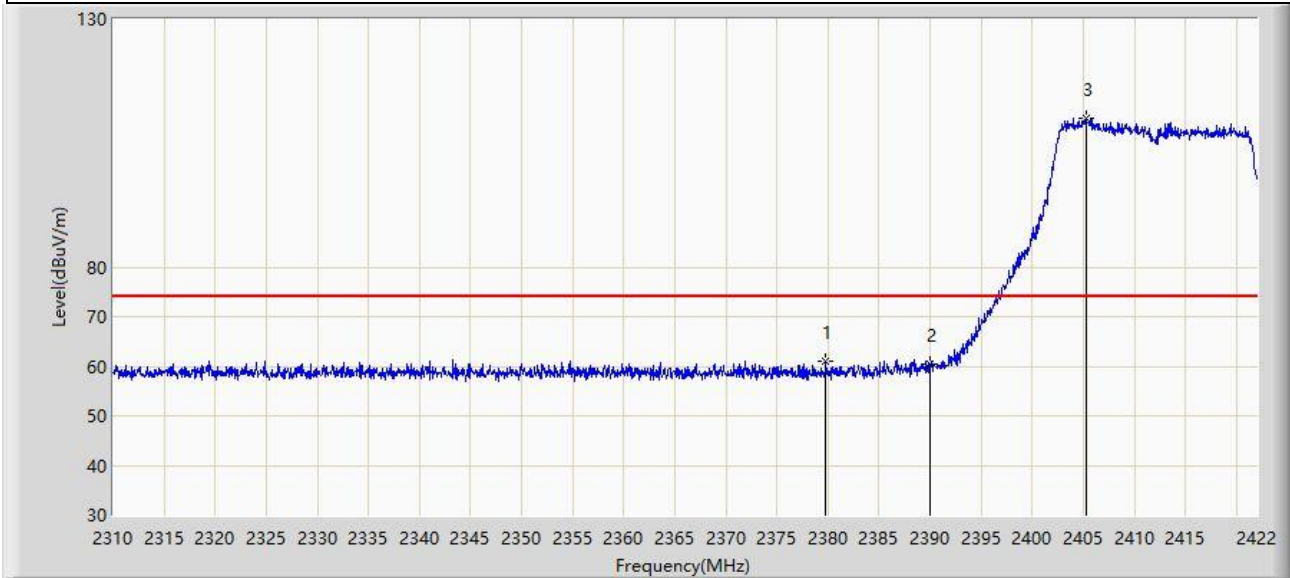


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2379.776	60.974	29.081	-13.026	74.000	31.894	PK
2		2390.000	60.360	28.507	-13.640	74.000	31.853	PK
3		2405.256	110.094	78.321	N/A	N/A	31.773	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

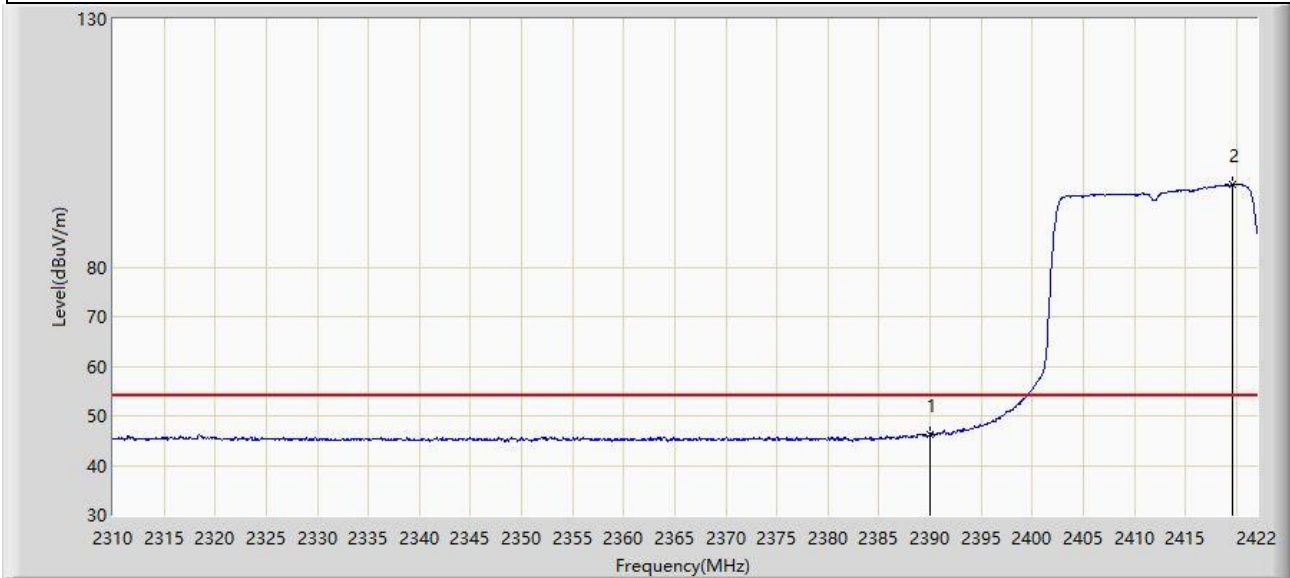


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	46.332	14.479	-7.668	54.000	31.853	AV
2		2419.648	96.627	64.901	N/A	N/A	31.726	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

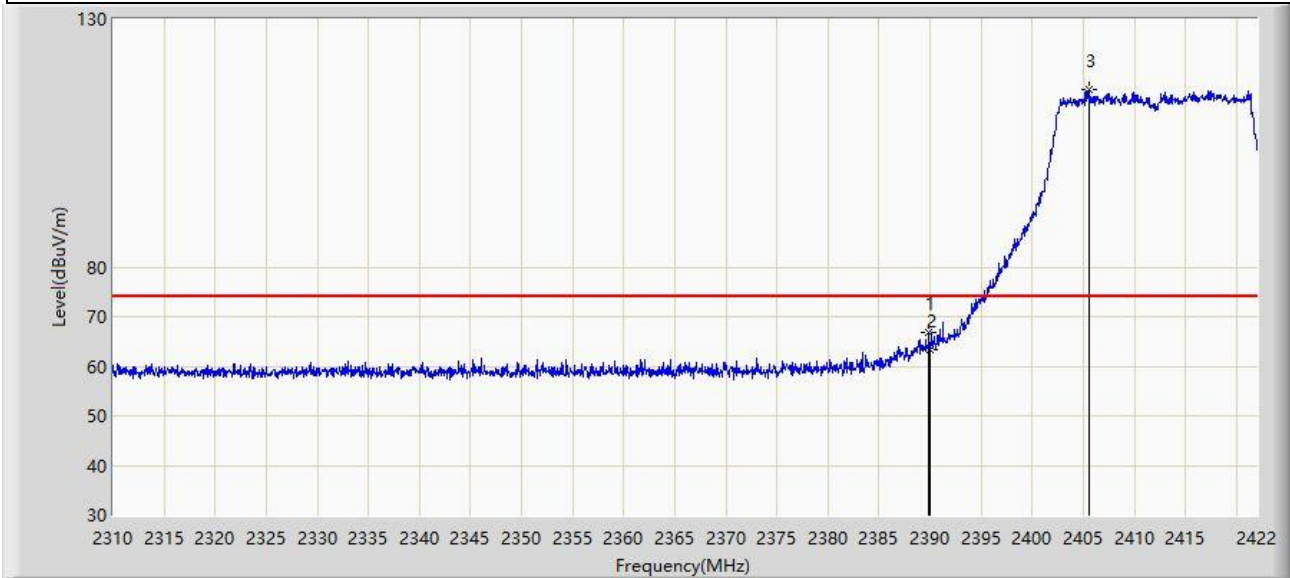


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.856	66.952	35.098	-7.048	74.000	31.853	PK
2		2390.000	63.469	31.616	-10.531	74.000	31.853	PK
3		2405.536	115.753	83.981	N/A	N/A	31.772	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-16
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

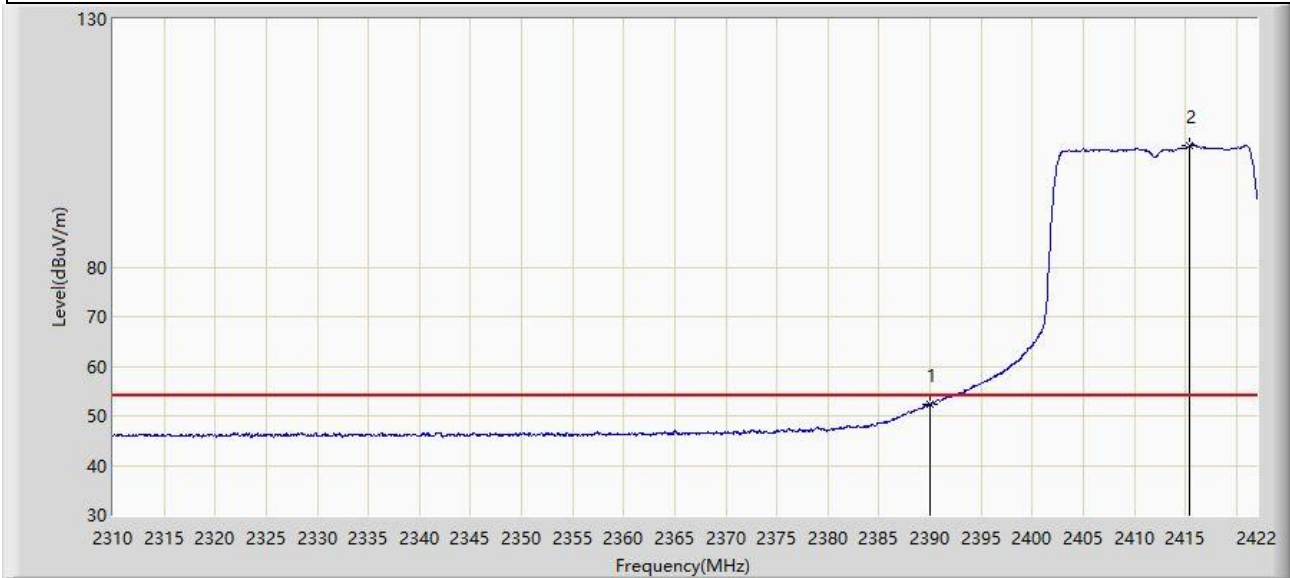


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.353	20.500	-1.647	54.000	31.853	AV
2		2415.448	104.397	72.658	N/A	N/A	31.740	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

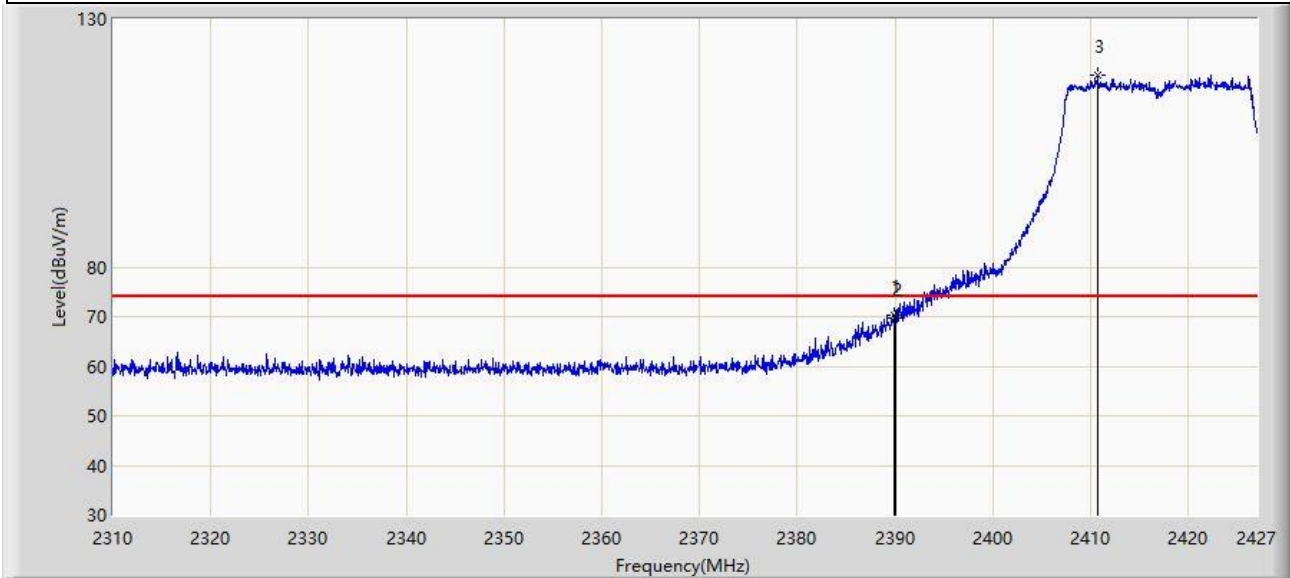


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.853	70.268	38.414	-3.732	74.000	31.853	PK
2		2390.000	69.740	37.887	-4.260	74.000	31.853	PK
3		2410.737	118.794	87.040	N/A	N/A	31.754	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

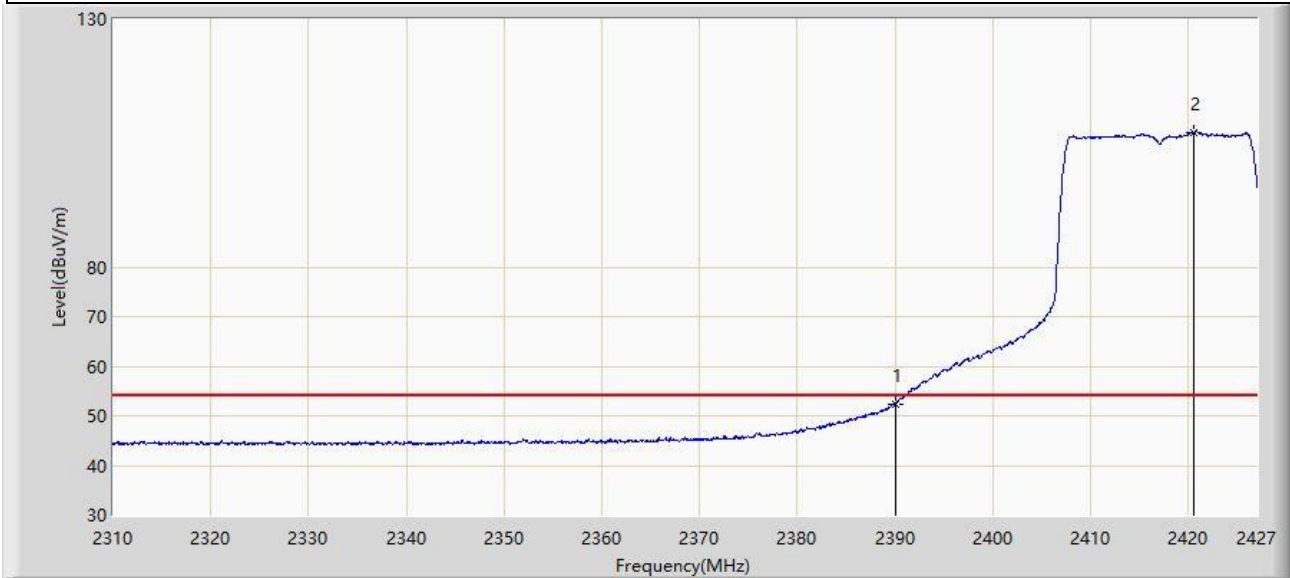


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.344	20.491	-1.656	54.000	31.853	AV
2		2420.565	107.192	75.467	N/A	N/A	31.724	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

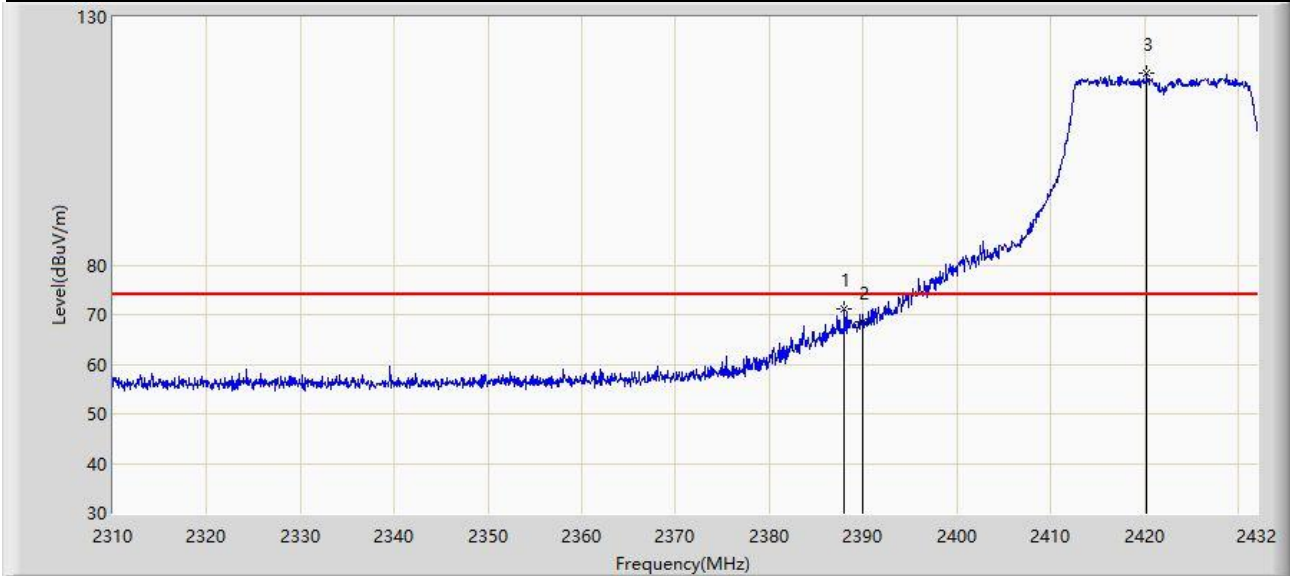


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.019	71.257	39.393	-2.743	74.000	31.864	PK
2		2390.000	68.487	36.634	-5.513	74.000	31.853	PK
3		2420.288	118.636	86.911	N/A	N/A	31.725	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2422MHz	

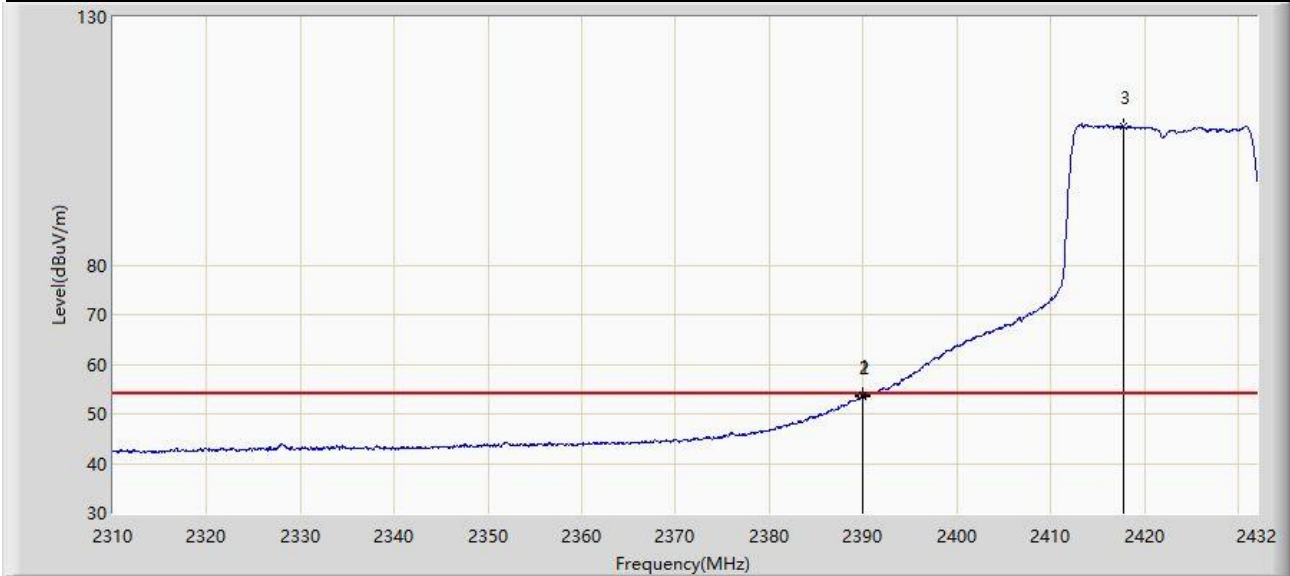


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.910	53.661	21.808	-0.339	54.000	31.853	AV
2		2390.000	53.563	21.710	-0.437	54.000	31.853	AV
3		2417.726	107.923	76.191	N/A	N/A	31.732	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

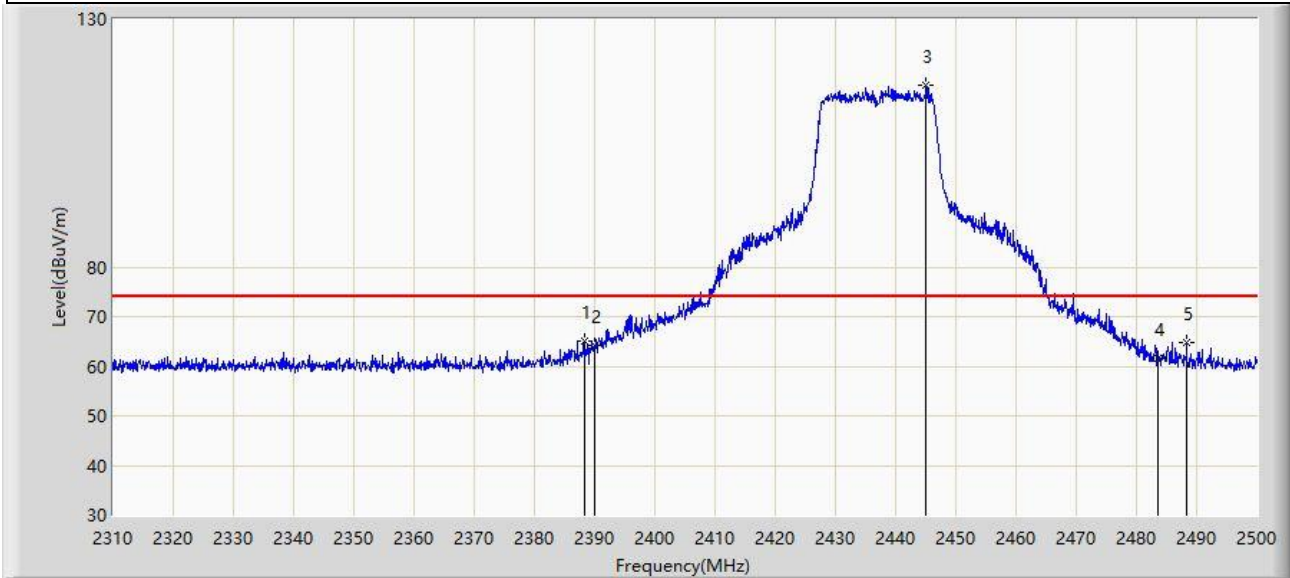


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.280	65.172	33.309	-8.828	74.000	31.863	PK
2		2390.000	64.176	32.323	-9.824	74.000	31.853	PK
3		2445.090	116.780	85.071	N/A	N/A	31.710	PK
4		2483.500	61.659	29.962	-12.341	74.000	31.696	PK
5		2488.315	64.709	33.015	-9.291	74.000	31.695	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

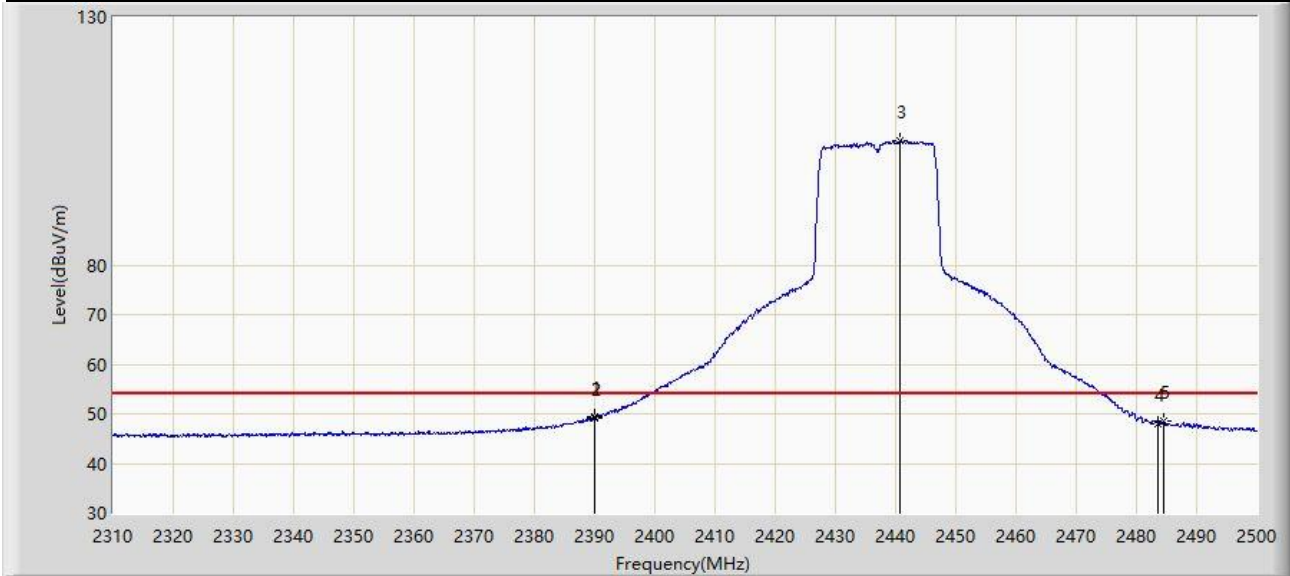


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.895	49.437	17.584	-4.563	54.000	31.853	AV
2		2390.000	49.074	17.221	-4.926	54.000	31.853	AV
3		2440.625	105.006	73.291	N/A	N/A	31.715	AV
4		2483.500	48.100	16.403	-5.900	54.000	31.696	AV
5		2484.610	48.609	16.913	-5.391	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

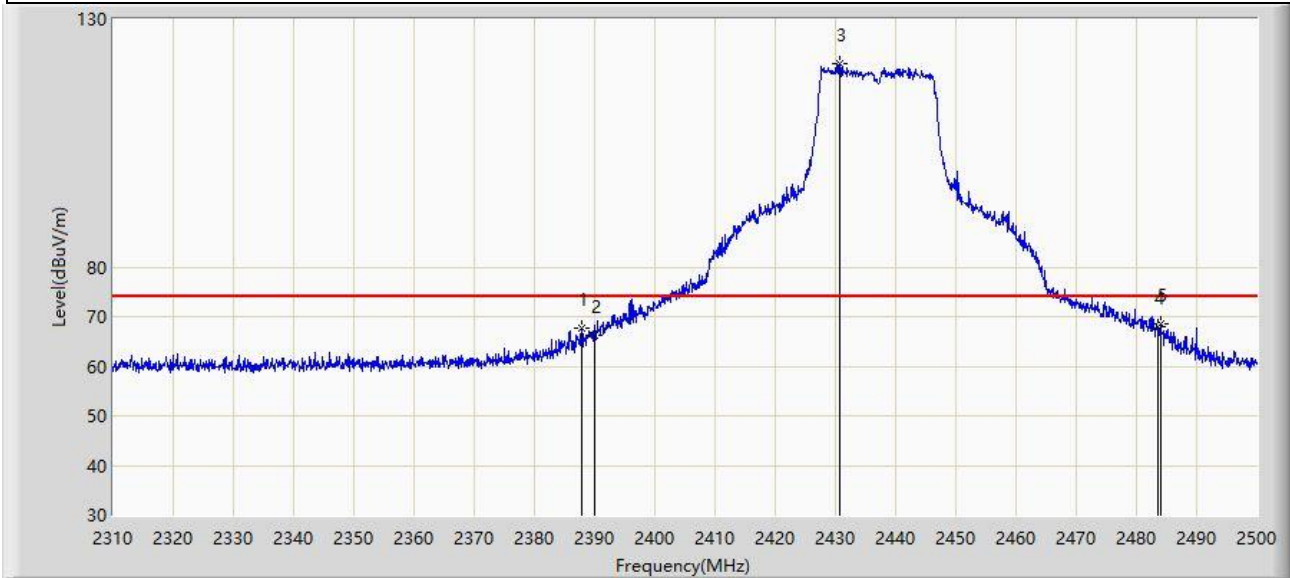


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2387.805	67.643	35.778	-6.357	74.000	31.865	PK
2		2390.000	66.112	34.259	-7.888	74.000	31.853	PK
3		2430.745	121.152	89.434	N/A	N/A	31.718	PK
4		2483.500	67.883	36.186	-6.117	74.000	31.696	PK
5	*	2483.945	68.425	36.728	-5.575	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

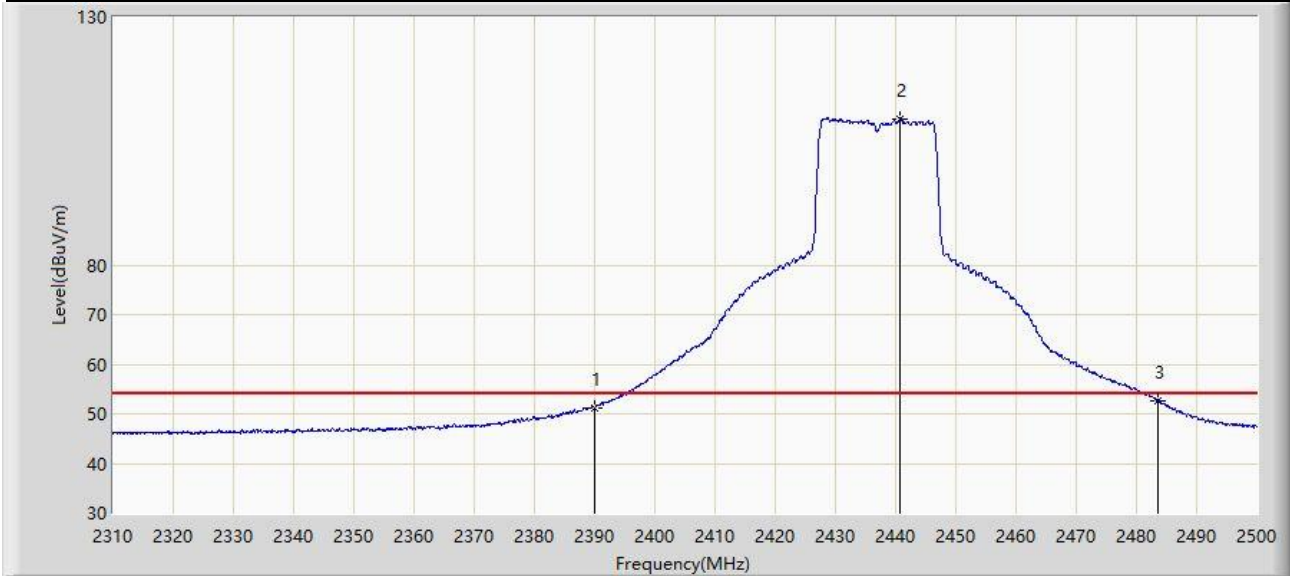


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	51.277	19.424	-2.723	54.000	31.853	AV
2		2440.625	109.369	77.654	N/A	N/A	31.715	AV
3	*	2483.500	52.741	21.044	-1.259	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

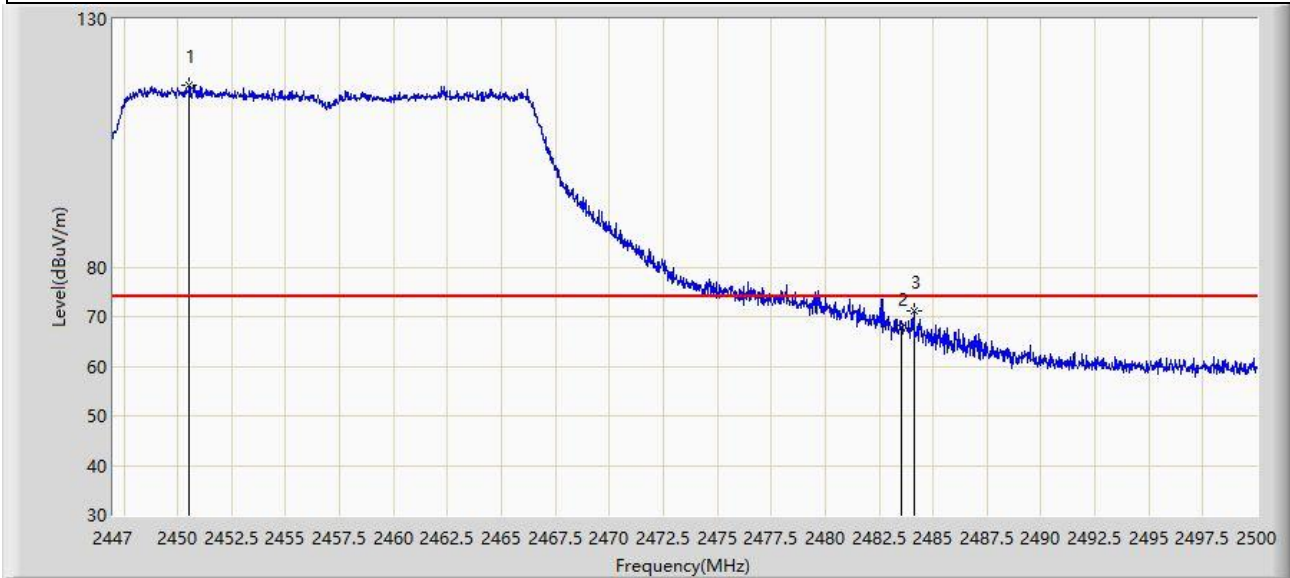


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.551	116.599	84.899	N/A	N/A	31.700	PK
2		2483.500	67.554	35.857	-6.446	74.000	31.696	PK
3	*	2484.100	71.270	39.573	-2.730	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-05
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

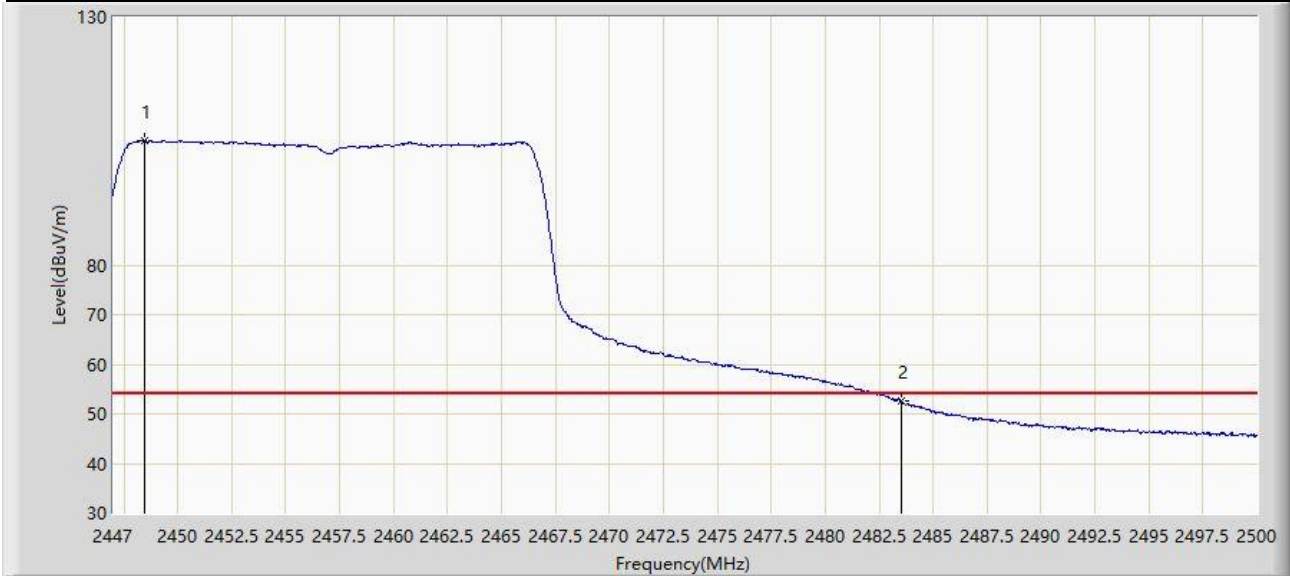


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.484	105.017	73.313	N/A	N/A	31.703	AV
2	*	2483.500	52.533	20.836	-1.467	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

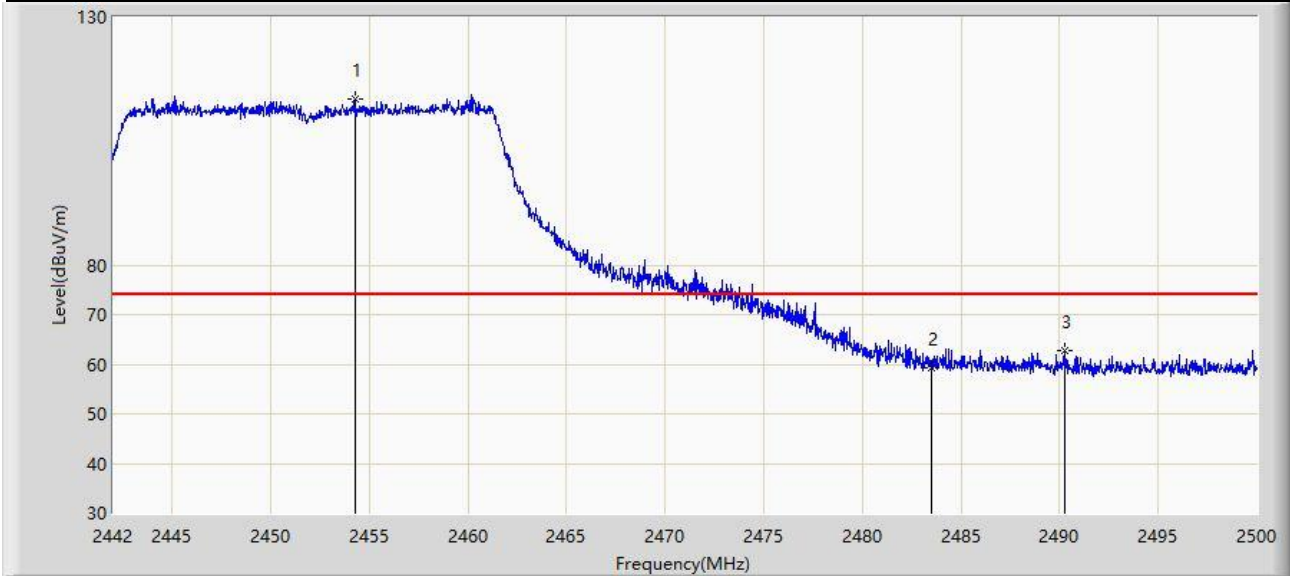


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.267	113.521	81.827	N/A	N/A	31.694	PK
2		2483.500	59.393	27.696	-14.607	74.000	31.696	PK
3	*	2490.227	62.807	31.114	-11.193	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

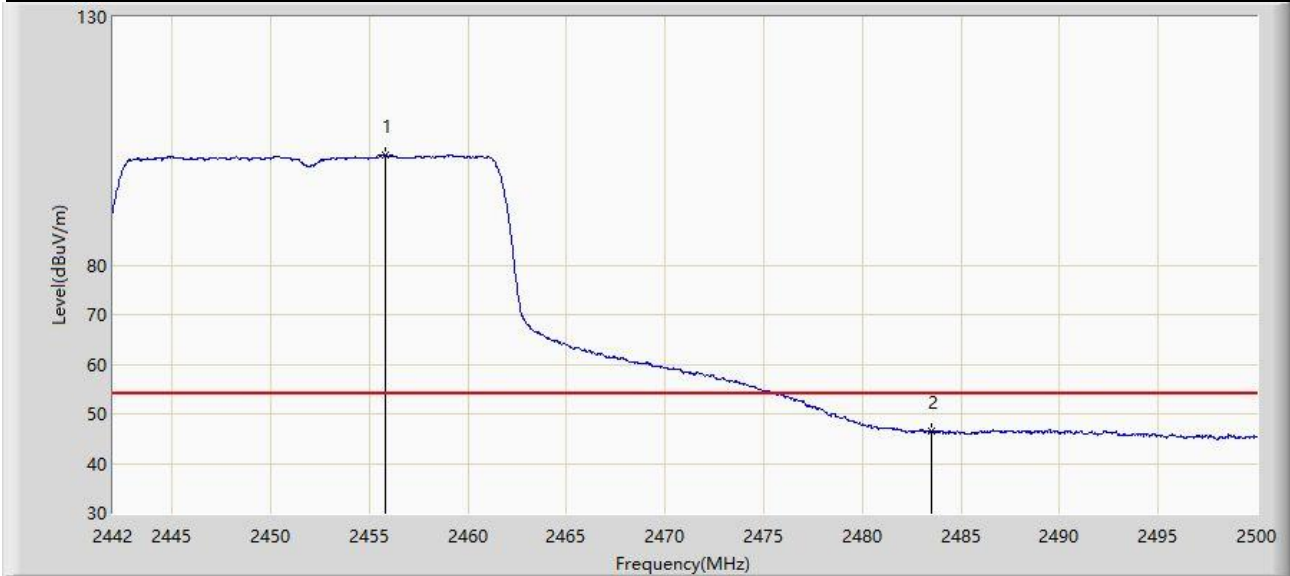


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.775	102.135	70.443	N/A	N/A	31.691	AV
2	*	2483.500	46.449	14.752	-7.551	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

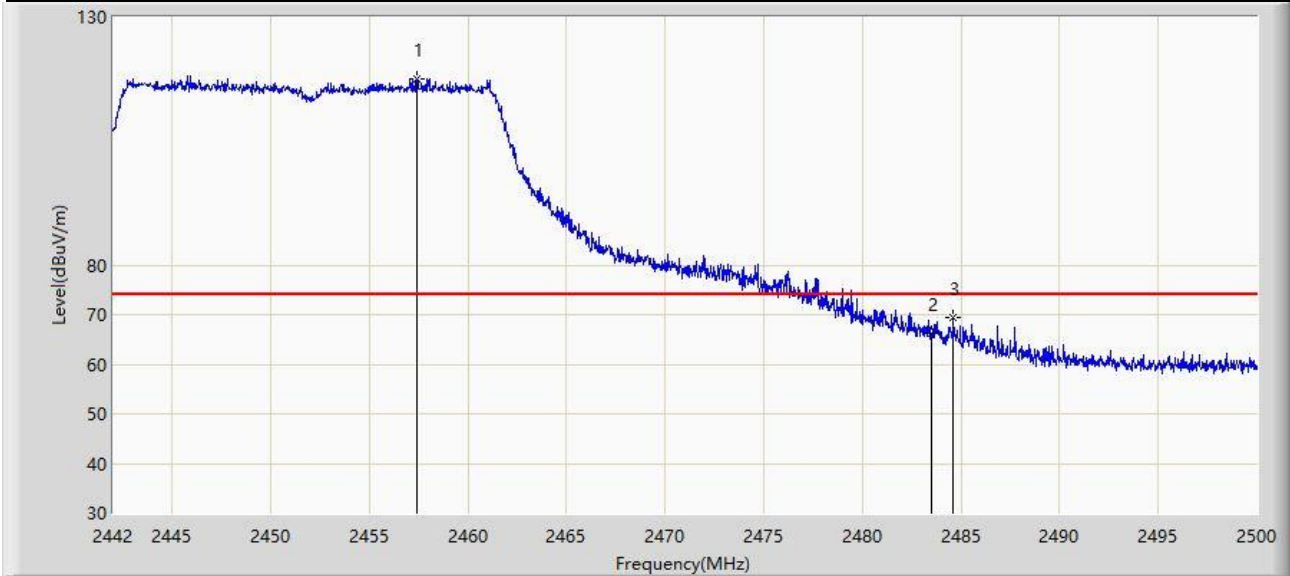


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.428	117.588	85.897	N/A	N/A	31.691	PK
2		2483.500	66.159	34.462	-7.841	74.000	31.696	PK
3	*	2484.601	69.526	37.830	-4.474	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

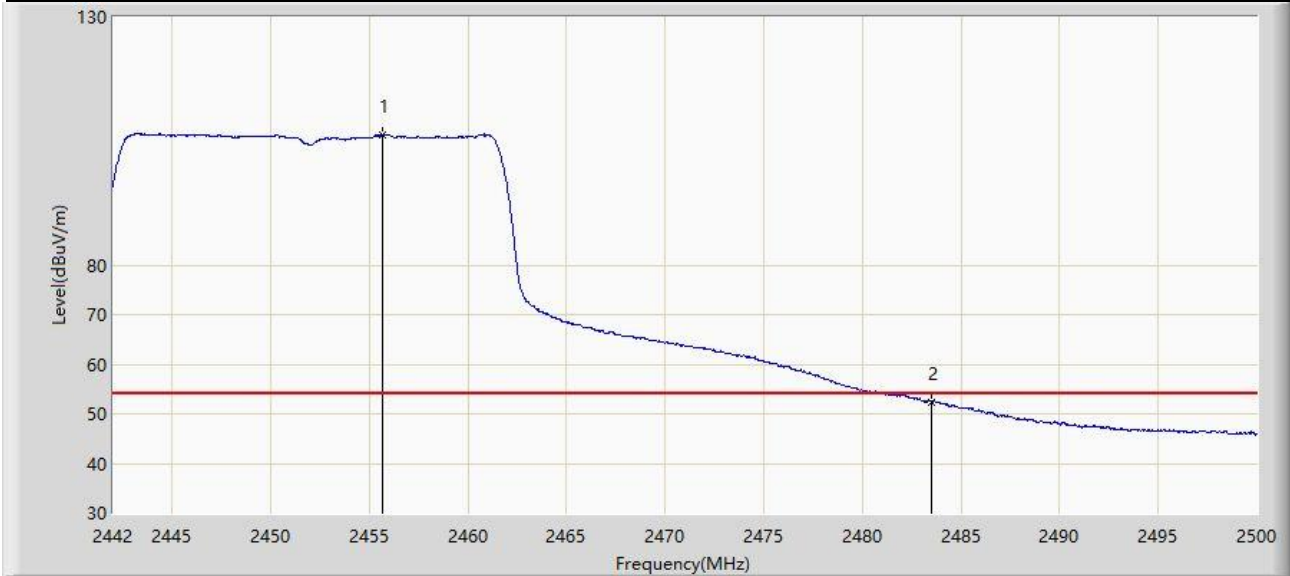


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2455.688	106.277	74.585	N/A	N/A	31.692	AV
2	*	2483.500	52.394	20.697	-1.606	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

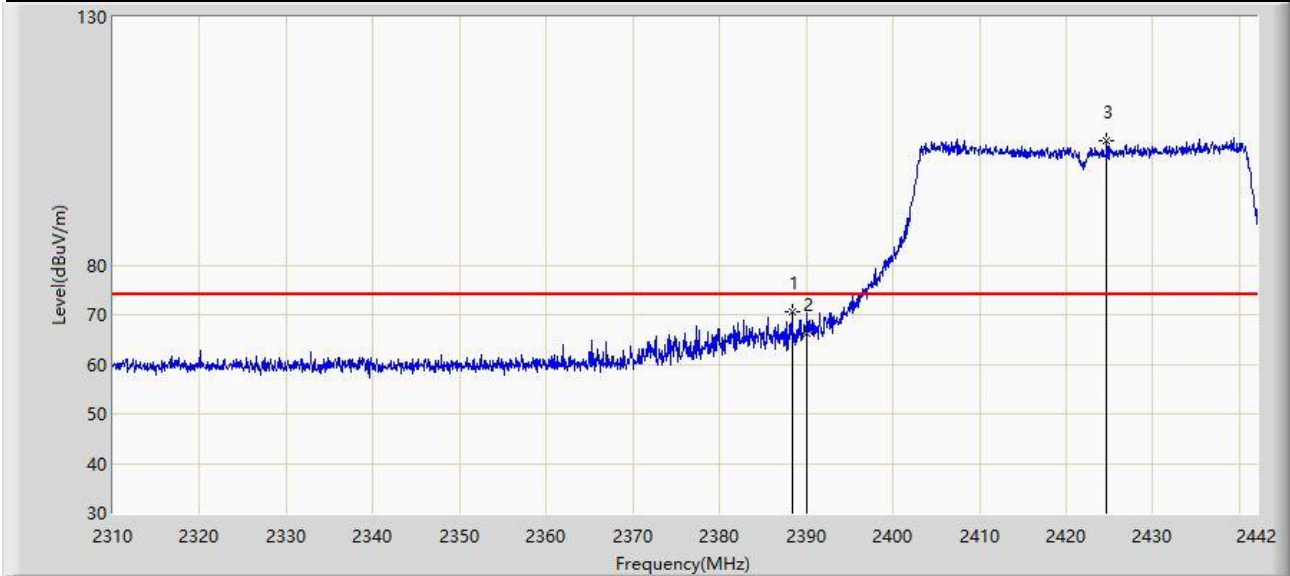


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.342	70.468	38.606	-3.532	74.000	31.862	PK
2		2390.000	66.176	34.323	-7.824	74.000	31.853	PK
3		2424.708	105.075	73.354	N/A	N/A	31.721	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

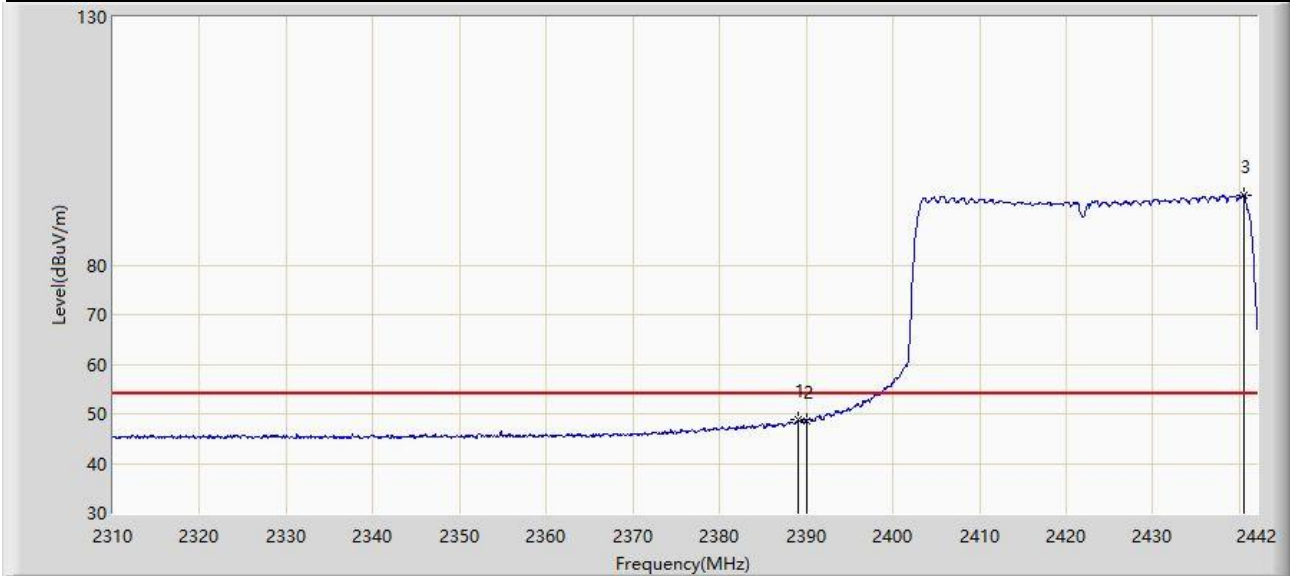


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.068	48.819	16.961	-5.181	54.000	31.858	AV
2		2390.000	48.694	16.841	-5.306	54.000	31.853	AV
3		2440.482	94.175	62.460	N/A	N/A	31.716	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

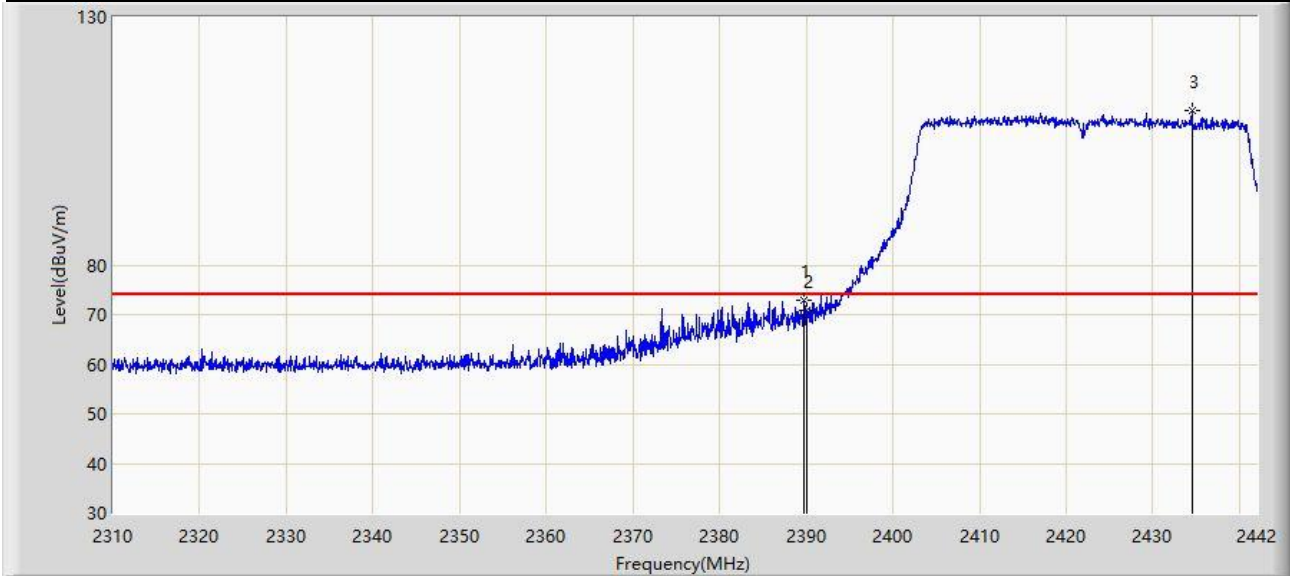


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	72.924	41.070	-1.076	74.000	31.854	PK
2		2390.000	70.826	38.973	-3.174	74.000	31.853	PK
3		2434.476	111.038	79.320	N/A	N/A	31.718	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

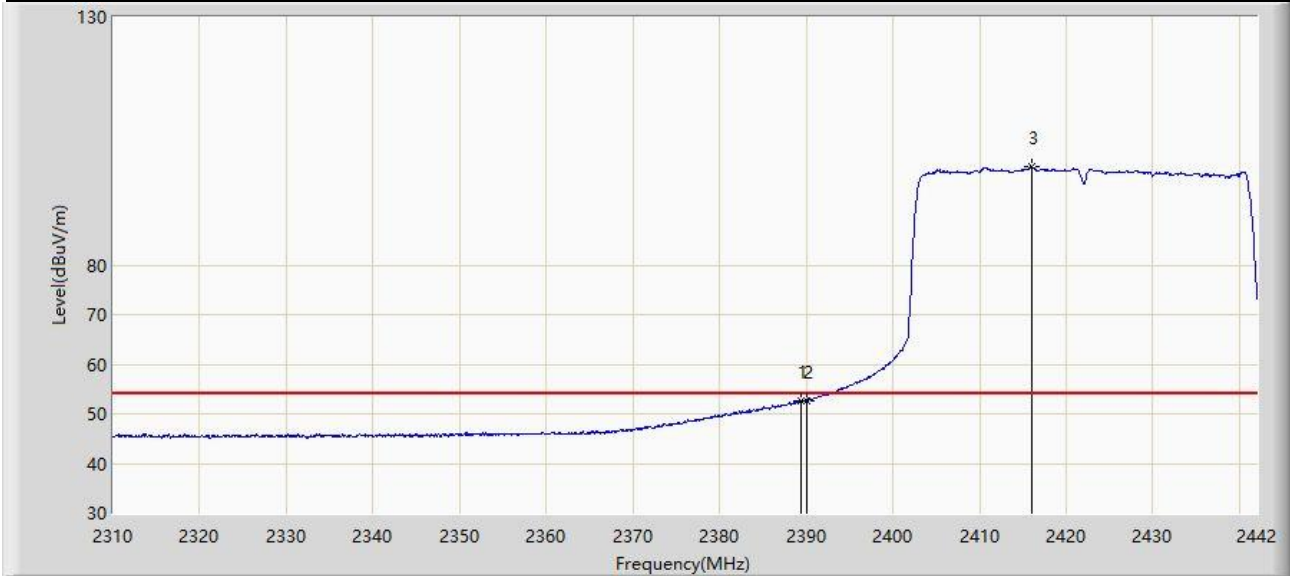


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.398	52.744	20.888	-1.256	54.000	31.856	AV
2		2390.000	52.519	20.666	-1.481	54.000	31.853	AV
3		2416.062	99.765	68.028	N/A	N/A	31.738	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2427MHz	

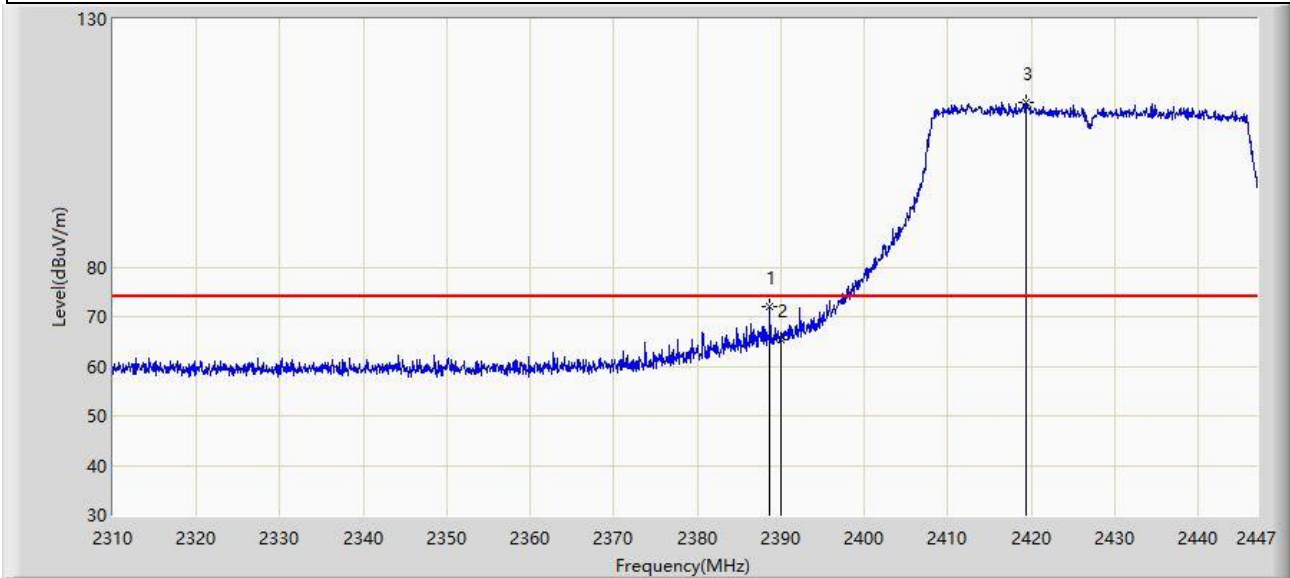


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.707	72.163	40.303	-1.837	74.000	31.860	PK
2		2390.000	65.309	33.456	-8.691	74.000	31.853	PK
3		2419.326	113.123	81.396	N/A	N/A	31.727	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2427MHz	

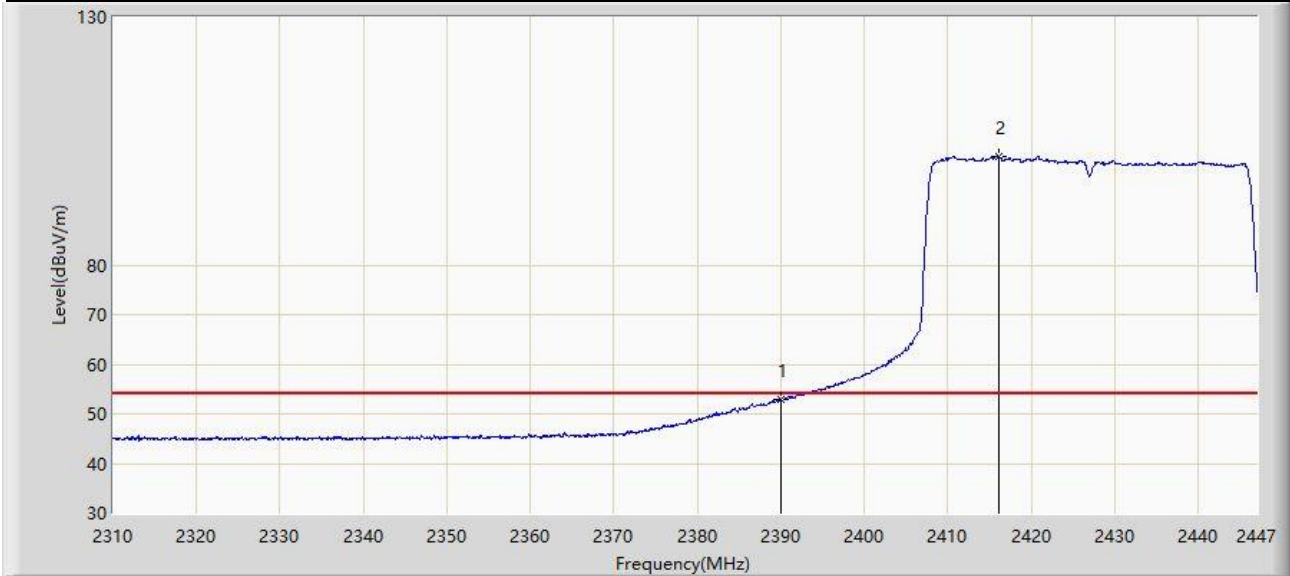


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.794	20.941	-1.206	54.000	31.853	AV
2		2416.038	101.954	70.217	N/A	N/A	31.738	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

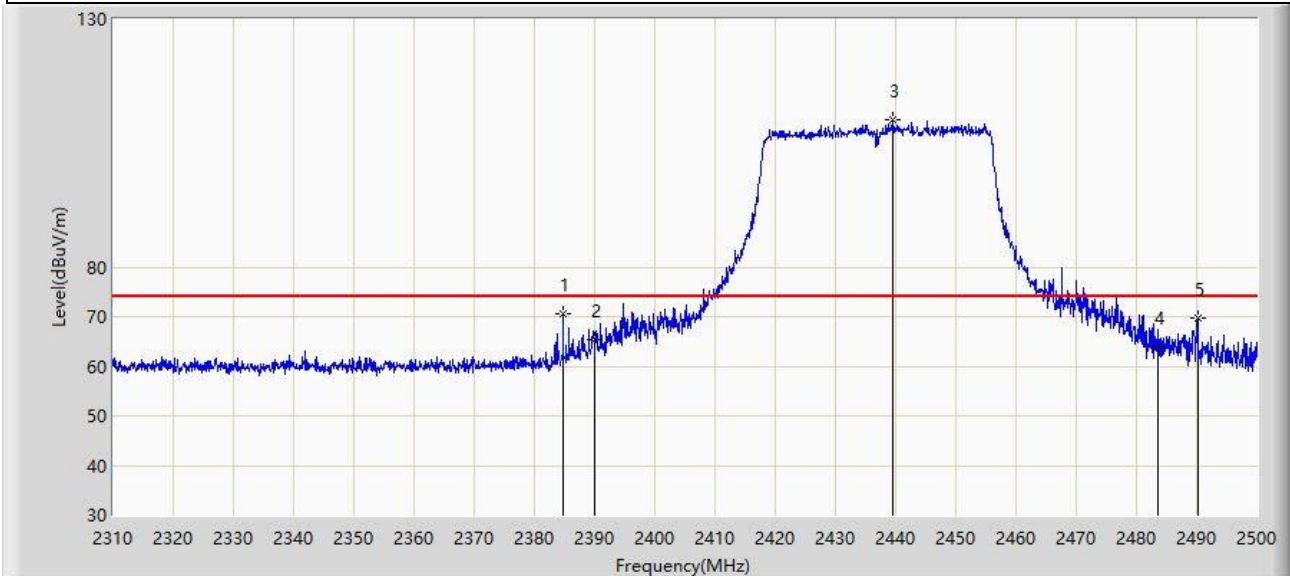


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.765	70.608	38.725	-3.392	74.000	31.883	PK
2		2390.000	65.362	33.509	-8.638	74.000	31.853	PK
3		2439.485	109.660	77.943	N/A	N/A	31.717	PK
4		2483.500	63.774	32.077	-10.226	74.000	31.696	PK
5		2490.120	69.809	38.116	-4.191	74.000	31.693	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

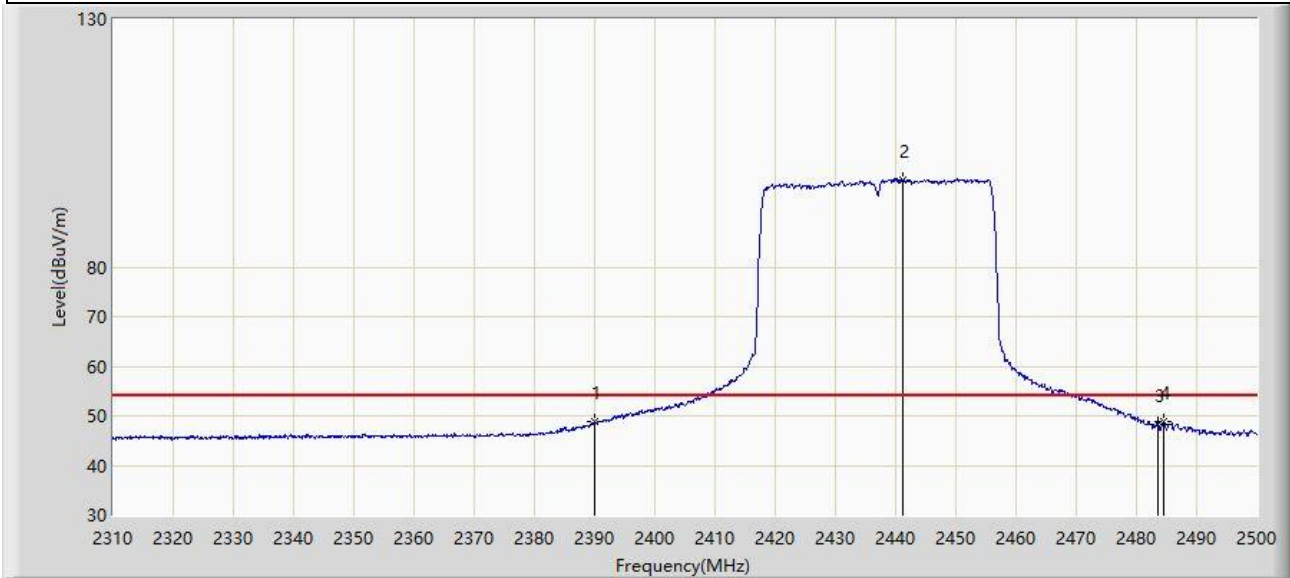


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.820	16.967	-5.180	54.000	31.853	AV
2		2441.195	97.559	65.845	N/A	N/A	31.714	AV
3		2483.500	48.325	16.628	-5.675	54.000	31.696	AV
4		2484.515	48.707	17.011	-5.293	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

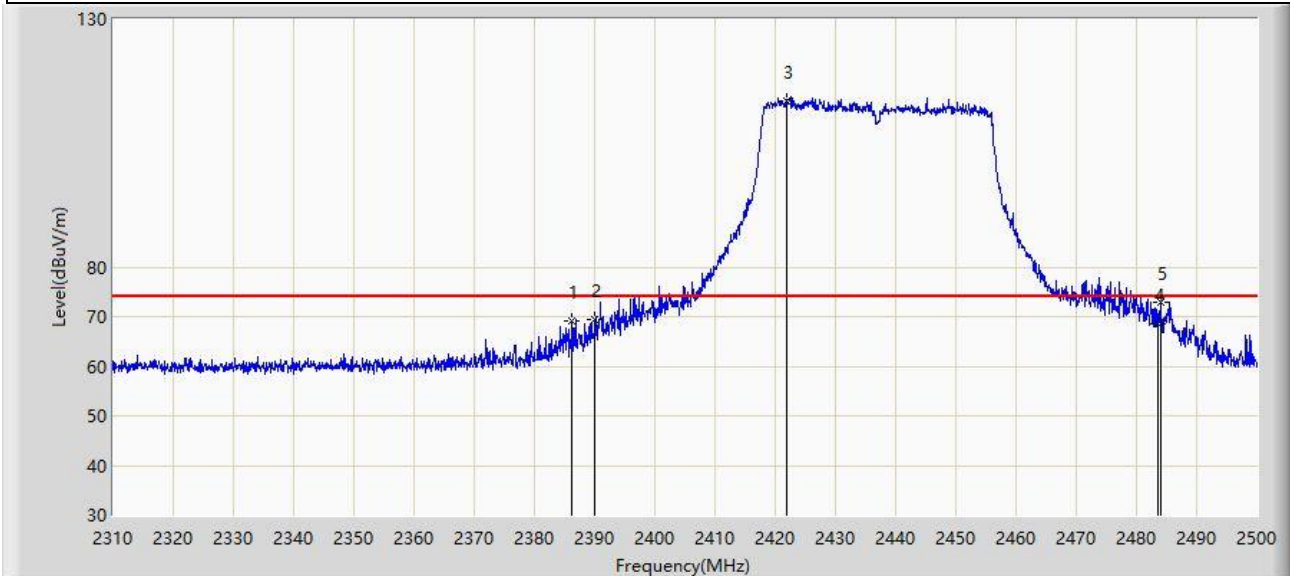


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2386.285	69.102	37.228	-4.898	74.000	31.874	PK
2		2390.000	69.276	37.423	-4.724	74.000	31.853	PK
3		2421.910	113.555	81.832	N/A	N/A	31.723	PK
4		2483.500	68.432	36.735	-5.568	74.000	31.696	PK
5	*	2484.040	72.921	41.224	-1.079	74.000	31.697	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

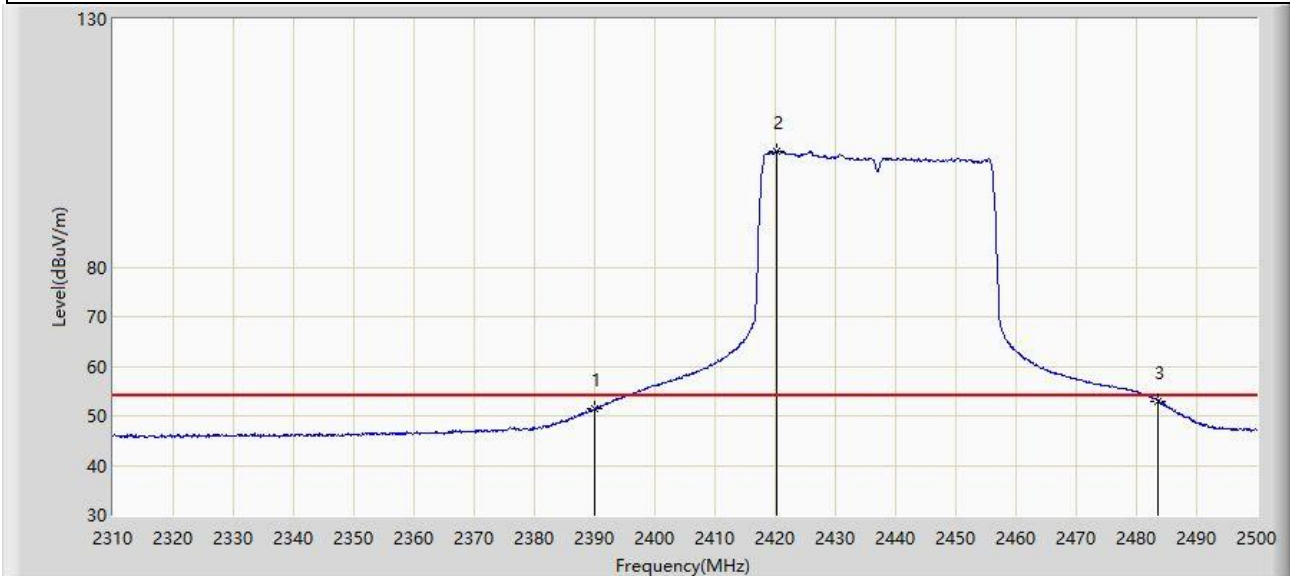


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	51.340	19.487	-2.660	54.000	31.853	AV
2		2420.295	103.453	71.728	N/A	N/A	31.725	AV
3	*	2483.500	53.005	21.308	-0.995	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-02
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

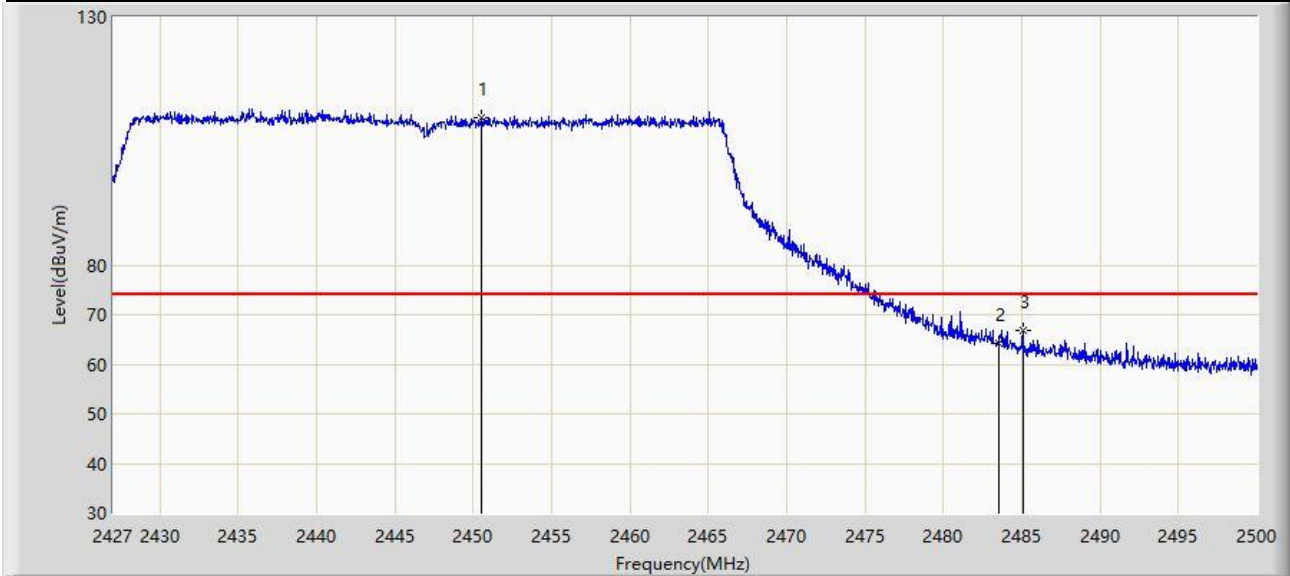


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.542	109.696	77.996	N/A	N/A	31.700	PK
2		2483.500	64.338	32.641	-9.662	74.000	31.696	PK
3	*	2485.072	66.914	35.218	-7.086	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

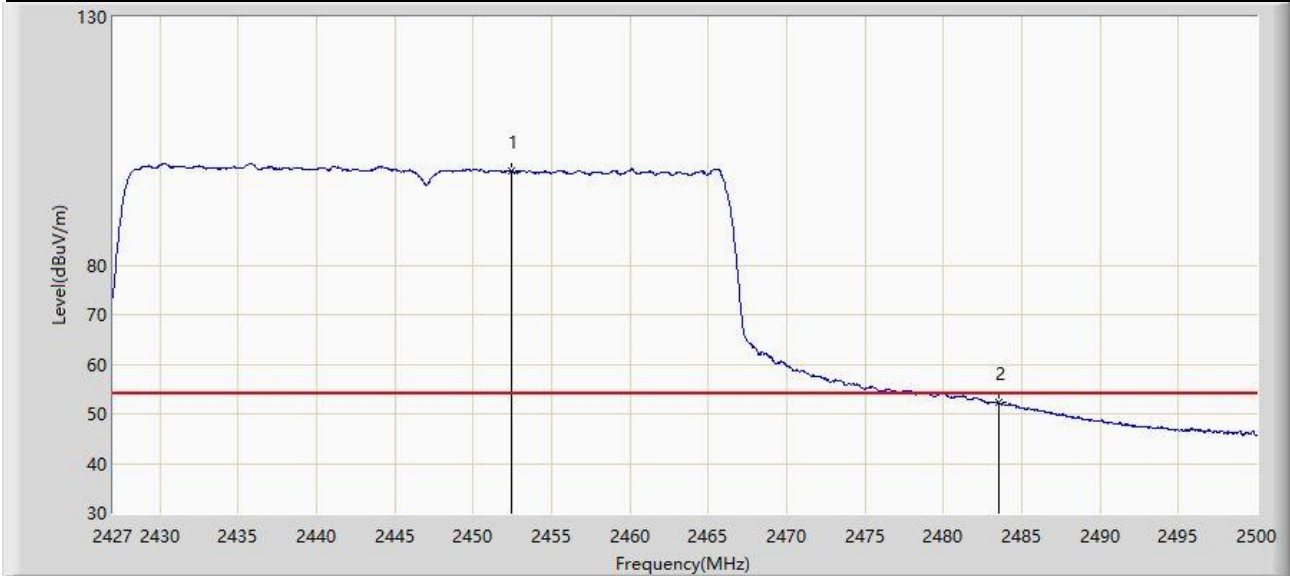


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2452.404	98.941	67.244	N/A	N/A	31.698	AV
2	*	2483.500	52.395	20.698	-1.605	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

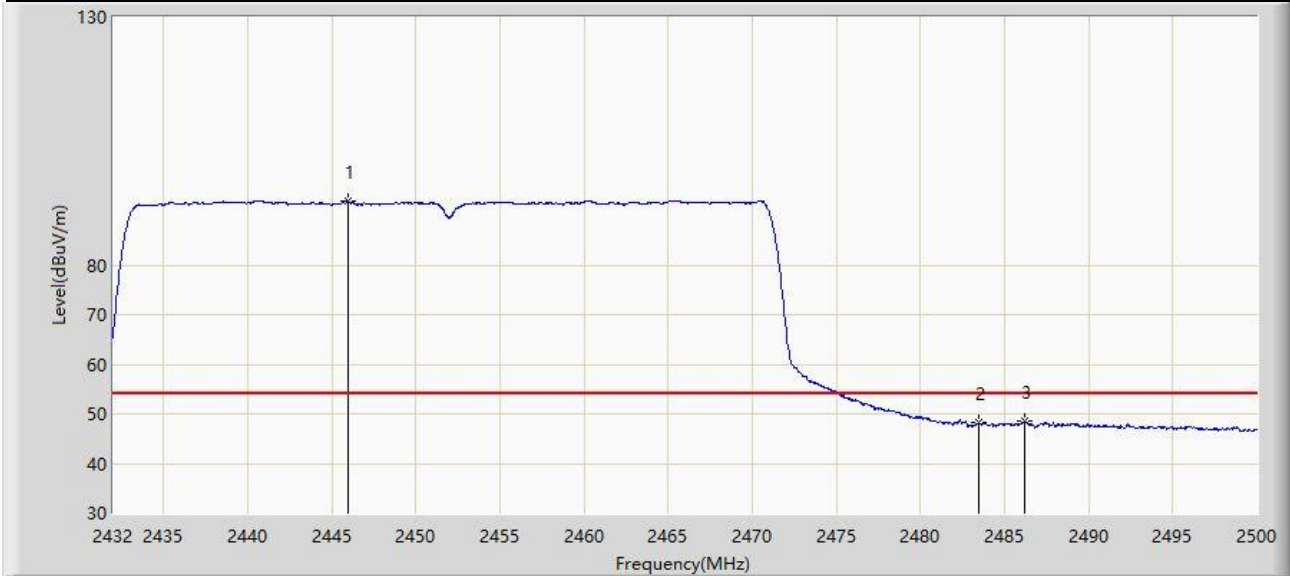


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.940	92.792	61.084	N/A	N/A	31.708	AV
2		2483.500	48.167	16.470	-5.833	54.000	31.696	AV
3	*	2486.196	48.459	16.764	-5.541	54.000	31.696	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-02-01
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2417MHz	

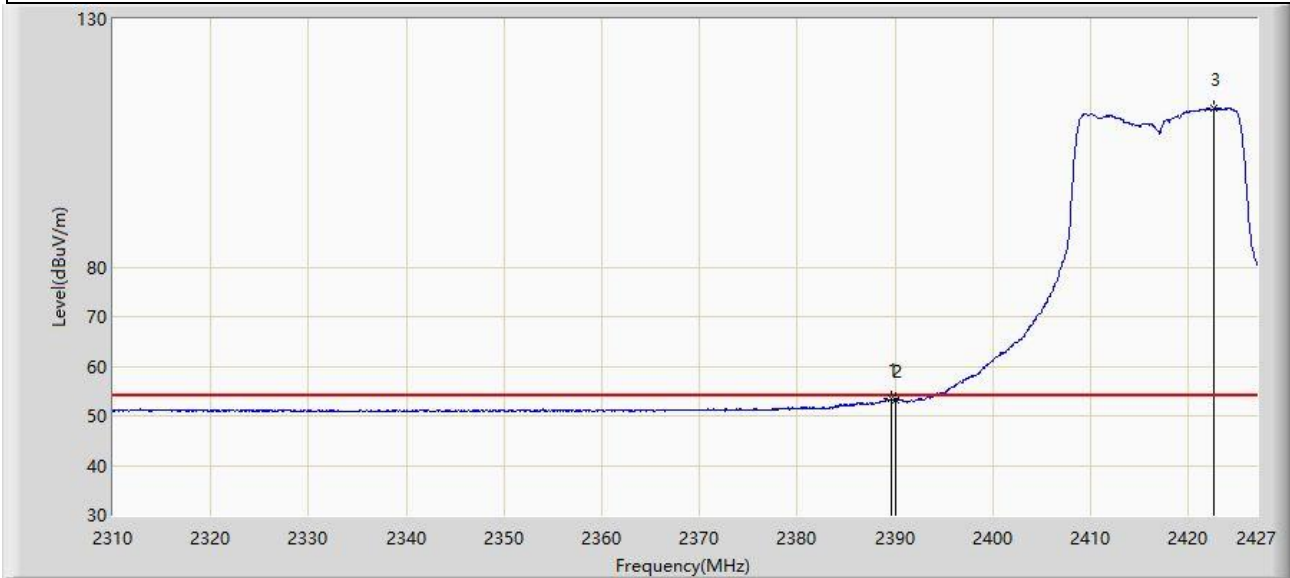


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.560	53.386	21.531	-0.614	54.000	31.855	AV
2		2390.000	53.185	21.332	-0.815	54.000	31.853	AV
3		2422.613	111.922	80.199	N/A	N/A	31.723	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

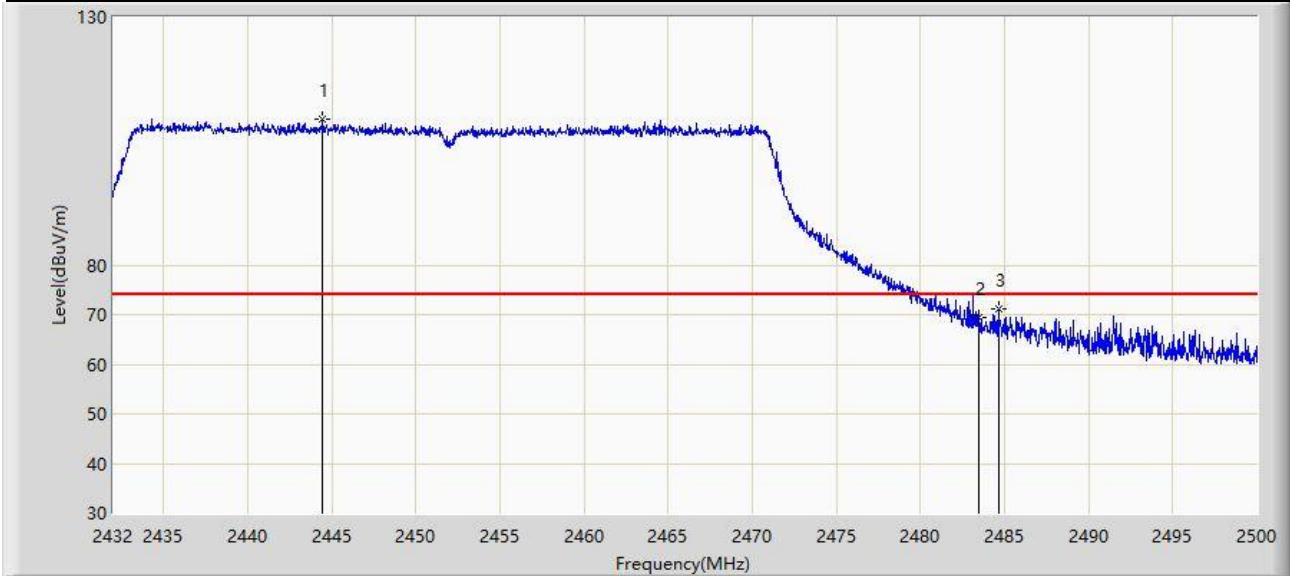


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2444.478	109.315	77.605	N/A	N/A	31.710	PK
2		2483.500	69.499	37.802	-4.501	74.000	31.696	PK
3	*	2484.632	71.116	39.420	-2.884	74.000	31.696	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

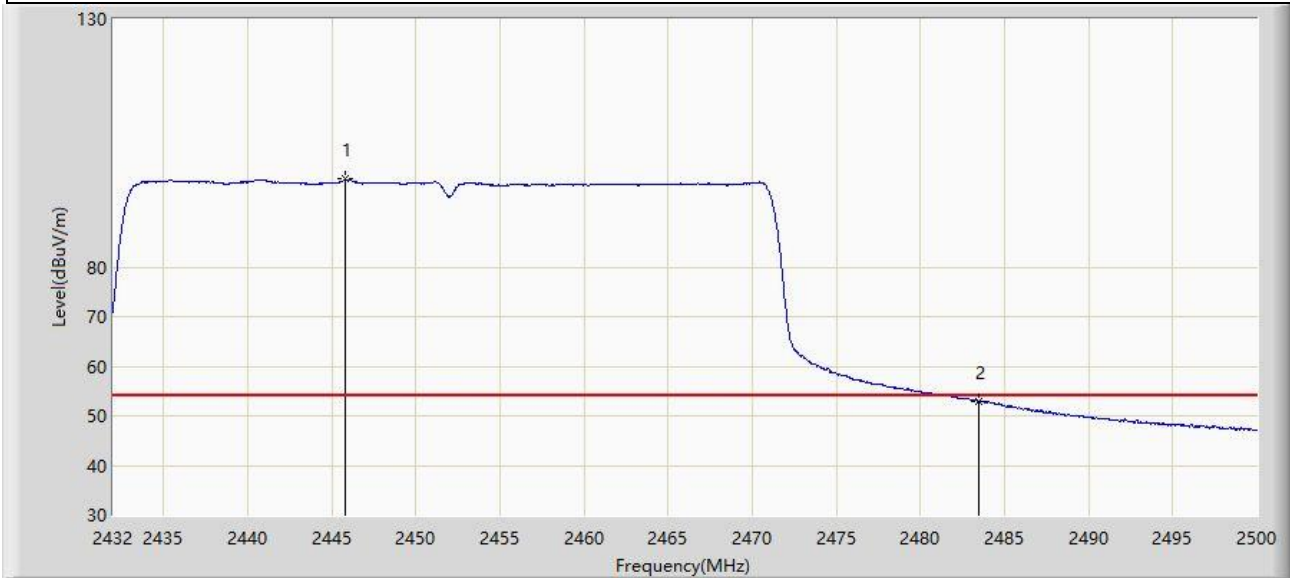

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2445.804	97.718	66.010	N/A	N/A	31.708	AV
2	*	2483.500	52.995	21.298	-1.005	54.000	31.696	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2024-01-26
Temperature: 16.4°C	Humidity: 30.6%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

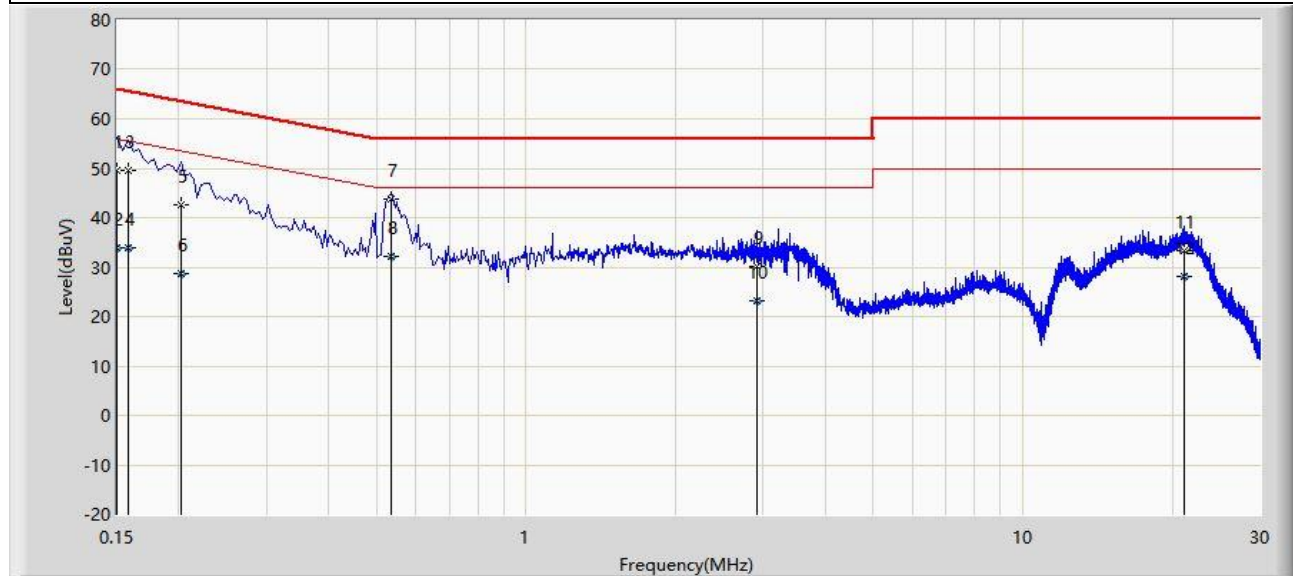


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.150	49.675	39.910	-16.325	66.000	9.766	QP
2		0.150	33.866	24.101	-22.134	56.000	9.766	AV
3		0.158	49.602	39.833	-15.966	65.568	9.770	QP
4		0.158	33.877	24.108	-21.691	55.568	9.770	AV
5		0.202	42.671	32.883	-20.857	63.528	9.788	QP
6		0.202	28.610	18.822	-24.918	53.528	9.788	AV
7	*	0.534	43.722	33.771	-12.278	56.000	9.951	QP
8		0.534	32.259	22.308	-13.741	46.000	9.951	AV
9		2.918	30.256	19.735	-25.744	56.000	10.521	QP
10		2.918	23.222	12.701	-22.778	46.000	10.521	AV
11		21.182	33.348	21.792	-26.652	60.000	11.556	QP
12		21.182	28.086	16.530	-21.914	50.000	11.556	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2024-01-26
Temperature: 16.4°C	Humidity: 30.6%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: Tri-band Wi-Fi 6E Wireless AP	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

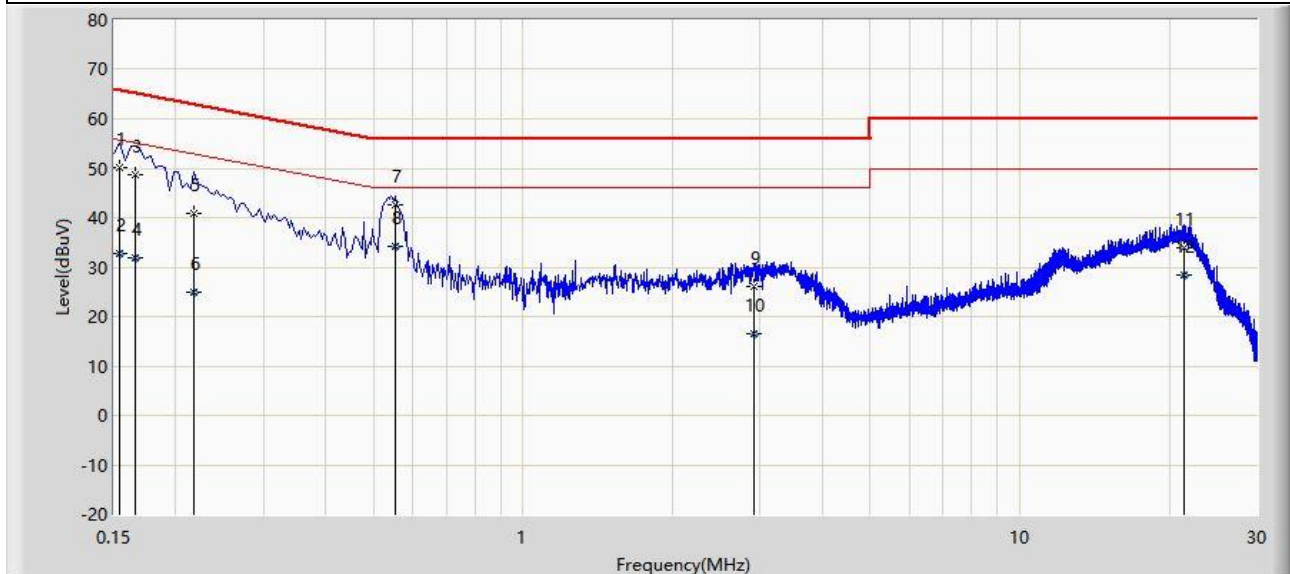

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.154	50.055	40.281	-15.726	65.781	9.774	QP
2		0.154	32.624	22.850	-23.157	55.781	9.774	AV
3		0.166	48.563	38.785	-16.596	65.158	9.778	QP
4		0.166	31.927	22.150	-23.231	55.158	9.778	AV
5		0.218	41.007	31.212	-21.888	62.895	9.795	QP
6		0.218	24.860	15.065	-28.035	52.895	9.795	AV
7		0.554	42.510	32.538	-13.490	56.000	9.972	QP
8	*	0.554	34.064	24.092	-11.936	46.000	9.972	AV
9		2.918	26.008	15.382	-29.992	56.000	10.626	QP
10		2.918	16.504	5.878	-29.496	46.000	10.626	AV
11		21.470	33.790	21.926	-26.210	60.000	11.865	QP
12		21.470	28.529	16.664	-21.471	50.000	11.865	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2401RSU020-UT” file.

Appendix C – EUT Photograph

Refer to “2401RSU020-UE” file.

_____ The End _____