

FCC / ISED- TEST REPORT

Report Number : **64.790.24.02946.01** Date of Issue: 2024-11-18

Model : **SK-Z102**

Product Type : Smart Kit

Applicant : GD Midea Air-Conditioning Equipment Co., Ltd.

Address : Lingang Road, Beijiao, Shunde 528311 Foshan, Guangdong, China

Manufacturer : GD Midea Air-Conditioning Equipment Co., Ltd.

Address : Lingang Road, Beijiao, Shunde 528311 Foshan, Guangdong, China

Production Facility : GD Midea Air-Conditioning Equipment Co., Ltd.

Address : Lingang Road, Beijiao, Shunde 528311 Foshan, Guangdong, China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **44**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
7.1	Radiated test setups	8
7.2	Conducted RF test setups	8
7.3	AC Power Line Conducted Emission test setups	9
8	Systems test configuration	10
9	Test environment condition	10
10	Technical Requirement	11
10.1	Conducted Emission	11
10.2	Conducted peak output power & EIRP	14
10.3	6dB bandwidth	16
10.4	99% bandwidth	18
10.5	Power spectral density	20
10.6	Spurious RF conducted emissions	22
10.7	Band edge	25
10.8	Spurious radiated emissions for transmitter	27
11	Test Equipment List	42
12	System Measurement Uncertainty	44

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou, Nanshan District, Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

ISED CAB identifier: CN0077

IC Registration No.: 10320A

3 Description of the Equipment under Test

Product:	Smart Kit
Model no.:	SK-Z102
Product Marketing Name (PMN):	Smart Kit
Hardware Version Identification No. (HVIN):	SK-Z102
FCC ID:	2ADQOMDNA25
IC:	12575A-MDNA25
Options and accessories:	NIL
Ratings:	DC 5V/300mA
RF Transmission Frequency:	2405MHz - 2480MHz for Zigbee
No. of Operated Channel:	16
Modulation:	OQPSK
Antenna Type:	Copper tube antenna
Antenna Gain:	3.61 dBi Max.
Description of the EUT:	The Equipment Under Test is a Smart Kit which support 2.4G band Zigbee function.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5, April 2018 Amendment 1, March 2019 + Amendment 2, February 2021	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 Issue 3 August 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB558074 D01 v05r02 DTS Measurement Guidance and ANSI C63.10 (2020).

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C 10-1-2023 Edition / RSS-247 Issue 3, August 2023/ RSS-Gen Issue 5, April 2018 Amendment 1, March 2019 + Amendment 2, February 2021			
Test Condition		Test Result	Test Site
§15.207 RSS-GEN 8.8	Conducted emission AC power port	Pass	Site 1
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted output power	Pass	Site 1
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Pass	Site 1
§15.247(e) RSS-247 5.2(b)	Power spectral density	Pass	Site 1
§15.247(a)(2) RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth	Pass	Site 1
§15.247(a)(1) RSS-247 5.1(b)	20dB Occupied bandwidth	N/A	--
RSS-GEN 6.7	99% Occupied Bandwidth	Pass	Site 1
§15.247(a)(1) RSS-247 5.1(b)	Carrier frequency separation	N/A	--
§15.247(a)(1)(iii) RSS-247 5.1(d)	Number of hopping frequencies	N/A	--
§15.247(a)(1)(iii) RSS-247 5.1(d)	Dwell Time	N/A	--
§15.247(d) RSS-247 5.5	Spurious RF conducted emissions	Pass	Site 1
§15.247(d) RSS-247 5.5	Band edge	Pass	Site 1
§15.247(d) & §15.209 & §15.205 RSS-247 5.5 & RSS- Gen 6.13	Spurious radiated emissions for transmitter	Pass	Site 1
§15.203 RSS-Gen 6.8	Antenna requirement	Pass See note 1	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a copper tube antenna 3.61dBi max. According to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ADQOMDNA25, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C rules.

This submittal(s) (test report) is intended for IC: 12575A-MDNA25, complies with RSS-247 and RSS-Gen.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2024-05-24

Testing Start Date: 2024-05-30


Testing End Date: 2024-10-31

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:


Tested by:



Jessie He
EMC Project Manager



Myron Yu
EMC Project Engineer




Carry Cai
EMC Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz - 30MHz

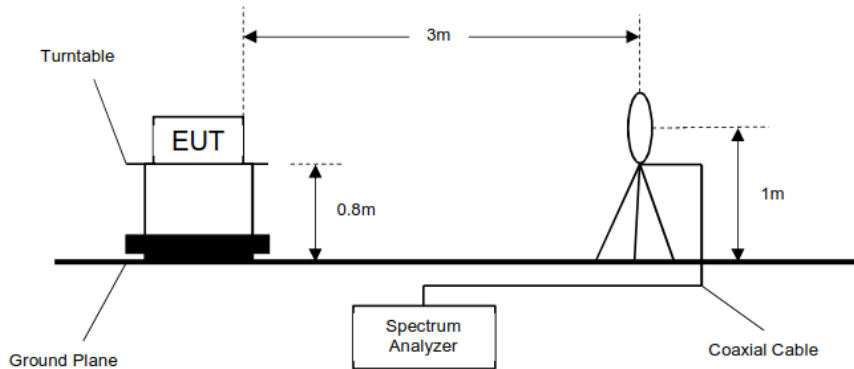


Below 1GHz

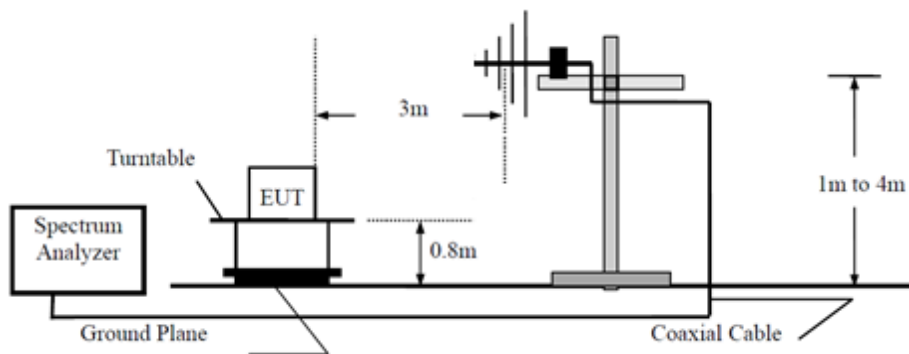


Above 1GHz

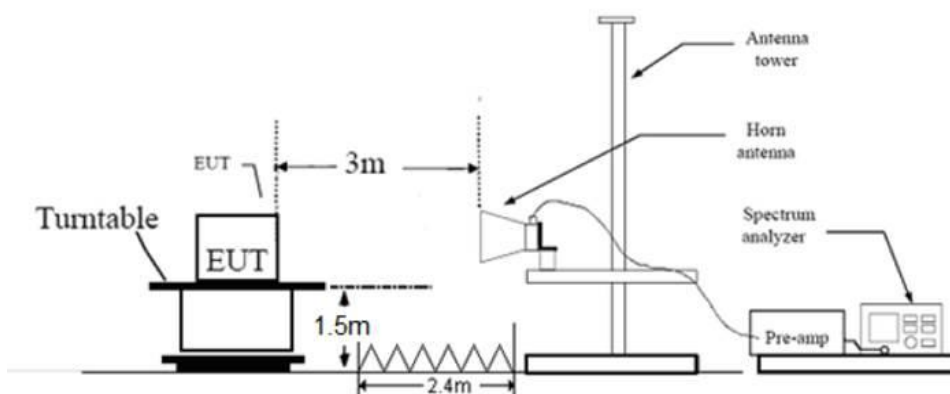

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

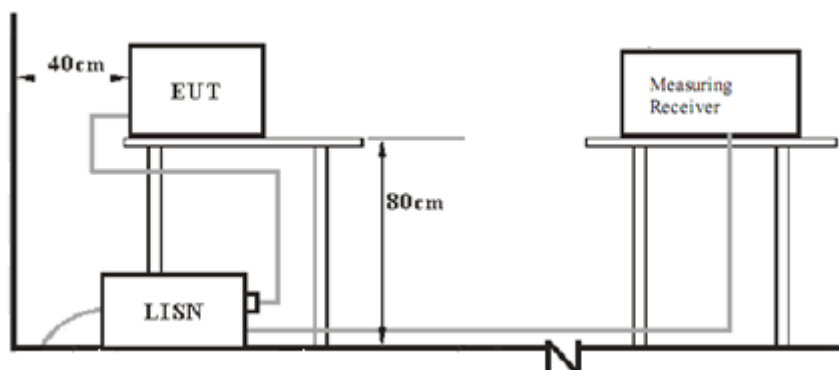

8 Systems test configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model no.	S/N
COMPUTER	HP	HP PROBOOK 455 15.6 INCH G9 NOTEBOOK PC	5CD302CY5H
ADAPTOR	HP	TPN-CA16	L25298-002

Test software information:

Test Software Version	BouffaloLabDevCube-v1.8.2.101	
Modulation	Setting TX Power	Packet Type
OQPSK	CH L: 12dBm CH M: 12dBm CH H: 12dBm	PRBS9

The system was configured to channel 11, 18, and 26 for the test.

9 Test environment condition

Ambient temperature	22~26 °C
Relative humidity	40%~55%
Atmospheric pressure	102 kPa

10 Technical Requirement

10.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : Smart Kit
 M/N : SK-Z102
 Operating Condition : Transmitting
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz

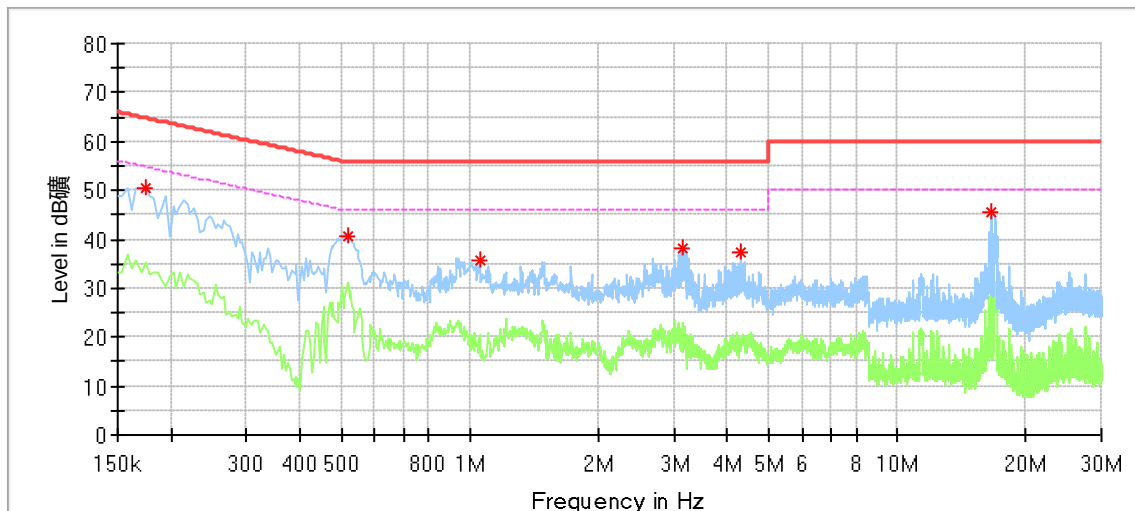

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.174000	50.46	---	64.77	14.31	L1	9.54
0.518000	40.76	---	56.00	15.24	L1	9.59
1.054000	35.63	---	56.00	20.37	L1	9.60
3.134000	37.96	---	56.00	18.04	L1	9.66
4.310000	37.18	---	56.00	18.82	L1	9.71
16.582000	45.54	---	60.00	14.46	L1	10.00

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Smart Kit
 M/N : SK-Z102
 Operating Condition : Transmitting
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz

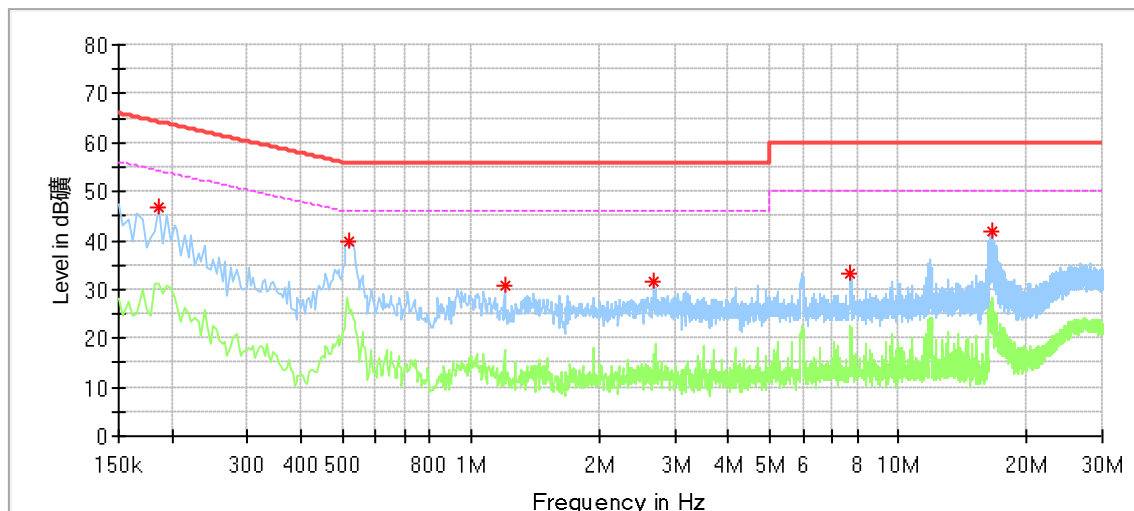

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.186000	46.67	---	64.21	17.54	N	9.57
0.518000	39.65	---	56.00	16.35	N	9.62
1.198000	30.89	---	56.00	25.11	N	9.63
2.674000	31.73	---	56.00	24.27	N	9.67
7.730000	33.06	---	60.00	26.94	N	9.89
16.570000	41.82	---	60.00	18.18	N	9.98

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

10.2 Conducted peak output power & EIRP

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

According to §15.247 (b) (3), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30


According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 4	≤ 36.2

Test Results

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		EIRP (dBm)		Verdict
			Result	Limit	Result	Limit	
Zigbee	SISO	2405	11.76	≤ 30	15.37	≤ 36.2	Pass
		2440	11.37	≤ 30	14.98	≤ 36.2	Pass
		2480	10.93	≤ 30	14.54	≤ 36.2	Pass

Test Graphs

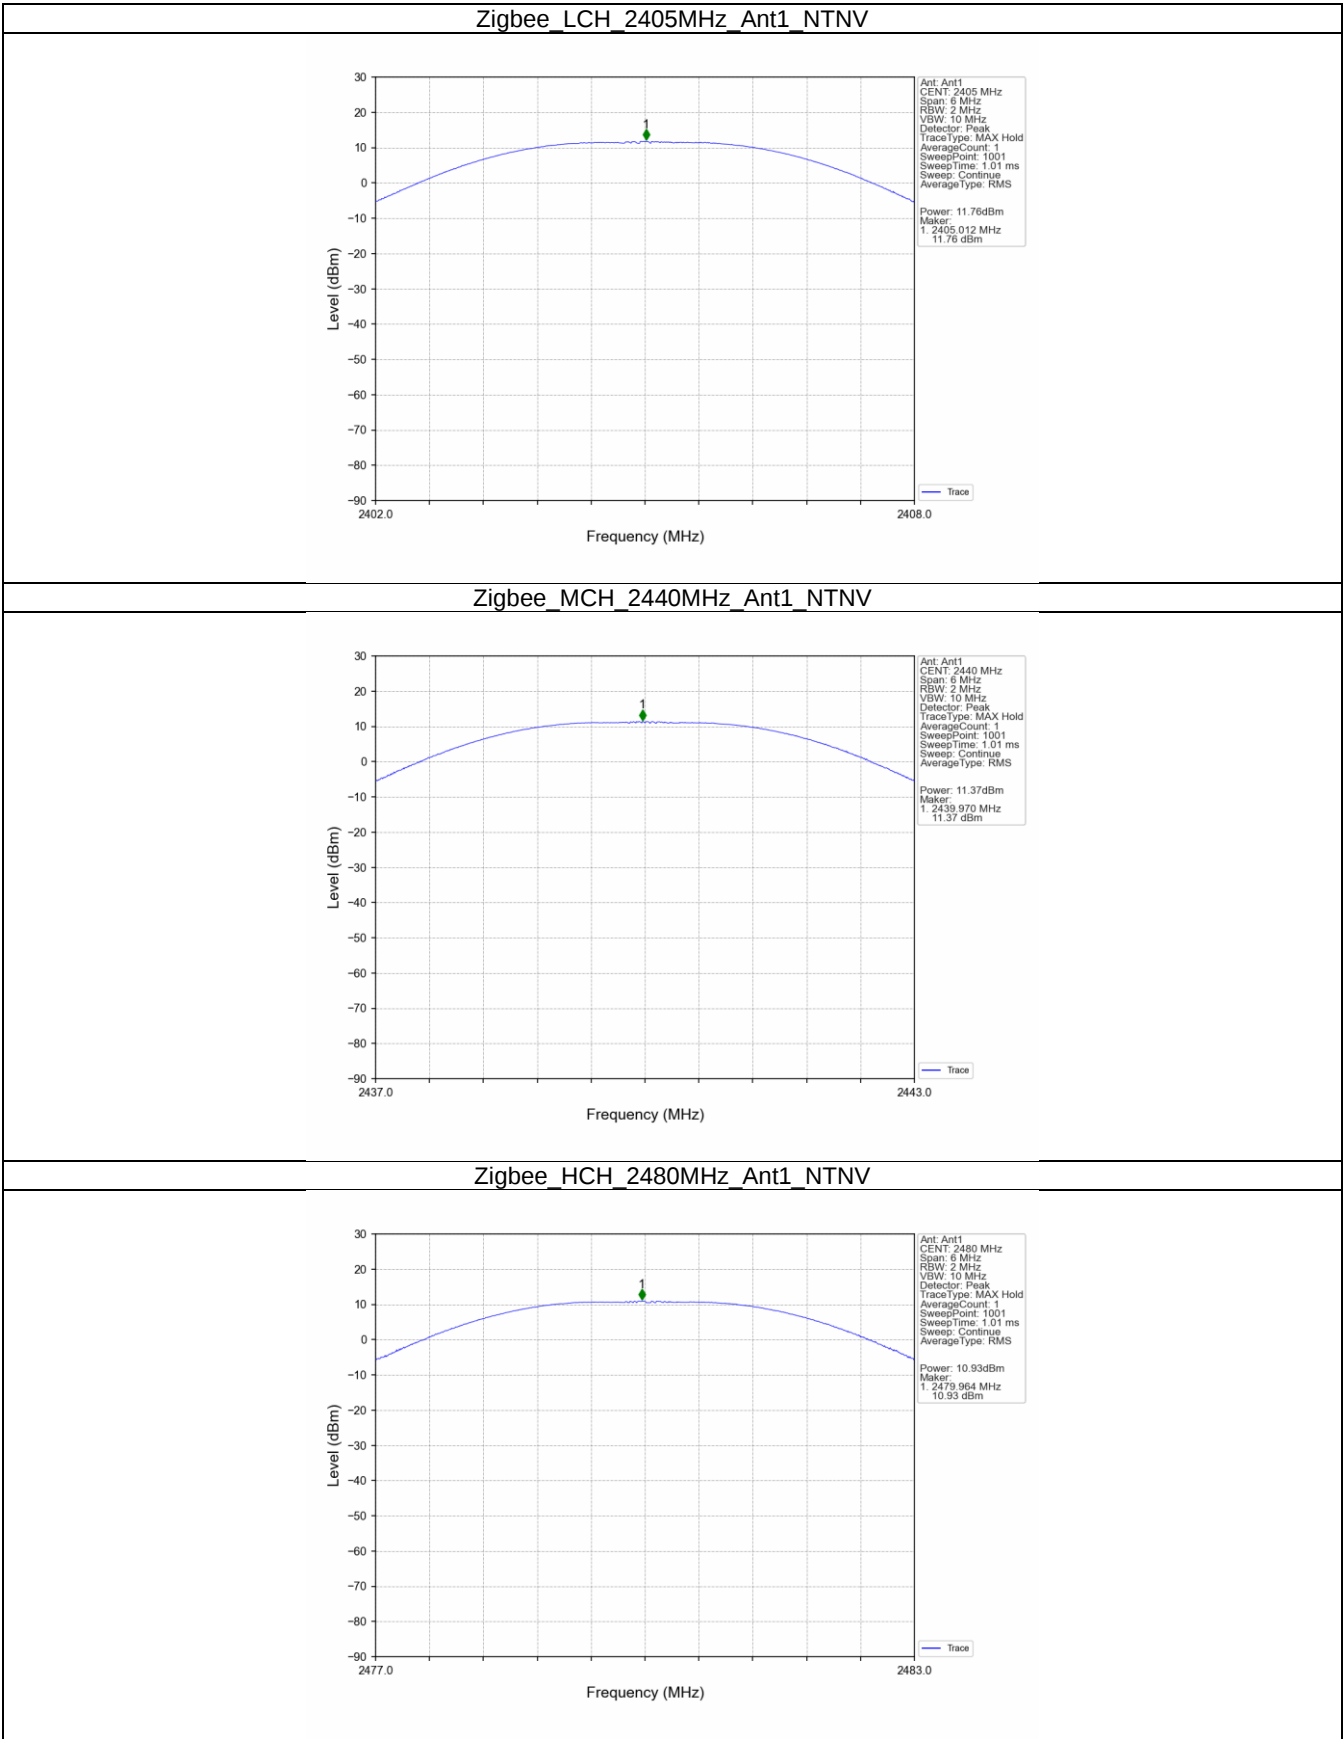

10.36dB bandwidth

Test Method

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

Limit [kHz]


≥ 500

Test Results


Mode	TX Type	Frequency (MHz)	6dB Bandwidth (MHz)		Verdict
			Result	Limit	
Zigbee	SISO	2405	1.238	≥ 0.5	Pass
		2440	1.230	≥ 0.5	Pass
		2480	1.236	≥ 0.5	Pass

Test Graphs


Zigbee_LCH_2405MHz_Ant1_NTNV

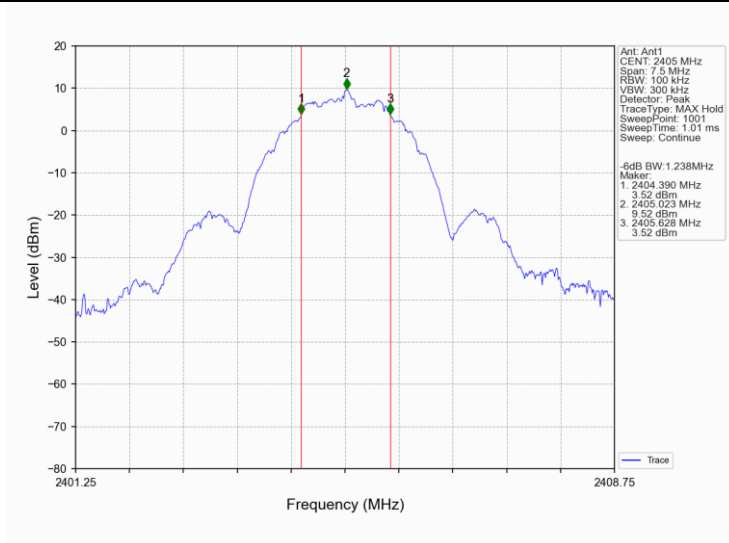

Zigbee_MCH_2440MHz_Ant1_NTNV

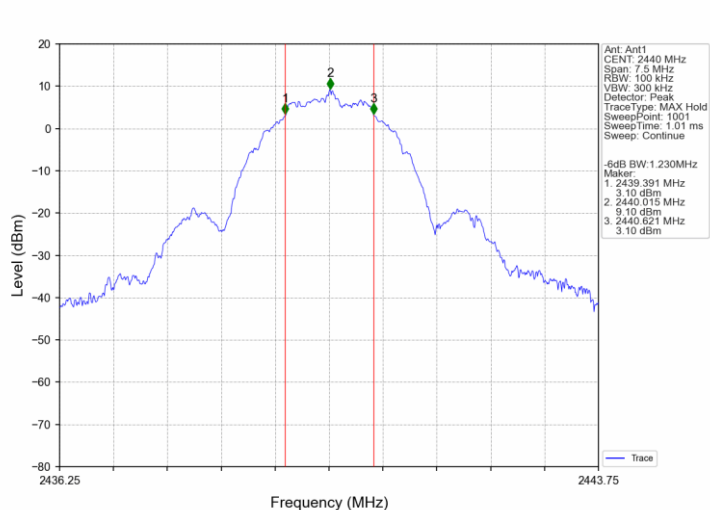

Zigbee_HCH_2480MHz_Ant1_NTNV

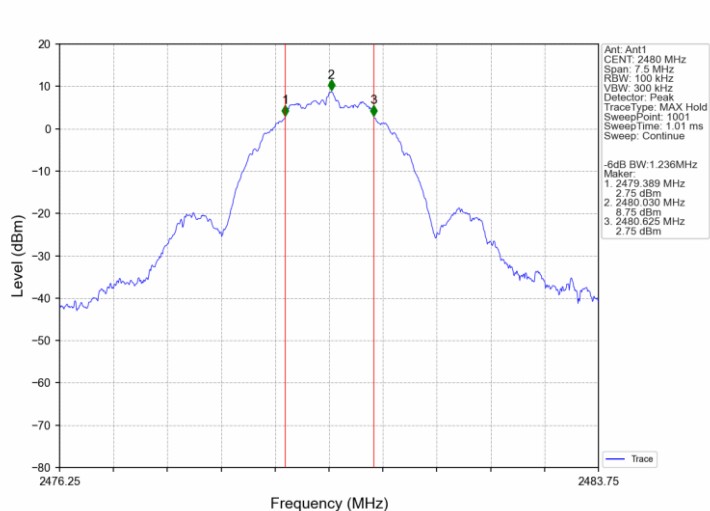

10.499% bandwidth

Test Method

- 1. Connect EUT test port to spectrum analyzer.
Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW≥3RBW, Sweep = auto,
Detector function = peak, Trace = max hold
- 2. Use the occupied bandwidth measurement capability of test receiver.
- 3. Allow the trace to stabilize, record the occupied bandwidth value.

Limit

Limit [kHz]


--

Test result


Mode	TX Type	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
			Result	Limit	
Zigbee	SISO	2405	2.222	/	Pass
		2440	2.222	/	Pass
		2480	2.224	/	Pass

Test Graphs


Zigbee_LCH_2405MHz_Ant1_NTNV

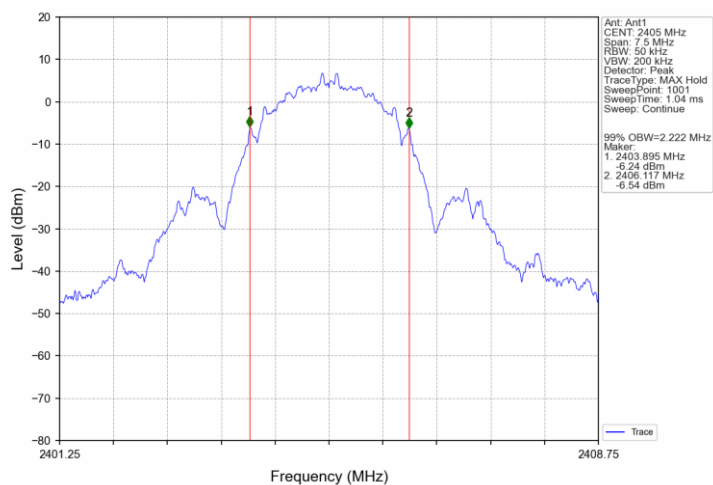

Zigbee_MCH_2440MHz_Ant1_NTNV

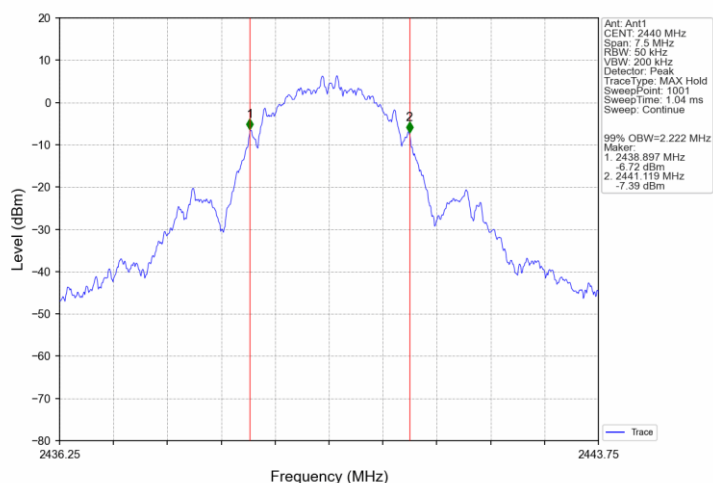

Zigbee_HCH_2480MHz_Ant1_NTNV

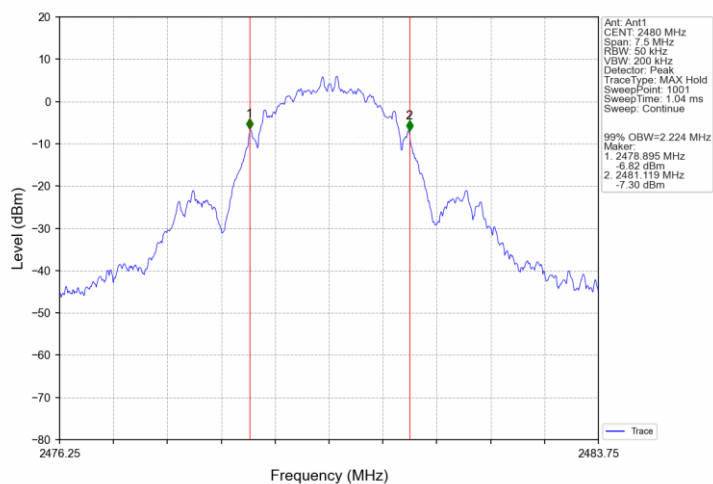

10.5 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3kHz]


≤ 8

Test Results


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			Result	Limit	
Zigbee	SISO	2405	-2.43	≤ 8	Pass
		2440	-2.41	≤ 8	Pass
		2480	-2.90	≤ 8	Pass

Test Graphs


Zigbee_LCH_2405MHz_Ant1_NTNV

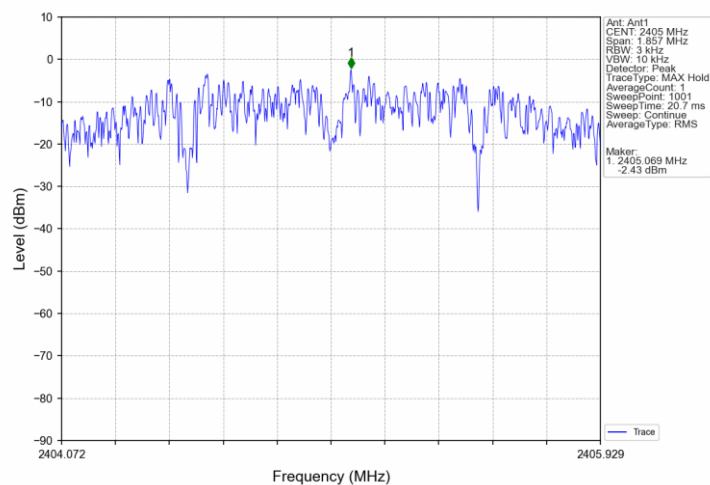

Zigbee_MCH_2440MHz_Ant1_NTNV

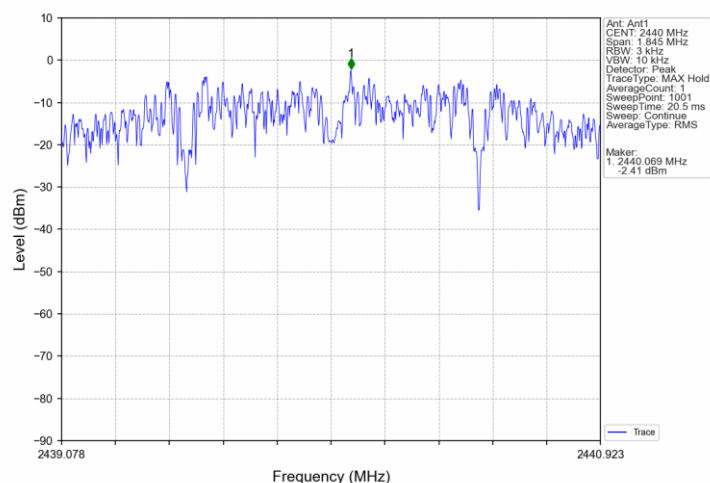

Zigbee_HCH_2480MHz_Ant1_NTNV

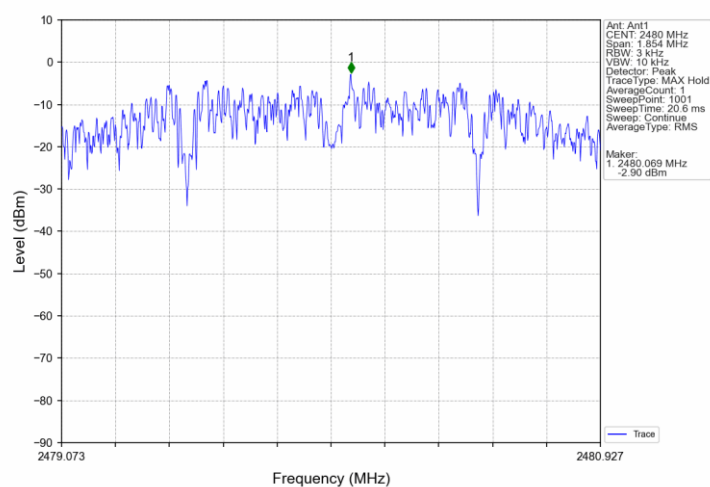

10.6 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Test Results


Mode	Tx Type	Frequency (MHz)	Level of Reference (dBm)	Limit (dBm)	Verdict
Zigbee	SISO	2405	11.35	-8.65	Pass
		2440	11.10	-8.90	Pass
		2480	10.71	-9.29	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.					

Test Graphs

Level of Reference

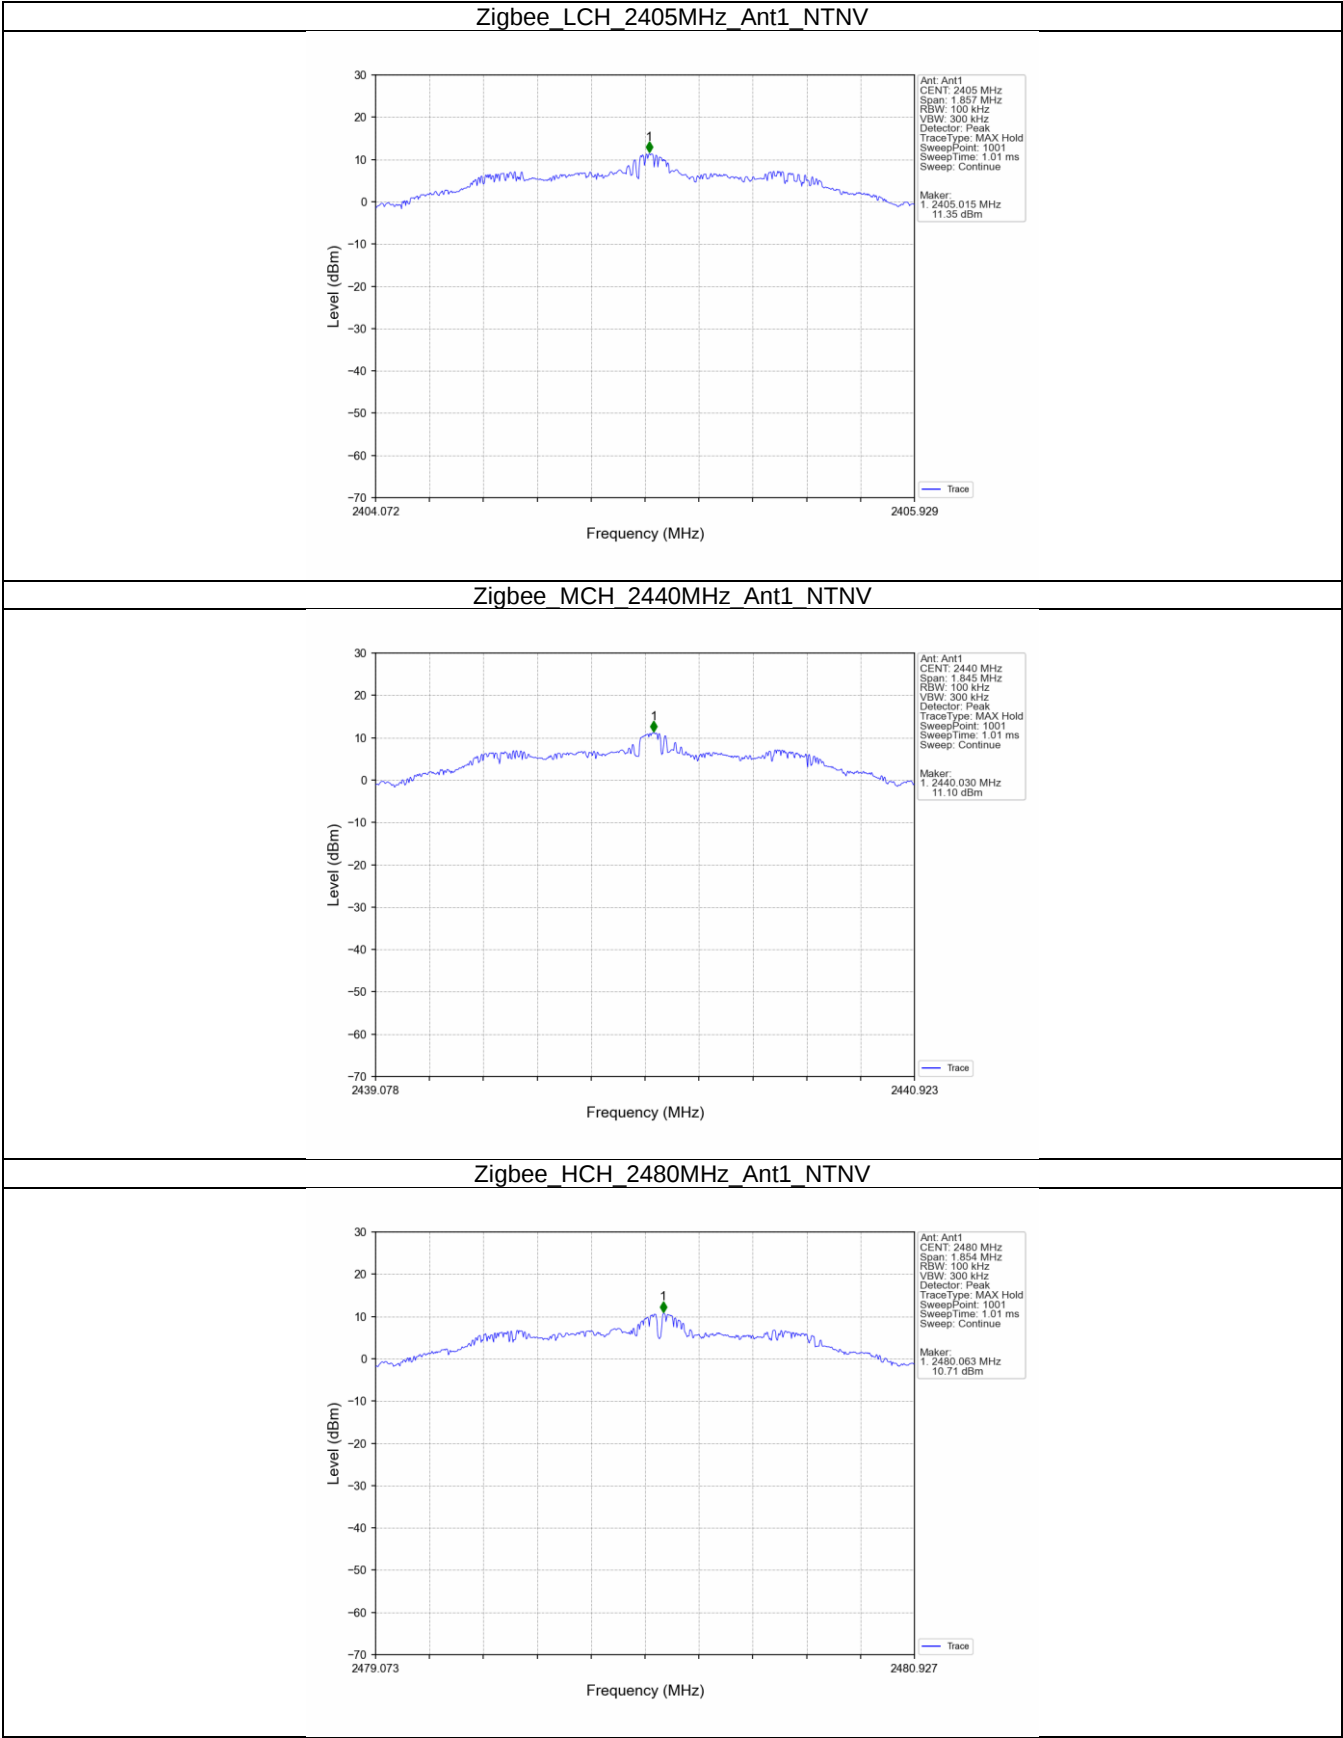

Conducted Spurious Emissions

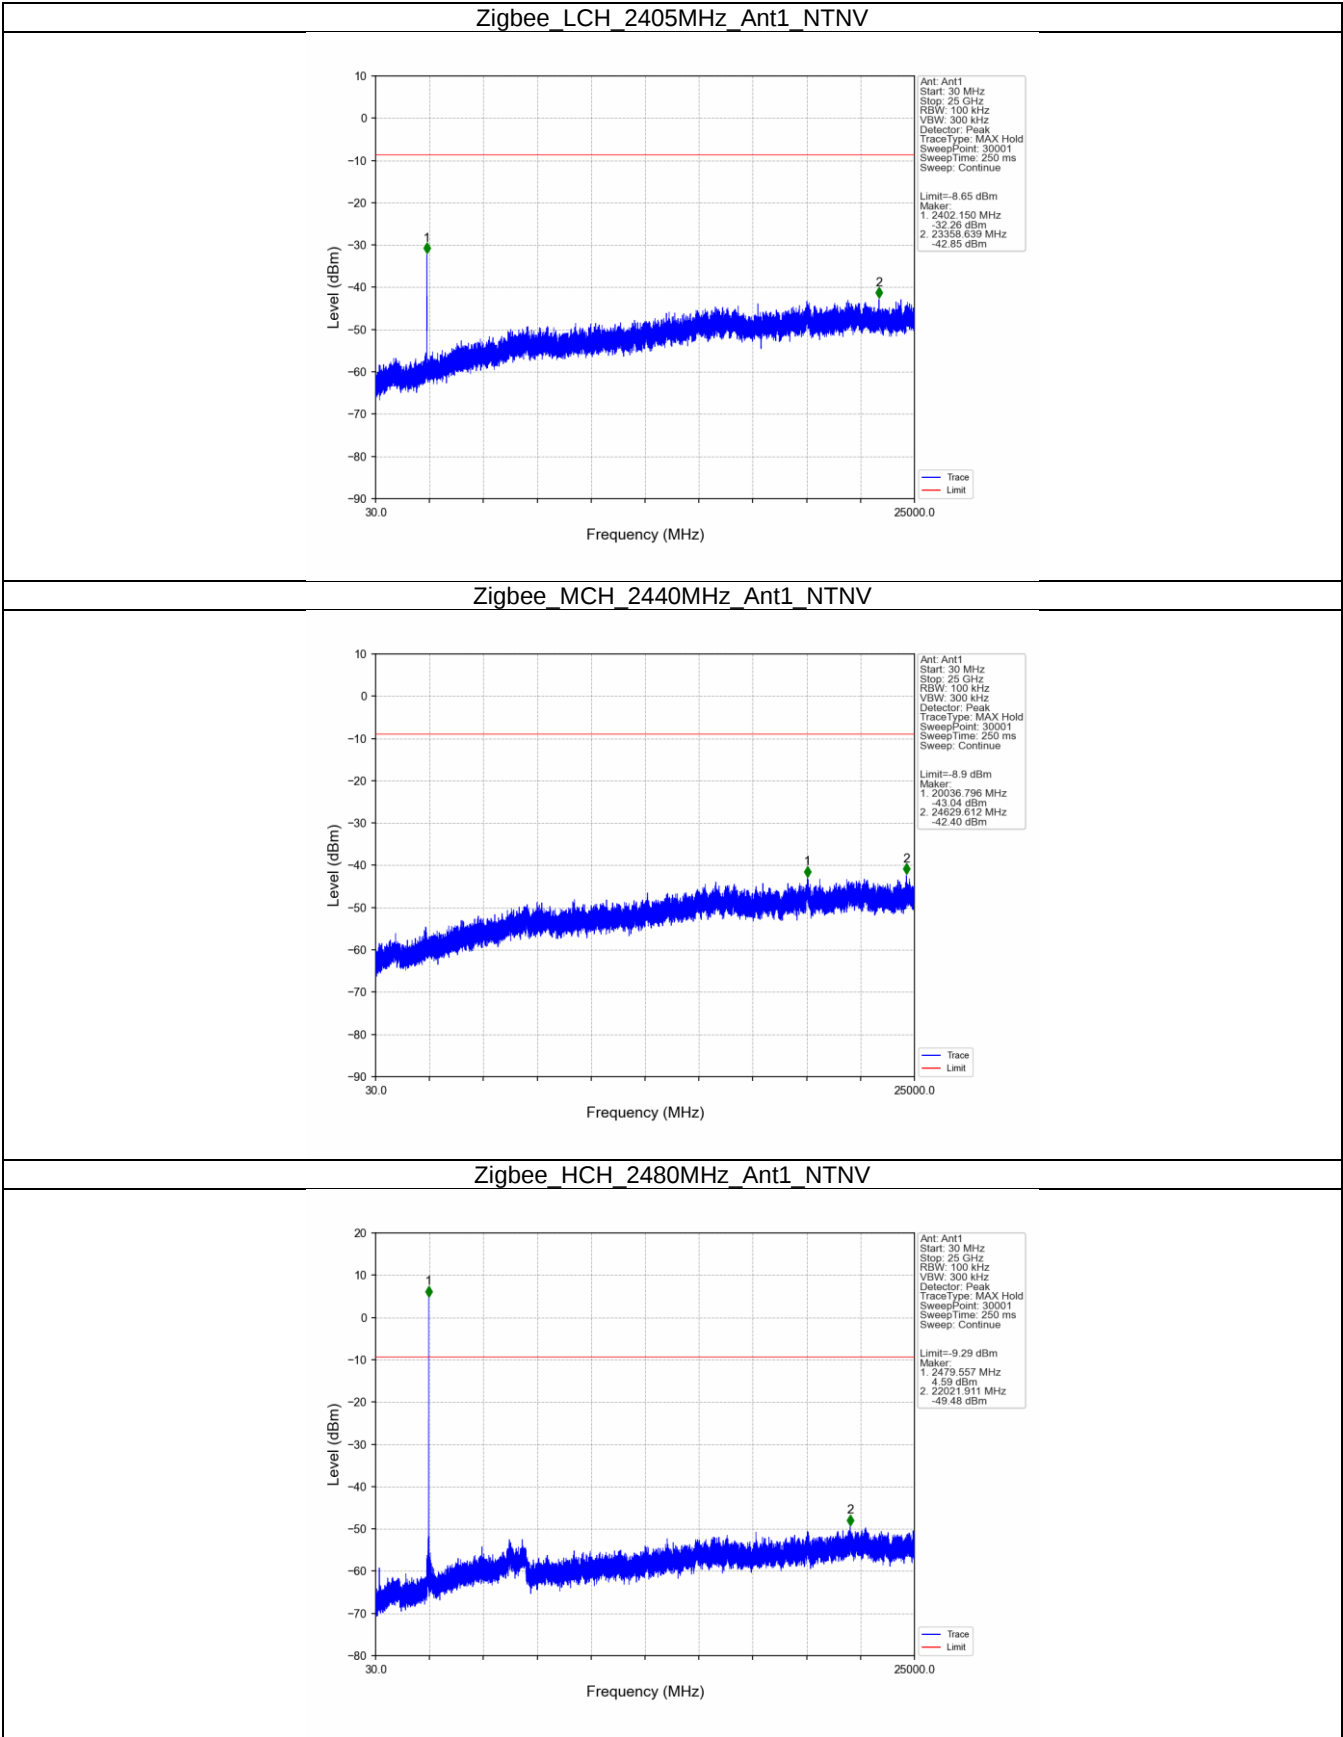

10.7 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test Results

Mode	TX Type	Frequency (MHz)	Level of Reference (dBm)	Limit (dBm)	Verdict
Zigbee	SISO	2405	11.35	-8.65	Pass
		2480	10.71	-9.29	Pass

Test Graphs

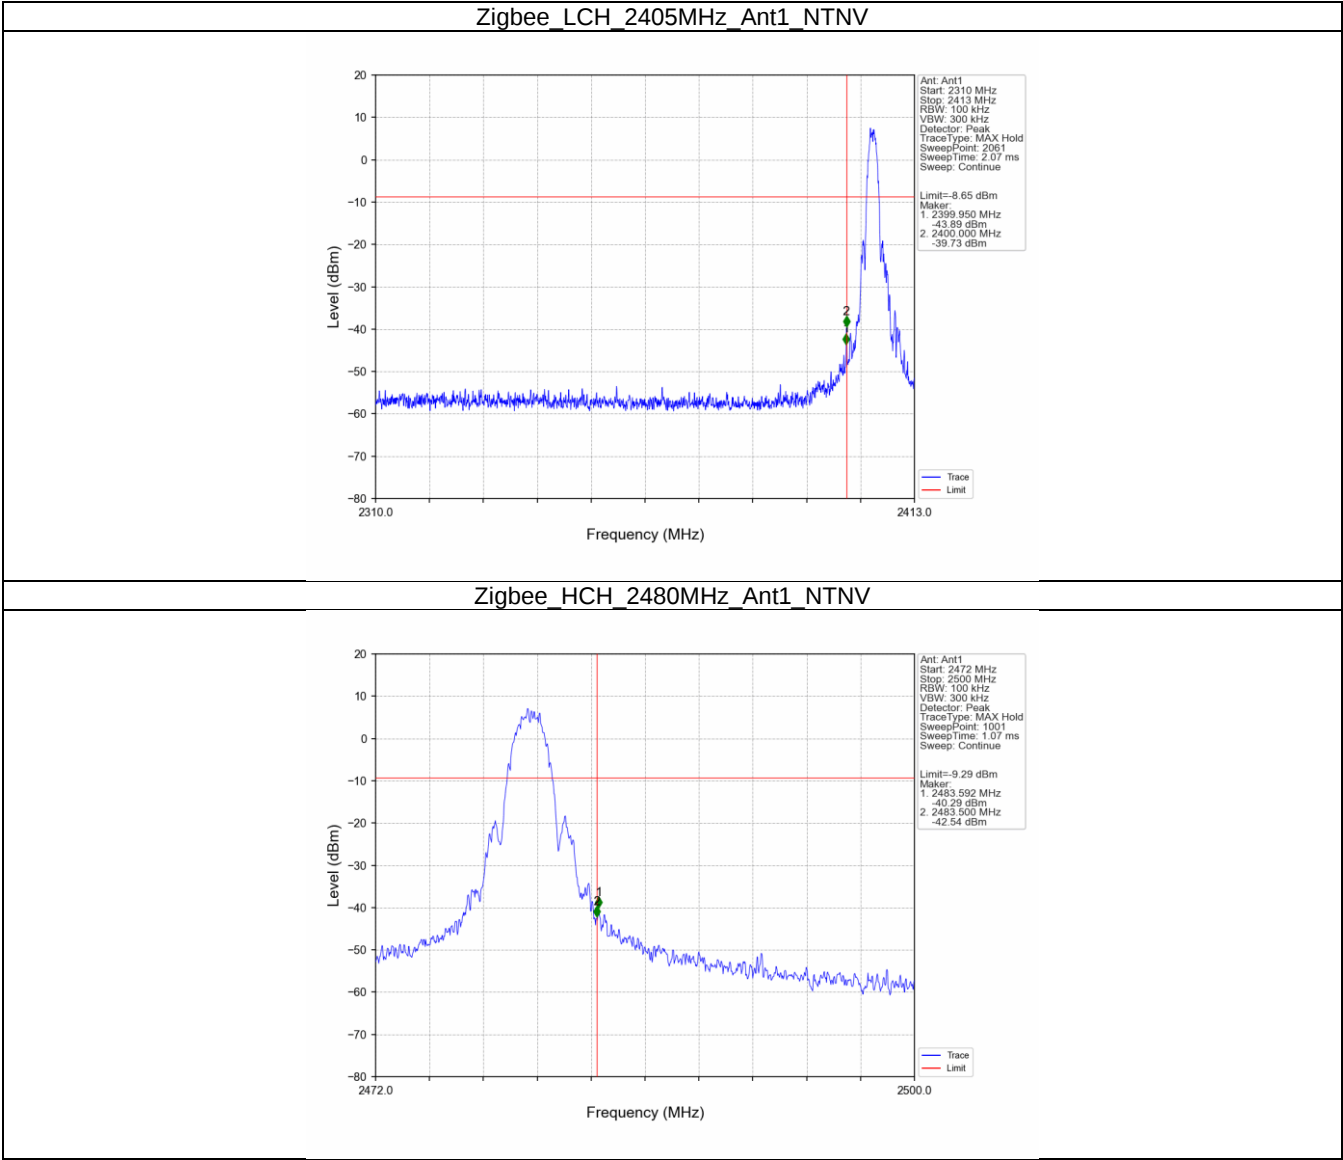

10.8 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 3) Procedures for average unwanted emissions measurements above 1000 MHz
 - a) RBW = 1MHz.
 - b) $VBW \geq 3 \times RBW$
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq RBW / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty

cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission(AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit 3m(dB $\mu\text{V/m}$)=Limit 300m(dB $\mu\text{V/m}$)+40Log(300m/3m) (Below 30MHz)


Note 2: Limit 3m(dB $\mu\text{V/m}$)=Limit 30m(dB $\mu\text{V/m}$)+40Log(30m/3m) (Below 30MHz)

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


Transmitting spurious emission test result as below:

Spurious radiated emissions for 2405MHz (9kHz – 30MHz)(worst case)

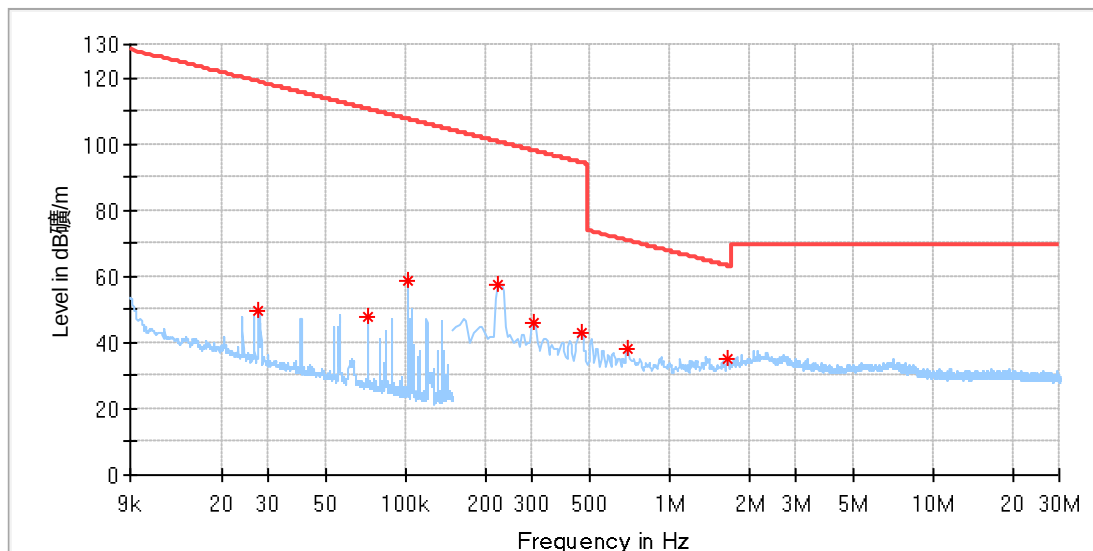

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027659	49.44	118.75	69.31	H	245.0	19.93
0.072027	47.48	110.45	62.96	H	0.0	19.94
0.101590*	58.49	107.46	48.97	H	125.0	19.95
0.224625	57.57	100.57	43.00	H	357.0	19.91
0.304225	46.11	97.94	51.83	H	197.0	19.94
0.463425	43.11	94.28	51.17	H	128.0	19.95
0.697250	38.10	70.74	32.64	H	128.0	20.00
1.657425	35.01	63.22	28.20	H	359.0	20.03

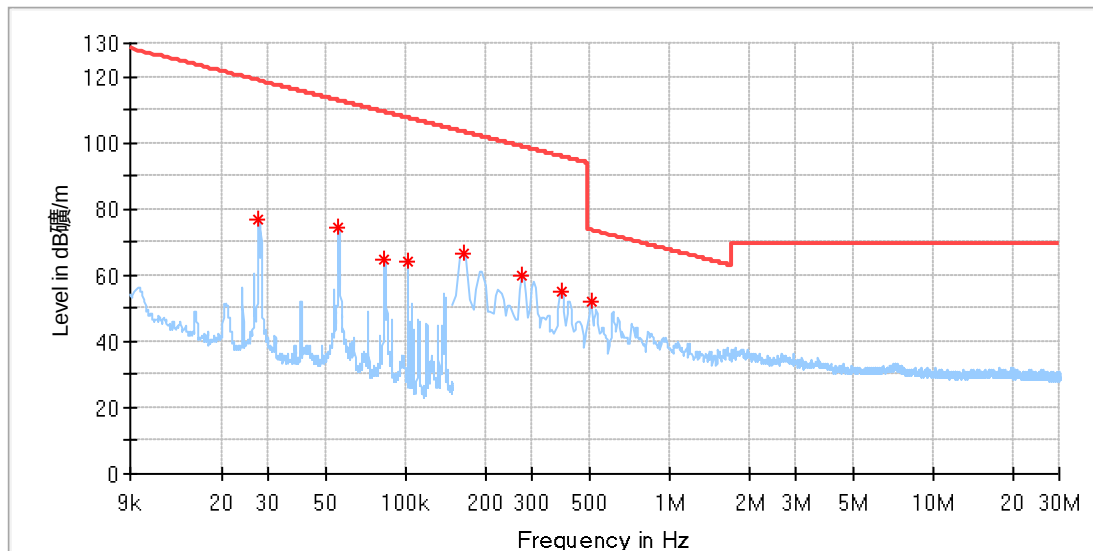

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027706	76.74	118.74	42.00	V	69.0	19.93
0.055389	74.53	112.73	38.20	V	53.0	19.96
0.083166	64.70	109.20	44.50	V	109.0	19.95
0.101637*	64.12	107.46	43.34	V	317.0	19.95
0.164925	66.65	103.25	36.61	V	302.0	19.92
0.274375	59.60	98.83	39.24	V	285.0	19.93
0.388800	54.84	95.81	40.97	V	122.0	19.94
0.503225*	51.91	73.57	21.66	V	182.0	19.95

Spurious radiated emissions for 2405MHz (30MHz – 1GHz)(worst case)

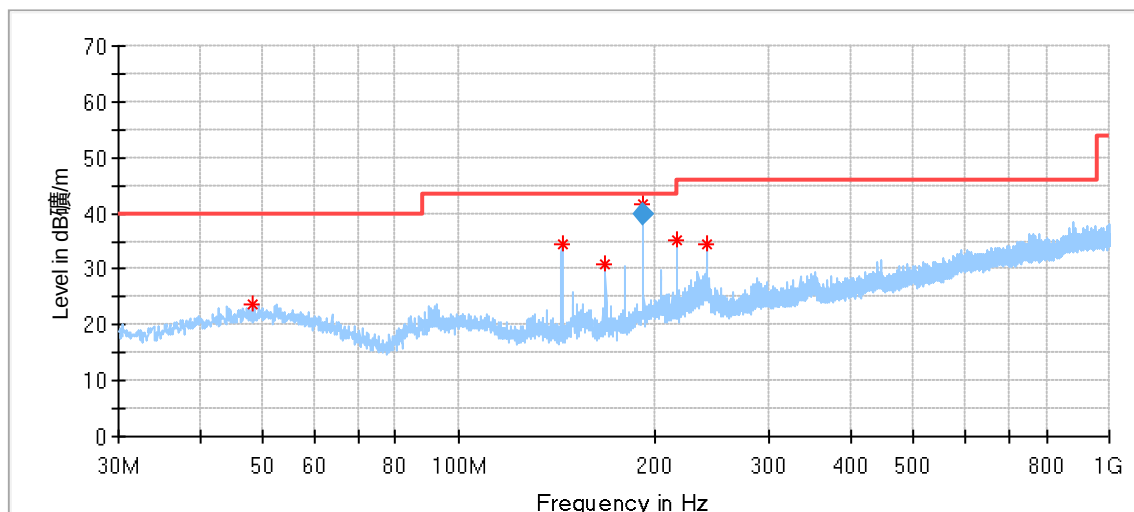


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.160556	23.67	40.00	16.33	200.0	H	119.0	18.03
144.082778	34.29	43.50	9.21	200.0	H	183.0	12.45
168.225000*	30.86	43.50	12.64	200.0	H	155.0	13.57
192.205556	41.49	43.50	2.01	200.0	H	183.0	15.82
216.240000	35.16	46.00	10.84	200.0	H	356.0	16.07
240.328333*	34.56	47.00	12.44	200.0	H	356.0	17.48

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
192.205556	39.80	43.50	3.70	200.0	H	183.0	15.82

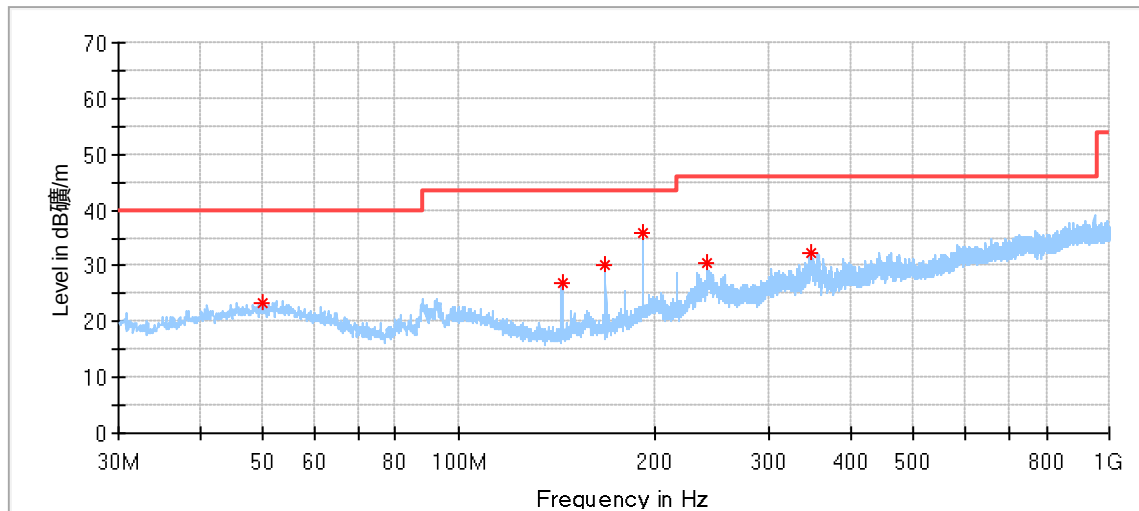

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.992778	23.45	40.00	16.55	200.0	V	150.0	18.14
144.136667	27.03	43.50	16.47	200.0	V	40.0	12.45
168.171111*	30.10	43.50	13.40	100.0	V	184.0	13.57
192.205556	35.89	43.50	7.61	100.0	V	203.0	15.82
240.220556*	30.36	46.00	15.64	200.0	V	261.0	17.48
348.645000	32.37	46.00	13.63	100.0	V	267.0	20.46

Spurious radiated emissions for 2405MHz (1GHz-18GHz)

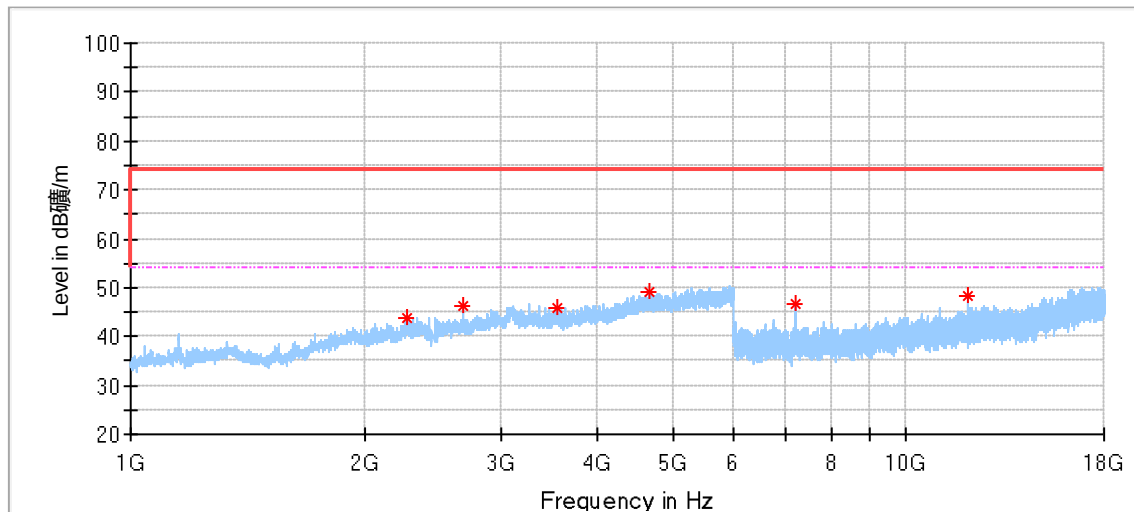

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2277.500000*	43.87	74.00	30.13	150.0	H	4.0	-3.18
2688.500000	46.29	74.00	27.71	150.0	H	353.0	-2.03
3545.000000	45.96	74.00	28.04	150.0	H	75.0	0.77
4670.500000*	49.05	74.00	24.95	150.0	H	64.0	4.32
7216.500000	46.73	74.00	27.27	150.0	H	119.0	9.86
12022.000000*	48.12	74.00	25.88	150.0	H	56.0	16.17

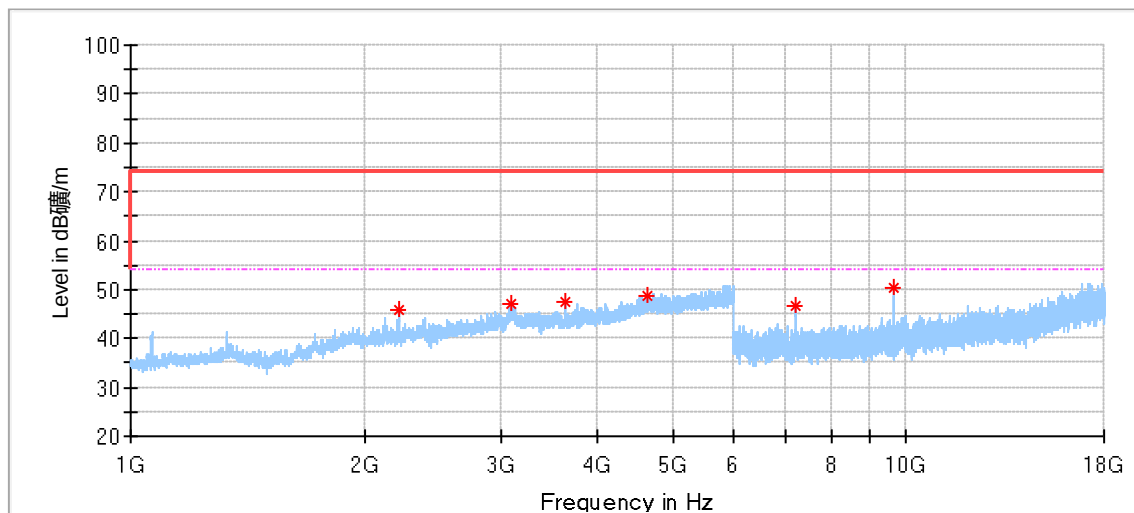

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2220.000000*	45.86	74.00	28.14	150.0	V	239.0	-3.84
3098.000000	47.24	74.00	26.76	150.0	V	64.0	1.50
3642.500000*	47.68	74.00	26.32	150.0	V	259.0	0.43
4641.000000*	48.67	74.00	25.33	150.0	V	229.0	4.27
7213.500000	46.79	74.00	27.21	150.0	V	181.0	9.87
9621.500000	50.18	74.00	23.82	150.0	V	181.0	12.72

Spurious radiated emissions for 2440MHz (1GHz-18GHz)

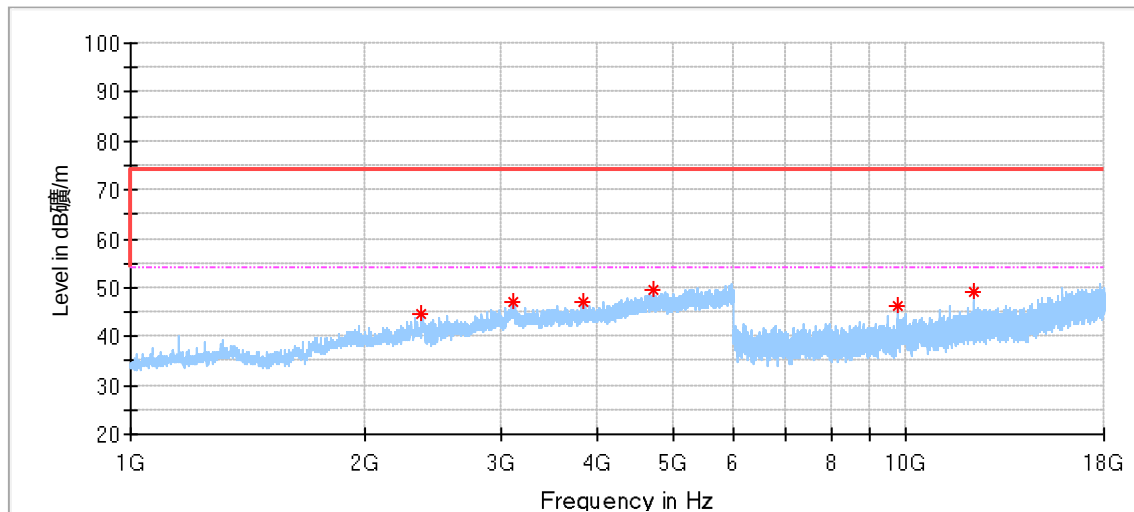

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2368.000000*	44.48	74.00	29.52	150.0	H	314.0	-2.66
3108.000000	47.01	74.00	26.99	150.0	H	170.0	1.30
3842.500000*	47.23	74.00	26.77	150.0	H	78.0	1.23
4726.000000*	49.41	74.00	24.59	150.0	H	211.0	4.30
9758.000000	46.19	74.00	27.81	150.0	H	4.0	13.98
12197.000000*	49.02	74.00	24.98	150.0	H	241.0	15.96

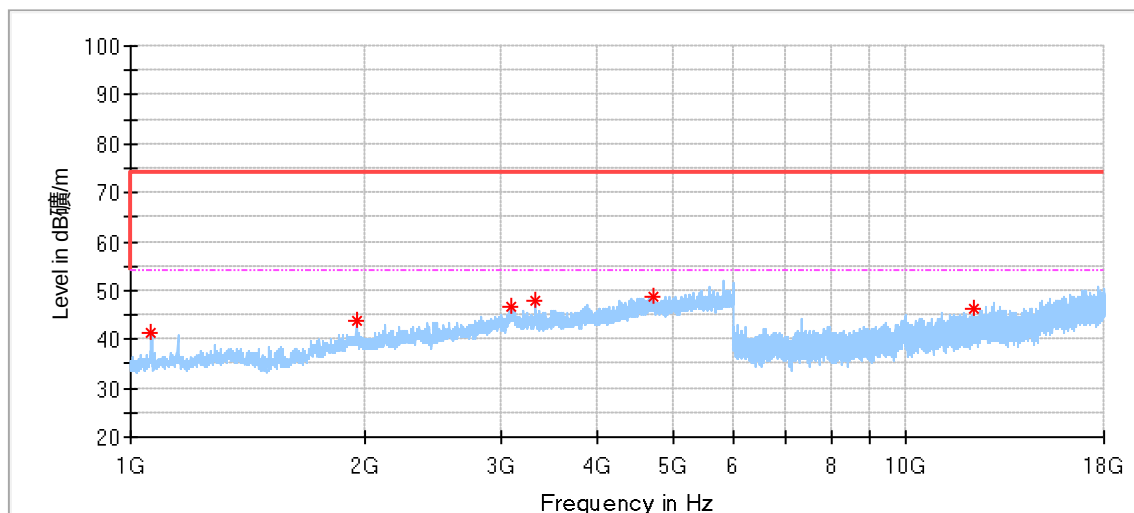

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.000000*	41.27	74.00	32.73	150.0	V	168.0	-10.08
1952.500000	43.60	74.00	30.40	150.0	V	65.0	-4.15
3087.000000	46.69	74.00	27.31	150.0	V	305.0	1.07
3332.500000*	48.10	74.00	25.90	150.0	V	76.0	0.13
4719.000000*	48.91	74.00	25.09	150.0	V	6.0	4.31
12216.000000*	46.39	74.00	27.61	150.0	V	328.0	16.01

Spurious radiated emissions for 2480MHz (1GHz-18GHz)

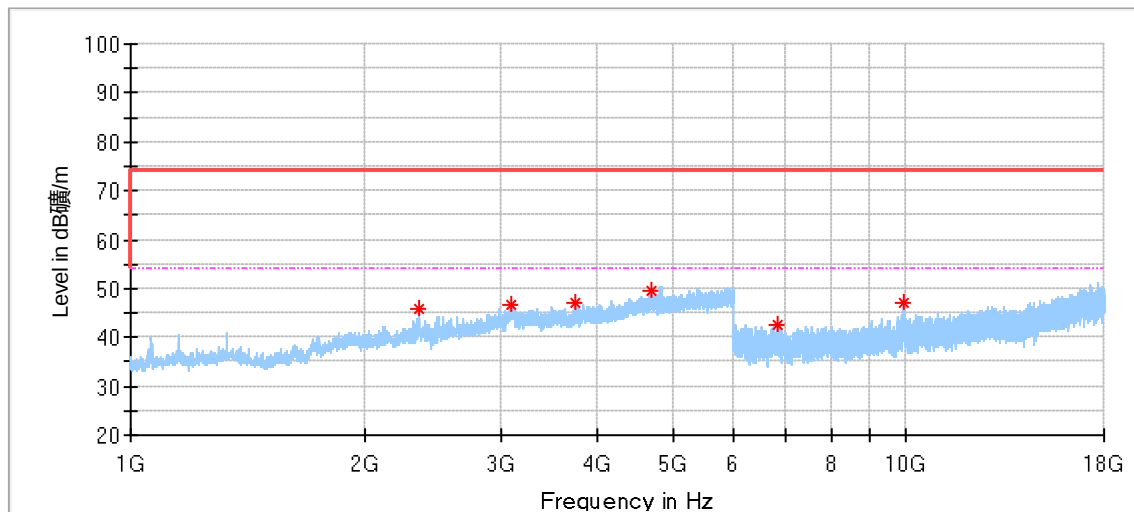

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2350.500000*	45.84	74.00	28.16	150.0	H	356.0	-2.78
3094.000000	46.71	74.00	27.29	150.0	H	337.0	1.35
3749.000000*	47.00	74.00	27.00	150.0	H	152.0	0.78
4703.000000*	49.73	74.00	24.27	150.0	H	152.0	4.35
6845.500000	42.50	74.00	31.50	150.0	H	117.0	9.97
9922.000000	47.25	74.00	26.75	150.0	H	305.0	14.12

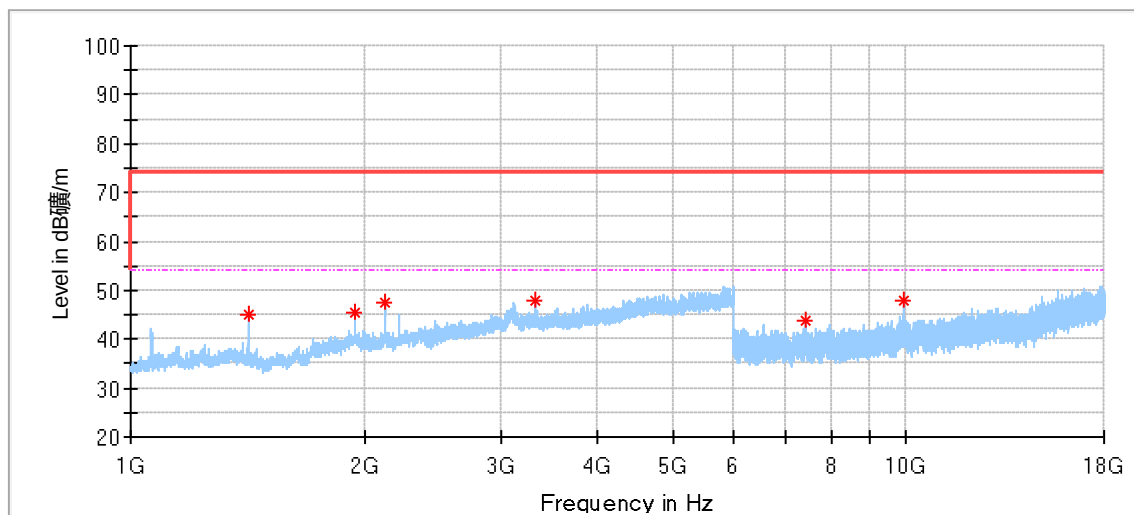

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1419.000000*	44.97	74.00	29.03	150.0	V	38.0	-8.92
1948.500000	45.44	74.00	28.56	150.0	V	182.0	-4.16
2133.000000	47.32	74.00	26.68	150.0	V	182.0	-3.84
3332.000000*	47.80	74.00	26.20	150.0	V	336.0	0.13
7441.000000*	43.86	74.00	30.14	150.0	V	181.0	10.04
9918.000000	47.95	74.00	26.05	150.0	V	28.0	14.09

Restricted-band band-edge

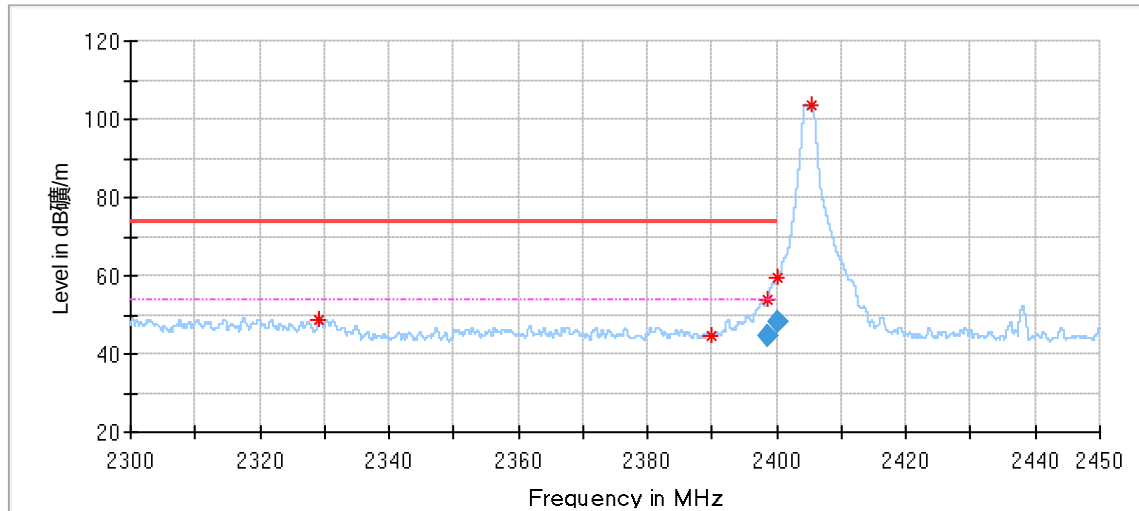


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2329.265000*	48.84	74.00	25.16	150.0	H	276.0	-2.32
2390.000000*	44.81	74.00	29.19	150.0	H	104.0	-1.74
2398.430000	53.61	74.00	20.39	150.0	H	349.0	-1.59
2399.990000	59.73	74.00	14.27	150.0	H	349.0	-1.56
2405.420000	103.72	---	---	150.0	H	287.0	-1.50


Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2398.430000	44.56	54.00	9.44	150.0	H	349.0	-1.59
2399.990000	48.38	54.00	5.62	150.0	H	349.0	-1.56

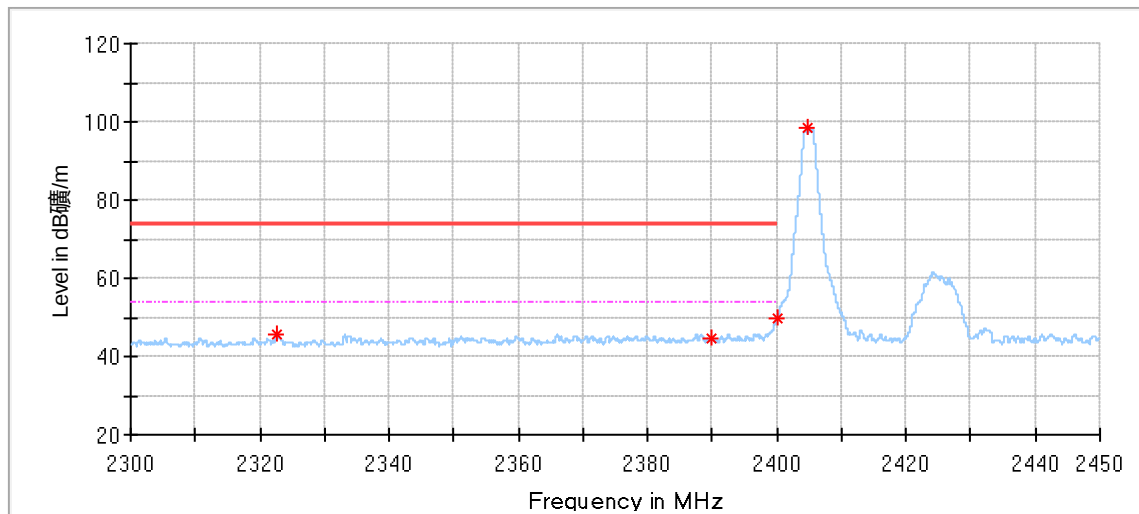

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2322.755000*	45.86	74.00	28.14	150.0	V	298.0	-2.29
2390.000000*	44.72	74.00	29.28	150.0	V	63.0	-1.74
2399.960000	49.88	74.00	24.12	150.0	V	214.0	-1.56
2404.850000	98.43	---	---	150.0	V	359.0	-1.50

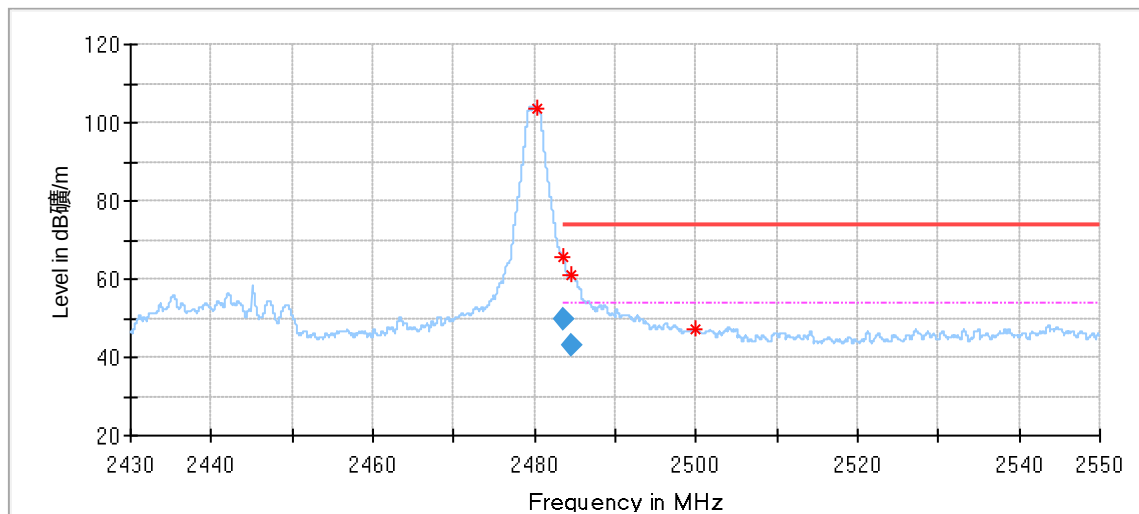


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2480.244000	103.70	---	---	150.0	H	328.0	-1.80	---
2483.508000*	65.88	74.00	8.12	150.0	H	338.0	-1.85	---
2484.636000*	61.28	74.00	12.72	150.0	H	338.0	-1.87	---
2499.996000*	46.93	74.00	27.07	150.0	H	305.0	-2.08	---

Final_Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2483.508000*	49.61	54.00	4.39	150.0	H	338.0	-1.85	---
2484.636000*	43.21	54.00	10.79	150.0	H	338.0	-1.87	---

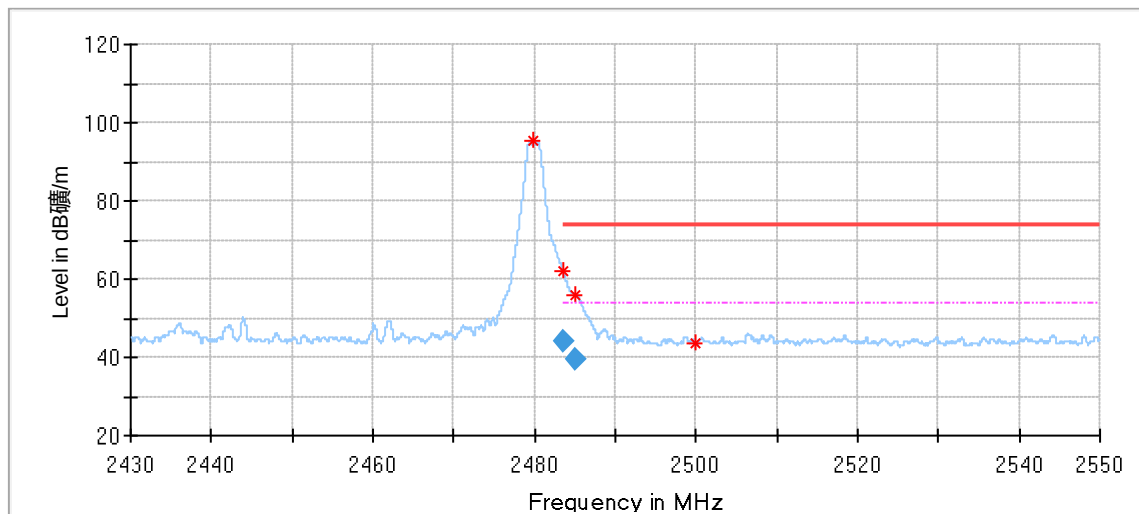


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.860000	95.38	---	---	150.0	V	296.0	-1.80
2483.508000*	62.14	74.00	11.86	150.0	V	31.0	-1.85
2485.080000*	56.08	74.00	17.92	150.0	V	31.0	-1.87
2500.008000	43.56	74.00	30.44	150.0	V	180.0	-2.08

Final_Result


Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.508000*	43.85	54.00	10.15	150.0	V	31.0	-1.85
2485.080000*	39.39	54.00	14.61	150.0	V	31.0	-1.87

Spurious radiated emissions for 2405MHz (18GHz – 26.5GHz)(worst case)

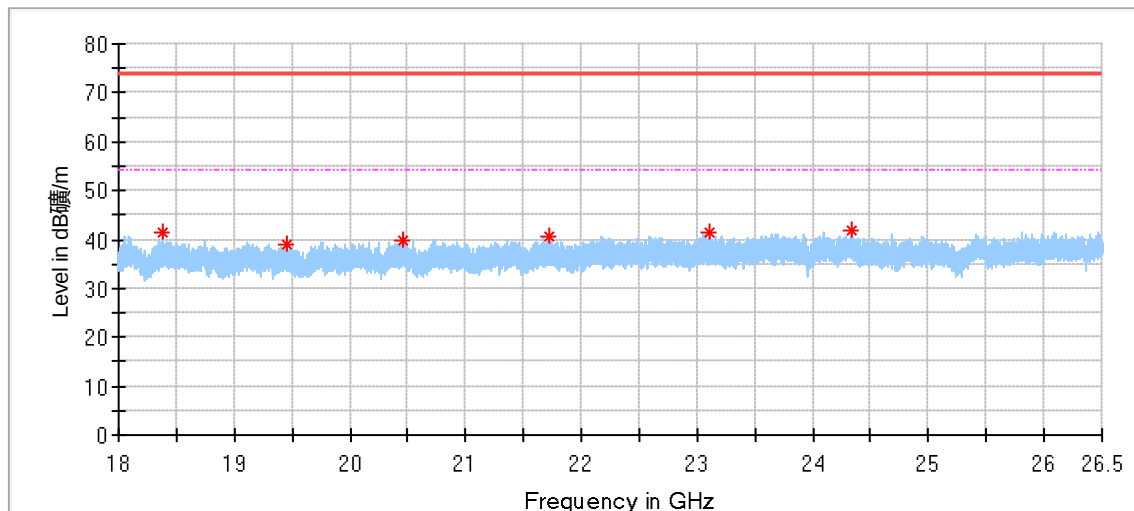

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18383.296875*	41.39	74.00	32.61	150.0	H	108.0	-4.52
19445.531250*	38.96	74.00	35.04	150.0	H	271.0	-4.12
20450.125000*	39.81	74.00	34.19	150.0	H	163.0	-3.12
21720.343750	40.77	74.00	33.23	150.0	H	335.0	-1.73
23105.312500*	41.52	74.00	32.48	150.0	H	283.0	-0.61
24342.062500	41.66	74.00	32.34	150.0	H	37.0	-0.18

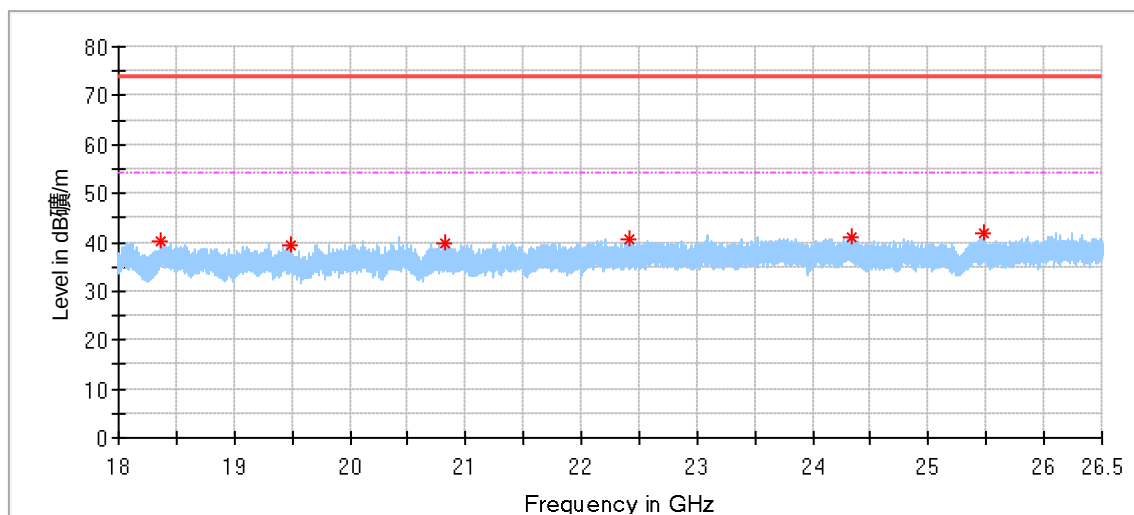

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18360.718750*	40.25	74.00	33.75	150.0	V	61.0	-4.54
19483.781250*	39.36	74.00	34.64	150.0	V	73.0	-4.10
20822.000000*	39.63	74.00	34.37	150.0	V	227.0	-2.63
22416.546875*	40.65	74.00	33.35	150.0	V	4.0	-0.95
24337.281250	41.10	74.00	32.90	150.0	V	98.0	-0.17
25486.906250	41.93	74.00	32.07	150.0	V	4.0	0.50

Remark:

- (1) "*" means the emission(s) appear within the restrict bands shall follow the requirement of § 15.205 and RSS-Gen section 8.10.
- (2) Level=Reading Level + Correction Factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

11 Test Equipment List

Conducted Emission Test (AMN)(CSR #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2025-5-13
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2025-5-12
LISN	Rohde & Schwarz	ENV4200	68-4-87-14-001	100249	1	2025-5-13
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2025-5-11
Cable	OUQIAO	RG142	68-4-90-19-005-A20	----	----	----
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2025-5-13
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2025-7-24
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2025-2-22
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2025-5-11
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-18GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2025-4-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2025-5-11

Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2025-5-11
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (18GHz-40GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2025-7-2
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2025-7-17
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Conducted Test (FCC Part15 C)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2025-5-11
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2025-5-11
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Test software	Tonscend	JS1120-3	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

12 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Conducted Emission in new shielding room (68-4-90-19-005) 150kHz-30MHz (for test using AMN ENV216)	3.14dB
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.69dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.96dB; Vertical: 6.10dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.40dB; Vertical: 5.40dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 18GHz-40GHz	5.29dB
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

---END OF TEST REPORT---