

FCC Test Report

Report No.: AGC01040240601FR02

FCC ID : 2AF9HCS300

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Cycling Computer

BRAND NAME : COOSPO

CS300, CS301, CS302, CS303, CS305, CS306, CS307, CS308,

MODEL NAME : CS309, CS310, CS320, CS330, CS350, CS360, CS370, CS380,

CS390

APPLICANT: Shenzhen CooSpo Tech Co., Ltd

DATE OF ISSUE : Jul. 18, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION : V 1

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 34

REPORT REVISE RECORD

Report Version	port Version Revise Time Issued Date Valid Version		Valid Version	Notes		
V1.0	V1.0 / Jul.		Valid	Initial Release		



TABLE OF CONTENTS


1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	€
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
2.8 DUTY CYCLE	8
3. TEST ENVIRONMENT	g
3.1 ADDRESS OF THE TEST LABORATORY	g
3.2 TEST FACILITY	g
3.3 ENVIRONMENTAL CONDITIONS	10
3.4 MEASUREMENT UNCERTAINTY	10
3.5 LIST OF EQUIPMENTS USED	11
4. SYSTEM TEST CONFIGURATION	13
4.1 EUT CONFIGURATION	13
4.2 EUT EXERCISE	13
4.3 CONFIGURATION OF TESTED SYSTEM	13
4.4 EQUIPMENT USED IN TESTED SYSTEM	13
4.5 SUMMARY OF TEST RESULTS	14
5. DESCRIPTION OF TEST MODES	15
6. 20 DB BANDWIDTH	16
6.1 MEASUREMENT PROCEDURE	16
6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	16
6.3 MEASUREMENT RESULTS	17
7. RADIATED EMISSION	18
7.1 LIMITS OF RADIATED EMISSION TEST	18
7.2 MEASUREMENT PROCEDURE	19
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	21
7.4 MEASUREMENT RESULT	22
8. AC POWER LINE CONDUCTED EMISSION TEST	30
8.1 MEASUREMENT LIMIT	30
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	

Web: http://www.agccert.com/



Page 4 of 34

ΑP	PENDIX B: PHOTOGRAPHS OF TEST EUT	. 34
ΑP	PENDIX A: PHOTOGRAPHS OF TEST SETUP	. 34
	8.5 MEASUREMENT RESULTS	. 31
	8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 3′
	8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 31





1. GENERAL INFORMATION

Applicant	Shenzhen CooSpo Tech Co., Ltd		
Address	Room 602, 1# building, Lingyun Factory, Liufang Road 2nd, Xingdong Community, Bao'an District, Shenzhen, Guangdong, China		
Manufacturer	Shenzhen CooSpo Tech Co., Ltd		
Address	Room 602, 1# building, Lingyun Factory, Liufang Road 2nd, Xingdong Community, Bao'an District, Shenzhen, Guangdong, China		
Factory	Shenzhen CooSpo Tech Co., Ltd		
Address	Room 602, 1# building, Lingyun Factory, Liufang Road 2nd, Xingdong Community, Bao'an District, Shenzhen, Guangdong, China		
Product Designation	Cycling Computer		
Brand Name	COOSPO		
Test Model	CS300		
Series Model(s)	CS301, CS302, CS303, CS305, CS306, CS307, CS308, CS309, CS310, CS320, CS330, CS350, CS360, CS370, CS380, CS390		
Difference Description	All the same except for the model name.		
Date of receipt of test item	Jun. 03, 2024		
Date of test	Jun. 03, 2024 to Jul. 18, 2024		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-JP-SRD/RF		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Jul. 18, 2024
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Jul. 18, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Jul. 18, 2024



Page 6 of 34

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.2
Software Version	V1.0.1
Equipment Specification	ANT+
Frequency Band	2400MHz-2483.5MHz
Operation Frequency	2457MHz
Modulation Type	GFSK
Number of channels	1 Channel
Field Strength of Fundamental	93.40dBuV/m(Average)@3m
Antenna Designation	PCB Antenna
Antenna Gain	-2.83dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency		
2400~2483.5MHz	01	2457MHz		



Page 7 of 34

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AF9HCS300** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	entity Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT


Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -2.83dBi.






2.8 DUTY CYCLE

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW=8MHz, VBW=50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Frequency	Duty Cycle		
TX	2457MHz	100%		

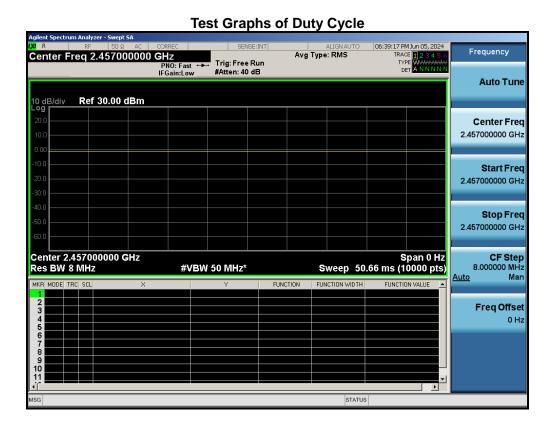



Page 9 of 34

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 34

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS			
Temperature range (℃)	15 - 35	-10 - 45			
Relative humidty range	20 % - 75 %	20 % - 75 %			
Pressure range (kPa)	86 - 106	86 - 106			
Power supply					

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		



Page 11 of 34

3.5 LIST OF EQUIPMENTS USED

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08



Page 12 of 34

A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27

• Tes	Test Software				
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0



Page 13 of 34

4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

No	Equipment	Manufacturer	Model No.	Specification Information	Cabl e
1	Control Box		USB-TTL		
2	Adapter	HUAWEI	HW-200440C00	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A; 20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Cycling Computer	Shenzhen CooSpo Tech Co., Ltd	CS300		



Page 14 of 34

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.249(a)	Field Strength of Fundamental	Pass
3	§15.209, §15.249	Radiated Emission& Band Edge	Pass
4	§15.215	20dB Bandwidth	Pass
9	§15.207	AC Power Line Conducted Emission	Pass




Page 15 of 34

5. DESCRIPTION OF TEST MODES

Summary table of Test Cases				
Test Item	Data Rate / Modulation			
rest item	ANT+ / GFSK			
Radiated&Conducted Test Cases	Mode 1: ANT+ Tx_2457MHz			
AC Conducted Emission	Mode 1: ANT+ + Battery + USB Cable (Charging from AC Adapter)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- This device does not need software control, the manufacturer has written the program into the chip, and it can be launched after power-on.






6. 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

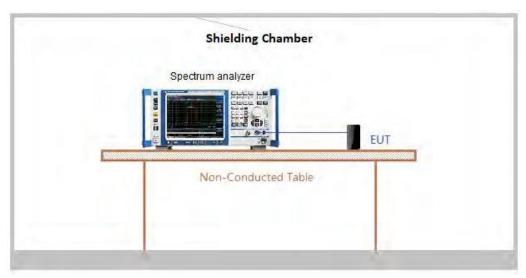




Page 17 of 34

6.3 MEASUREMENT RESULTS

	Test Data of Occupied Bandwidth and -20dB Bandwidth				
Test Mode Test Channel (MHz) 99% Occupied -20dB Limits Bandwidth (MHz) Bandwidth (MHz) Page 1				Pass or Fail	
GFSK	2457	0.90963	0.985	N/A	Pass

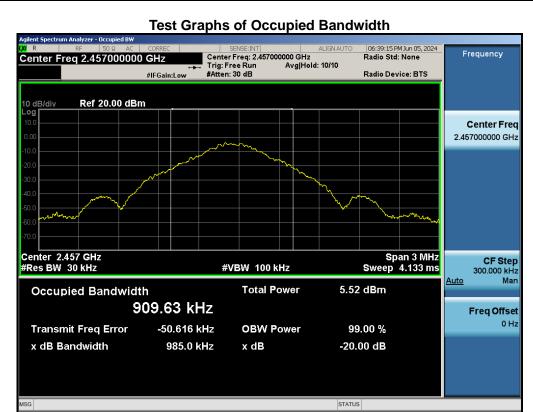



Page 18 of 34

7. RADIATED EMISSION

7.1 LIMITS OF RADIATED EMISSION TEST

15.249 Limit in the below table has to be followed:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)	
900-928MHz	50	500	
2400-2483.5MHz	50	500	
5725-5875MHz	50	500	
24.0-24.25GHz	250	2500	

15.209 Limit in the below table has to be followed:

Frequency	Frequency Distance		Field Strengths Limit	
(MHz)	Meters	μ V/m	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)		
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	30	30		
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000	3	Other:74.0 dB(µV)/m	n (Peak) 54.0 dB(µV)/m	
		(Average)		

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.



Page 19 of 34

7.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 20 of 34

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

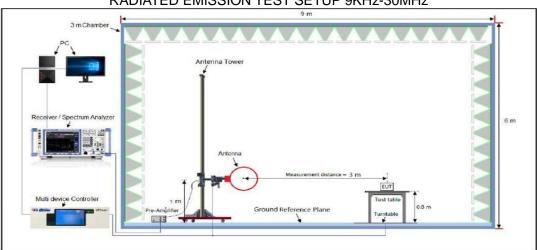

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

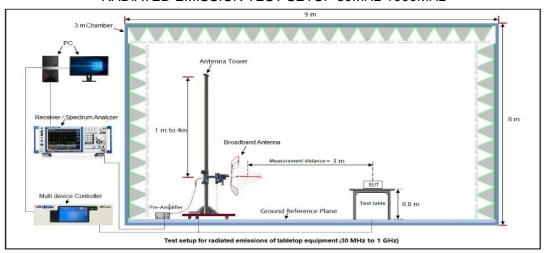

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

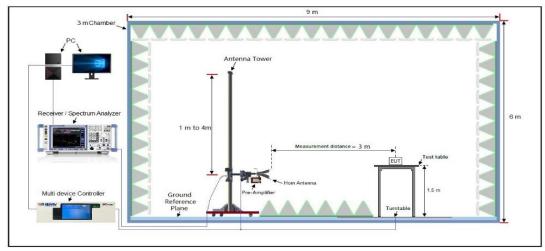

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 22 of 34

7.4 MEASUREMENT RESULT

FIELD STRENGTH OF FUNDAMENTAL

EUT	Cycling Computer	Model Name	CS300
Temperature	22.4° C	Relative Humidity	58.3%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2457	44.61	49.05	93.66	114.00	-20.34	peak	
2457	44.35	49.05	93.40	94.00	-0.60	AVG	
Remark:							
Factor = Ante	enna Factor + C	able Loss – P	re-amplifier.				

EUT	Cycling Computer	Model Name	CS300
Temperature	22.4° C	Relative Humidity	58.3%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Modulation	GFSK	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2457	43.72	49.05	92.77	114.00	-21.23	peak	
2457	43.47	49.05	92.52	94.00	-1.48	AVG	
Remark:							
Factor = Ante	enna Factor + C	able Loss – P	re-amplifier.				



Page 23 of 34


RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION FROM 30MHZ TO 1000MHZ

RADIATED EMISSION FROM 30MHZ TO 1000MHZ								
EUT		Cycling C	Computer		Model Na	me	CS300	
Tempera	ature	22.4° C			Relative I	Relative Humidity 58.3%		
Pressur	e	985hPa			Test Volta	age	Norma	l Voltage
Test Mo	de	Mode 1			Antenna		Horizoi	ntal
	130	·		FCC Part 1	5C			1
	120							
	110							
	90							
[w]	70							
Level[dBµV/m]	60							
Leve	50							
	30	<u></u> 1	2			<u>,</u>	4	and the second
	20		~~~\^\^\	Manhor	www.	Market and a second sec	Video de la companya del companya de la companya de la companya del companya de la companya de l	
	0							
	-10 30M		100M					1G
	— QP Limit	Horizontal PK		Frequency	[Hz]			
	# QP Detecto							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	60.07	25.24	17.86	40.00	14.76	100	168	Horizontal
2	99.84	27.54	17.03	43.50	15.96	100	204	Horizontal
3	141.55	27.66	16.13	43.50	15.84	100	7	Horizontal
4	460.68	28.86	24.60	46.00	17.14	100	359	Horizontal
5	613.94	32.15	25.25	46.00	13.85	100	70	Horizontal
6	896.21	35.85	30.12	46.00	10.15	100	246	Horizontal

RESULT: PASS





EUT		Cycling	Cycling Computer 22.4° C		Model N	Model Name CS300 Relative Humidity 58.3%		0
Tempera	ture	22.4° C			Relative			Relative Humidity
Pressure	,	985hPa			Test Voltage		Norma	al Voltage
Test Mod	le	Mode 1			Antenna	l	Vertica	al
	130			FCC Part 1	5C			
	120							
	110							
	90							
Ę	70							
Level[dBµV/m]	60							
Leve	50							
	30	≠ 2	3				4 🙇 5	*
	20	~~~ * ^~	~\~\\\	Many Many	www.	المتعملية المتعادية والمتعادية والمتعادة والمتعادية وال	Name of the Party	
	10							
	-10		40014					10
	30M		100M	Frequency	[Hz]			1G
	QP LimitQP Detector	Vertical PK						
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	24.25	12.12	40.00	15.75	100	198	Vertical
2	62.01	25.82	17.23	40.00	14.18	100	334	Vertical
3	99.84	33.20	17.03	43.50	10.30	100	1	Vertical
4	457.77	29.59	24.14	46.00	16.41	100	2	Vertical
5	622.67	31.64	25.54	46.00	14.36	100	70	Vertical
6	852.56	35.73	29.77	46.00	10.27	100	78	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.



Page 25 of 34

RADIATED EMISSION ABOVE 1GHZ

EUT	Cycling Computer	Model Name	CS300					
Temperature	22.4° C	Relative Humidity	58.3%					
Pressure	985hPa	Test Voltage	Normal Voltage					
Test Mode	Mode 1	Antenna	Horizontal					

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4914.000	46.32	0.08	46.4	74	-27.6	peak			
4914.000	37.28	0.08	37.36	54	-16.64	AVG			
7371.000	43.41	2.21	45.62	74	-28.38	peak			
7371.000	36.52	2.21	38.73	54	-15.27	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

EUT	Cycling Computer	Model Name	CS300
Temperature	22.4° C	Relative Humidity	58.3%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4914.000	47.18	0.08	47.26	74	-26.74	peak			
4914.000	37.49	0.08	37.57	54	-16.43	AVG			
7371.000	45.63	2.21	47.84	74	-26.16	peak			
7371.000	33.25	2.21	35.46	54	-18.54	AVG			
Remark:									
Factor = Ante	enna Factor + Ca	able Loss – F	Pre-amplifier.						


RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.







TEST RESULT FOR BAND EDGE EMISSION AT RESTRICTED BANDS

EUT	Cycling Computer	Model Name	CS300				
Temperature	22.4° C	Relative Humidity	58.3%				
Pressure	985hPa	Test Voltage	Normal Voltage				
Test Mode	Mode 1	Antenna	Horizontal				


Test Graph for Peak Measurement

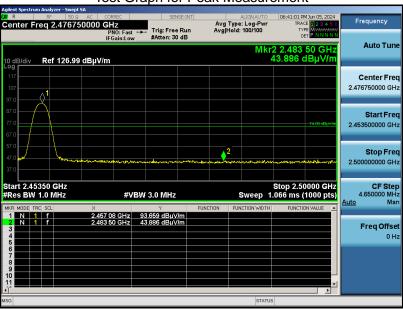



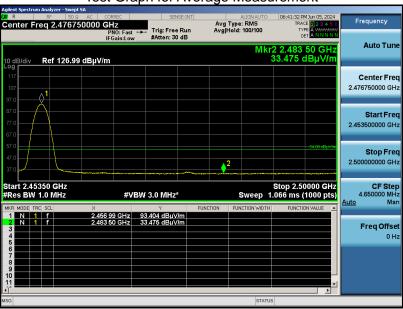


RESULT: PASS







EUT Cycling Computer **Model Name** CS300 22.4° C **Temperature Relative Humidity** 58.3% **Pressure** 985hPa **Test Voltage** Normal Voltage **Test Mode** Mode 1 **Antenna** Vertical

Test Graph for Peak Measurement

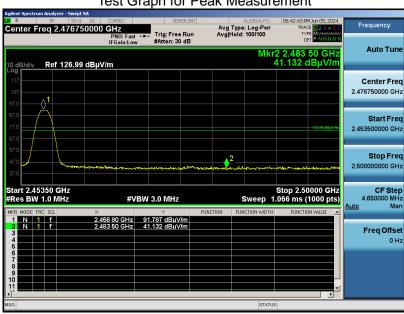

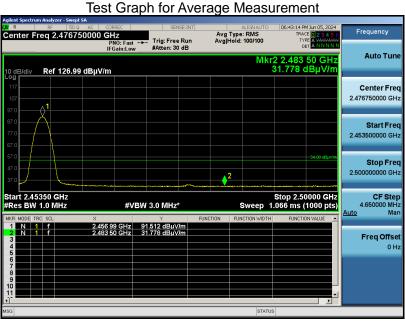



RESULT: PASS






EUT	Cycling Computer	Model Name	CS300
Temperature	22.4° C	Relative Humidity	58.3%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

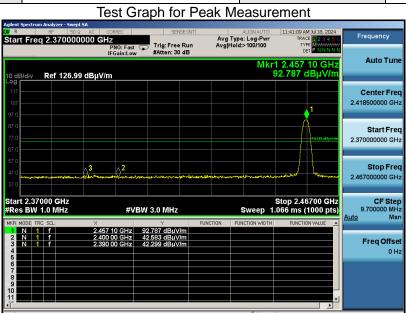

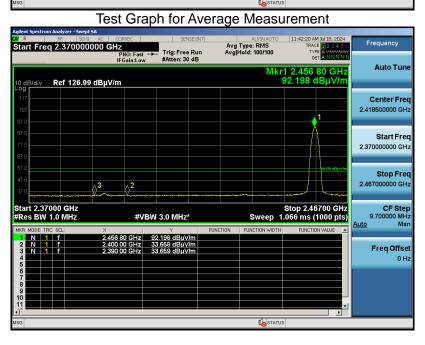



RESULT: PASS






EUT	Cycling Computer	Model Name	CS300
Temperature	22.4° C	Relative Humidity	58.3%
Pressure	985hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical



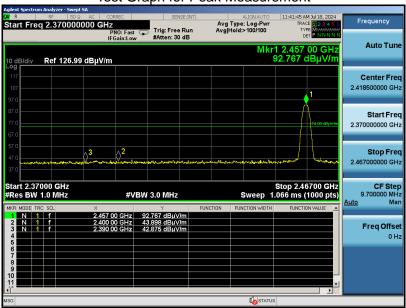



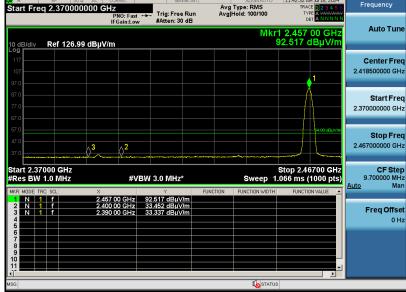

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.



8. AC Power Line Conducted Emission Test


8.1 Measurement Limit

F	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

8.2 Measurement Setup (Block Diagram of Configuration)

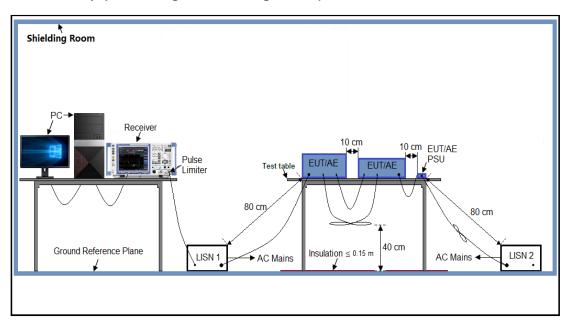



Page 31 of 34

8.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


8.4 Final Procedure of Line Conducted Emission Test

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

8.5 Measurement Results





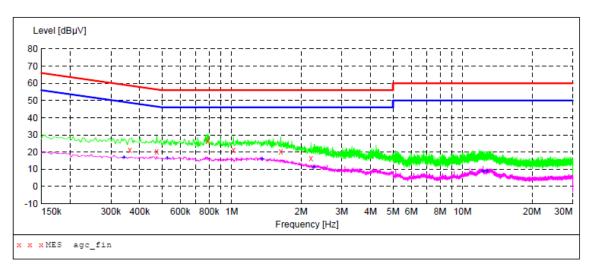

MEASUREMENT RESULT: "agc fin"


2024/6/6 17:36 Frequency MHz			Limit dBµV	Margin dB	Detector	Line
0.362000	21.10	6.1	59	37.6	QP	L1
0.474000	20.40	6.1	56	36.0	QP	L1
0.790000	26.50	6.2	56	29.5	QP	L1
1.018000	21.10	6.2	56	34.9	QP	L1
1.634000	20.50	6.2	56	35.5	QP	L1
2 206000	16 30	6 3	5.6	39 7	OP	T.1


MEASUREMENT RESULT: "agc fin2"

2024/6/6 17:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.342000	16.90	6.1	49	32.3	AV	L1
0.526000	16.20	6.2	46	29.8	AV	L1
1.354000	15.90	6.2	46	30.1	AV	L1
2.270000	11.20	6.3	46	34.8	AV	L1
12.262000	8.80	6.8	50	41.2	AV	L1
12.770000	8.70	6.8	50	41.3	AV	L1

RESULT: Pass





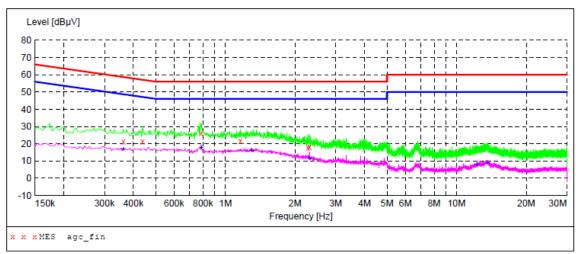

MEASUREMENT RESULT: "agc fin"

2024/6/6 17:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	21.40	6.1	59	37.3	QP	N
0.438000	21.00	6.1	57	36.1	QP	N
0.786000	25.90	6.2	56	30.1	QP	N
1.162000	21.60	6.2	56	34.4	QP	N
2.274000	17.80	6.3	56	38.2	QP	N
2.310000	18.10	6.3	56	37.9	QP	N

MEASUREMENT RESULT: "agc fin2"

2	024/6/6	17:33	}					
	Freque	ncy MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.362	000	17.00	6.1	49	31.7	AV	N
	0.786	000	17.50	6.2	46	28.5	AV	N
	1.298	000	16.10	6.2	46	29.9	AV	N
	2.310	000	11.70	6.3	46	34.3	AV	N
	12.238	000	8.00	6.8	50	42.0	AV	N
	13.626	000	8.70	6.8	50	41.3	AV	N

RESULT: PASS



Page 34 of 34

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01040240601AP02

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC01040240601AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.