

Measurement and Test Report
For
Shenzhen Qiuyu Electronic Co., Ltd

FCC ID: 2AL64-T-102P
IC : 24702-T102P

FCC Rule(s)/Methods:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2013 RSS-Gen Issue 5, February 2021 RSS-247 Issue 3 August 2023
Product Description:	Artikl Frameo digital photo frame
Trademark	N/A
Model/Type reference.:	USAFDPF10BK, AFDPF10BK, USAFDPF10BW, AFDPF10BW
Report No.:	MAX25021202750018F-1
Date of receipt of test item:	Jan 6 2025
Date of sampling:	Jan 7 2025
Tested Date:	Jan 8 2025 to Feb 21, 2025
Issued Date:	Feb 21, 2025
Tested By:	Lris Yao/ Engineer <i>Lris Yao</i>
Reviewed By:	Levi Xiao/ EMC Manager <i>Levi Xiao</i>
Approved & Authorized By:	Salon Ouyang / PSQ Manager <i>Salon ouyang.</i>

MAXLAB Testing Co.,Ltd.

1/F, Building B, Xinshidai GR Park, Shiyao Street, Bao'an District, Shenzhen, Shiyao Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

Tel: 400-882-9628

Fax: 86- 755-26508703

Table of Contents

	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS.....	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE.....	12
4.1.3 DEVIATION FROM TEST STANDARD.....	12
4.1.4 TEST SETUP.....	13
4.1.5 EUT OPERATING CONDITIONS.....	13
4.1.6 TEST RESULTS.....	13
4.2 RADIATED EMISSION MEASUREMENT	18
4.2.1 RADIATED EMISSION LIMITS.....	18
4.2.2 TEST PROCEDURE.....	18
4.2.3 DEVIATION FROM TEST STANDARD.....	19
4.2.4 TEST SETUP.....	19
4.2.5 EUT OPERATING CONDITIONS.....	20
4.2.6 TEST RESULTS	20
5.RADIATED BAND EMISSIONMEASUREMENT	31
5.1 TEST REQUIREMENT:.....	31
5.2 TEST PROCEDURE	31
5.3 DEVIATION FROM TEST STANDARD	31
5.4 TEST SETUP	32
5.5 EUT OPERATING CONDITIONS.....	32
5.6 TEST RESULT	33
6.POWER SPECTRAL DENSITY TEST	37
6.1 APPLIED PROCEDURES / LIMIT.....	37
6.2 TEST PROCEDURE	37
6.3 DEVIATION FROM STANDARD	37
6.4 TEST SETUP	37

6.5 EUT OPERATION CONDITIONS.....	38
6.6 TEST RESULT	39
7. CHANNEL BANDWIDTH	44
7.1 APPLIED PROCEDURES / LIMIT.....	44
7.2 TEST PROCEDURE	44
7.3 DEVIATION FROM STANDARD.....	44
7.4 TEST SETUP	44
7.5 EUT OPERATION CONDITIONS.....	45
7.6 TEST RESULT	46
8. PEAK OUTPUT POWER TEST	51
8.1 APPLIED PROCEDURES/LIMIT.....	51
8.2 TEST PROCEDURE	51
8.3 DEVIATION FROM STANDARD.....	51
8.4 TEST SETUP	51
8.5 EUT OPERATION CONDITIONS.....	51
8.6 TEST RESULT	52
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	53
9.1 APPLICABLE STANDARD.....	53
9.2 TEST PROCEDURE	53
9.3 DEVIATION FROM STANDARD.....	53
9.4 TEST SETUP	53
9.5 EUT OPERATION CONDITIONS.....	53
9.6 TEST RESULTS	53
10. 99% OCCUPY BANDWIDTH	70
10.1 CONFORMANCE LIMIT	70
10.2 TEST PROCEDURE	70
10.3 DEVIATION FROM STANDARD.....	70
10.4 TEST SETUP	70
10.5 EUT OPERATION CONDITIONS.....	70
10.6 TEST RESULTS.....	71
11. ANTENNA REQUIREMENT	76
12. TEST SETUP PHOTO.....	77
13. EUT CONSTRUCTIONAL DETAILS.....	77

1. VERSION

ReportNo.	Version	Description	Approved
MAX25021202750018F-1	Rev.01	Initial issue of report	Feb 12, 2025

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart, KDB 558074 D01 RSS-Gen, RSS-247 Issue 3			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c), RSS-Gen Section 6.8 RSS-247 5.4	Antenna requirement	PASS	
FCC part 15.207, RSS-Gen Section 8.8	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3), RSS-247 Section 5.4(d)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2), RSS-247 Section 5.2(a)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e), RSS-247 Section 5.2(b)	Power Spectral Density	PASS	
FCC part 15.247(d), RSS-247 Section 5.5	Band Edge	PASS	
FCC part 15.247(d), RSS-247 Section 5.5	Conducted Spurious Emission	PASS	
FCC part 15.205/15.209, RSS-247Section 3.3 & RSS-Gen Section 8.10	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

MAXLAB Testing Co.,Ltd.

Add. : 1/F, Building B, Xinshidai GR Park, Shiyao Street, Bao'an District, Shenzhen, Shiyao Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

FCC Test Firm Registration Number: 562200

Designation Number: CN1338

IC Registered No.: 11093A

CAB identifier: CN0019

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Applicant:	Shenzhen Qiuyu Electronic Co., Ltd
Address of applicant:	3F, E Building, Hongzhuyongqi Industrial Park, Lezhujiao village, xixiang town, Bao'an District ,Shenzhen, China
Manufacturer:	Shenzhen Qiuyu Electronic Co., Ltd
Address of manufacturer:	3F, E Building, Hongzhuyongqi Industrial Park, Lezhujiao village, xixiang town, Bao'an District ,Shenzhen, China
Product Name:	Artikl Frameo digital photo frame
Model No.:	USAFDPF10BK, AFDPF10BK, USAFDPF10BW, AFDPF10BW
Sample number	2412148-1, 2412148-2, 2412148-3, 2412148-4
Test Model:	USAFDPF10BK
Test sample number	2412148-1
Model Different.:	All the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB, etc.), same mechanical structure and design (including product enclosure, materials, etc.).Only the name of the model, the appearance color and whether it has a wood color frame are different
Serial No.:	N/A
HVIN/Hardware version:	USAFDPF10BK, AFDPF10BK, USAFDPF10BW, AFDPF10BW
FVIN/Software version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20) Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPC antenna
Antenna gain:	1.28dBi
Adapter:	Adapter 1 Manufacturer: Shenzhen Sunshine Technogical Co.,Ltd. Model: XSC-0502000S Input: AC100-240Vac, 50/60Hz, 0.4A Output: DC 5V, 2A Adapter 2 Manufacturer: TEKA Technology Co., Ltd. Model: TEKA-AB1B050200US Input: AC100-240Vac, 50/60Hz, 0.35A Max Output: DC 5V, 2A
Power supply:	DC 5V from Adapter

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	/
Lowest channel	2412MHz	/
Middle channel	2437MHz	/
Highest channel	2462MHz	/

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	/
Data rate	1Mbps	6Mbps	6.5Mbps	/

Test Software	RFtester V1.0		
Power level setup	802.11b:	85	
	802.11g:	85	
	802.11n(HT20):	90	


3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

The products in the test report are used together with two types of adapters. We Conducted Emission and Radiated Emission tests for both types of adapters.


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	BSL252	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Coaxial Switch	ANRITSU CORP	MP59B	BSL225	2024-10-27	2025-10-26
ENV216 2-L-V-NETZNACH B.DE	ROHDE&SCHWARZ	ENV216	BSL226	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	BSL233	2024-10-27	2025-10-26
Absorbing clamp	Elektronik-Feinmechanik	MDS21	BSL229	2024-10-27	2025-10-26
LISN	R&S	ENV216	308	2024-10-27	2025-10-26
LISN	R&S	ENV216	314	2024-10-27	2025-10-26

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)*6.4(H)	BSL250	2024-10-27	2025-10-26
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	BSL251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	BSL203	2024-10-27	2025-10-26
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	BSL214	2024-10-27	2025-10-26
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	BSL208	2024-10-27	2025-10-26
Horn Antenna	ETS-LINDGREN	3160	BSL217	2024-10-27	2025-10-26
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	BSL	N/A	BSL213	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL211	2024-10-27	2025-10-26
Coaxial cable	BSL	N/A	BSL210	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL212	2024-10-27	2025-10-26
Amplifier(100kHz-3 GHz)	HP	8347A	BSL204	2024-10-27	2025-10-26
Amplifier(2GHz-20 GHz)	HP	84722A	BSL206	2024-10-27	2025-10-26
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	BSL218	2024-10-27	2025-10-26
Band filter	Amindeon	82346	BSL219	2024-10-27	2025-10-26
Power Meter	Anritsu	ML2495A	BSL540	2024-10-27	2025-10-26
Power Sensor	Anritsu	MA2411B	BSL541	2024-10-27	2025-10-26
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	BSL575	2024-10-27	2025-10-26
Splitter	Agilent	11636B	BSL237	2024-10-27	2025-10-26
Loop Antenna	ZHINAN	ZN30900A	BSL534	2024-10-27	2025-10-26
Breitband hornantenne	SCHWARZBECK	BBHA 9170	BSL579	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-02	BSL574	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-03	BSL576	2024-10-27	2025-10-26

PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	BSL578	2024-10-27	2025-10-26
---------------------------------	-----------------	-----	--------	------------	------------

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	BSL566	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Spectrum Analyzer	Agilent	E4440A	BSL533	2024-10-27	2025-10-26
MXG vector Signal Generator	Agilent	N5182A	BSL567	2024-10-27	2025-10-26
ESG Analog Signal Generator	Agilent	E4428C	BSL568	2024-10-27	2025-10-26
USB RF Power Sensor	DARE	RPR3006W	BSL569	2024-10-27	2025-10-26
RF Switch Box	Shongyi	RFSW3003328	BSL571	2024-10-27	2025-10-26
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	BSL572	2024-10-27	2025-10-26

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Section 8.8
Test Method:	ANSI C63.10:2013 RSS-Gen
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

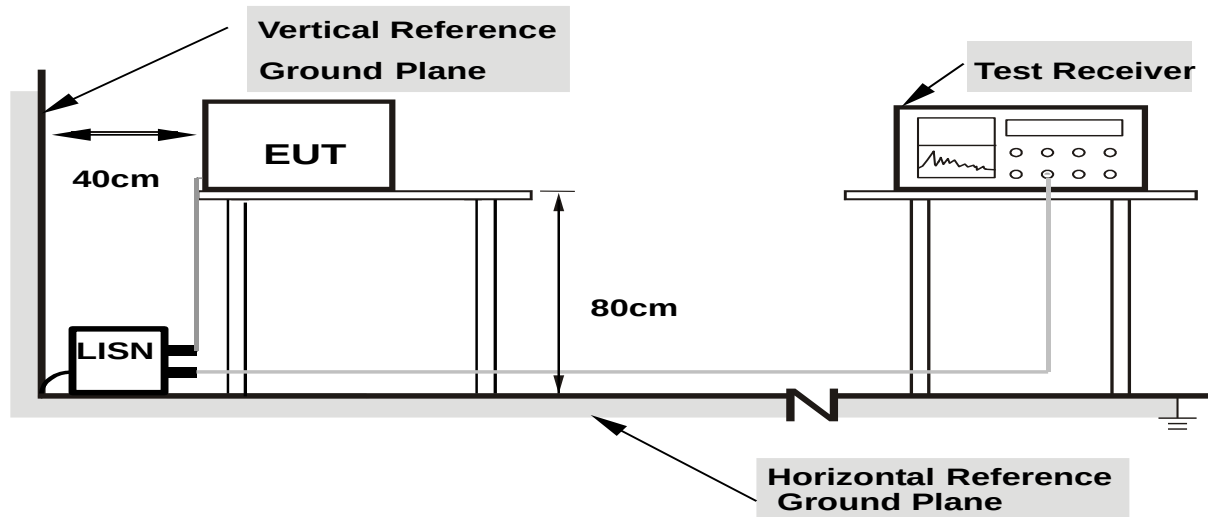

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.


4.1.6 TEST RESULTS

PASS


Note : Worst case is 802.11b 2412MHz TX

Adapter 1 Model: XSC-0502000S

Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

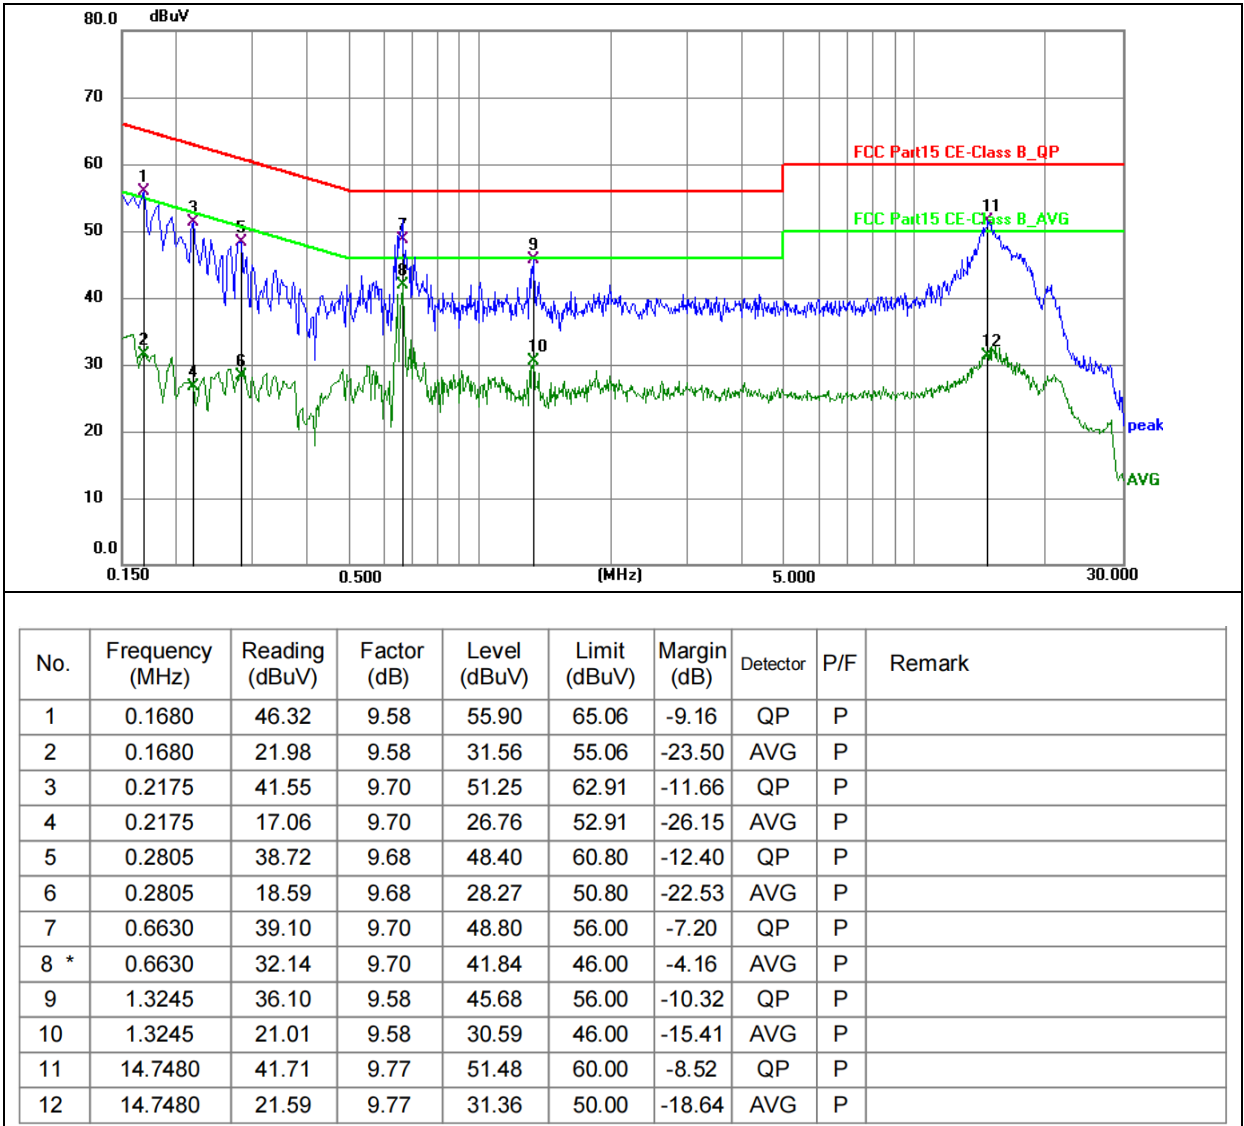


Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

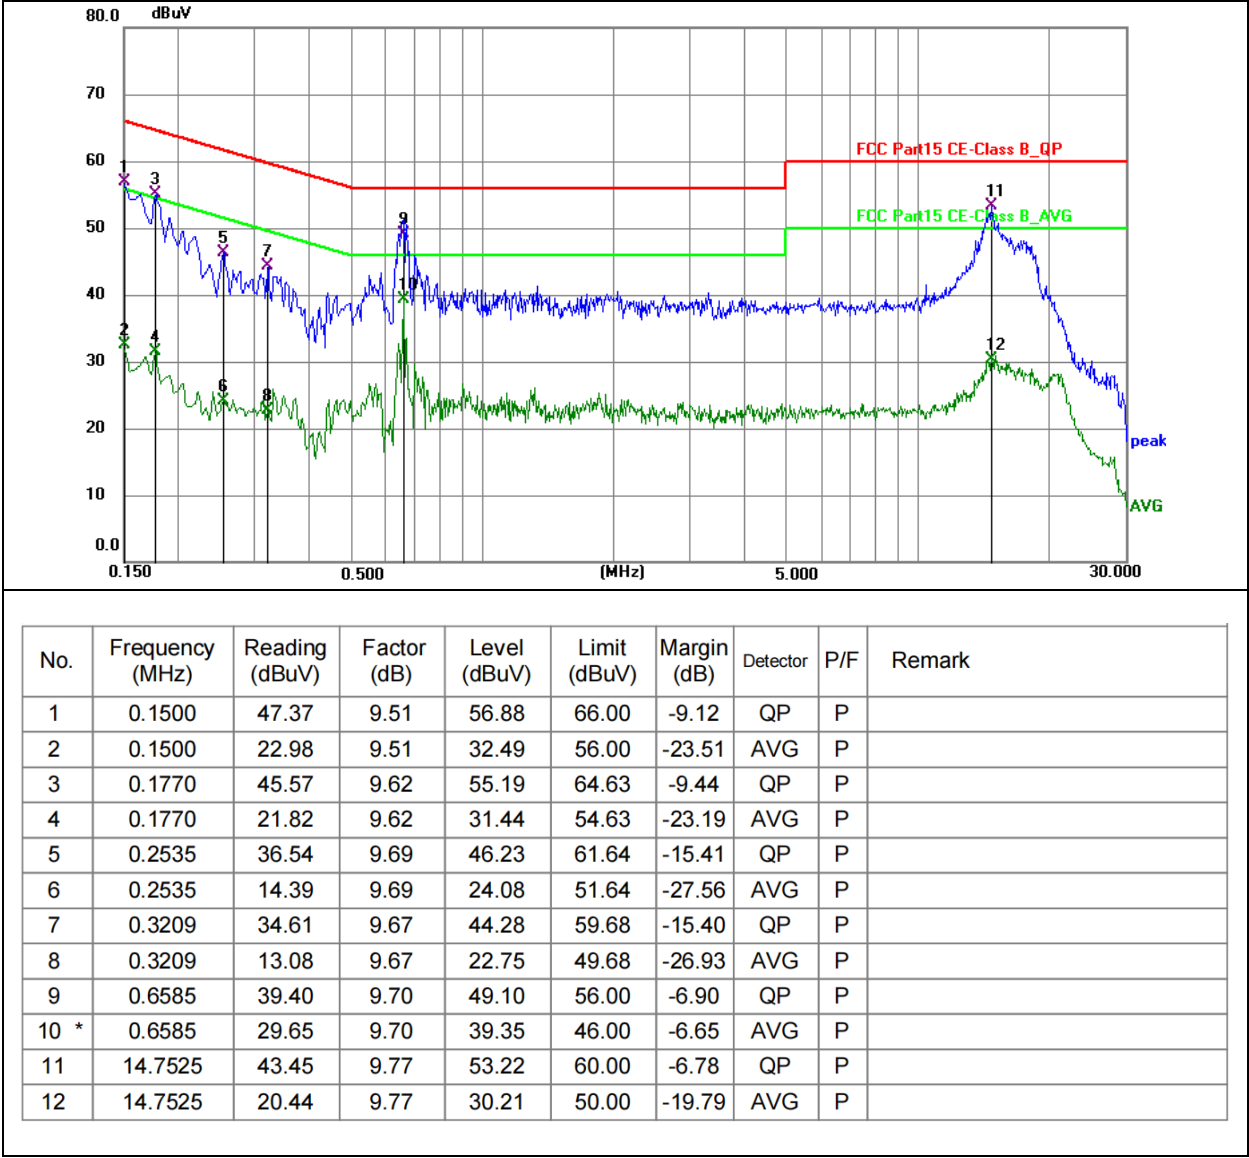


Adapter 2 Model: TEKA-AB1B050200US

Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

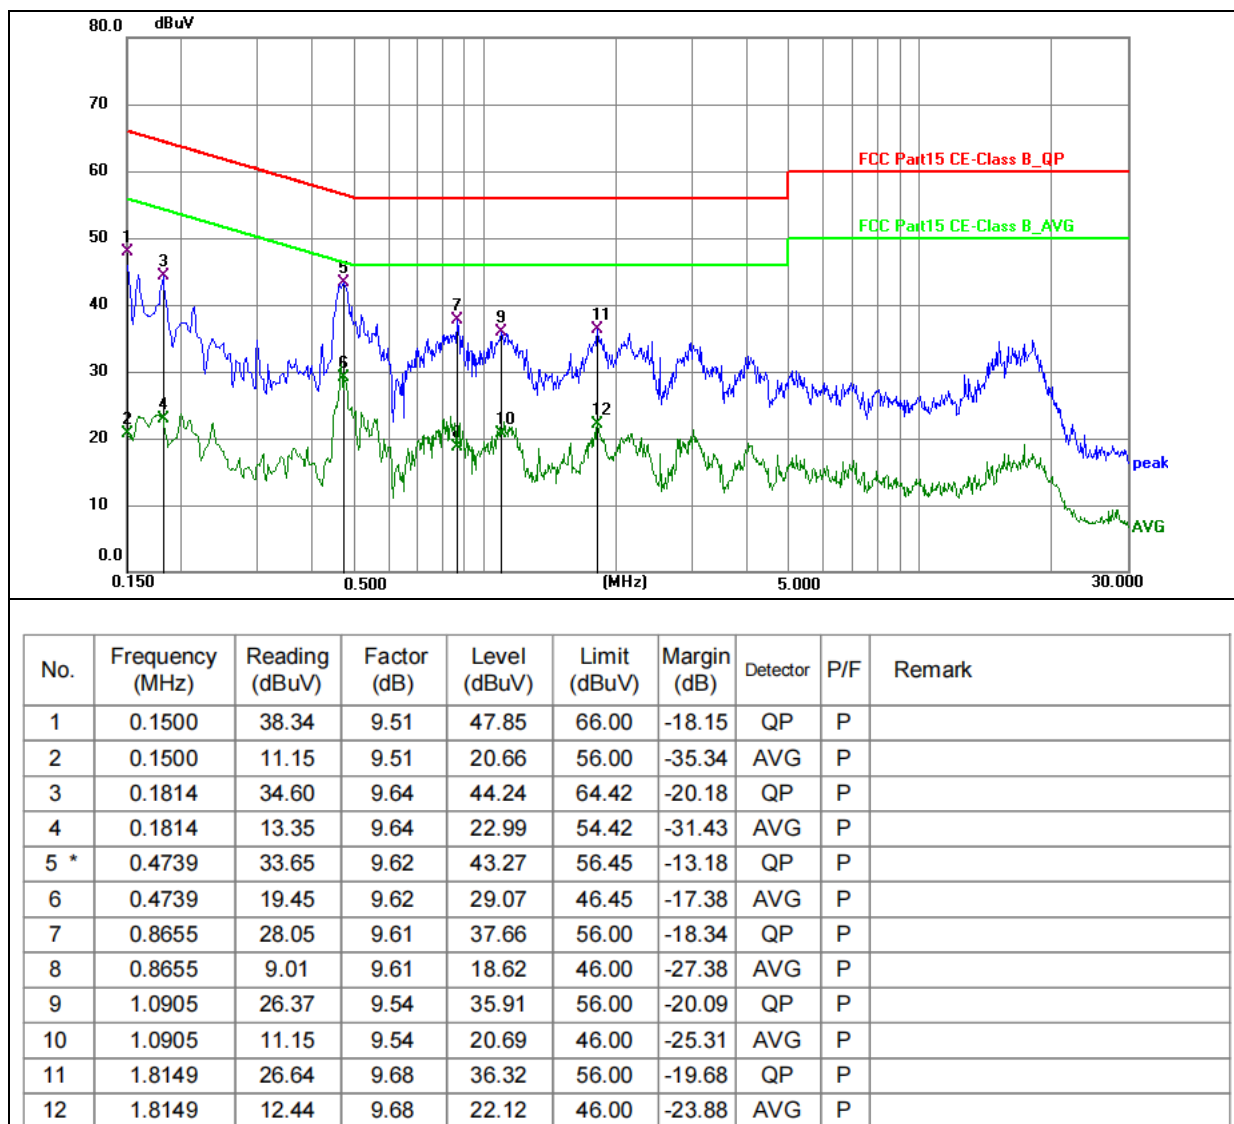

Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

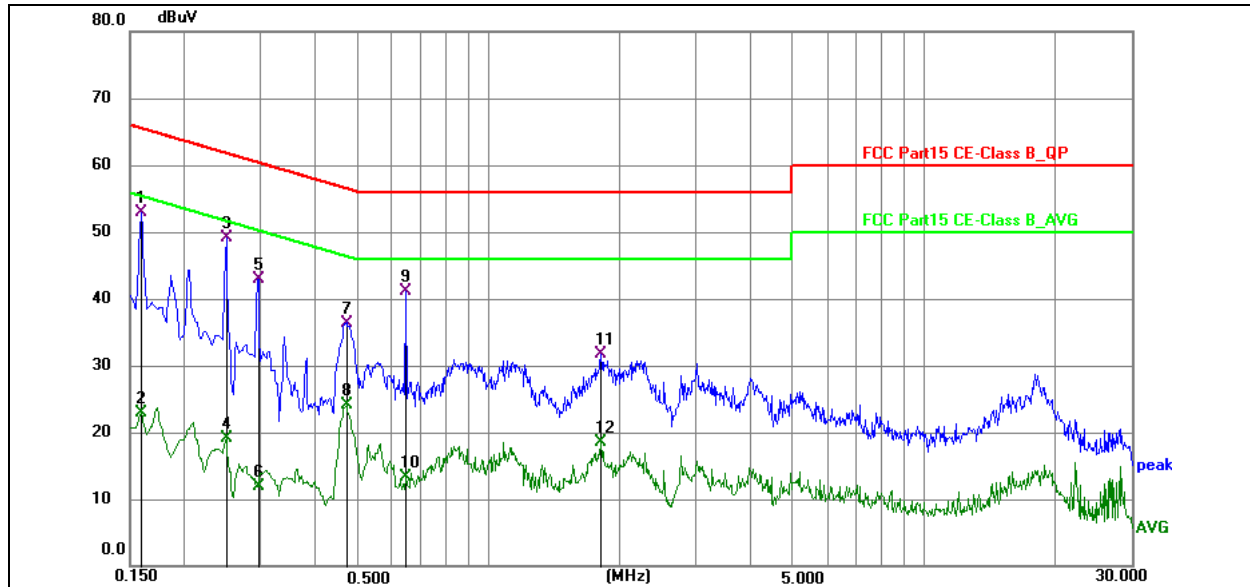

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1590	43.45	9.55	53.00	65.52	-12.52	QP	P	
2	0.1590	13.32	9.55	22.87	55.52	-32.65	AVG	P	
3	0.2495	39.48	9.69	49.17	61.77	-12.60	QP	P	
4	0.2495	9.51	9.69	19.20	51.77	-32.57	AVG	P	
5	0.2955	33.28	9.68	42.96	60.37	-17.41	QP	P	
6	0.2955	2.29	9.68	11.97	50.37	-38.40	AVG	P	
7	0.4711	26.78	9.62	36.40	56.49	-20.09	QP	P	
8	0.4711	14.45	9.62	24.07	46.49	-22.42	AVG	P	
9	0.6440	31.36	9.69	41.05	56.00	-14.95	QP	P	
10	0.6440	3.66	9.69	13.35	46.00	-32.65	AVG	P	
11	1.8096	22.01	9.68	31.69	56.00	-24.31	QP	P	
12	1.8096	8.80	9.68	18.48	46.00	-27.52	AVG	P	

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209 RSS-247 Section 3.3 & RSS-Gen Section 8.9				
Test Method:	ANSI C63.10:2013 Section 11.11 RSS-Gen				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

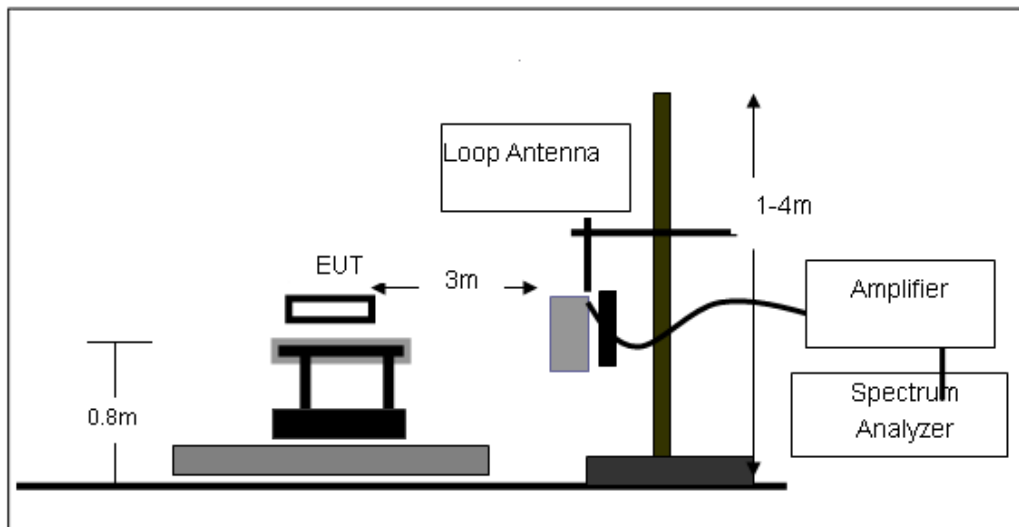

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

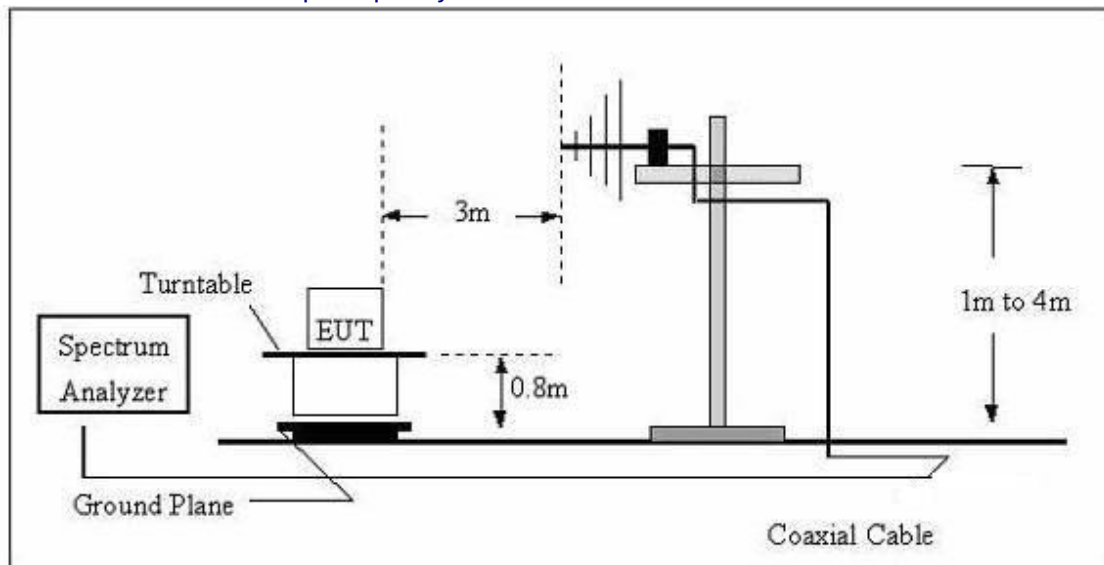

(C) Radiated Emission Test-Up Frequency Above 1GHz

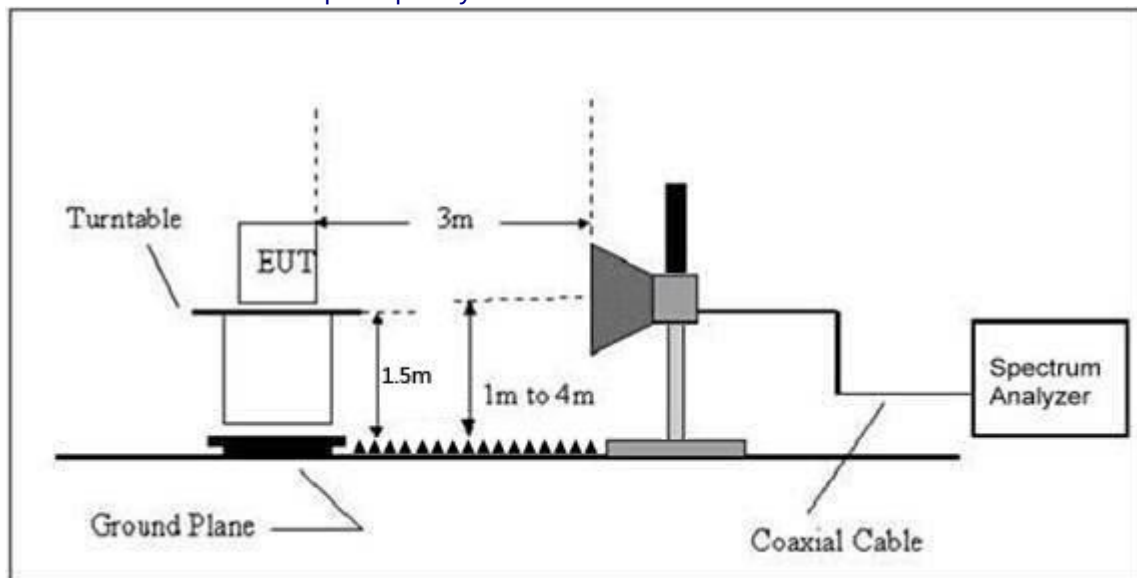

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz

Adapter 1 Model: XSC-0502000S

Temperature:	23°C	Relative Humidity:	51%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

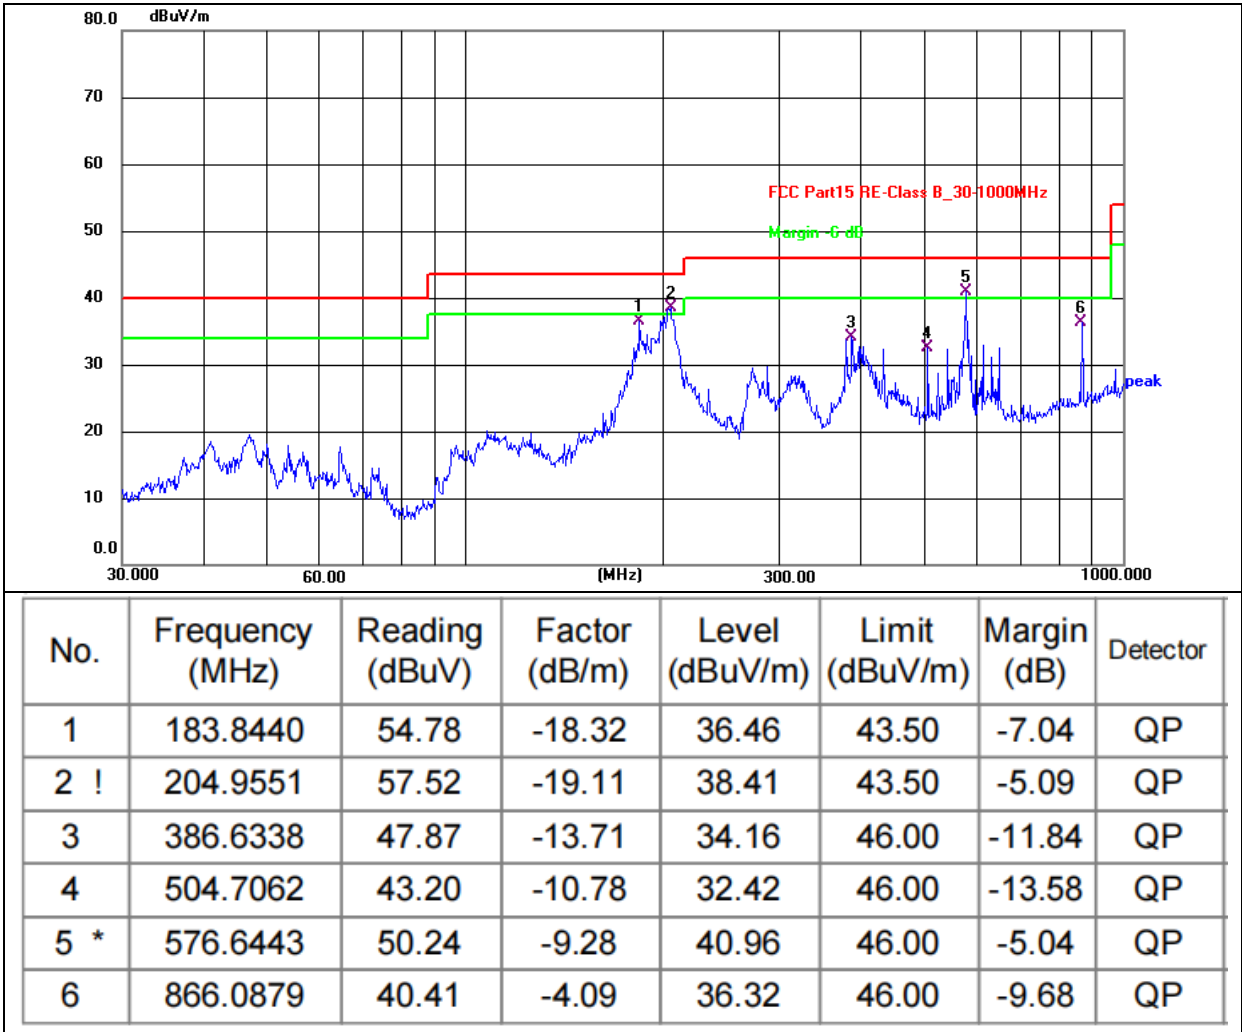


Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

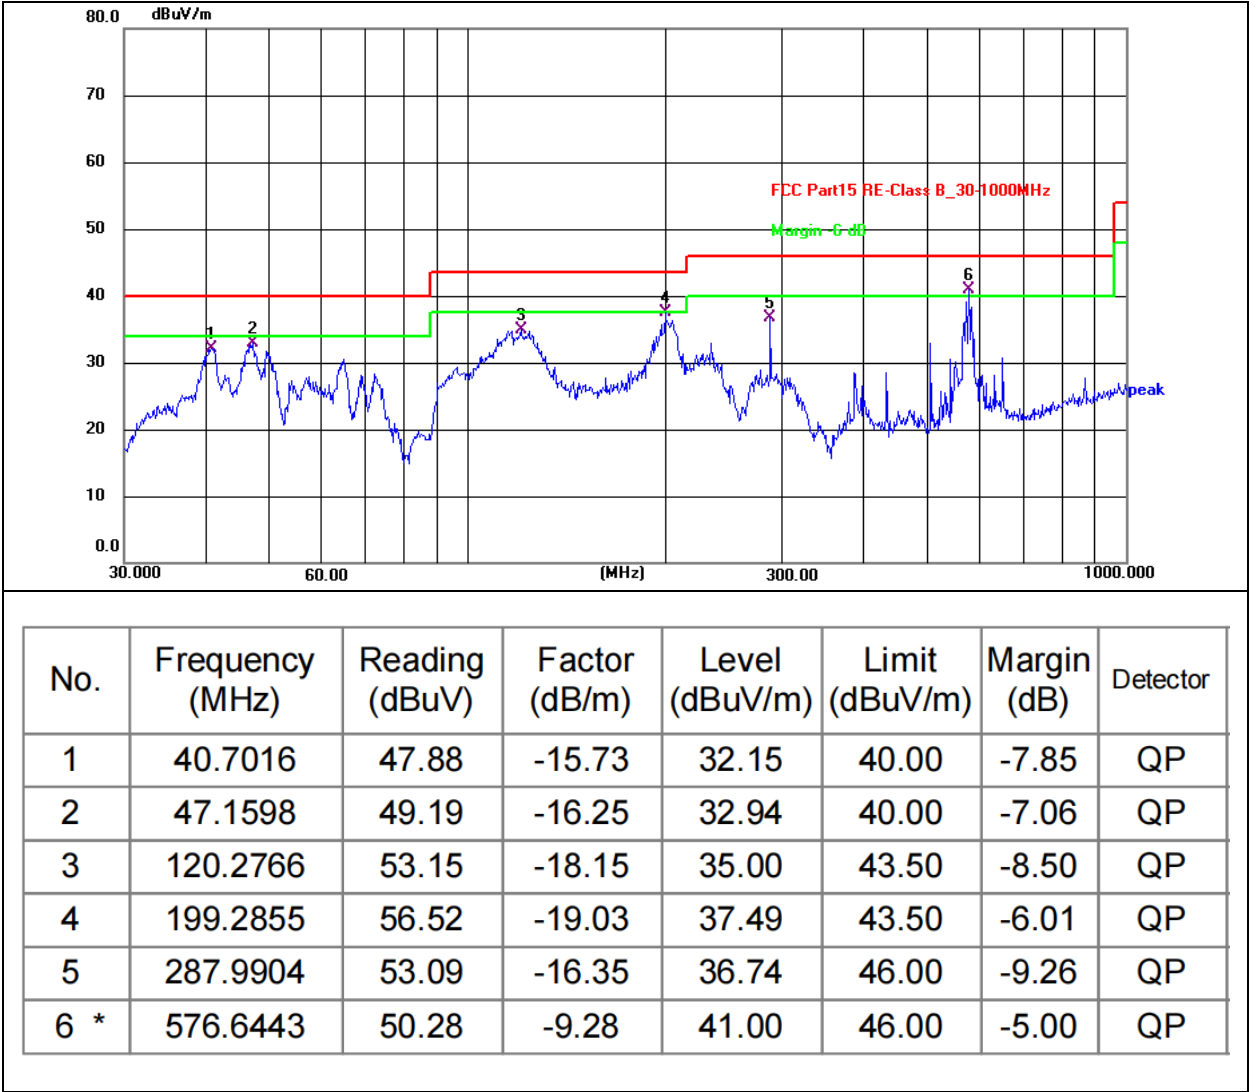


Adapter 2 Model: TEKA-AB1B050200US

Temperature:	23°C	Relative Humidity:	51%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

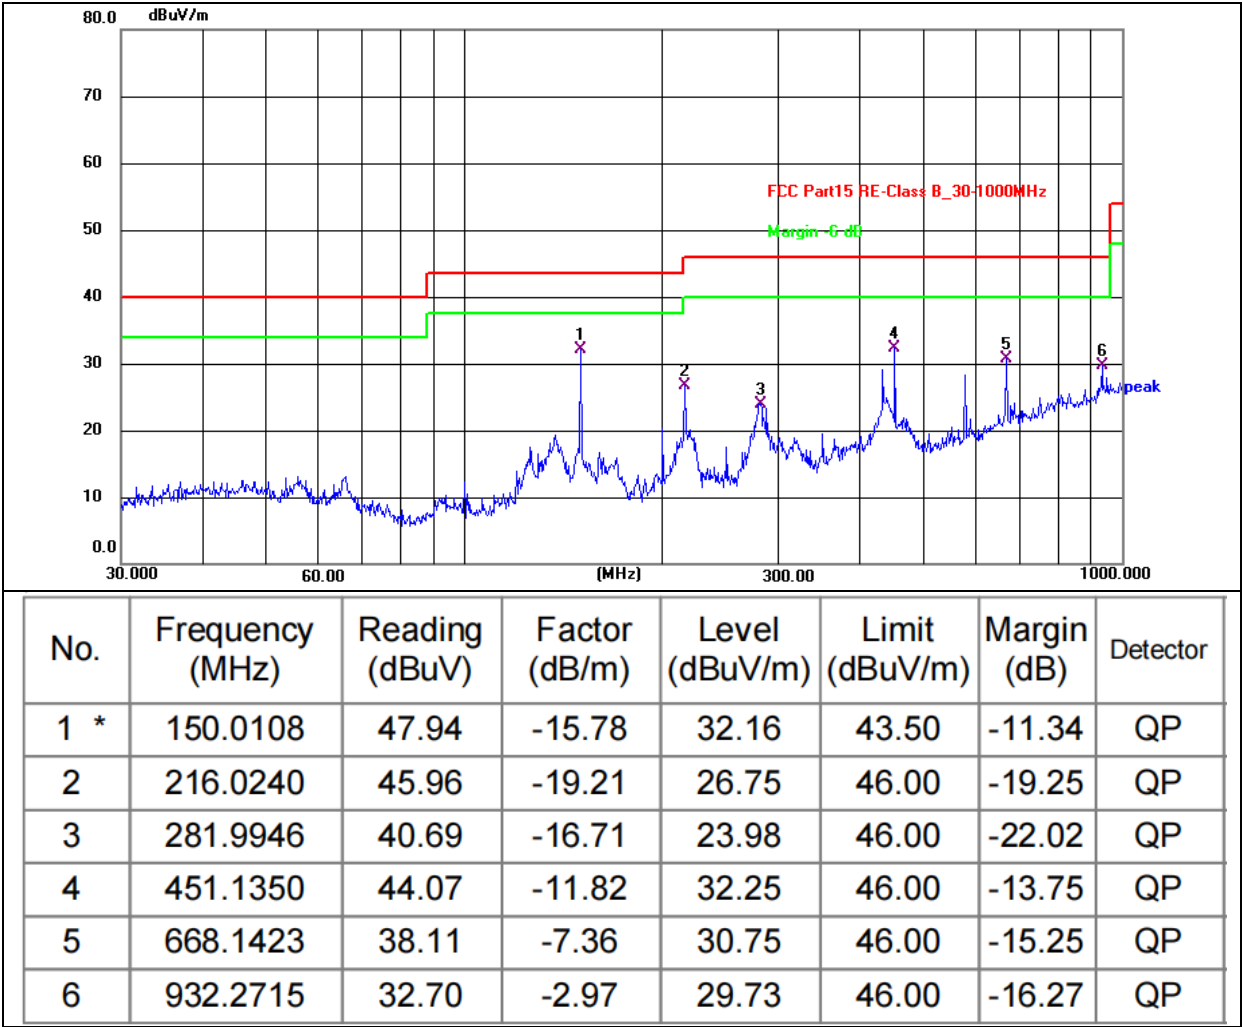

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

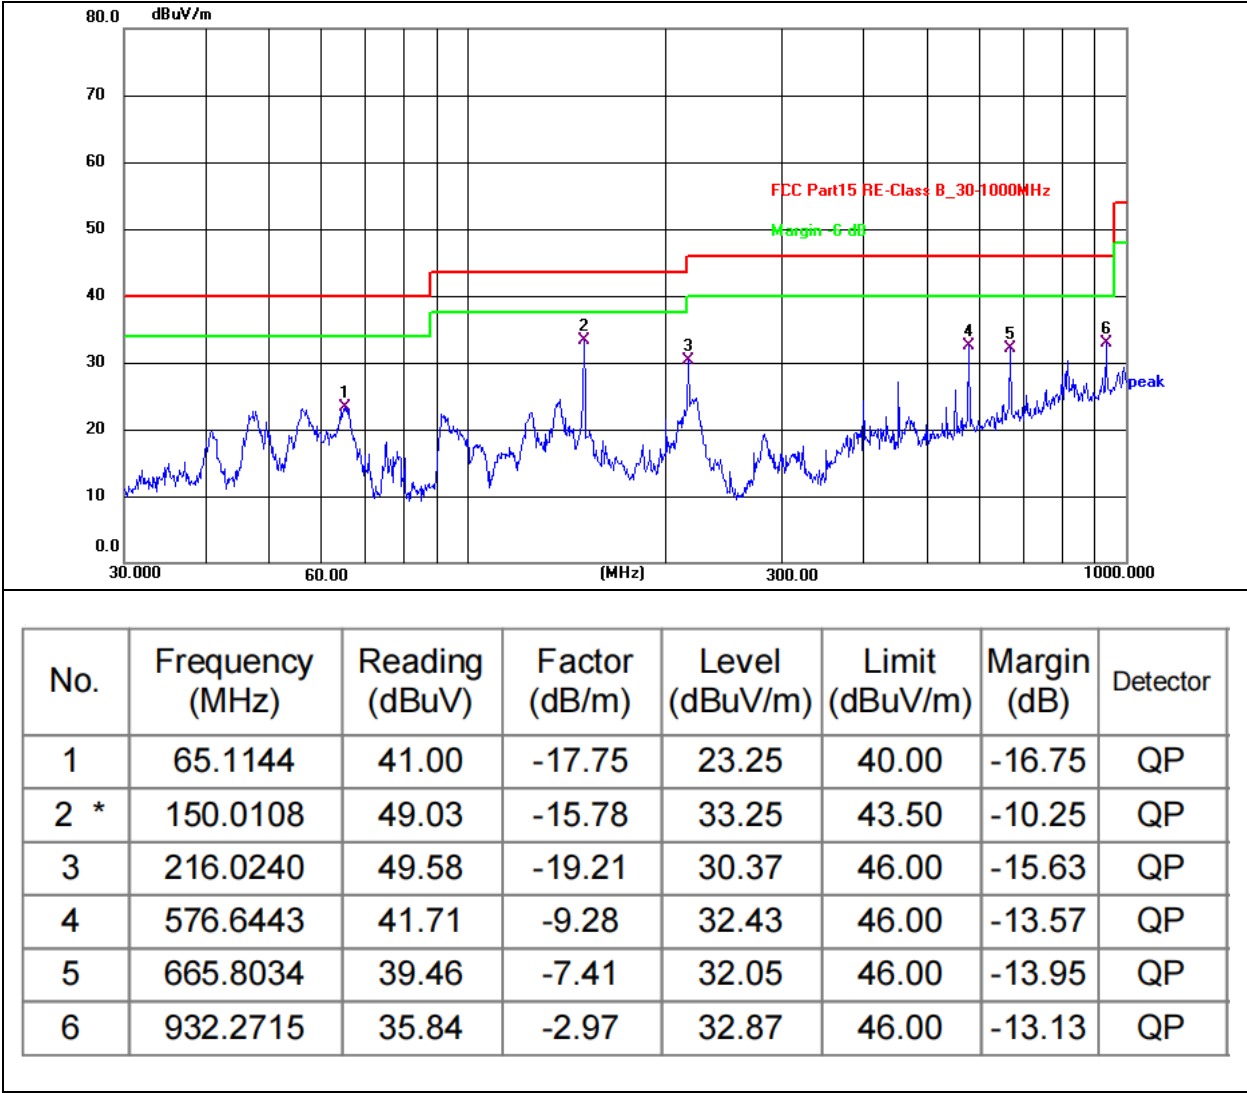

Remarks:

1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2.The emission levels of other frequencies are very lower than the limit and not show in test report.

3.The test data shows only the worst case 802.11b mode

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.80	30.55	5.77	24.66	51.68	74.00	-22.32	Pk
V	4824.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
V	7236.00	50.18	30.33	6.32	24.55	50.72	74.00	-23.28	Pk
V	7236.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
V	9648.00	51.68	30.85	7.45	24.69	52.97	74.00	-21.03	Pk
V	9648.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	12060.00	53.27	31.02	8.99	25.57	56.81	74.00	-17.19	Pk
V	12060.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV
H	4824.00	53.96	30.55	5.77	24.66	53.84	74.00	-20.16	Pk
H	4824.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	7236.00	52.19	30.33	6.32	24.55	52.73	74.00	-21.27	Pk
H	7236.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
H	9648.00	50.22	30.85	7.45	24.69	51.51	74.00	-22.49	Pk
H	9648.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
H	12060.00	51.08	31.02	8.99	25.57	54.62	74.00	-19.38	Pk
H	12060.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.92	30.55	5.77	24.66	52.80	74.00	-21.20	Pk
V	4874.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
V	7311.00	54.17	30.33	6.32	24.55	54.71	74.00	-19.29	Pk
V	7311.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
V	9748.00	54.39	30.85	7.45	24.69	55.68	74.00	-18.32	Pk
V	9748.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
V	12185.00	51.97	31.02	8.99	25.57	55.51	74.00	-18.49	Pk
V	12185.00	43.75	31.02	8.99	25.57	47.29	54.00	-6.71	AV
H	4874.00	52.45	30.55	5.77	24.66	52.33	74.00	-21.67	Pk
H	4874.00	43.41	30.55	5.77	24.66	43.29	54.00	-10.71	AV
H	7311.00	53.60	30.33	6.32	24.55	54.14	74.00	-19.86	Pk
H	7311.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	9748.00	54.35	30.85	7.45	24.69	55.64	74.00	-18.36	Pk
H	9748.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
H	12185.00	53.00	31.02	8.99	25.57	56.54	74.00	-17.46	Pk
H	12185.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.13	30.55	5.77	24.66	53.01	74.00	-20.99	Pk
V	4924.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7386.00	50.30	30.33	6.32	24.55	50.84	74.00	-23.16	Pk
V	7386.00	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
V	9848.00	53.44	30.85	7.45	24.69	54.73	74.00	-19.27	Pk
V	9848.00	43.71	30.85	7.45	24.69	45.00	54.00	-9.00	AV
V	12310.00	53.26	31.02	8.99	25.57	56.80	74.00	-17.20	Pk
V	12310.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV
H	4924.00	52.17	30.55	5.77	24.66	52.05	74.00	-21.95	Pk
H	4924.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
H	7386.00	50.24	30.33	6.32	24.55	50.78	74.00	-23.22	Pk
H	7386.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	9848.00	51.76	30.85	7.45	24.69	53.05	74.00	-20.95	Pk
H	9848.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
H	12310.00	50.80	31.02	8.99	25.57	54.34	74.00	-19.66	Pk
H	12310.00	43.29	31.02	8.99	25.57	46.83	54.00	-7.17	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.81	30.55	5.77	24.66	51.69	74.00	-22.31	Pk
V	4824.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
V	7236.00	51.37	30.33	6.32	24.55	51.91	74.00	-22.09	Pk
V	7236.00	43.30	30.33	6.32	24.55	43.84	54.00	-10.16	AV
V	9648.00	52.40	30.85	7.45	24.69	53.69	74.00	-20.31	Pk
V	9648.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	12060.00	50.13	31.02	8.99	25.57	53.67	74.00	-20.33	Pk
V	12060.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV
H	4824.00	51.12	30.55	5.77	24.66	51.00	74.00	-23.00	Pk
H	4824.00	43.87	30.55	5.77	24.66	43.75	54.00	-10.25	AV
H	7236.00	53.44	30.33	6.32	24.55	53.98	74.00	-20.02	Pk
H	7236.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
H	9648.00	50.26	30.85	7.45	24.69	51.55	74.00	-22.45	Pk
H	9648.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
H	12060.00	50.53	31.02	8.99	25.57	54.07	74.00	-19.93	Pk
H	12060.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	50.21	30.55	5.77	24.66	50.09	74.00	-23.91	Pk
V	4874.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
V	7311.00	51.53	30.33	6.32	24.55	52.07	74.00	-21.93	Pk
V	7311.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	9748.00	51.38	30.85	7.45	24.69	52.67	74.00	-21.33	Pk
V	9748.00	43.45	30.85	7.45	24.69	44.74	54.00	-9.26	AV
V	12185.00	54.10	31.02	8.99	25.57	57.64	74.00	-16.36	Pk
V	12185.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV
H	4874.00	52.69	30.55	5.77	24.66	52.57	74.00	-21.43	Pk
H	4874.00	43.41	30.55	5.77	24.66	43.29	54.00	-10.71	AV
H	7311.00	54.32	30.33	6.32	24.55	54.86	74.00	-19.14	Pk
H	7311.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	9748.00	52.35	30.85	7.45	24.69	53.64	74.00	-20.36	Pk
H	9748.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
H	12185.00	53.38	31.02	8.99	25.57	56.92	74.00	-17.08	Pk
H	12185.00	43.77	31.02	8.99	25.57	47.31	54.00	-6.69	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.79	30.55	5.77	24.66	52.67	74.00	-21.33	Pk
V	4924.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
V	7386.00	54.73	30.33	6.32	24.55	55.27	74.00	-18.73	Pk
V	7386.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
V	9848.00	50.14	30.85	7.45	24.69	51.43	74.00	-22.57	Pk
V	9848.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
V	12310.00	52.86	31.02	8.99	25.57	56.40	74.00	-17.60	Pk
V	12310.00	43.32	31.02	8.99	25.57	46.86	54.00	-7.14	AV
H	4924.00	52.13	30.55	5.77	24.66	52.01	74.00	-21.99	Pk
H	4924.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	7386.00	54.48	30.33	6.32	24.55	55.02	74.00	-18.98	Pk
H	7386.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	9848.00	51.93	30.85	7.45	24.69	53.22	74.00	-20.78	Pk
H	9848.00	43.11	30.85	7.45	24.69	44.40	54.00	-9.60	AV
H	12310.00	54.08	31.02	8.99	25.57	57.62	74.00	-16.38	Pk
H	12310.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4924.00	52.38	30.55	5.77	24.66	52.26	74.00	-21.74	Pk
V	4924.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
V	7386.00	53.16	30.33	6.32	24.55	53.70	74.00	-20.30	Pk
V	7386.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
V	9848.00	54.46	30.85	7.45	24.69	55.75	74.00	-18.25	Pk
V	9848.00	43.83	30.85	7.45	24.69	45.12	54.00	-8.88	AV
V	12310.00	54.51	31.02	8.99	25.57	58.05	74.00	-15.95	Pk
V	12310.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV
H	4924.00	50.17	30.55	5.77	24.66	50.05	74.00	-23.95	Pk
H	4924.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	7386.00	54.31	30.33	6.32	24.55	54.85	74.00	-19.15	Pk
H	7386.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	9848.00	53.70	30.85	7.45	24.69	54.99	74.00	-19.01	Pk
H	9848.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	12310.00	54.42	31.02	8.99	25.57	57.96	74.00	-16.04	Pk
H	12310.00	43.13	31.02	8.99	25.57	46.67	54.00	-7.33	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	50.40	30.55	5.77	24.66	50.28	74.00	-23.72	Pk
V	4874.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
V	7311.00	54.21	30.33	6.32	24.55	54.75	74.00	-19.25	Pk
V	7311.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
V	9748.00	54.18	30.85	7.45	24.69	55.47	74.00	-18.53	Pk
V	9748.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
V	12185.00	52.34	31.02	8.99	25.57	55.88	74.00	-18.12	Pk
V	12185.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	4874.00	51.71	30.55	5.77	24.66	51.59	74.00	-22.41	Pk
H	4874.00	43.24	30.55	5.77	24.66	43.12	54.00	-10.88	AV
H	7311.00	54.39	30.33	6.32	24.55	54.93	74.00	-19.07	Pk
H	7311.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
H	9748.00	54.51	30.85	7.45	24.69	55.80	74.00	-18.20	Pk
H	9748.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
H	12185.00	54.21	31.02	8.99	25.57	57.75	74.00	-16.25	Pk
H	12185.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	50.20	30.55	5.77	24.66	50.08	74.00	-23.92	Pk
V	4924.00	43.02	30.55	5.77	24.66	42.90	54.00	-11.10	AV
V	7386.00	53.86	30.33	6.32	24.55	54.40	74.00	-19.60	Pk
V	7386.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
V	9848.00	53.25	30.85	7.45	24.69	54.54	74.00	-19.46	Pk
V	9848.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
V	12310.00	50.40	31.02	8.99	25.57	53.94	74.00	-20.06	Pk
V	12310.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	4924.00	54.37	30.55	5.77	24.66	54.25	74.00	-19.75	Pk
H	4924.00	43.38	30.55	5.77	24.66	43.26	54.00	-10.74	AV
H	7386.00	50.96	30.33	6.32	24.55	51.50	74.00	-22.50	Pk
H	7386.00	43.87	30.33	6.32	24.55	44.41	54.00	-9.59	AV
H	9848.00	52.35	30.85	7.45	24.69	53.64	74.00	-20.36	Pk
H	9848.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
H	12310.00	52.41	31.02	8.99	25.57	55.95	74.00	-18.05	Pk
H	12310.00	43.02	31.02	8.99	25.57	46.56	54.00	-7.44	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.RADIATED BAND EMISSIONMEASUREMENT**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-247Section 3.3 & RSS-Gen Section 8.10				
Test Method:	ANSI C63.10: 2013 Section 11.12				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

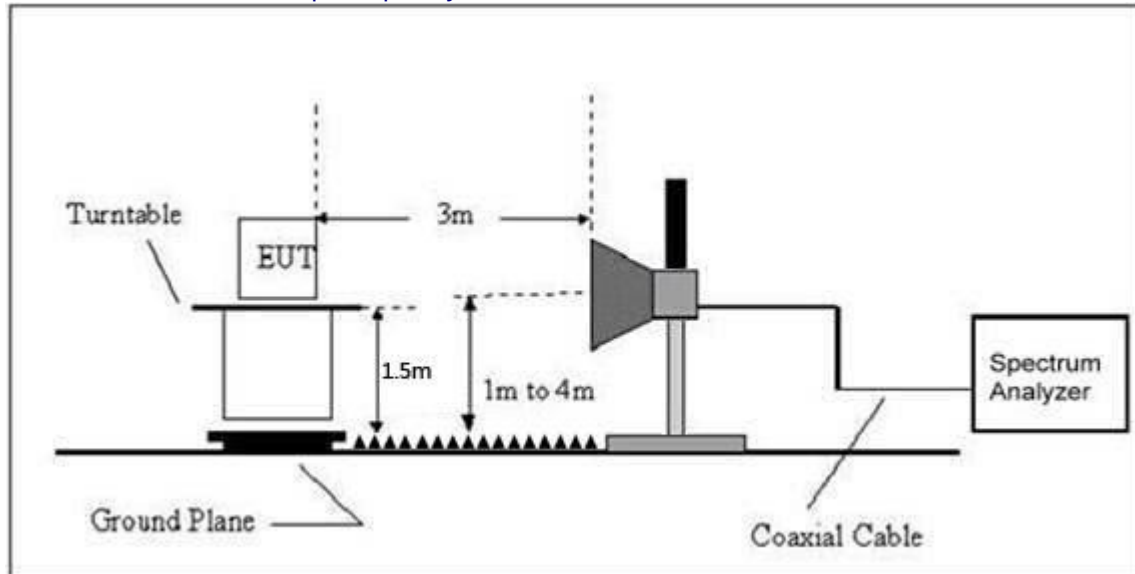


5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT


All modes were tested (Worst case 802.11b)

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/ 60Hz	Test channel	2412MHz (Worst case)

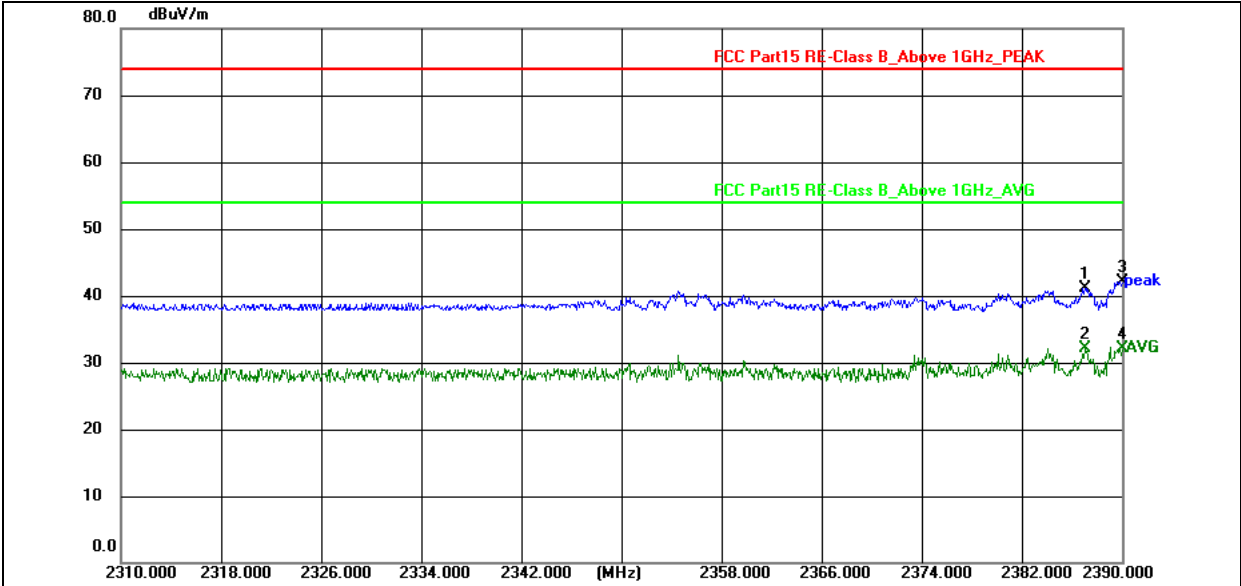


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2387.040	45.09	-3.98	41.11	74.00	-32.89	peak
2	2387.040	35.99	-3.98	32.01	54.00	-21.99	AVG
3	2390.000	46.15	-3.96	42.19	74.00	-31.81	peak
4 *	2390.000	36.07	-3.96	32.11	54.00	-21.89	AVG

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/ 60Hz	Test channel	2412MHz (Worst case)

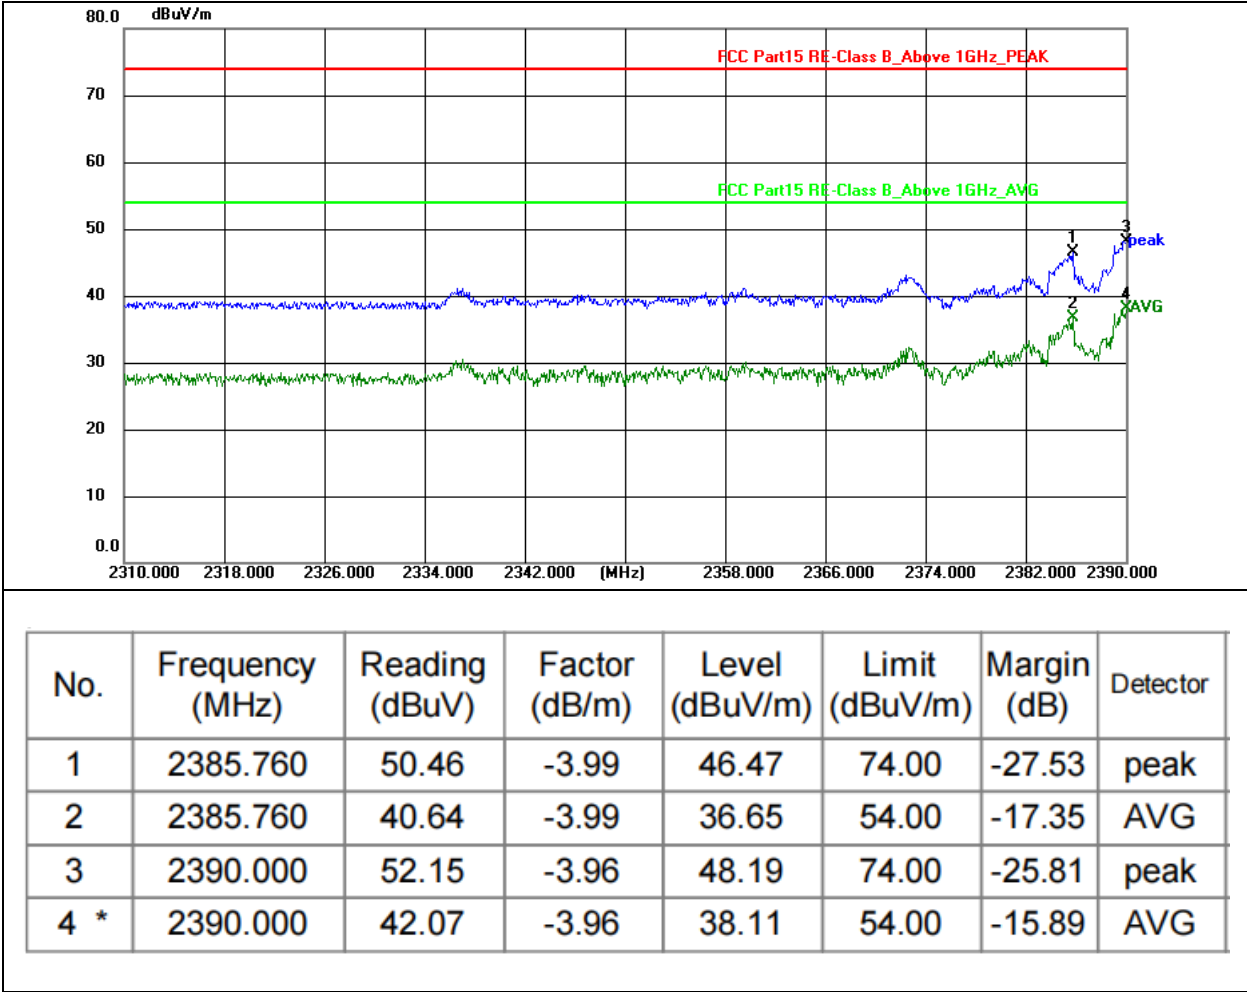


Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/ 60Hz	Test channel	2462MHz (Worst case)

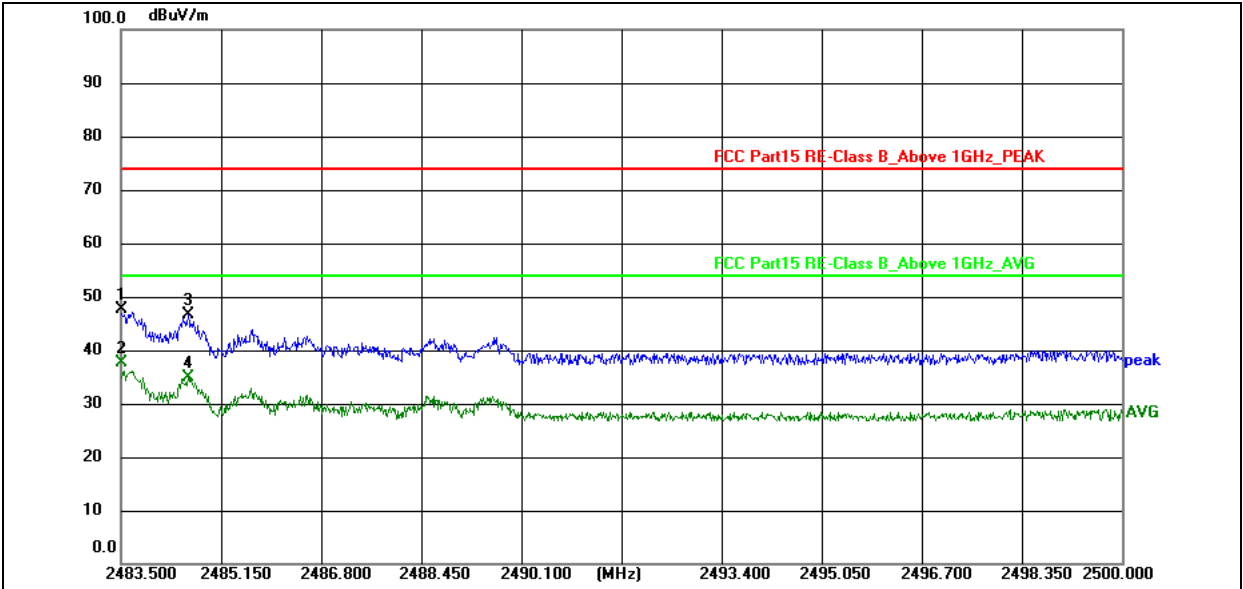

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	51.15	-3.58	47.57	74.00	-26.43	peak
2 *	2483.500	41.23	-3.58	37.65	54.00	-16.35	AVG
3	2484.616	50.11	-3.57	46.54	74.00	-27.46	peak
4	2484.616	38.39	-3.57	34.82	54.00	-19.18	AVG

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/ 60Hz	Test channel	2462MHz (Worst case)

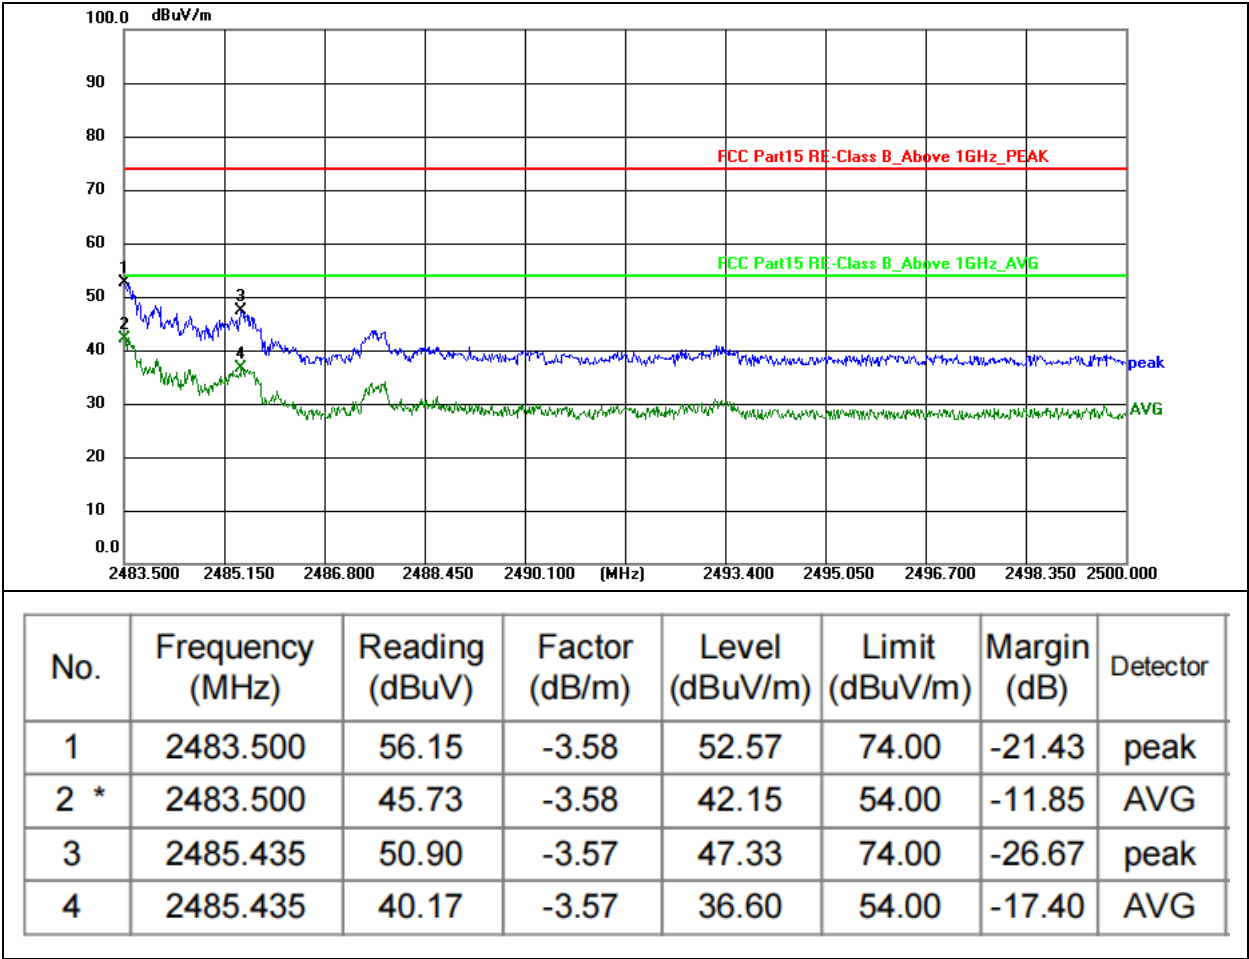

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e) RSS-247 Section 5.2(b)
Test Method:	ANSI C63.10:2013 Section 11.10.2

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz(SISO)	2400-2483.5	PASS

RSS-247 Section 5.2(b)			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8dBm/3kHz(SISO)	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

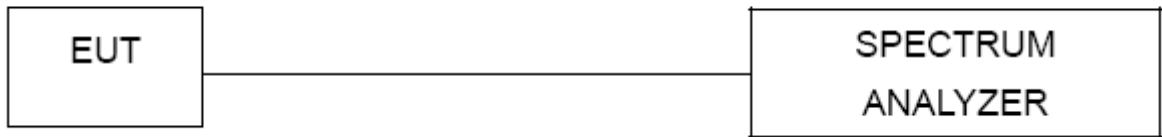


6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT


Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz) ≤	Verdict
b	2412	-20.54	8	Pass
b	2437	-21.35	8	Pass
b	2462	-21.75	8	Pass
g	2412	-19.36	8	Pass
g	2437	-20.25	8	Pass
g	2462	-20.71	8	Pass
n20	2412	-17.91	8	Pass
n20	2437	-18.5	8	Pass
n20	2462	-18.39	8	Pass

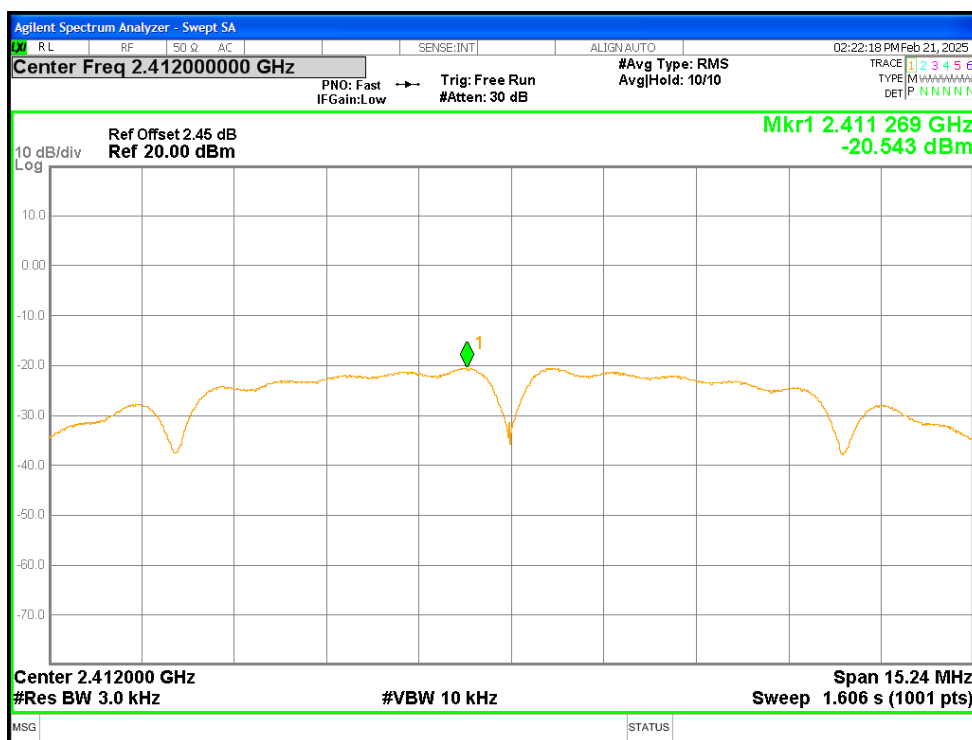


PSD NVNT b 2412MHz Ant1

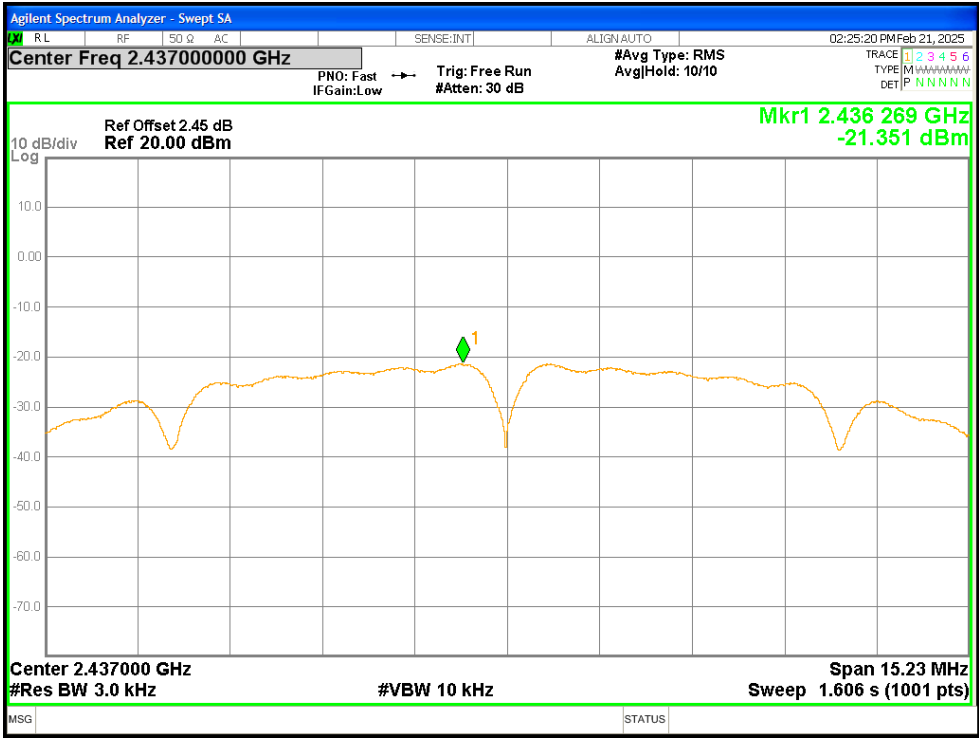


PSD NVNT b 2437MHz Ant1

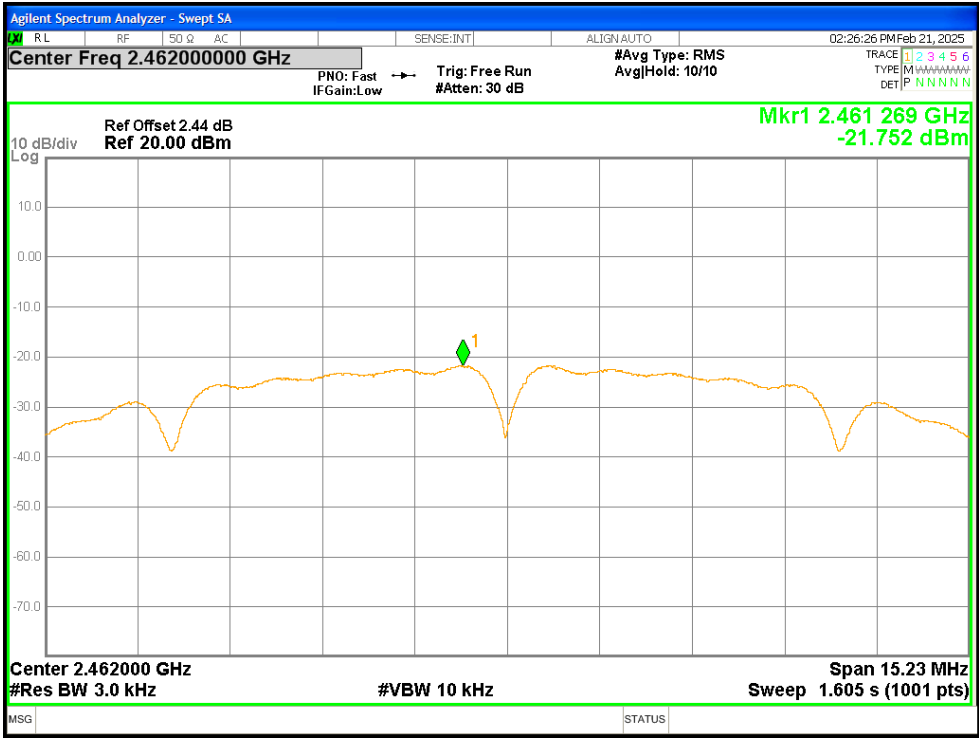


PSD NVNT b 2462MHz Ant1

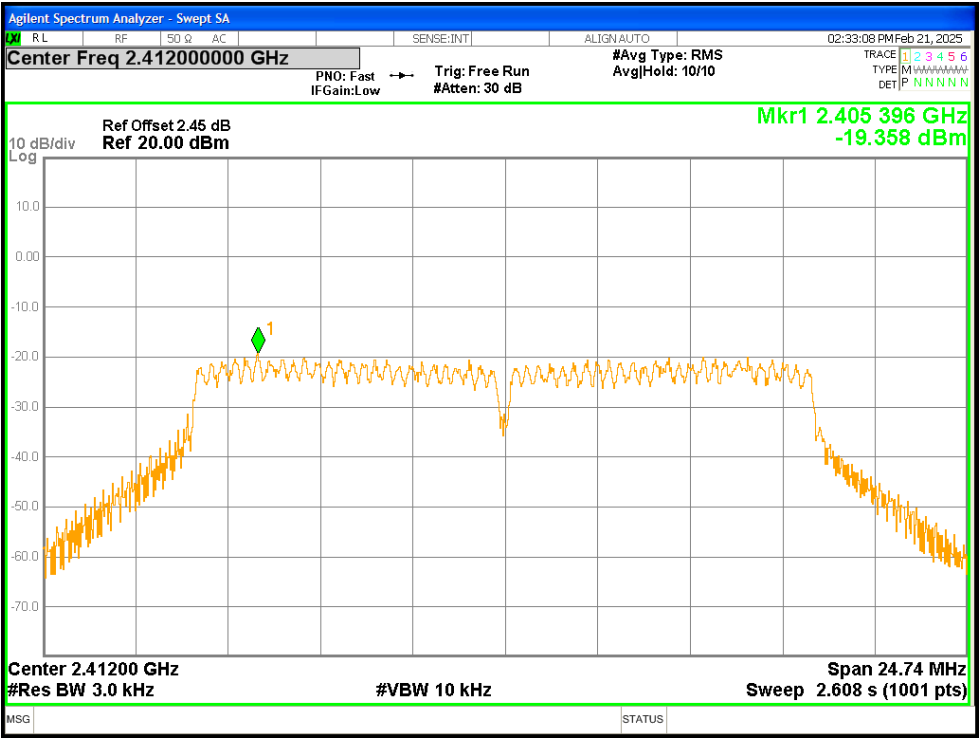


PSD NVNT g 2412MHz Ant1

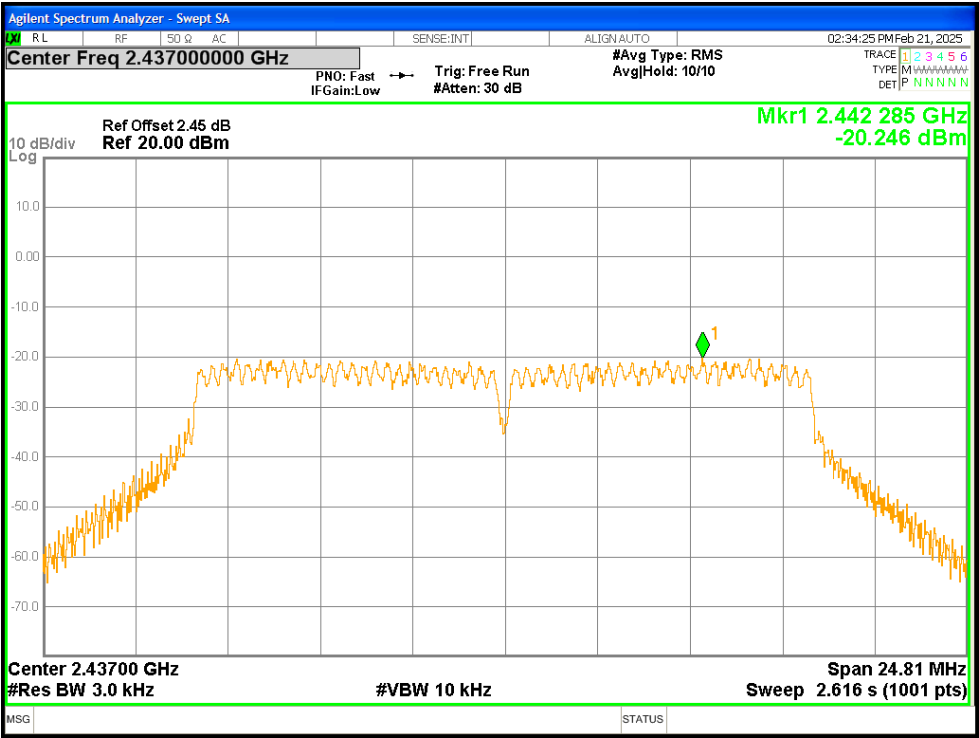


PSD NVNT g 2437MHz Ant1

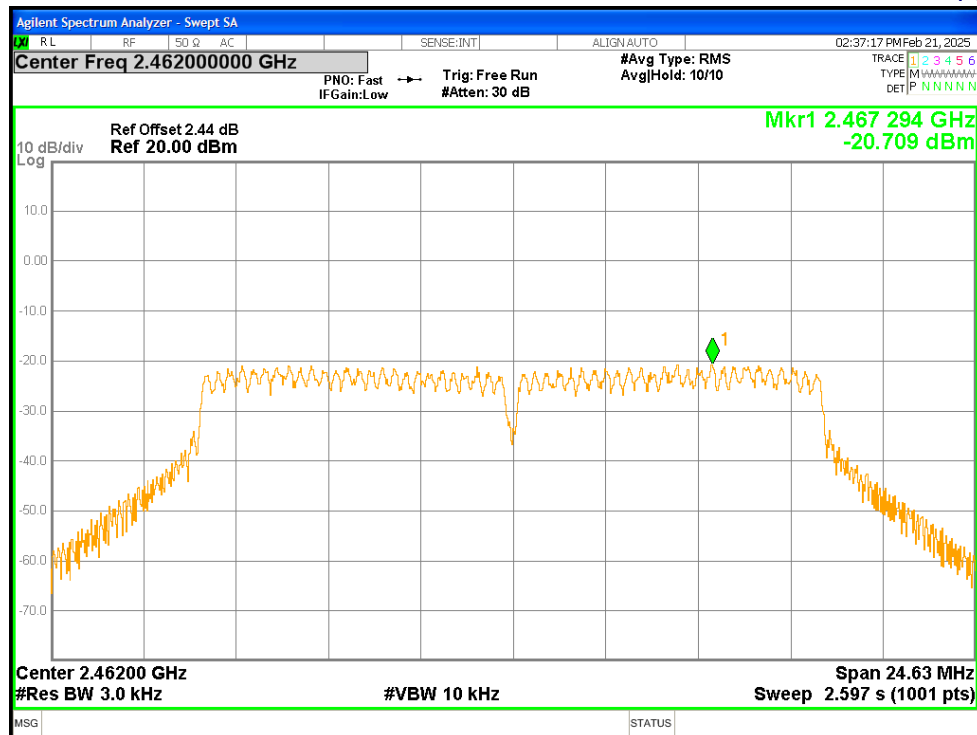


PSD NVNT g 2462MHz Ant1

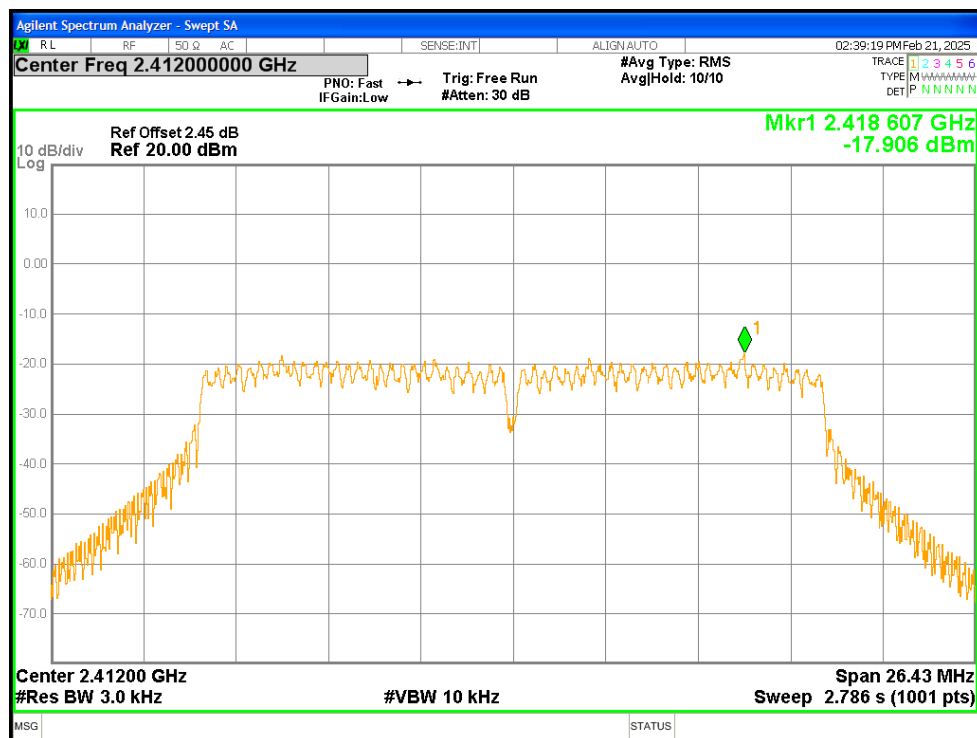

PSD NVNT n20 2412MHz Ant1

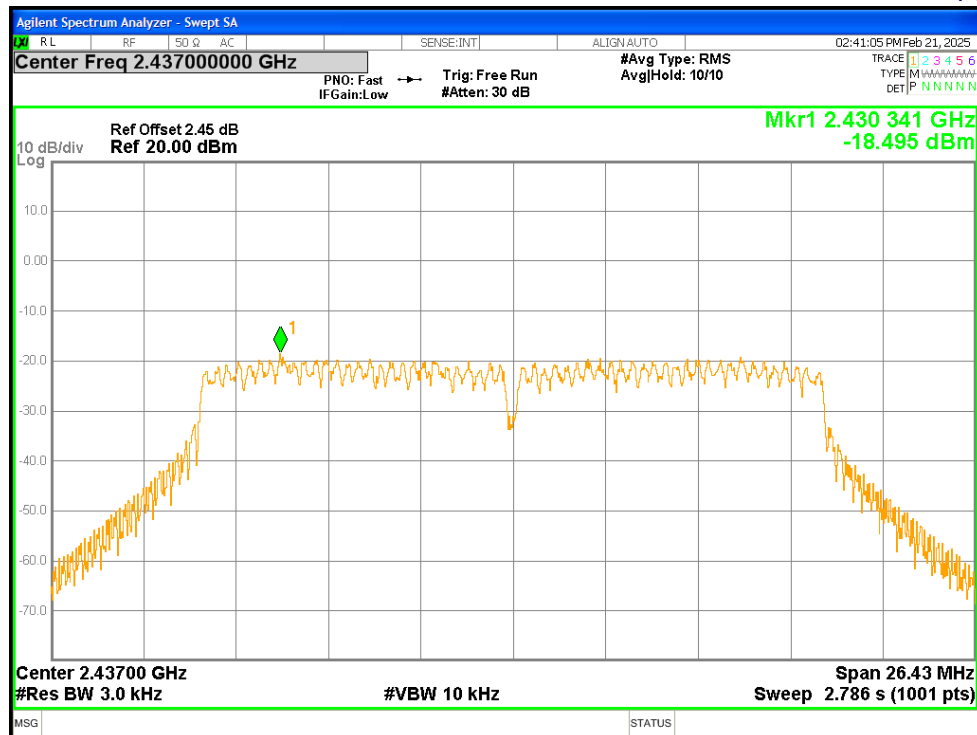

PSD NVNT n20 2437MHz Ant1

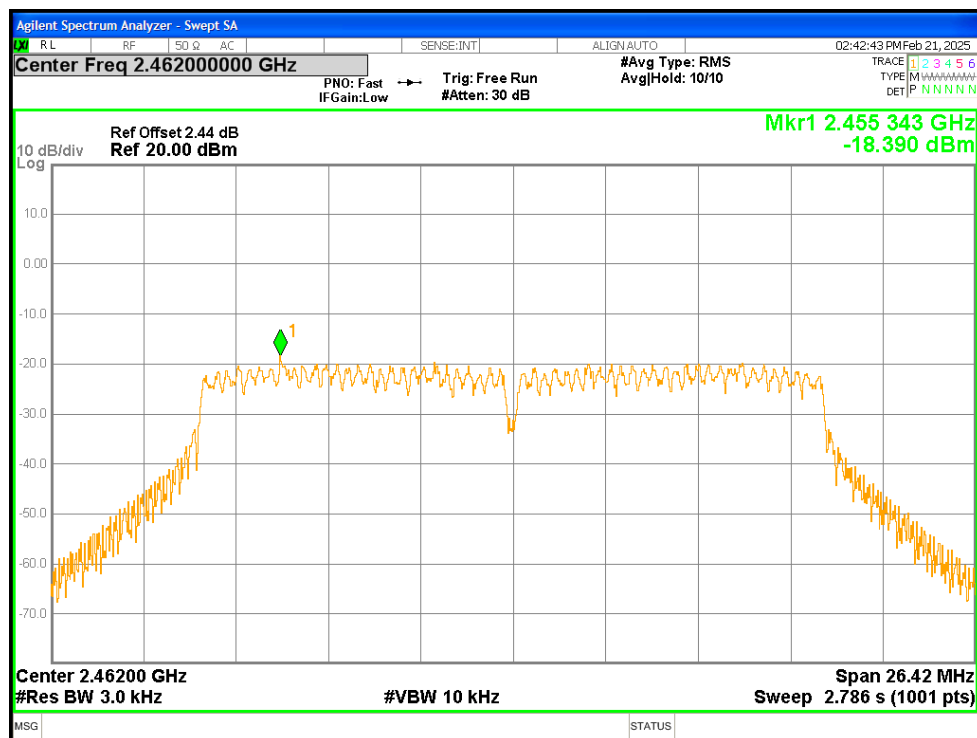

PSD NVNT n20 2462MHz Ant1

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2) RSS-247 Section 5.2(a)
Test Method:	ANSI C63.10:2013 Section 11.8

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

RSS-247 Section 5.2(a)			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT


Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	10.106	0.5	Pass
b	2437	10.111	0.5	Pass
b	2462	10.094	0.5	Pass
g	2412	16.49	0.5	Pass
g	2437	16.541	0.5	Pass
g	2462	16.486	0.5	Pass
n20	2412	17.653	0.5	Pass
n20	2437	17.617	0.5	Pass
n20	2462	17.612	0.5	Pass

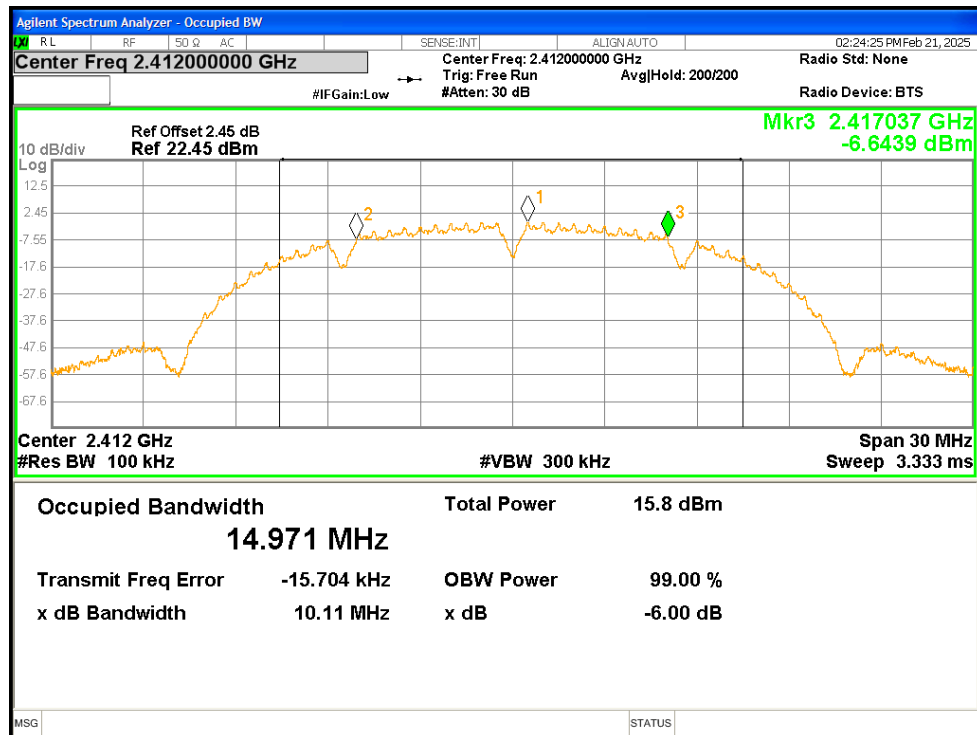


-6dB Bandwidth NVNT b 2412MHz Ant1

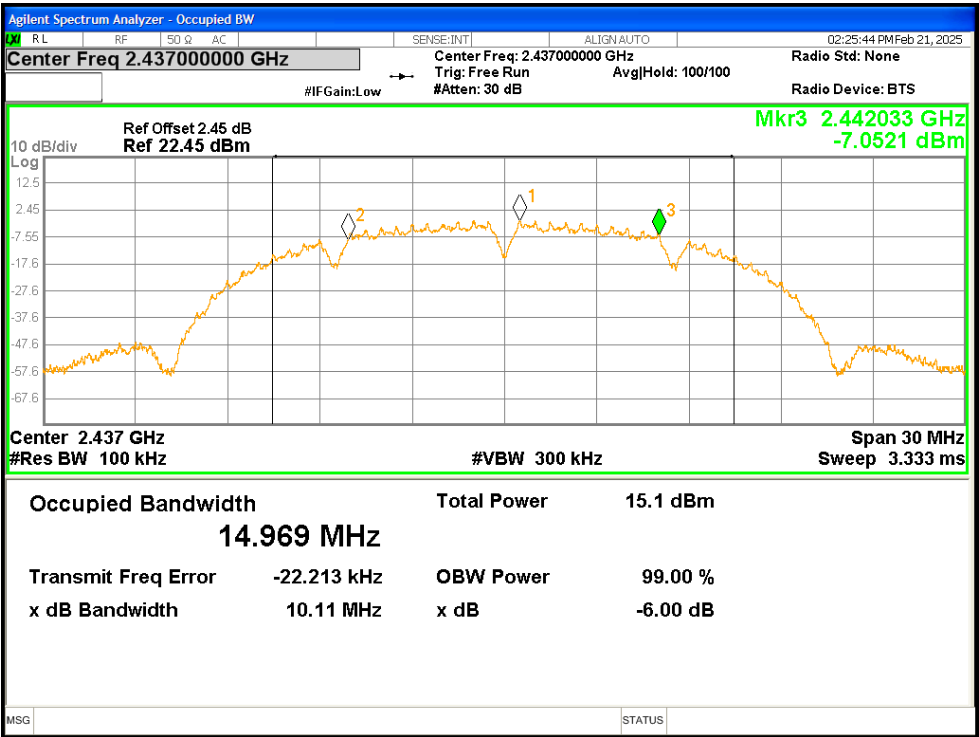


-6dB Bandwidth NVNT b 2437MHz Ant1

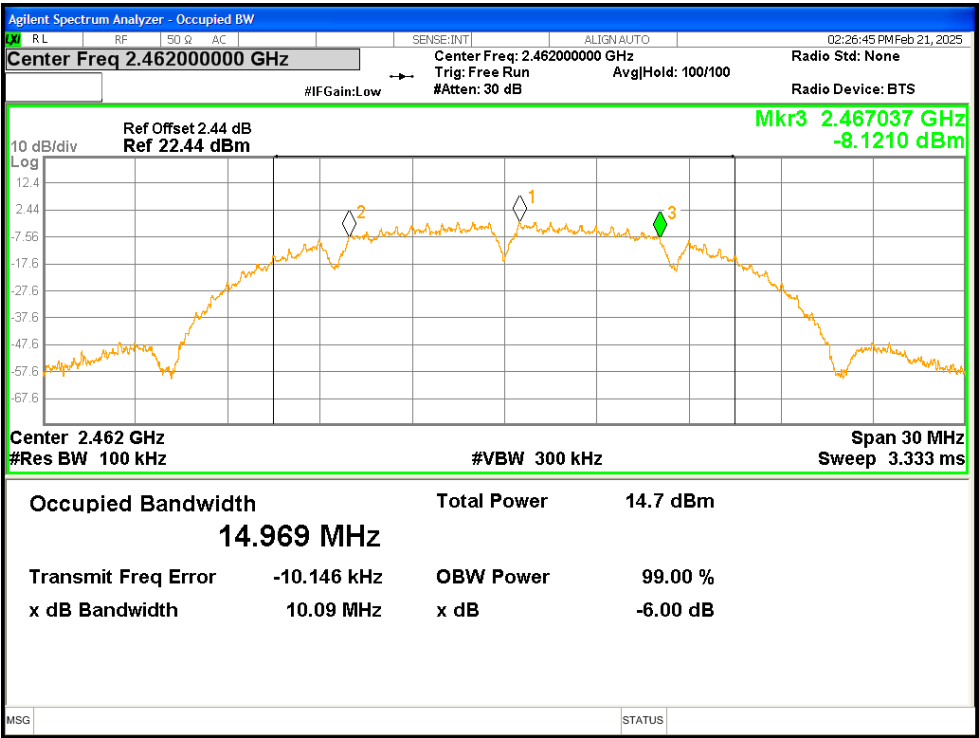


-6dB Bandwidth NVNT b 2462MHz Ant1

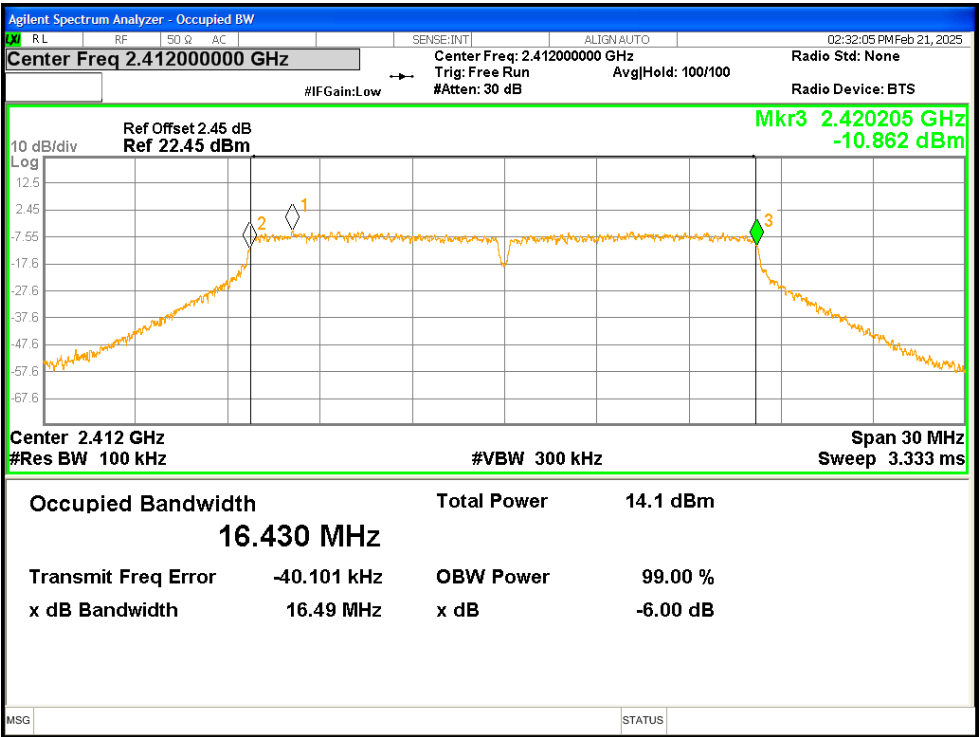


-6dB Bandwidth NVNT g 2412MHz Ant1

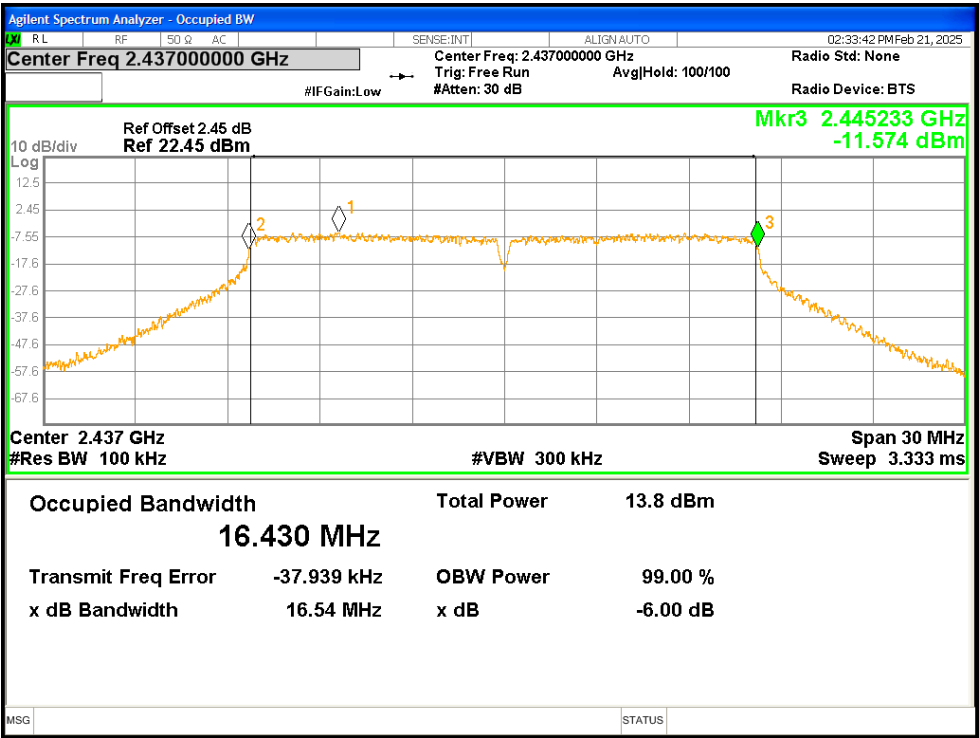


-6dB Bandwidth NVNT g 2437MHz Ant1

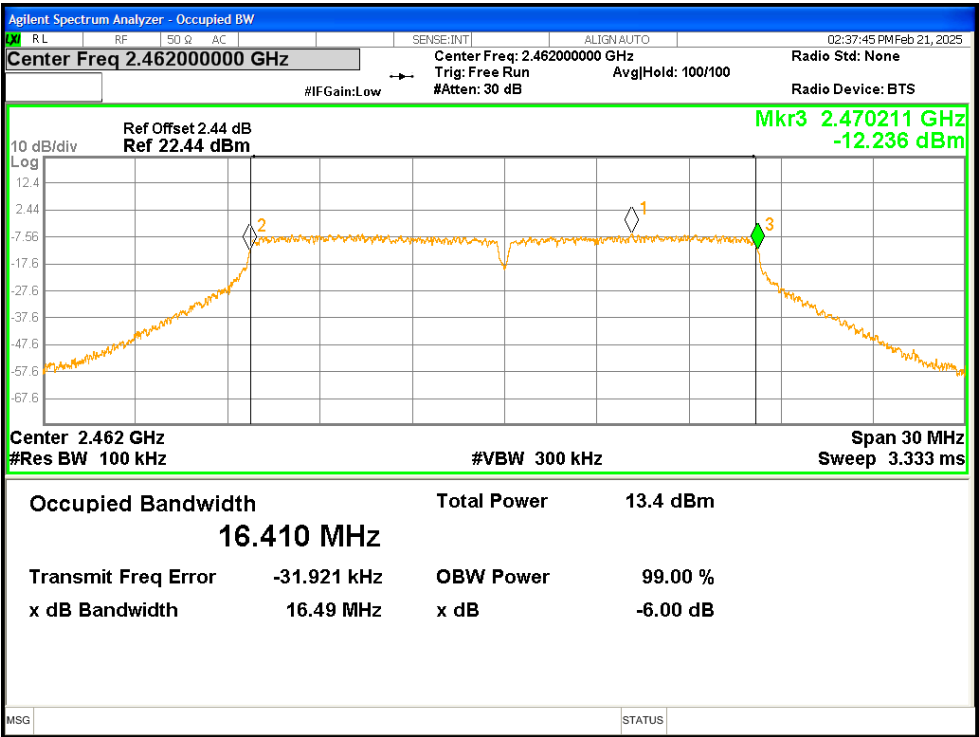


-6dB Bandwidth NVNT g 2462MHz Ant1

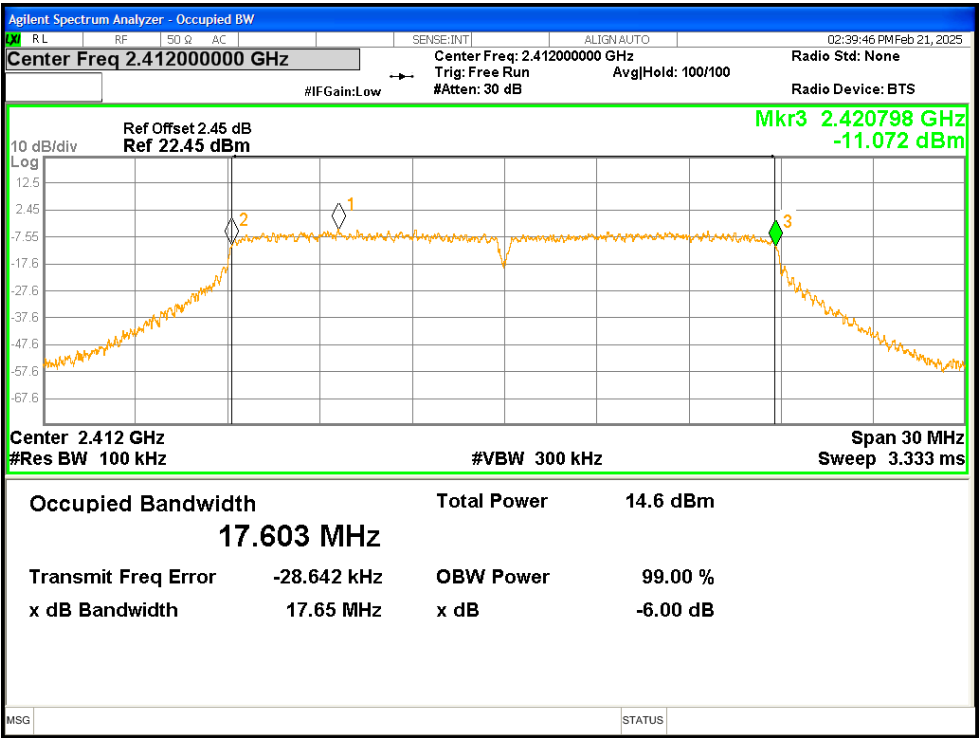

-6dB Bandwidth NVNT n20 2412MHz Ant1

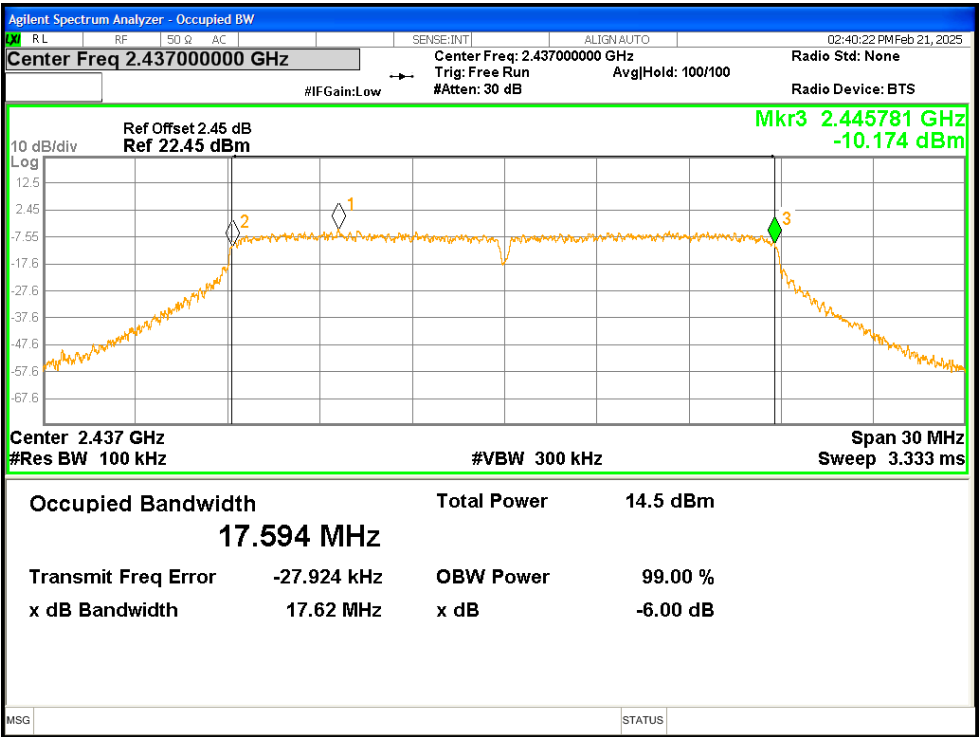

-6dB Bandwidth NVNT n20 2437MHz Ant1

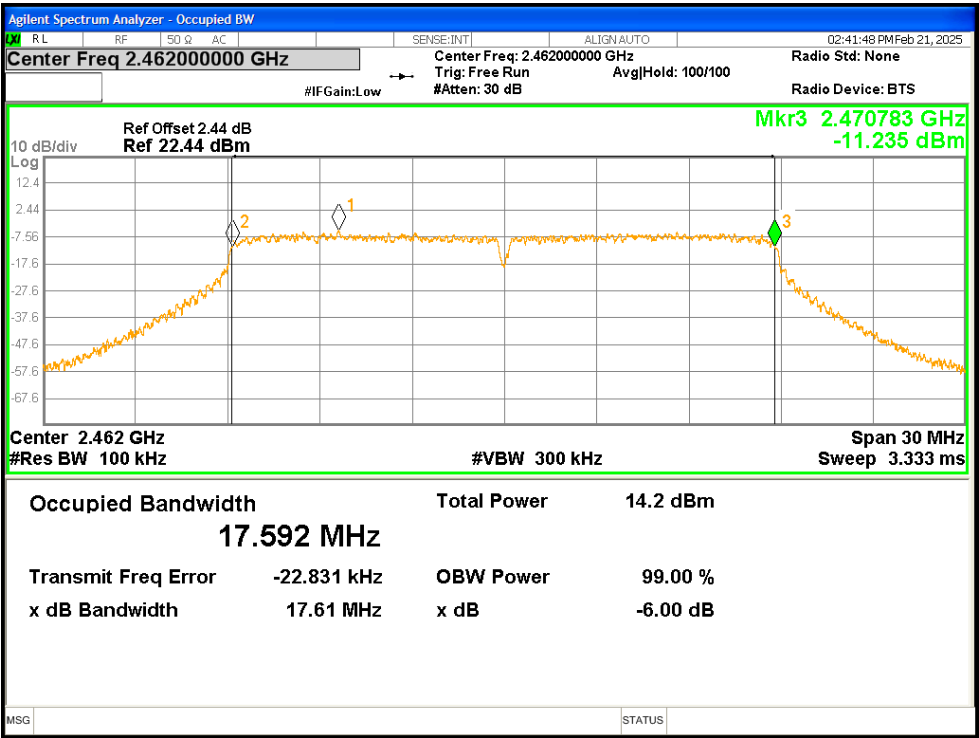

-6dB Bandwidth NVNT n20 2462MHz Ant1

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3) RSS-247 Section 5.4(d)
Test Method:	ANSI C63.10:2013 Section 11.9.1.3

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power(SISO)	1 watt or 30dBm	2400-2483.5	PASS

RSS-247 Section 5.4(d)			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm EIRP: 4W(36dBm)	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Mode	Frequency (MHz)	Conducted Power (dBm)	e.i.r.p. (W)	Conducted Power Limit (dBm)	e.i.r.p. Limit (W)	Verdict
b	2412	13.96	0.03342	30	4	Pass
b	2437	14.01	0.03381	30	4	Pass
b	2462	13.34	0.02897	30	4	Pass
g	2412	13.67	0.03126	30	4	Pass
g	2437	13.63	0.03097	30	4	Pass
g	2462	12.81	0.02564	30	4	Pass
n20	2412	13.93	0.03319	30	4	Pass
n20	2437	13.76	0.03192	30	4	Pass
n20	2462	13.77	0.03199	30	4	Pass

Note: EIRP=Peak Output Power+Antenna gain

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 Section 11.11

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	-47.98	-20	Pass
b	2437	-47.92	-20	Pass
b	2462	-46.07	-20	Pass
g	2412	-44.73	-20	Pass
g	2437	-45.02	-20	Pass
g	2462	-39.91	-20	Pass
n20	2412	-40.13	-20	Pass
n20	2437	-40.23	-20	Pass
n20	2462	-41.08	-20	Pass

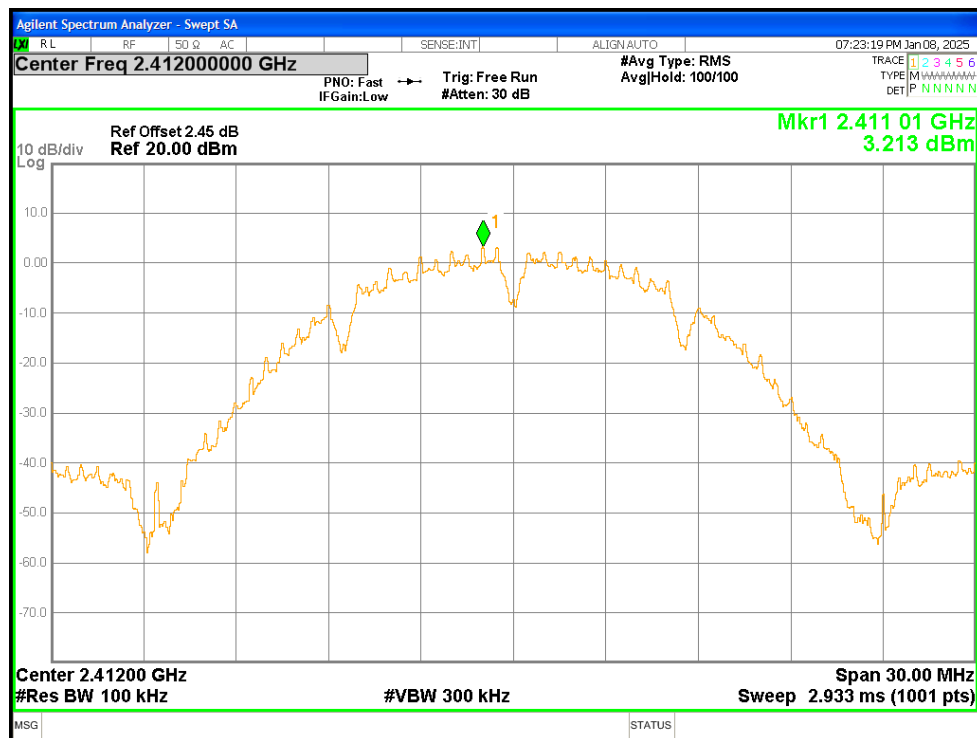


Tx. Spurious NVNT b 2412MHz Ant1 Ref

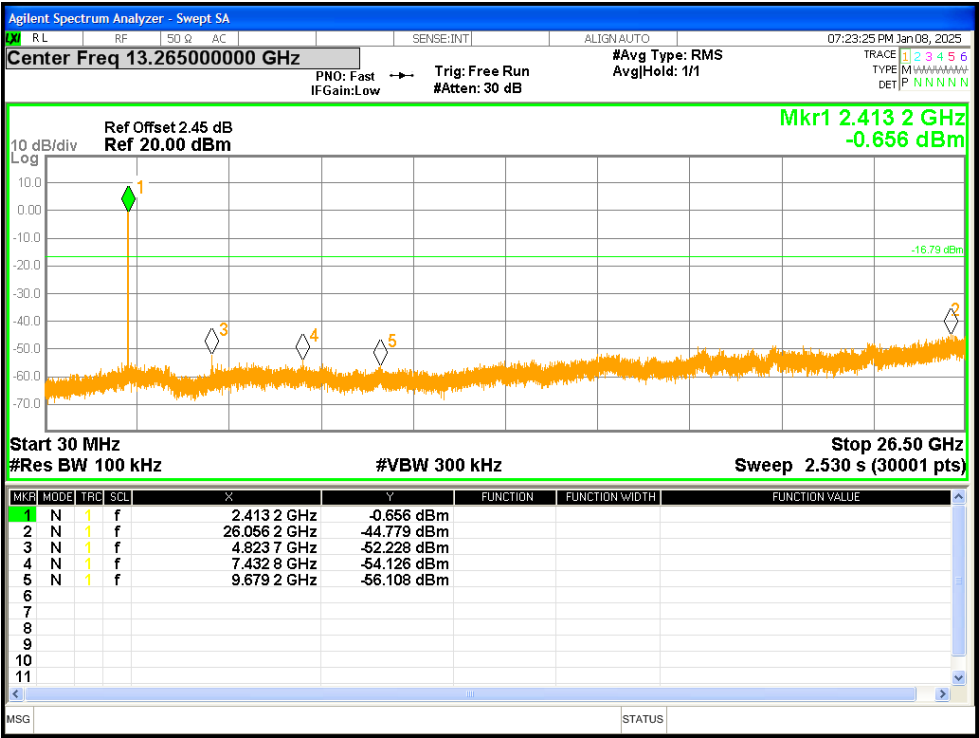


Tx. Spurious NVNT b 2412MHz Ant1 Emission

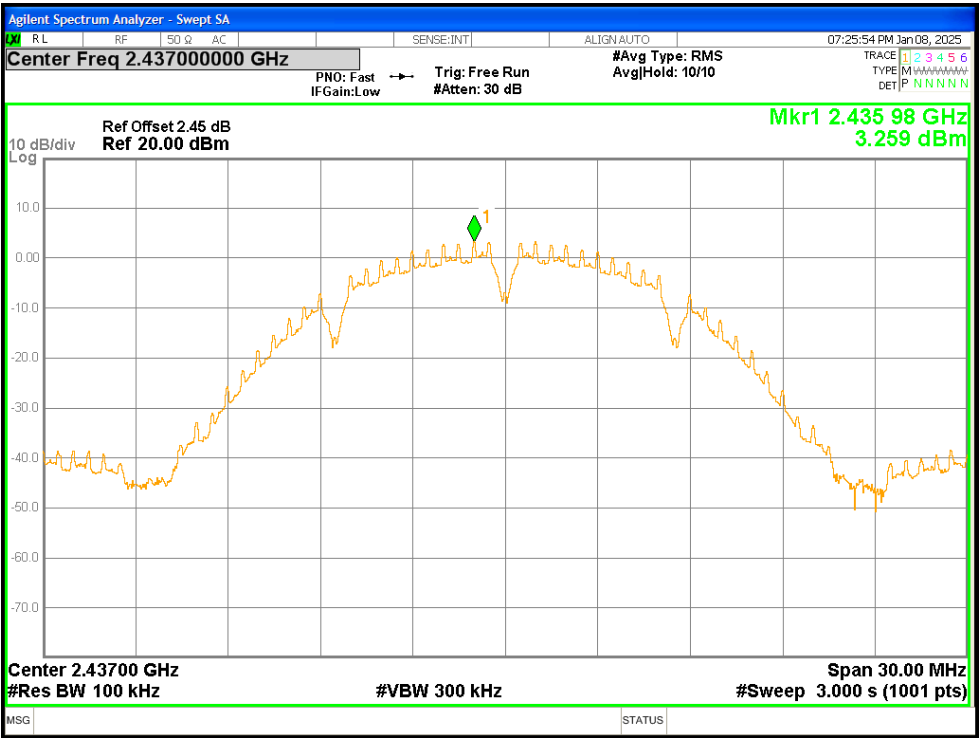


Tx. Spurious NVNT b 2437MHz Ant1 Ref

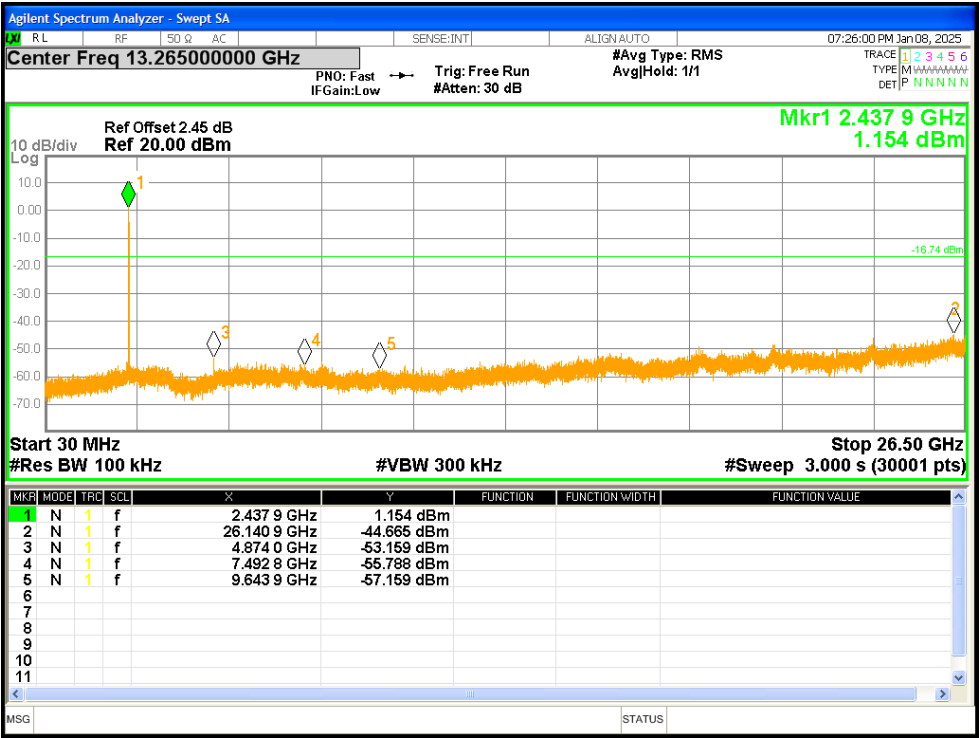


Tx. Spurious NVNT b 2437MHz Ant1 Emission

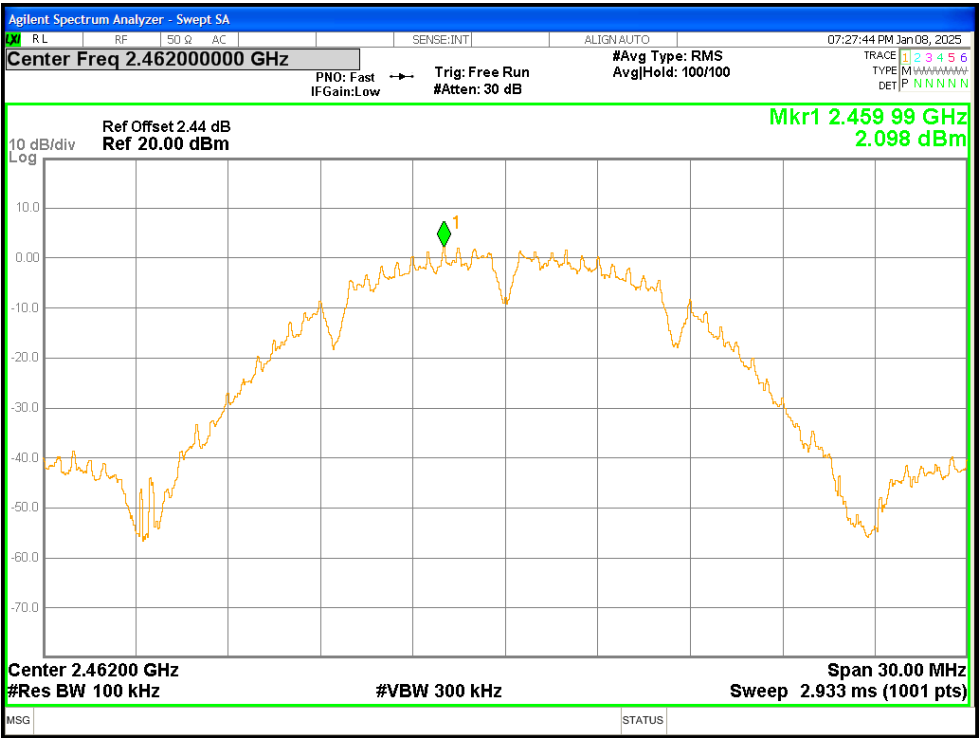


Tx. Spurious NVNT b 2462MHz Ant1 Ref

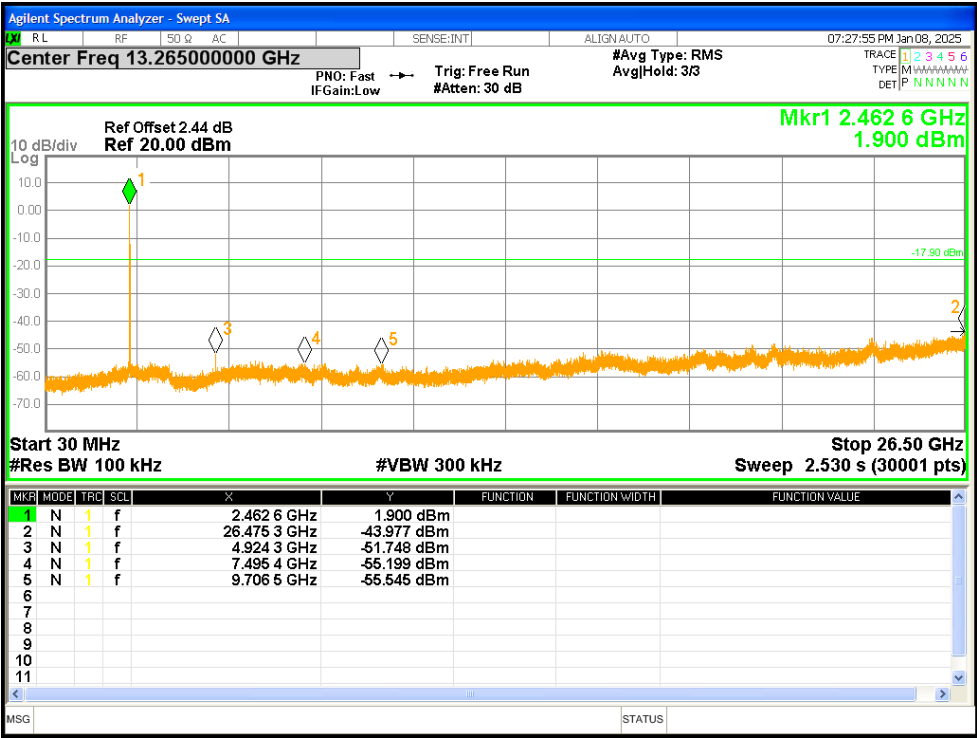


Tx. Spurious NVNT b 2462MHz Ant1 Emission

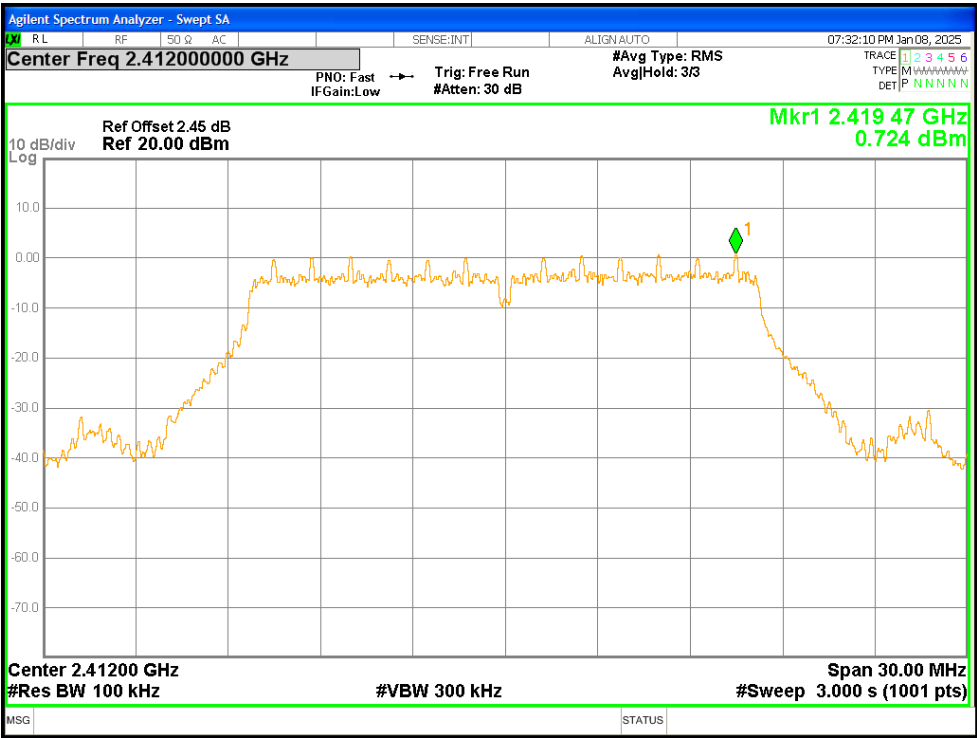


Tx. Spurious NVNT g 2412MHz Ant1 Ref

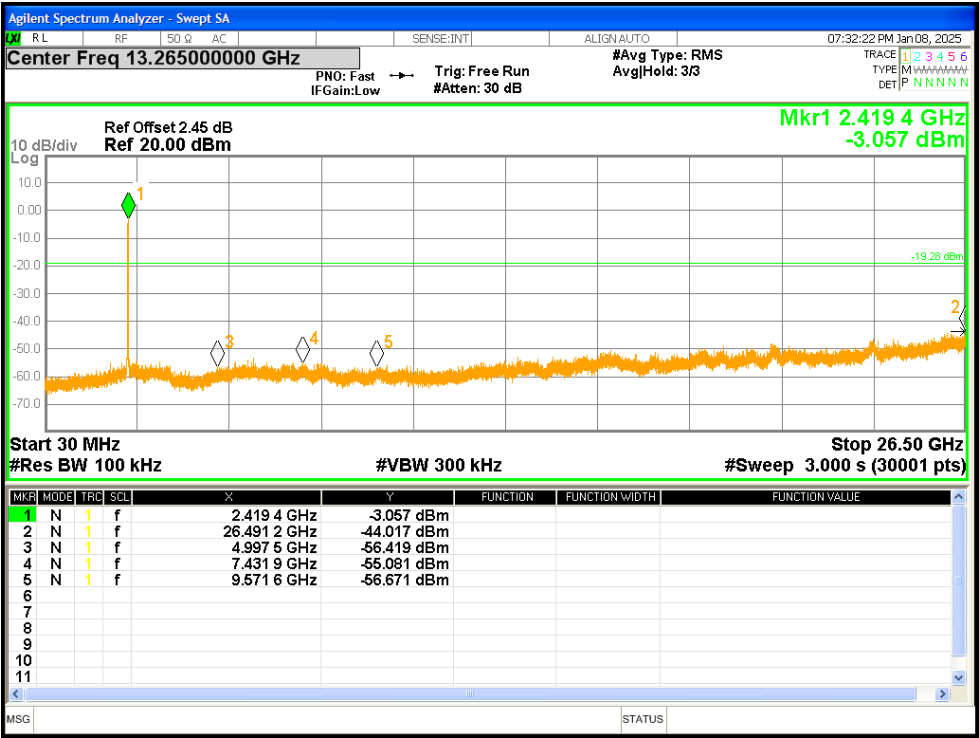


Tx. Spurious NVNT g 2412MHz Ant1 Emission

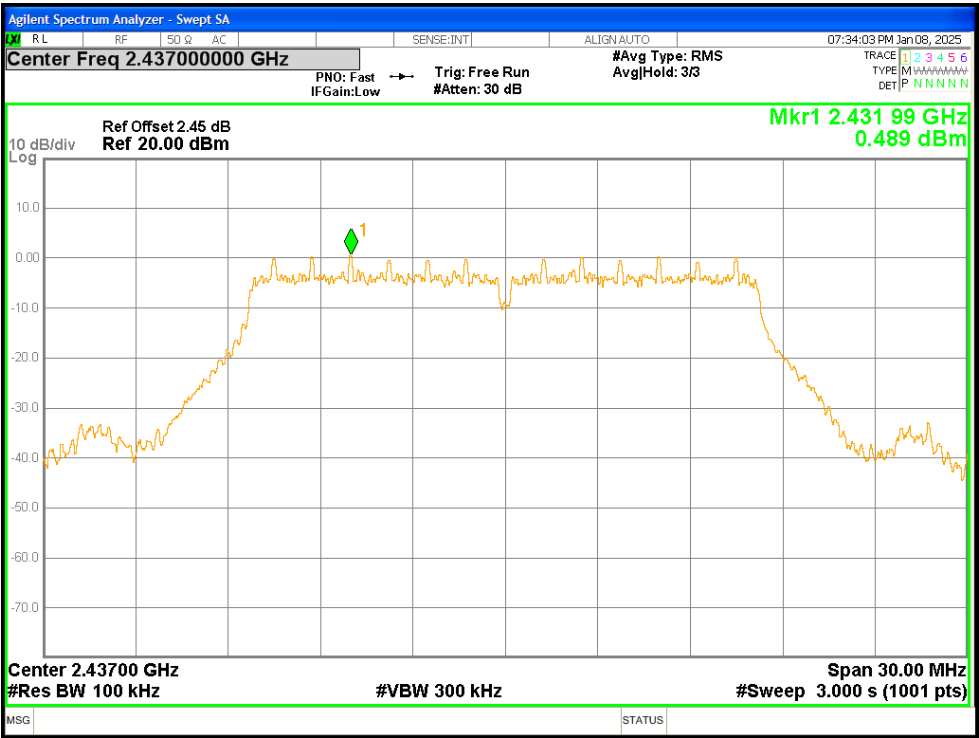


Tx. Spurious NVNT g 2437MHz Ant1 Ref

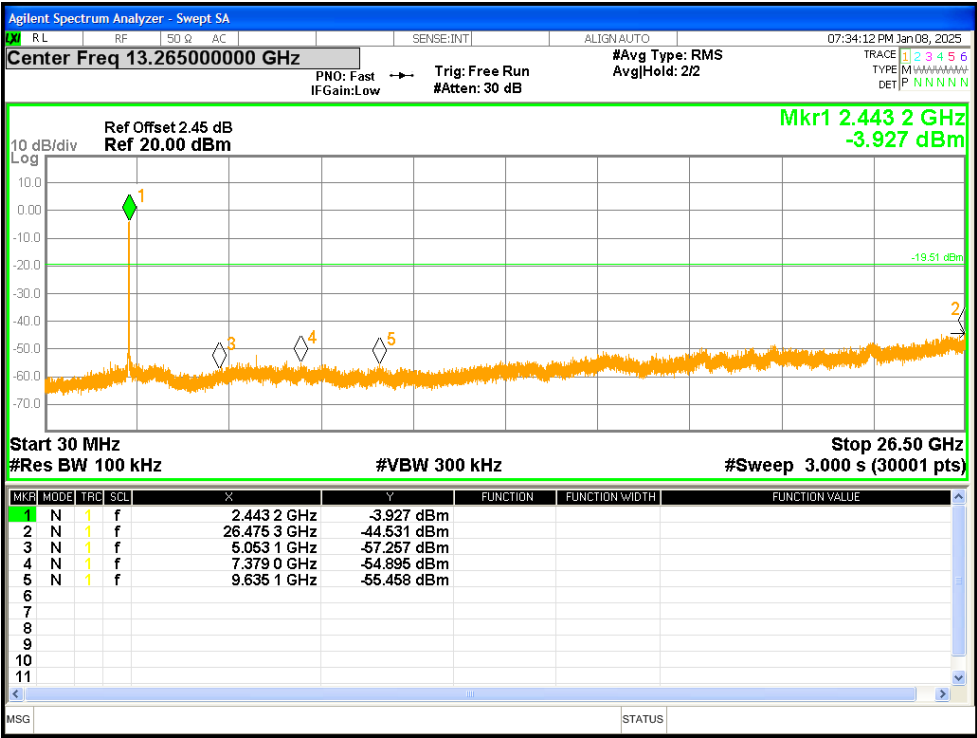


Tx. Spurious NVNT g 2437MHz Ant1 Emission

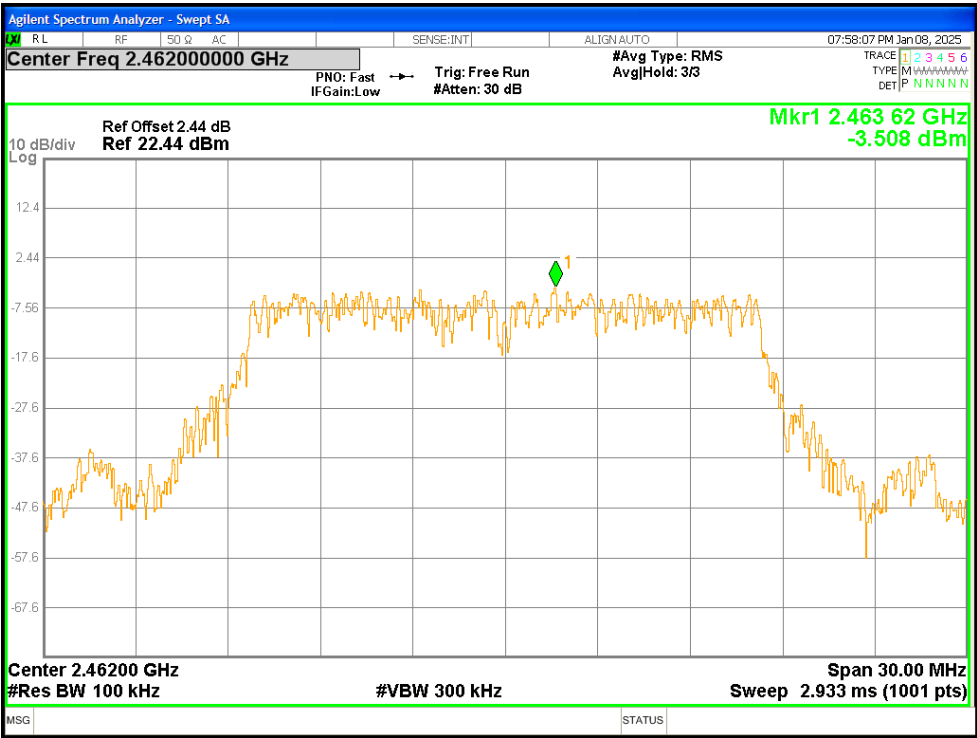


Tx. Spurious NVNT g 2462MHz Ant1 Ref

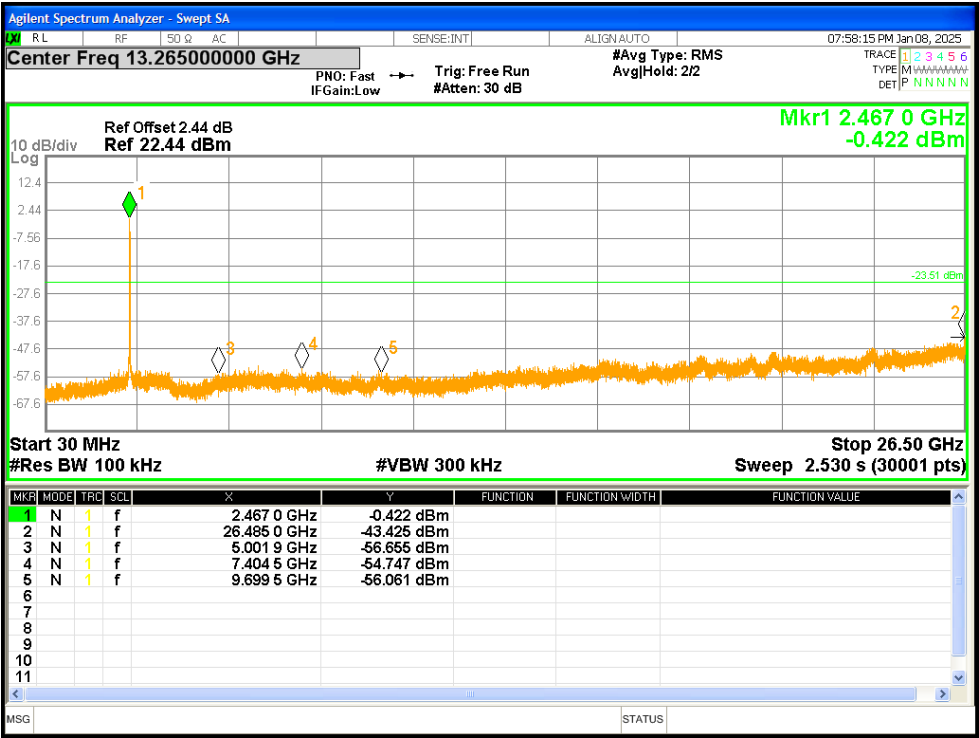


Tx. Spurious NVNT g 2462MHz Ant1 Emission

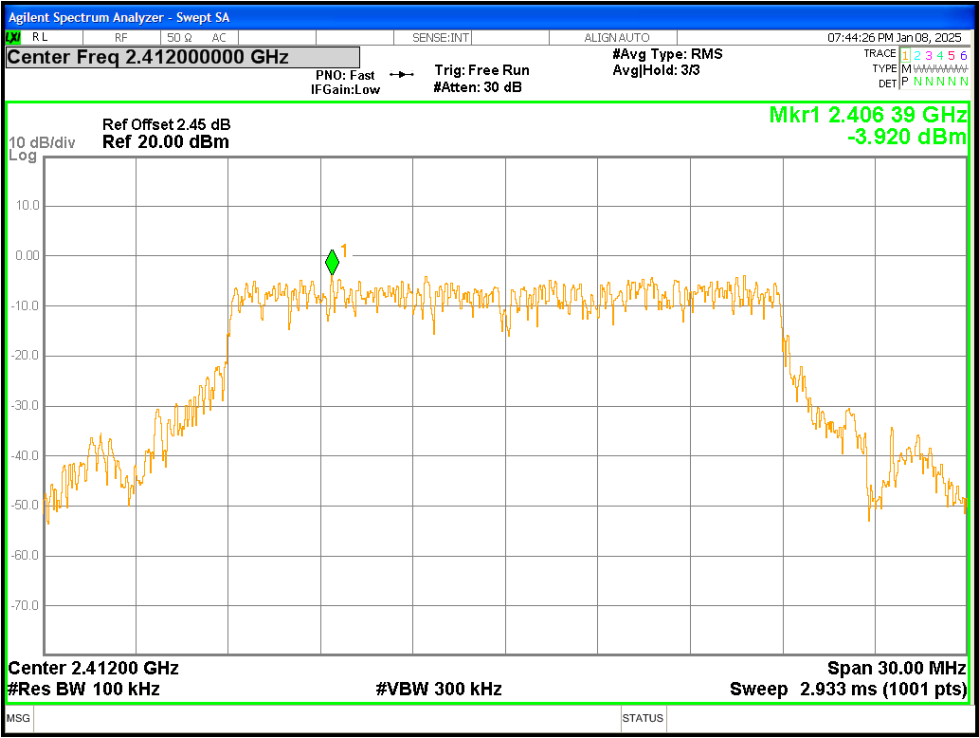


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

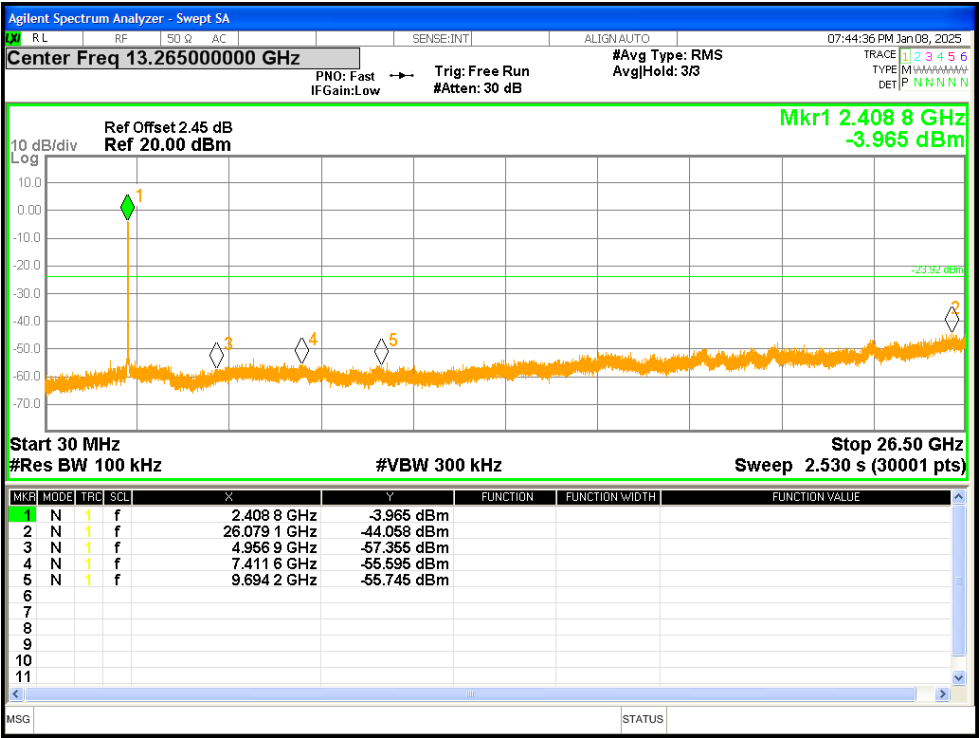


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

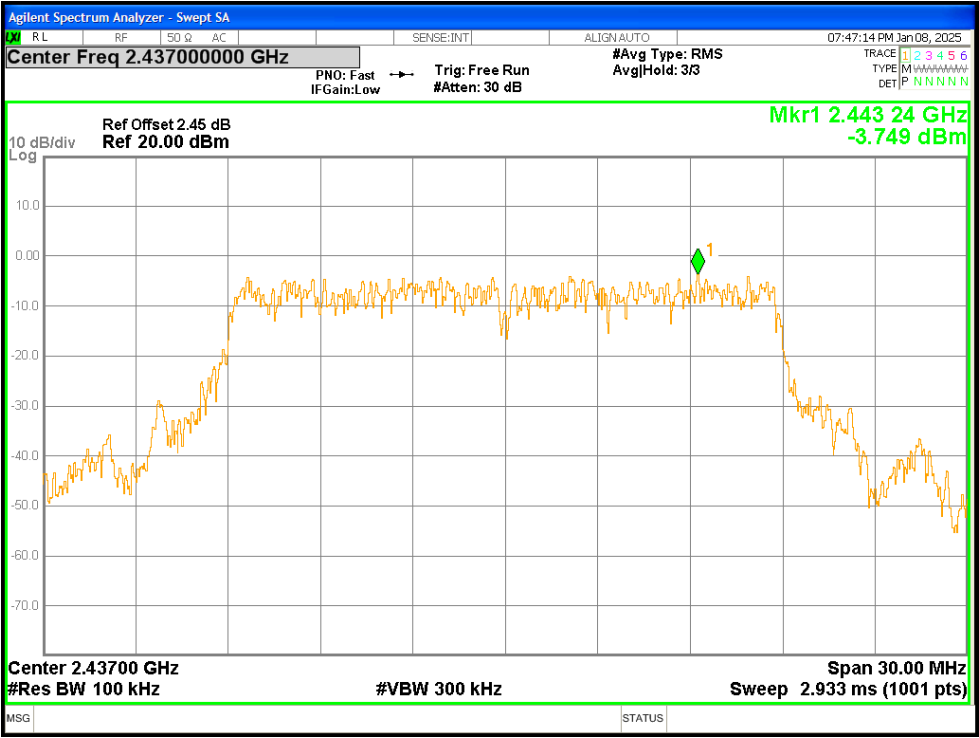


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

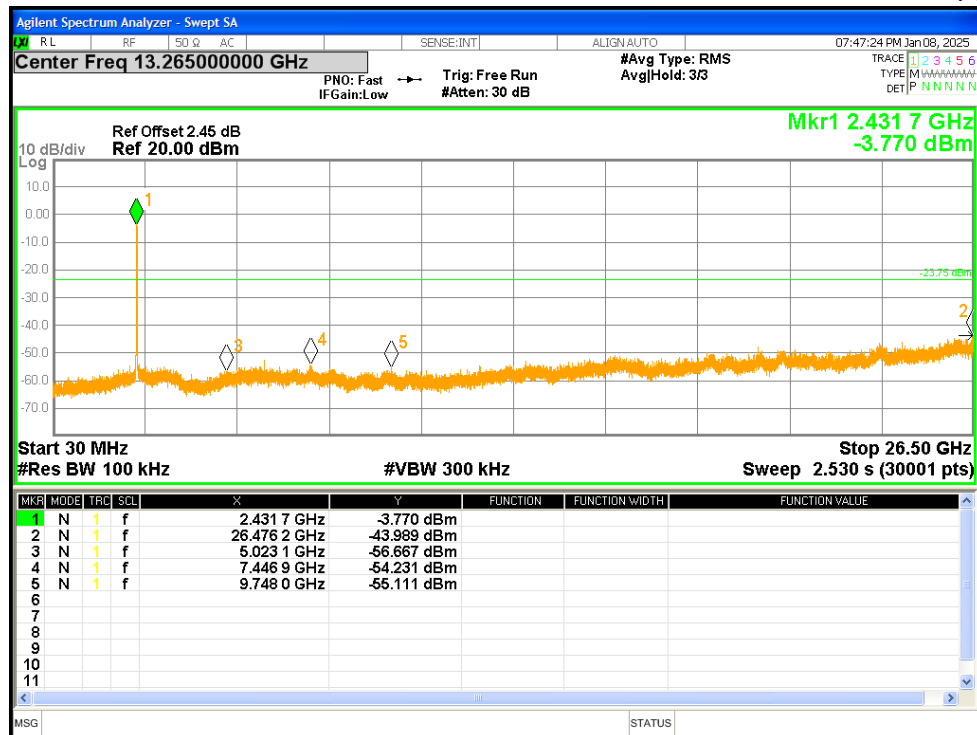

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

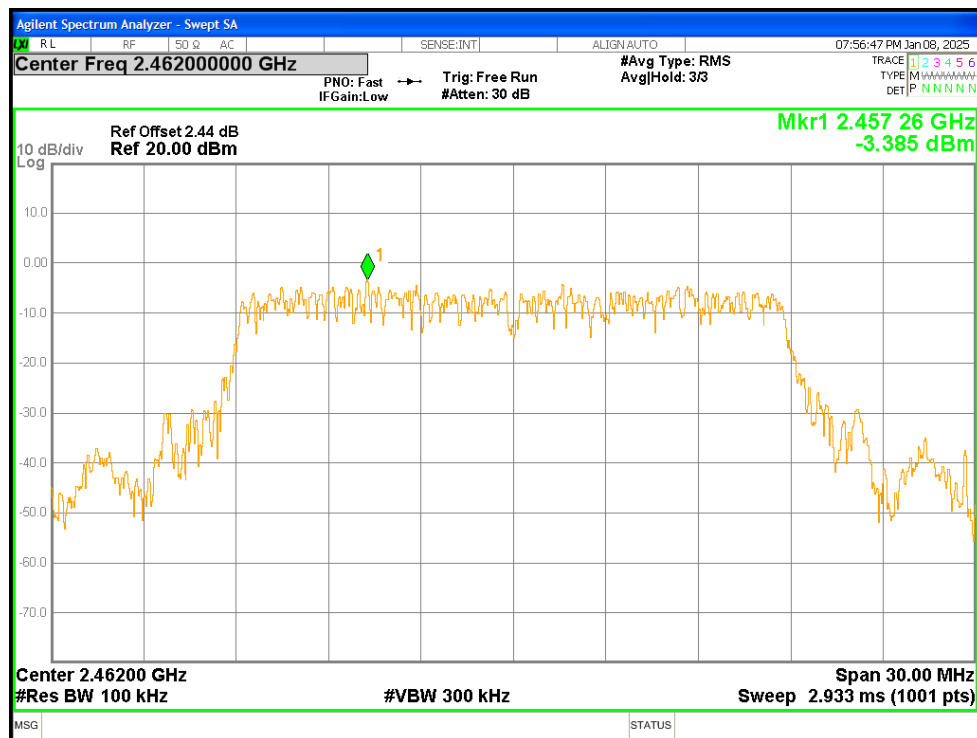


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

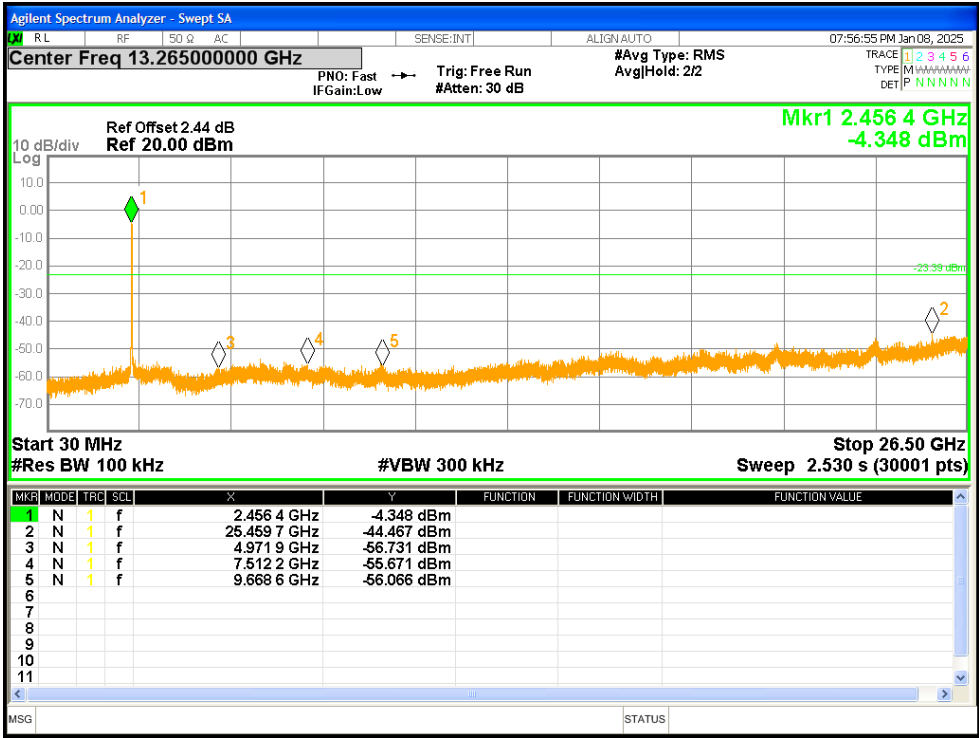


Tx. Spurious NVNT n20 2462MHz Ant1 Emission


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-42.74	-20	Pass
b	2462	Ant1	-57.03	-20	Pass
g	2412	Ant1	-36.18	-20	Pass
g	2462	Ant1	-50.95	-20	Pass
n20	2412	Ant1	-34.96	-20	Pass
n20	2462	Ant1	-47.47	-20	Pass

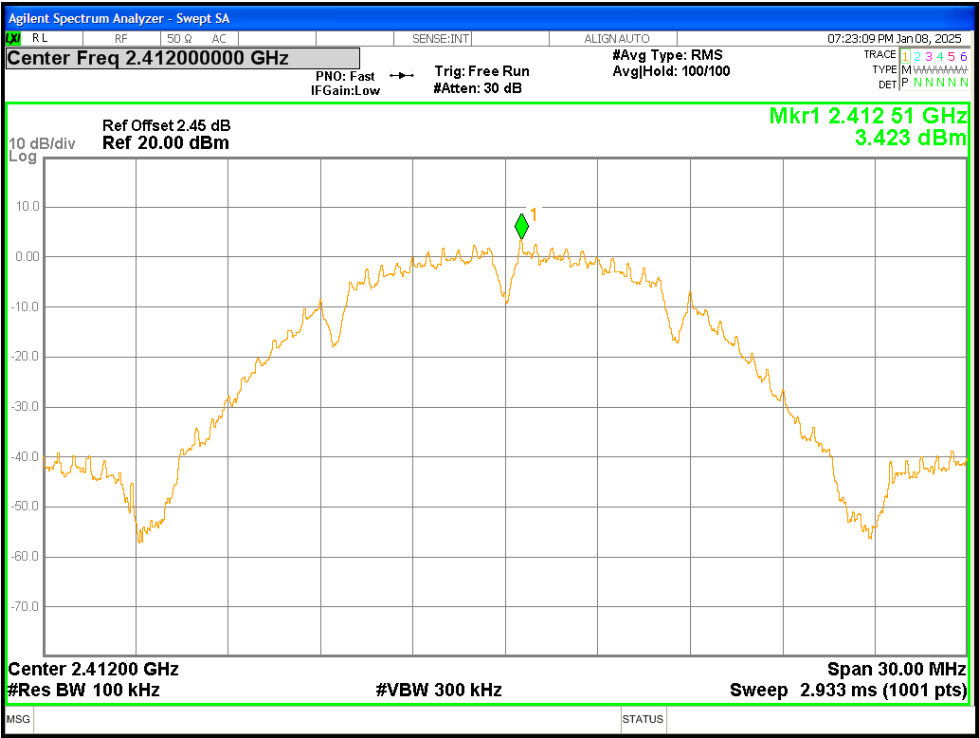


Band Edge NVNT b 2412MHz Ant1 Ref

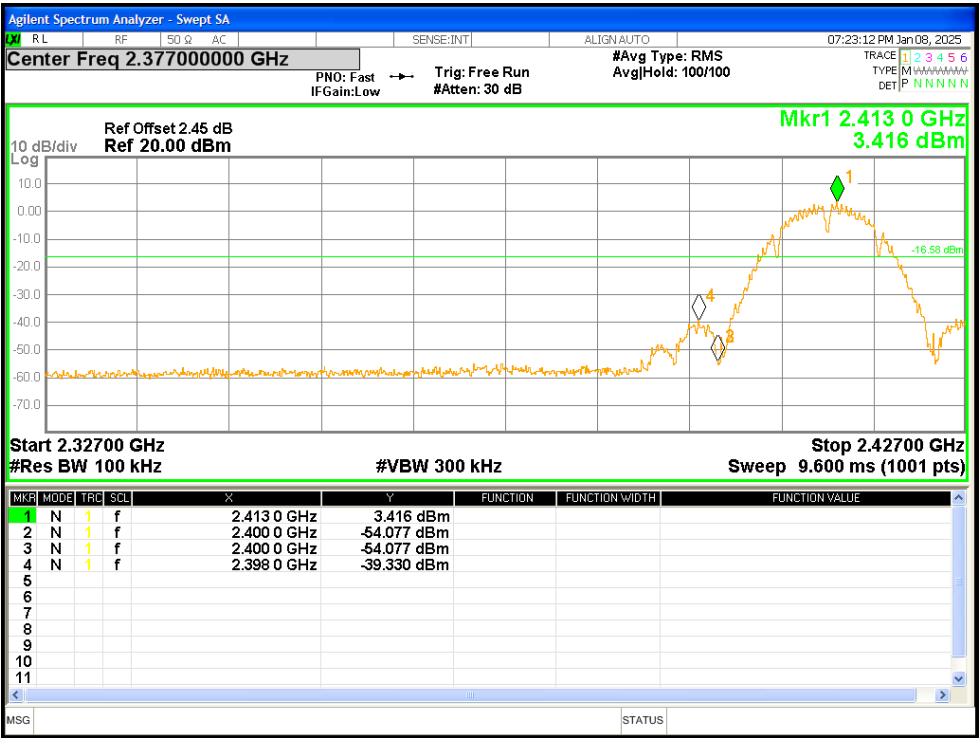


Band Edge NVNT b 2412MHz Ant1 Emission

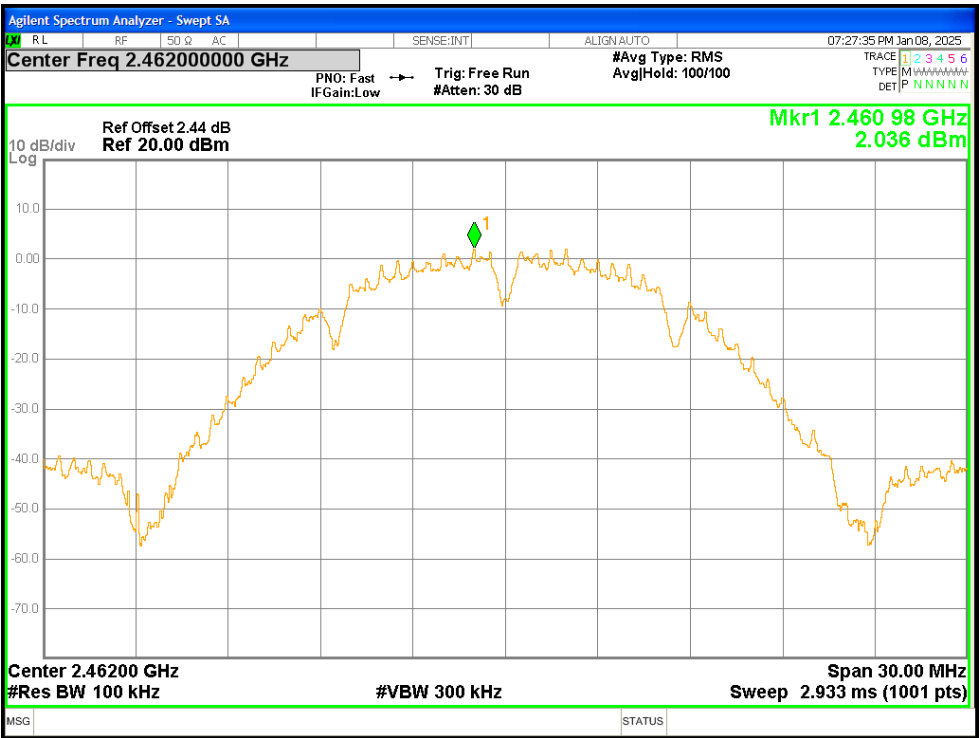


Band Edge NVNT b 2462MHz Ant1 Ref

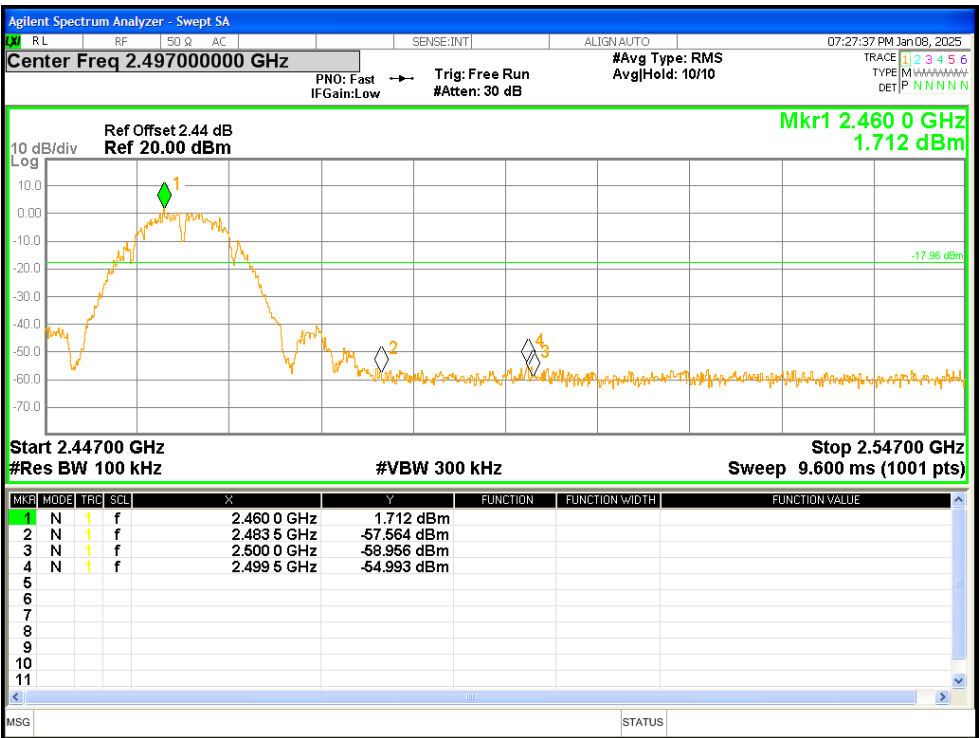


Band Edge NVNT b 2462MHz Ant1 Emission

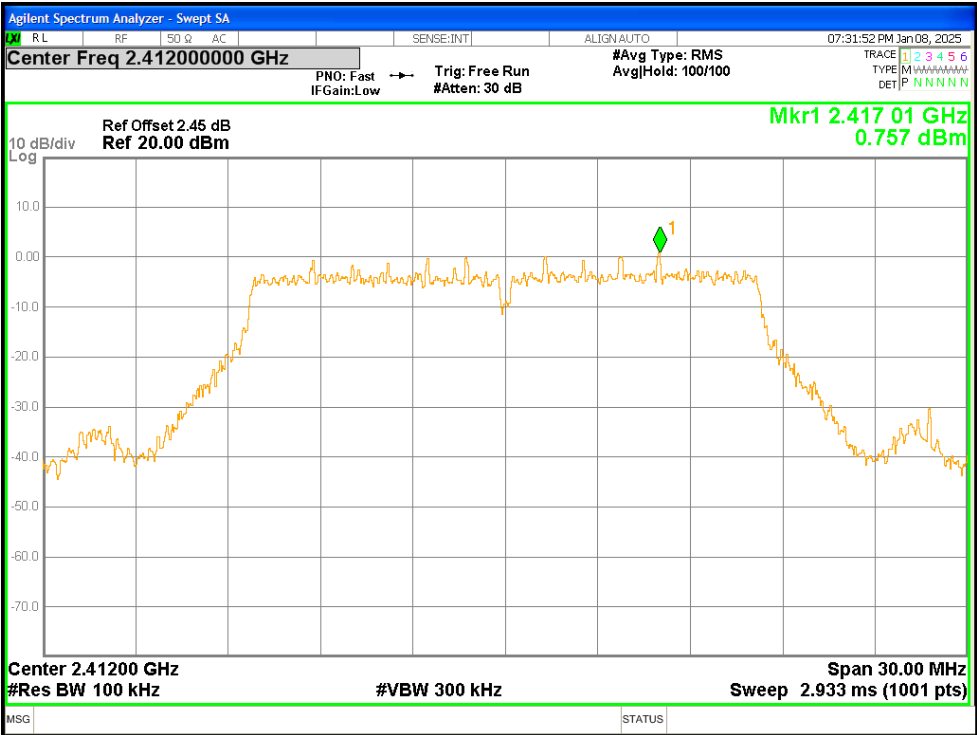


Band Edge NVNT g 2412MHz Ant1 Ref

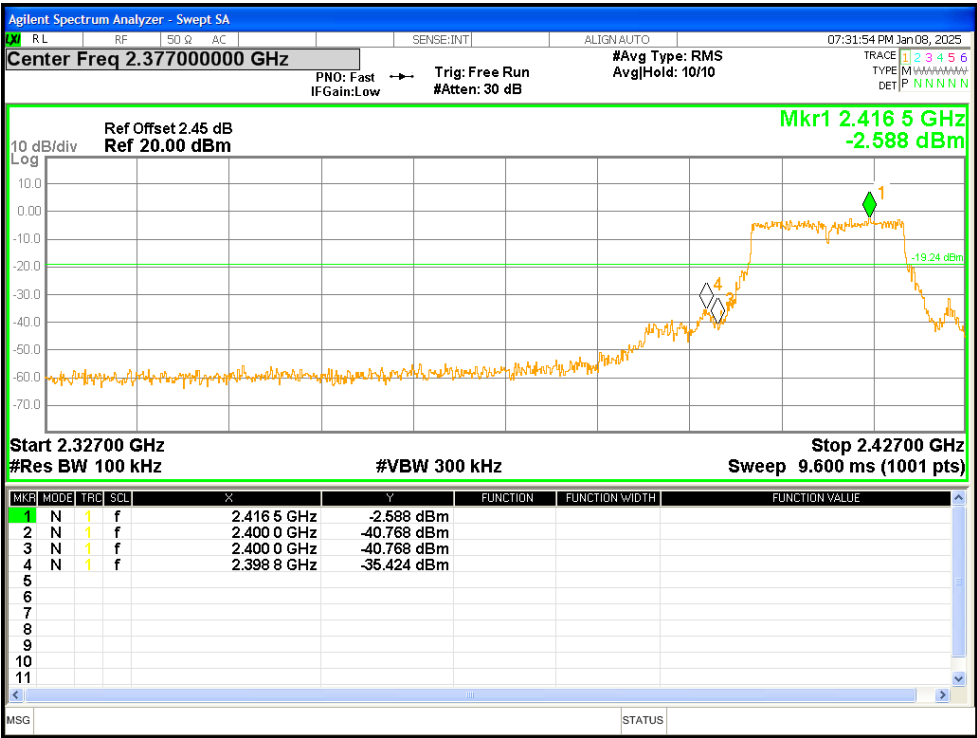


Band Edge NVNT g 2412MHz Ant1 Emission

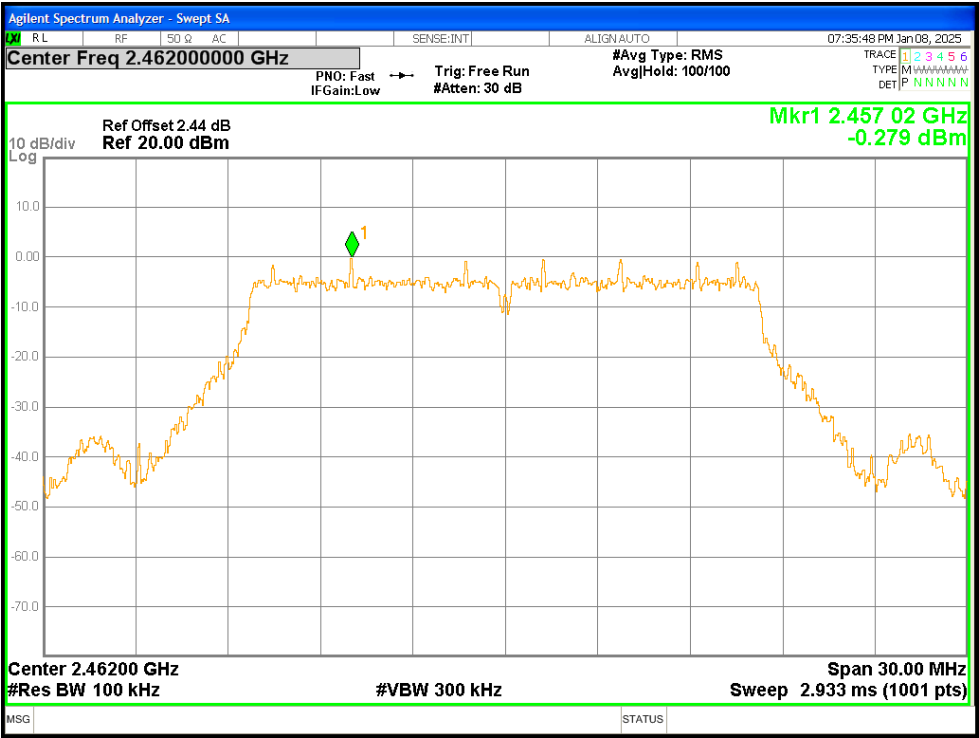


Band Edge NVNT g 2462MHz Ant1 Ref

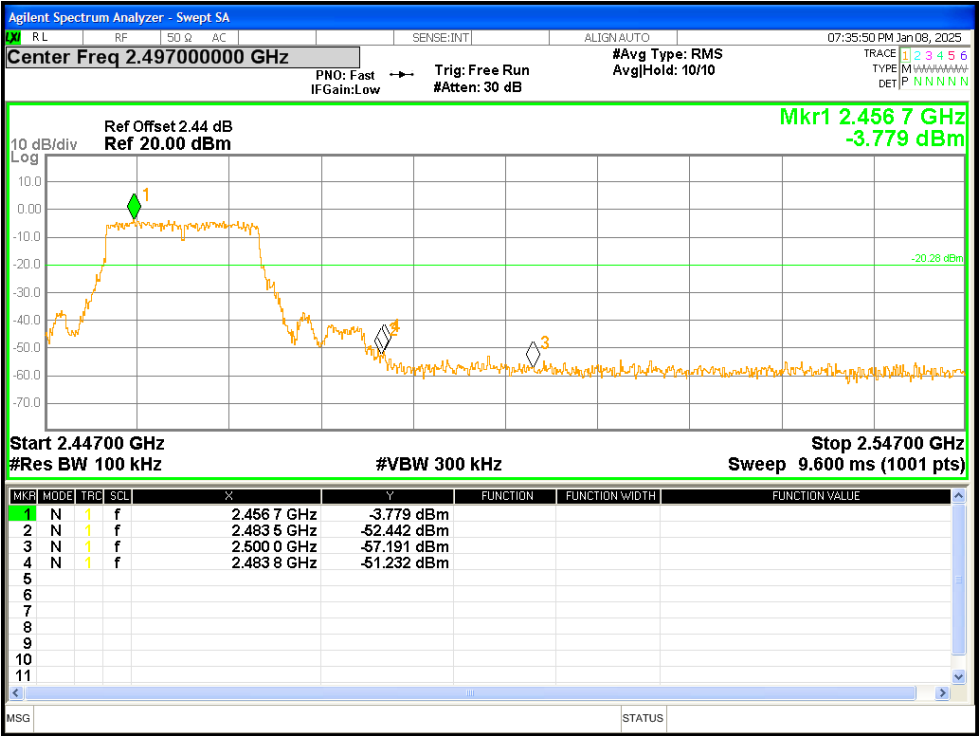


Band Edge NVNT g 2462MHz Ant1 Emission

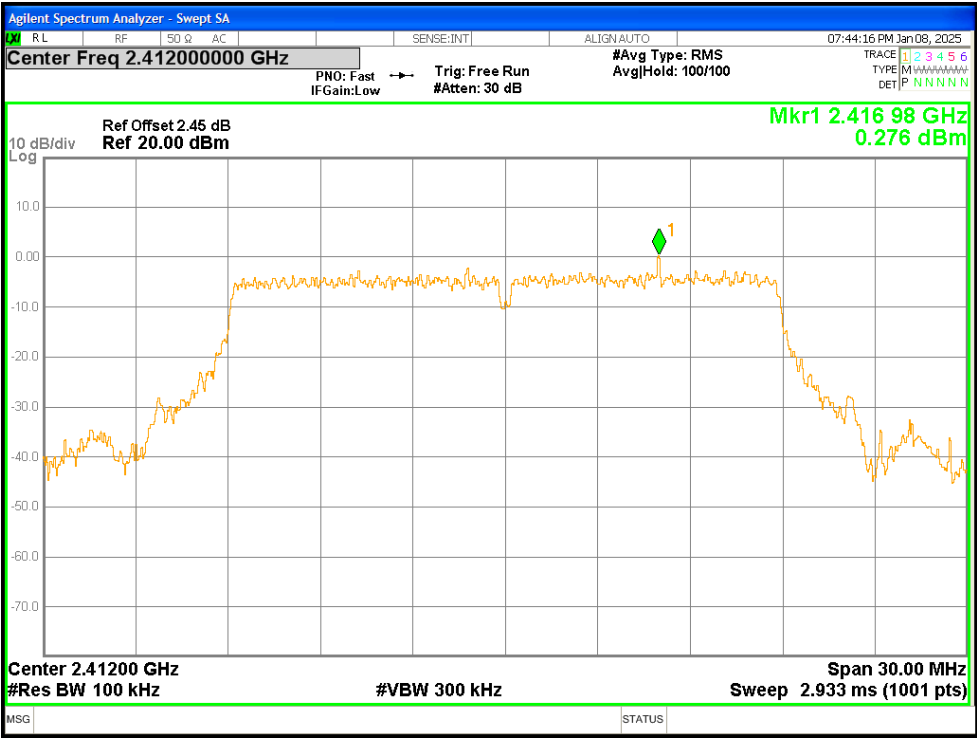


Band Edge NVNT n20 2412MHz Ant1 Ref

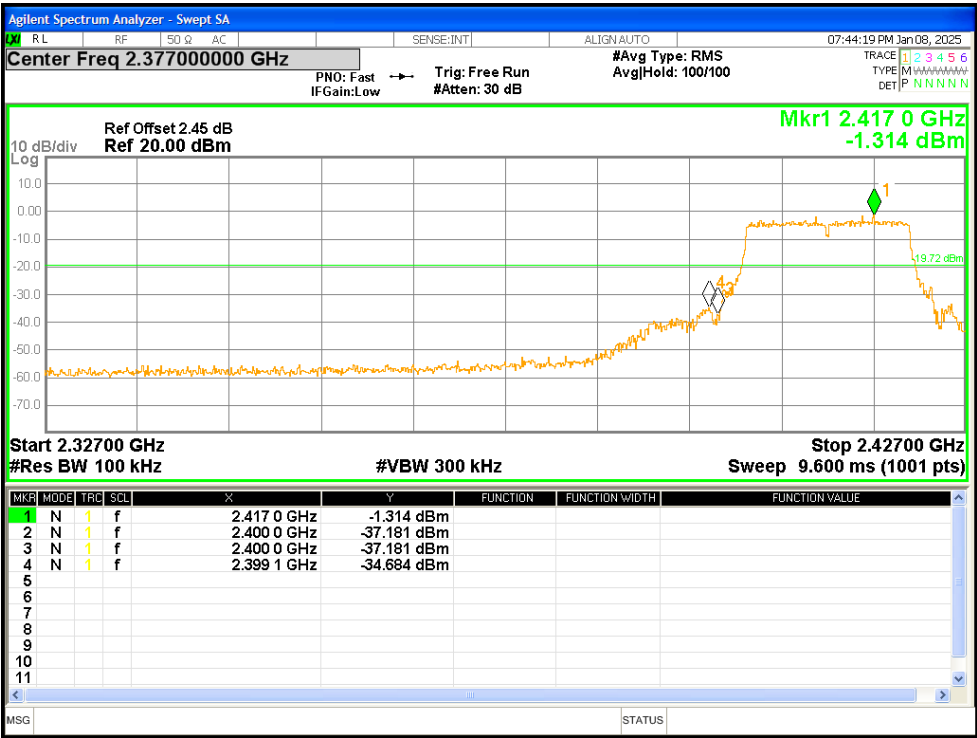

Band Edge NVNT n20 2412MHz Ant1 Emission

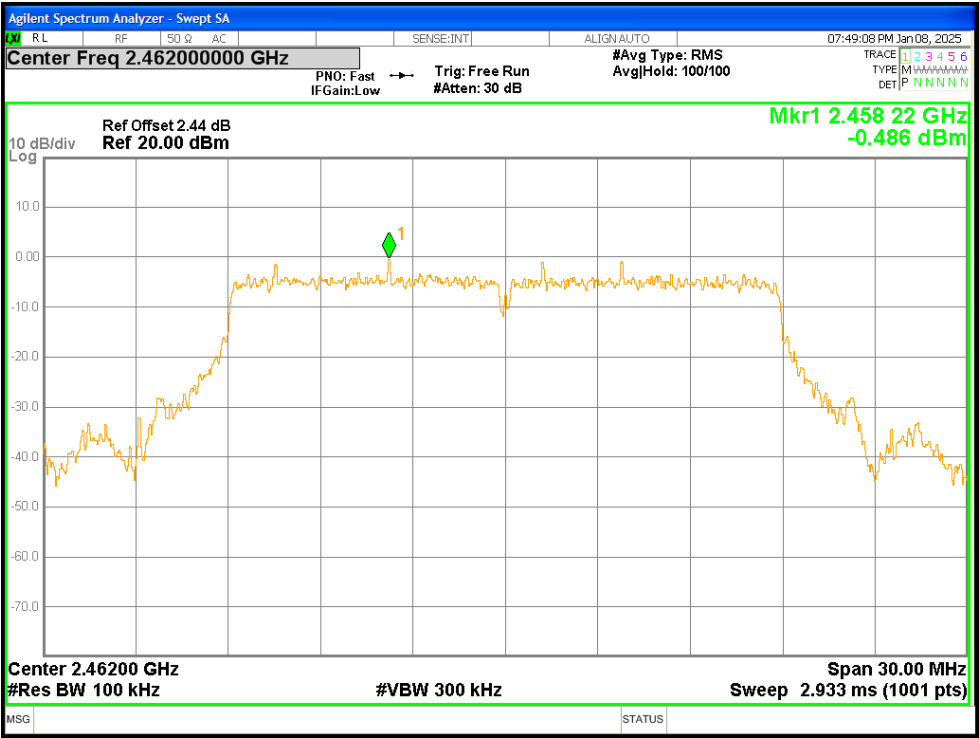

Band Edge NVNT n20 2462MHz Ant1 Ref

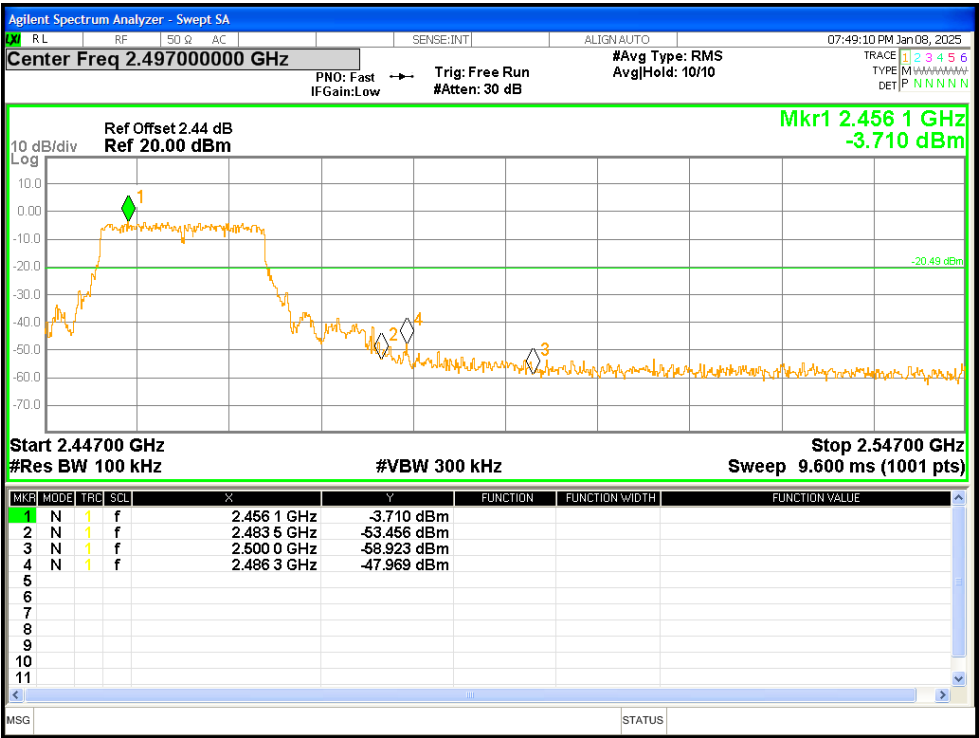

Band Edge NVNT n20 2462MHz Ant1 Emission

10. 99% OCCUPY BANDWIDTH

Test Requirement:	RSS-Gen 6.7
Test Method:	ANSI C63.10:2013 Section 6.9

10.1 CONFORMANCE LIMIT

No limit requirement.

10.2 TEST PROCEDURE

The EUT was operating in Bluetooth transmitter mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1-5% of 99% occupied bandwidth.

Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.

Set Span= approximately 2 to 3 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Measure and record the results in the test report.

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP




10.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS


Mode	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
b	2412	13.094	PASS
b	2437	13.097	PASS
b	2462	13.104	PASS
g	2412	16.622	PASS
g	2437	16.582	PASS
g	2462	16.645	PASS
n20	2412	17.694	PASS
n20	2437	17.754	PASS
n20	2462	17.717	PASS

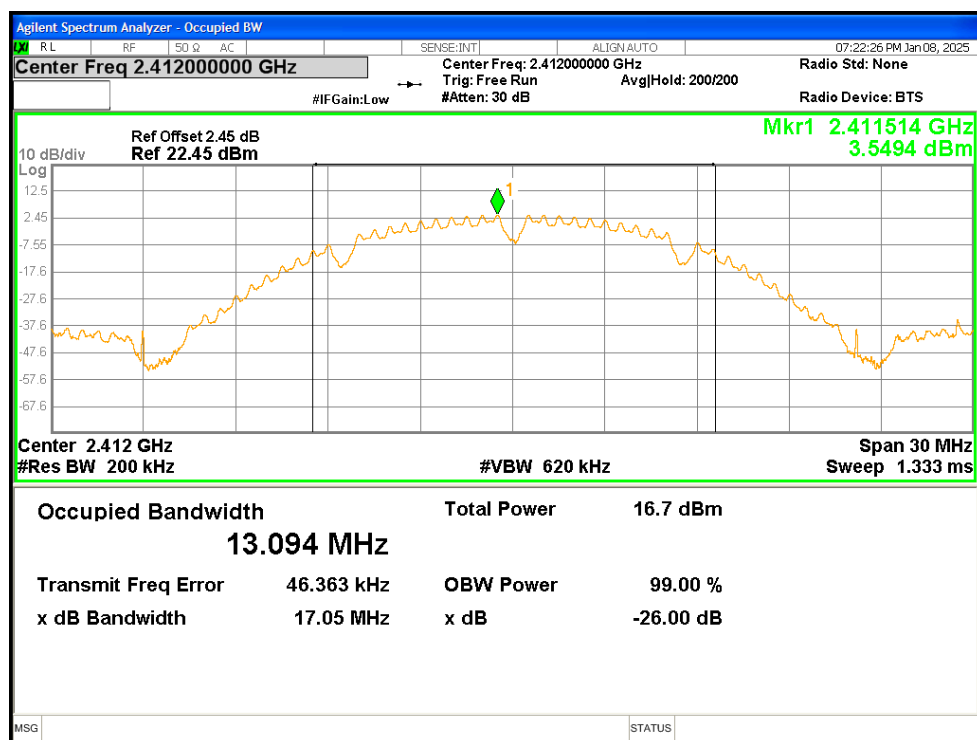


OBW NVNT b 2412MHz Ant1

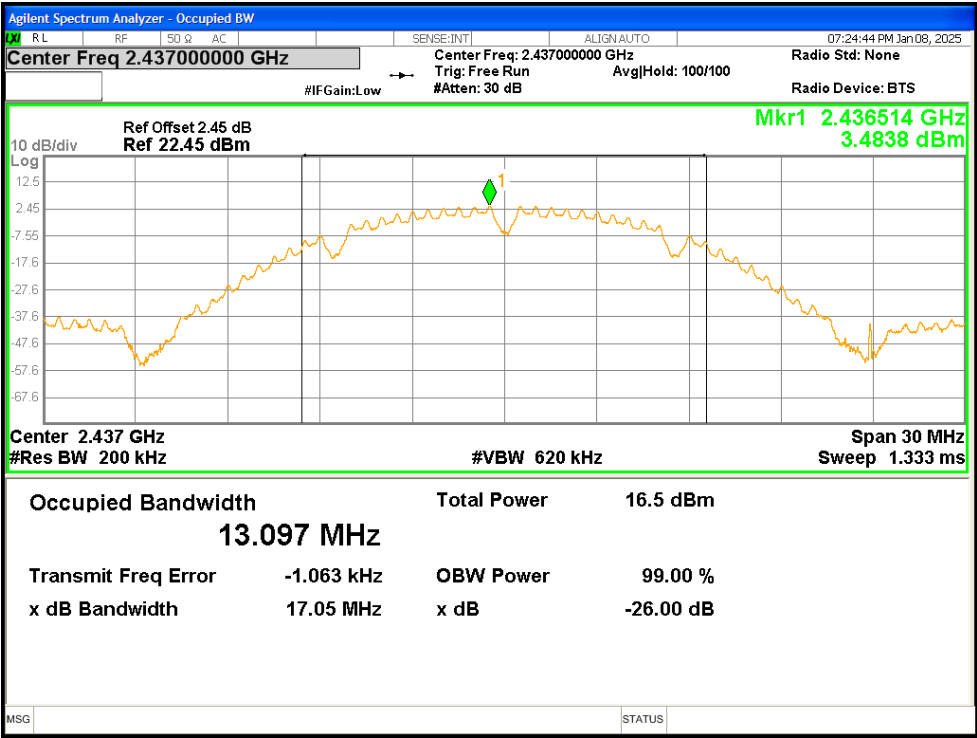


OBW NVNT b 2437MHz Ant1

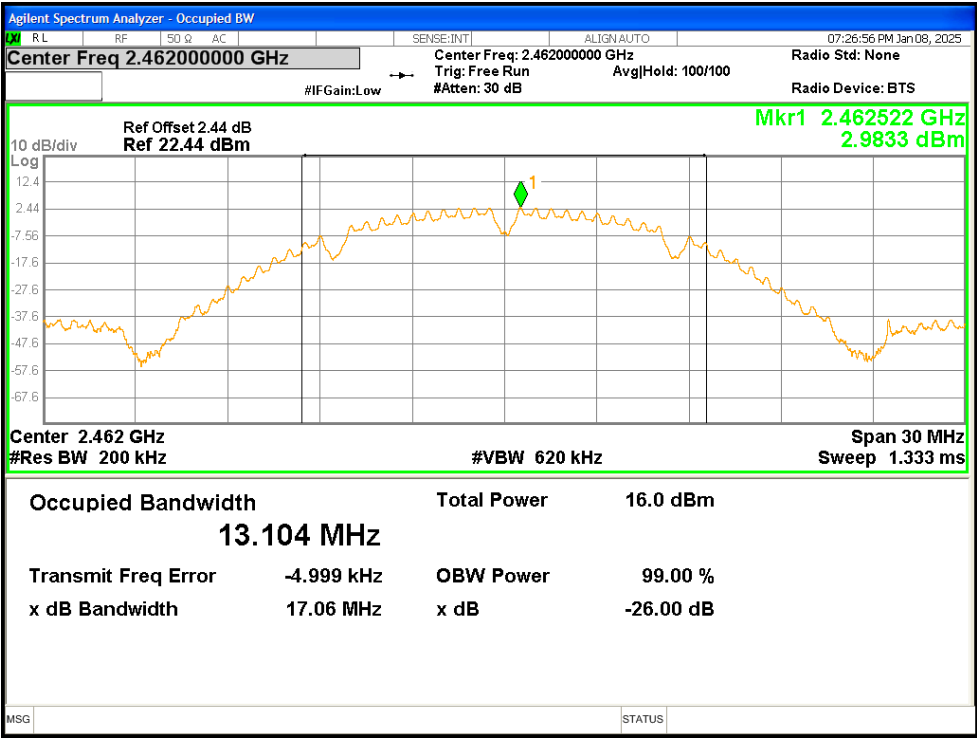


OBW NVNT b 2462MHz Ant1

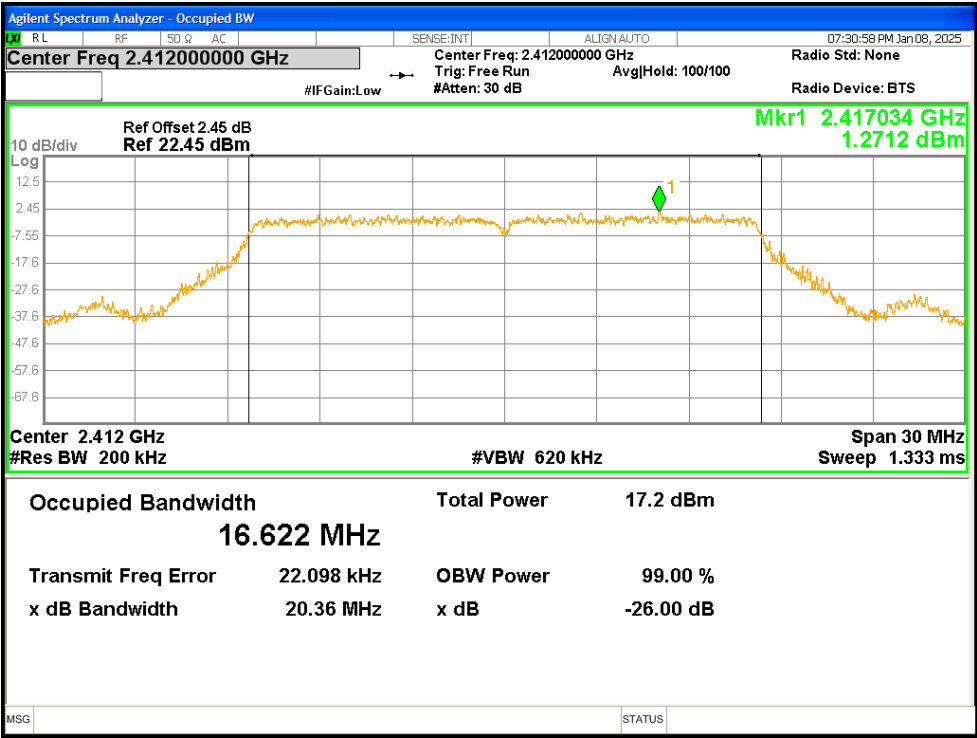


OBW NVNT g 2412MHz Ant1

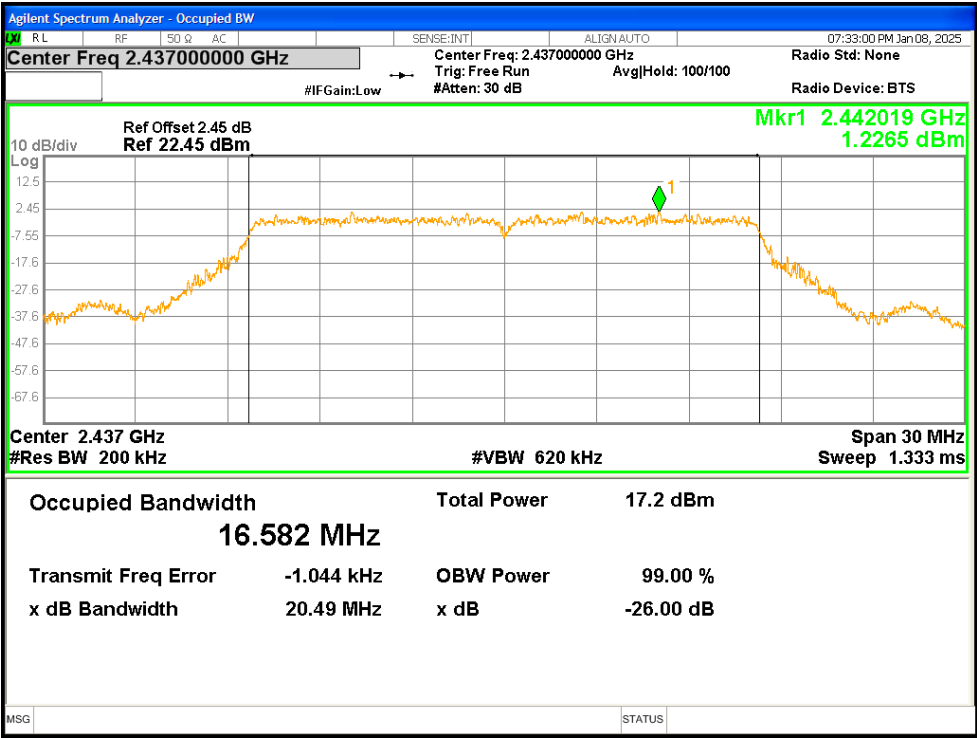


OBW NVNT g 2437MHz Ant1

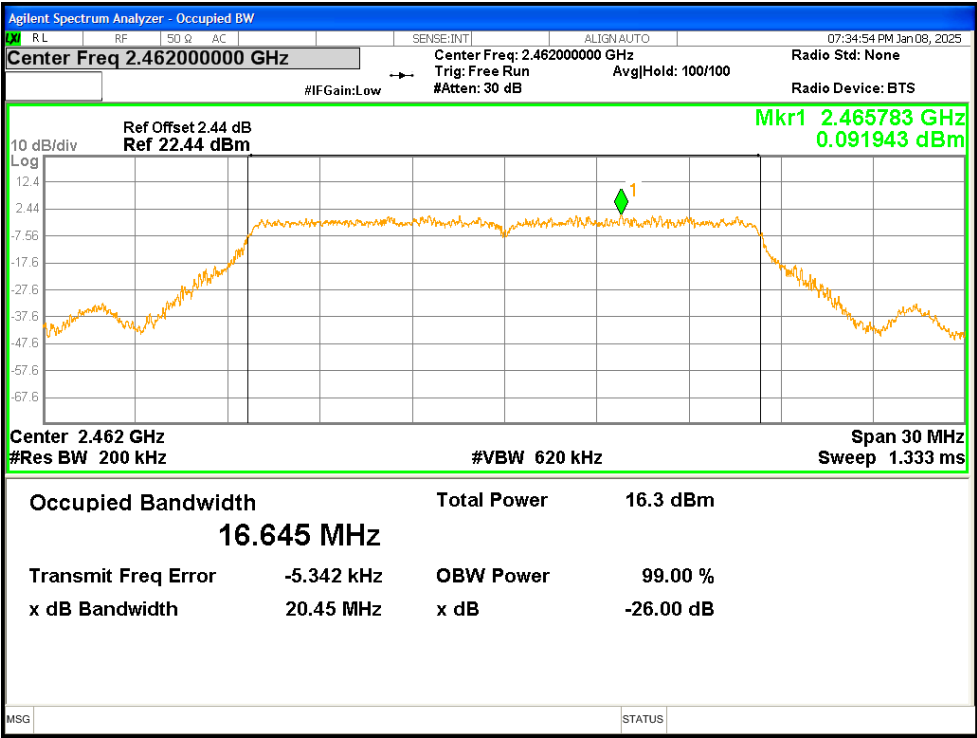


OBW NVNT g 2462MHz Ant1

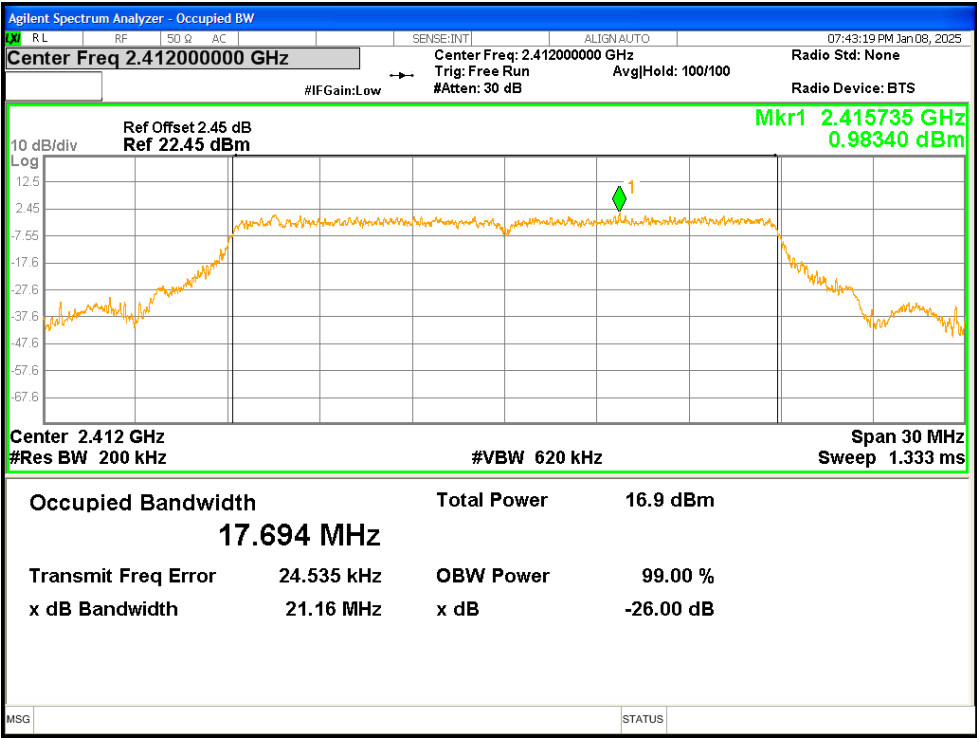

OBW NVNT n20 2412MHz Ant1

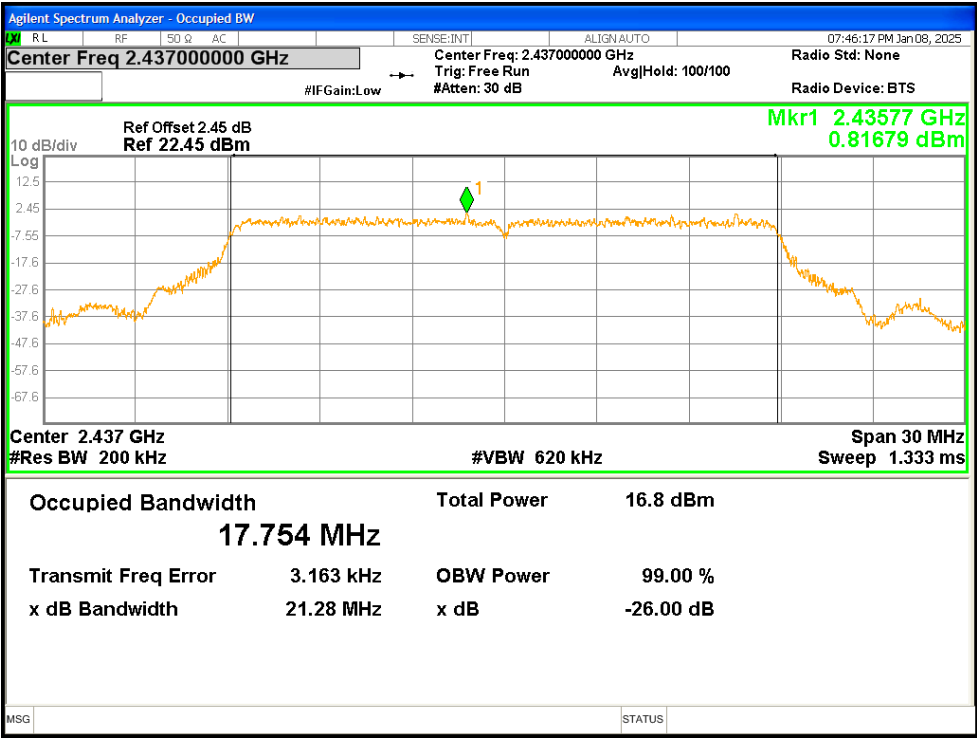

OBW NVNT n20 2437MHz Ant1

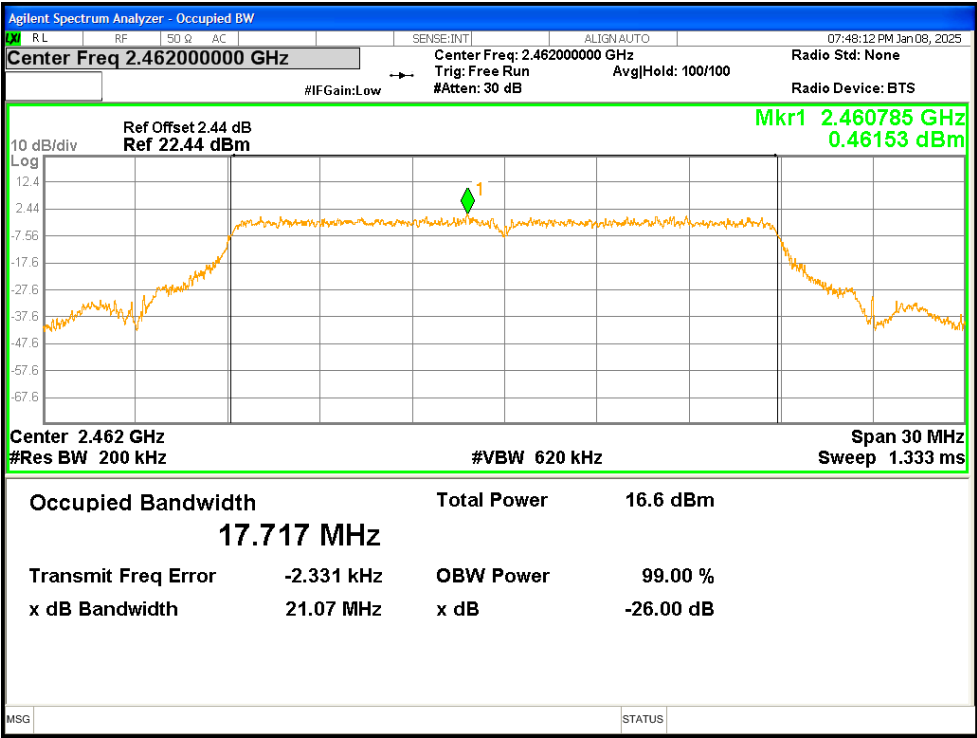

OBW NVNT n20 2462MHz Ant1

11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The WIFI 2.4G antenna is FPC antenna, the best case gain for the antenna is 1.28dBi, reference to the appendix II for details	

12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******