

**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot****Spurious Emissions at Antenna Terminals**Page 1 of 2


Job No.: 1L0706R Date: 5/6/2002
Specification: PT22 Temperature(°C): 22
Tested By: David Light Relative Humidity(%): 40
E.U.T.: REPEATER
Configuration: TX
Sample Number: 1
Location: Lab 1 RBW: 30 kHz
Detector Type: Rms VBW: 30 kHz

Complete X
Preliminary: _____

Measurement
Distance: NA m

Test Equipment Used

Antenna: _____ Directional Coupler: _____
Pre-Amp: _____ Cable #1: 1627
Filter: _____ Cable #2: _____
Receiver: 1036 Cable #3: _____
Attenuator #1: 1478 Cable #4: _____
Attenuator #2: 1471 Mixer: _____
Additional equipment used: _____
Measurement Uncertainty: +/-1.7 dB

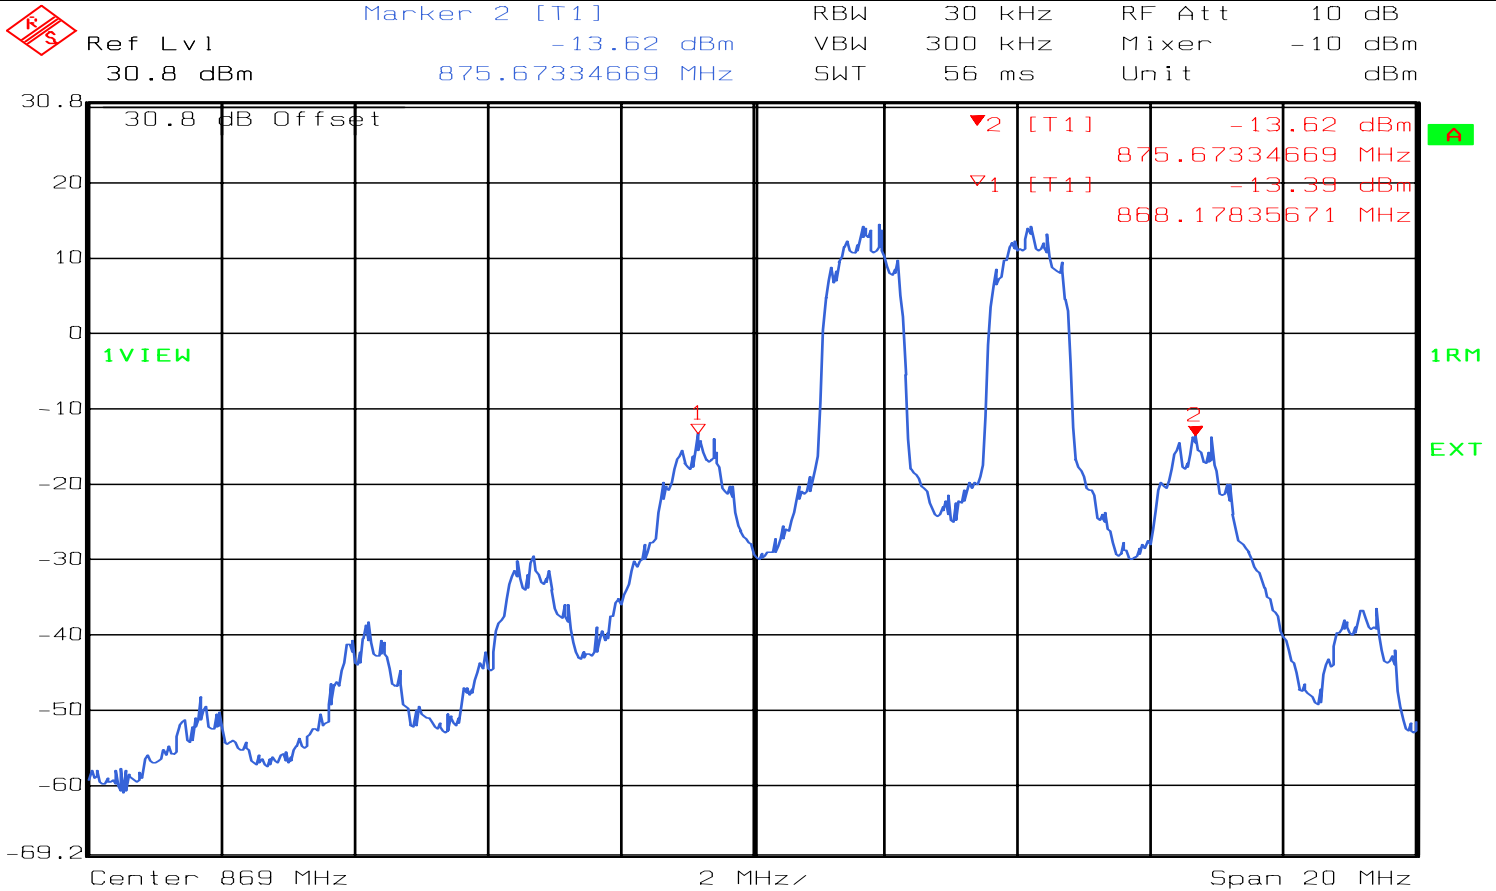

Date: 06.MAY 2002 13:06:21

Notes: CDMA - 2 CARRIERS - LOWER BANDEDGE**MARKER 1 INDICATED HIGHEST OUT OF BAND EMISSION, MARKER 2 INDICATES HIGHEST INBAND EMISSION**


**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.**Data Plot****Spurious Emissions at Antenna Terminals**

Page 2 of 2

Job No.: IL0706R Date: 5/6/2002
Specification: PT22 Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 40
E.U.T.: REPEATER
Configuration: TX

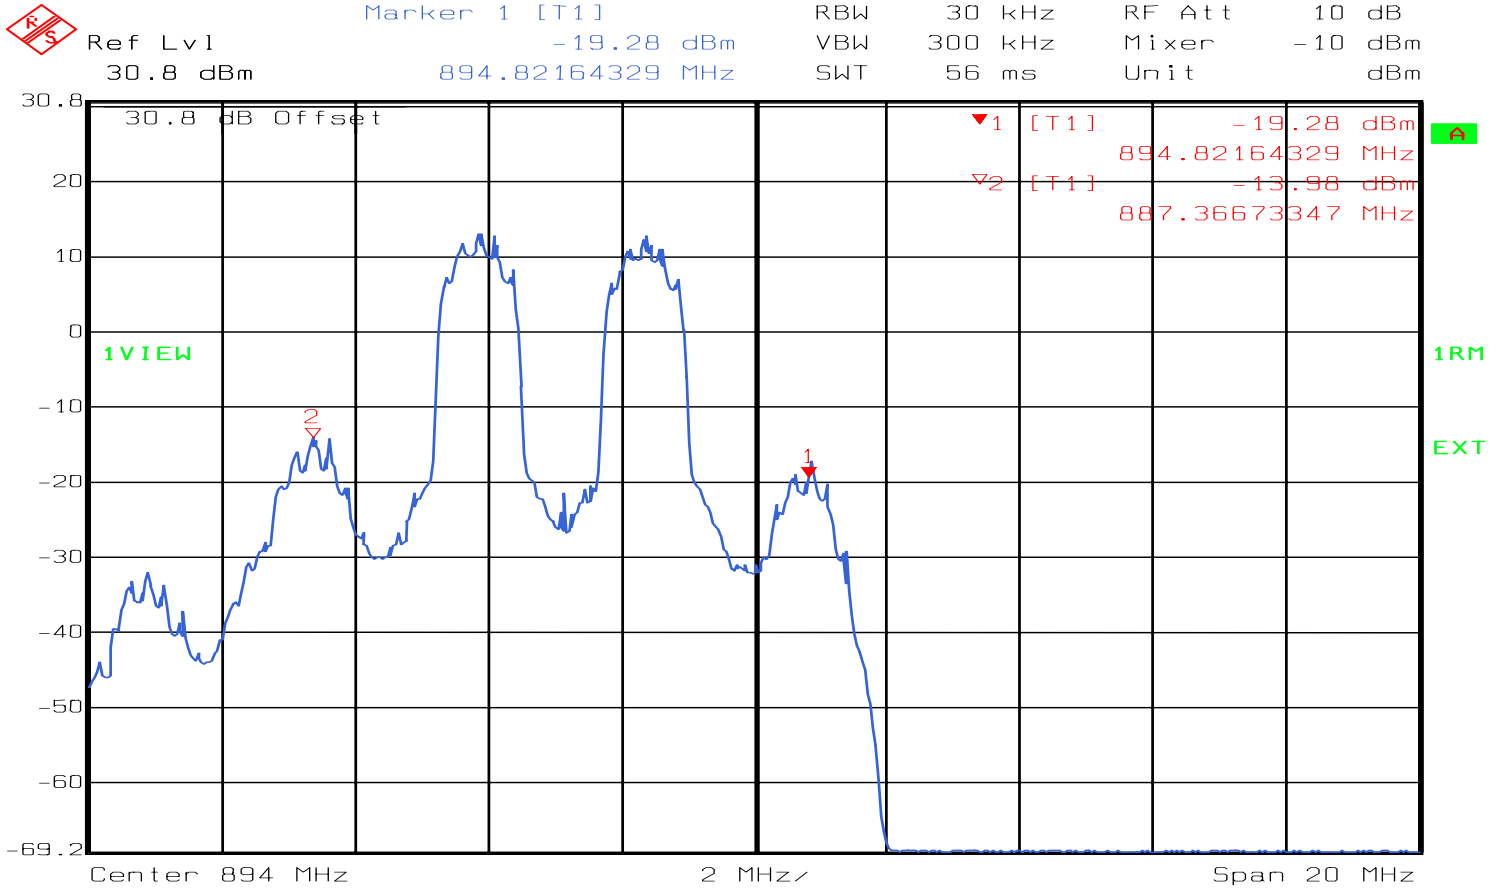

Date: 06.MAY.2002 13:12:53

Notes: CDMA - 2 CARRIERS - UPPER BANDEDGE
MARKER 1 INDICATED HIGHEST OUT OF BAND EMISSION, MARKER 2 INDICATES HIGHEST INBAND EMISSION