

RF TEST REPORT



Report No.: 15050027-FCC-R3

Supersede Report No.: N/A

Applicant	b mobile HK Limited	
Product Name	Mobile phone	
Model No.	AX1030	
Serial No.	AX1020	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	July 10 to July 27, 2015	
Issue Date	August 10, 2015	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	15050027-FCC-R3
Page	3 of 54

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT	10
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH	11
6.3 MAXIMUM OUTPUT POWER	17
6.4 POWER SPECTRAL DENSITY	21
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	25
6.6 AC POWER LINE CONDUCTED EMISSIONS	31
6.7 RADIATED SPURIOUS EMISSIONS	37
ANNEX A. TEST INSTRUMENT	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	49
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	53
ANNEX E. DECLARATION OF SIMILARITY	54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050027-FCC-R3	NONE	Original	August 10, 2015

2. Customer information

Applicant Name	b mobile HK Limited
Applicant Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong
Manufacturer	b mobile HK Limited
Manufacturer Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile phone
Main Model:	AX1030
Serial Model:	AX1020
Date EUT received:	July 09, 2015
Test Date(s):	July 10 to July 27, 2015
Equipment Category :	DTS
Antenna Gain:	GSM850: 1.4 dBi PCS1900: 1.7 dBi UMTS-FDD Band IV: 1.7 dBi UMTS-FDD Band V: 1.7 dBi UMTS-FDD Band II: 1.7 dBi Bluetooth/BLE: 1.9 dBi WIFI: 1.8 dBi LTE Band 2: 1.7 dBi LTE Band 4: 1.6 dBi LTE Band 7: 1.9 dBi LTE Band 17: 1.5 dBi GPS:2 dBi
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK, 8PSK UMTS-FDD: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK LTE Band: QPSK, 16QAM GPS:BPSK

Test Report No.	15050027-FCC-R3
Page	7 of 54

	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz
RF Operating Frequency (ies):	WIFI:802.11b/g/n(20M): 2412-2472 MHz WIFI:802.11n(40M): 2422-2472 MHz Bluetooth& BLE: 2402-2480 MHz LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz LTE Band 17 TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz GPS RX:1575.42 MHz
Max. Output Power:	802.11b:9.44dBm 802.11g:8.86dBm 802.11n(20M):8.86dBm 802.11n(40M):8.85dBm
Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V : 102CH UMTS-FDD Band IV: 202CH UMTS-FDD Band II : 277CH WIFI :802.11b/g/n(20M): 13CH WIFI :802.11n(40M): 9CH Bluetooth: 79CH BLE: 40CH GPS:1CH
Port:	Power Port, Earphone Port, USB Port

Test Report No.	15050027-FCC-R3
Page	8 of 54

Battery:

Model: A4505

Spec:1950mAh,7.215Wh

Voltage:3.7Vdc

Input Power:

Charging Voltage: 4.35Vdc

Adapter:

Model:N/A

Input: 100-240V; 50/60Hz;0.15A

Output: 5.0V; 1A

Trade Name :

Bmobile

GPRS/EGPRS Multi-slot class

8/10/12

FCC ID:

ZSW-30-012

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 1.9dBi for Bluetooth/BLE, the gain is 1.8dBi for WIFI.

A permanently attached PIFA antenna for GSM and UMTS, the gain is 1.4dBi for GSM850, 1.7dBi for UMTS-FDD Band V/Band II/ Band IV, 1.7dBi for PCS1900,


A permanently attached PIFA antenna for LTE, the gain is 1.7dBi for LTE Band 2, the gain is 1.6dBi for LTE Band 4, the gain is 1.9dBi for LTE Band 7, the gain is 1.5dBi for LTE Band 17.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	July 18 to July 24, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW ≥ 500kHz; 20dB BW ≥ 500kHz;	☒
	b)	99% BW: For FCC reference only; required by IC.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 8.1 DTS bandwidth <u>6dB bandwidth</u> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 × RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <u>20dB bandwidth</u> C63.10 Occupied Bandwidth (OBW=20dB bandwidth) - Set RBW = 1%-5% OBW. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Set the span range between 2 times and 5 times of the OBW. - Sweep time=Auto, Detector=PK, Trace=Max hold. - Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-		

Test Report No.	15050027-FCC-R3
Page	12 of 54

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Measurement result


Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.07	16.29	≥ 0.5
	Mid	2442	10.06	16.27	≥ 0.5
	High	2472	8.556	15.32	≥ 0.5
802.11g	Low	2412	16.41	19.07	≥ 0.5
	Mid	2442	16.40	19.08	≥ 0.5
	High	2472	15.33	18.92	≥ 0.5
802.11n (20M)	Low	2412	17.60	19.50	≥ 0.5
	Mid	2442	17.60	19.47	≥ 0.5
	High	2472	15.11	19.20	≥ 0.5
802.11n (40M)	Low	2422	36.44	38.16	≥ 0.5
	Mid	2442	36.35	37.91	≥ 0.5
	High	2462	36.45	38.13	≥ 0.5

Test Plots


6dB Bandwidth measurement result

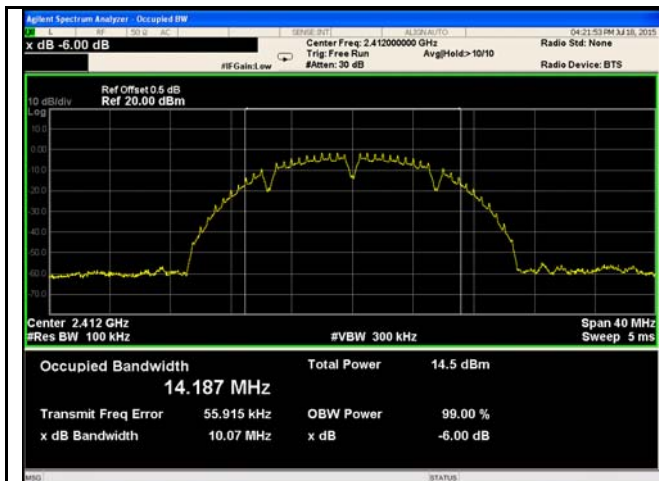


802.11b 6dB Bandwidth - Low CH 2412

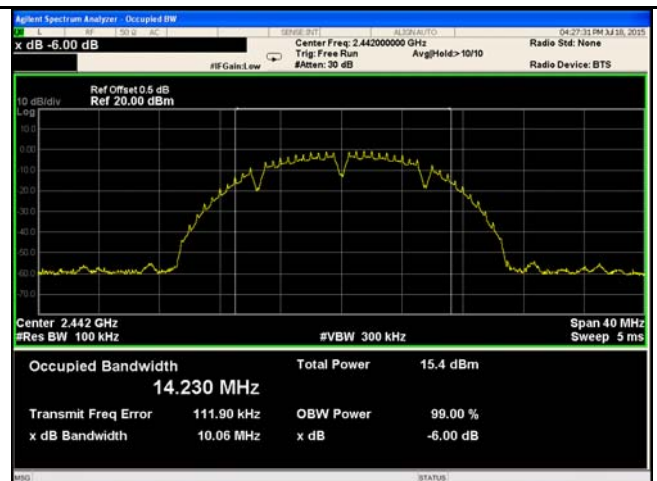


802.11b 6dB Bandwidth - Mid CH 2442

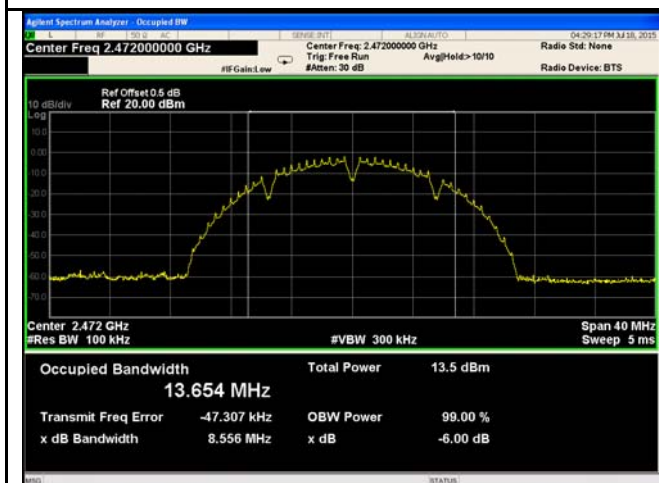


802.11b 6dB Bandwidth - High CH 2472

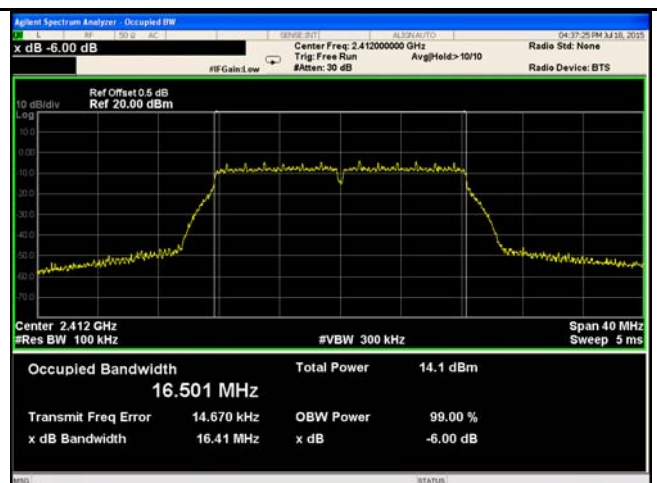


802.11g 6dB Bandwidth - Low CH 2412

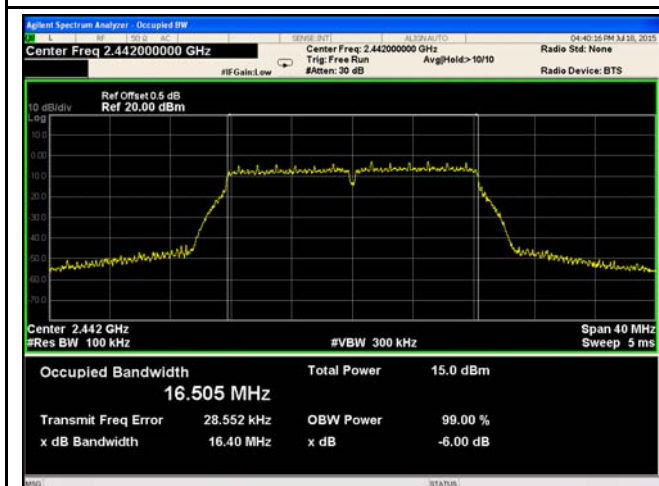


802.11g 6dB Bandwidth - Mid CH 2442

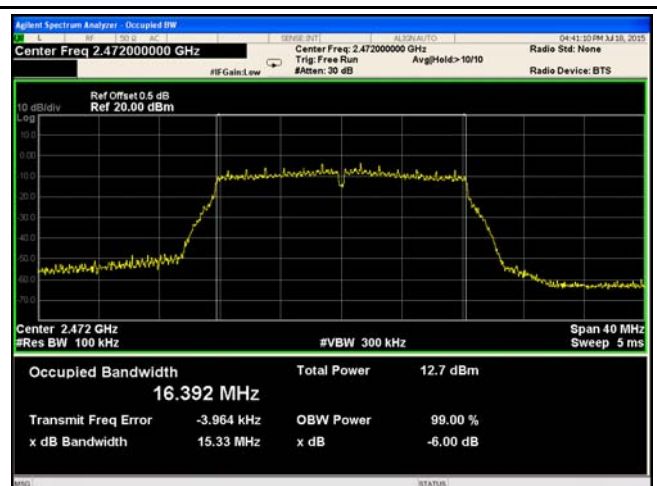


802.11g 6dB Bandwidth - High CH 2472

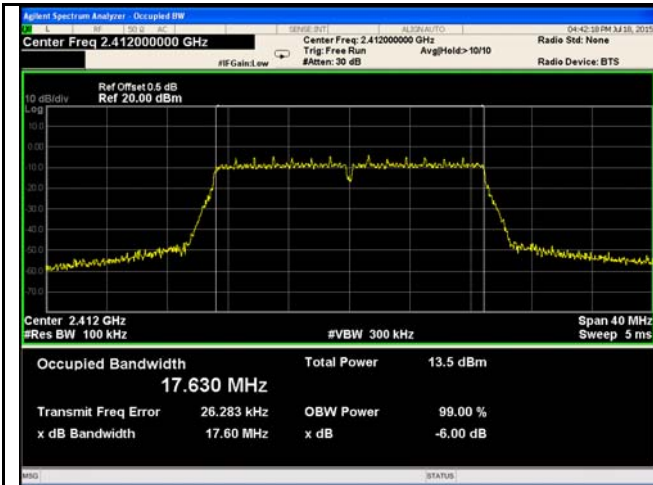


802.11n20 6dB Bandwidth - Low CH 2412

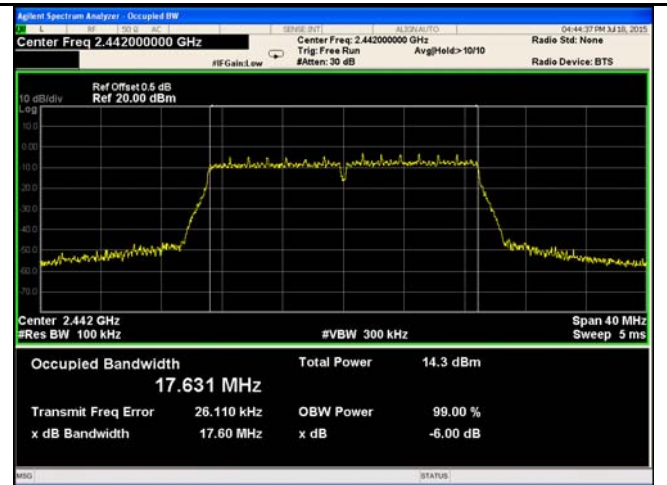


802.11n20 6dB Bandwidth - Mid CH 2442

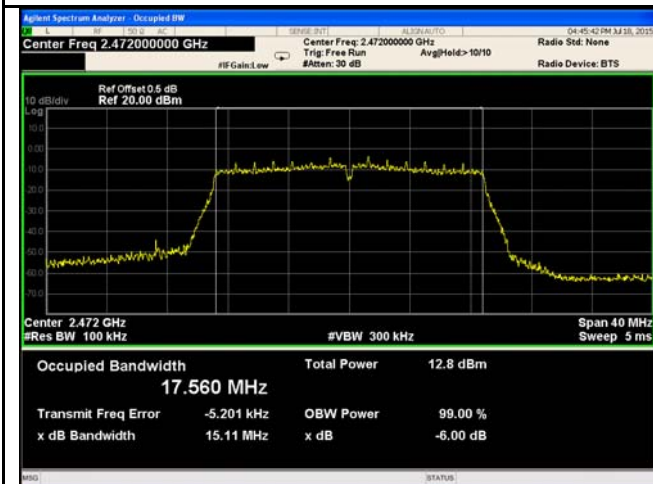


802.11n20 6dB Bandwidth - High CH 2472

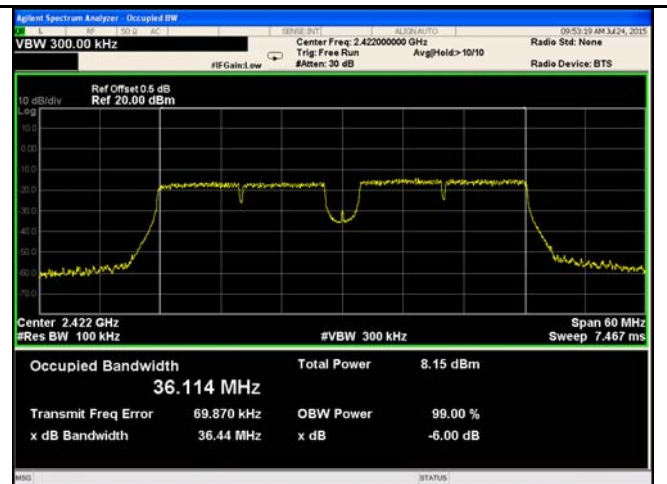

802.11n40 6dB Bandwidth - Low CH 2422

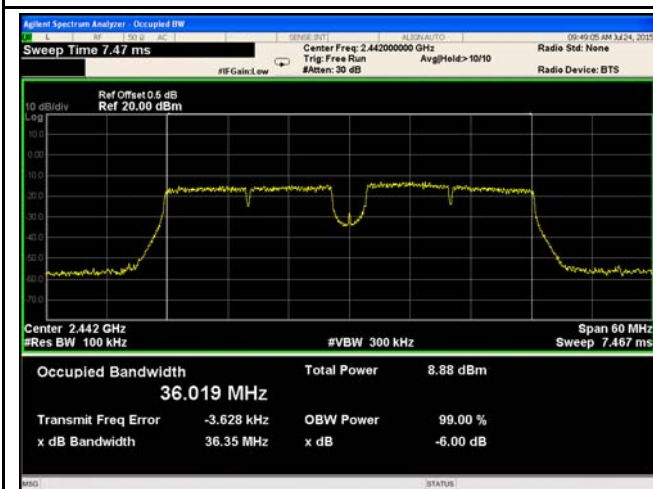


802.11n40 6dB Bandwidth - Mid CH 2442

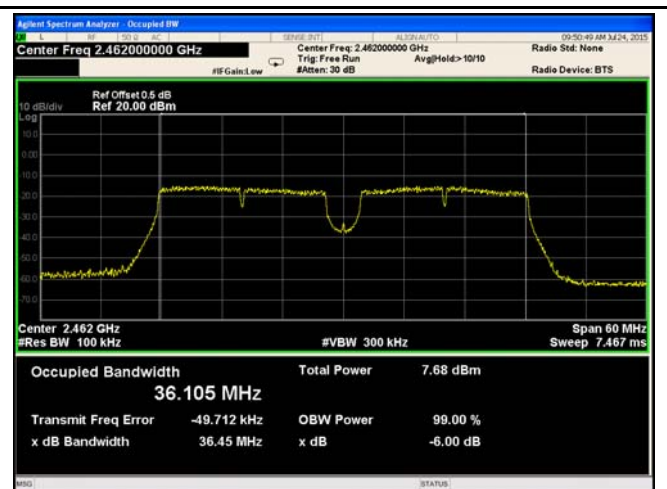


802.11n40 6dB Bandwidth - High CH 2462


20 dB Bandwidth measurement result

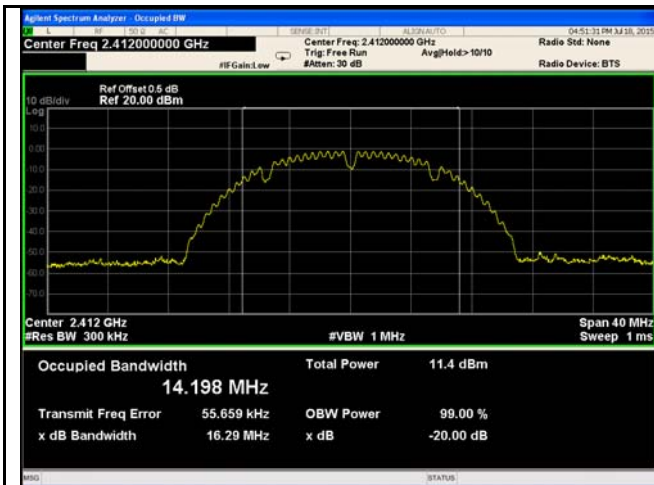


802.11b 20dB Bandwidth - Low CH 2412

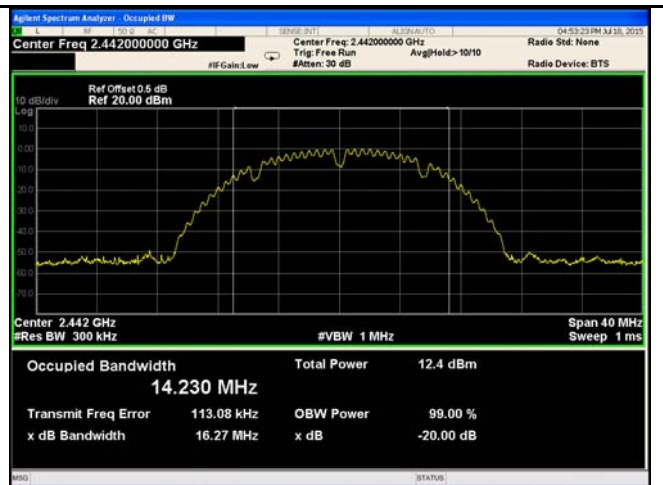


802.11b 20dB Bandwidth - Mid CH 2442

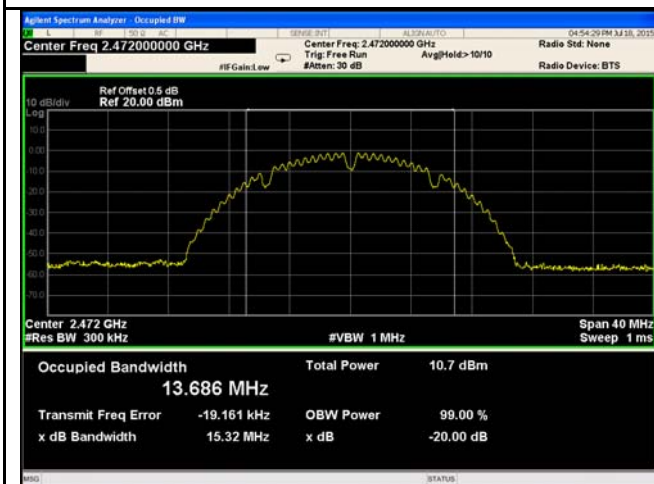


802.11b 20dB Bandwidth - High CH 2472

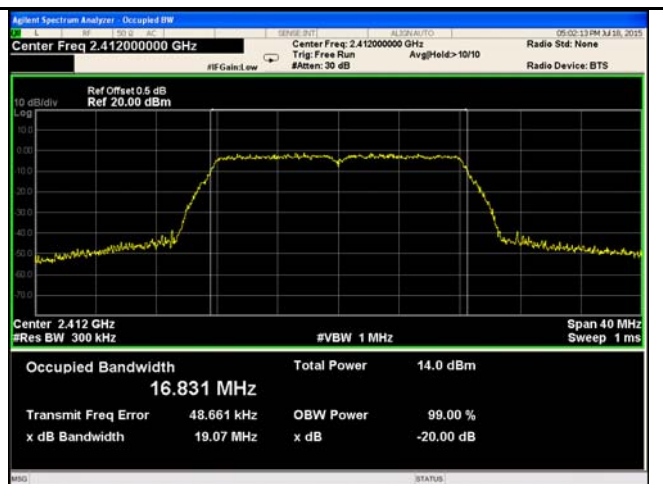


802.11g 20dB Bandwidth - Low CH 2412

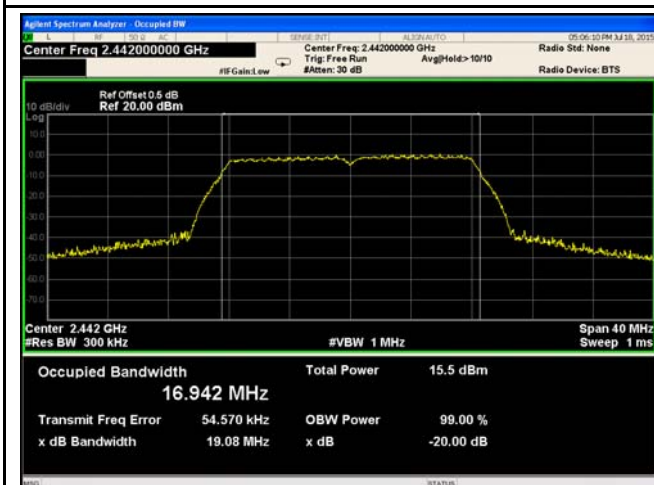


802.11g 20dB Bandwidth - Mid CH 2442

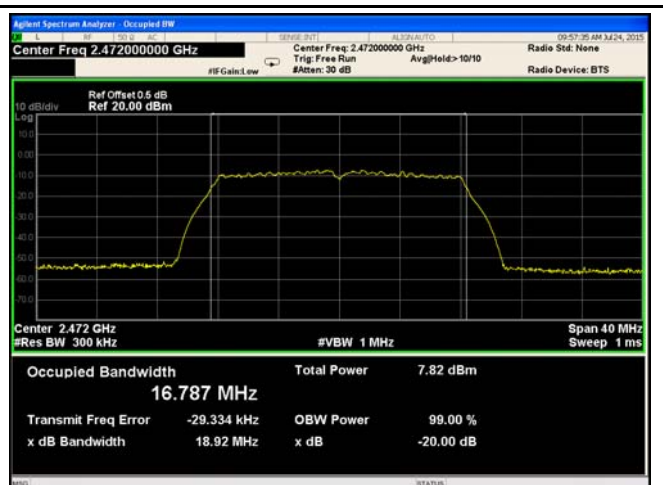


802.11g 20dB Bandwidth - High CH 2472

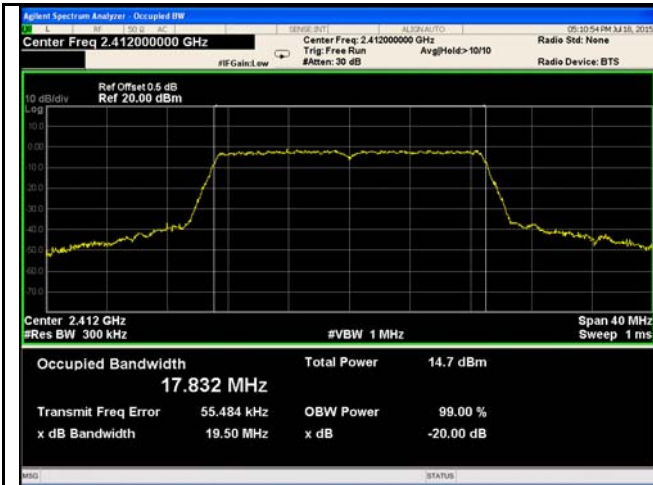


802.11n20 20dB Bandwidth - Low CH 2412

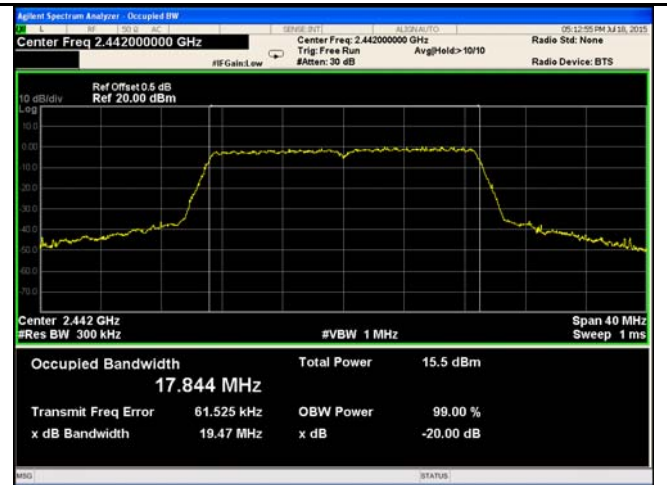


802.11n20 20dB Bandwidth - Mid CH 2442

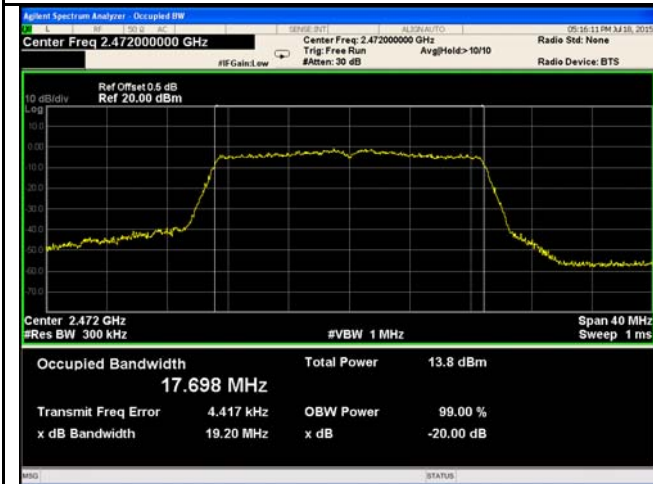

802.11n20 20dB Bandwidth - High CH 2472

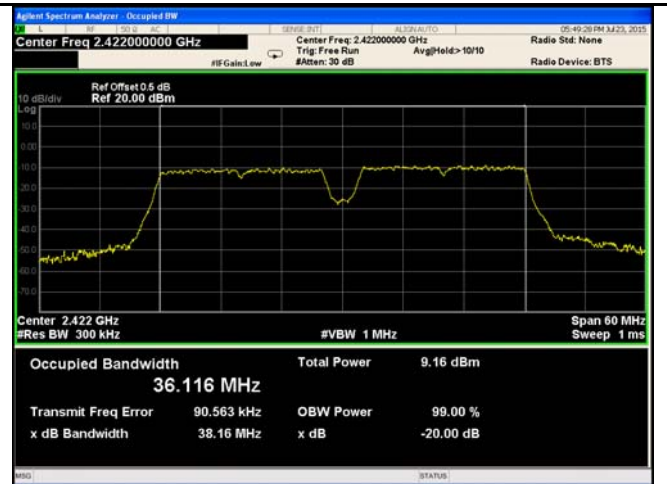

802.11n40 20dB Bandwidth - Low CH 2422

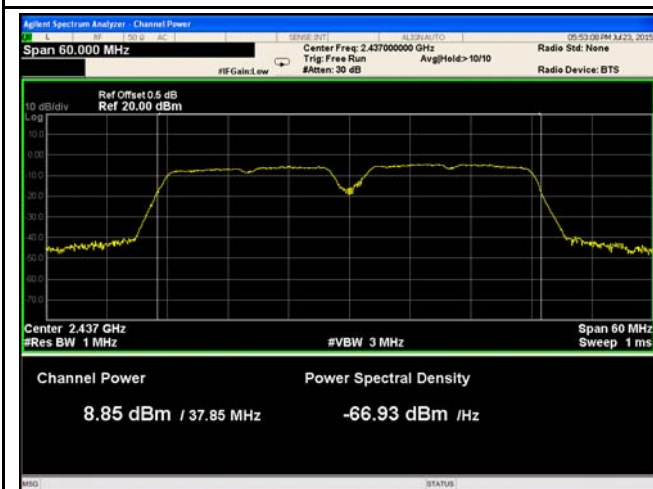

802.11n40 20dB Bandwidth - Mid CH 2442




802.11n40 20dB Bandwidth - High CH 2462

6.3 Maximum Output Power

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	July 18 to July 24, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☐
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☐
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 9.1.2 Integrated band power method Maximum output power measurement procedure - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW $\geq 3 \times$ RBW. - d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable		

Test Report No.	15050027-FCC-R3
Page	18 of 54

	triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run". - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	9.40	30	Pass
		Mid	2442	9.44	30	Pass
		High	2472	8.94	30	Pass
	802.11g	Low	2412	8.86	30	Pass
		Mid	2442	8.81	30	Pass
		High	2472	7.77	30	Pass
	802.11n (20M)	Low	2412	8.86	30	Pass
		Mid	2442	8.84	30	Pass
		High	2472	8.55	30	Pass
	802.11n (40M)	Low	2422	8.29	30	Pass
		Mid	2442	8.85	30	Pass
		High	2462	8.56	30	Pass

Test Plots

The Average Power



802.11b - AV Output power - Low CH 2412




802.11b - AV Output power - Mid CH 2442



802.11b - AV Output power - High CH 2472




802.11g - AV Output power - Low CH 2412

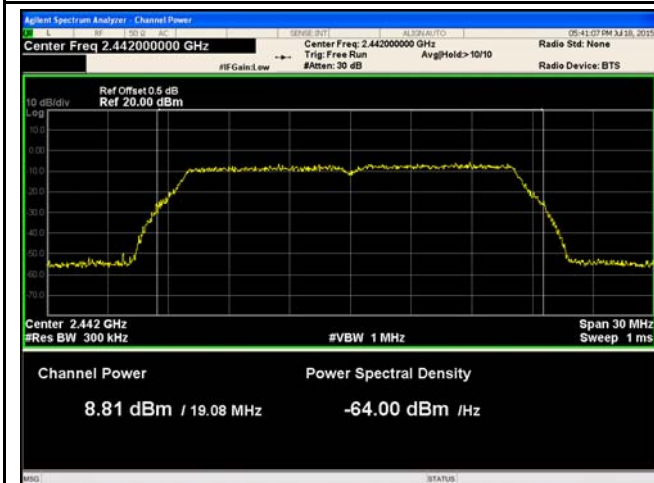


802.11g - AV Output power - Mid CH 2442



802.11g - AV Output power - High CH 2472

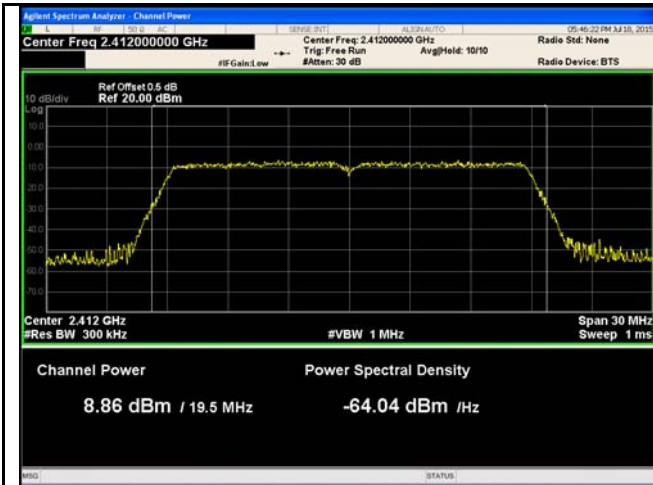

802.11n20 - AV Output power - Low CH 2412

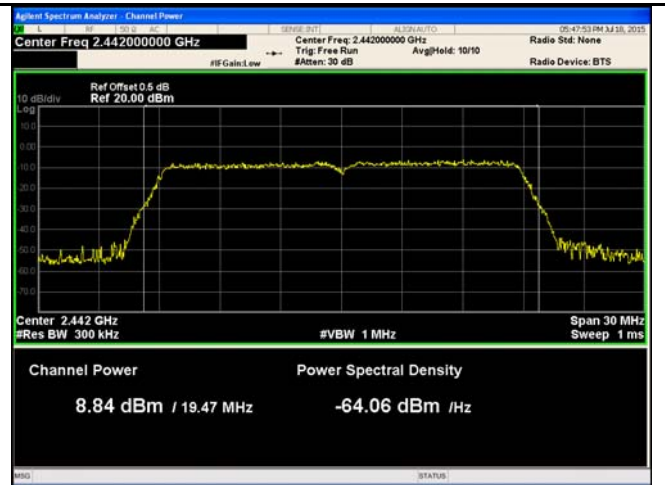

802.11n20 - AV Output power - Mid CH 2442




802.11n20 - AV Output power - High CH 2472



802.11n40 - AV Output power - Low CH 2422




802.11n40 - AV Output power - Mid CH 2442

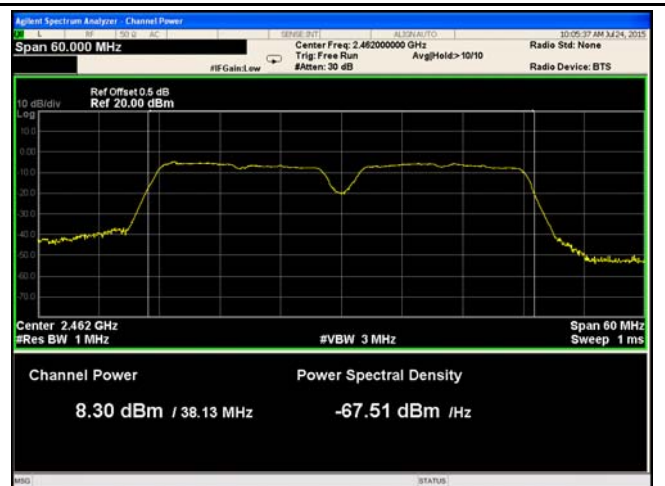

802.11n40 - AV Output power - High CH 2462

6.4 Power Spectral Density

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	July 18 to July 24, 2015
Tested By :	Winnie Zhang

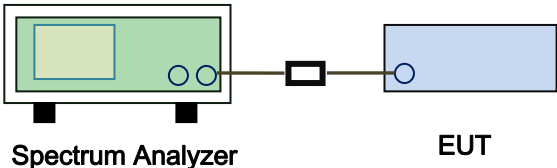Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 10.2 power spectral density method power spectral density measurement procedure - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.		
Remark			
Result	☒ Pass ☐ Fail		


Test Data ☒ Yes ☐ N/A
Test Plot ☒ Yes (See below) ☐ N/A

Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-4.954	8	Pass
		Mid	2442	-4.795	8	Pass
		High	2472	-5.790	8	Pass
	802.11g	Low	2412	-13.257	8	Pass
		Mid	2442	-13.019	8	Pass
		High	2472	-12.403	8	Pass
	802.11n (20M)	Low	2412	-14.970	8	Pass
		Mid	2442	-14.039	8	Pass
		High	2472	-14.155	8	Pass
	802.11n (40M)	Low	2422	-13.300	8	Pass
		Mid	2442	-12.441	8	Pass
		High	2462	-13.469	8	Pass

Test Plots

Power Spectral Density measurement result

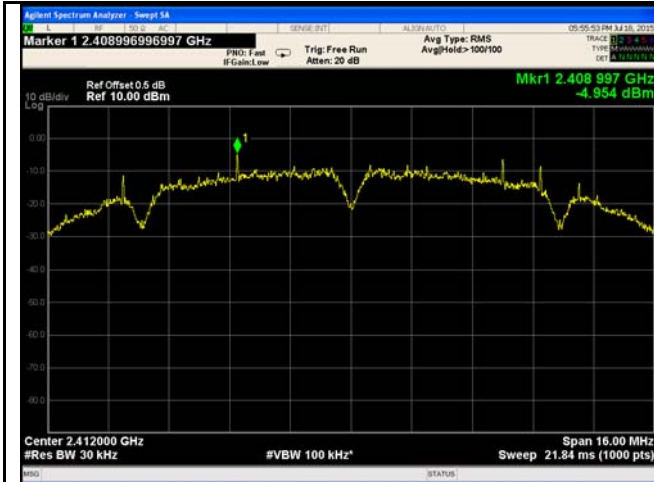


PSD - Low CH 2412 - 802.11b



PSD - Mid CH 2442 - 802.11b




PSD - High CH 2472 - 802.11b

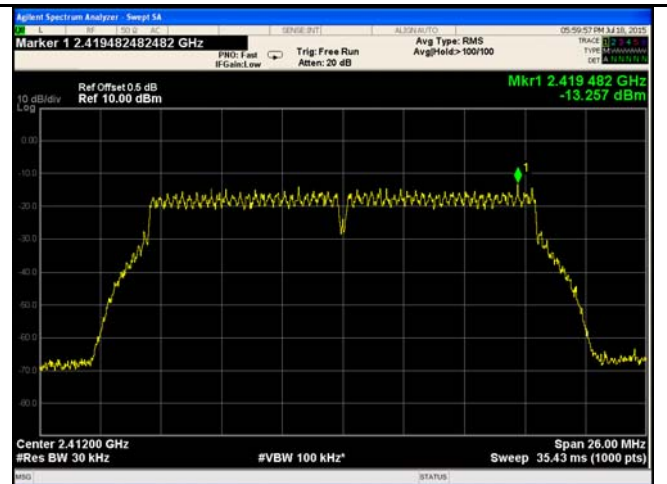


PSD - Low CH 2412 - 802.11g




PSD - Mid CH 2442 - 802.11g

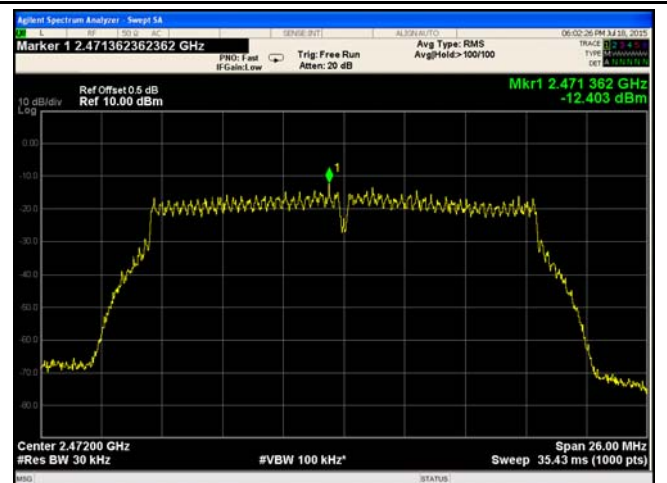


PSD - High CH 2472 - 802.11g

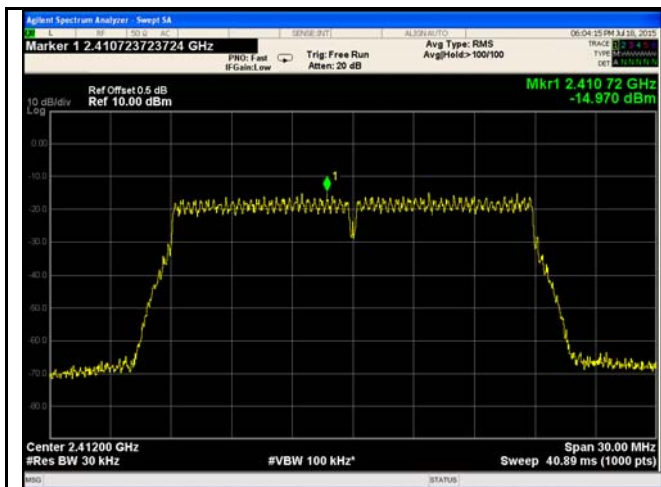


PSD - Low CH 2412 - 802.11n20

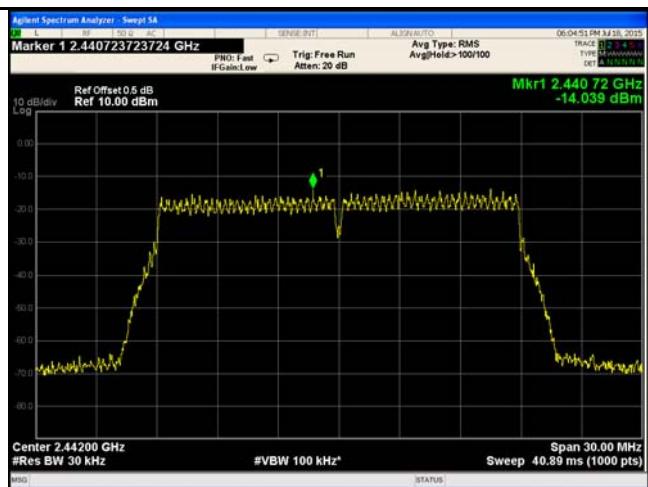

PSD - Mid CH 2442 - 802.11n20

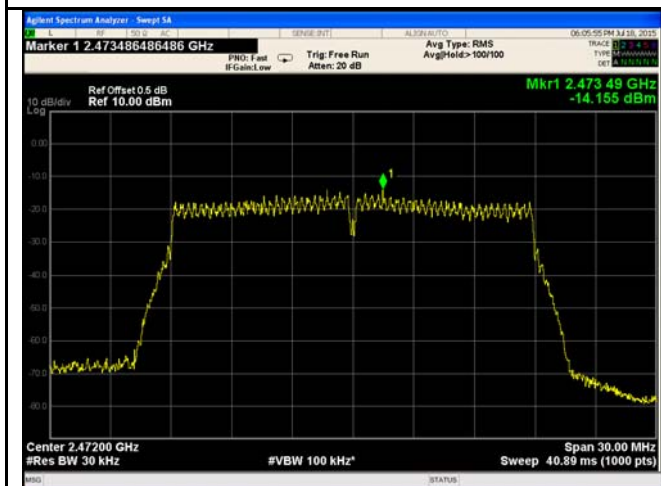


PSD - High CH 2472 - 802.11n20

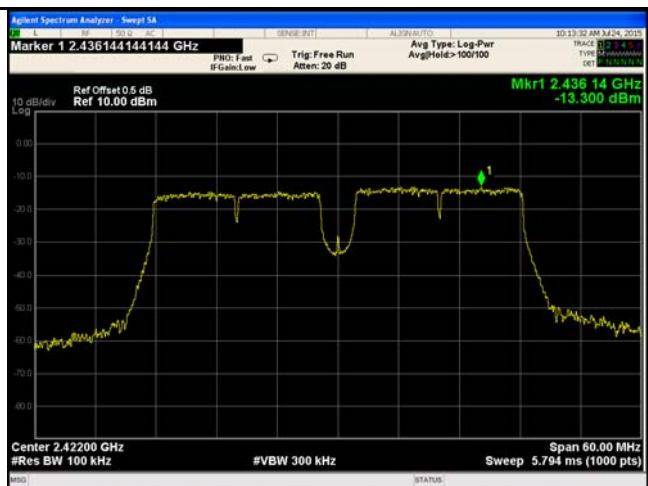

PSD - Low CH 2422 - 802.11n40



PSD - Mid CH 2442 - 802.11n40

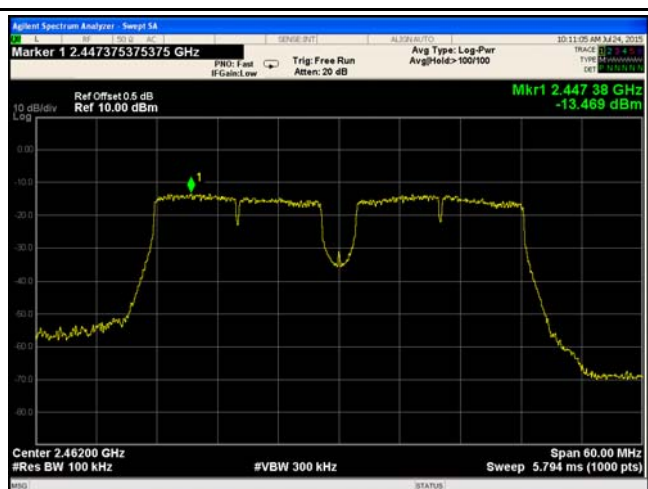


PSD - High CH 2472 - 802.11n40

6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	July 15, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒

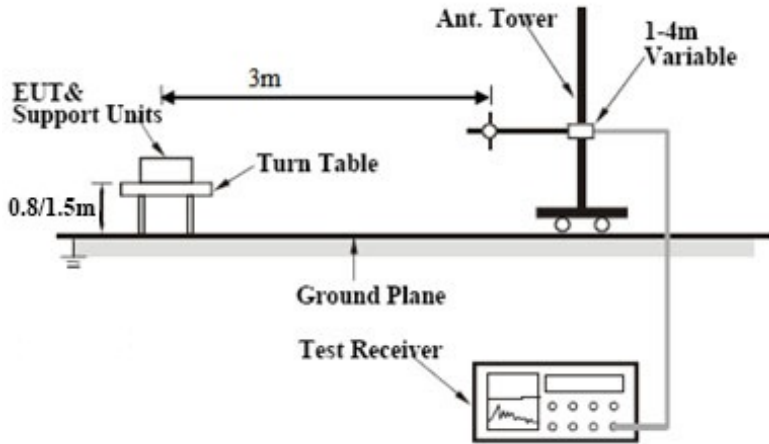Test Setup	 The diagram illustrates the test setup for radiated emissions. It shows a Turn Table with EUT & Support Units on it, positioned 3m from an Ant. Tower. The Ant. Tower has a 1-4m Variable antenna. The setup is on a Ground Plane. A Test Receiver is connected to the antenna.
------------	---

Test Procedure	Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge,
----------------	---

Test Report No.	15050027-FCC-R3
Page	26 of 54


	check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	☒ Pass ☐ Fail



Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Plots

Band Edge measurement result

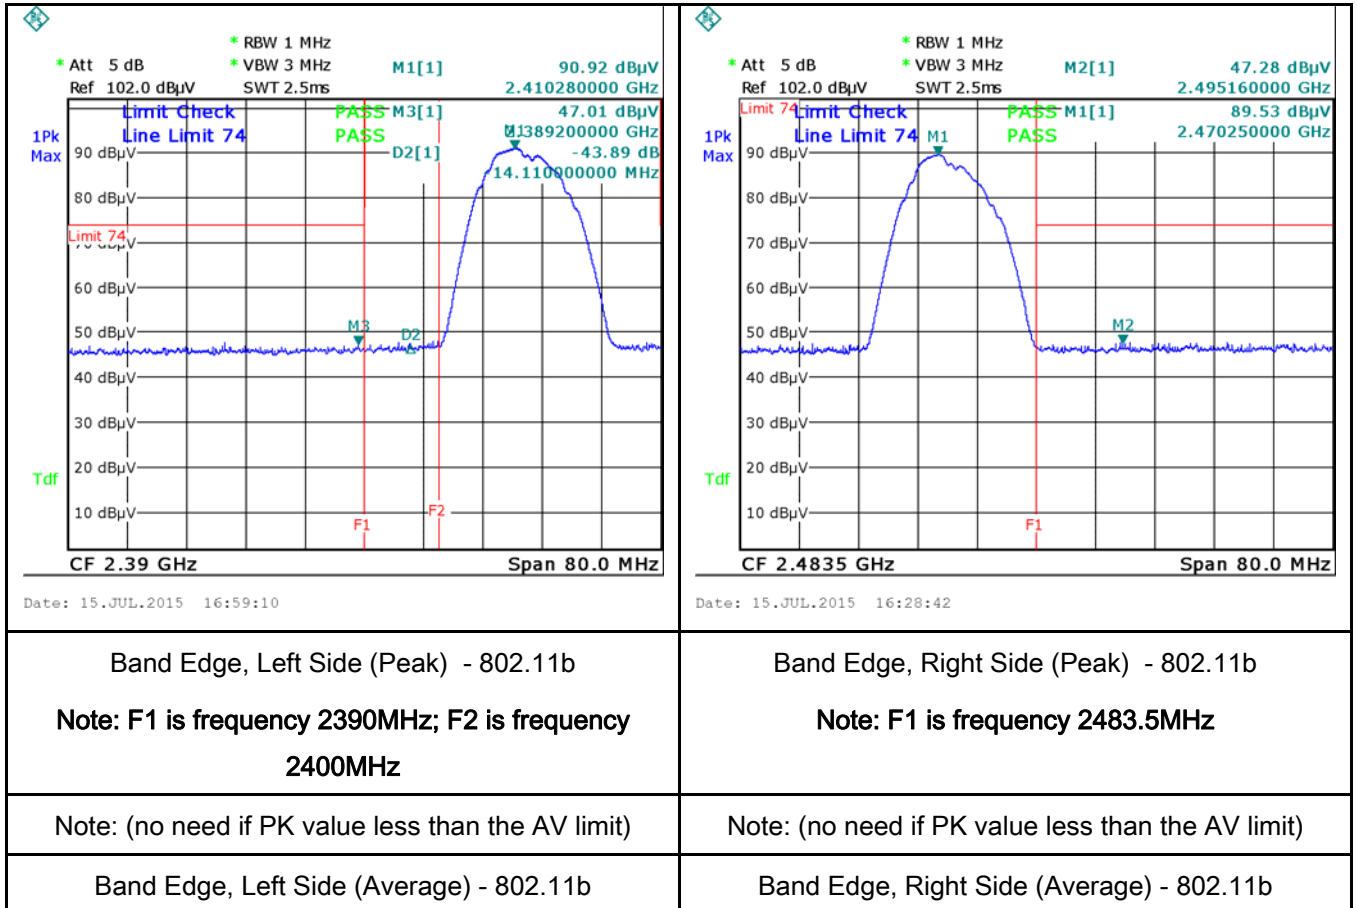

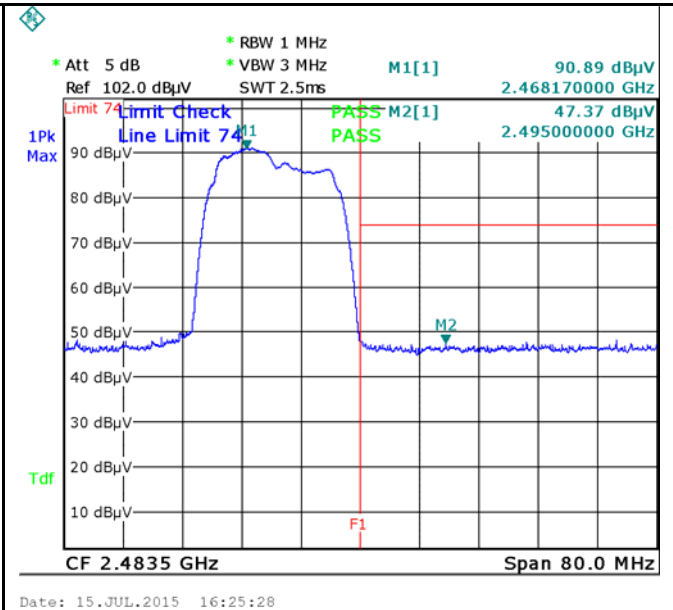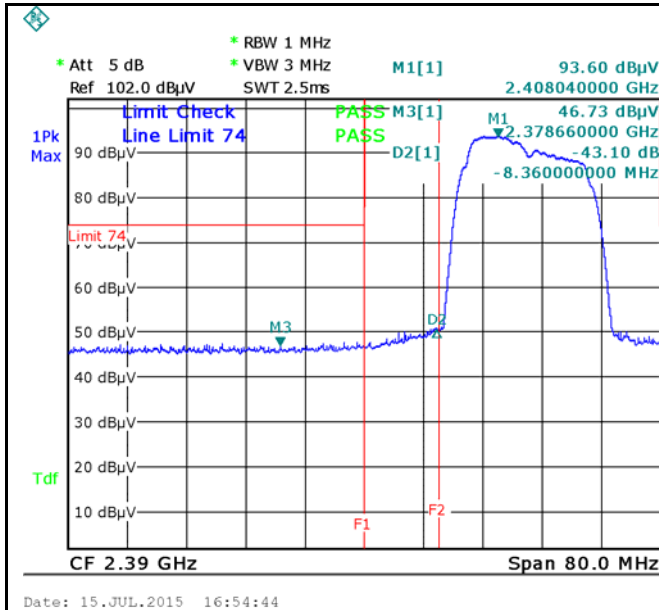

Band Edge, Left Side (Peak) - 802.11g

Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

Band Edge, Left Side (Average) - 802.11g

Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz


Band Edge, Right Side (Peak) - 802.11g

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Band Edge, Right Side (Average) - 802.11g

Note: F1 is frequency 2483.5MHz

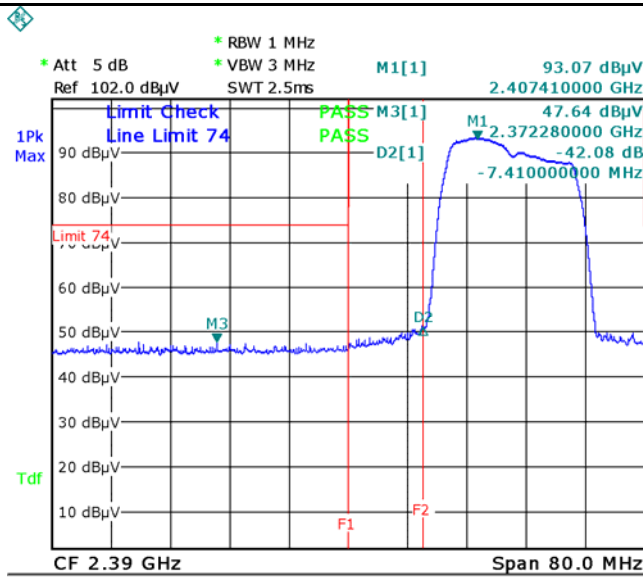


Date: 15.JUL.2015 16:49:33

Band Edge, Left Side (Peak) - 802.11n20
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

Band Edge, Left Side (Average) - 802.11n20
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

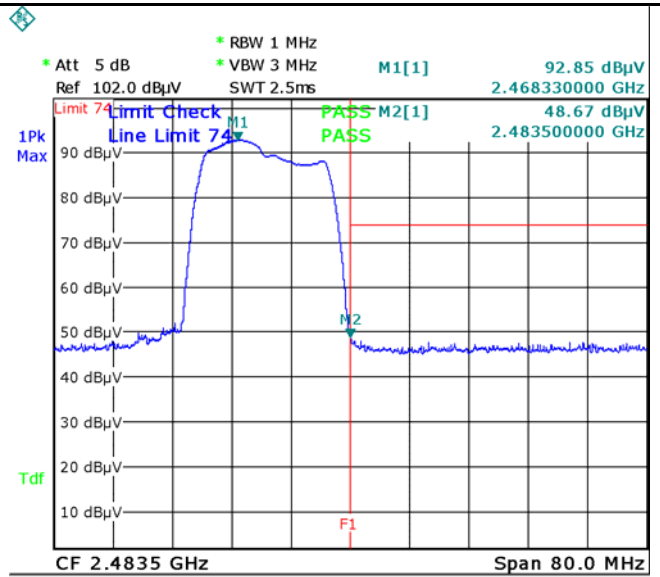


Date: 15.JUL.2015 16:31:41

Band Edge, Right Side (Peak) - 802.11n20
Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Band Edge, Right Side (Average) - 802.11n20
Note: F1 is frequency 2483.5MHz

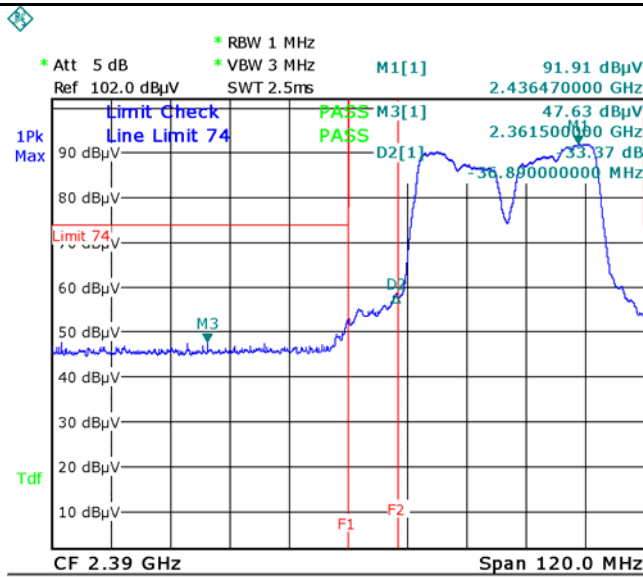


Date: 15.JUL.2015 16:41:50

Band Edge, Left Side (Peak) - 802.11n40
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

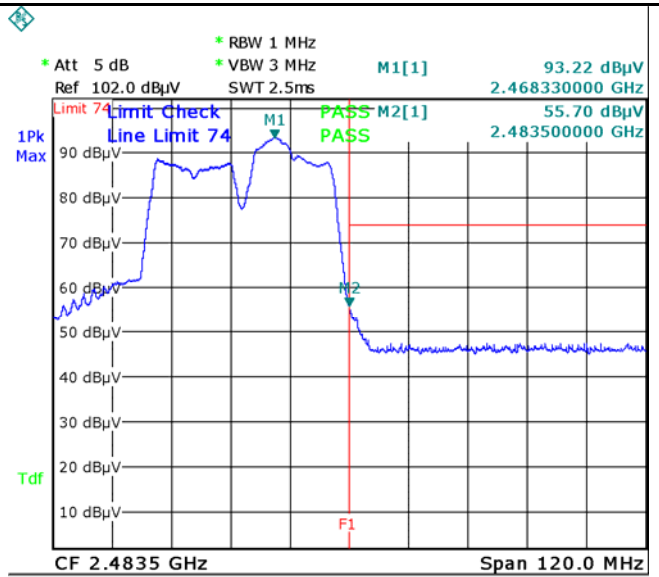


Date: 15.JUL.2015 16:34:43

Band Edge, Right Side (Peak) - 802.11n40
Note: F1 is frequency 2483.5MHz

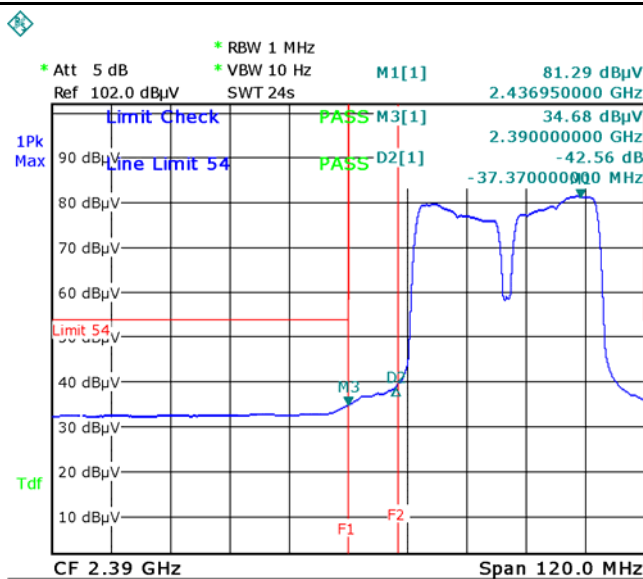

Date: 15.JUL.2015 16:43:58

Band Edge, Left Side (Average) - 802.11n40
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

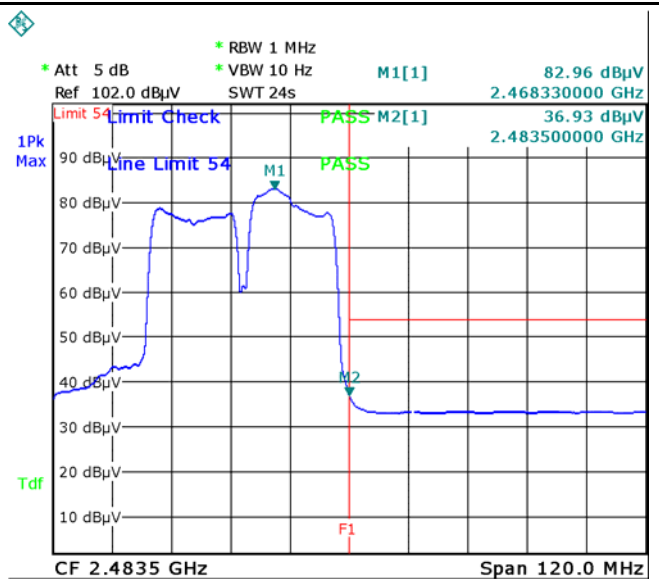

Date: 15.JUL.2015 16:36:41


Band Edge, Right Side (Average) - 802.11n40
Note: F1 is frequency 2483.5MHz

6.6 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	59%
Atmospheric Pressure	1017mbar
Test date :	July 17, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable		
47CFR§15.207,	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒		
		Frequency ranges (MHz)		Limit (dBµV)	
				QP	Average
		0.15 ~ 0.5		66 – 56	56 – 46
		0.5 ~ 5		56	46
5 ~ 30	60	50			

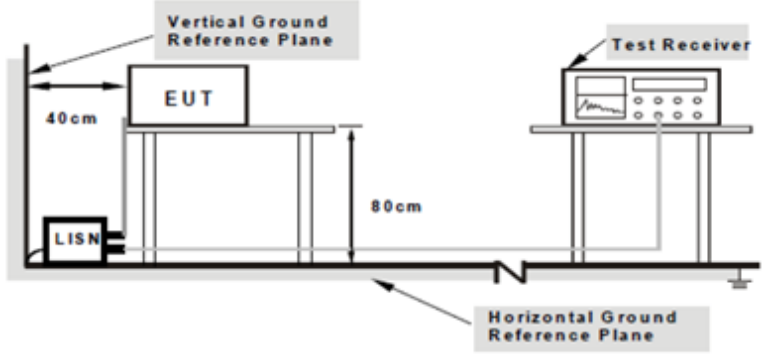Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment were powered separately from another main supply.
-----------	--


Test Report No.	15050027-FCC-R3
Page	32 of 54

	5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

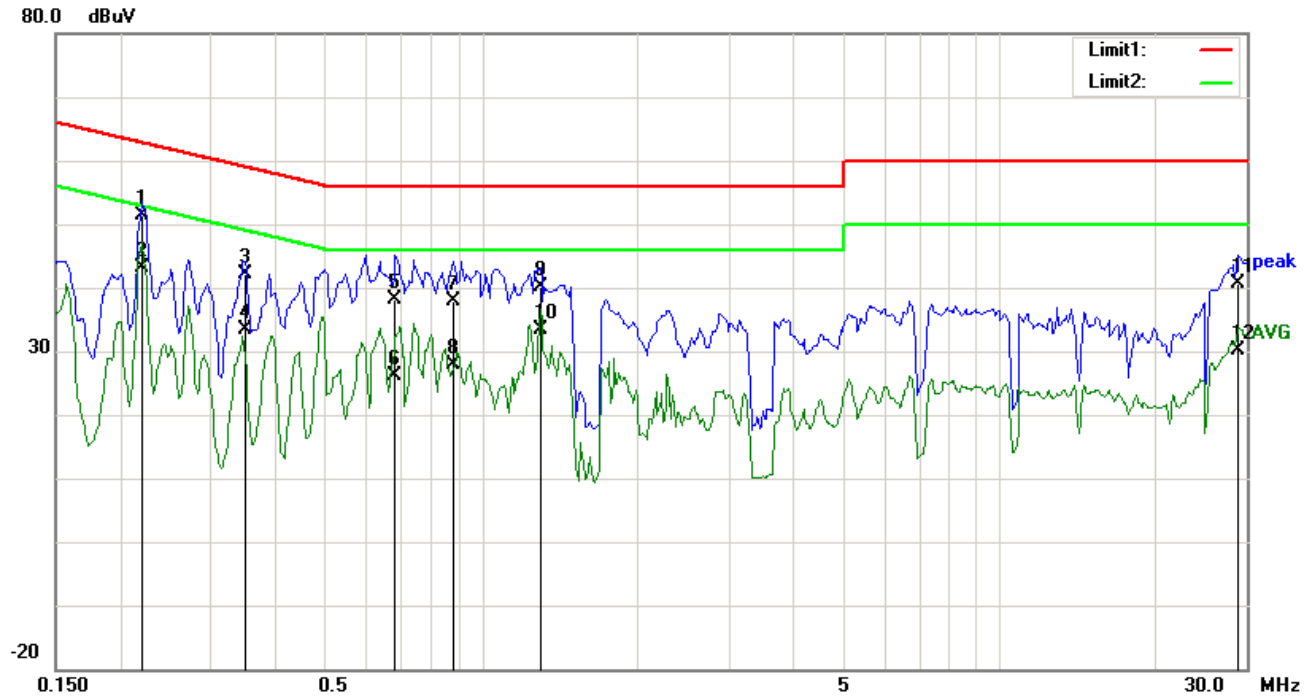


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Comment
1	L1	0.2203	38.44	QP	12.94	51.38	62.81	-11.43	
2	L1	0.2203	30.27	AVG	12.94	43.21	52.81	-9.60	
3	L1	0.3492	29.71	QP	12.46	42.17	58.98	-16.81	
4	L1	0.3492	21.04	AVG	12.46	33.50	48.98	-15.48	
5	L1	0.6813	26.45	QP	11.72	38.17	56.00	-17.83	
6	L1	0.6813	14.32	AVG	11.72	26.04	46.00	-19.96	
7	L1	0.8805	26.33	QP	11.52	37.85	56.00	-18.15	
8	L1	0.8805	16.24	AVG	11.52	27.76	46.00	-18.24	
9	L1	1.2984	28.71	QP	11.40	40.11	56.00	-15.89	
10	L1	1.2984	21.99	AVG	11.40	33.39	46.00	-12.61	
11	L1	28.8711	26.61	QP	13.95	40.56	60.00	-19.44	
12	L1	28.8711	16.27	AVG	13.95	30.22	50.00	-19.78	

Test Mode: Transmitting Mode

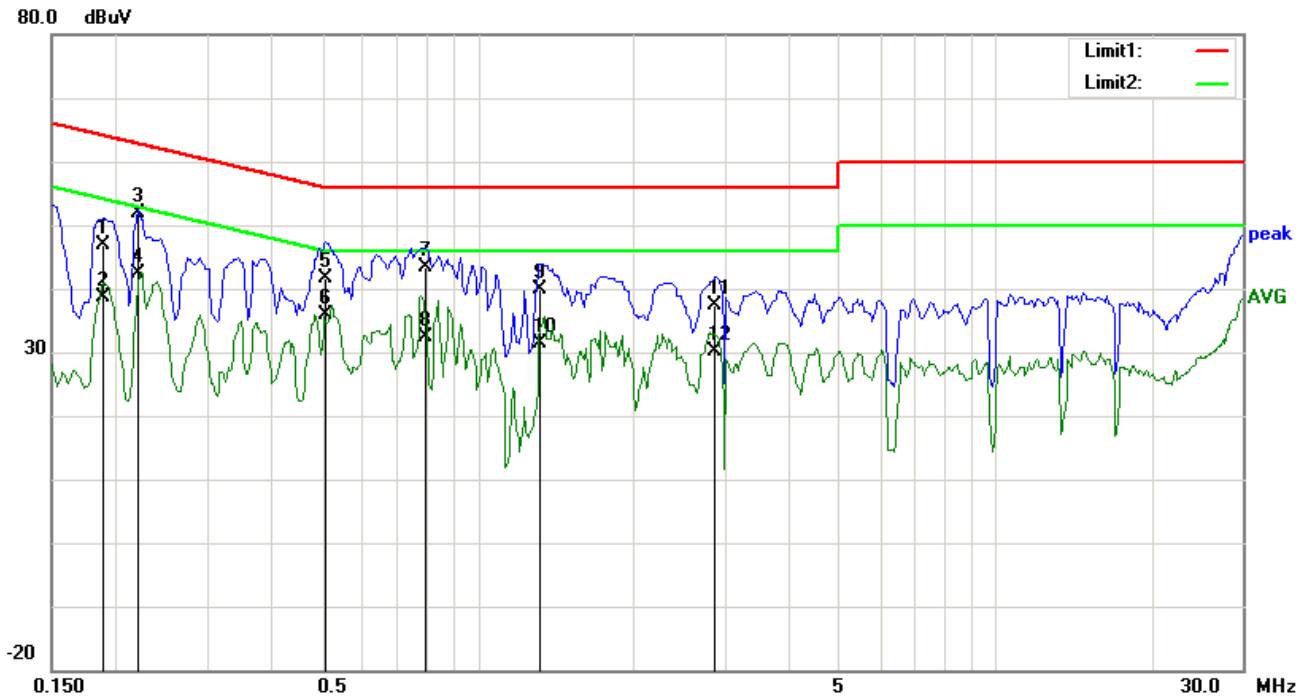


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Comment
1	N	0.1891	33.86	QP	13.05	46.91	64.08	-17.17	
2	N	0.1891	25.50	AVG	13.05	38.55	54.08	-15.53	
3	N	0.2208	38.86	QP	12.94	51.80	62.79	-10.99	
4	N	0.2208	29.42	AVG	12.94	42.36	52.79	-10.43	
5	N	0.5094	29.82	QP	11.89	41.71	56.00	-14.29	
6	N	0.5094	24.06	AVG	11.89	35.95	46.00	-10.05	
7	N	0.7945	31.71	QP	11.61	43.32	56.00	-12.68	
8	N	0.7945	20.81	AVG	11.61	32.42	46.00	-13.58	
9	N	1.3180	28.51	QP	11.44	39.95	56.00	-16.05	
10	N	1.3180	19.93	AVG	11.44	31.37	46.00	-14.63	
11	N	2.8805	25.76	QP	11.64	37.40	56.00	-18.60	
12	N	2.8805	18.56	AVG	11.64	30.20	46.00	-15.80	

Test Mode: Transmitting Mode

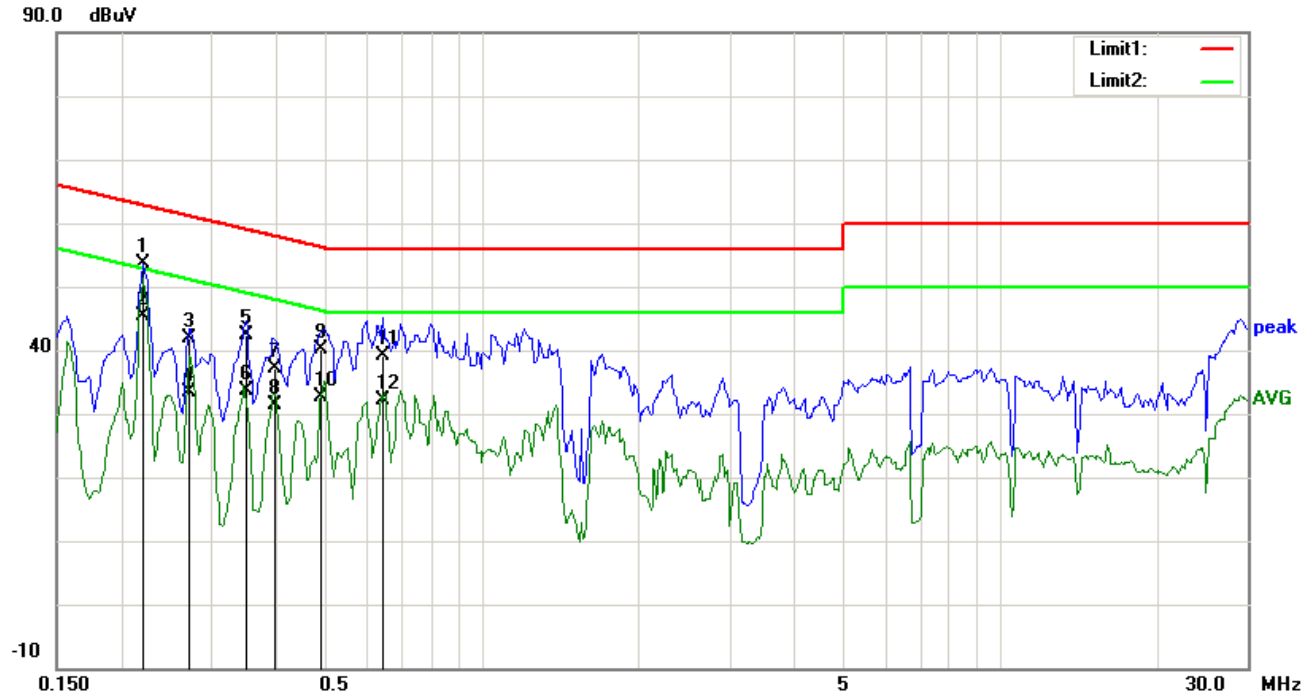


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Comment
1	L1	0.2208	40.58	QP	12.94	53.52	62.79	-9.27	
2	L1	0.2208	32.54	AVG	12.94	45.48	52.79	-7.31	
3	L1	0.2711	29.12	QP	12.75	41.87	61.08	-19.21	
4	L1	0.2711	20.61	AVG	12.75	33.36	51.08	-17.72	
5	L1	0.3492	30.03	QP	12.46	42.49	58.98	-16.49	
6	L1	0.3492	21.09	AVG	12.46	33.55	48.98	-15.43	
7	L1	0.3961	24.89	QP	12.29	37.18	57.93	-20.75	
8	L1	0.3961	19.01	AVG	12.29	31.30	47.93	-16.63	
9	L1	0.4863	28.12	QP	11.95	40.07	56.23	-16.16	
10	L1	0.4863	20.80	AVG	11.95	32.75	46.23	-13.48	
11	L1	0.6422	27.38	QP	11.76	39.14	56.00	-16.86	
12	L1	0.6422	20.49	AVG	11.76	32.25	46.00	-13.75	

Test Mode: Transmitting Mode

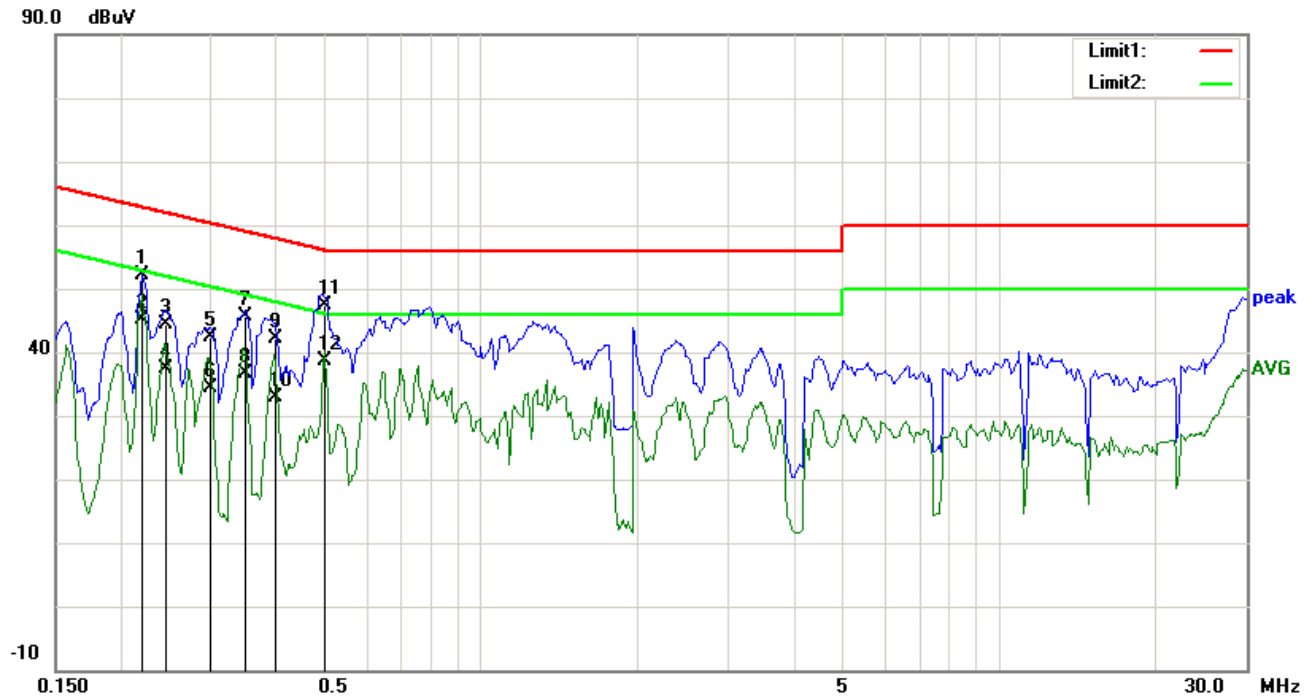

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Comment
1	N	0.2208	39.18	QP	12.94	52.12	62.79	-10.67	
2	N	0.2208	32.15	AVG	12.94	45.09	52.79	-7.70	
3	N	0.2455	31.48	QP	12.85	44.33	61.91	-17.58	
4	N	0.2455	24.52	AVG	12.85	37.37	51.91	-14.54	
5	N	0.2987	29.65	QP	12.65	42.30	60.28	-17.98	
6	N	0.2987	21.74	AVG	12.65	34.39	50.28	-15.89	
7	N	0.3492	33.23	QP	12.46	45.69	58.98	-13.29	
8	N	0.3492	24.10	AVG	12.46	36.56	48.98	-12.42	
9	N	0.4000	29.95	QP	12.27	42.22	57.85	-15.63	
10	N	0.4000	20.71	AVG	12.27	32.98	47.85	-14.87	
11	N	0.4977	35.41	QP	11.91	47.32	56.04	-8.72	
12	N	0.4977	26.67	AVG	11.91	38.58	46.04	-7.46	

6.7 Radiated Spurious Emissions

Temperature	22°C
Relative Humidity	59%
Atmospheric Pressure	1017mbar
Test date :	July 17, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.247(d),	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☒										
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)									
		30 – 88		100									
		88 – 216		150									
216 960	200												
Above 960	500												
	b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required ☒ 20 dB down ☐ 30 dB down	☒										
	c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒										

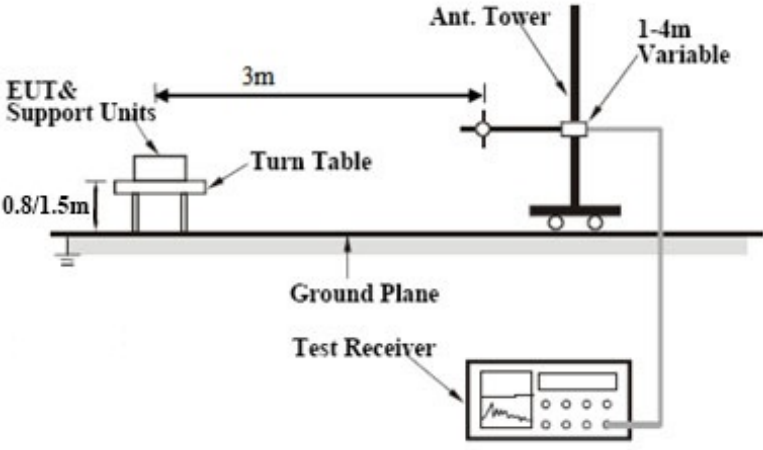
Test Setup	
Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2442MHz mode.
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

(Below 1GHz)

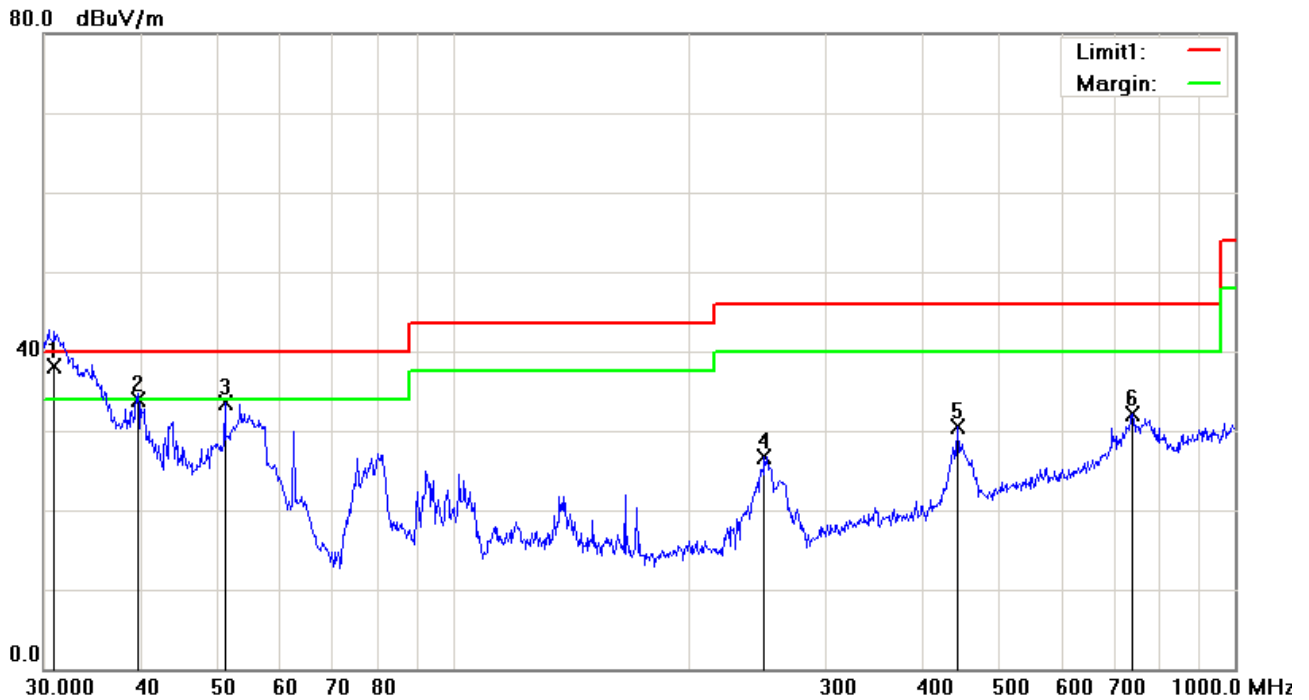

Test Data

Vertical Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Height	Degree	Comment
1	V	30.9619	38.99	QP	-0.96	38.03	40.00	-1.97	100	43	
2	V	39.5757	41.25	QP	-7.28	33.97	40.00	-6.03	100	276	
3	V	51.1209	46.87	peak	-13.30	33.57	40.00	-6.43	200	356	
4	V	250.3012	35.87	peak	-9.18	26.69	46.00	-19.31	100	237	
5	V	441.7426	33.77	peak	-3.29	30.48	46.00	-15.52	200	45	
6	V	739.6605	29.93	peak	2.20	32.13	46.00	-13.87	200	179	

(Below 1GHz)



Test Data

Horizontal Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dBμV)	Detector	Corrected (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Height	Degree	Comment
1	H	34.3964	35.64	peak	-3.50	32.14	40.00	-7.86	100	130	
2	H	39.9942	37.91	peak	-7.59	30.32	40.00	-9.68	200	243	
3	H	137.9029	32.04	peak	-8.40	23.64	43.50	-19.86	100	36	
4	H	370.7023	29.17	peak	-4.98	24.19	46.00	-21.81	100	86	
5	H	454.3100	29.19	peak	-2.96	26.23	46.00	-19.77	135	95	
6	H	790.6188	29.13	peak	3.06	32.19	46.00	-13.81	200	310	

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel (2412 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4824	36.51	AV	V	34	6.86	31.72	45.65	54	-8.35
4824	36.84	AV	H	33.8	6.86	31.72	45.78	54	-8.22
4824	47.22	PK	V	34	6.86	31.72	56.36	74	-17.64
4824	46.73	PK	H	33.8	6.86	31.72	55.67	74	-18.33

Middle Channel (2442 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4884	36.27	AV	V	33.6	6.82	31.82	44.87	54	-9.13
4884	36.55	AV	H	33.8	6.82	31.82	45.35	54	-8.65
4884	46.81	PK	V	33.6	6.82	31.82	55.41	74	-18.59
4884	46.08	PK	H	33.8	6.82	31.82	54.88	74	-19.12

High Channel (2472 MHz)


Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4944	36.44	AV	V	34.6	6.76	31.92	45.88	54	-8.12
4944	35.92	AV	H	34.7	6.76	31.92	45.46	54	-8.54
4944	46.57	PK	V	34.6	6.76	31.92	56.01	74	-17.99
4944	46.31	PK	H	34.7	6.76	31.92	55.85	74	-18.15

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	☒
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	☒
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	☒
LISN	ISN T800	34373	09/26/2014	09/25/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	☒
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	☒
Power Splitter	1#	1#	09/02/2014	09/01/2015	☒
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	☒
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	☒

Annex B. EUT and Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

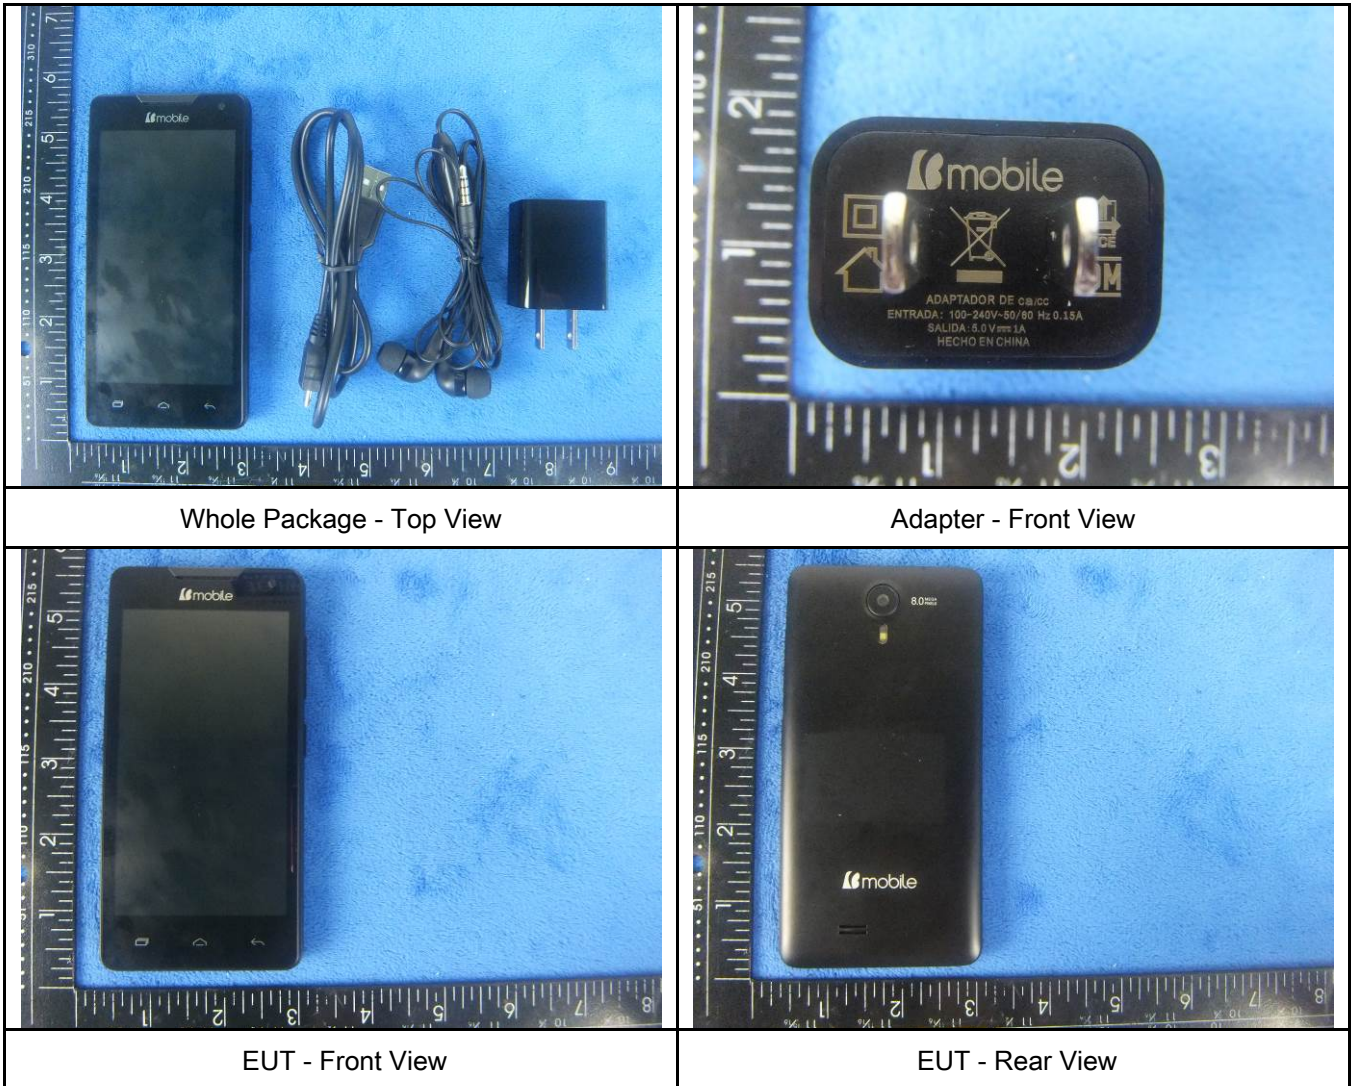


Test Report No.	15050027-FCC-R3
Page	44 of 54



EUT - Top View



EUT - Bottom View

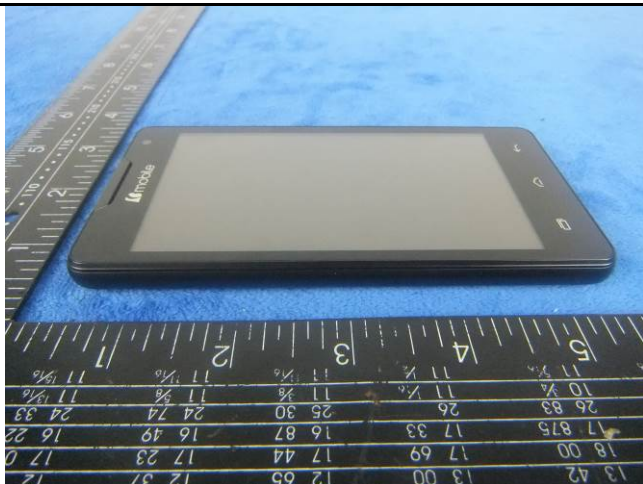

EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Top View




Battery - Bottom View

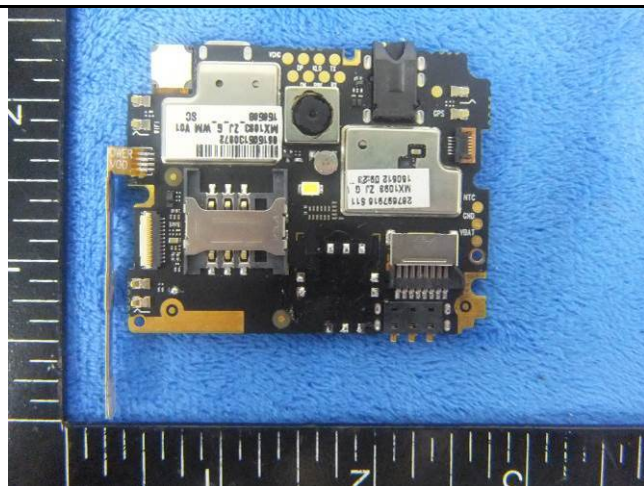


Mainboard With Shielding - Front View

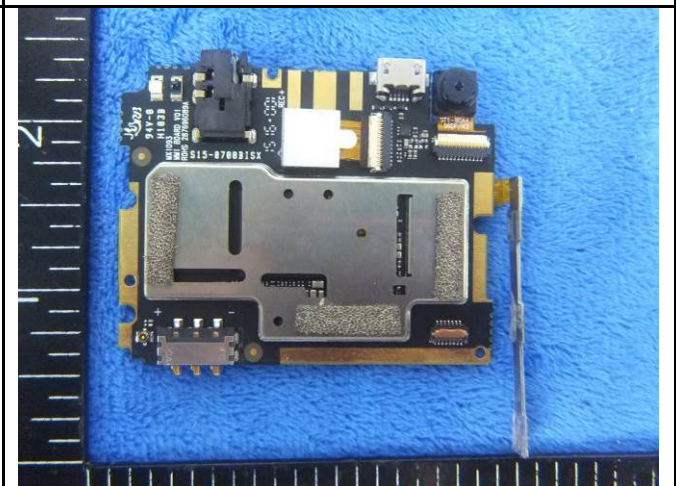

Mainboard With Shielding - Rear View

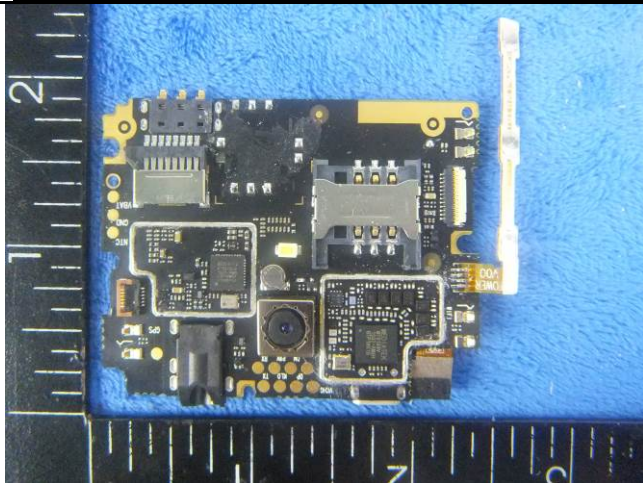


Mainboard Without Shielding - Front View

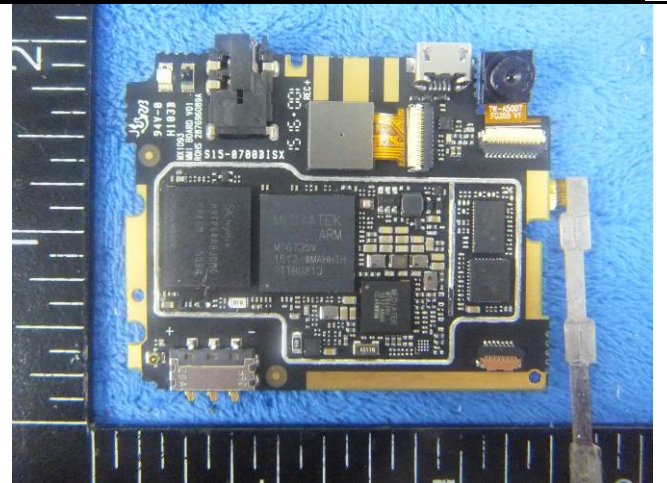


Mainboard Without Shielding - Rear View



LCD - Front View

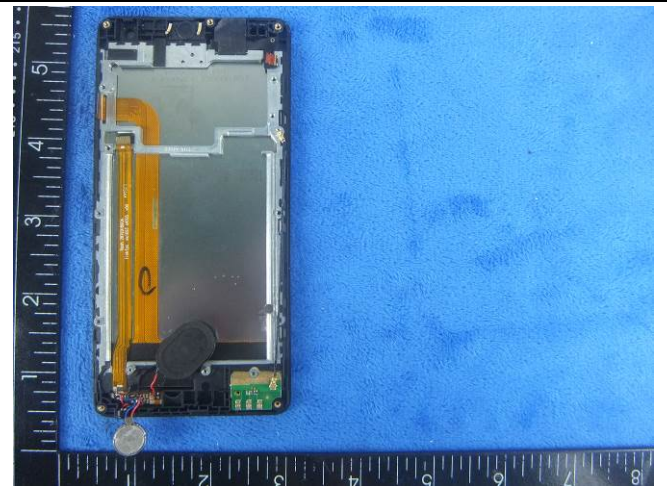

LCD - Rear View

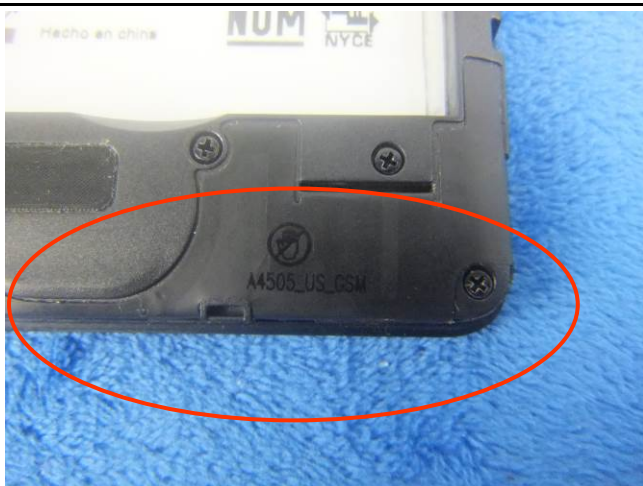

GSM/PCS/UMTS-FDD Antenna View



WIFI/BT/BLE - Antenna View

Test Report No.	15050027-FCC-R3
Page	47 of 54



LTE- Antenna View

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz

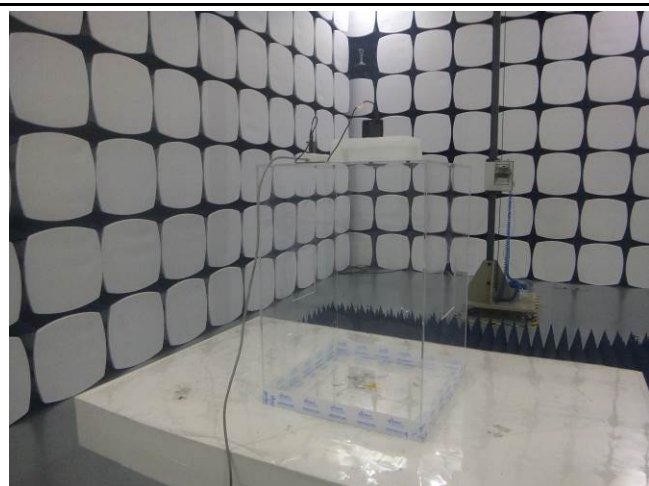


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

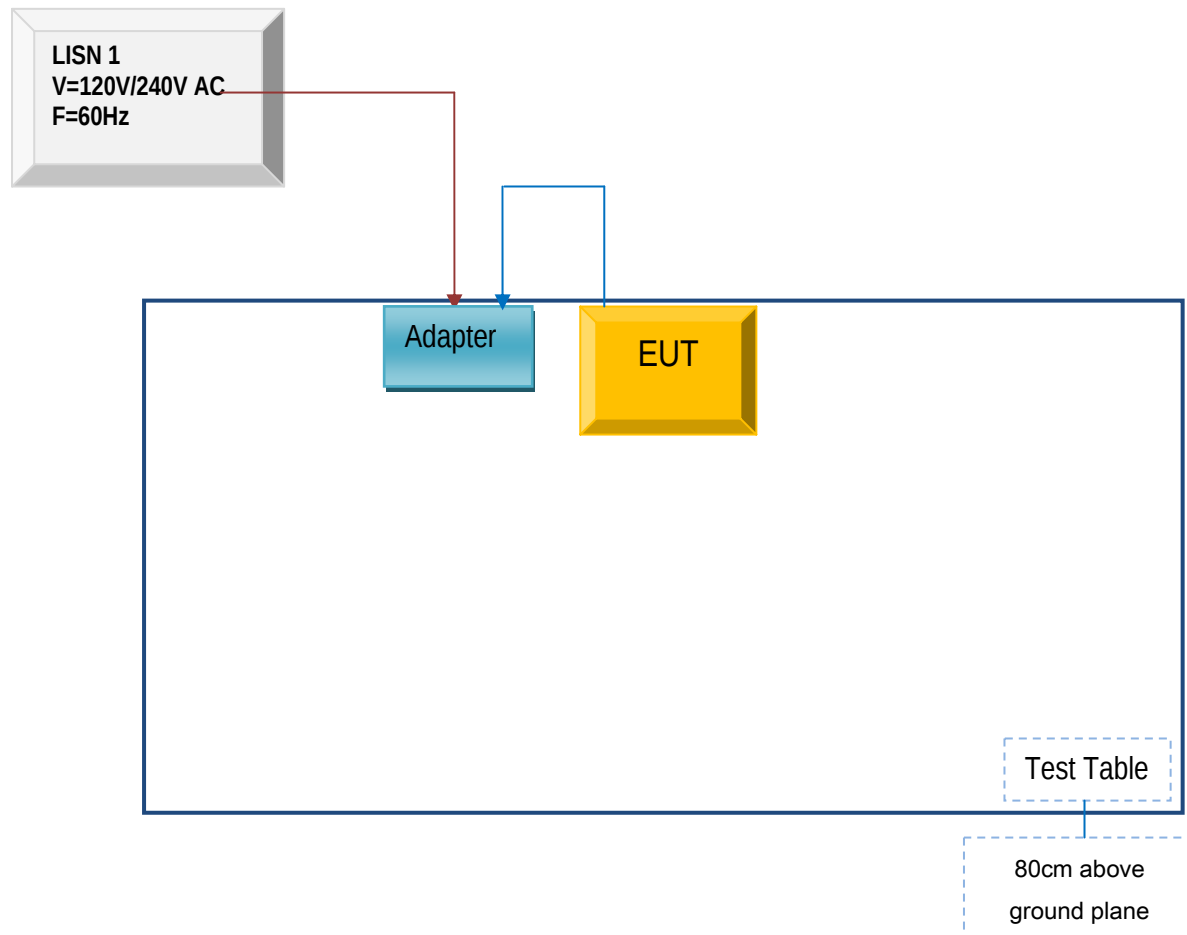

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

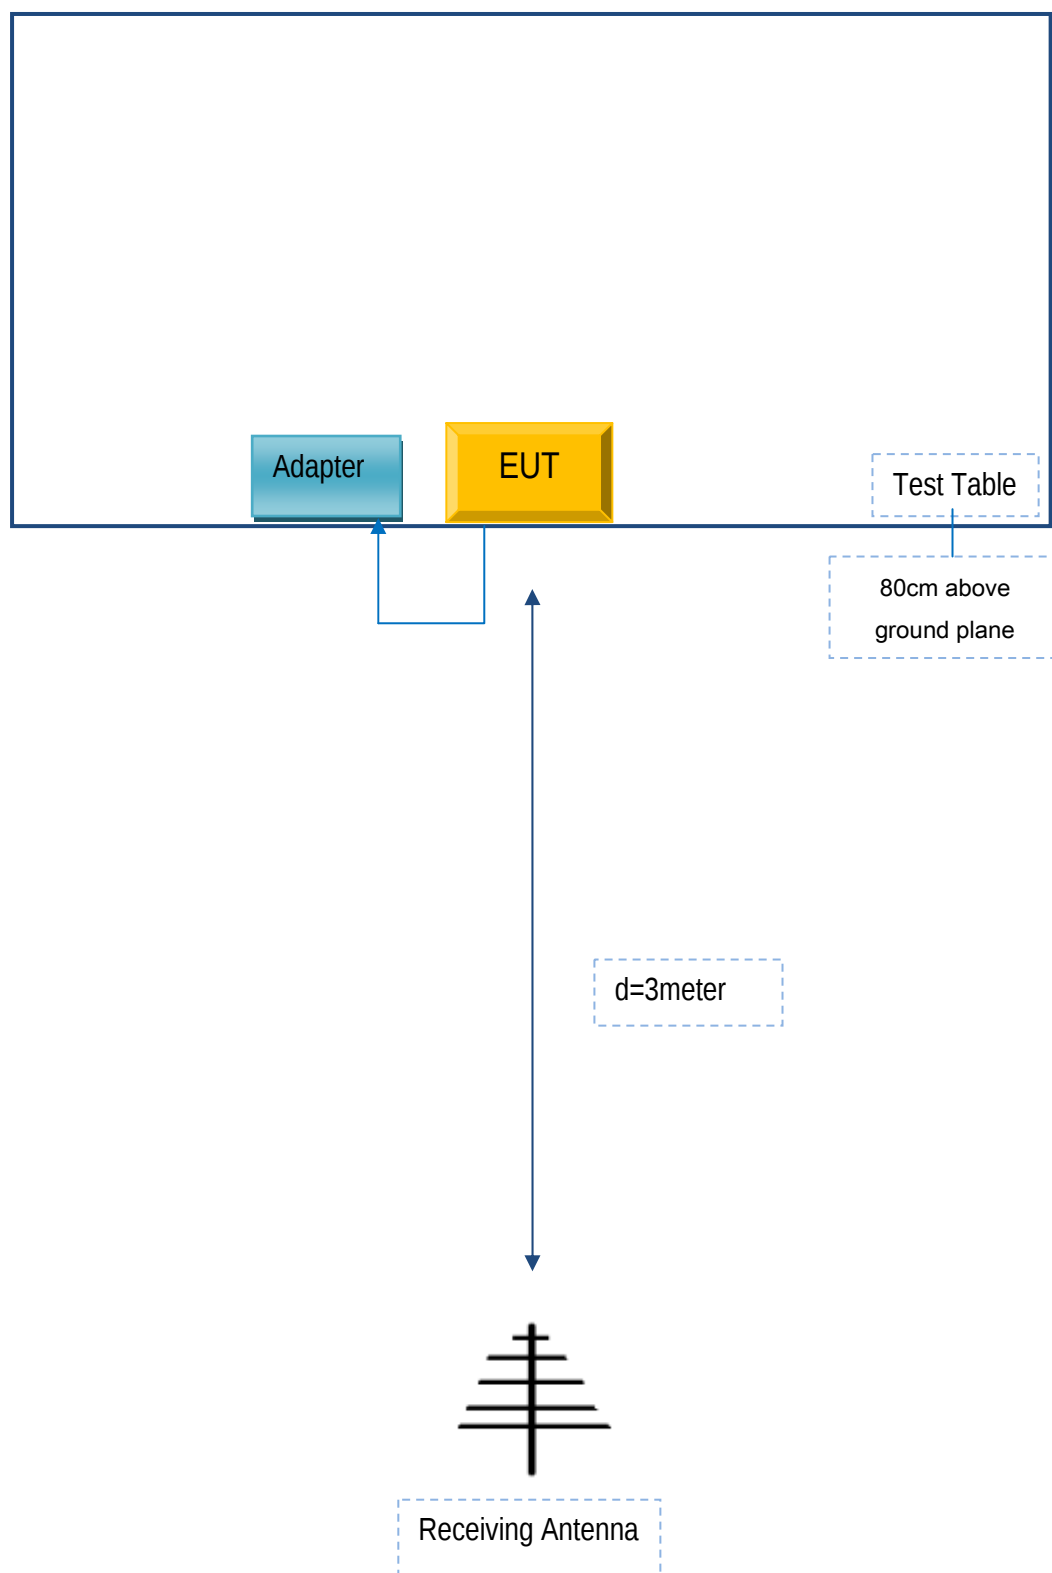

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

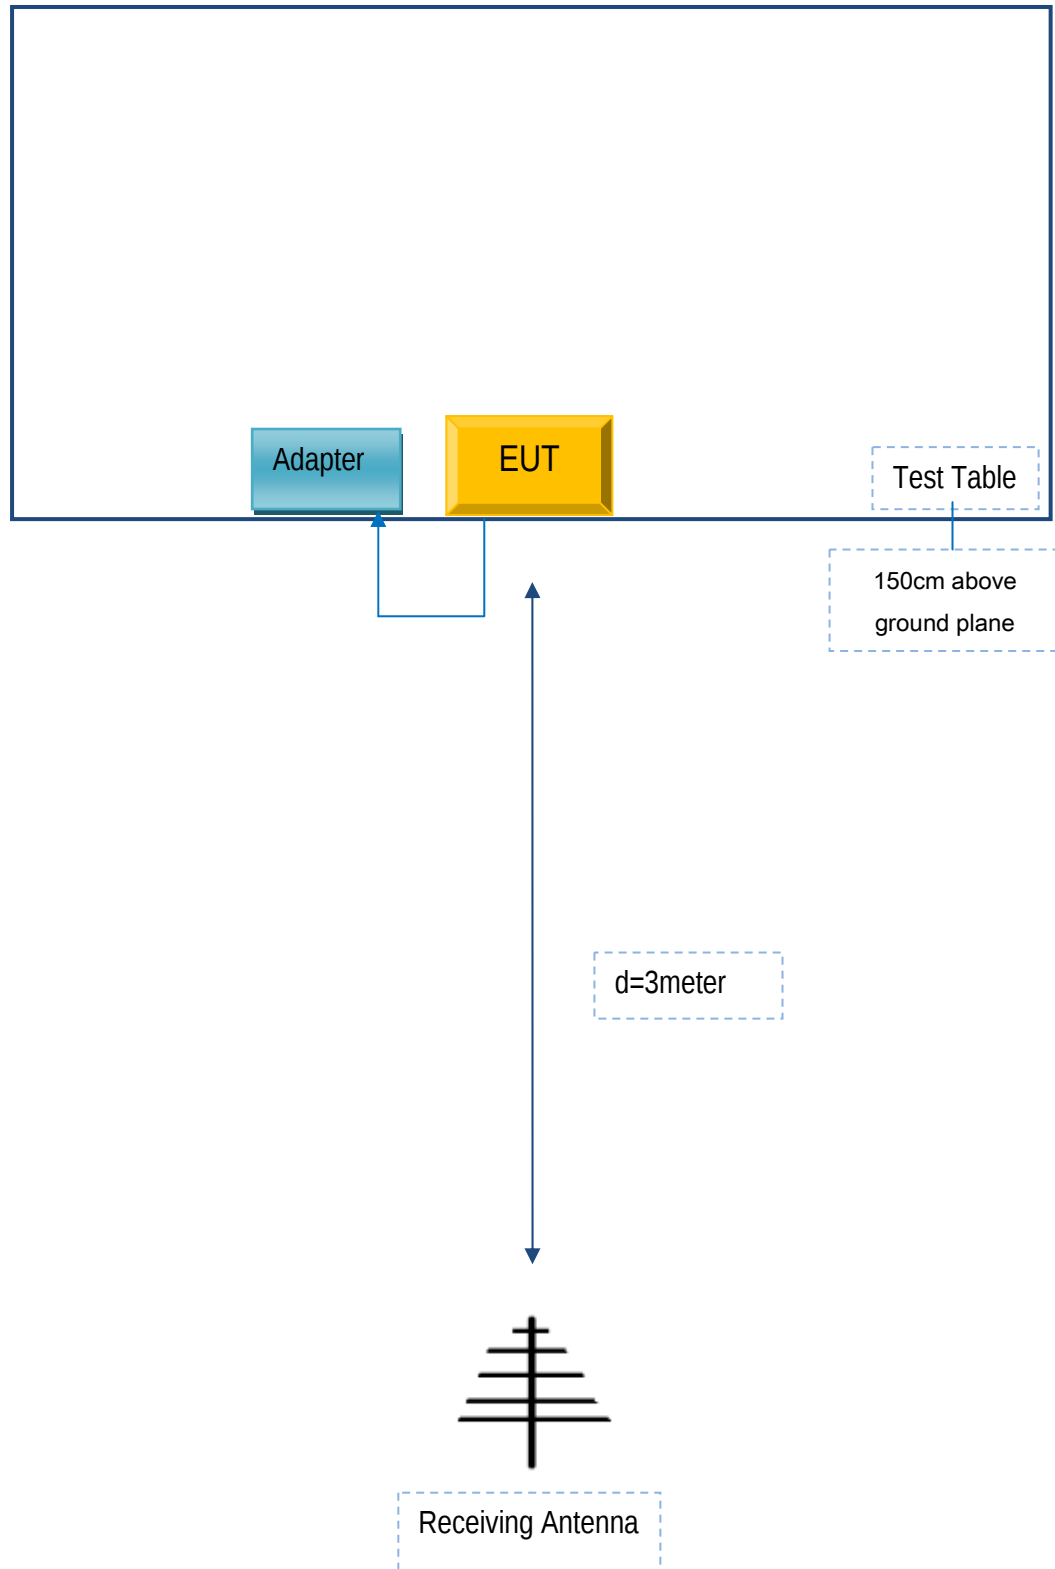

Test Report No.	15050027-FCC-R3
Page	52 of 54

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report No.	15050027-FCC-R3
Page	53 of 54

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	15050027-FCC-R3
Page	54 of 54

Annex E. DECLARATION OF SIMILARITY

b Mobile HK Limited

To SIEMIC Inc
775 Montague Expressway
Milpitas, CA 95035.

Statement

We, **b Mobile HK Limited** apply a multiple-listing certification for the below models.

Product Name: Mobile phone

Model number: AX1020/ AX1030

FCC ID: ZSW-30-012

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model name is different for the marketing requirement.


Your assistance on this matter is highly appreciated.

Sincerely,

Name: KA SHING LAM

Title: Director

Signature:

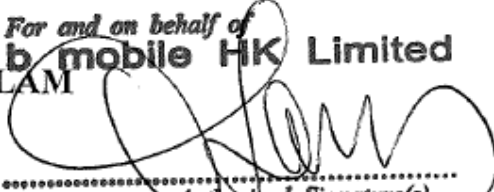For and on behalf of
b mobile HK Limited

.....
Authorized Signature(s)