

Test Report No.50352705 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50352705 001Appendix D)


Contents

Spurious Emissions, Band Edges.....	2
Spurious Emissions, TX Mode, 9kHz-30MHz	14
Spurious Emissions, TX Mode, 30MHz-1GHz	16
Spurious Emissions, TX Mode, 1GHz-26.5GHz	18
Spurious Emissions, AC Mains.....	24

Spurious Emissions, Band Edges




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

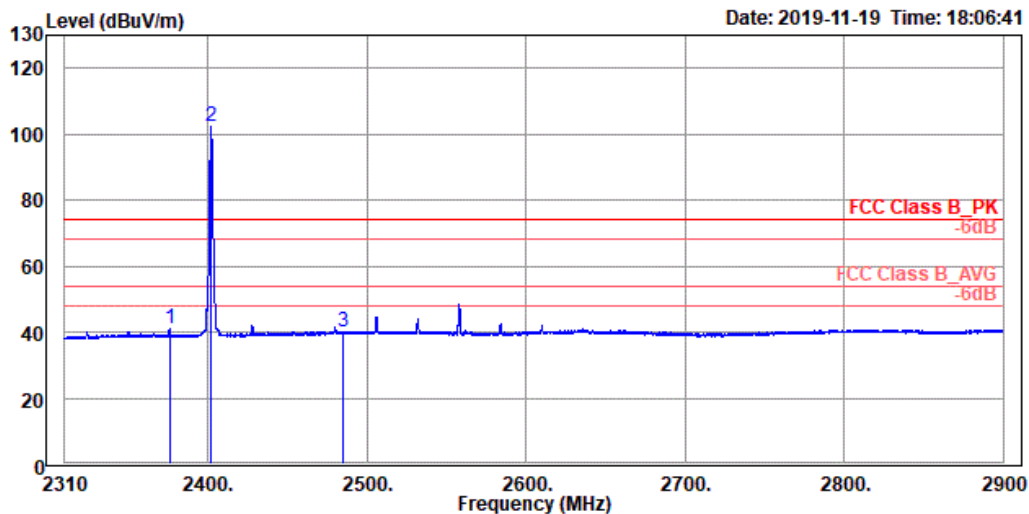


Site : 3m_Semi-Anechoic Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Powersetting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2375.84	40.93	3.54	37.39	74.00	-33.07	100	324	Average
2 *	2402.00	102.11	64.63	37.48	74.00	28.11	100	324	Average
3	2485.05	40.23	2.47	37.76	74.00	-33.77	100	324	Average

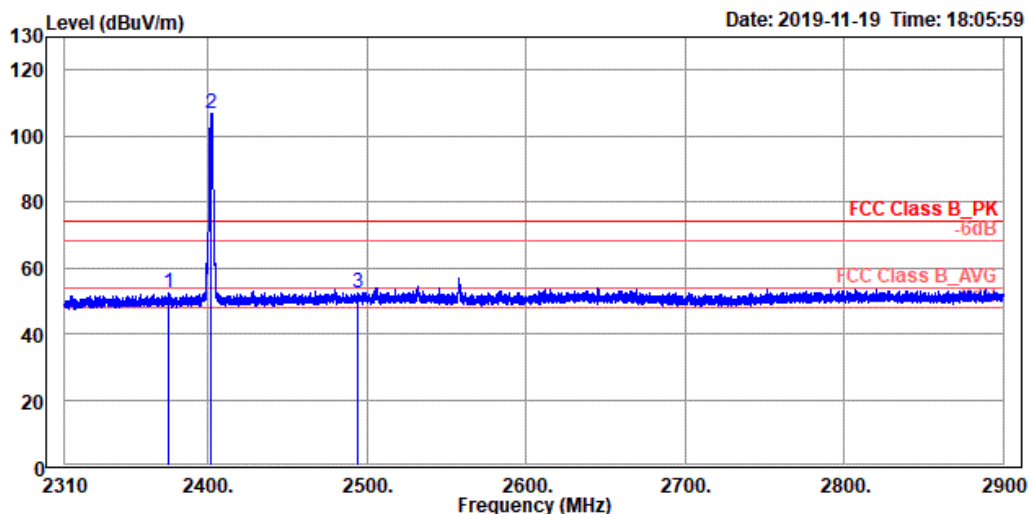


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2375.67	52.43	15.04	37.39	74.00	-21.57	100	324	Peak
2 *	2402.00	106.83	69.35	37.48	74.00	32.83	100	324	Peak
3	2493.90	52.25	14.48	37.77	74.00	-21.75	100	324	Peak

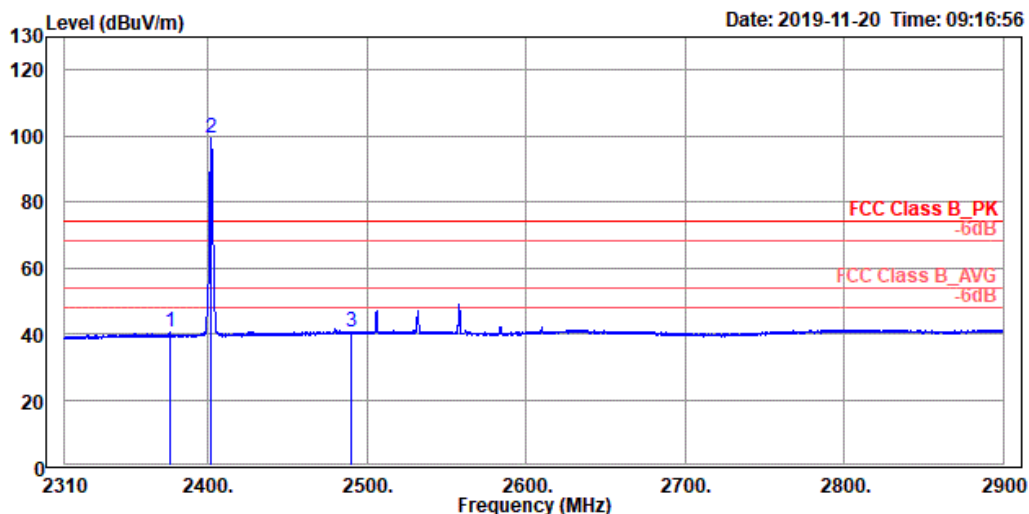


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2375.90	40.48	3.09	37.39	74.00	-33.52	317	217	Average
2 *	2402.00	99.24	61.76	37.48	74.00	25.24	317	217	Average
3	2489.71	40.75	2.98	37.77	74.00	-33.25	317	217	Average

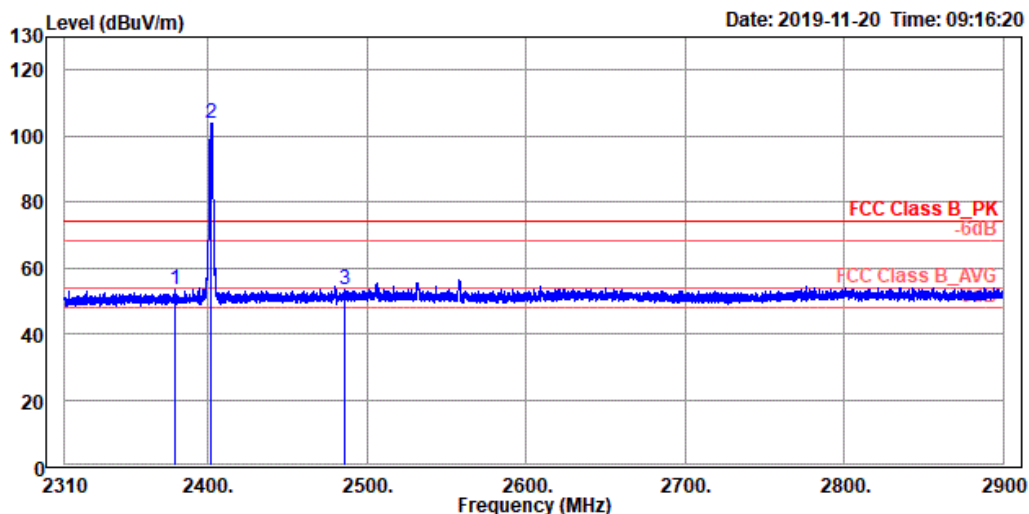


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2379.33	53.20	15.80	37.40	74.00	-20.80	317	217	Peak
2 *	2402.00	103.79	66.31	37.48	74.00	29.79	317	217	Peak
3	2485.58	53.19	15.43	37.76	74.00	-20.81	317	217	Peak

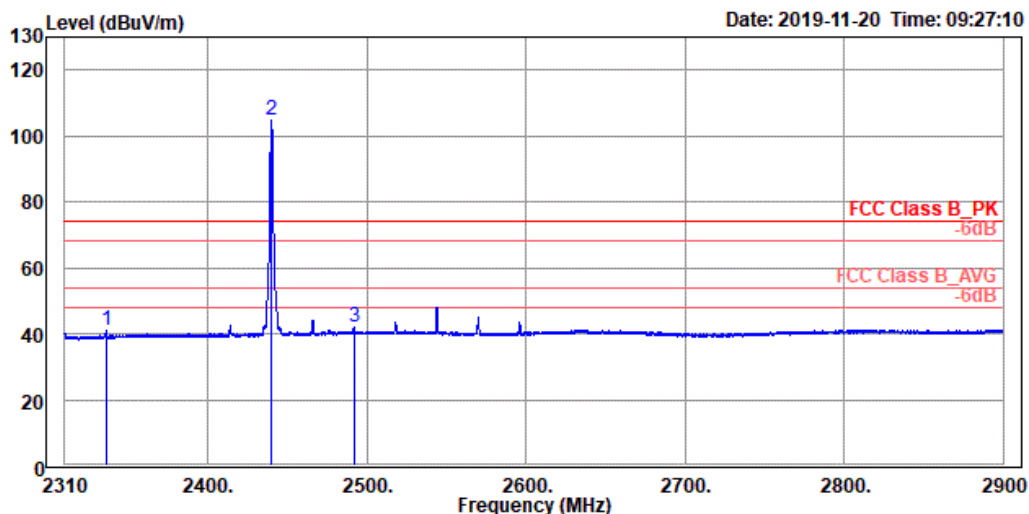


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2335.90	40.98	3.97	37.01	54.00	-13.02	112	299	Average
2 *	2440.00	104.74	67.07	37.67	54.00	50.74	112	299	Average
3	2492.02	42.02	4.25	37.77	54.00	-11.98	112	299	Average

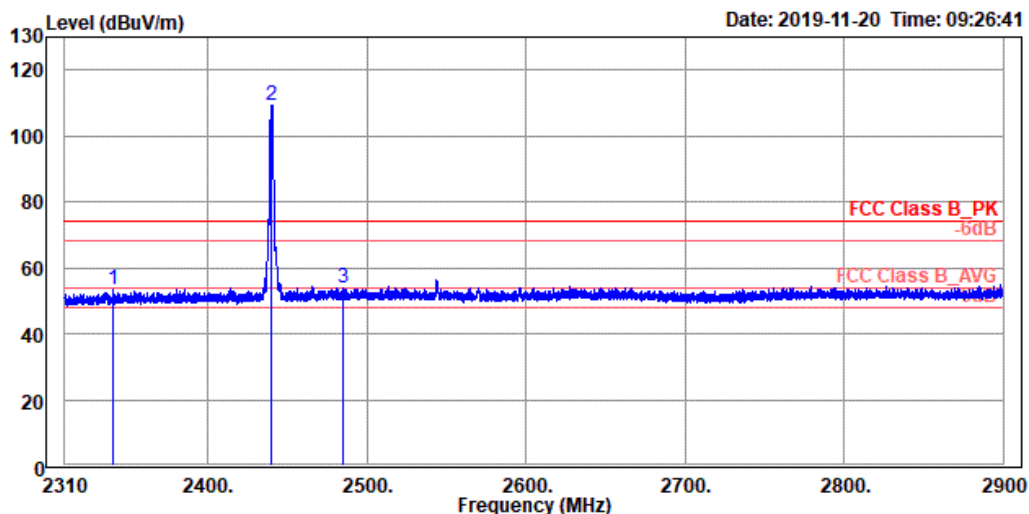


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2340.56	53.38	16.27	37.11	74.00	-20.62	112	299	Peak
2 *	2440.00	109.47	71.80	37.67	74.00	35.47	112	299	Peak
3	2484.99	54.00	16.24	37.76	74.00	-20.00	112	299	Peak

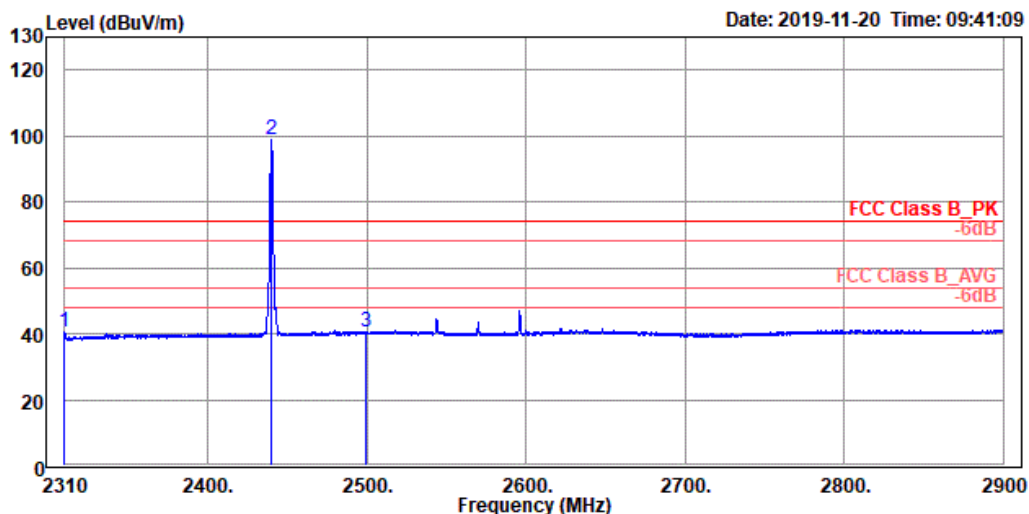


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2310.00	40.32	3.86	36.46	54.00	-13.68	269	175	Average
2 *	2440.00	98.68	61.01	37.67	54.00	44.68	269	175	Average
3	2499.15	40.70	2.92	37.78	54.00	-13.30	269	175	Average

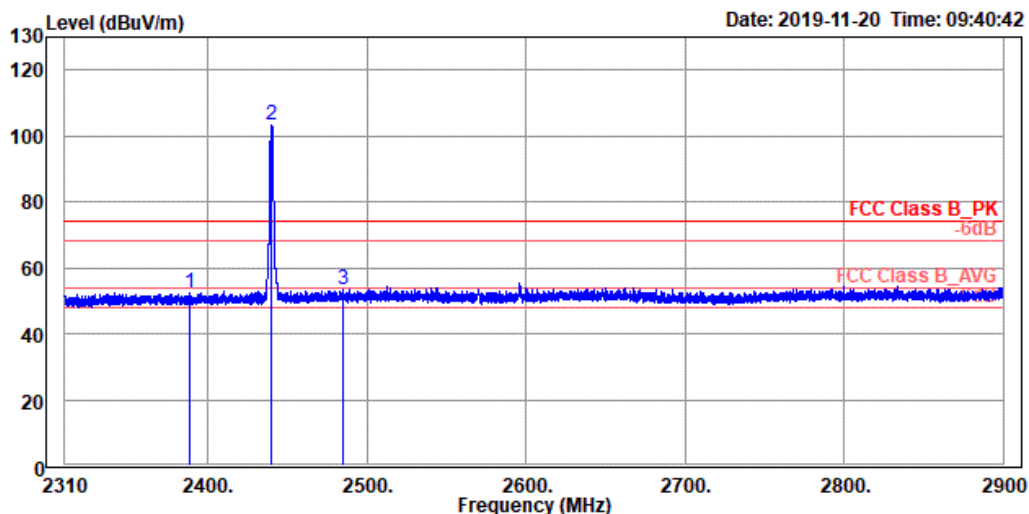


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Powersetting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2388.29	52.55	15.12	37.43	74.00	-21.45	269	175	Peak
2 *	2440.00	103.11	65.44	37.67	74.00	29.11	269	175	Peak
3	2485.41	53.56	15.80	37.76	74.00	-20.44	269	175	Peak

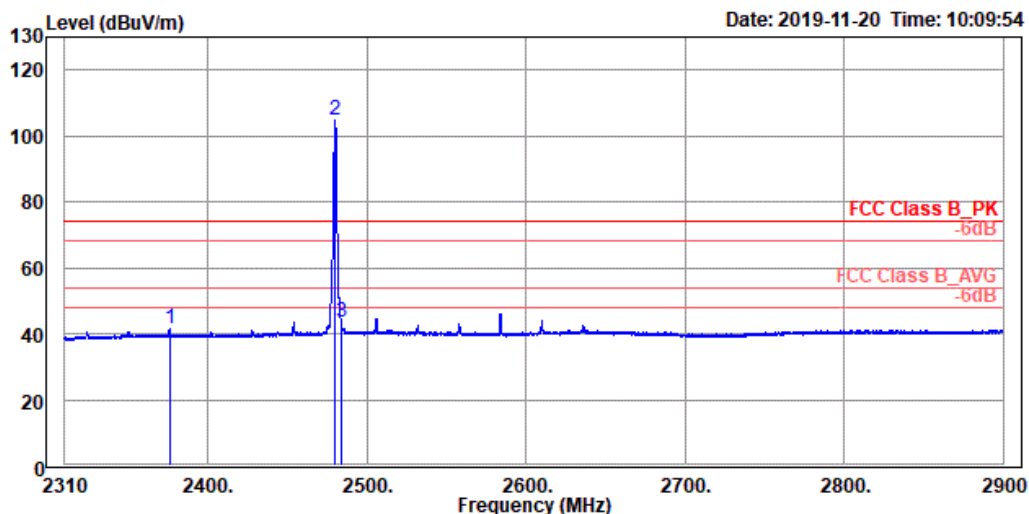


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2375.96	41.68	4.29	37.39	54.00	-12.32	110	299	Average
2 *	2480.00	104.81	67.05	37.76	54.00	50.81	110	299	Average
3	2483.58	43.66	5.90	37.76	54.00	-10.34	110	299	Average

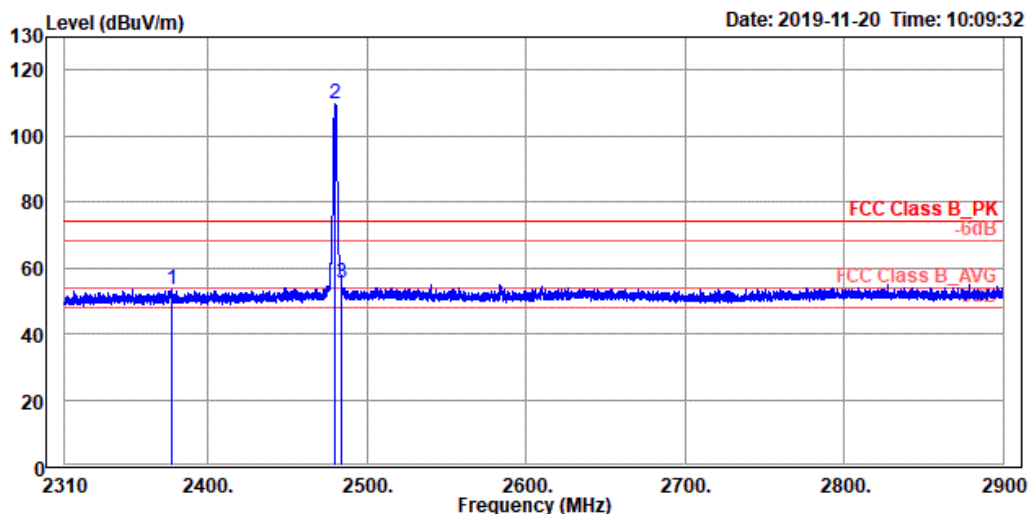


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2376.85	53.19	15.80	37.39	74.00	-20.81	110	299	Peak
2 *	2480.00	109.63	71.87	37.76	74.00	35.63	110	299	Peak
3	2483.93	55.31	17.55	37.76	74.00	-18.69	110	299	Peak

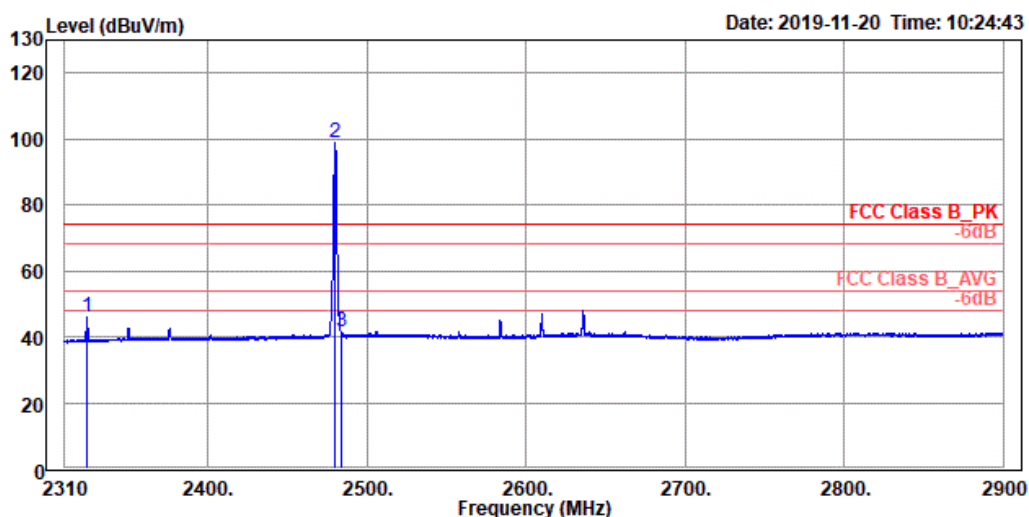

Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2323.92	46.18	9.42	36.76	54.00	-7.82	315	213	Average
2 *	2480.00	99.10	61.34	37.76	54.00	45.10	315	213	Average
3	2483.58	41.29	3.53	37.76	54.00	-12.71	315	213	Average

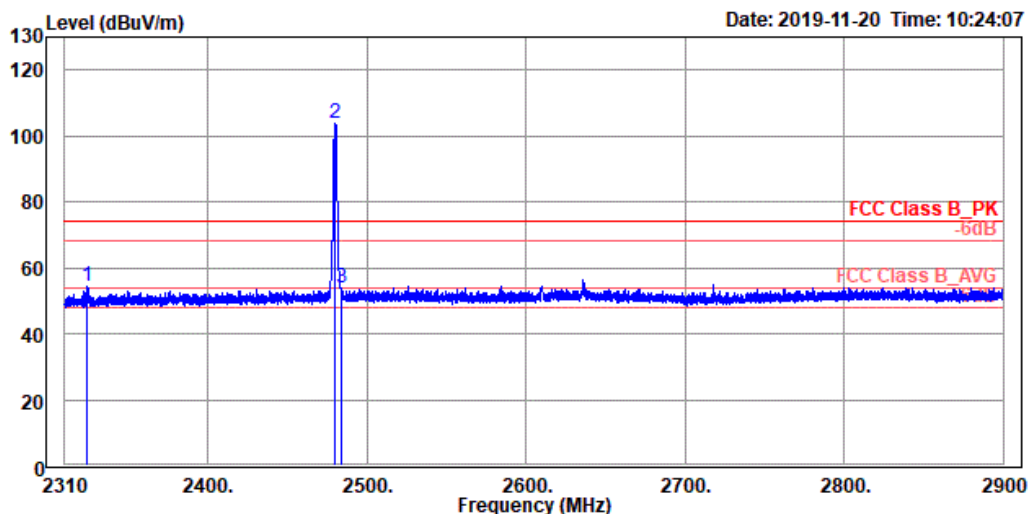


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK Vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2323.81	54.60	17.84	36.76	74.00	-19.40	315	213	Peak
2 *	2480.00	103.60	65.84	37.76	74.00	29.60	315	213	Peak
3	2483.93	53.68	15.92	37.76	74.00	-20.32	315	213	Peak

Spurious Emissions, TX Mode, 9kHz-30MHz




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

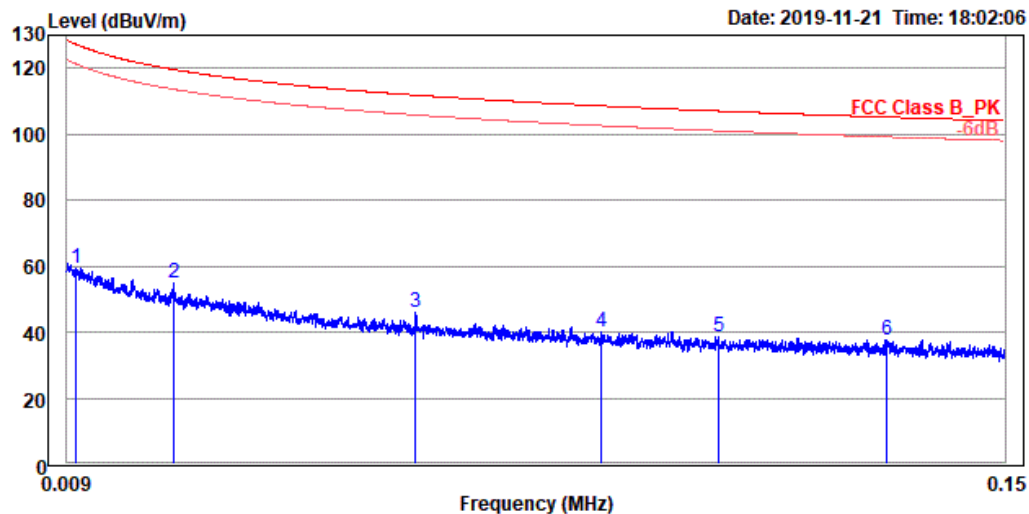

Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.01	59.37	-19.19	78.56	127.21	-67.84	100	310	QP
2	0.03	55.01	-16.63	71.64	119.62	-64.61	100	360	QP
3	0.06	45.75	-17.72	63.47	111.84	-66.09	100	224	QP
4	0.09	40.15	-20.36	60.51	108.58	-68.43	100	40	QP
5	0.11	38.72	-20.13	58.85	107.02	-68.30	100	9	QP
6	0.13	37.74	-19.65	57.39	105.18	-67.44	100	268	QP

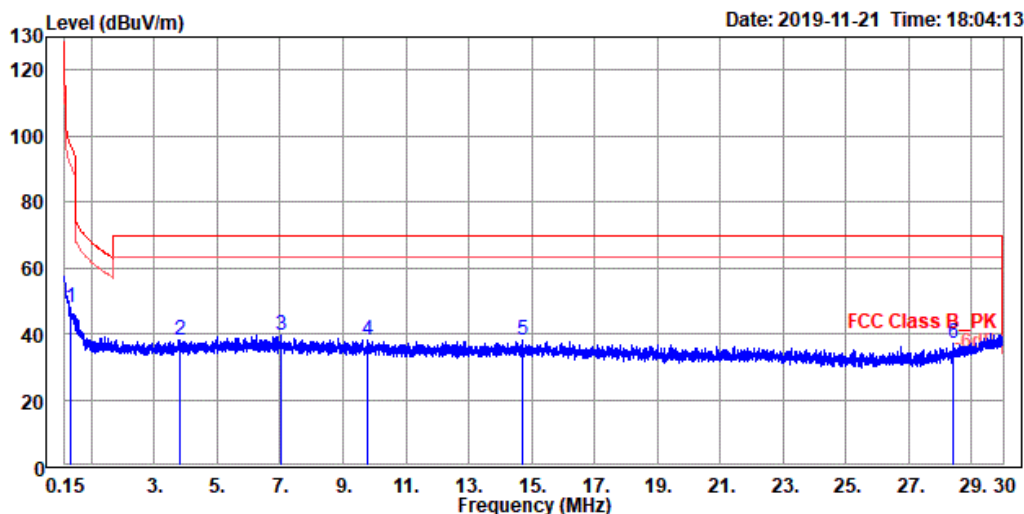


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.32	48.15	-1.82	49.97	97.41	-49.26	100	185	QP
2	3.79	38.31	0.01	38.30	69.50	-31.19	100	136	QP
3	7.02	39.51	1.16	38.35	69.50	-29.99	100	346	QP
4	9.77	37.90	0.26	37.64	69.50	-31.60	100	118	QP
5	14.71	37.96	0.27	37.69	69.50	-31.54	100	88	QP
6	28.42	37.30	1.30	36.00	69.50	-32.20	100	40	QP

Spurious Emissions, TX Mode, 30MHz-1GHz




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

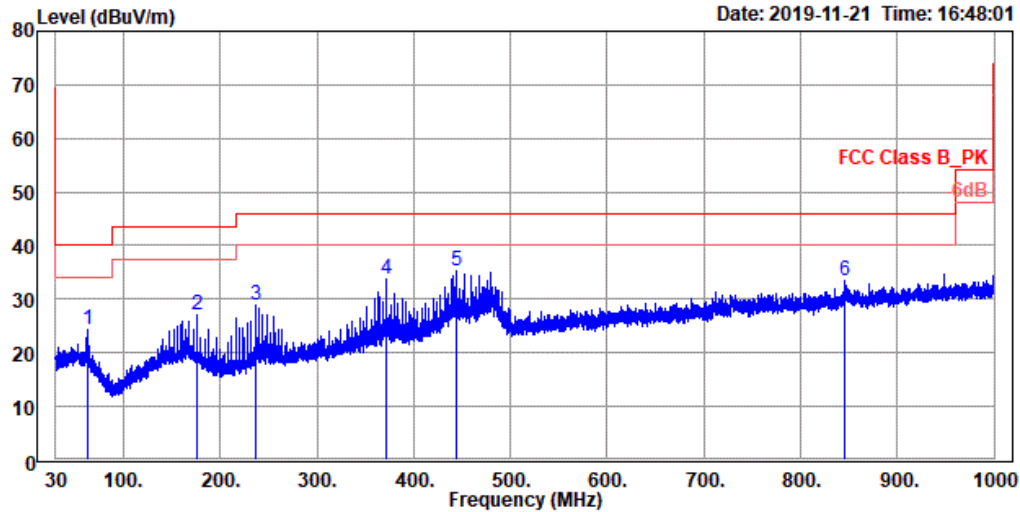

Site : 3m_Semi-Anechoic Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Powersetting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read	Limit	Over	APos	TPos	Remark
	MHz	dBuV/m	Level	Factor	Line	Limit		
			dBuV	dB/m	dBuV/m	dB	cm	deg
1	62.69	24.23	32.90	-8.67	40.00	-15.77	300	183 QP
2	175.99	26.99	34.91	-7.92	43.50	-16.51	200	196 QP
3	235.93	28.80	37.28	-8.48	46.00	-17.20	100	203 QP
4	372.02	33.81	38.97	-5.16	46.00	-12.19	100	239 QP
5	444.00	35.18	39.03	-3.85	46.00	-10.82	200	93 QP
6	846.45	33.33	30.98	2.35	46.00	-12.67	100	253 QP

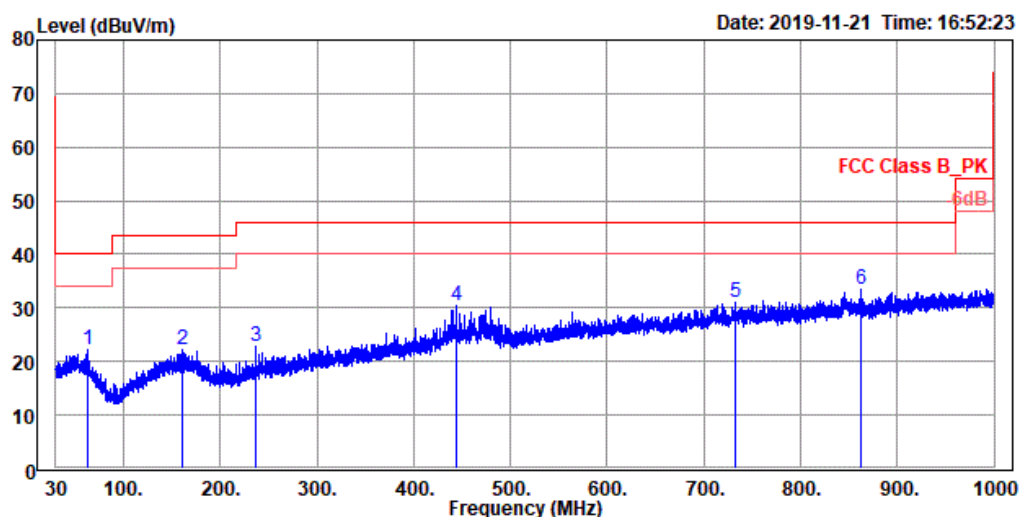


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	62.40	22.17	30.80	-8.63	40.00	-17.83	300	251	QP
2	159.98	22.28	29.74	-7.46	43.50	-21.22	200	288	QP
3	236.03	22.75	31.23	-8.48	46.00	-23.25	200	248	QP
4	444.00	30.28	34.13	-3.85	46.00	-15.72	236	0	QP
5	733.15	31.06	30.28	0.78	46.00	-14.94	200	95	QP
6	862.16	33.46	30.91	2.55	46.00	-12.54	300	73	QP

Spurious Emissions, TX Mode, 1GHz-26.5GHz




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel:+886-2172-1000 Fax:+886-2172-1322

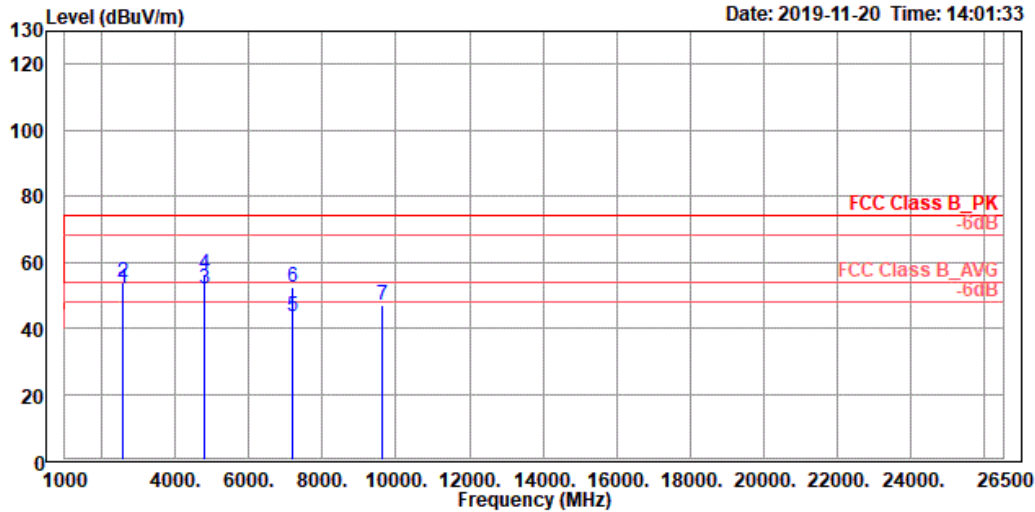


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Powersetting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	2558.00	51.67	65.44	-13.77	54.00	-2.33	100	72	Average
2	2558.00	53.68	67.45	-13.77	74.00	-20.32	100	72	Peak
3 !	4804.00	51.87	61.89	-10.02	54.00	-2.13	101	338	Average
4	4804.00	56.45	66.47	-10.02	74.00	-17.55	101	338	Peak
5	7206.00	43.44	51.17	-7.73	54.00	-10.56	100	0	Average
6	7206.00	52.48	60.21	-7.73	74.00	-21.52	100	0	Peak
7	9607.00	47.16	52.45	-5.29	74.00	-26.84	100	116	Peak

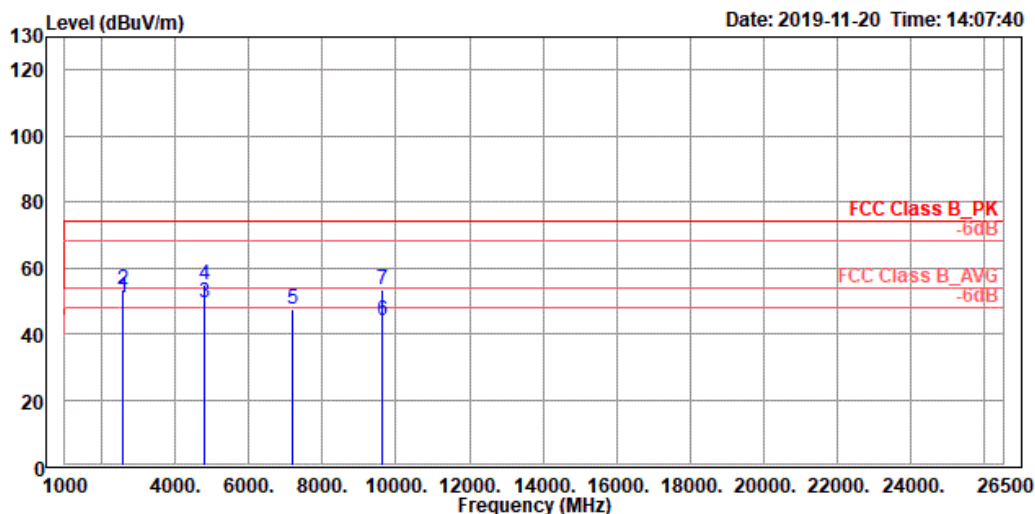


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2402MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	2558.00	51.12	64.89	-13.77	54.00	-2.88	311	12	Average
2	2558.00	53.26	67.03	-13.77	74.00	-20.74	311	12	Peak
3 !	4804.00	49.49	59.51	-10.02	54.00	-4.51	305	6	Average
4	4804.00	54.62	64.64	-10.02	74.00	-19.38	305	6	Peak
5	7206.00	47.29	55.02	-7.73	74.00	-26.71	100	291	Peak
6	9608.00	44.00	49.27	-5.27	54.00	-10.00	102	116	Average
7	9608.00	53.55	58.82	-5.27	74.00	-20.45	102	116	Peak

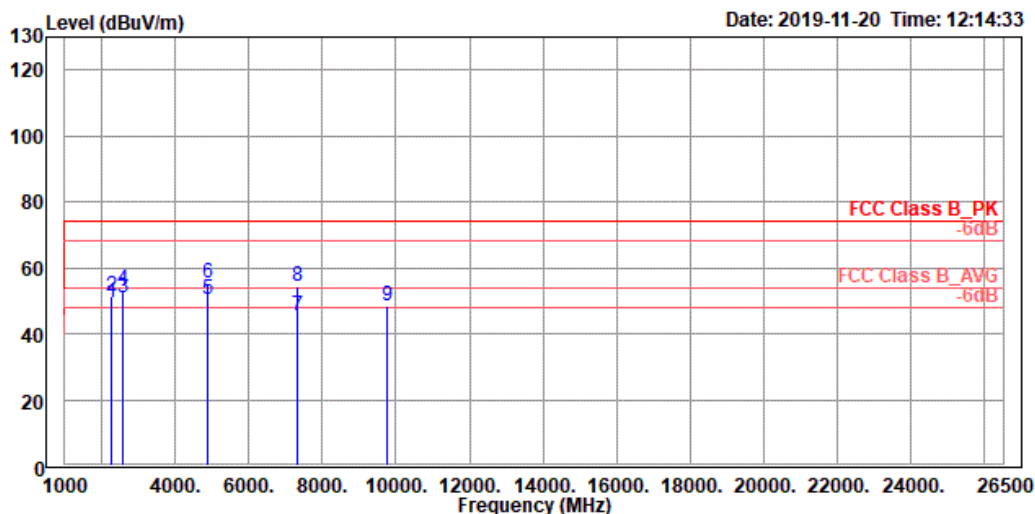


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	2284.00	49.35	64.60	-15.25	54.00	-4.65	350	344	Average
2	2284.00	51.62	66.87	-15.25	74.00	-22.38	350	344	Peak
3 !	2596.00	51.16	65.04	-13.88	54.00	-2.84	342	343	Average
4	2596.00	53.44	67.32	-13.88	74.00	-20.56	342	343	Peak
5 !	4880.00	50.48	60.54	-10.06	54.00	-3.52	282	311	Average
6	4880.00	55.46	65.52	-10.06	74.00	-18.54	282	311	Peak
7	7320.00	45.65	53.39	-7.74	54.00	-8.35	100	0	Average
8	7320.00	54.37	62.11	-7.74	74.00	-19.63	100	0	Peak
9	9760.00	48.66	53.62	-4.96	74.00	-25.34	200	338	Peak

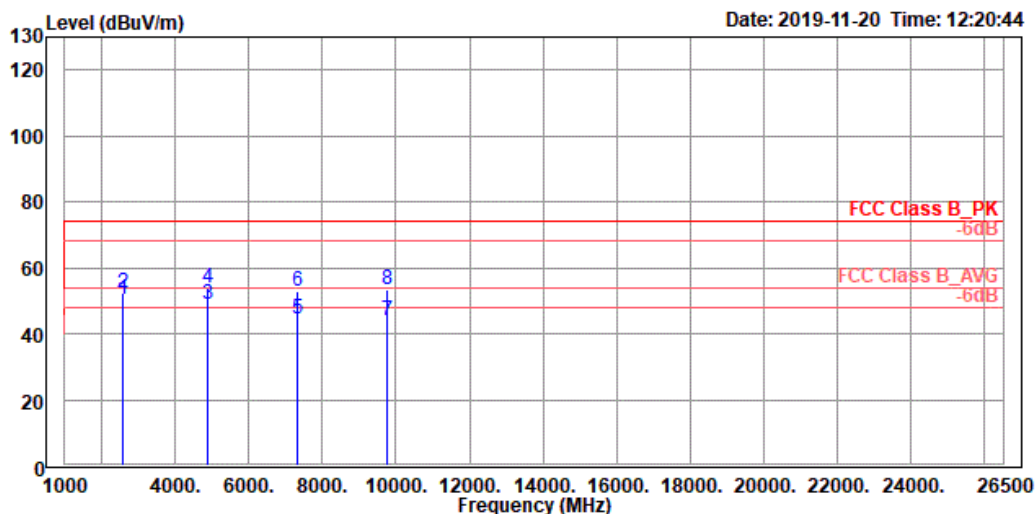


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2440MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1 !	2596.00	50.44	64.32	-13.88	54.00	-3.56	300	0	Average
2	2596.00	52.24	66.12	-13.88	74.00	-21.76	300	0	Peak
3 !	4880.00	48.75	58.81	-10.06	54.00	-5.25	267	9	Average
4	4880.00	53.79	63.85	-10.06	74.00	-20.21	267	9	Peak
5	7320.00	44.24	51.98	-7.74	54.00	-9.76	111	294	Average
6	7320.00	52.78	60.52	-7.74	74.00	-21.22	111	294	Peak
7	9760.00	44.06	49.02	-4.96	54.00	-9.94	100	114	Average
8	9760.00	53.39	58.35	-4.96	74.00	-20.61	100	114	Peak

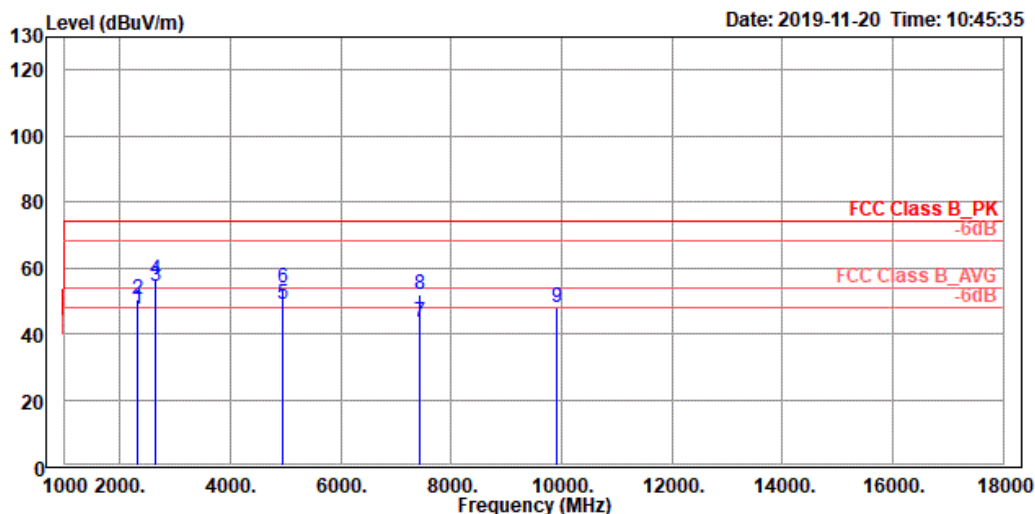

Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK horizontal
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2323.00	47.44	62.37	-14.93	54.00	-6.56	134	109	Average	
2	2323.00	50.25	65.18	-14.93	74.00	-23.75	134	109	Peak	
3 *	2636.00	54.29	68.15	-13.86	54.00	0.29	120	64	Average	limit=84.8
4	2636.00	56.33	70.19	-13.86	74.00	-17.67	120	64	Peak	limit=89.6
5 !	4960.00	48.74	58.74	-10.00	54.00	-5.26	100	342	Average	
6	4960.00	53.75	63.75	-10.00	74.00	-20.25	100	342	Peak	
7	7440.00	43.42	51.08	-7.66	54.00	-10.58	108	360	Average	
8	7440.00	51.98	59.64	-7.66	74.00	-22.02	108	360	Peak	
9	9920.00	48.19	52.81	-4.62	74.00	-25.81	300	324	Peak	

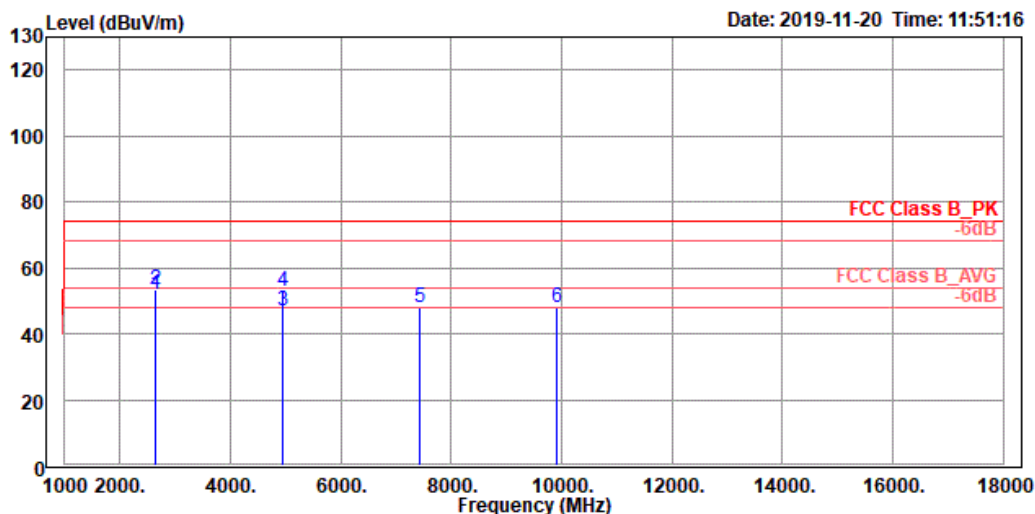


Site : 3m_Semi-Anechoic_Chamber(966_C)
Condition : FCC Class B_PK vertical
Test Engineer: Simon Tsai
Product : Sound Partner
Model NO : AN-SS2
Mode : TX-LE-2480MHz
Power setting : Default
Test Rating : 5vdc
Tmp/Hum : 26°C/63.5%
Plane : E2

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1 !	2635.00	51.67	65.53	-13.86	54.00	-2.33	300	360	Average	
2	2635.00	53.60	67.46	-13.86	74.00	-20.40	300	360	Peak	
3	4960.00	46.89	56.89	-10.00	54.00	-7.11	343	360	Average	
4	4960.00	52.79	62.79	-10.00	74.00	-21.21	343	360	Peak	
5	7439.00	48.05	55.71	-7.66	74.00	-25.95	300	308	Peak	
6	9920.00	47.87	52.49	-4.62	74.00	-26.13	100	142	Peak	

Spurious Emissions, AC Mains




TUV Rheinland Taiwan Ltd.
11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
Tel:+886-2172-7000 Fax:+886-2528-0018

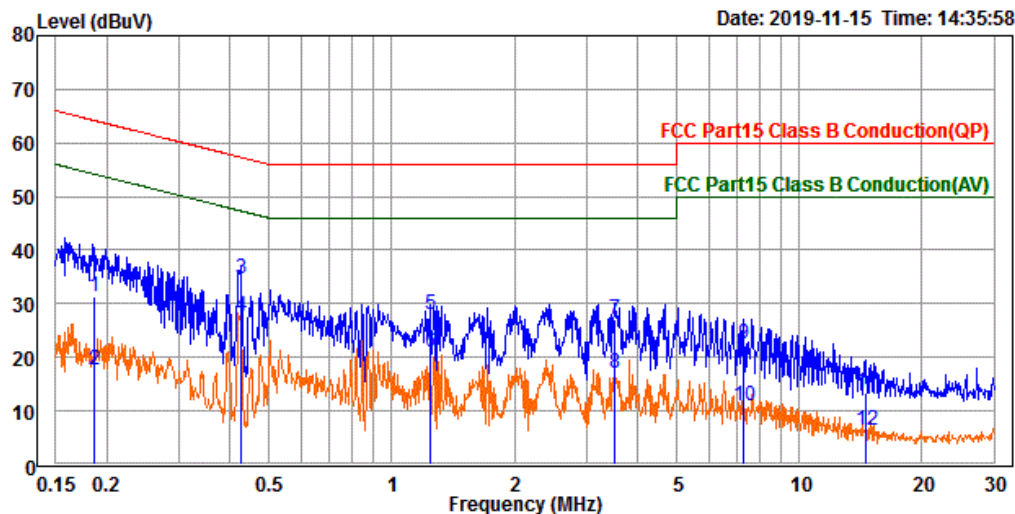

Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) line1
Test Engineer: Simon tsai
Product : Sound Partner
Model No. : AN-SS2
Test Rating : 120Vac/60Hz
Tmp/Hum : 21.3°C/45%
Memo : BSG7W5-UXXXXYYM
: I/P:100-240Vac,0.3A 50/60Hz
: O/P:5V 0.5A

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.187	21.86	9.61	31.47	64.18	-32.71	QP
2	0.187	7.89	9.61	17.50	54.18	-36.68	Average
3	0.425	25.12	9.62	34.74	57.35	-22.61	QP
4	0.425	18.05	9.62	27.67	47.35	-19.68	Average
5	1.241	18.33	9.62	27.95	56.00	-28.05	QP
6	1.241	11.41	9.62	21.03	46.00	-24.97	Average
7	3.518	17.48	9.67	27.15	56.00	-28.85	QP
8	3.518	7.49	9.67	17.16	46.00	-28.84	Average
9	7.320	12.84	9.70	22.54	60.00	-37.46	QP
10	7.320	1.27	9.70	10.97	50.00	-39.03	Average
11	14.563	3.64	9.76	13.40	60.00	-46.60	QP
12	14.563	-3.52	9.76	6.24	50.00	-43.76	Average

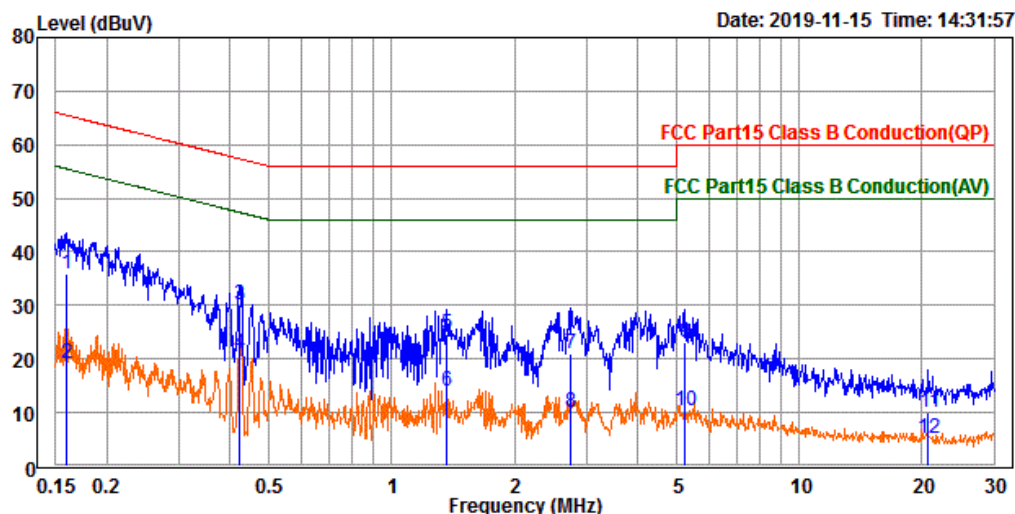

Trace: 1

Site : Conduction room
Condition : FCC Part15 Class B Conduction(QP) neutral
Test Engineer: Simon tsai
Product : Sound Partner
Model No. : AN-SS2
Test Rating : 120Vac/60Hz
Tmp/Hum : 21.3°C/45%
Memo : BSG7W5-UXXXXYYM
: I/P:100-240Vac,0.3A 50/60Hz
: O/P:5V 0.5A

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.159	26.16	9.62	35.78	65.50	-29.72	QP
2	0.159	9.52	9.62	19.14	55.50	-36.36	Average
3	0.423	20.57	9.63	30.20	57.39	-27.19	QP
4	0.423	11.45	9.63	21.08	47.39	-26.31	Average
5	1.358	15.14	9.63	24.77	56.00	-31.23	QP
6	1.358	4.46	9.63	14.09	46.00	-31.91	Average
7	2.756	11.44	9.66	21.10	56.00	-34.90	QP
8	2.756	0.31	9.66	9.97	46.00	-36.03	Average
9	5.216	13.31	9.69	23.00	60.00	-37.00	QP
10	5.216	0.55	9.69	10.24	50.00	-39.76	Average
11	20.746	0.24	9.83	10.07	60.00	-49.93	QP
12	20.746	-4.65	9.83	5.18	50.00	-44.82	Average